

(19)



**Octrooicentrum  
Nederland**

(11)

**2032142**

**(12) B1 OCTROOI**

(21)

Aanvraagnummer: **2032142**

(51)

Int. Cl.:  
**G01G 19/06 (2023.01)**

(22)

Aanvraag ingediend: **13 juni 2022**

(62)

(30)

Voorrang:

-

(41)

Aanvraag ingeschreven:  
**20 december 2023**

(43)

Aanvraag gepubliceerd:  
-

(47)

Octrooi verleend:  
**20 december 2023**

(45)

Octrooischrift uitgegeven:  
**22 december 2023**

(73)

Octrooihouder(s):  
**Meyn Food Processing Technology B.V.  
te Oostzaan**

(72)

Uitvinder(s):  
**Jan Willem Hagendoorn te Oostzaan  
Aloysius Christianus Maria van Steijn  
te Oostzaan  
Izzet Ozkan te Oostzaan  
Patrick Keesman te Oostzaan  
Eric de Jong te Oostzaan  
Nico Willem van Vliet te Oostzaan**

(74)

Gemachtigde:  
**mr. ir. J. van Breda c.s. te Amsterdam**

(54)

**An apparatus for weighing poultry moving in a conveyor line**

(57)

An apparatus (1) for weighing poultry in a conveyor line (2), comprising carriers (3) for the poultry, which carriers (3) are linked to each other by a driving chain (12) of the conveyor line (2), said conveyor line (2) comprising at least a curved track section (2') and a weighing track section (2''), wherein a weighing station is located along the weighing track section (2''), and that the apparatus (1) further comprises a chain (12) tension control mechanism that alleviates tension in the driving chain (12) at or near the weighing station along the weighing track section (2''), wherein the chain tension control mechanism comprises a rotatable wheel (6) having its circumference following the curved track section (2') and pass the weighing track section (2''), which rotatable wheel (6) supports a series of engaging units (5) that engage the chain (12) and/or the carriers (3) in the curved track section (2') to tension the chain (12) and disengage the chain (12) and/or the carriers (3) in the weighing track section (2'') to release tension in the chain (12).

An apparatus for weighing poultry moving in a conveyor line

The invention relates to an apparatus for weighing poultry in a conveyor line, comprising carriers for the poultry, which carriers are linked to each other by a driving chain, said conveyor line comprising at least a curved track section and a weighing track section, wherein a weighing station is located along the weighing track section, and that the apparatus further comprises a chain tension control mechanism that alleviates tension in the driving chain at or near the weighing station along the weighing track section.

Such an apparatus is disclosed by GB 2 125 174 B, and by WO 2013/154427, which documents are about 30 years apart which demonstrates that the industry is continuously looking for improvement of the weighing operation on the poultry while it is moving in the conveyor line.

The chain tension control mechanism serves the purpose to reduce inaccuracies during the weighing operation which are caused by the chain obscuring the weight measurement. As particularly WO 2013/154427 demonstrates, the prior art has evolved into a complicated and accordingly relatively costly solution. The construction of WO 2013/154427 with two subsequent pulleys defining a path following two curved track sections in opposite directions, and a weighing track section in between those two curved track sections may disadvantageously give rise to swinging of the poultry, which is undesirable since it deteriorates the accuracy of the weight measurement. It also poses a risk of cross-contamination between the conveyed poultry, because their swinging may result in neighbouring poultry touching each other.

It is an object of the invention to simplify the design of the apparatus for weighing poultry when moving in a conveyor line, and to realize cost benefits without compromising the weight accuracy.

It is further an object of the invention to prevent progressive swinging motion of the poultry while being conveyed, particularly when passing through the weighing station.

The apparatus of the invention is therefore provided with features according to one or more of the appended claims.

According to a first aspect of the invention the chain tension control mechanism comprises a rotatable wheel having its circumference following the curved track section and pass the weighing track section, which rotatable wheel supports a series of engaging units that engage the chain and/or the carriers in the curved track section to tension the chain and is disengaged from the chain and the carriers in the weighing track section to release tension in the chain. With such a straightforward solution it is possible to avoid the complicated machinery of the prior art, whereas its effectiveness is uncompromised.

Suitably the engaging units are movable in a radial direction of the rotatable wheel for engaging and disengaging the chain and/or the carriers.

In a suitable embodiment the engaging units are slidably mounted on shafts that are provided on the rotatable wheel.

In a preferable embodiment of the apparatus of the invention, the apparatus comprises a stationary guide ring and the engaging units that are supported by the rotatable wheel are each provided with a guide wheel running in a track of the stationary guide ring. This enables that the track on the stationary guide ring can cause the engaging units to engage the chain and/or the carrier in the curved track section, and to be disengaged from the chain and the carriers in the weighing track section. This is an effective and reliable way to have the engaging units operate on the chain and/or the carriers exactly at the desired moment, that is when the poultry is passing the weighing station at the weighing track section.

To accommodate any possible curvature that may be applied in the curved track section, it is desirable that the track of the stationary guide ring which causes radial movement of the engaging units with reference to the rotatable wheel, has

a first track section and a second track section wherein the first track section is farther away from a rotational axle of the rotatable wheel than the second track section so as to arrange that the first track section causes tensioning of the chain and the second track section causes releasing tension in the chain.

In a preferred embodiment the weighing track section

is delimited both at its entry section and at its exit section with at least part of the curved track section. Since the weighing track section represents the shortest distance possible between the curved track sections on the opposite ends of the weighing track section, this measure contributes to releasing the tension in the chain when this part of the chain is in the region of the weighing track section.

To support the accuracy of the weight measurement it is preferred that the weighing track section is free from a direct connection with the curved track section, particularly when the weighing track section is suitably provided with a load cell of the weighing station.

The invention will hereinafter be further elucidated with reference to the drawing of an exemplary embodiment of an apparatus according to the invention that is not limiting as to the appended claims.

In the drawing:

-figure 1A and 1B show an apparatus of the invention in an oblique top view and in a bottom view, respectively;

-figure 2 shows one chain engaging unit of the apparatus of the invention;

-figure 3 shows a stationary guide ring for moving the chain engaging units of figure 2 in a radial direction of the guide ring; and

-figure 4 shows a load cell at the weighing track section of the apparatus of the invention.

Whenever in the figures the same reference numerals are applied, these numerals refer to the same parts.

Turning first to figure 1A and figure 1B, it shows an apparatus 1 for weighing poultry (the poultry is not shown, but the skilled person is generally familiar with how poultry looks) that are conveyable by carriers 3 in a conveyor line 2 which usually is embodied with a T-track. This is however not essential. The carriers 3 are supported by wheels 4 that run in the track of the conveyor line 2, and the carriers 3 are linked to each other by a driving chain 12. The conveyor line 2 comprises at least a curved track section 2' and a weighing track section 2'', which is better shown in figure 3. A weighing station with a load cell 14 of the weighing station is located along the weighing track section 2'', as depicted in figure 4.

It is further shown in figure 4 that the weighing track section 2'' is free from any direct connection with the curved track section 2'.

The apparatus 1 of the invention comprises a chain 12  
5 tension control mechanism that alleviates tension in the driving chain 12 in the part of the chain 12 being at or near the weighing station along the weighing track section 2''.

According to the invention the chain tension control  
10 mechanism comprises a rotatable wheel 6 having its circumference 6' following part of the curved track section 2' and also passing the weighing track section 2'' (see figure 1B and figure 3) where the weighing station is located. The rotatable wheel 6 supports a series of engaging units 5 that are movable  
15 on account of the rotation of the wheel 6 and also radially movable with reference to the wheel 6 so as to engage the chain 12 or carriers 3 in the curved track section 2' to tension the chain 12, and that disengage from the chain 12 and carriers 3 in the weighing track section 2'' to release tension in the  
20 chain 12. This effect is preferably brought about by providing that the apparatus comprises a stationary guide ring 11 (see figure 3) and that the engaging units 5 that are supported by the rotatable wheel 6 are each provided with a guide wheel 10 running in a track 13 of the stationary guide ring 11.

Figure 3 shows that the track 13 which causes radial  
25 movement of the engaging units 5 with reference to the rotatable wheel 6 has a first track section 13' and a second track section 13'', wherein the first track section 13' is farther away from a rotational axle 8 of the rotatable wheel 6 than the second track section 13'' so as to arrange that the first track  
30 section 13' causes tensioning of the chain 12 and the second track section 13'' causes releasing tension in the chain 12. It is thus the track 13 of the stationary guide ring 11 which causes that the engaging units 5 engage the chain 12 and/or the carrier 13 in the curved track section 2', and to disengage  
35 from the chain 12 and the carriers 13 in the weighing track section 2''.

The weighing track section 2'' is delimited at both  
its entry section and at its exit section with at least part of  
the curved track section 2'. Since the weighing track section  
40 2'' represents the shortest distance possible between the

curved track sections 2' on the opposite ends of the weighing track section 2'', this contributes to releasing the tension in the part of the chain 12 which is in the region of the weighing track section 2''. This also applies when the weighing track section 2'' is curved.

Figure 2 shows that the engaging units 5 are slidable on shafts 7 that are at one end mounted to supports 15 on the rotatable wheel 6. This is however not essential. Also other ways of mounting the engaging units 5 on the rotatable wheel 6 are conceivable.

During use the apparatus 1 of the invention operates as follows.

As the carriers 3 are conveyed in a conveying direction T, they reach a curved track section 2' of the conveyor line 2. The chain 12 is driven by driven means as known in the art (not depicted) to convey the carriers 3 along the track. The curved track section has a radius R1. As the carriers 3 reach the curved track section 2', they are engaged by the engaging units 5. As explained above the engaging units 5 are slidably mounted on shafts 7 on the rotatable wheel 6. Thus, the engaging units 5 are conveyed along the curved track section 2' by rotation about a rotational axis 8 of the rotatable wheel 6, and are also radially movably relative to the axis 8 through sliding over the shafts 7.

As will be clear from combining figure 2 with figure 3, the guide track 13 of the stationary guide ring 11 guides the engaging units 5 via their wheels 10 that run in the guide track 13. The first guide track section 13' exhibits a radius R2, and the second track section 13'' near the weighing track section 2'' is closer to the axle 8, e.g. by exhibiting a radius R3 which is smaller than R2. In a different embodiment the second track section 13'' may be rectilinear.

As explained above, the carriers 3 are coupled to the driving chain 12 so that the carriers 3 move in the direction T towards the beginning of the curved track section 2'. There, the chain engaging units 5, which are rotating together with the rotatable wheel 6, engage the chain 12 and/or the carriers 3 with their engaging means 9. The rotatable wheel 6 is arranged to rotate because the chain 12 drives the engaging units 5 as they are contacting the chain of carriers. This means that

there is no need for a separate actuator driving the wheel 6, although it can be added as long as the motion of the rotating motion of the engaging units 5 around axle 8 of the rotatable wheel 6 is synchronized with the motion of the carriers 3.

5           As the engaging units 5 are being conveyed, their guide wheel 10 is moved along the track 13 of the stationary guide ring 11. The engaging units 5 follow a curved path above the curved track section 2'. However, once a unit 5 reaches the weighing track section 2'', the engaging units 5 slide radially  
10 toward the axle 8 of the rotating wheel 6 because the radius R3 of the track 13 near the location of the weighing track section 2'' is smaller than the radius R2 of the track 13 following the curved track section 2'. Due to the radial inward movement of the engaging units 5, the chain 12 is released from the engaging  
15 means 9 of the engaging units 5 at the weighing track section 2'.

          As the wheel 4 of a single carrier 3 reaches the weighing track section 2'', the load cell 14 measures the weight of the carrier 3 transporting the poultry. Since at the weighing  
20 track section 2'' the tension is removed from the chain 12, the distortion of the weight measurements due to the tension of the chain 12 is reduced. Once the single carrier 3 leaves the weighing track section 2'', the engaging unit 5 moves again radially away from the rotation axle 8 of the rotatable wheel 6  
25 and its engaging means 9 engages again the chain 12 or its carriers to provide tension to the chain 12.

          Embodiments of the present invention can include every combination of features that are disclosed herein independently from each other. Although the invention has been discussed in  
30 the foregoing with reference to an exemplary embodiment of the apparatus of the invention, the invention is not restricted to this particular embodiment which can be varied in many ways without departing from the invention. The discussed exemplary embodiment shall therefore not be used to construe the appended  
35 claims strictly in accordance therewith. On the contrary the embodiment is merely intended to explain the wording of the appended claims without intent to limit the claims to this exemplary embodiment. The scope of protection of the invention shall therefore be construed in accordance with the appended  
40 claims only, wherein a possible ambiguity in the wording of the

claims shall be resolved using this exemplary embodiment.

Variations and modifications of the present invention will be obvious to those skilled in the art and it is intended to cover in the appended claims all such modifications and equivalents. The entire disclosures of all references, applica-  
5 tions, patents, and publications cited above are hereby incorporated by reference. Unless specifically stated as being "essential" above, none of the various components or the interrelationship thereof are essential to the operation of the inven-  
10 tion. Rather, desirable results can be achieved by substituting various components and/or reconfiguration of their relationships with one another.

Aspects of the invention are itemized in the following section.

15 1. An apparatus (1) for weighing poultry in a conveyor line (2), comprising carriers (3) for the poultry, which carriers (3) are linked to each other by a driving chain (12), said conveyor line (2) comprising at least a curved track section (2') and a weighing track section (2''), wherein a weighing  
20 station is located along the weighing track section (2''), and that the apparatus (1) further comprises a chain tension control mechanism that alleviates tension in the driving chain (12) at or near the weighing station along the weighing track section (2''), characterized in that the chain tension control  
25 mechanism comprises a rotatable wheel (6) having its circumference following the curved track section (2') and pass the weighing track section (2''), which rotatable wheel (6) supports a series of engaging units (5) that engage the chain (12) and/or the carriers (3) in the curved track section (2') to  
30 tension the chain (12) and is disengaged from the chain (12) and the carriers (3) in the weighing track section (2'') to release tension in the chain (12).

2. The apparatus of claim 1, characterized in that the engaging units (5) are movable in a radial direction of the ro-  
35 tatable wheel (6) for engaging and disengaging the chain (12) and/or the carriers (3).

3. The apparatus of claim 1 or 2, characterized in that the engaging units (5) are slidably mounted on shafts (7) that are provided on the rotatable wheel (6).

40 4. The apparatus of any one of claims 1 - 3, charac-

terized in that the apparatus comprises a stationary guide ring (11) and the engaging units (5) that are supported by the rotatable wheel (6) are each provided with a guide wheel (10) running in a track (13) of the stationary guide ring (11).

5           5. The apparatus according to claim 4, characterized in that the track (13) of the stationary guide ring (11) is arranged to cause that the engaging units (5) engage the chain (12) and/or the carrier (13) in the curved track section (2'), and to disengage the chain (12) and/or the carriers (13) in the  
10 weighing track section (2'').

          6. The apparatus according to claim 4 or 5, characterized in that the track (13) which causes radial movement of the engaging units (5) with reference to the rotatable wheel (6) has a first track section (13') and a second track section  
15 (13'') wherein the first track section (13') is farther away from a rotational axle (8) of the rotatable wheel (6) than the second track section (13'') so as to arrange that the first track section (13') causes tensioning of the chain (12) and the second track section (13'') causes releasing tension in the  
20 chain (12).

          7. The apparatus of claim 1 or according to any one of claims 1 - 6, characterized in that the weighing track section (2'') is delimited at its entry section and at its exit section with at least part of the curved track section (2').

25           8. The apparatus of any one of claims 1 - 7, characterized in that the weighing track section (2'') is free from a direct connection with the curved track section (2').

          9. The apparatus of any one of claims 1 - 8, characterized in that the weighing station is provided with a load  
30 cell (14).

## CONCLUSIES

1. Inrichting (1) voor het wegen van pluimvee in een transportlijn (2), omvattende dragers (3) voor het pluimvee, welke dragers (3) met elkaar verbonden zijn door een aandrijfketting (12), welke transportlijn (2) tenminste een gebogen baangedeelte (2') en een weegbaangedeelte (2'') omvat, waarbij zich langs het weegbaangedeelte (2'') een weegstation bevindt, en dat de inrichting (1) voorts een kettingspanningsregelmechanisme bezit dat spanning in de aandrijfketting (12) op of nabij het weegstation langs het weegbaangedeelte (2'') verlicht, **met**  
10 **het kenmerk, dat** het kettingspanningsregelmechanisme een roterbaar wiel (6) omvat waarvan zijn omtrek het gebogen baangedeelte (2') volgt en het weegbaangedeelte (2'') passeert, welk roterbaar wiel (6) een reeks aangrijpeenheden (5) ondersteunt die aangrijpen op de ketting (12) en/of de dragers (3) in het  
15 gebogen baangedeelte (2') om de ketting (12) te spannen en is losgekoppeld van de ketting (12) en de dragers (3) in het weegbaangedeelte (2'') om de spanning in de ketting (12) te vermindere-

2. Inrichting volgens conclusie 1, **met het kenmerk,**  
20 **dat** de aangrijpeenheden (5) in radiale richting van het roteerbare wiel (6) beweegbaar zijn voor het aan- en ontkoppelen van de ketting (12) en/of de dragers (3).

3. Inrichting volgens conclusie 1 of 2, **met het kenmerk, dat** de aangrijpeenheden (5) verschuifbaar zijn gemonteerd  
25 op assen (7) die zijn voorzien op het roteerbare wiel (6).

4. Inrichting volgens een van de conclusies 1-3, **met het kenmerk, dat** de inrichting een stationaire geleidingsring (11) omvat en de aangrijpeenheden (5) die afgesteund zijn op het roteerbare wiel (6) elk zijn voorzien van een geleidings-  
30 wiel (10) dat in een baan (13) van de stationaire geleidingsring (11) loopt.

5. Inrichting volgens conclusie 4, **met het kenmerk, dat** de baan (13) van de stationaire geleidingsring (11) is ingericht om ervoor te zorgen dat de aangrijpeenheden (5) aan-  
35 grijpen op de ketting (12) en/of de drager (13) in het gebogen baangedeelte (2'), en om te ontkoppelen van de ketting (12) en/of de dragers (13) in het weegbaangedeelte (2'').

6. Inrichting volgens conclusie 4 of 5, **met het kenmerk, dat** de baan (13) die de radiale beweging van de aangrijpeenheden (5) veroorzaakt ten opzichte van het roteerbare wiel (6) een eerste baangedeelte (13') en een tweede baangedeelte (13'') heeft, waarbij het eerste baangedeelte (13') verder weg is van een roterende as (8) van het roteerbare wiel (6) dan het tweede baangedeelte (13'') zodat het eerste baangedeelte (13') zorgt voor het spannen van de ketting (12) en het tweede baangedeelte (13'') zorgt voor het vrijgeven van spanning in de ketting (12).

7. Inrichting volgens conclusie 1 of volgens een van de conclusies 1-6, **met het kenmerk, dat** het weegbaangedeelte (2'') bij zijn ingangsgedeelte en bij zijn uitgangsgedeelte is begrensd met ten minste een deel van het gebogen baangedeelte (2').

8. Inrichting volgens een van de conclusies 1-7, **met het kenmerk, dat** het weegbaangedeelte (2'') vrij is van een directe verbinding met het gebogen baangedeelte (2').

9. Inrichting volgens een van de conclusies 1-8, **met het kenmerk, dat** het weegstation is voorzien van een weegcel (14).

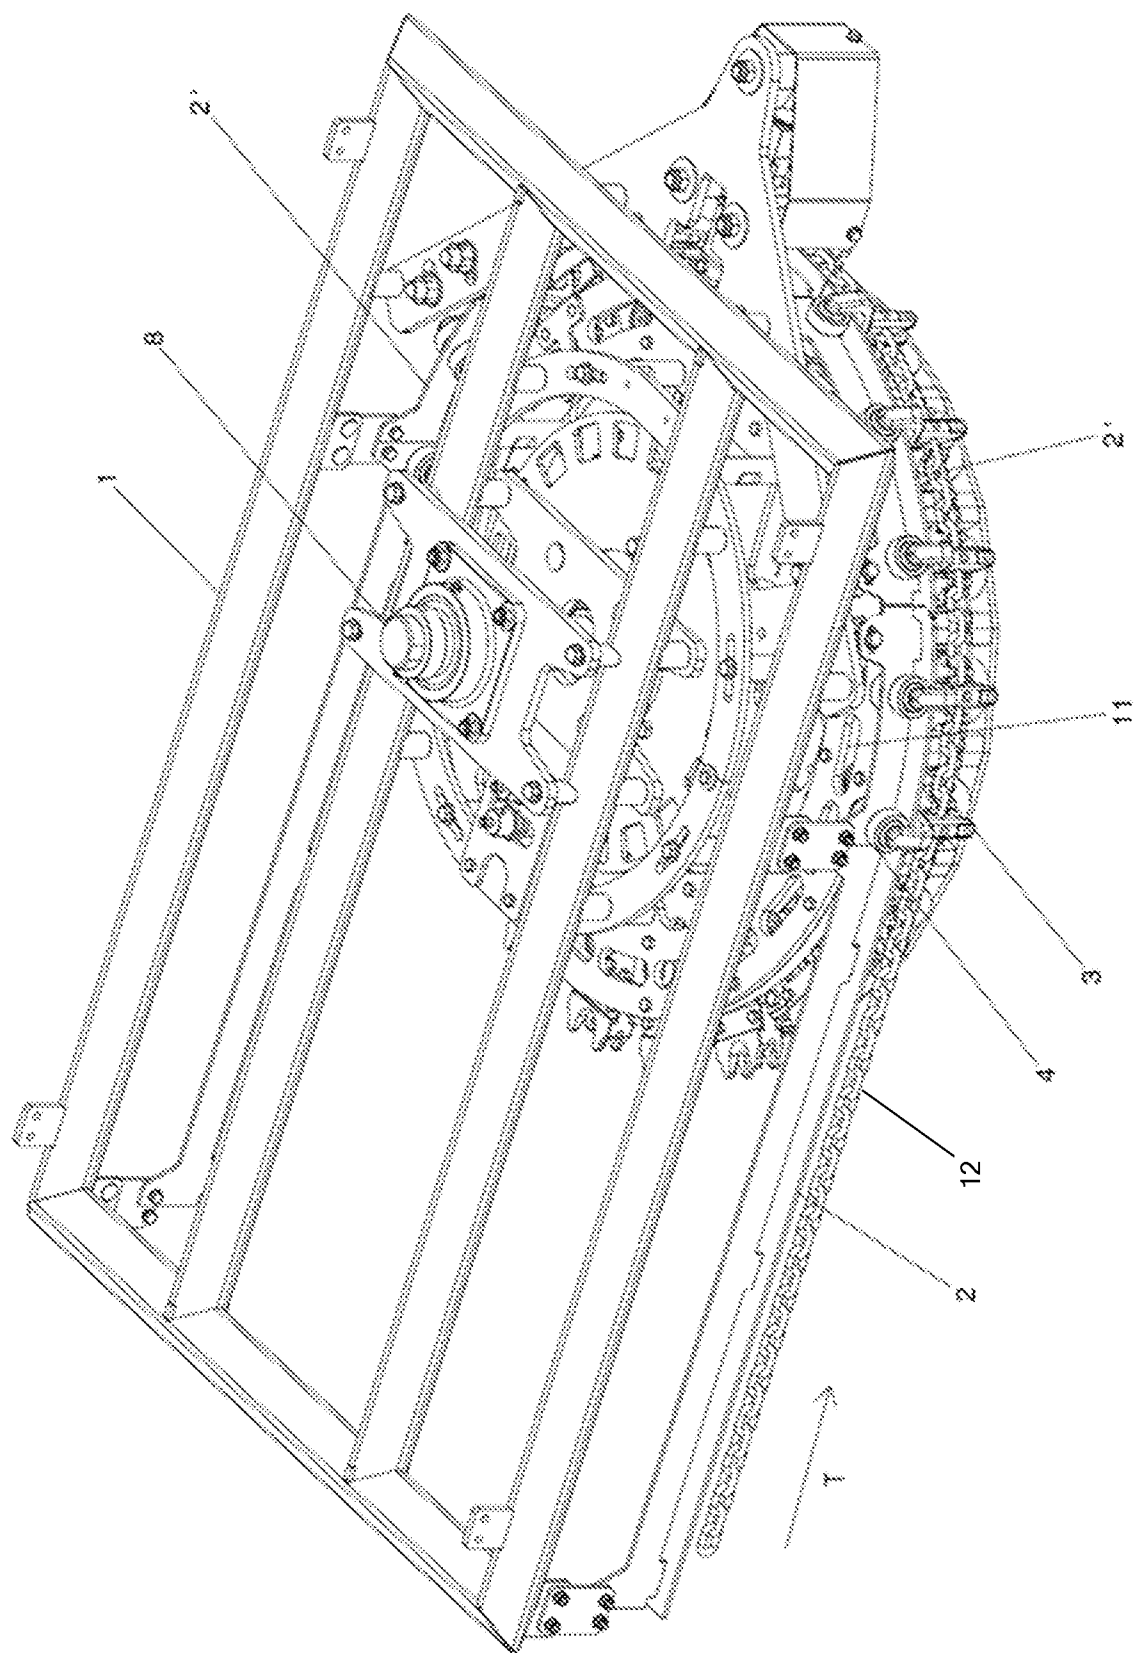


Fig. 1A

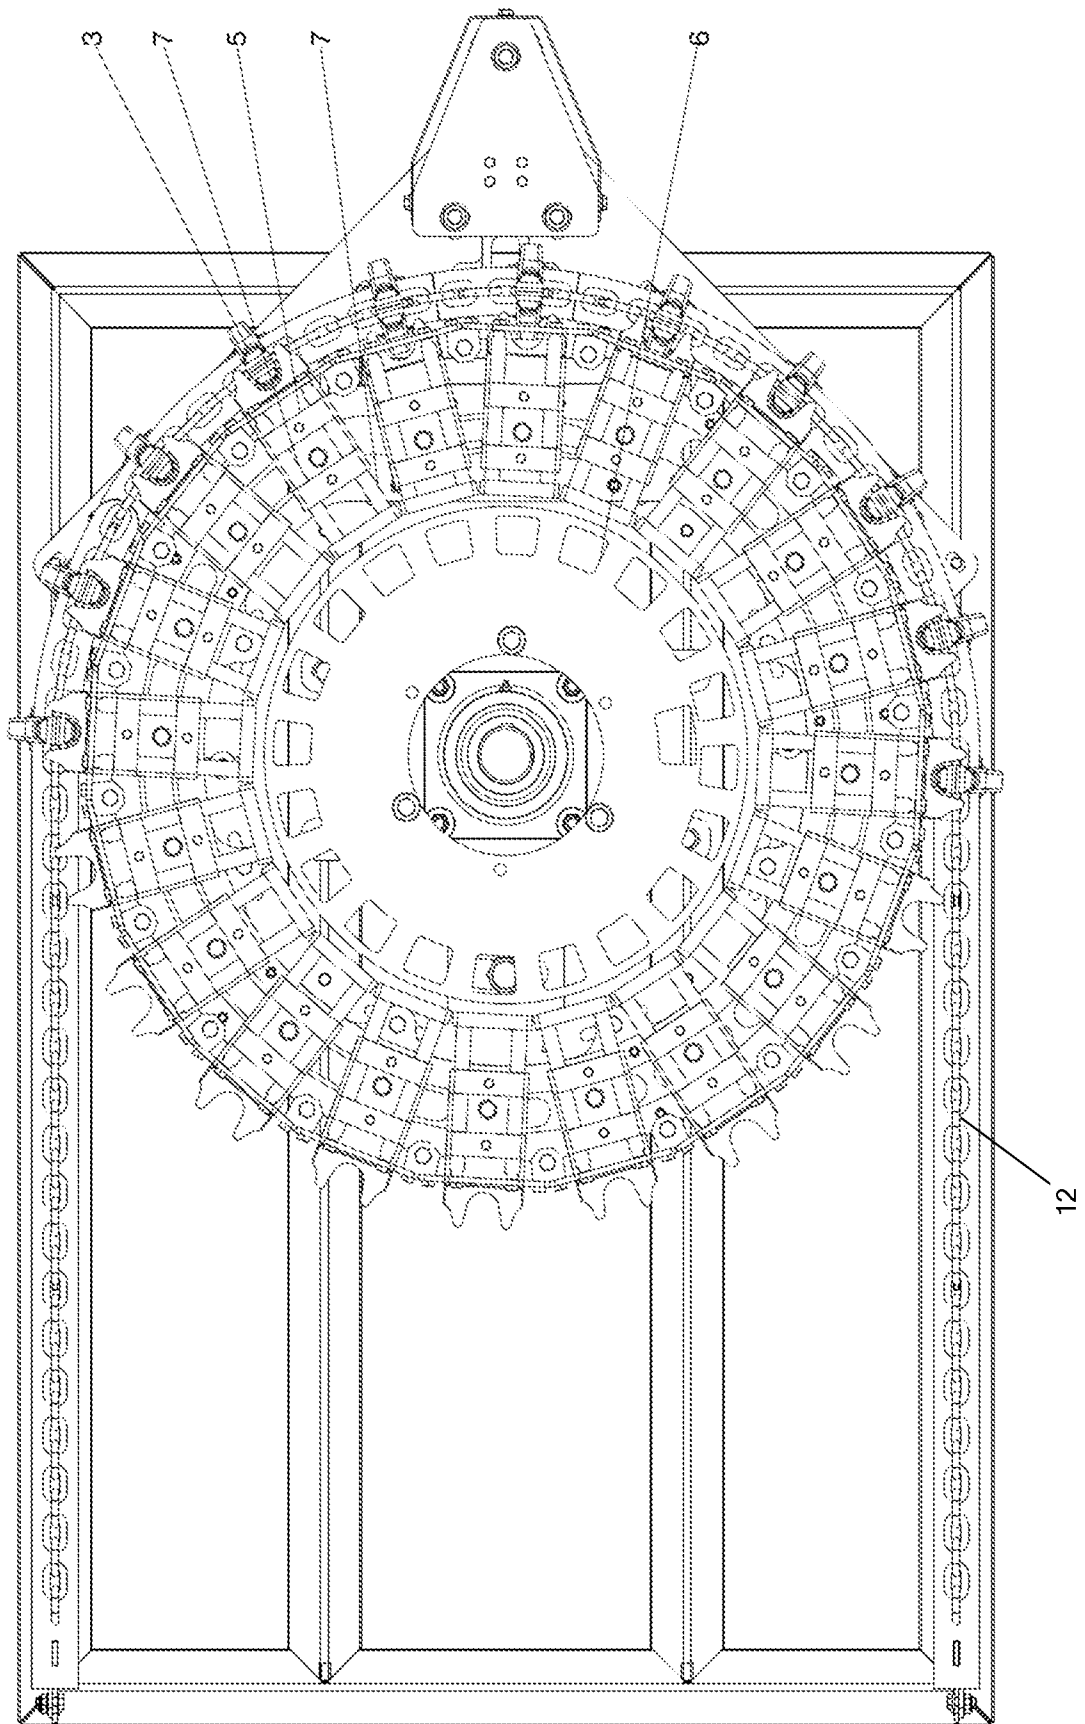
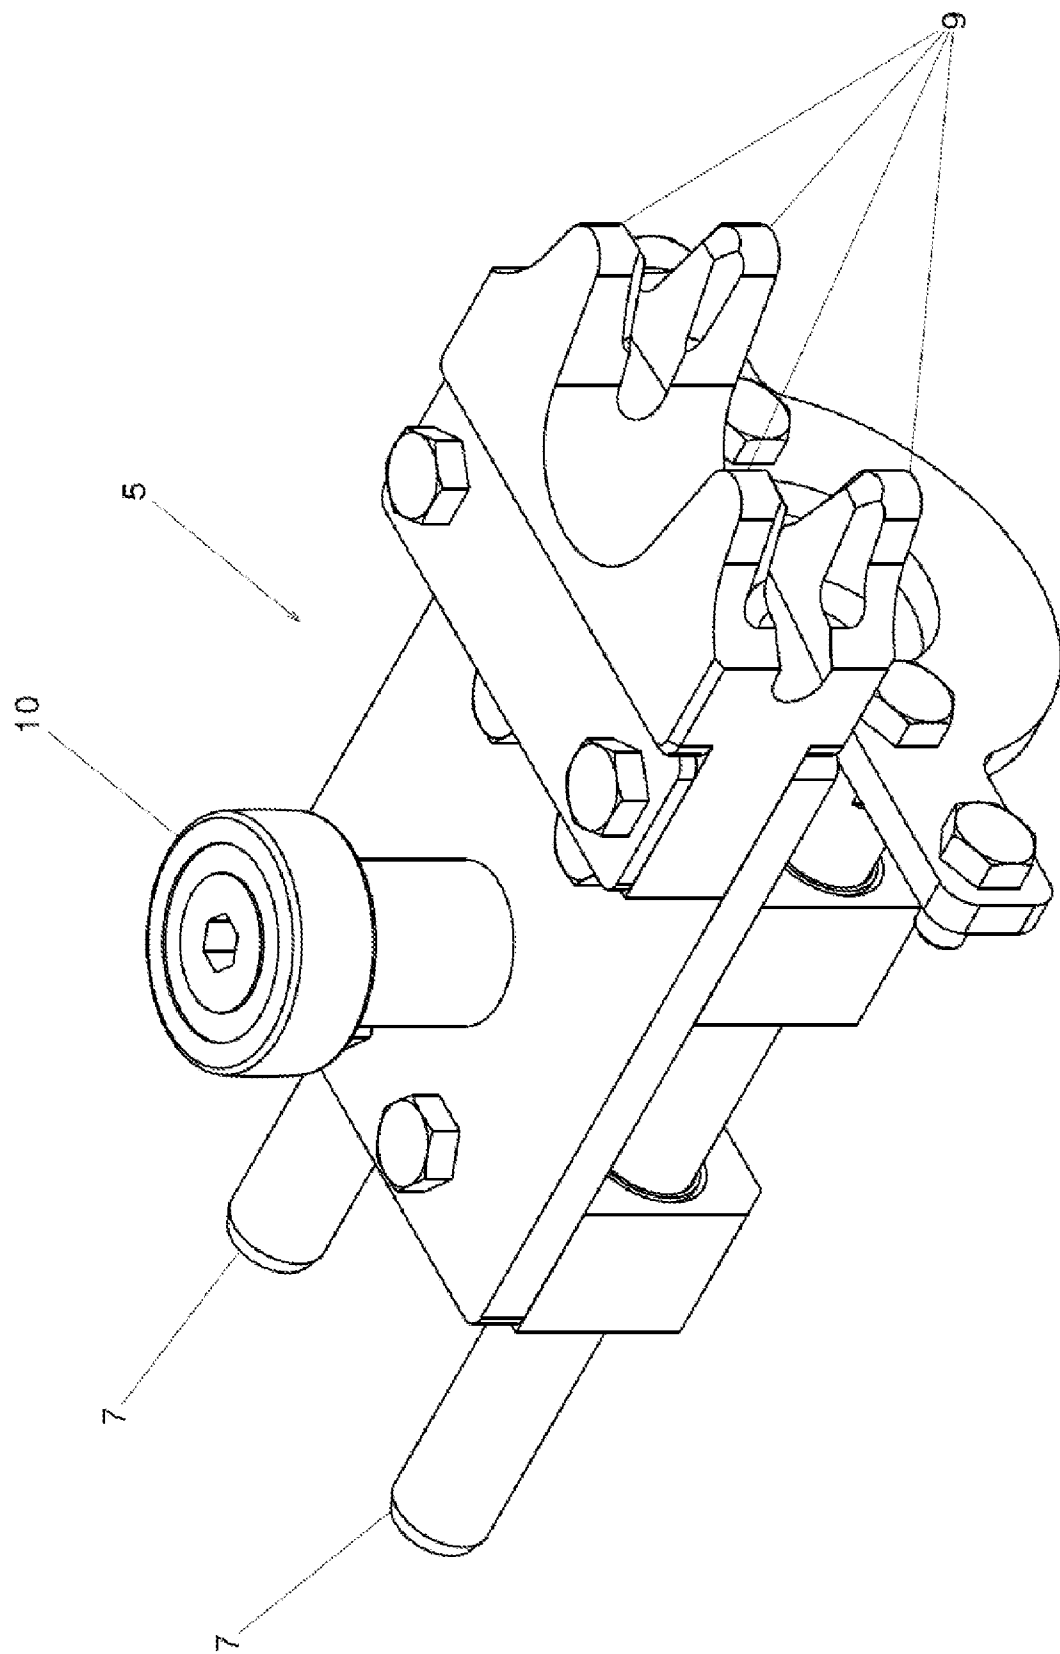


Fig. 1B

**Fig. 2**

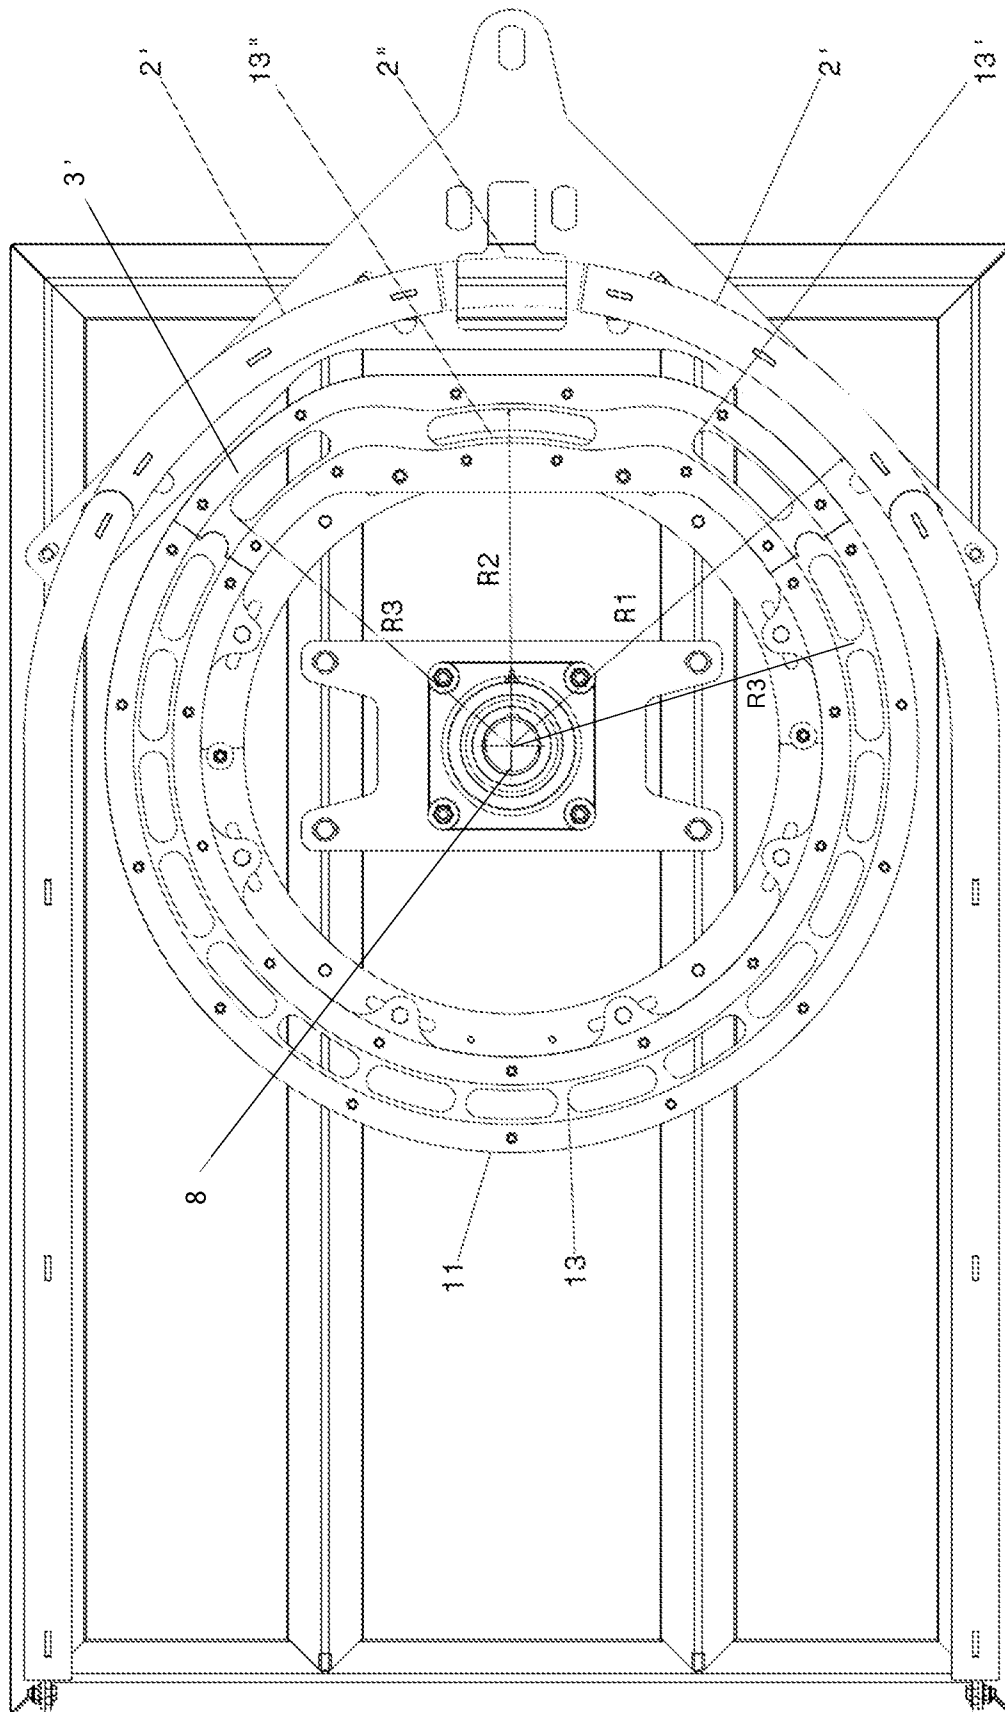


Fig. 3

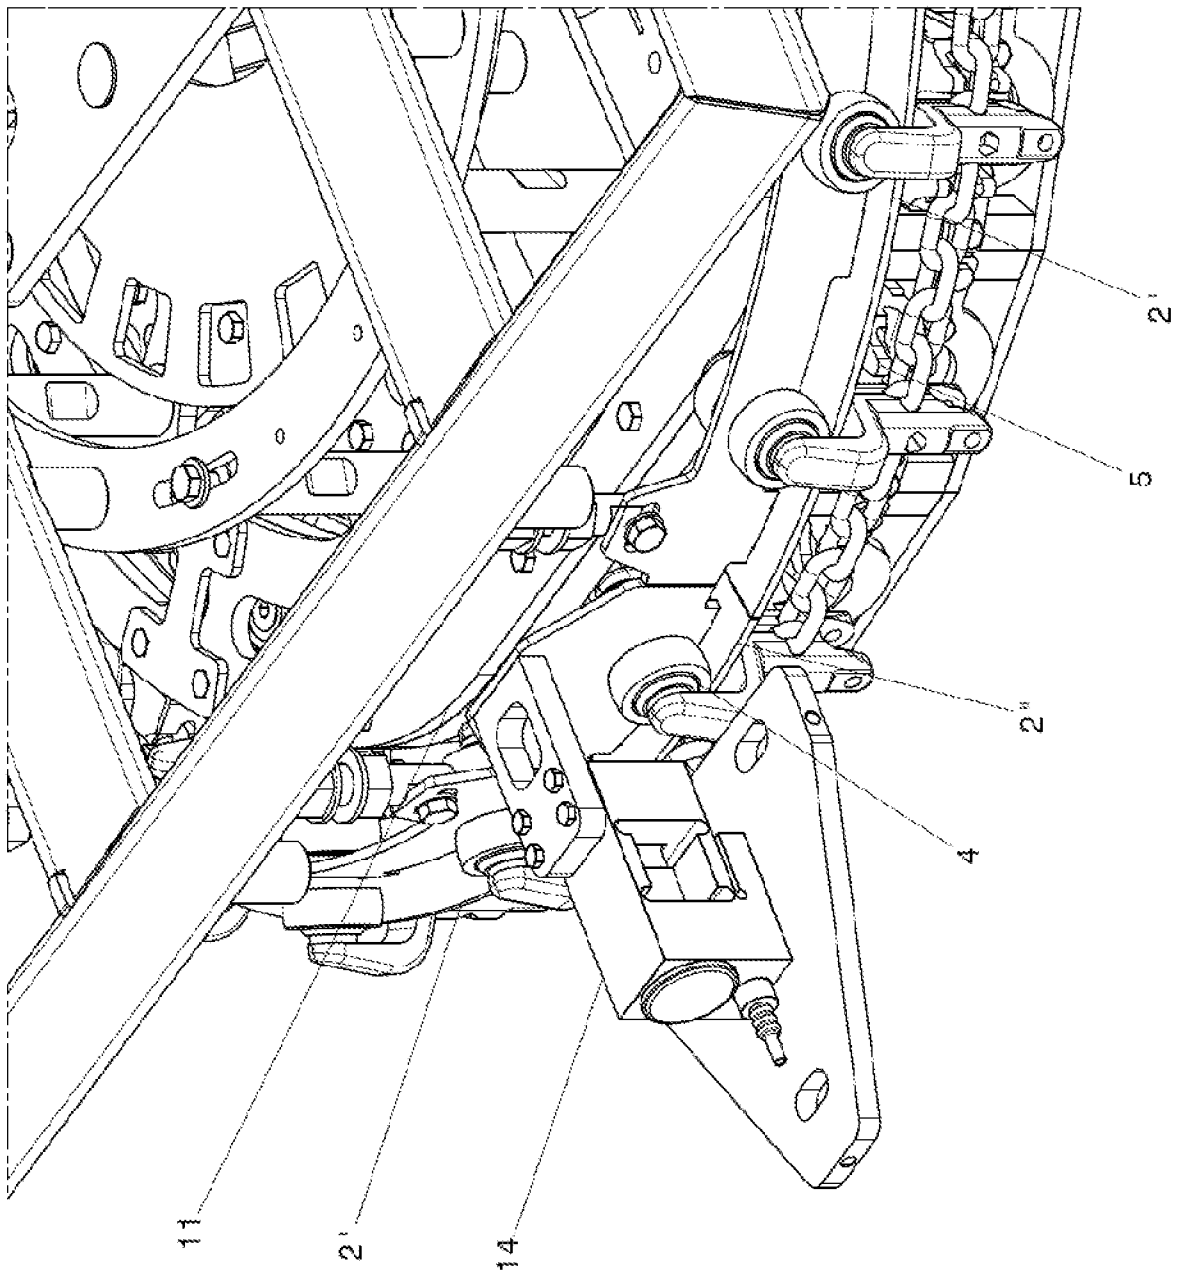


Fig. 4

# SAMENWERKINGSVERDRAG (PCT)

## RAPPORT BETREFFENDE NIEUWHEIDSONDERZOEK VAN INTERNATIONAAL TYPE

|                                                                                                                                         |                                                         |                                                                                                                                                |                                  |
|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| IDENTIFICATIE VAN DE NATIONALE AANVRAGE                                                                                                 |                                                         | KENMERK VAN DE AANVRAGER OF VAN DE GEMACHTIGDE                                                                                                 |                                  |
| Nederlands aanvraag nr.<br><br><b>2032142</b>                                                                                           |                                                         | Indieningsdatum<br><br><b>13-06-2022</b>                                                                                                       |                                  |
|                                                                                                                                         |                                                         | Ingeroepen voorrangsdatum                                                                                                                      |                                  |
| Aanvrager (Naam)<br><br><b>Meyn Food Processing Technology B.V.</b>                                                                     |                                                         |                                                                                                                                                |                                  |
| Datum van het verzoek voor een onderzoek van internationaal type<br><br><b>20-08-2022</b>                                               |                                                         | Door de Instantie voor Internationaal Onderzoek aan het verzoek voor een onderzoek van internationaal type toegekend nr.<br><br><b>SN81875</b> |                                  |
| <b>I. CLASSIFICATIE VAN HET ONDERWERP</b> (bij toepassing van verschillende classificaties, alle classificatiesymbolen opgeven)         |                                                         |                                                                                                                                                |                                  |
| Volgens de internationale classificatie (IPC)<br><br><b>Zie onderzoeksrapport</b>                                                       |                                                         |                                                                                                                                                |                                  |
| <b>II. ONDERZOCHE GEBIEDEN VAN DE TECHNIEK</b>                                                                                          |                                                         |                                                                                                                                                |                                  |
| Onderzochte minimumdocumentatie                                                                                                         |                                                         |                                                                                                                                                |                                  |
| Classificatiesysteem                                                                                                                    | Classificatiesymbolen                                   |                                                                                                                                                |                                  |
| <b>IPC</b>                                                                                                                              | <b>Zie onderzoeksrapport</b>                            |                                                                                                                                                |                                  |
| Onderzochte andere documentatie dan de minimum documentatie, voor zover dergelijke documenten in de onderzochte gebieden zijn opgenomen |                                                         |                                                                                                                                                |                                  |
|                                                                                                                                         |                                                         |                                                                                                                                                |                                  |
| <b>III.</b>                                                                                                                             | <b>GEEN ONDERZOEK MOGELIJK VOOR BEPAALDE CONCLUSIES</b> |                                                                                                                                                | (opmerkingen op aanvullingsblad) |
| <b>IV.</b>                                                                                                                              | <b>GEBREK AAN EENHEID VAN UITVINDING</b>                |                                                                                                                                                | (opmerkingen op aanvullingsblad) |

## NL 2032142

ADD.

**G01G**

EPO-Internal, WPI Data

1-9

— / —

Leden van dezelfde octrooifamilie zijn vermeld in een bijlage

"&amp;" lid van dezelfde octrooifamilie of overeenkomstige octrooipublicatie

Koch, Florian

**ONDERZOEKSRAPPORT BETREFFENDE HET  
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND  
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Nummer van het verzoek om een onderzoek naar  
de stand van de techniek

**NL 2032142**

| C.(Vervolg). VAN BELANG GEACHTE DOCUMENTEN |                                                                                                                                                                                                                            |                                  |
|--------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| Categorie °                                | Geciteerde documenten, eventueel met aanduiding van speciaal van belang zijnde passages                                                                                                                                    | Van belang voor<br>conclusie nr. |
| <b>A</b>                                   | <b>US 5 672 098 A (VERAART ANTONIUS JOZEF<br/>[NL]) 30 september 1997 (1997-09-30)</b><br><b>* kolom 2, regel 30 - regel 60 *</b><br><b>* kolom 5, regel 8 - kolom 6, regel 3 *</b><br><b>* figuren 1-3 *</b><br><br>----- | <b>1-9</b>                       |

**ONDERZOEKSRAPPORT BETREFFENDE HET  
RESULTAAT VAN HET ONDERZOEK NAAR DE STAND  
VAN DE TECHNIEK VAN HET INTERNATIONALE TYPE**

Informatie over leden van dezelfde octrooifamilie

Nummer van het verzoek om een onderzoek naar  
de stand van de techniek

**NL 2032142**

| In het rapport<br>genoemd octrooigeschrift | Datum van<br>publicatie | Overeenkomend(e)<br>geschrift(en) | Datum van<br>publicatie        |
|--------------------------------------------|-------------------------|-----------------------------------|--------------------------------|
| <b>CN 209214735</b>                        | <b>U</b>                | <b>06-08-2019</b>                 | <b>GEEN</b>                    |
| <b>US 4488635</b>                          | <b>A</b>                | <b>18-12-1984</b>                 | <b>GEEN</b>                    |
| <b>US 5672098</b>                          | <b>A</b>                | <b>30-09-1997</b>                 | <b>AU 697567 B2 08-10-1998</b> |
|                                            |                         | <b>DE 69603645 T2 02-12-1999</b>  |                                |
|                                            |                         | <b>DK 0736255 T3 13-03-2000</b>   |                                |
|                                            |                         | <b>EP 0736255 A1 09-10-1996</b>   |                                |
|                                            |                         | <b>NL 1000029 C2 07-10-1996</b>   |                                |
|                                            |                         | <b>US 5672098 A 30-09-1997</b>    |                                |

## WRITTEN OPINION

|                                                                    |                                                            |                                         |                                     |
|--------------------------------------------------------------------|------------------------------------------------------------|-----------------------------------------|-------------------------------------|
| File No.<br><b>SN81875</b>                                         | Filing date ( <i>day/month/year</i> )<br><b>13.06.2022</b> | Priority date ( <i>day/month/year</i> ) | Application No.<br><b>NL2032142</b> |
| International Patent Classification (IPC)<br><b>INV. G01G19/06</b> |                                                            |                                         |                                     |
| Applicant<br><b>Meyn Food Processing Technology B.V.</b>           |                                                            |                                         |                                     |

This opinion contains indications relating to the following items:

- ☒ Box No. I Basis of the opinion
- ☐ Box No. II Priority
- ☐ Box No. III Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- ☐ Box No. IV Lack of unity of invention
- ☒ Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- ☐ Box No. VI Certain documents cited
- ☐ Box No. VII Certain defects in the application
- ☐ Box No. VIII Certain observations on the application

|  |                                  |
|--|----------------------------------|
|  | Examiner<br><b>Koch, Florian</b> |
|--|----------------------------------|

**WRITTEN OPINION****Box No. I Basis of this opinion**

1. This opinion has been established on the basis of the latest set of claims filed before the start of the search.
2. With regard to any **nucleotide and/or amino acid sequence** disclosed in the application, this opinion has been established on the basis of:
  - a. type of material:
    - ☐ a sequence listing
    - ☐ table(s) related to the sequence listing
  - b. format of material:
    - ☐ on paper
    - ☐ in electronic form
  - c. time of filing/furnishing:
    - ☐ contained in the application as filed.
    - ☐ filed together with the application in electronic form.
    - ☐ furnished subsequently for the purposes of search.
3. ☐ In addition, in the case that more than one version or copy of a sequence listing and/or table relating thereto has been filed or furnished, the required statements that the information in the subsequent or additional copies is identical to that in the application as filed or does not go beyond the application as filed, as appropriate, were furnished.
4. Additional comments:

**Box No. V Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

## 1. Statement

|                          |             |     |
|--------------------------|-------------|-----|
| Novelty                  | Yes: Claims | 1-9 |
|                          | No: Claims  |     |
| Inventive step           | Yes: Claims | 1-9 |
|                          | No: Claims  |     |
| Industrial applicability | Yes: Claims | 1-9 |
|                          | No: Claims  |     |

## 2. Citations and explanations

**see separate sheet**

**Re Item V**

**Reasoned statement with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

Reference is made to the following documents:

- D1 CN 209 214 735 U (JILIN SSK MACHINERY & ELECTRON STOCK CO LTD) 6 augustus 2019 (2019-08-06)
- D2 US 4 488 635 A (LINVILLE RICHARD D [US]) 18 december 1984 (1984-12-18)
- D3 US 5 672 098 A (VERAART ANTONIUS JOZEF [NL]) 30 september 1997 (1997-09-30)

**Document D1 is regarded as being the prior art closest to the subject-matter of claim 1, and discloses:**

Inrichting voor het wegen van pluimvee in een transportlijn (5; fig. 1, 4), omvattende dragers voor het pluimvee, welke dragers (fig. 7) met elkaar verbonden zijn door een aandrijfketting (8), welke transportlijn tenminste een gebogen baangedeelte en een weegbaangedeelte (6; fig. 1, 4) omvat, waarbij zich langs het weegbaangedeelte een weegstation bevindt, en dat de inrichting voorts een kettingspanningsregelmechanisme bezit (2, 3; alinea [0019] - alinea [0032]) dat spanning in de aandrijfketting op of nabij het weegstation langs het weegbaangedeelte verlicht (see also references in the search report).

**The subject-matter of independent claim 1 therefore differs from this known D1 in that**

het kettingspanningsregelmechanisme een roteerbaar wiel omvat waarvan zijn omtrek het gebogen baangedeelte volgt en het weegbaangedeelte passeert, welk roteerbaar wiel een reeks aangrijpeenheden ondersteunt die aangrijpen op de ketting en/of de dragers in het gebogen baangedeelte om de ketting te spannen en is losgekoppeld van de ketting en de dragers in het weegbaangedeelte om de spanning in de ketting te vermindern.

**The problem to be solved by the present invention may be regarded as**

simplifying the design and preventing progressive swinging motion of the poultry while being conveyed through the weighing station.

**The solution to this problem proposed in independent claim 1 of the present application is considered as involving an inventive step for the following reasons:**

Documents D1-D3 (see references in the search report) represent the current common practice w.r.t. weighing poultry in an overhead rail processing facility.

All three documents discuss and present solutions to decouple the tension in the chain during the weighing process.

None of the documents D1-D3 give a hint to the solution.

Likewise the solution of independent claim 1 does not appear to be part of the common general knowledge of the skilled person.

Claims 2-9 are dependent on claim 1 and as such also meet the requirements of novelty and inventive step as-well.