




(86) Date de dépôt PCT/PCT Filing Date: 1997/12/05
(87) Date publication PCT/PCT Publication Date: 1998/06/18
(45) Date de délivrance/Issue Date: 2009/11/17
(85) Entrée phase nationale/National Entry: 1999/06/11
(86) N° demande PCT/PCT Application No.: US 1997/022112
(87) N° publication PCT/PCT Publication No.: 1998/026580
(30) Priorité/Priority: 1996/12/13 (US08/766,639)

(51) Cl.Int./Int.Cl. *H04N 1/00* (2006.01)
(72) Inventeurs/Inventors:
JOHN, JOHNNY K., US;
LEUNG, NIKOLAI K.N., US
(73) Propriétaire/Owner:
QUALCOMM INCORPORATED, US
(74) Agent: SMART & BIGGAR

(54) Titre : INTERFACE DE RESEAU NUMERIQUE POUR EQUIPEMENT ANALOGIQUE DE TELECOPIE
(54) Title: DIGITAL NETWORK INTERFACE FOR ANALOG FAX EQUIPMENT

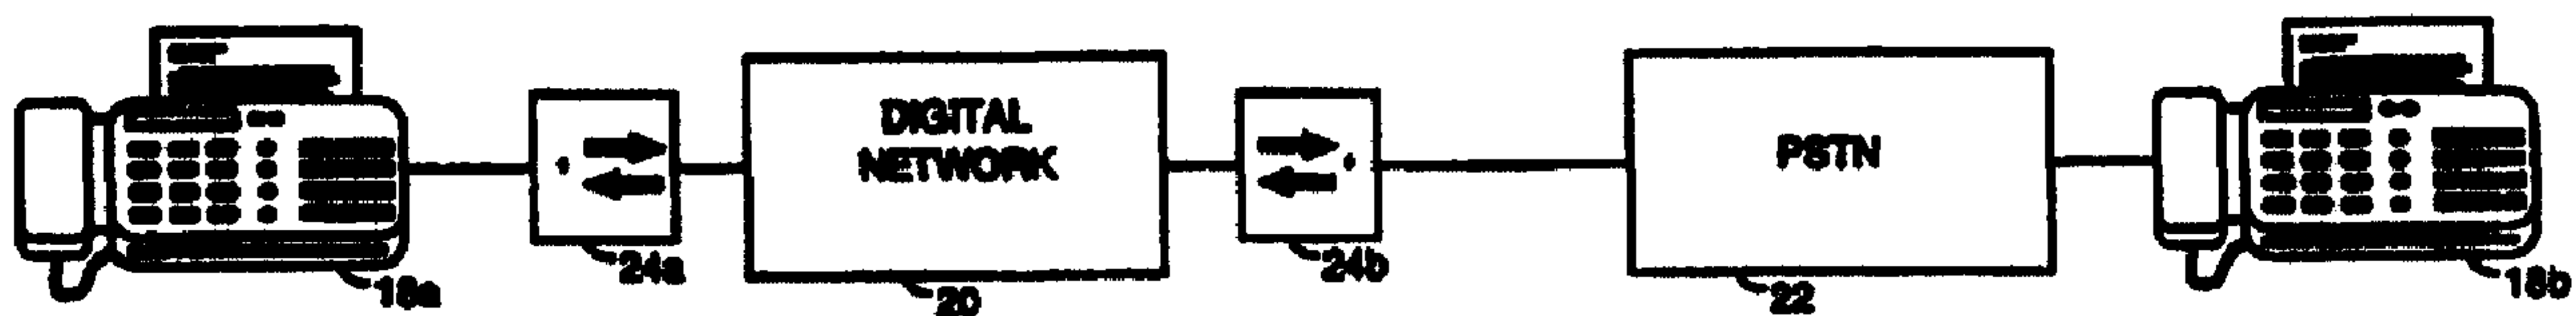

(57) Abrégé/Abstract:

A novel and improved method and apparatus for providing an interface to a digital wireless telephone system compatible with standard analog wire line fax machines are described. To process a fax, a source interface (24a) waits until an interface to a destination fax machine (18b) has been established before establishing an interface to a source fax machine (18a). The source fax transmission rate must be less than or equal to the destination fax transmission rate and the data rate of the digital channel. To establish the source fax interface at the proper rate, the source interface (24a) first selects an initial data rate from a set of standard fax transmission rates. The source interface (24a) sends unacceptable rate (failure to train) messages to the source fax machine (18a) until the source fax transmission rate is less than or equal to the data channel rate and the destination fax transmission rate. During fax processing, the destination interface (24b) inserts non-printing data (fill bits) if the destination fax transmission rate is greater than the source fax transmission rate. Fill bits are also inserted to compensate for transmission delays.




**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 1/00	A1	(11) International Publication Number: WO 98/26580 (43) International Publication Date: 18 June 1998 (18.06.98)
(21) International Application Number: PCT/US97/22112 (22) International Filing Date: 5 December 1997 (05.12.97) (30) Priority Data: 08/766,639 13 December 1996 (13.12.96) US (71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, CA 92121 (US). (72) Inventors: JOHN, Johnny, K.; 12682 Torrey Bluff Drive #236, San Diego, CA 92130 (US). LEUNG, Nikolai, K., N.; 5281 Setting Sun Way, San Diego, CA 92121 (US). (74) Agents: MILLER, Russel, B. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.

(54) Title: DIGITAL NETWORK INTERFACE FOR ANALOG FAX EQUIPMENT

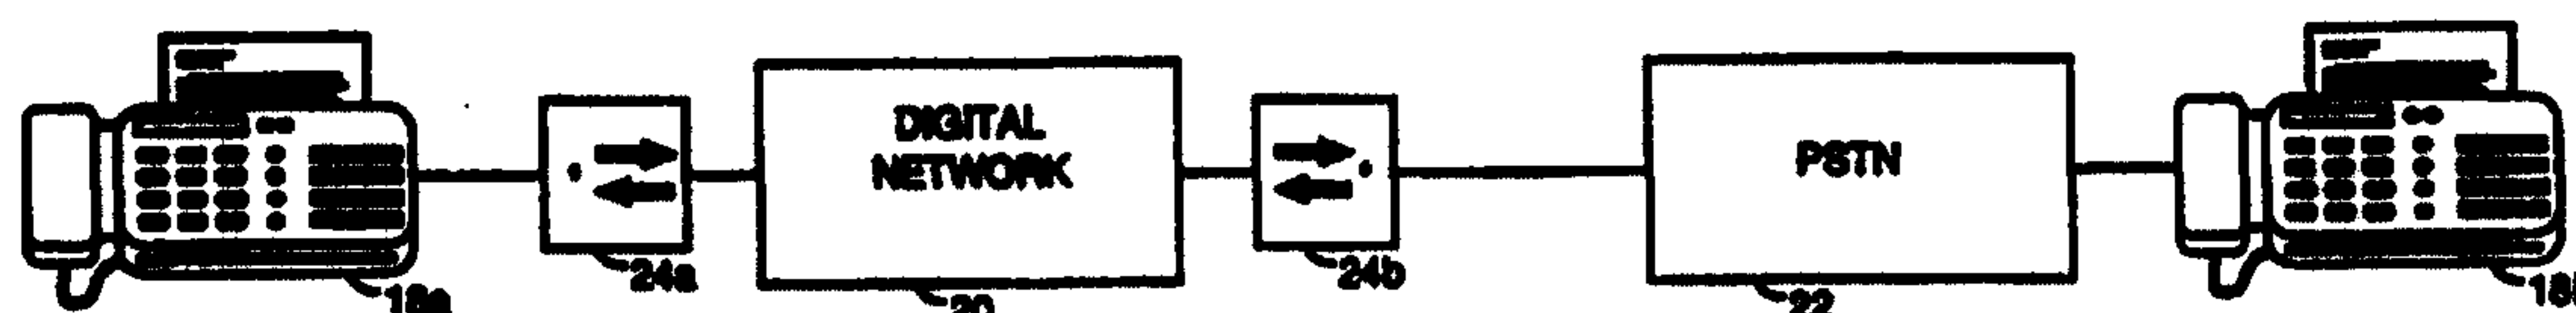

(57) Abstract

A novel and improved method and apparatus for providing an interface to a digital wireless telephone system compatible with standard analog wire line fax machines are described. To process a fax, a source interface (24a) waits until an interface to a destination fax machine (18b) has been established before establishing an interface to a source fax machine (18a). The source fax transmission rate must be less than or equal to the destination fax transmission rate and the data rate of the digital channel. To establish the source fax interface at the proper rate, the source interface (24a) first selects an initial data rate from a set of standard fax transmission rates. The source interface (24a) sends unacceptable rate (failure to train) messages to the source fax machine (18a) until the source fax transmission rate is less than or equal to the data channel rate and the destination fax transmission rate. During fax processing, the destination interface (24b) inserts non-printing data (fill bits) if the destination fax transmission rate is greater than the source fax transmission rate. Fill bits are also inserted to compensate for transmission delays.

DIGITAL NETWORK INTERFACE FOR ANALOG FAX EQUIPMENT

BACKGROUND OF THE INVENTION

5

I. Field of the Invention

The present invention relates to an interface for a digital wireless telephone system. More particularly, the present invention relates to a
10 digital network interface that is compatible with standard analog fax machines.

II. Description of the Related Art

15 Analog facsimile (fax) machines transmit digital data representative of paper documents over analog transmission systems by converting the digital data into sinusoidal tones. FIG. 1 is a block diagram of two fax machines 2 coupled via an analog transmission system 4. Generally, analog transmission system 4 is the public switched telephone network (PSTN),
20 which is the wire line telephone network used to provide conventional telephone service.

Increasingly, data transmission is being performed via the use of digital transmission systems such as the internet in addition to, or instead of, analog transmission systems. FIG. 2 is a block diagram of two fax
25 machines 2 coupled via an analog transmission system 8 and a wireless digital transmission system 6.

One particularly important type of digital network is a digital wireless cellular telephone system which uses digital signal processing and digital communication techniques to provide efficient wireless telephone service
30 using radio frequency (RF) signals. FIG. 3 is a block diagram of a typically configured digital cellular telephone system. Subscriber units 10 and 11 (usually cellular telephones) interface with base stations 12 via the use of digitally modulated RF signals, and base station controller 14 provides various call management functionality to allow mobile communications to
35 be conducted.

Additionally, FIG. 3 shows subscriber unit 10 in communication with two base stations 12 in a state referred to as soft handoff, which is consistent with the use of the IS-95 over-the-air cellular telephone system interface standard, which incorporates the use of Code Division Multiple Access

(CDMA) signal processing and communications to provide highly efficient and robust cellular telephone service.

Digital transmission systems in general, and wireless digital transmission systems in particular, have substantially different transmission characteristics than analog transmission systems. These differing transmission characteristics include variable transmission delay created by transmission retry attempts, and an inability to transmit tones in complete fashion because of the use of lossy encoding. Lossy encoding is performed on voice and other audio information transmitted using a digital cellular telephone system to minimize the amount of data necessary to conduct voice communication.

Additionally, the maximum data transmission rate of a voice channel in a digital wireless telephone system is much less than that of a wire base analog telephone system. Voice communication is conducted over these reduced rate channels via the use of the lossy encoding mentioned above, which is more efficient than analog systems and other non-lossy encoding techniques.

These different transmission characteristics make wireless digital transmission systems incompatible with the use of analog fax machines. For example, while voice communication can tolerate lossy encoding, analog fax transmissions cannot. Additionally, analog fax transmissions generally require higher data rate channels than those offered by wireless digital telecommunications systems.

As the cost of digital wireless telecommunications service decreases with the increased availability of RF spectrum and the introduction of more efficient digital technology, the use of digital wireless telephone systems as a primary source of telephone service will increase. For individuals and businesses that already possess analog fax machines, however, it will be desirable to continue to use analog fax machines with the digital wireless telephone. Thus, there is a need for a method and apparatus for allowing analog fax machines to conduct communication over a connection that includes a digital network, including a digital wireless telecommunications system.

35

SUMMARY OF THE INVENTION

The present invention is a novel and improved method and apparatus for providing an interface to a digital wireless telephone system compatible with standard analog wire line fax machines. To process a fax, a

74769-202

3

source interface waits until an interface to a destination fax machine has been established before establishing an interface to a source fax machine. The source fax interface rate must be less than or equal to the destination fax interface rate and the data rate of the digital channel. To establish the source fax interface at the proper rate, the source interface first selects an initial data rate from a set of standard fax transmission rates. The source interface sends unacceptable rate (failure to train) messages to the source fax machine until the source fax interface rate is less than or equal to the data channel rate and the destination fax interface rate. During fax processing, the destination interface inserts non-printed data (fill bits) if the destination fax transmission rate is greater than the source fax transmission rate.

According to one aspect the invention provides a system for transmitting a fax from a source fax machine to a destination fax machine over a variable rate digital channel comprising: source interface means for receiving a first analog information signal from the source fax machine at a first transmission rate, wherein the first transmission rate is less than or equal to a maximum data rate of the variable rate digital channel, for converting the first analog information signal into a digital information signal, for generating a plurality of control signals, for transmitting the digital information signal and the plurality of control signals via the variable rate digital channel, and for receiving a plurality of destination interface device responses via the variable rate digital channel; and destination interface means for receiving the digital information signal and the plurality of control signals, for converting the digital information signal into a second

74769-202

3a

analog information signal, for transmitting the second analog information signal to the destination fax machine at a second transmission rate, wherein the second transmission rate is negotiated independently from the first transmission rate, for generating a set of instructions for transmission to the destination fax machine, wherein the set of instructions is generated by the plurality of control signals, for receiving a plurality of destination fax machine responses, for converting the plurality of destination fax machine responses into the plurality of destination interface device responses, and for transmitting the plurality of destination interface device responses to the source interface means.

According to another aspect the invention provides a method for transmitting a fax between a source fax machine to a destination fax machine over a variable rate digital channel comprising the steps of: communicating between a destination interface device with the destination fax machine at a destination fax transmission rate; communicating between the destination interface device and a source interface device at a maximum rate of the variable rate digital channel; and communicating between a source interface device with the source fax machine at a source fax transmission rate, wherein the source fax transmission rate and the destination fax transmission rate are independently negotiated.

According to another aspect the invention provides a method for transmitting a fax from a source fax machine to a destination fax machine over a variable rate digital channel comprising the steps of: receiving a first analog information signal at source fax transmission rate from the source fax machine to a source interface device, wherein the first transmission rate is less than or equal to a maximum

74769-202

3b

data rate of the variable rate digital channel; converting the first analog information signal into a digital information signal at the source interface device; generating a plurality of control signals at the source interface device; transmitting the digital information signal and the plurality of control signals via the variable rate digital channel to a destination interface device; receiving the digital information signal and the plurality of control signals at the destination interface device; receiving a plurality of destination interface device responses via the variable rate digital channel at the source interface device from the destination interface device; converting the digital information signal into a second analog information signal at the destination interface device; transmitting the second analog information signal at a second transmission rate from the destination interface device to the destination fax machine, wherein the second transmission rate is greater than or equal to the first transmission rate; generating a set of instructions for transmission to the destination fax machine at the destination interface device, wherein the set of instructions is determined by the plurality of control signals; transmitting the set of instructions to the destination fax machine; receiving a plurality of destination fax machine responses at the destination interface device, wherein the plurality of destination fax machine responses are based upon the set of instructions; converting the plurality of destination fax machine responses into the plurality of destination interface device responses at the destination interface device; and transmitting the plurality of destination interface device responses to the source interface device.

74769-202

3c

According to another aspect the invention provides a system for transmitting a fax from a source fax machine to a destination fax machine over a rate limited digital channel having a maximum channel data rate, comprising:

5 source interface means for converting first tonal fax data received from the source fax machine into a digital fax data, wherein said first tonal fax data is received at a first transmission rate that is less than or equal to the maximum channel data rate, wherein said source interface

10 means is further for discarding bit fields 25 through 72 in a DIS message from the destination fax machine to simplify fax processing; and destination interface means for converting said digital fax data received over the rate limited digital channel into second tonal fax data that is

15 transmitted to the destination fax machine at a second transmission rate that is equal to or greater than said first transmission rate.

According to another aspect the invention provides a system for transmitting a fax from a source fax machine to

20 a destination fax machine over a rate limited digital channel having a maximum channel data rate, comprising: source interface means for converting first tonal fax data received from the source fax machine into a digital fax data, wherein said first tonal fax data is received at a

25 first transmission rate that is less than or equal to the maximum channel data rate, wherein said source interface means is further for modifying a DIS message from the destination fax machine to indicate a minimum scan line time of 40 ms so as to cause the source fax machine to allocate a

30 minimum of 40 ms between transmission of a line and transmission of a next line; and destination interface means for converting said digital fax data received over the rate limited digital channel into second tonal fax data that is

74769-202

3d

transmitted to the destination fax machine at a second transmission rate that is equal to or greater than said first transmission rate, wherein said destination interface means introduces a time offset for compensating for fades by
5 indicating a destination minimum scan line time to the destination fax machine that provides a maximum time differential between said minimum scan line time and said destination minimum scan line time.

According to another aspect the invention provides
10 a source interface for interfacing between a source fax machine and a destination fax machine and for communicating with a destination fax interface over a variable rate digital channel comprising: means for receiving an analog information signal from the source fax machine at a first
15 transmission rate, wherein the first transmission rate is less than or equal to a maximum data rate of the variable rate digital channel; means for converting the analog information signal into a digital information signal; means for generating a plurality of control signals; means for
20 transmitting the digital information signal and the plurality of control signals via the variable rate digital channel; means for receiving a plurality of destination interface device responses via the variable rate digital channel; and means for modifying at least one of the
25 destination interface device responses.

According to another aspect the invention provides a destination interface for interfacing between a source fax machine operating at a first transmission rate and a destination fax machine and for communicating with a source
30 fax interface over a variable rate digital channel comprising: means for receiving a digital information signal and a plurality of control signals from the source fax interface over the variable rate digital channel; means for

74769-202

3e

converting the digital information signal into an analog information signal; means for transmitting the analog information signal to the destination fax machine at a second transmission rate, wherein the second transmission
5 rate is negotiated independently from the first transmission rate; means for generating a set of instructions for transmission to the destination fax machine from the plurality of control signals; means for receiving a plurality of destination fax machine responses from the
10 destination fax machine; means for converting the plurality of destination fax machine responses into a plurality of destination interface device responses; and means for transmitting the plurality of destination interface device responses to the source fax interface.

15

BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference
20 characters identify correspondingly throughout and wherein:

FIG. 1 is a block diagram of two fax machines coupled via an analog transmission system;

FIG. 2 is a block diagram of two fax machines coupled via an analog transmission system and a digital
25 wireless transmission system;

FIG. 3 is a block diagram of a digital wireless cellular telephone system;

FIGS. 4A-D are block diagrams of two fax machines connected in accordance with the one embodiment of the
30 present invention;

74769-202

3f

FIGS. 5A-C are flow diagrams of the operation of various systems during fax processing when performed in accordance with one embodiment of the invention;

FIG. 6 is a flow diagram illustrating the steps performed during page end processing in accordance with one embodiment of the invention;

FIG. 7 is a flow diagram of the operation of the destination interface when the source fax transmission rate is less than the destination fax interface performed in accordance with one embodiment of the invention;

FIG. 8 is a timing diagram illustrating the transmission of data via the destination interface when performed in accordance with one embodiment of the invention; and

FIG. 9 is a block diagram of a cellular telephone system when configured in accordance with the use of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

A digital network interface that is compatible with standard analog fax machines is described. Fax calls must conform to behavior as specified in "ITU-T Recommendation T.30: Procedures For Document Facsimile Transmission in the General Switched Telephone Network".

In the exemplary embodiment, parameter negotiation at the beginning of a fax call is accomplished in accordance with T.30 using the modulation techniques specified in "CCITT Recommendation V.21 : 300 BPS Duplex Modem Standardized For Use in the General Switched Telephone Network (GSTN)".

FIG. 4A is a block diagram of two analog fax machines 18a and 18b coupled together by digital network 20, PSTN 22 and analog fax interfaces 24a and 24b which are located at either side of digital network 20. The analog interface side of each analog interface 24 is indicated with a dot, and the two arrows indicate the bidirectional capability of each analog fax interface 24.

FIG. 4B illustrates the configuration of analog fax interfaces 24a and 24b when an analog fax is transmitted from analog fax machine 18a to analog fax machine 18b. In accordance with the present invention, analog interfaces 24 are configured to process the fax in direction of transmission as indicated by the arrows.

When a fax is transmitted in the direction shown, analog fax machine 18a is referred to as the "source fax machine" and analog fax machine 18b is the "destination fax machine." Similarly, analog fax interface 24a is referred to as the "source interface" and interface 24b is referred to as the "destination interface."

FIG. 4C illustrates the configuration of analog fax interfaces 24a and 24b when an analog fax is transmitted from analog fax machine 18b to analog fax machine 18a. In this configuration, analog fax machine 18b is the source fax machine and analog fax machine 18a is the destination fax machine, and analog fax interface 24b is referred to as the source interface and interface 24a is the destination interface.

FIG. 4D illustrates that two fax machines 18 may communicate via two digital networks if, in accordance with the preferred embodiment of the invention, a pair of analog fax interfaces 24 are placed around each digital network. Each analog fax interface 24 makes each digital network 20 appear as an analog transmission system to the fax machines 18, which allows a fax to be properly transmitted across multiple digital networks 20. In the case

74769-202

5

where the digital network is a digital cellular telephone system, the configuration of FIG. 4D corresponds to a tandem mobile to mobile fax transmission.

FIG. 4E illustrates that two fax machines 18 may communicate via two adjacent digital networks if, in accordance with the preferred embodiment of the invention, a pair of analog fax interfaces 24 are placed around the pair of digital networks. In this configuration, digital data is exchanged directly between the two digital networks without the need to convert the data into a form suitable for transmission over an analog network. In the case where the digital network is a digital cellular telephone system, the configuration of FIG. 4E corresponds to a non-tandem mobile to mobile fax transmission.

In the preferred embodiment of the invention the signal modulation and control operations performed by source interface 24a and destination interface 24b are carried out using a single digital signal processor integrated circuit. These control operations include processing and responding to signaling messages received via the analog input in accordance with the operation of a standard fax machine.

Referring again to FIG. 4B, in an exemplary fax transmission source interface 24a and destination interface 24b must perform various steps to properly transmit a fax from source fax machine 18a to destination fax machine 18b.

FIG. 5A is a flow diagram illustrating the operation of source interface 24a and destination interface 24b when processing a fax from source fax machine 18a to destination fax machine 18b in accordance with one embodiment of the invention. In general, messages transmitted between systems are shown as bold horizontal lines, and dashed lines indicate a message transmission which may or may not take place at the time shown, while solid lines indicate messages that should be transmitted during orderly operation. Also, only those steps performed by source fax machine 18a and destination fax machine 18b that pertain to the operation of the invention are shown, as all other steps will be apparent to one skilled in the art and would only obscure the description of the invention. The transmission of the fax begins at steps 50a - d, and at step 52 the source fax machine 18a is activated causing source interface 24a to establish a rate limited digital channel (also referred to as a "variable rate digital channel") with destination interface 24b at steps 54 and 56, and to record various characteristics about that digital channel including the maximum transmission rate.

Source fax machine 18a notifies source interface 24a that a fax call will take place. This notification may result from the optional CNG tone that

74769-202

6

can be generated by source fax machine 18a in accordance with ITU-TR T.30, or from the transmission of a predetermined set of DTMF tones to the source interface 24a. One method for notifying source interface 24a that a fax communication will take place is described in US Patent

5 No. 5,864,763 entitled "DIGITAL WIRELESS TELEPHONE SYSTEM INTERFACE FOR ANALOG TELECOMMUNICATIONS EQUIPMENT" filed September 24, 1996 and assigned to the assignee of the present invention. In response, source interface 24a notifies destination interface 24b through digital signaling messages that a fax call

10 will be conducted.

In an alternate embodiment, the destination fax machine 18b can indicate to the destination interface 24b at steps 58 and 56 that fax call will take place. A method for the destination interface 24b to detect fax calls is described in US Patent No. 5,892,816 entitled "METHOD AND APPARATUS

15 FOR DETECTING FACSIMILE TRANSMISSION" filed November 15, 1996 and also assigned to the assignee of the present invention.

The destination interface responds at step 56 by establishing an analog channel with destination fax machine 18b at step 58. An exemplary analog

20 channel between destination interface 24b and destination fax machine 18b is the public switched telephone network (PSTN).

After the analog channel has been established, destination interface 24b transmits a CNG tone to the destination fax machine 18b at step 62 which is received at step 60 by destination fax machine 18b. Destination fax

25 machine 18b may transmit a CED tone (not shown) to destination interface 24b at step 60 in accordance with ITU-TR T.30.

At step 64 destination interface 24b enters V.21 mode, and at step 66 destination interface 24b processes V.21 messages from destination fax machine 18b transmitted at step 68 by converting the analog tones into

30 digital data and examining the V.21 messages received.

Possible V.21 messages transmitted by destination fax machine 18b at this point in the fax processing are Non-Standard Facilities (NSF), Called Subscriber Identification (CSI) and Digital Identification Signal (DIS). The DIS message contains information about the fax capabilities of destination

35 fax machine 18b including acceptable modulation protocols and maximum demodulation rates. Modulation protocols include V.27ter, V.27ter Fall Back Mode (FBM), V.29, V.33 and V.17. The protocol information is contained in a four bit field in the DIS message.

Additionally, the DIS message contains other information about destination fax machine 18b including Group I and Group II operation and error correction operation. Most of this other information is contained in bit fields 1-8 and 25 - 72 of the DIS message.

5 In accordance with one embodiment of the invention, destination interface 24b continues to process and examine V.21 messages at step 66 until it is determines at step 70 that a DIS message has been received. In the preferred embodiment of the invention, once the DIS message has been received, destination interface 24b forwards only the DIS message and the
10 CSI message to source interface 24a at step 72 via the digital channel. Thus, in the preferred embodiment of the invention all non-standard features indicated in NSF message will not be received by source fax machine 18a.

At step 74, source interface 24a processes the DIS and CSI messages received from destination interface 24b. This processing includes examining
15 the DIS message to determine the acceptable modulation protocols and maximum data rate specified, and if the maximum data rate exceeds the maximum data rate of the digital channel between source interface 24a and destination interface 24b. If the maximum rate does exceed the digital channel rate, source interface 24a modifies the DIS message to indicate a
20 different maximum data rate and possibly a different modulation protocol as described in greater detail below. Additionally, in one embodiment of the invention, source interface 24a discards bit fields 25 - 72 of the DIS message and sets bit fields 1-8 to logic zero to indicate that none of the options specified by these fields are invoked, thereby simplifying the fax processing.

25 Source interface 24a also modifies a minimum scan line time (MSLT) field in the DIS message to indicate a duration of 40 milliseconds (ms), which is the maximum as specified by T.30. The MSLT is a time interval allocated between the transmission of lines of the page from the source fax machine 18a to allow for printing at the destination fax machine. By
30 modifying the DIS message to require an MSLT of 40 ms, even when destination fax machine 18b can process data lines more quickly, the invention provides a time interval between lines that can be used to recover from intermittent transmission delays introduced by the digital channel.

Table I lists the data rate and modulation protocols specified in the
35 DIS transmitted from source interface 24a to the source fax machine 18a after modification of the DIS message at step 74 for a given digital channel rate (DCR) and the given set of fax demodulation rates specified in the DIS message received from destination interface 24b and transmitted from destination fax machine 18b (DIS_{Dest}).

DCR DIS _{Dest}	2400 ≤ DCR < 4800	4800 ≤ DCR < 7200	7200 ≤ DCR < 9600	9600 ≤ DCR < 12000	12000 ≤ DCR < 14400	14400 ≤ DCR
V.17 or V.33	V.27ter FBM	V.27ter	V.29 + V.27ter	V.29 + V.27ter	DNC	DNC
V.29 Only	V.29 + V.27ter	V.29 + V.27ter	DNC	DNC	DNC	DNC
V.29 + V.27ter	V.27ter FBM	V.27ter	DNC	DNC	DNC	DNC
V.27ter	V.27ter FBM	DNC	DNC	DNC	DNC	DNC
V.27ter FBM	DNC	DNC	DNC	DNC	DNC	DNC

Table I.

5 An entry for DNC is "do not change." As is well known in the art, V.17 includes rates of 14,400 bps, 12,000 bps, 9,600 bps, and 7,200 bps; V.33 includes rates of 14,400 bps and 12,000 bps; V.29 includes rates of 9,600 bps and 7,200 bps; V.27ter includes rates 4,800 bps and 2,400 bps; and V.27ter FBM is rate 2,400 bps.

10 As will be apparent, the modulation protocols and rate specified will be greater than the digital channel rate in some instances. However, when this is the case, source interface 24a will send Failure to Train (FTT) messages in response to initial training requests from source fax machine 18a as described below until source fax machine 18a drops down to a rate
15 supported by the digital channel.

In general, source interface 24a indicates that destination fax machine 18b can accept a protocol having a rate equal to or less than the digital channel rate and in some instances greater than the digital channel rate by the least amount. The negotiated rate between source interface 24a and
20 source fax machine 18a is then be forced to be below the lesser of the digital channel rate and the destination fax interface rate (D_RATE) via transmission of FTT messages so that the maximum source fax transmission rate that is compatible with the digital channel can be achieved.

25 It should also be understood that, in the preferred embodiment of the invention, source interface 24a need not indicate a modulation protocol that is acceptable to the destination fax machine 18b, as the source interface 24a

will demodulate the data before transmission to destination interface 24b. Upon receipt of the demodulated data, destination interface 24b can remodulate using a modulation protocol compatible with the destination fax machine 18b including protocols that operate at higher transmission rates as described in greater detail below.

In an alternative embodiment of the invention, destination interface 24b also forwards the NSF messages to source interface 24a, which determines if any features specified in the NSF message are inconsistent with the digital channel, and modifies the message to specify that such features are not available.

At step 76, source interface 24a modulates the modified V.21 messages including the DIS message into tones that are transmitted to source fax machine 18a. These V.21 tone message are retransmitted until a response is received from source fax machine 18a.

Source fax machine 18a receives the V.21 tone messages at step 78, and at step 80 generates and transmits V.21 tone response messages which can include Non-Standard Features Setup (NSS), Transmitting Subscriber Identification (TSI) and Digital Command Signal (DCS). In the preferred embodiment of the invention, an NSS message will not be transmitted because destination interface 24b does not forward NSF messages. Source interface 24a converts the V.21 tone response messages into V.21 digital data responses. That is, source interface 24a demodulates the V.21 tone response messages.

After demodulating each V.21 tone response message at step 82, source interface 24a examines the DCS message to determine the transmission rate specified by the source fax machine, and forwards the digital V.21 messages to the destination interface 24b. At step 84, destination interface 24b modifies the set of MSLT bit fields (21, 22 and 23) of the DCS message to match what was originally required by destination fax machine 18b, and proceeds to remodulate and forward the modified V.21 response messages to destination fax machine 18b. Destination fax machine 18b receives the V.21 response messages at step 86.

At step 92 source fax machine 18a begins to negotiate a source transmission rate S_RATE by transmitting a TCF message received by source interface 24a at step 94.

Similarly, at step 88 destination interface 24b begins to negotiate a destination fax transmission rate D_RATE by transmitting a Training Check (TCF) message to destination fax machine 18b. Destination fax machine 18b

74769-202

10

begins to receive the TCF message at step 90. This begins the process of independent rate negotiation (also referred to as a "training session").

5 In many instances described below, fax processing will return to steps 80 through 86. In these instances, the DCS message will not be exchanged between source interface 24a and destination interface 24b at steps 82 and 84 because the relevant information contained in DCS message is already known by destination interface 24b. Eliminating the need to exchange this information further speeds up the process of independent rate negotiation and therefore further decreases the risk of timeouts.

10 Independent rate negotiation is the negotiation of a source fax interface rate S_RATE between source fax interface 24a and source fax machine 18a, and a destination fax interface rate D_RATE between destination interface 24b and destination fax 18b, with a minimal number of messages exchanged between source interface 18a and destination interface 15 18b. This is achieved by allowing the destination fax interface rate D_RATE to exceed the source fax interface rate S_RATE and the digital channel rate. Additionally, independent rate negotiation is achieved by making source interface 24a and destination interface 24b sufficiently intelligent to determine the proper interface rate without the need to communicate with 20 one another and to process and respond to source and destination fax machines 18a and 18b in accordance with V.21 and T.30.

At step 140, source interface 24a determines if the TCF received at step 94 is valid, and if not sends an FTT to source fax machine 18a at step 142 and returns to step 82 to receive the next DCS and TCF messages from source fax 25 machine 18b. When step 82 is performed more than once, the DCS message is not forwarded again to destination interface 24b, as was performed originally, thus keeping the rate negotiations performed by the source and destination interfaces independent. If the TCF is valid, source interface 24a proceeds to FIG 5B.

30 Referring now to FIG. 5B, at step 97 destination fax machine 18b responds to the TCF from destination interface 24b with either a failure to train message (FTT) or a confirmation to receive message (CFR), which is received by destination interface 24b at step 101 and demodulated and forwarded to source interface 24a.

35 Simultaneously, at source interface 24a begins polling for additional DCS and TCF messages from source fax machine 18a at step 152, as well as for either FTT or CFR messages from destination interface 24b at step 154.

At step 99, source interface 24a determines if a new TCF has been received, and if so increments TCF_CNT at step 100. TCF_CNT is a counter

which tracks the number of TCF messages that have been received from source fax machine 18a without a response being transmitted from source interface 24a. TCF_CNT is initialized to zero (initialization not shown). If a TCF was not received, source interface 24a proceeds to step 95, however, it should be noted, that in order to have arrived at step 99 from FIG. 5A, a valid TCF will have been received. Therefore TCF_CNT is incremented during the first performance of step 99 and is equal to one (1) at this time.

At step 95 source interface 24a determines if the source fax interface rate S_RATE at which source fax machine 18a is attempting to train is greater than the digital channel rate, and if so proceeds to step 114.

If the source fax interface rate S_RATE at which source fax machine 18a is attempting to train is not greater than the digital channel rate, it is determined at step 96 whether an FTT message was received at step 154, and if so, the estimate of the destination fax interface rate ED_RATE is reduced at step 103. While not shown, ED_RATE is initialized to the rate specified by source fax machine 18a in the initial DCS message. Source interface 24a then proceeds to step 105.

If it is determined at step 96 that an FTT was not received from destination interface 24b at step 154, source interface 24a proceeds to step 105. At step 105 it is determined if the source fax interface rate S_RATE is greater than the estimate of the destination fax interface rate ED_RATE, and if so, source interface proceeds to step 114.

If it is determined at step 105 that the source fax interface rate S_RATE is not greater than the estimate of the destination fax interface rate ED_RATE it is then determined at step 111 if a CFR was received at step 154, and if so source interface 24a continues fax processing as shown in FIG. 5C.

If a CFR was not received, source interface proceeds to step 98 where it is determined if TCF_CNT is greater than 2. If TCF_CNT is not greater than 2, source interface 24a returns to step 152. If TCF_CNT is greater than 2, source interface 24a proceeds to step 114.

At step 114, source interface 24a transmits an FTT message to source fax machine 18a if TCF_CNT is greater than zero. After step 114 is performed TCF_CNT is set to zero at step 115 and source interface 24a returns to step 152. As noted above, TCF_CNT is a counter which tracks the number of TCF message that have been received from source fax machine 18a without a response being transmitted from source interface 24a. By transmitting an FTT if TCF_CNT exceeds 2, a repetition timeout at source fax machine 18a is prevented.

Simultaneous with the processing performed by source interface 24a, destination interface 24b, determines at step 120 if A CFR was received at step 101. If so, a timer is started at step 128 and fax processing continues in FIG 5C.

5 If a CFR was not received, destination interface 24b determines at step 121 if an FTT message was received at step 101. If an FTT message was received, the destination fax interface rate D_RATE is recomputed at step 122, and at step 124 an attempt to negotiate the recomputed destination fax interface rate D_RATE is performed via transmission of DCS and TCF
10 messages that are received by destination fax machine 18b at step 126. After transmission of the DCS and TCF messages at step 124, the response to the new TCF message is received at step 101. If an FTT message was not received at step 101.

 If it is determined at step 121 that an FTT message was not received,
15 the destination fax interface 24b repeats the transmission of the last DCS and TCF messages at step 124 if a predetermined period of time has expired in accordance with ITU-TR T.30.

 At step 150, source fax machine 18a transmits DCS and TCF messages if an FTT message or no response is received from source interface 24a.

20 Referring now to FIG. 5C, destination interface 24a determines at step 200 if the fax page processing has started and if so proceeds to step 224. If fax page processing has not started, it is determined at step 202 if the timer started at step 128 (FIG. 5B) has expired, and if not step 200 is performed again. If the timer has expired, a blank line is transmitted to destination fax
25 machine 18b to prevent call drop due to a timeout. After the blank line is transmitted, step 200 is performed again and in the preferred embodiment of the invention blank lines are repeatedly transmitted at 1 second intervals until the fax page transmission starts. Other intervals may be used, however, intervals of more than 2 seconds are not preferred.

30 Source fax machine 18a begins transmitting the fax page at step 221 in the form of fax tones that are received by source interface 24a via the analog connection. Source interface 24a performs fax tone processing at step 222 by converting the fax tones into digital data, stripping out any fill bits in each line, and by forwarding that digital data to destination interface 24b via the
35 digital channel.

 Destination interface 24b receives the digital data and performs fax processing at step 224 by converting the digital data back into fax tones that are transmitted to destination fax machine 18b. The fax tones are received by destination fax 18b at step 226.

During the course of the fax processing, destination interface 24b inserts fill bits into the data being transmitted to destination fax machine 18b at step 224 to meet the MSLT requirements of destination fax machine 18b and to compensate for a destination fax transmission rate D_RATE that is greater than the source fax transmission rate S_RATE. The procedure for inserting fill bits is described in greater detail below.

At the end of each line of fax data transmitted, source interface 24a determines at step 218 if a complete page of fax data has been transmitted, and if not, returns to step 222. After a complete page has been transmitted, V.21 message processing is performed at steps 230 - 238 as described in greater detail below.

At step 240, source interface 24a determines if MPS and MCF messages were received at step 232.. If not, fax page processing ends at steps 134a - d. If MPS and MCF messages were received, source interface 24a resumes fax page processing at step 222.

At step 242, destination interface 24b determines if MPS and MCF messages were received at step 234, and if so returns to step 128 of FIG. 5B. If MPS and MCF messages were not received at step 234, fax page processing ends at step 134c.

In some instances, an end of message (EOM) may be processed at steps 230 and 238, indicating that the fax has been transmitted, but that an additional document may be transmitted with different parameters. In this case, processing will resume at step 68 of FIG. 5A.

In other instances, an RTN message from the destination fax machine 18b may be processed indicating a need to retrain. In this case, fax processing resumes at steps 80 through 86 of FIG. 5A.

In still other instances, an RTP message will be received from destination fax machine 24b. If the RTP message is received in response to an MPS message, fax processing resumes at steps 80 - 86 of FIG. 5A.

FIG. 6 is a flow diagram illustrating the steps performed by source fax machine 18a, source interface 24a, destination interface 24b, and destination fax machine 18b when processing the V.21 messages at steps 230 - 238 of FIG. 5C in accordance with one embodiment of the invention. Page end processing begins at steps 250a - d, and at step 252 the source fax machine 18a, begins to transmit a V.21 preamble message.

Source interface 24a begins to receive the preamble message at step 254, and after a short duration, notifies destination interface 24b that the preamble is being received via a digital message transmitted at step 256. Destination interface 24b receives notification at step 258, and responds by

beginning to generate a V.21 preamble that is received at the destination fax machine at step 260.

At step 262, the transmission of the V.21 preamble message from the source fax machine 18a ends, which is detected at the source interface 24a at
5 step 264. At step 266, source fax machine 18a transmits an EOP, MPS, or EOM V.21 message which is received at source interface 24a at step 268.

At step 270 source interface 24a transmits the digital V.21 message to destination interface 24b. In response, destination interface 24b ensures that the transmission of the V.21 preamble has at least one (1) second duration,
10 and if so ends transmission of the V.21 preamble at step 280. Destination interface 24b then converts the digital V.21 message to a tonal V.21 message which is appended to the preamble and which is received and processed by destination fax machine 18b at step 282.

At step 284 destination fax responds by transmitting V.21 response
15 messages which could be Message Confirmation (MCF), Retrain Positive (RTP), and Retrain Negative (RTN) which are converted into digital messages by destination interface 24b at step 286. The digital V.21 messages are received and converted into tonal V.21 messages by source interface 24a at step 288 and the tonal V.21 messages are received by source fax machine
20 18a at step 290. It should be understood that steps 284 - 290 are conducted using the "preamble pipelining" as performed during the processing shown in steps 252 to 282, only in the reverse direction.

Thus, source interface 24a pipelines transmission of the V.21 preamble by initiating transmission of the preamble from destination
25 interface 24b before transmission of the preamble from the source fax machine 18a terminates. Pipelining transmission of the V.21 preamble message during the page end reduces the time necessary to process the preamble message, thereby allowing the V.21 messages to be transmitted more quickly to meet T.30 timing requirements.

FIG. 7 is a flow diagram illustrating the steps performed by destination
30 interface 24b during fax page processing when performed in accordance with one embodiment of the invention. The fax processing begins at step 200 and at step 202 destination interface 24b checks for a data line from source interface 24a, and if received adds that line to a data line queue. It should be
35 noted that the data line can be received at a rate that is lower than the destination fax transmission rate D_RATE.

At step 304, it is determined if fewer than two lines are queued, and if not step 302 is performed again. If so, the oldest data line in the queue is

transmitted at the higher data rate to destination fax machine 18b at step 306. That is, the queue is operating in a first-in-first-out (FIFO) manner.

After transmission of the data line at the higher transmission rate, destination interface 24b transmits additional fill bits to destination fax machine 18b at step 308. After transmission of the fill bits, destination interface 24b determines at step 312 if an end of line (EOL) has been received for the current data line from source interface 24a, or if a timeout has expired, and if not more fill bits are transmitted at step 308. If an EOL has been received or a timeout has expired,, an EOL is transmitted to destination fax machine 18b at step 310 if the required MSLT time has also been met. If the required MSLT time has not been met, additional fill bit are transmitted until the required MSLT time is satisfied. In the preferred embodiment of the invention, the timeout is approximately equal to 2 seconds, although timeouts of between 1 to 5 seconds are also preferred.

At step 311, it is determined if the last data line has been received, and if not, step 302 is performed again. If the last data line has been received, it is determined at step 313 if the data line queue is empty, and if not step 306 is performed again. If the queue is empty, the fax processing for the page ends of step 214.

FIG. 8 is a timing diagram further illustrating the operation of destination interface 24b when the destination fax transmission rate D_RATE is higher than the source fax transmission rate S_RATE in accordance with one embodiment of the invention. Time goes from left to right, and the top line represents data received from source interface 24a, and the bottom line represents data transmitted to destination fax machine 18b.

In accordance with performance of the steps set forth in FIG. 5, a first and second line of data are received including an end of line message (EOL), and the lines are entered into a data line queue (not shown). After receipt of end of line for the second line, transmission of the first line to destination fax machine 18b at the higher transmission rate begins.

In the exemplary embodiment shown, the transmission of line 1 to destination fax machine 18b is finished sooner than reception of line 3 from source interface 24a because it is being performed at a higher data rate. Thus, to postpone transmission of line 2, fill bits are transmitted until the end of line message for line 3 is received, at which time and end of line message for line 1 is transmitted. The process continues until a page of data has been transmitted.

Queuing received data before forwarding the data lines to destination fax machine 18b allows proper transmission to take place when the transmission rates are mismatched because fill bits can be inserted at the end of each line without interrupting the flow of data. Inserting fill bits in this manner is necessary because it the only place such fill bits can be inserted without disrupting the accurate transmission of the fax data. Additionally, queuing received data lines also allows compensation for variable channel delay as the queue can supply necessary data lines during such delays maintaining a constant flow of data to the destination fax.

FIG. 9 is an illustration of a cellular telephone system configured to process analog fax transmissions in accordance with one embodiment of the invention. The wireless digital telecommunications service subscriber is provided with a modified subscriber unit 26 to which analog fax machine 28a is connected. Modified subscriber unit 26 includes an analog fax interface, and interfaces with a base station 27 with RF signals. In the preferred embodiment of the invention, the RF signals are modulated in accordance with the IS-95 over-the-air interface standard.

Base station 27 are coupled to base station controller (BSC) 29 which also includes an analog fax interface. BSC 29 interfaces with analog fax machine 28b by way of PSTN 16.

During a fax transmitted from analog fax machine 28a to analog fax machine 28b, modified subscriber unit 26 acts as the source interface and BSC 29 acts as the destination interface. During a fax transmitted from analog fax machine 28b to analog fax machine 28a, BSC 29 acts as the source interface, and modified subscriber unit 26 acts as the destination interface.

Thus, a digital network interface that is compatible with standard analog fax machines has been described. While the description includes an embodiment configured for use with a wireless cellular telephone system, the invention may be used in conjunction with other digital networks including wire based digital networks.

The previous description of the preferred embodiments is provided to enable any person skilled in the art to make or use the present invention. The various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of the inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

I (WE) CLAIM:

74769-202

17

CLAIMS:

1. A system for transmitting a fax from a source fax machine to a destination fax machine over a variable rate digital channel comprising:

5 source interface means for receiving a first analog information signal from the source fax machine at a first transmission rate, wherein the first transmission rate is less than or equal to a maximum data rate of the variable rate digital channel, for converting the first analog
10 information signal into a digital information signal, for generating a plurality of control signals, for transmitting the digital information signal and the plurality of control signals via the variable rate digital channel, and for receiving a plurality of destination interface device
15 responses via the variable rate digital channel; and

destination interface means for receiving the digital information signal and the plurality of control signals, for converting the digital information signal into a second analog information signal, for transmitting the
20 second analog information signal to the destination fax machine at a second transmission rate, wherein the second transmission rate is negotiated independently from the first transmission rate, for generating a set of instructions for transmission to the destination fax machine, wherein the set
25 of instructions is generated by the plurality of control signals, for receiving a plurality of destination fax machine responses, for converting the plurality of destination fax machine responses into the plurality of destination interface device responses, and for transmitting
30 the plurality of destination interface device responses to the source interface means.

74769-202

18

2. The system of Claim 1, wherein the source interface means is further for creating a first training session between the source interface means and the source fax machine, and the destination interface means is further
5 for creating a second training session between the destination interface means and the destination fax machine, wherein the first training session results in the first transmission rate and the second training session results in the second transmission rate.

10 3. The system of Claim 2, wherein the source interface means is further for slowing transmissions with the source fax machine, wherein the source interface means informs the source fax machine to conduct the first training session at a transmission rate that is less than or equal to
15 a maximum transmission capability of the destination fax machine.

4. The system of Claim 2, wherein the source interface means is further for slowing transmissions with the source fax machine, wherein the source interface means
20 informs the source fax machine to conduct the first training session at a transmission rate that is less than or equal to the maximum data rate of the variable rate digital channel.

5. The system of Claim 3, wherein the source interface means is further for misinforming the source fax machine that the source fax machine is communicating with a
25 fax machine with V.27ter and V.29 capabilities if the destination fax machine is a fax machine with only V.29 capability.

6. The system of Claim 2, wherein the first
30 transmission rate is less than or equal to the maximum data rate of the variable rate digital channel and less than or

74769-202

19

equal to the maximum transmission capability of the destination fax machine.

7. The system of Claim 6, wherein the source interface means is for transmitting a failure to train message to the source fax machine during the first training session, wherein the failure to train message informs the source fax machine to reduce the first transmission rate of the first training session.

8. The system of Claim 2, wherein the destination interface means is further for transmitting the second transmission rate of the second training session to the source interface means, wherein the source interface means conducts the first training session by transmitting failure to train messages to the source fax machine until the second transmission rate of the second training session arrives from the destination interface means.

9. The system of Claim 1, wherein the source interface means is further for transmitting a preamble indicator to the destination interface means, wherein the preamble indicator is one of the plurality of control signals and indicates the start of transmission of a source fax preamble message.

10. The system of Claim 9, wherein destination interface means is further for generating a new preamble message before the end of transmission of the source fax preamble message and for transmitting the new preamble message to the destination fax machine.

11. The system of Claim 1, wherein the destination interface means is further for transmitting a preamble indicator to the source interface means, wherein the preamble indicator is one of the plurality of destination

74769-202

20

interface device responses and indicates the start of transmission of a destination fax preamble message.

12. The system of Claim 11, wherein the source interface means is further for generating a new preamble message before the end of transmission of the destination fax preamble message and for transmitting the new preamble message to the source fax machine.

13. The system of Claim 1, wherein the destination interface means is for blocking a portion of the plurality of destination fax machine responses.

14. The system of Claim 13, wherein the portion of the plurality of destination fax machine responses contains error correction information.

15. The system of Claim 1, wherein the source interface means is for blocking a portion of the plurality of destination fax machine responses.

16. The system of Claim 15, wherein the portion of the plurality of destination fax machine responses contains error correction information.

17. The system of Claim 1, wherein said source interface means is further for modifying a DIS message from the destination fax machine to indicate that Group I and Group II fax processing are not supported.

18. The system of Claim 1, wherein a fluctuation in the maximum data rate of the variable rate digital channel is compensated by increasing a minimum scan line time in a DIS message from the destination fax machine, wherein the DIS message is one of the plurality of destination fax machine responses converted by the destination interface means.

74769-202

21

19. The system of Claim 2, wherein the source interface means is further for delaying the completion of the first training session until the source interface means receives a message from the destination interface means, wherein the message contains the second transmission rate from the second training session.

20. The system of Claim 19, wherein the source interface means is further for delaying completion of the first training session by purposefully ignoring a TCF message from the source fax machine.

21. The system of Claim 20, wherein the step of delaying completion of the first training session is accomplished by transmitting a failure to train message after receiving three TCF messages from the source fax machine.

22. The system of Claim 2, wherein the destination interface means is further for altering a minimum scan line time advertised by the destination fax machine, for transmitting the altered minimum scan line time to the source interface means, and for transmitting the second analog information signal to the destination fax machine using the minimum scan line time advertised by the destination fax machine.

23. The system of Claim 2, wherein the source interface means is further for altering a minimum scan line time advertised by the destination interface means, for transmitting the altered minimum scan line time to the source fax machine, and for transmitting the digital information signal to the destination interface means using the minimum scan line time advertised by the destination interface means.

74769-202

22

24. The system of Claim 2, wherein the system compensates for the variable rate of the variable rate digital channel by transmitting an altered minimum scan line time from the source interface means to the source fax machine, wherein the altered minimum scan line time is greater than or equal to the minimum scan line time of the destination fax machine.

25. The system of Claim 2, wherein the first training session and the second training session begin with the same transmission rate, but at the end of the first training session and the end of the second transmission session, the first transmission rate is less than the second transmission rate.

26. The system of Claim 2, wherein the source interface means is further for blocking repeated messages to the destination interface means.

27. The system of Claim 2, wherein the destination interface means is further for blocking repeated messages to the source interface means.

28. The system of Claim 2, wherein the destination interface means is further for communicating with the destination fax machine using a different modulation protocol than the source fax machine uses for communicating with the source fax machine.

29. A method for transmitting a fax between a source fax machine to a destination fax machine over a variable rate digital channel comprising the steps of:

communicating between a destination interface device with the destination fax machine at a destination fax transmission rate;

74769-202

23

communicating between the destination interface device and a source interface device at a maximum rate of the variable rate digital channel; and

communicating between a source interface device
5 with the source fax machine at a source fax transmission rate, wherein the source fax transmission rate and the destination fax transmission rate are independently negotiated.

30. The method of Claim 29, wherein the step of
10 communicating between the destination interface device and the destination fax machine further comprises the steps of:

creating a destination training session between the destination interface device and the destination fax machine; and

15 transmitting destination training session information to the source interface device.

31. The method of Claim 30, wherein the step of communicating between the source interface device and the source fax machine further comprises the steps of:

20 processing destination training session information at the source interface device; and

creating a source training session between the source interface device and the source fax machine, wherein the source training session is based upon destination
25 training session information.

32. A method for transmitting a fax from a source fax machine to a destination fax machine over a variable rate digital channel comprising the steps of:

74769-202

24

receiving a first analog information signal at
source fax transmission rate from the source fax machine to
a source interface device, wherein the first transmission
rate is less than or equal to a maximum data rate of the
5 variable rate digital channel;

converting the first analog information signal
into a digital information signal at the source interface
device;

generating a plurality of control signals at the
10 source interface device;

transmitting the digital information signal and
the plurality of control signals via the variable rate
digital channel to a destination interface device;

receiving the digital information signal and the
15 plurality of control signals at the destination interface
device;

receiving a plurality of destination interface
device responses via the variable rate digital channel at
the source interface device from the destination interface
20 device;

converting the digital information signal into a
second analog information signal at the destination
interface device;

transmitting the second analog information signal
25 at a second transmission rate from the destination interface
device to the destination fax machine, wherein the second
transmission rate is greater than or equal to the first
transmission rate;

74769-202

25

generating a set of instructions for transmission to the destination fax machine at the destination interface device, wherein the set of instructions is determined by the plurality of control signals;

5 transmitting the set of instructions to the destination fax machine;

 receiving a plurality of destination fax machine responses at the destination interface device, wherein the plurality of destination fax machine responses are based
10 upon the set of instructions;

 converting the plurality of destination fax machine responses into the plurality of destination interface device responses at the destination interface device; and

15 transmitting the plurality of destination interface device responses to the source interface device.

33. The method of Claim 32, further comprising the steps of:

 creating a first training session between the
20 source interface device and the source fax machine;

 creating a second training session between the destination interface device and the destination fax machine, wherein the first training session results in the first transmission rate and the second training session
25 results in the second transmission rate.

34. A system for transmitting a fax from a source fax machine to a destination fax machine over a rate limited digital channel having a maximum channel data rate, comprising:

74769-202

26

source interface means for converting first tonal fax data received from the source fax machine into a digital fax data, wherein said first tonal fax data is received at a first transmission rate that is less than or equal to the maximum channel data rate, wherein said source interface means is further for discarding bit fields 25 through 72 in a DIS message from the destination fax machine to simplify fax processing; and

destination interface means for converting said digital fax data received over the rate limited digital channel into second tonal fax data that is transmitted to the destination fax machine at a second transmission rate that is equal to or greater than said first transmission rate.

35. A system for transmitting a fax from a source fax machine to a destination fax machine over a rate limited digital channel having a maximum channel data rate, comprising:

source interface means for converting first tonal fax data received from the source fax machine into a digital fax data, wherein said first tonal fax data is received at a first transmission rate that is less than or equal to the maximum channel data rate, wherein said source interface means is further for modifying a DIS message from the destination fax machine to indicate a minimum scan line time of 40 ms so as to cause the source fax machine to allocate a minimum of 40 ms between transmission of a line and transmission of a next line; and

destination interface means for converting said digital fax data received over the rate limited digital channel into second tonal fax data that is transmitted to the destination fax machine at a second transmission rate

74769-202

27

that is equal to or greater than said first transmission rate, wherein said destination interface means introduces a time offset for compensating for fades by indicating a destination minimum scan line time to the destination fax machine that provides a maximum time differential between said minimum scan line time and said destination minimum scan line time.

36. A source interface for interfacing between a source fax machine and a destination fax machine and for communicating with a destination fax interface over a variable rate digital channel comprising:

means for receiving an analog information signal from the source fax machine at a first transmission rate, wherein the first transmission rate is less than or equal to a maximum data rate of the variable rate digital channel;

means for converting the analog information signal into a digital information signal;

means for generating a plurality of control signals;

means for transmitting the digital information signal and the plurality of control signals via the variable rate digital channel;

means for receiving a plurality of destination interface device responses via the variable rate digital channel; and

means for modifying at least one of the destination interface device responses.

37. A destination interface for interfacing between a source fax machine operating at a first transmission rate

74769-202

28

and a destination fax machine and for communicating with a source fax interface over a variable rate digital channel comprising:

means for receiving a digital information signal
5 and a plurality of control signals from the source fax interface over the variable rate digital channel;

means for converting the digital information signal into an analog information signal;

means for transmitting the analog information
10 signal to the destination fax machine at a second transmission rate, wherein the second transmission rate is negotiated independently from the first transmission rate;

means for generating a set of instructions for transmission to the destination fax machine from the
15 plurality of control signals;

means for receiving a plurality of destination fax machine responses from the destination fax machine;

means for converting the plurality of destination fax machine responses into a plurality of destination
20 interface device responses; and

means for transmitting the plurality of destination interface device responses to the source fax interface.

SMART & BIGGAR

OTTAWA, CANADA

PATENT AGENTS

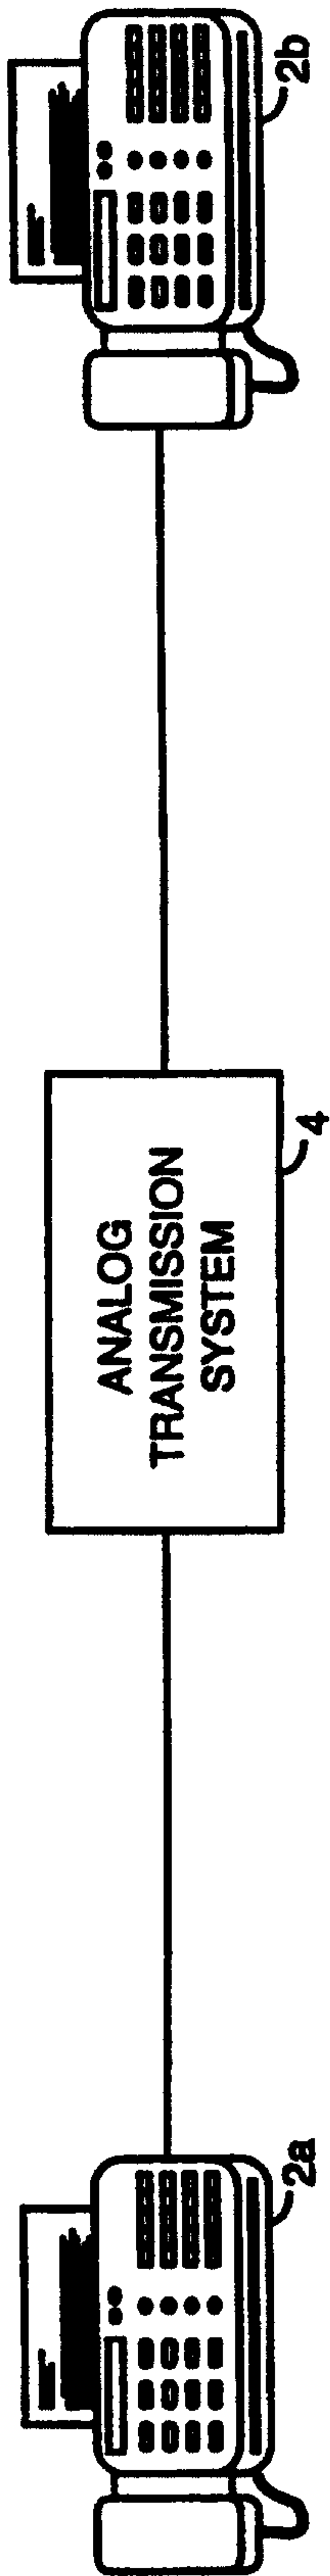


FIG. 1

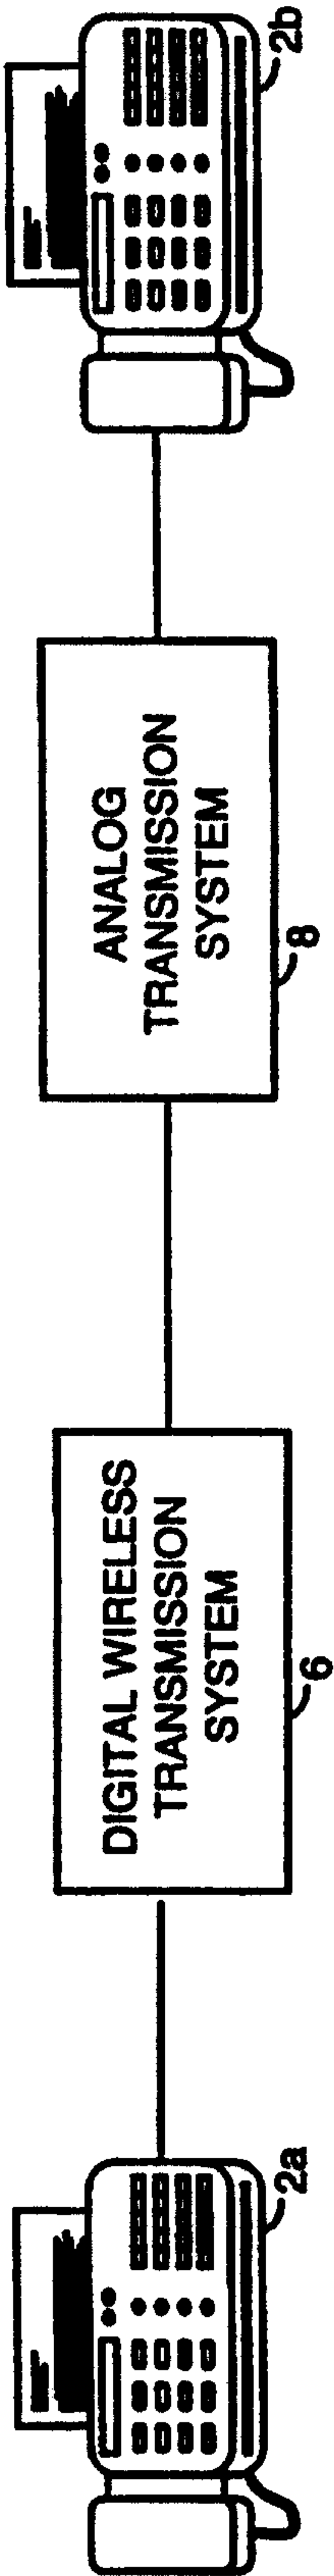


FIG. 2

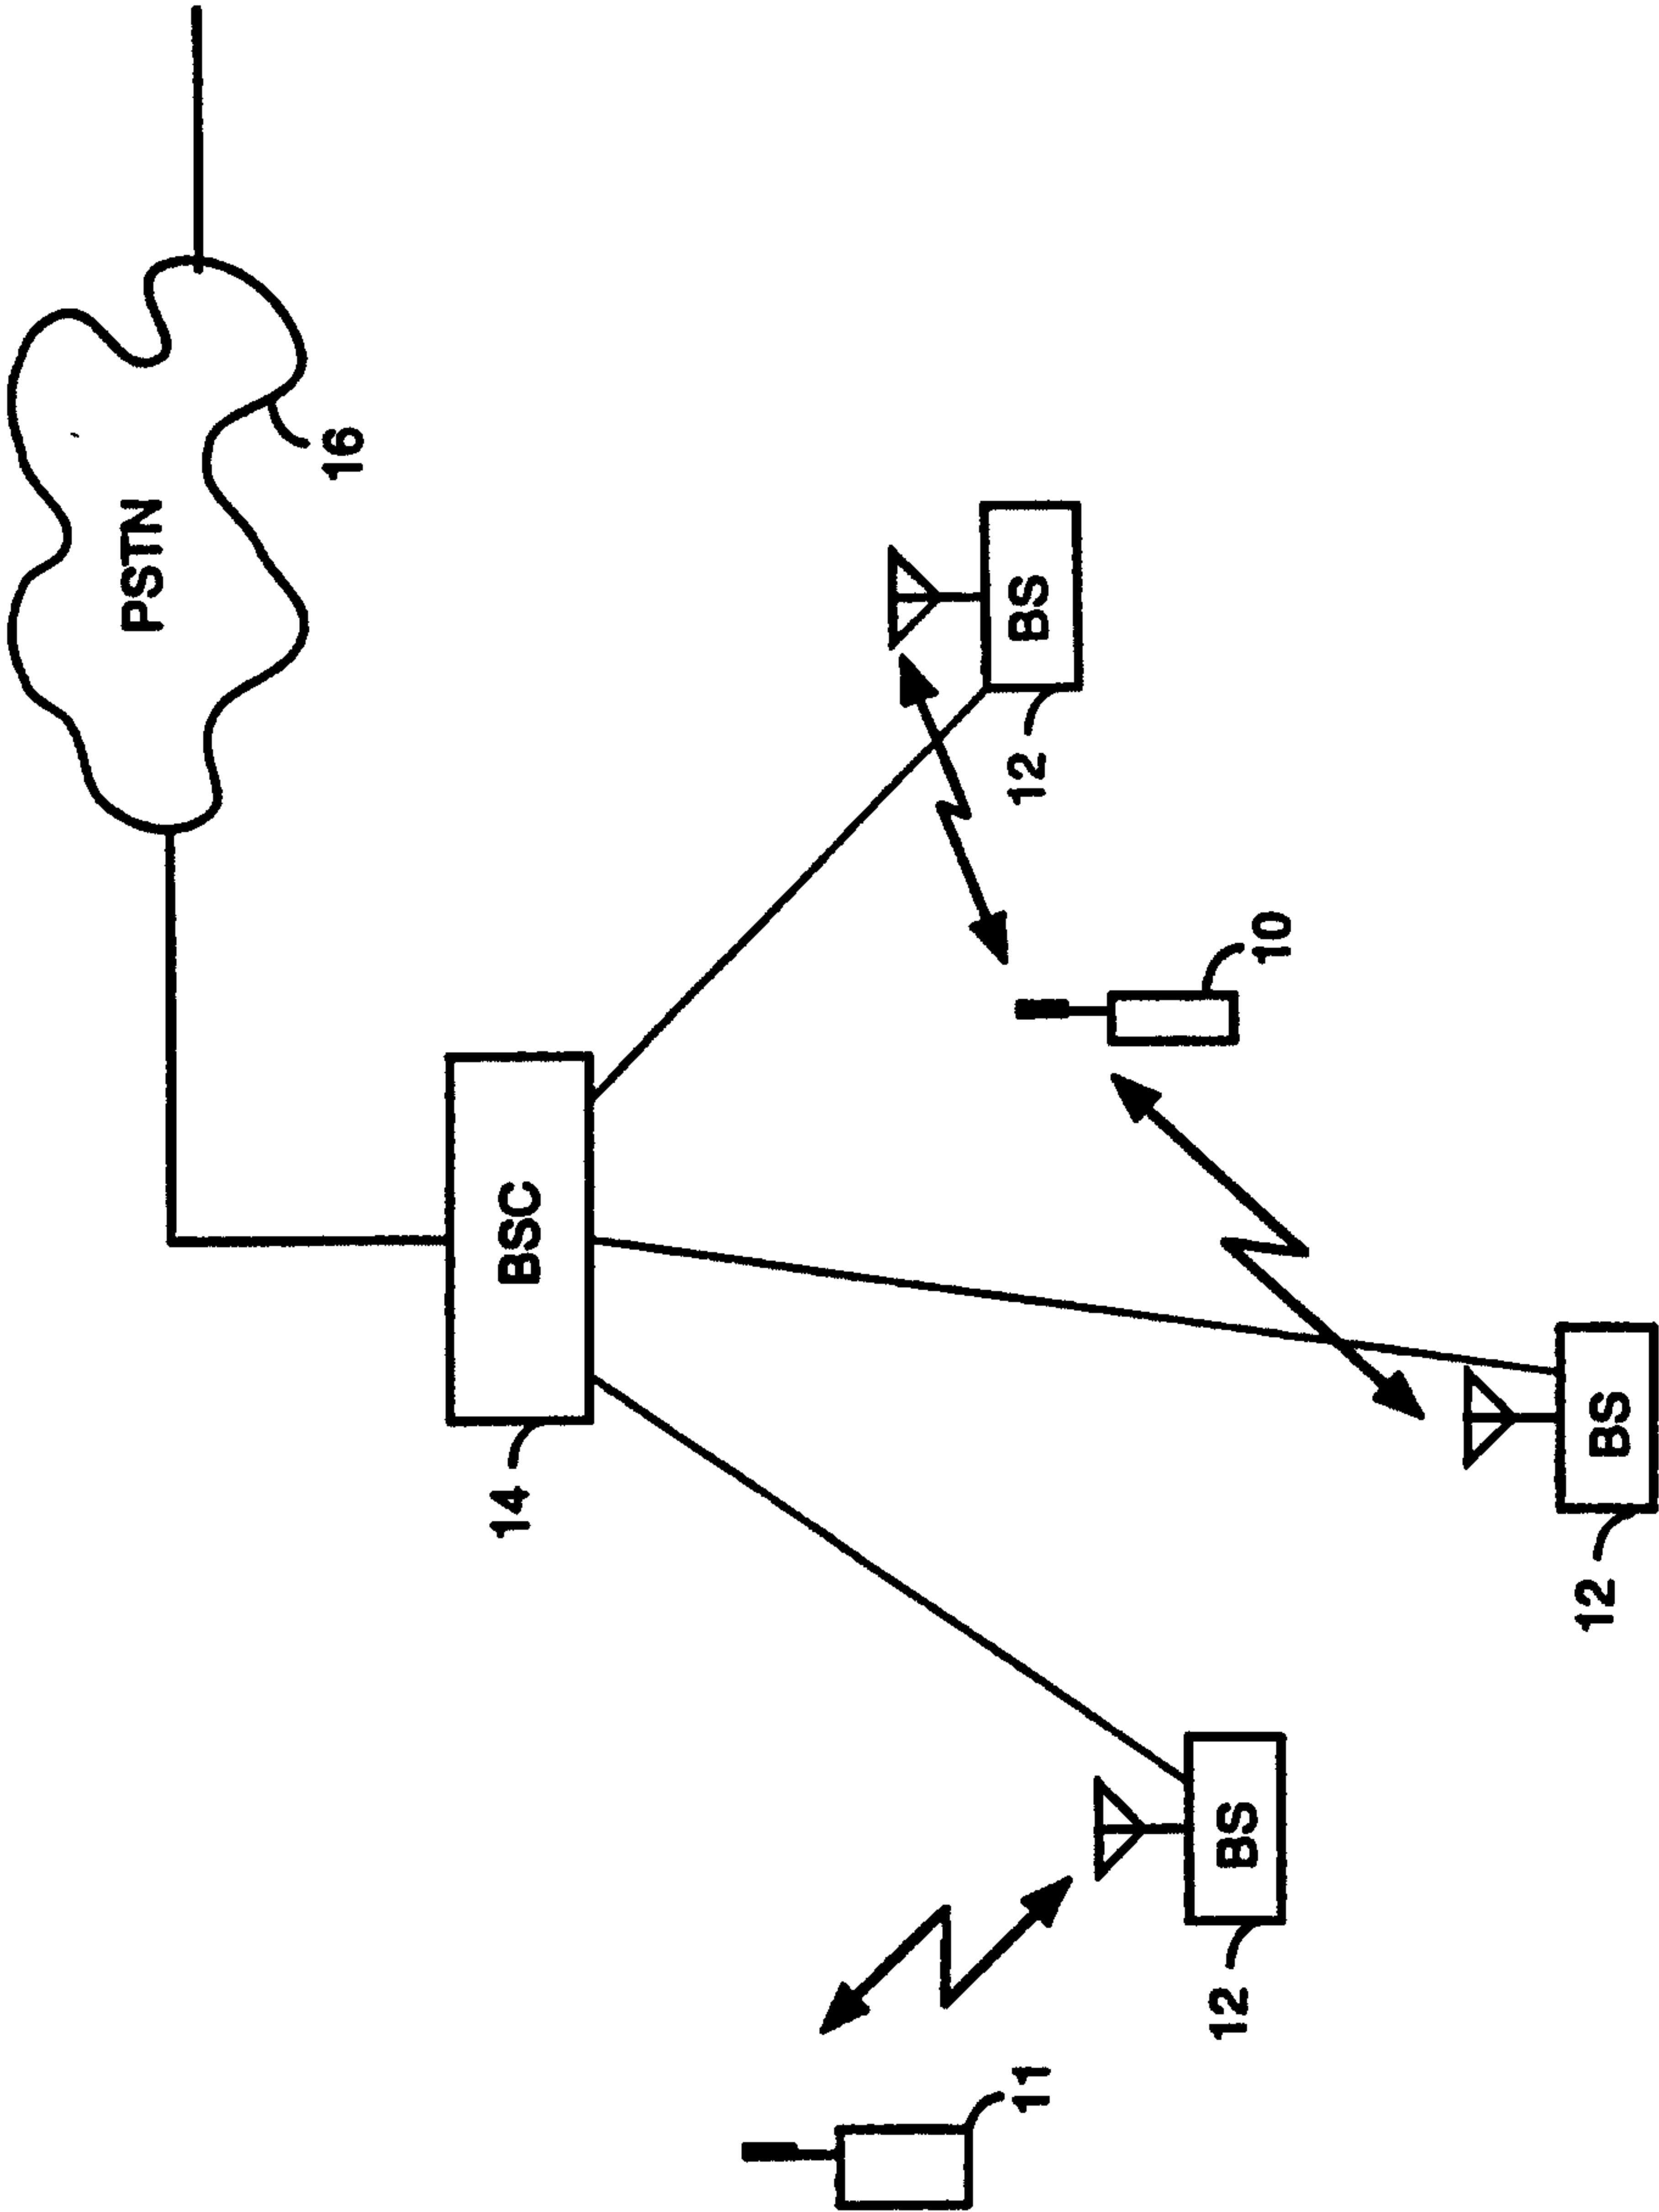


FIG. 3

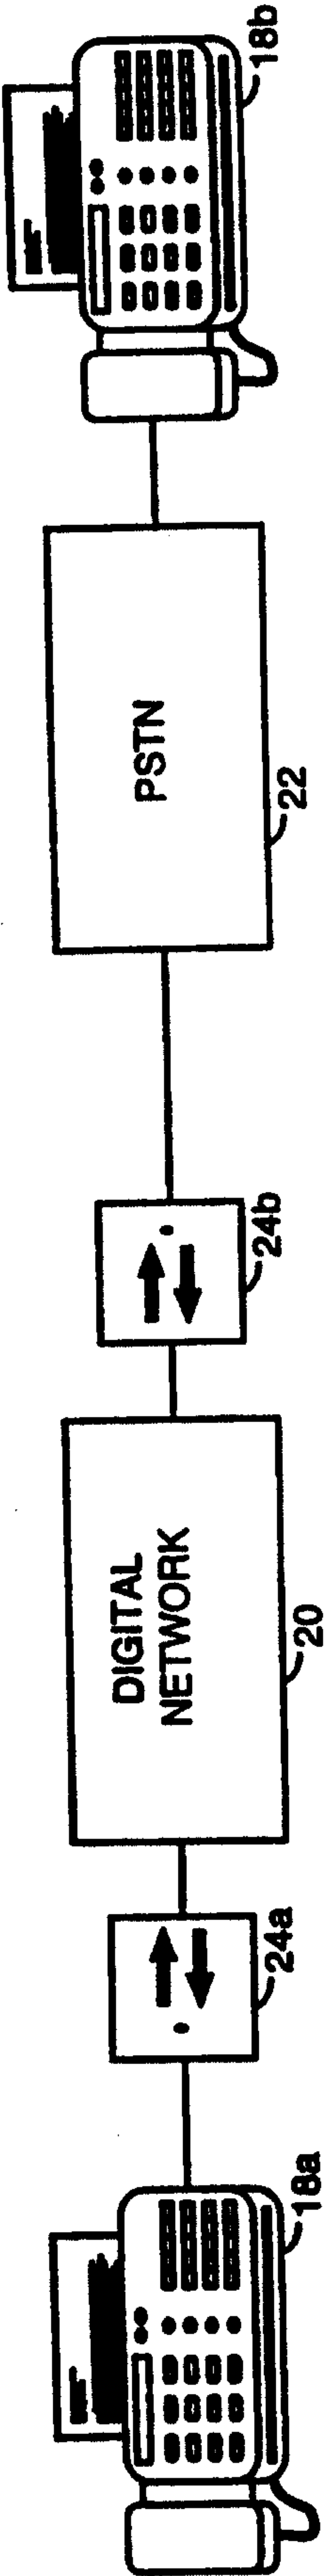


FIG. 4A

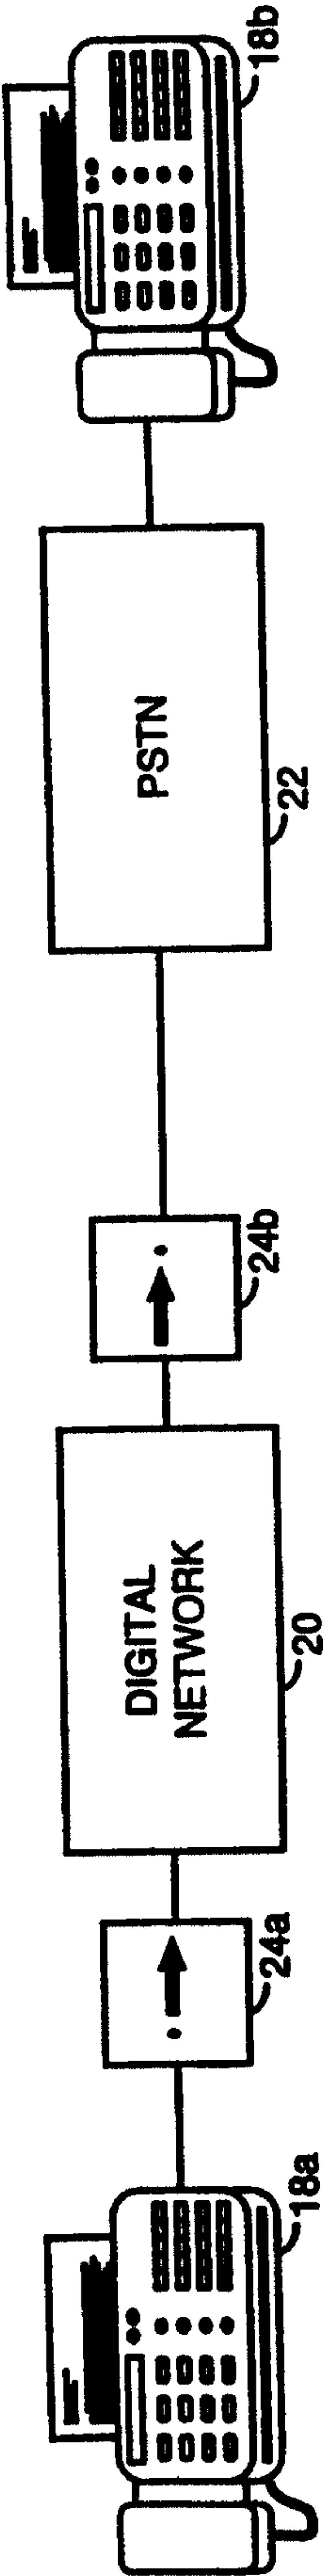


FIG. 4B

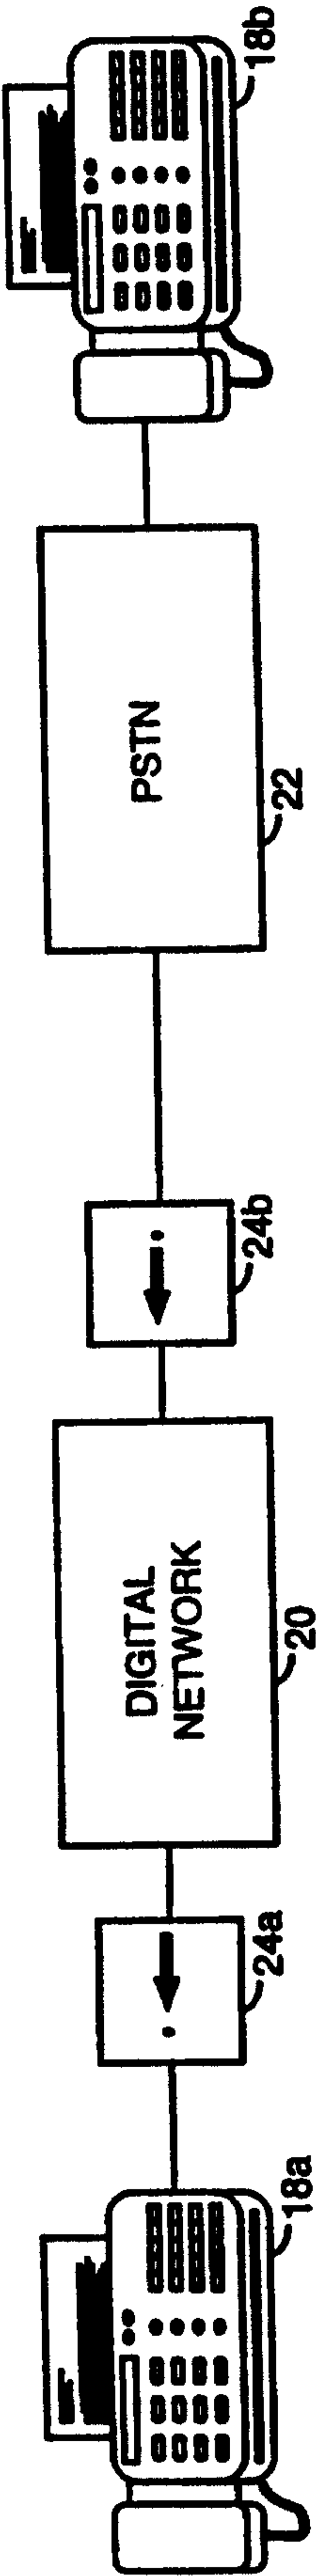


FIG. 4C

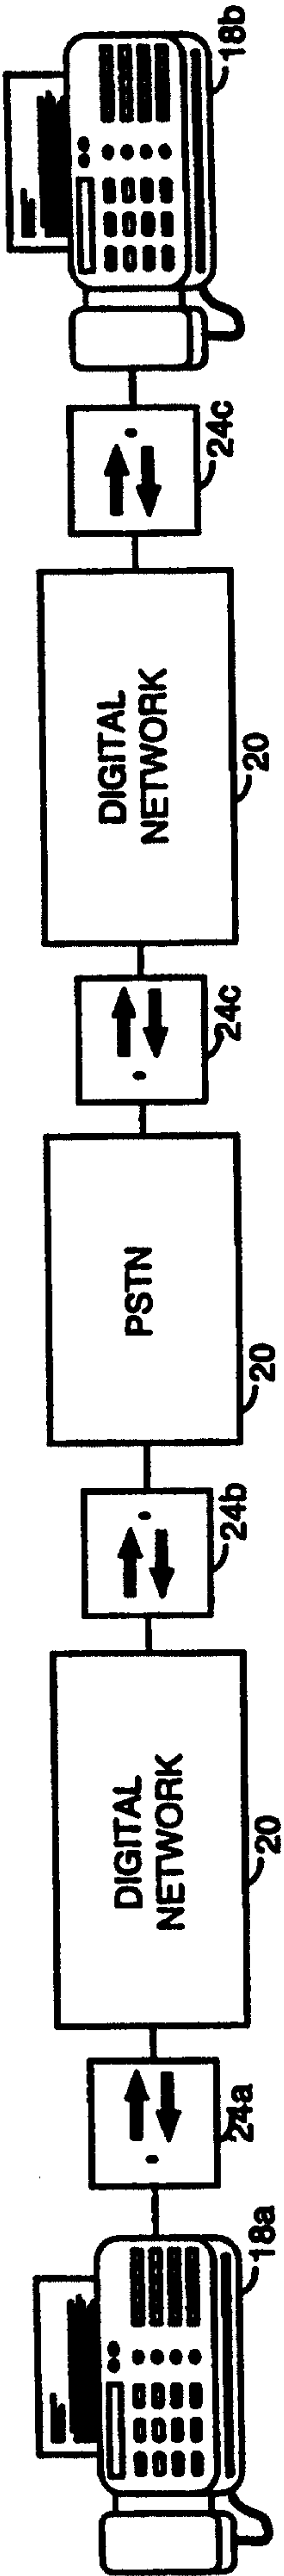


FIG. 4D

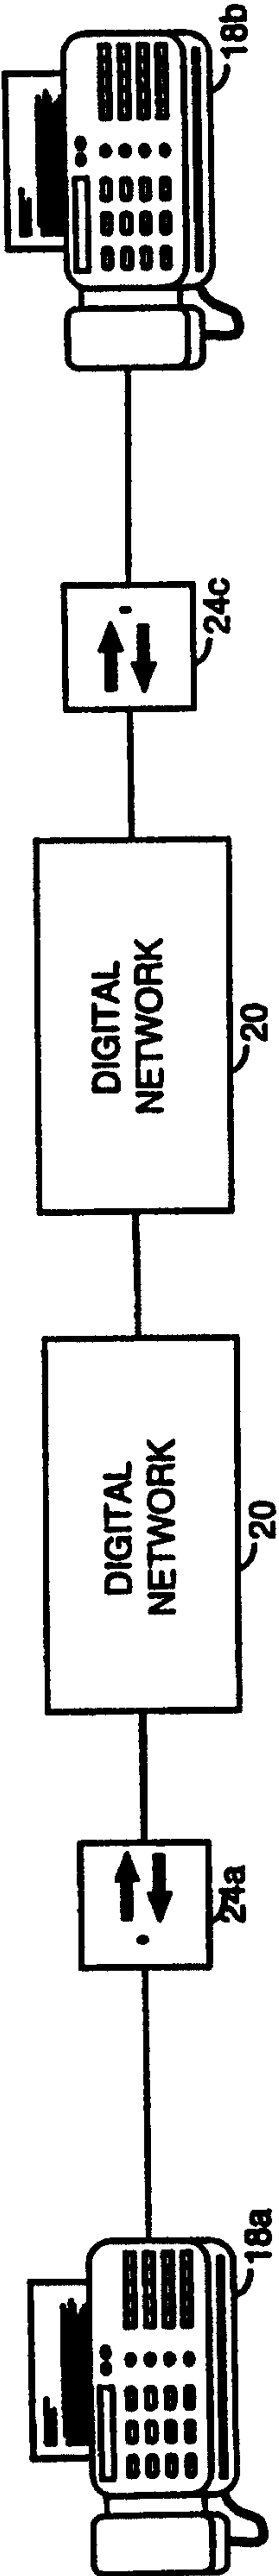


FIG. 4E

```

graph TD
    subgraph Source_Fax [SOURCE FAX]
        50a[50a] --> 52[52]
    end
    subgraph Source_Interface [SOURCE INTERFACE]
        50b[50b] --> 54[54]
    end
    subgraph Destination_Interface [DESTINATION INTERFACE]
        50c[50c] --> 56[56]
    end
    subgraph Destination_Fax [DESTINATION FAX]
        50d[50d] --> 58[58]
    end

    52 --> 54
    54 --> 56
    56 --> 58

    54 --> 56
    56 --> 58

    56 --> 62[62]
    62 -- CNG --> 60[60]
    60 --> 68[68]
    68 --> 66[66]
    66 --> 70{70}
    70 --> 66
    70 --> 72[72]
    72 --> 74[74]
    74 --> 76[76]
    76 --> 82[82]
    82 --> 84[84]
    84 --> 86[86]
    86 --> 90[90]
    90 --> 92[92]
    92 --> 80[80]
    80 --> 78[78]
    78 --> 52

    82 --> 94{94}
    94 -- YES --> 92
    94 -- NO --> 140[140]
    140 --> 142[142]
    142 --> 82
    142 --> 144[144]
    144 --> 52
    144 --> 54
    144 --> 56
    144 --> 58
    144 --> 60
    144 --> 66
    144 --> 72
    144 --> 78
    144 --> 84
    144 --> 90
    144 --> 92
    144 --> 146[146]
    146 --> 52
    146 --> 54
    146 --> 56
    146 --> 58
    146 --> 60
    146 --> 66
    146 --> 72
    146 --> 78
    146 --> 84
    146 --> 90
    146 --> 92
    146 --> 148[148]
    148 --> 52
    148 --> 54
    148 --> 56
    148 --> 58
    148 --> 60
    148 --> 66
    148 --> 72
    148 --> 78
    148 --> 84
    148 --> 90
    148 --> 92
    148 --> 150[150]
    150 --> 52
    150 --> 54
    150 --> 56
    150 --> 58
    150 --> 60
    150 --> 66
    150 --> 72
    150 --> 78
    150 --> 84
    150 --> 90
    150 --> 92
    150 --> 152[152]
    152 --> 52
    152 --> 54
    152 --> 56
    152 --> 58
    152 --> 60
    152 --> 66
    152 --> 72
    152 --> 78
    152 --> 84
    152 --> 90
    152 --> 92
    152 --> 154[154]
    154 --> 52
    154 --> 54
    154 --> 56
    154 --> 58
    154 --> 60
    154 --> 66
    154 --> 72
    154 --> 78
    154 --> 84
    154 --> 90
    154 --> 92
    154 --> 156[156]
    156 --> 52
    156 --> 54
    156 --> 56
    156 --> 58
    156 --> 60
    156 --> 66
    156 --> 72
    156 --> 78
    156 --> 84
    156 --> 90
    156 --> 92
    156 --> 158[158]
    158 --> 52
    158 --> 54
    158 --> 56
    158 --> 58
    158 --> 60
    158 --> 66
    158 --> 72
    158 --> 78
    158 --> 84
    158 --> 90
    158 --> 92
    158 --> 160[160]
    160 --> 52
    160 --> 54
    160 --> 56
    160 --> 58
    160 --> 60
    160 --> 66
    160 --> 72
    160 --> 78
    160 --> 84
    160 --> 90
    160 --> 92
    160 --> 162[162]
    162 --> 52
    162 --> 54
    162 --> 56
    162 --> 58
    162 --> 60
    162 --> 66
    162 --> 72
    162 --> 78
    162 --> 84
    162 --> 90
    162 --> 92
    162 --> 164[164]
    164 --> 52
    164 --> 54
    164 --> 56
    164 --> 58
    164 --> 60
    164 --> 66
    164 --> 72
    164 --> 78
    164 --> 84
    164 --> 90
    164 --> 92
    164 --> 166[166]
    166 --> 52
    166 --> 54
    166 --> 56
    166 --> 58
    166 --> 60
    166 --> 66
    166 --> 72
    166 --> 78
    166 --> 84
    166 --> 90
    166 --> 92
    166 --> 168[168]
    168 --> 52
    168 --> 54
    168 --> 56
    168 --> 58
    168 --> 60
    168 --> 66
    168 --> 72
    168 --> 78
    168 --> 84
    168 --> 90
    168 --> 92
    168 --> 170[170]
    170 --> 52
    170 --> 54
    170 --> 56
    170 --> 58
    170 --> 60
    170 --> 66
    170 --> 72
    170 --> 78
    170 --> 84
    170 --> 90
    170 --> 92
    170 --> 172[172]
    172 --> 52
    172 --> 54
    172 --> 56
    172 --> 58
    172 --> 60
    172 --> 66
    172 --> 72
    172 --> 78
    172 --> 84
    172 --> 90
    172 --> 92
    172 --> 174[174]
    174 --> 52
    174 --> 54
    174 --> 56
    174 --> 58
    174 --> 60
    174 --> 66
    174 --> 72
    174 --> 78
    174 --> 84
    174 --> 90
    174 --> 92
    174 --> 176[176]
    176 --> 52
    176 --> 54
    176 --> 56
    176 --> 58
    176 --> 60
    176 --> 66
    176 --> 72
    176 --> 78
    176 --> 84
    176 --> 90
    176 --> 92
    176 --> 178[178]
    178 --> 52
    178 --> 54
    178 --> 56
    178 --> 58
    178 --> 60
    178 --> 66
    178 --> 72
    178 --> 78
    178 --> 84
    178 --> 90
    178 --> 92
    178 --> 180[180]
    180 --> 52
    180 --> 54
    180 --> 56
    180 --> 58
    180 --> 60
    180 --> 66
    180 --> 72
    180 --> 78
    180 --> 84
    180 --> 90
    180 --> 92
    180 --> 182[182]
    182 --> 52
    182 --> 54
    182 --> 56
    182 --> 58
    182 --> 60
    182 --> 66
    182 --> 72
    182 --> 78
    182 --> 84
    182 --> 90
    182 --> 92
    182 --> 184[184]
    184 --> 52
    184 --> 54
    184 --> 56
    184 --> 58
    184 --> 60
    184 --> 66
    184 --> 72
    184 --> 78
    184 --> 84
    184 --> 90
    184 --> 92
    184 --> 186[186]
    186 --> 52
    186 --> 54
    186 --> 56
    186 --> 58
    186 --> 60

```

FIG. 5A

WO 98/26580

PCT/US97/22112

6/11

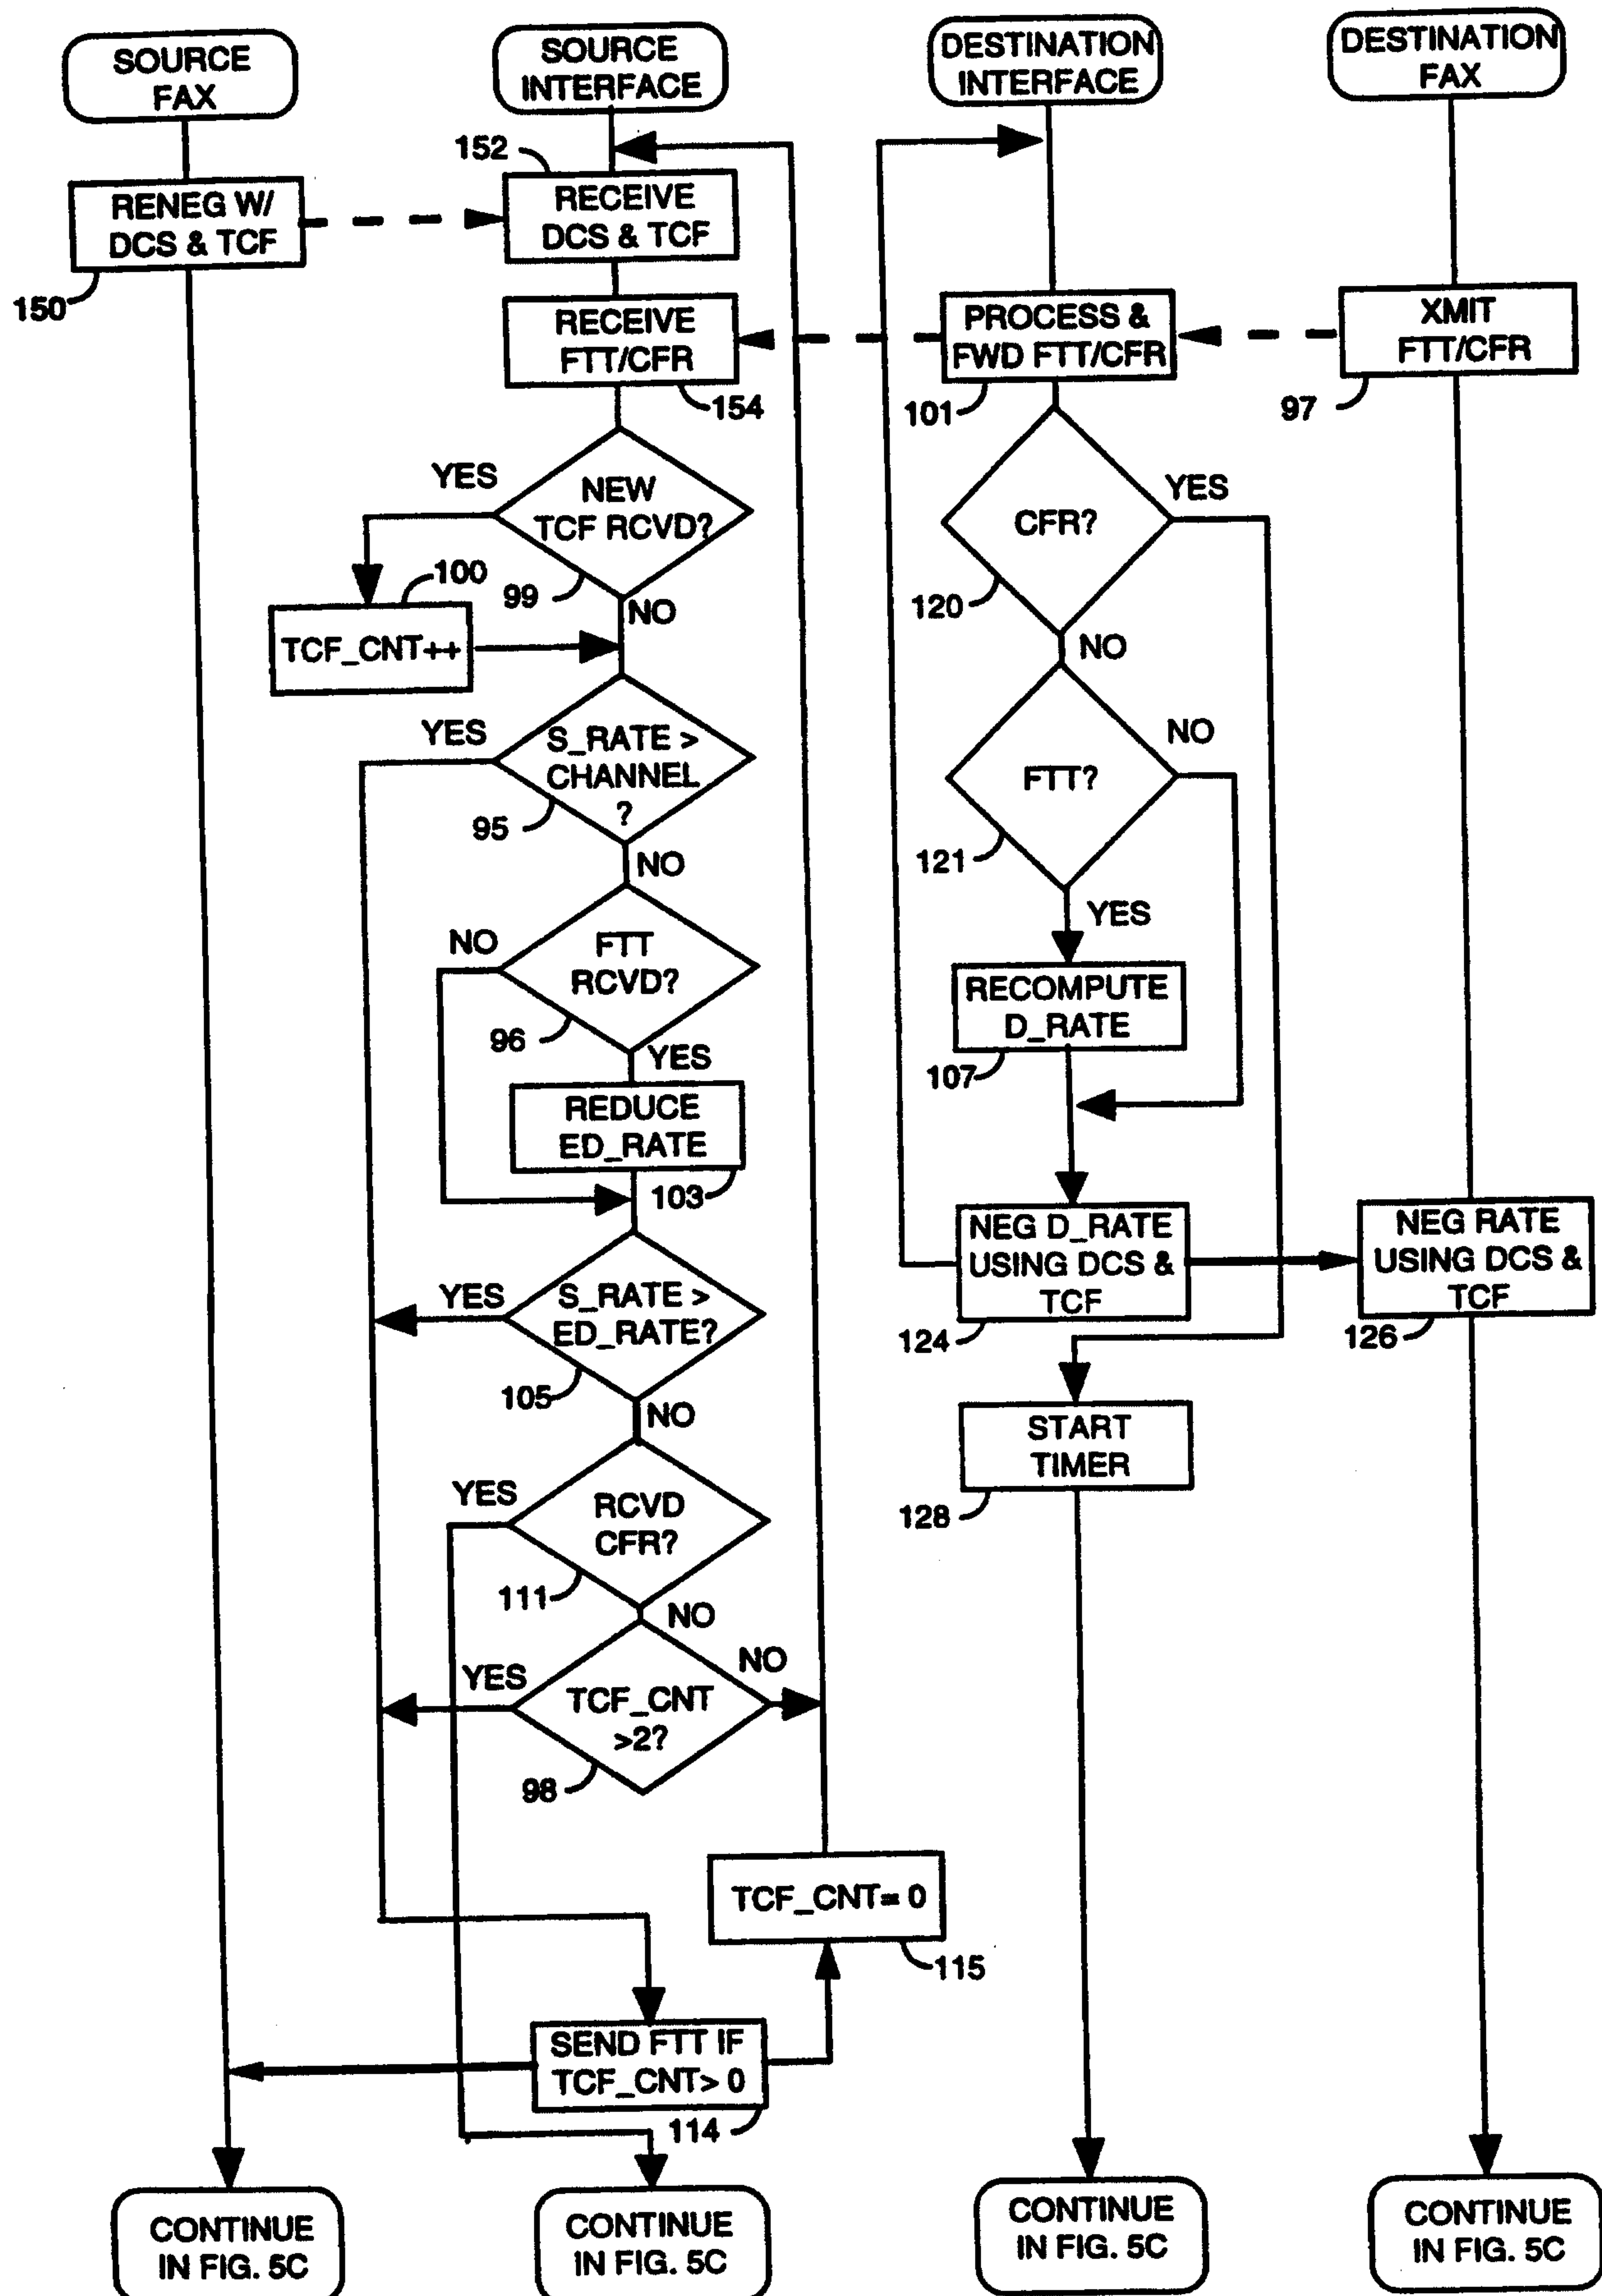


FIG. 5B



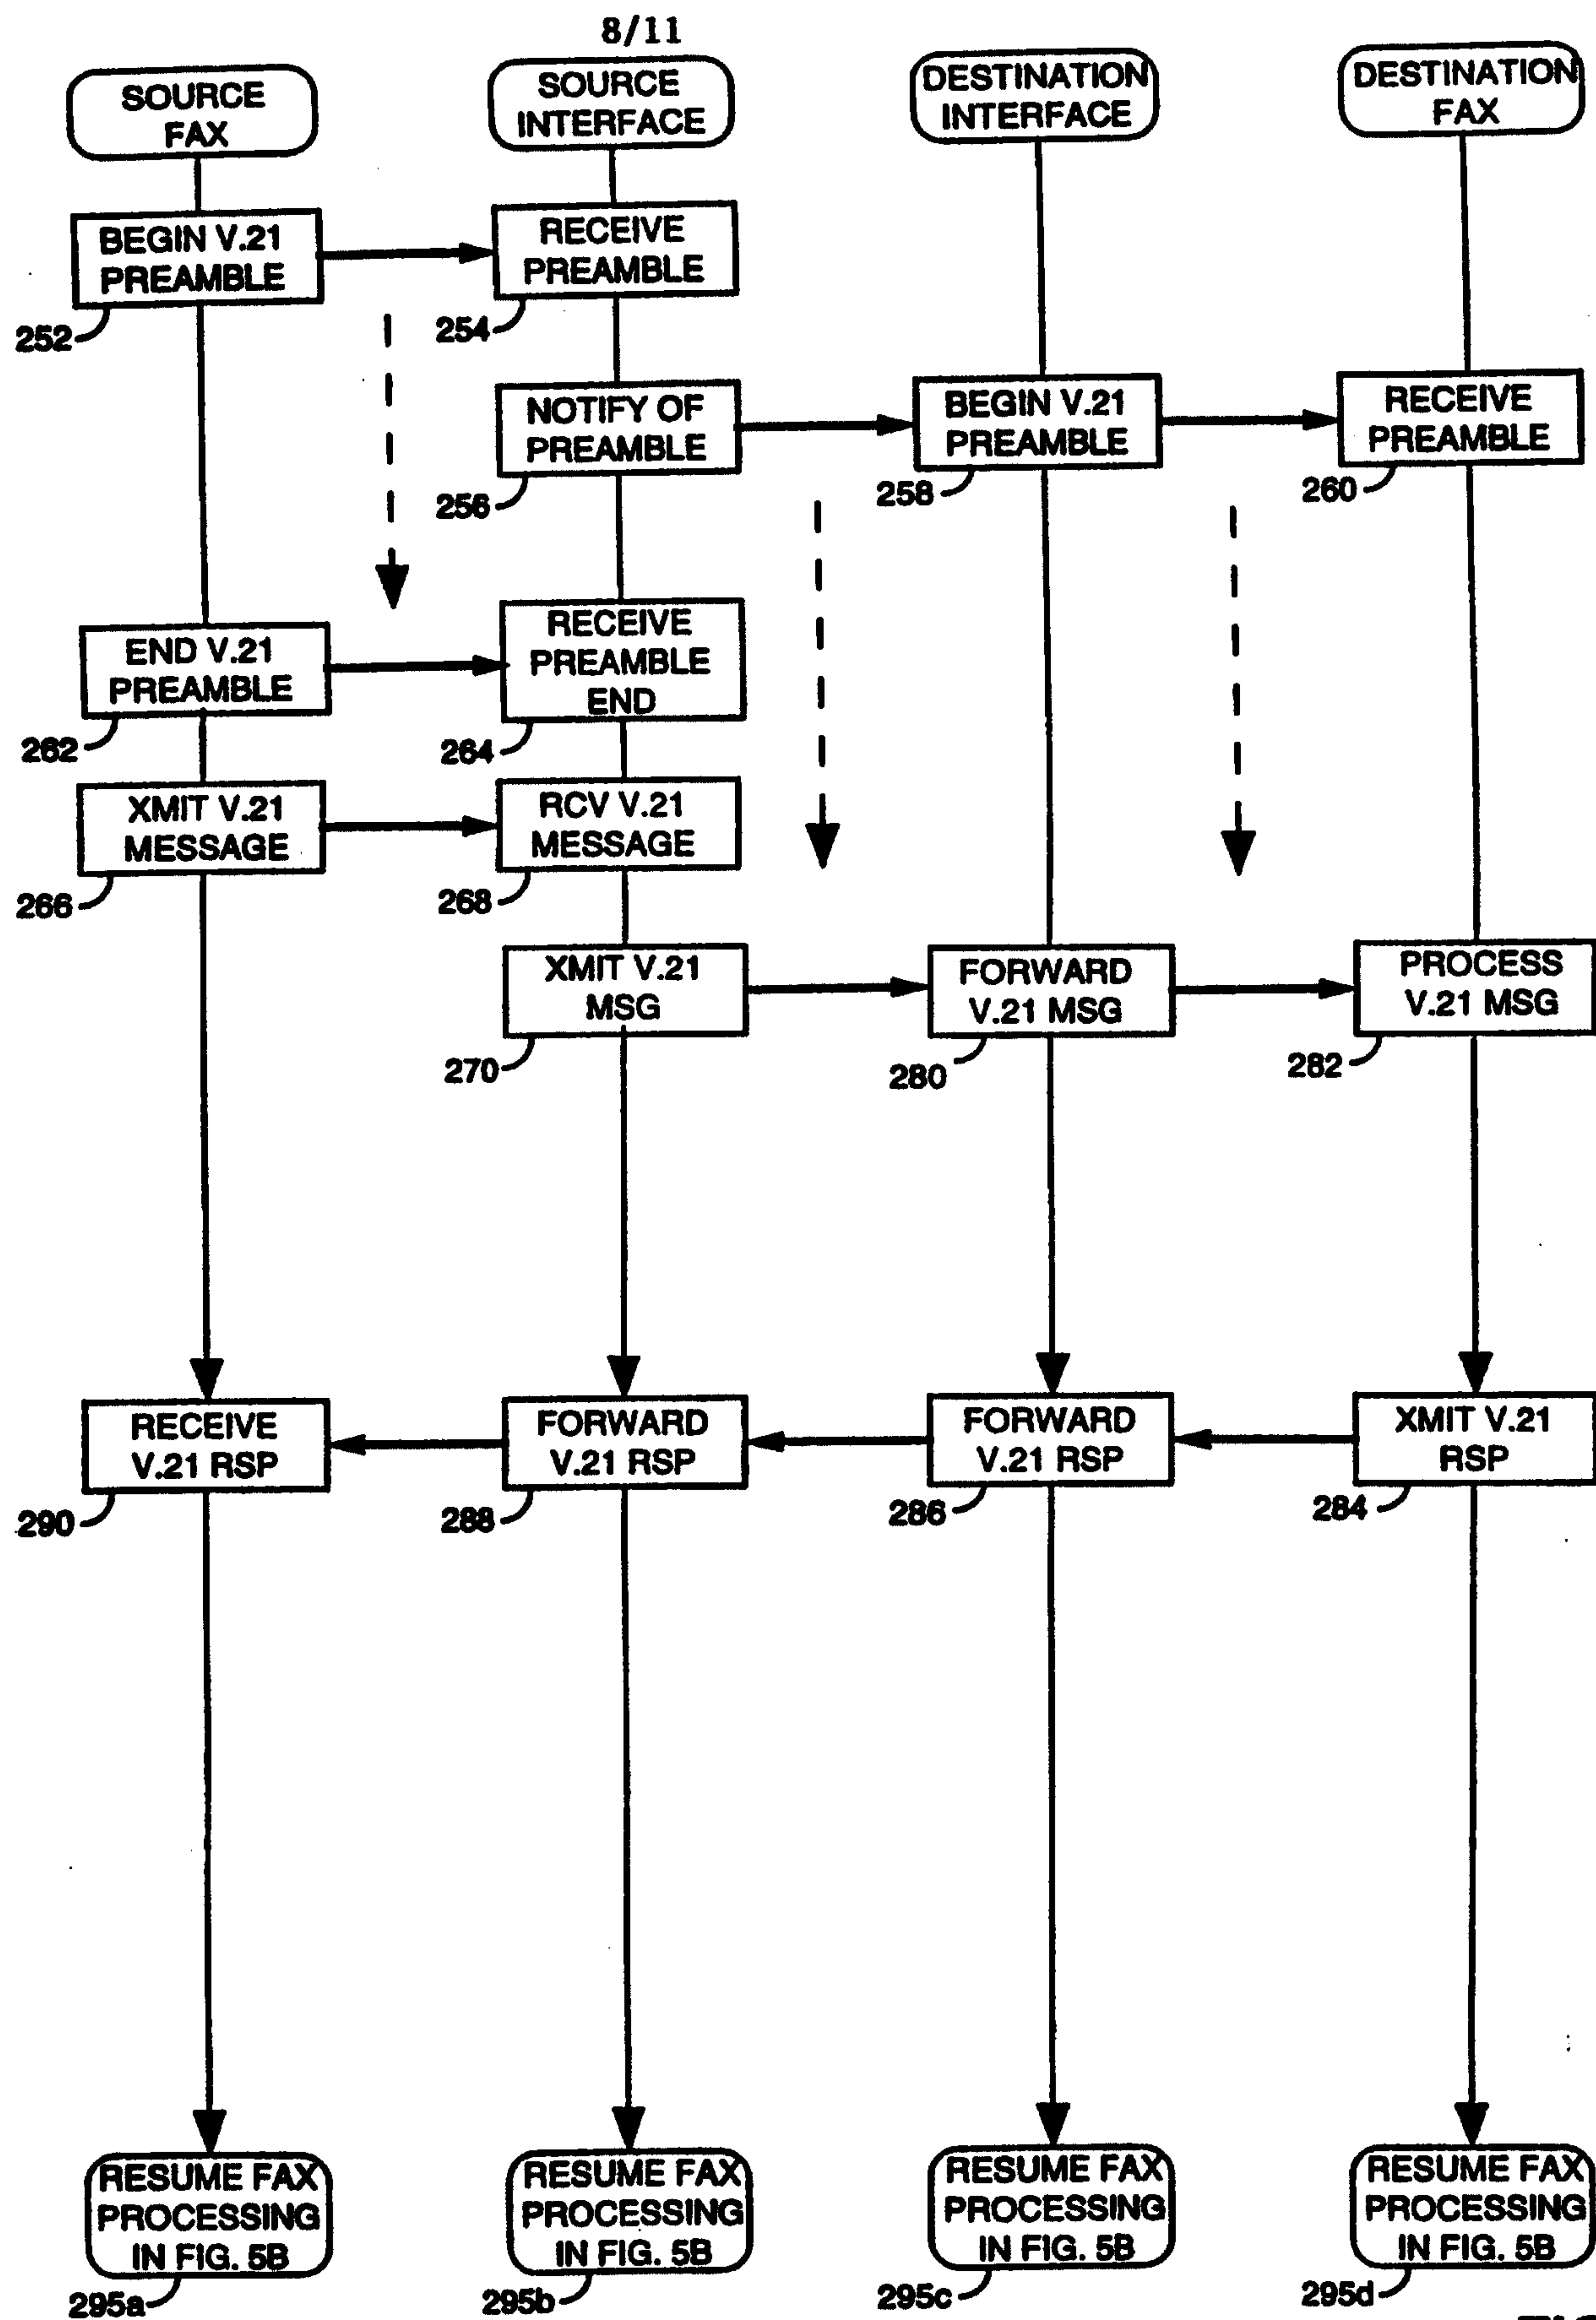


FIG. 6

9/11

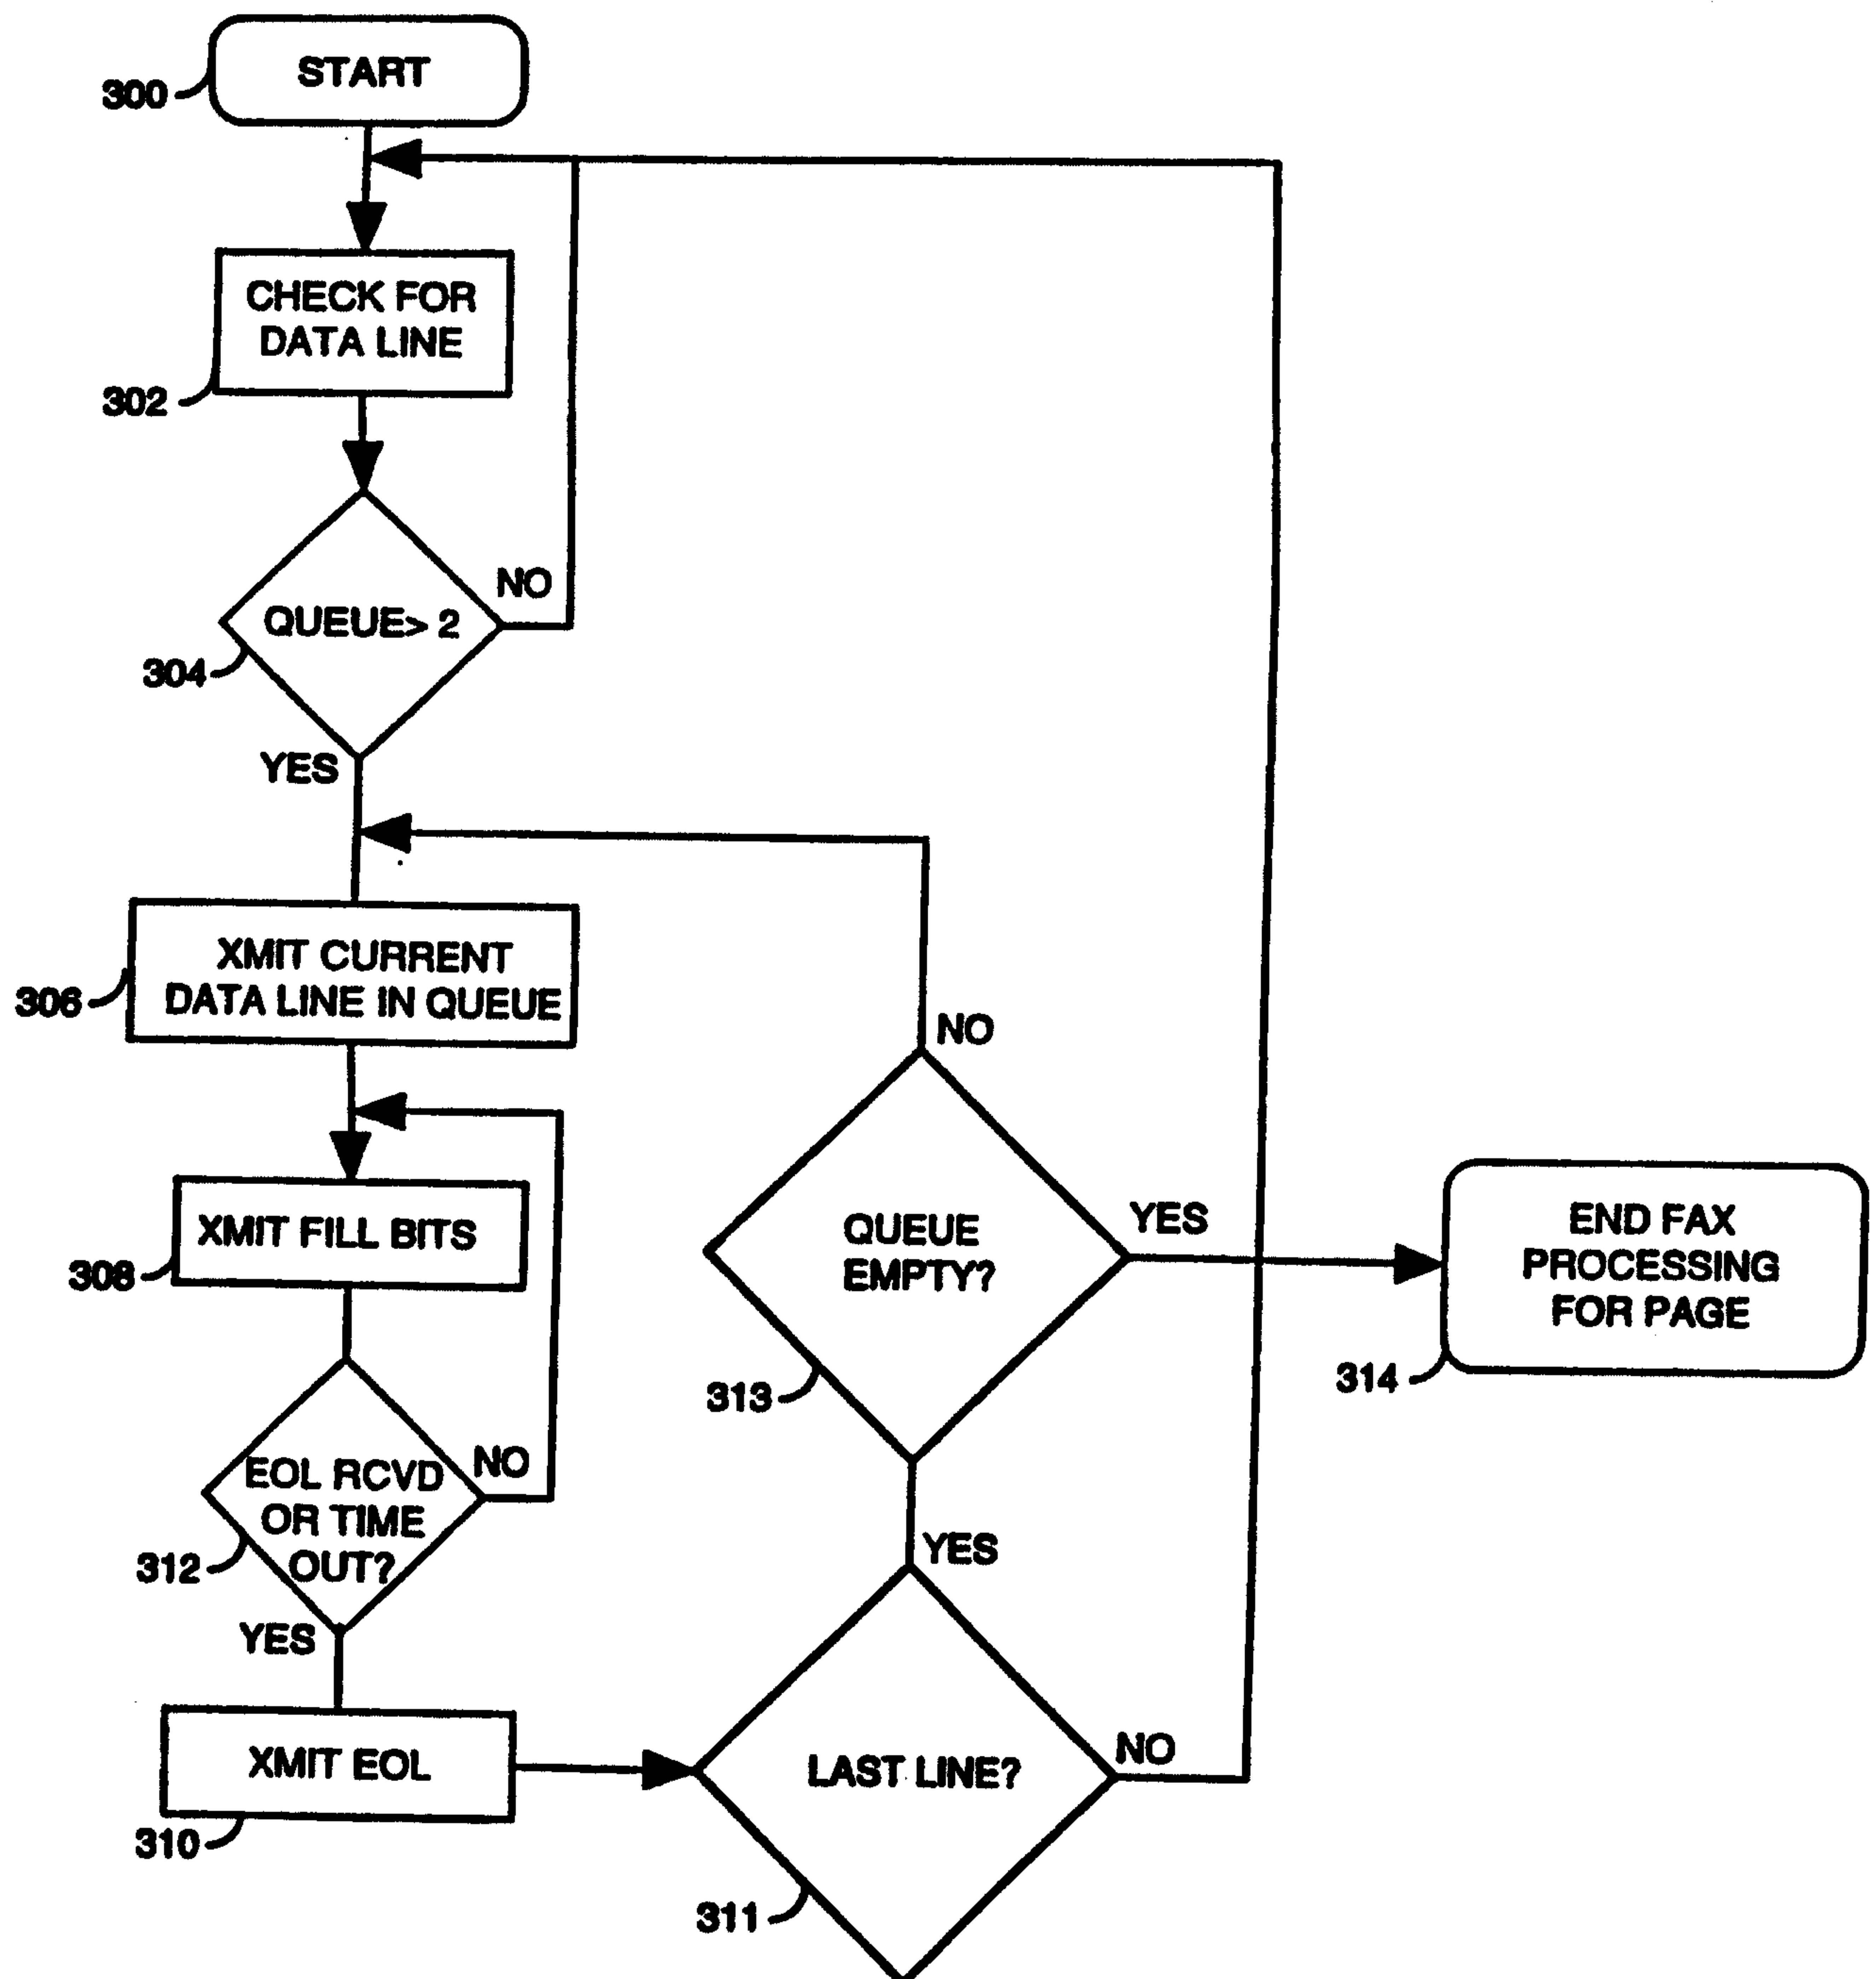


FIG. 7

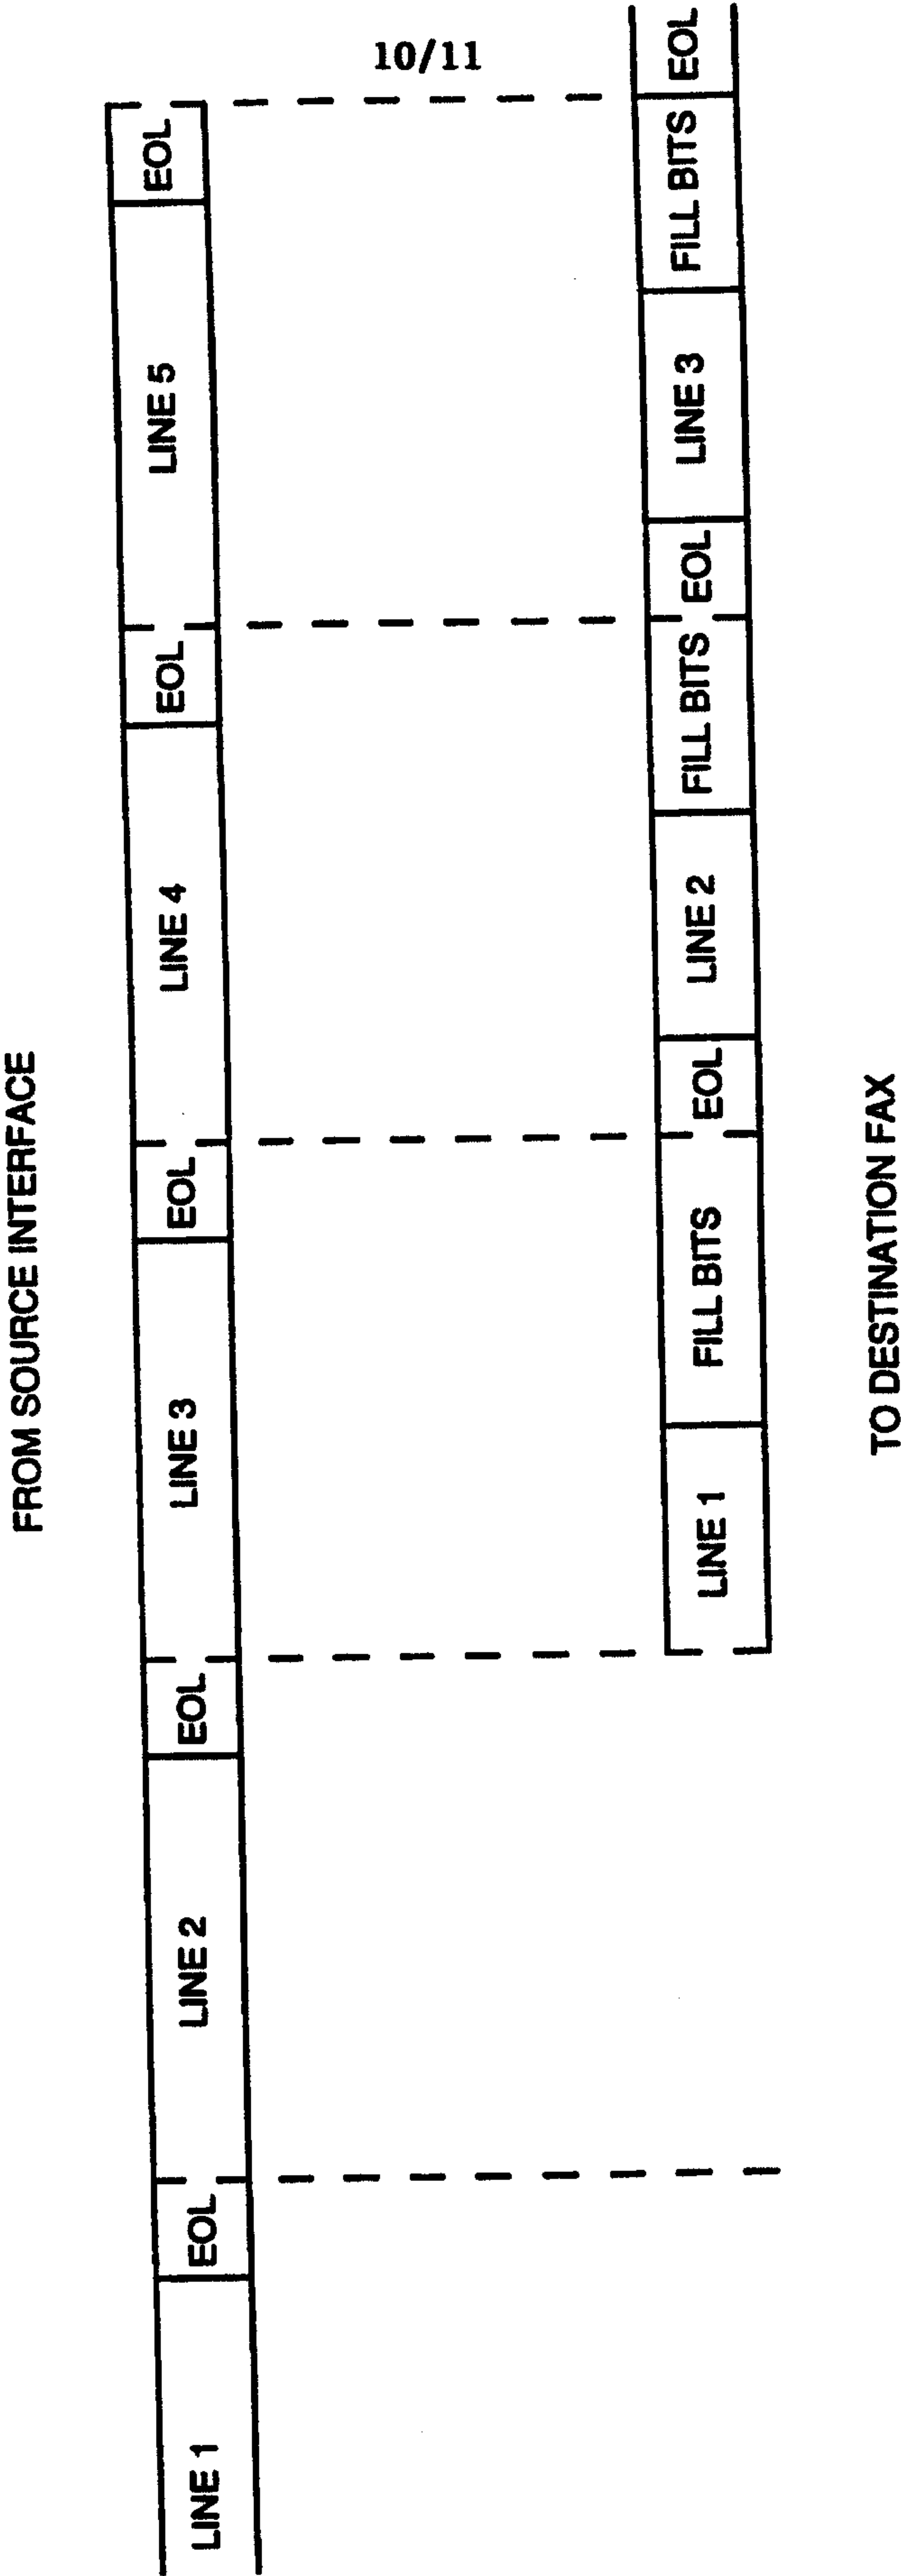


FIG. 8

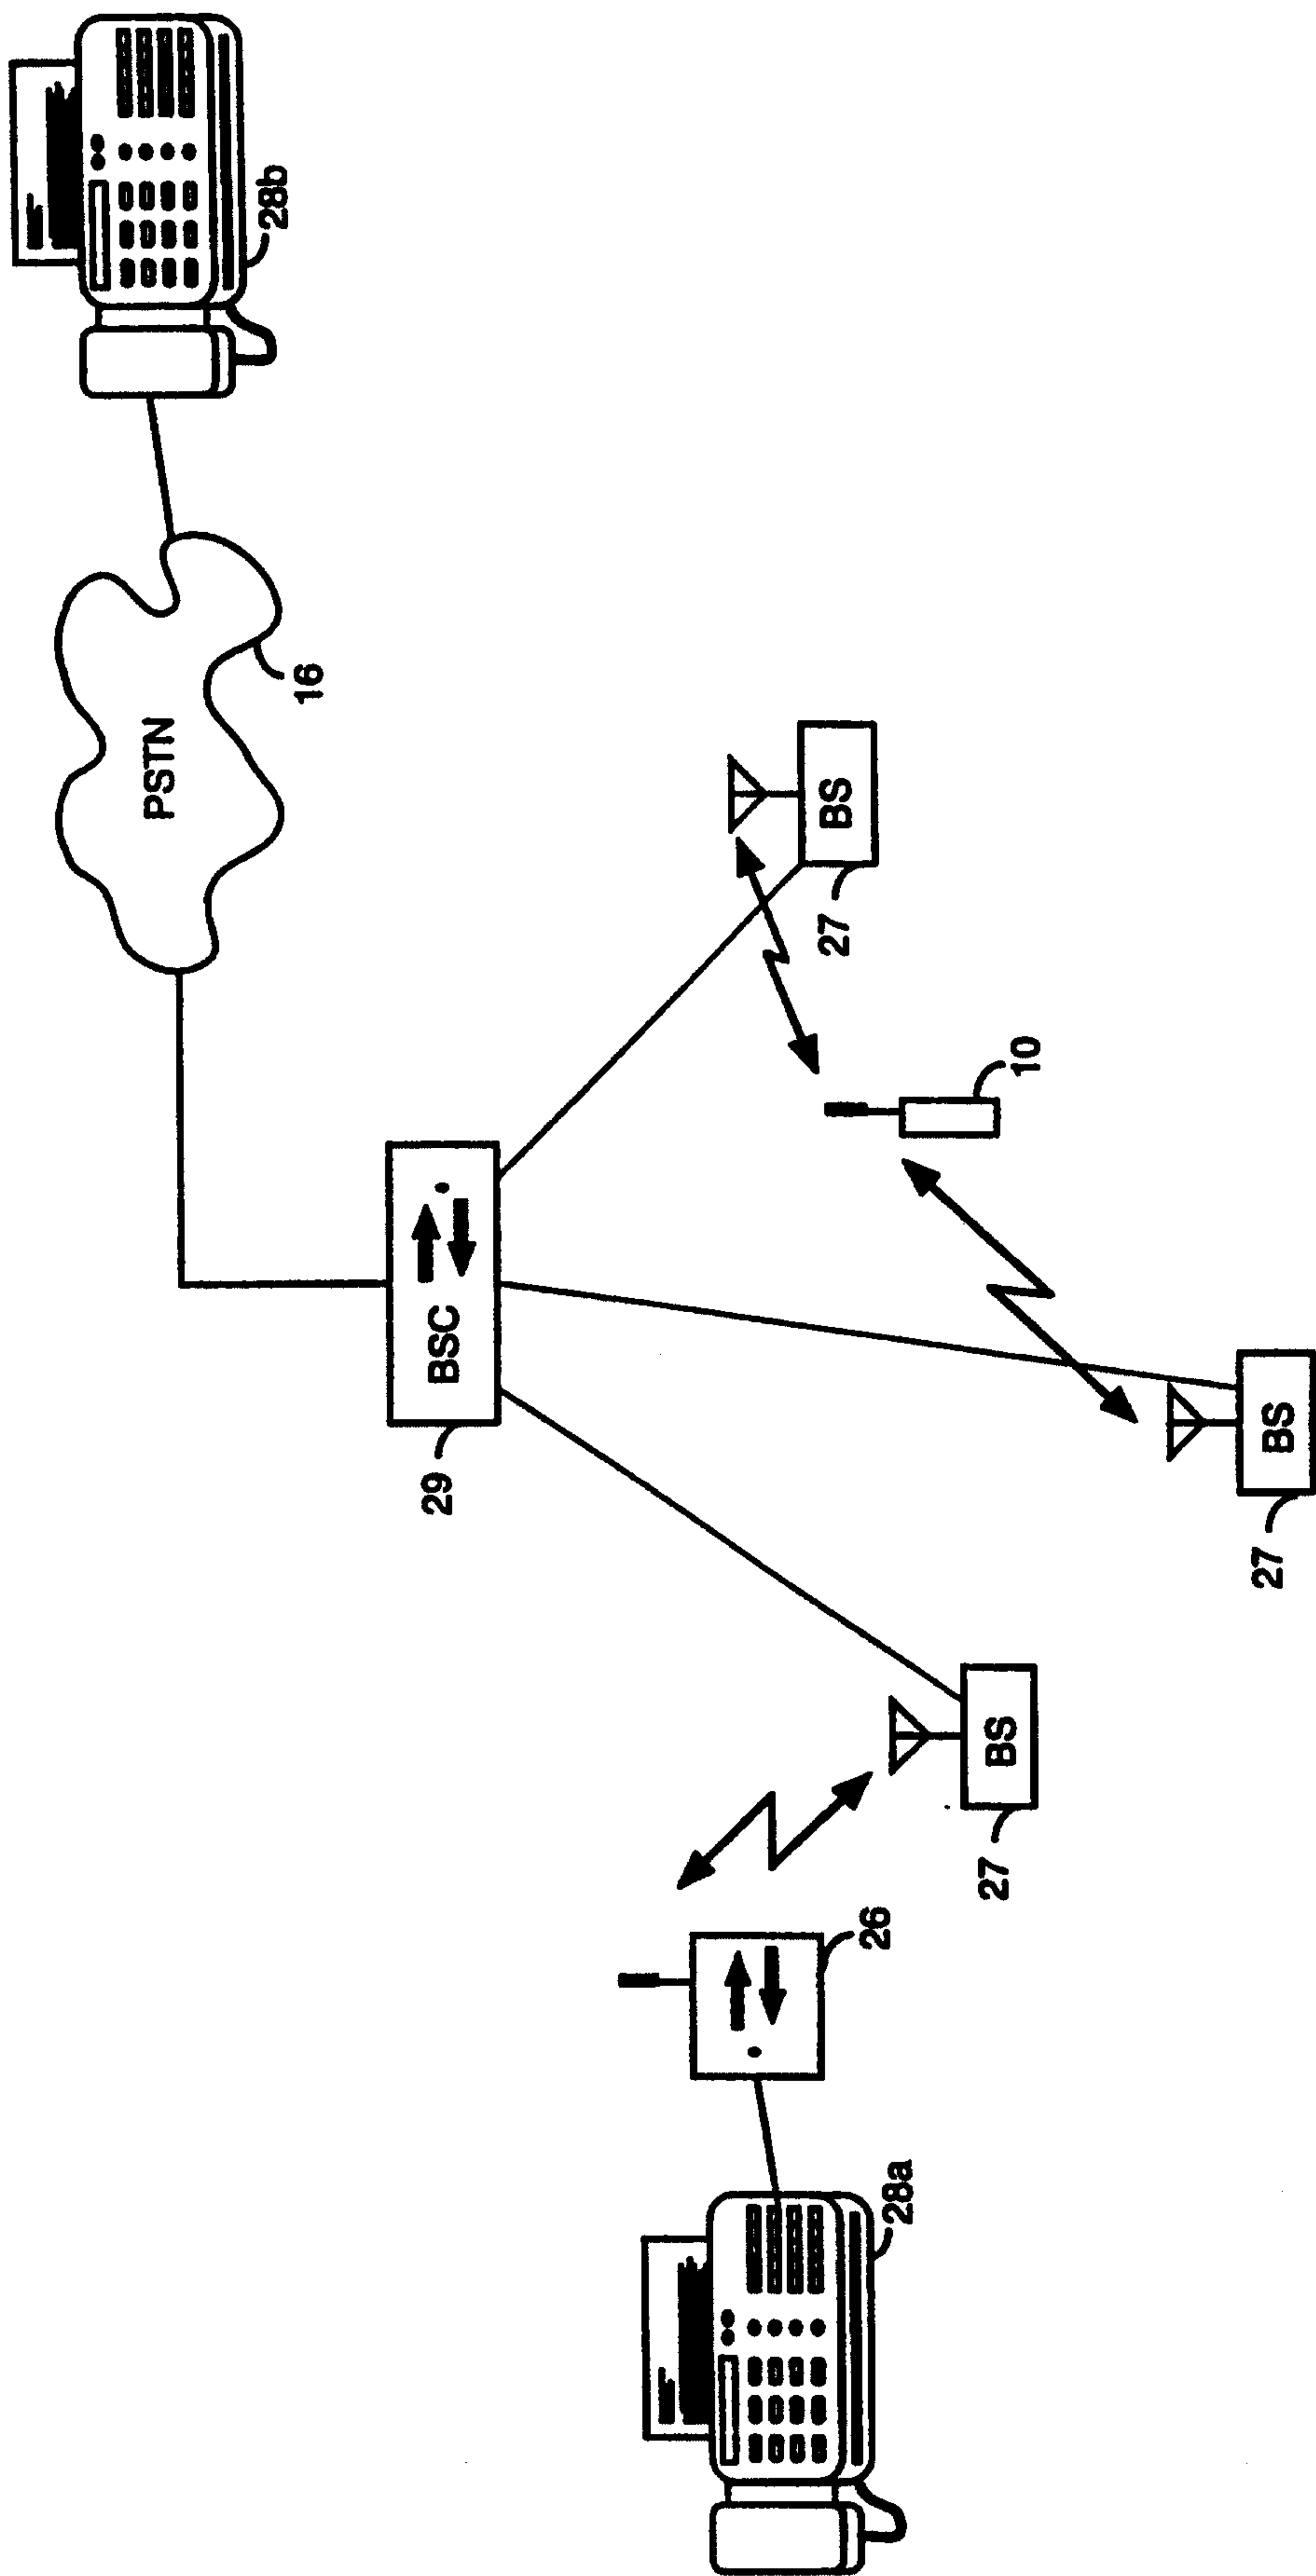


FIG. 9

