



(86) Date de dépôt PCT/PCT Filing Date: 2004/06/08

(87) Date publication PCT/PCT Publication Date: 2005/02/17

(45) Date de délivrance/Issue Date: 2010/08/03

(85) Entrée phase nationale/National Entry: 2006/01/17

(86) N° demande PCT/PCT Application No.: US 2004/018334

(87) N° publication PCT/PCT Publication No.: 2005/015289

(30) Priorité/Priority: 2003/07/21 (US10/624,086)

(51) Cl.Int./Int.Cl. *G02C 7/04* (2006.01)

(72) Inventeurs/Inventors:

HO, ARTHUR, AU;
BACK, ARTHUR, US


(73) Propriétaire/Owner:

COOPERVISION INTERNATIONAL HOLDING
COMPANY, LP, BB

(74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : LENTILLES OPHTALMOLOGIQUES SANS JONCTIONS ET LEURS PROCEDES DE FABRICATION

(54) Title: JUNCTIONLESS OPHTHALMIC LENSES AND METHODS FOR MAKING SAME

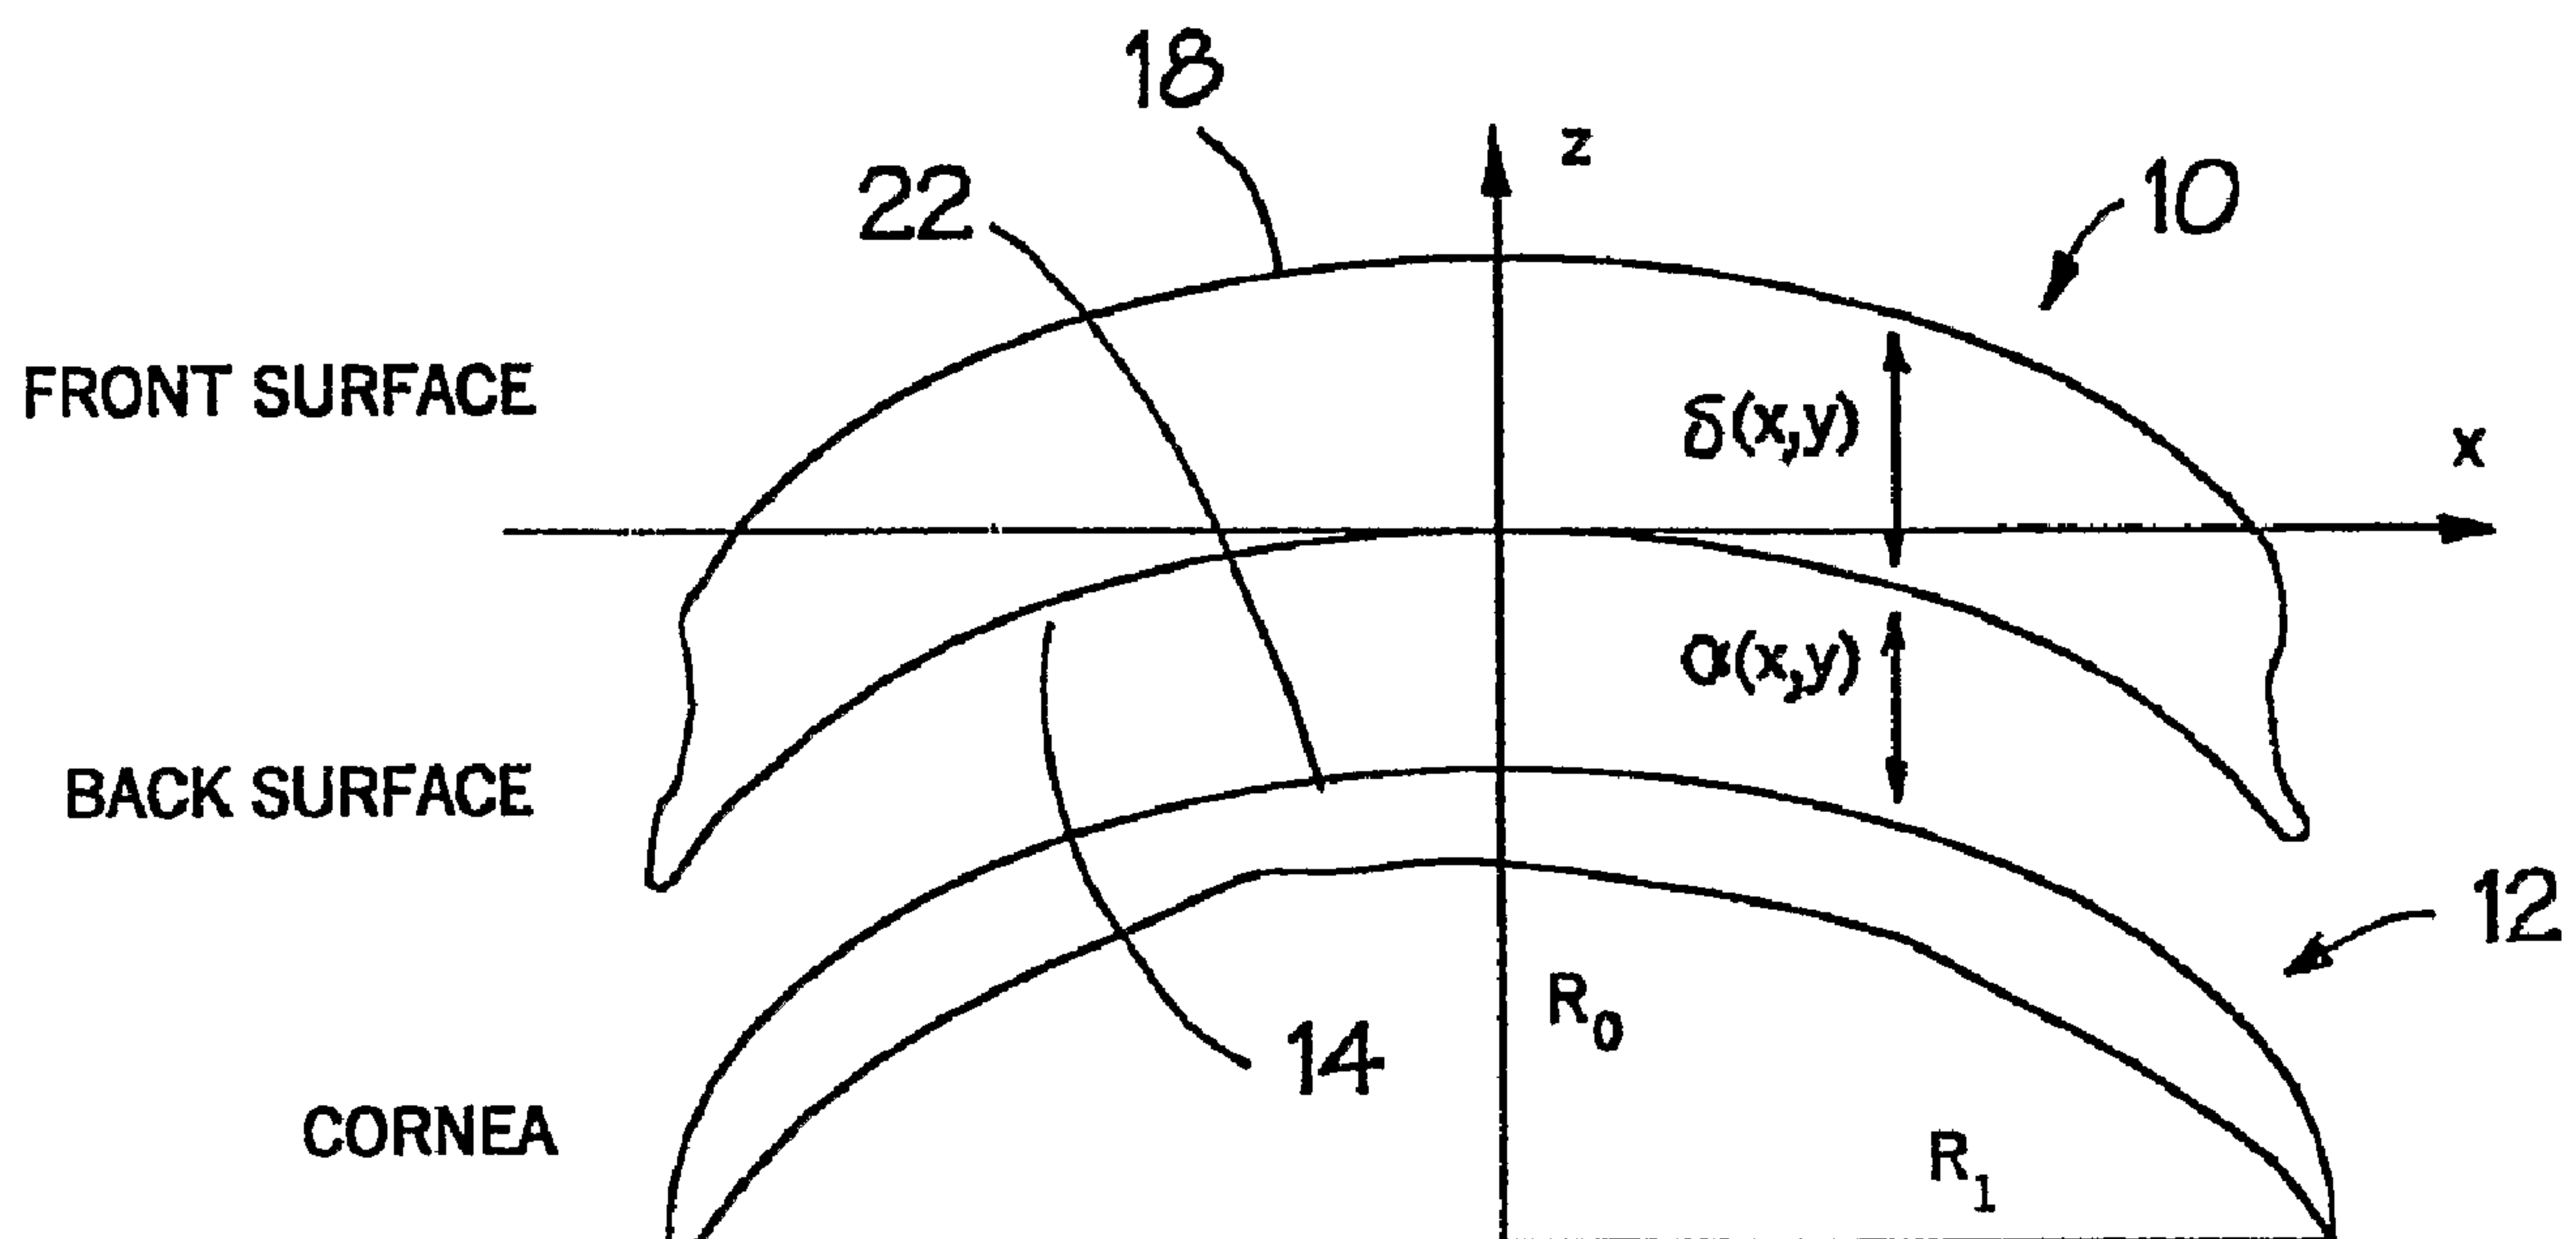

(57) Abrégé/Abstract:

Methods for producing a junctionless ophthalmic lens are provided. Additionally, ophthalmic lenses having junctionless, three dimensional surfaces, for example, asymmetrical anterior and/or posterior surfaces, as well as molding tools used in the production of such lenses are also provided. The method generally include providing sample data points to define a surface contour, and interpolating between these data points using an algorithm to produce a simulated three dimensional surface. The simulated three dimensional surface is used in producing an ophthalmic lens, for example in cast molding a contact lens (10) for use on a cornea (12) of a user.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 February 2005 (17.02.2005)

PCT

(10) International Publication Number
WO 2005/015289 A3

(51) International Patent Classification⁷: **G02C 7/04**

(21) International Application Number:
PCT/US2004/018334

(22) International Filing Date: 8 June 2004 (08.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/624,086 21 July 2003 (21.07.2003) US

(71) Applicant (for all designated States except US): **OCULAR SCIENCES, INC.** [US/US]; 1855 Gateway Boulevard, Suite 700, Concord, CA 94520 (US).

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HO, Arthur** [AU/AU]; 12/50 Fern Street, Clovelly, NSW 2031 (AU). **BACK, Arthur** [AU/US]; 22 Tweed Lane, Danville, CA 94526 (US).

(74) Agent: **UXA, Frank, J.**; Stout, Uxa, Buyan & Mullins, LLP, 4 Venture, Suite 300, Irvine, CA 92618 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

Published:


— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

14 April 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: JUNCTIONLESS OPHTHALMIC LENSES AND METHODS FOR MAKING SAME

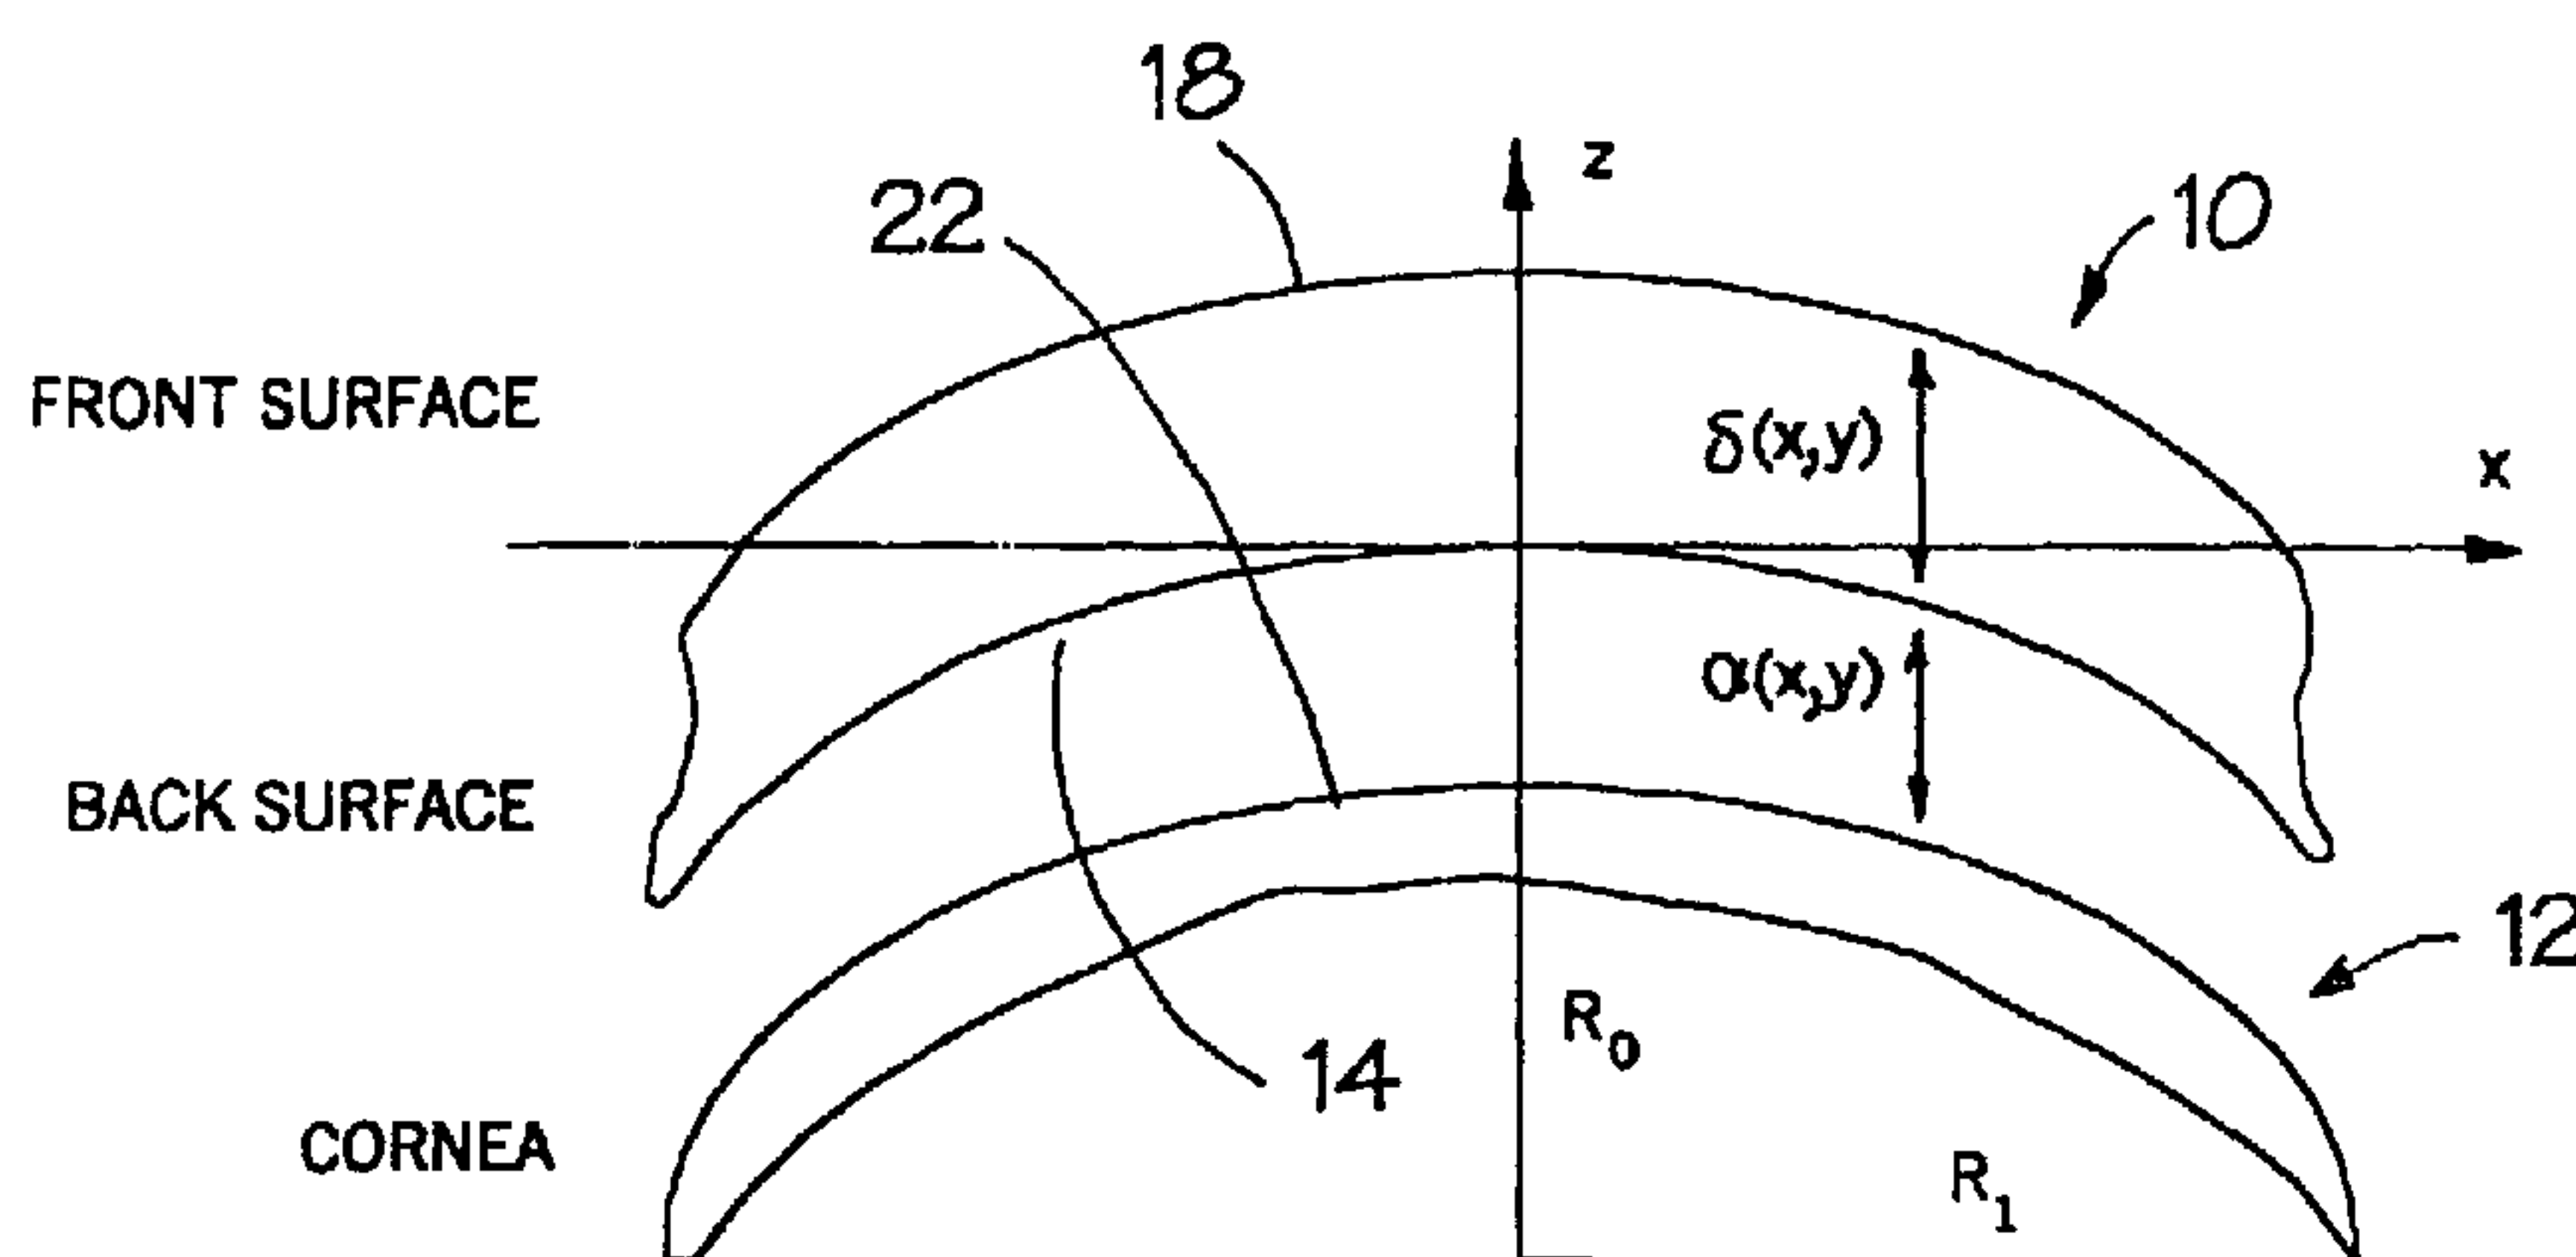

(57) Abstract: Methods for producing a junctionless ophthalmic lens are provided. Additionally, ophthalmic lenses having junctionless, three dimensional surfaces, for example, asymmetrical anterior and/or posterior surfaces, as well as molding tools used in the production of such lenses are also provided. The method generally include providing sample data points to define a surface contour, and interpolating between these data points using an algorithm to produce a simulated three dimensional surface. The simulated three dimensional surface is used in producing an ophthalmic lens, for example in cast molding a contact lens (10) for use on a cornea (12) of a user.

WO 2005/015289 A3

JUNCTIONLESS OPHTHALMIC LENSES AND
METHODS FOR MAKING SAME

5 The present invention generally relates to ophthalmic lens design and more specifically relates to junctionless ophthalmic lenses and methods for manufacturing ophthalmic lenses having junctionless, three dimensional surfaces.

10 Contact lens design typically involves a number of steps. The back surface, i.e. posterior surface, of the lens is frequently designed first based on the shape of the cornea and a desired cornea-lens fitting relationship.

15 The front surface, i.e. anterior surface, of the lens is constructed to obtain the necessary refractive correction for the eye and the desired lens performance. Such performance depends on a number of factors, including, but not limited to, lens mass distribution to provide effective eyelid interaction to achieve desired lens movement and lens position, other configurational
20 considerations to provide for the comfort of the lens wearer and the like.

25 It is known that the surface topographies of a normal human cornea are often not spherical. For example, it is well known that the corneal surface of an eye has a curve that generally flattens from the center of the cornea to the periphery. A typical approach to create a flatter peripheral lens surface and adequate edge clearance between the edge of the lens and the underlying cornea/conjunctiva, has been to generate a series of conic
30 section curves, each having a radius of curvature larger (i.e. flatter) than the preceding one. Both the anterior and posterior surfaces of conventional contact lens designs have been described in two dimensions by a series

of rotationally symmetric surface segments. The surface segments may or may not be offset from the axis of symmetry.

Conventionally designed lenses have been therefor
5 described in two dimensions, such as by a series of
rotationally symmetric surface segments, and may be
mathematically described thereby. The mathematical
descriptions of two dimensional surface sections are made
smooth and continuous by compositing, for example, splines
10 or polynomials or blending of the sections. Such smooth,
continuous surfaces can be considered to be free of
junctions, or junctionless. Thus, ophthalmic lens
surfaces with junctions have segments which intersect at
discontinuities which can cause discomfort and/or one or
15 more other reductions in lens performance. Thus, it is
advantageous to provide an ophthalmic lens with one or
more substantially junctionless surfaces.

Ducharme U.S. Patent No. 5,452,031 discloses a
contact lens and method for manufacturing a contact lens
20 having a smooth, junctionless surface. More specifically,
the Ducharme patent discloses a method for defining the
shape of the contact lens surface by relating the corneal
surface to a reference curve. The reference curve may be
25 derived from the use of ~~a~~ piecewise polynomials and
splines, based on point coordinates, resulting in a
junctionless surface topography. A computer controlled
lathe receives the spline data and generates a signal
indicating the necessary lens form to be cut.

30 Vayntraub U.S. Patent No. 5,815,237 discloses a
method for making a contact lens having a peripheral zone
surface defined by an exponential function. Similarly,
Vayntraub U.S. Patent No. 5,815,236 discloses a method
35 for making a contact lens having a peripheral zone
surface defined by a logarithmic function.

Although more closely approximating the curvature of a human eye than earlier spherically based contact lens forms, these now conventional lens computer aided design methods, which are based on using polynomial and spline based interpolations, or exponential and logarithmic mathematical functions, result in a lens constrained to a two dimensional description of the surface topography.

The surface topography of a normal human cornea is often unique and includes areas of irregularity, asymmetry and asphericity that can not adequately be described in two dimensions. Likewise the lens anterior or posterior lens surface shape required to achieve optimal lens performance cannot be adequately described in two dimensions. Particularly in such cases, conventional two dimensional computer aided lens design methods are insufficient.

Designing a lens in two dimensions is inadequate when one or more of the posterior or anterior surfaces involves an asymmetric component, that is a rotationally asymmetric component. Although computer controlled manufacturing techniques have facilitated manufacture of lenses in recent years, such techniques in practice have had only limited application and are inadequate in design and production of lenses having one or more asymmetric components, particularly lenses for use in or on an eye, such as contact lenses, intraocular lenses and corneal onlay lenses. This is because current art in lens design necessarily requires assumptions and compromises to the design by the averaging and compositing of many two dimensional surfaces. Such assumptions and compromises can result in reduced lens performance, both optically and based on user comfort.

It would be advantageous to provide new ophthalmic lenses and methods of designing and producing ophthalmic lenses which address one or more of the concerns with prior lenses, lens designs and production methods.

Summary of the Invention

New ophthalmic lenses and methods for ophthalmic lens design and manufacture have been discovered. The present lenses and methods offer significant advantages over conventional lenses and methods by providing ophthalmic lenses having substantially smooth, junctionless, three dimensional surfaces which may include one or more rotationally asymmetric components. Lenses produced by the methods in accordance with the invention may include, but are not limited to, ophthalmic lenses structured and adapted for use in or on an eye, for example, all types of contact lenses, such as toric contact lenses, monofocal and multifocal contact lenses and the like, intraocular lenses (IOLs), such as anterior chamber IOLs, posterior chamber IOLs and the like, corneal onlay lenses, such as lenses affixed on the cornea, lenses placed or affixed in the cornea and the like. In addition, methods of the present invention may be utilized during corneal refractive laser surgery, for example in the shaping of the cornea.

The present invention provides methods for designing and manufacturing ophthalmic lenses having one or more substantially smooth, junctionless, three dimensional surfaces, for example, wherein the surface or surfaces may have one or more asymmetrical components. The scope of the present invention also includes such lenses, tooling inserts and mold sections used to manufacture such lenses, and methods of producing such tooling inserts and mold sections.

Advantageously, the present invention provides one or more additional, for example, relative to the prior art, degrees of freedom to control lens shape, surface contour, distribution of mass, optical power location and the like parameters within the lens design. Consequently, enhanced ophthalmic lens performance, for example, related to comfort, fitting, vision and/or lens positioning are provided by the present invention.

It will be appreciated that the present methods are especially advantageous when applied to lens design where constraints of symmetry would otherwise present a disadvantage. For example, the methods are very well
5 suited for the design of toric contact lenses, for example a toric contact lens including a posterior toric optical zone and an anterior surface shaped to provide the lens with appropriate optical power and a thickness profile facilitating lens orientation and stabilization in
10 the form of a ballast.

Moreover, the present invention provides for enhanced reproducibility of the ophthalmic lens dimensions and surfaces. The present invention very effectively complements modern CNC lathes which have been used to
15 produce ophthalmic lenses.

In one broad aspect of the present invention, methods for producing ophthalmic lenses are provided which generally comprise providing or specifying selected sample data points from a designated surface, for example, a
20 designated corneal surface (the surface of the cornea of the wearer of the lens) or designated or desired anterior lens surface, interpolating between the sample data points using at least one algorithm to define a simulated three dimensional designated surface, preferably that has a
25 relationship to, for example, is based at least in part on, the designated surface, and forming an ophthalmic lens having the simulated three dimensional designated surface.

The simulated design surface preferably is sufficiently well defined, for example, in the interpolating step, to
30 be a smooth, substantially junctionless three dimensional surface. In one embodiment, the simulated three dimensional surface is defined, during the interpolating step, using the sample data points and one or more factors or relationships for one or more lens design parameters.
35 Advantageously, the forming step is conducted so that the ophthalmic lens has the desired lens design parameters including, but not limited to, the desired optical

correction or corrections, size, configuration, space or gap between the cornea and posterior surface of the lens and other desired optical fitting relationships and the like.

5 Advantageously, the methods of the present invention can be used to produce contact lenses having surfaces not constrained to contours defined by a two dimensional surface of rotation. Rather, the present lenses preferably are defined by one or more smooth,
10 substantially junctionless, three dimensional surfaces, including any rotationally asymmetric components unique or customized to the wearer's eye. This results in an improved lens/cornea fitting relationship and/or anterior surface shape that achieve desired physical, physiological
15 lens movement and/or vision correction objectives.

 In one aspect of the invention, ophthalmic lenses are provided and comprise lens bodies, preferably structured and adapted to be located in or on an eye, having anterior surfaces and generally opposing posterior surfaces. At
20 least one of the anterior surface and the posterior surface is a substantially smooth, junctionless, three dimensional surface. The junctionless surface may be an asymmetrical surface. In certain embodiments, the ophthalmic lens has a varied anterior surface topography
25 defining a ballast. Such a varied anterior surface topography may, and preferably does, facilitate at least one of lens comfort, lens orientation, vertical lens translation, and/or lens stabilization when the lens is located on a corneal surface. In addition, the lenses may
30 have a lens body with at least one contour that defines a substantially junctionless varying radial thickness. Such ophthalmic lenses may include hydrophilic silicone polymer components, and in particular embodiments, the ophthalmic lenses include silicone hydrogels. In situations where
35 the ophthalmic lens is used to provide vision correction for an astigmatism, the lens may, and preferably does, include a toric surface, such as a toric posterior

surface. In situations where more than one optical power is necessary to provide a desired vision correction, the lens may, and preferably does, include a multi-powered optical zone. In other words, the lens may include a multi-focal optical zone (e.g., an optical zone having two or more optical powers). Accordingly, multi-focal lenses may include bifocal lenses, trifocal lenses, and the like.

In another aspect of the present invention, a contact lens is provided which includes a lens body containing a hydrophilic silicone polymer component, such as a silicone hydrogel and the like. The lens body may be shaped or formed in accordance with the methods disclosed herein. These contact lenses may include a toric surface, such as for providing vision correction to astigmatic eyes, and may include a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness, and facilitates at least one of lens comfort, lens orientation, vertical lens translation, and/or lens stabilization when the contact lens is placed on a corneal surface of an eye, for example, a living human eye.

In a further aspect of the present invention, a contact lens is provided which comprises a lens body including a silicone hydrogel and having a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens. Such varied surface topography may, and preferably does, facilitate at least one of lens comfort, lens orientation, vertical lens translation, and/or lens stabilization when the lens is placed on a corneal surface of an eye. The lens may include a toric surface

Although, for illustrative purposes, the description of the present invention set forth herein emphasizes contact lenses and methods relating to contact lenses, it is to be understood that the present invention is adapted to ophthalmic lenses in general, and preferably to ophthalmic lenses structured and adapted to be located in

or on an eye, and to methods relating to such ophthalmic lenses. All such lenses and methods are included within the scope of the present invention.

The present invention may be adapted for use in
5 producing ophthalmic lenses using any suitable processing technique or combination thereof. In one useful embodiment, the present invention is utilized in conjunction with conventional cast molding techniques, for example in the initial design of a tooling insert having a
10 surface generally corresponding to a desired lens surface. As is well known to those skilled in the art, a tooling insert, or tool, is used to form a mold section which generally defines a negative impression of a surface of a final lens product.

15 For example, a tooling insert having a three dimensional, substantially junctionless surface designed by a method of the invention, is positioned in a molding apparatus, such as a molding apparatus of conventional design. A moldable composition, such as a polymeric
20 material or a composition of a polymeric material, is introduced into the molding apparatus and subjected to conditions effective to form a mold section having a negative impression of the surface of the tool. The mold section formed by the tool may be either a back surface
25 mold section, or a front surface mold section depending upon the tooling insert design. In other words, the surface of the tool generally corresponds to a face, either a posterior or an anterior face of the ophthalmic lens to be formed.

30 As is conventional, the mold section is assembled with a complementary mold section to form a lens-shaped cavity therebetween. A contact lens precursor material is introduced into the lens-shaped cavity. Upon demolding or removal from the mold sections, a lens product is
35 obtained. As is typical, post formation processing steps may be employed to the demolded contact lens product. These steps may include hydration, sterilization,

packaging and the like. These steps are well known and are not considered part of the present invention.

In accordance with the present invention, the tooling insert may include irregular or asymmetric surface contours that are customized or unique to the wearer's eye, or contours which are not definable as a substantially junctionless surface by a two dimensional curve or interpolation. The design of the tooling insert preferably is accomplished by a method comprising providing or specifying sample data points from a designated, three dimensional surface, for example, a designated corneal surface or a designated or desired anterior lens surface, interpolating between the data points using at least one algorithm to define a simulated three dimensional designated surface, and forming the simulated three dimensional surface on the tooling insert, for example, on a tooling insert blank.

In this embodiment of the invention, cast molded ophthalmic lenses, for example, contact lenses, are made having improved fit, and/or anterior surface shape and/or vision correction performance and/or other performance relative to conventional or prior art cast molded lenses, for example, that are conventionally produced using symmetric, conic or spherical inserts.

Alternative lens manufacturing techniques may be used in conjunction with the methods of the present invention.

For example, the algorithm may be used in conjunction with lens surface forming tools, including but not limited to lathes or mills. The simulated designated three dimensional surface can be cut directly onto a lens blank, for example, using a computer driven surface cutting tool.

In another aspect of the present invention, methods for reshaping corneas are provided. Such methods comprise providing or specifying sample data points from a three dimensional corrected corneal surface, that is a corneal surface to be provided to the cornea of a patient to obtain a desired result, such as a desired vision

correction; interpolating between the sample data points using at least one algorithm to produce a smooth, substantially junctionless, simulated three dimensional surface; and providing an optical correction to a cornea
5 by shaping the surface of the cornea to approximate the simulated three dimensional surface. In one useful embodiment, the methods further comprise providing sample data points from a three dimensional surface of the uncorrected surface of the cornea of the patient; and
10 interpolating between the sample data points using at least one algorithm to produce a smooth, substantially junctionless, simulated three dimensional uncorrected surface, which is then employed in the providing step.

The present methods are effective to determine what
15 degree of corneal reshaping is required to achieve a desired vision correction. The simulated three dimensional corrected corneal surface is the surface which will provide the desired correction, for example, vision correction. The uncorrected surface that is interpolated
20 from the sample data points of the uncorrected cornea represents the surface of the cornea prior to reshaping. Thus, the degree of reshaping required to go from the original, uncorrected shape of the cornea to the desired or corrected shape of the cornea for a desired correction
25 is determined.

The reshaping itself can be performed using any suitable method which can be adapted to be controlled in accordance with the present invention. In one particularly useful embodiment, the step of providing a
30 correction includes ablating the surface of the cornea using a computer-driven laser system, such as is conventionally used in reshaping corneal surfaces. The step of providing a correction may include producing an asymmetrical surface on a corneal surface, for example, on
35 a symmetrical corneal surface.

Each and every feature described herein, and each and every combination of two or more of such features, is

included within the scope of the present invention provided that the features included in such a combination are not mutually inconsistent.

5 **Brief Description of the Drawings**

The advantages of the present invention will be more readily understood with reference to the following description when considered in conjunction with the appended drawing of which:

10 Fig. 1 shows a simplified, cross sectional representation of a contact lens on an eye surface;

Figs. 2a, 2b and 2c show, respectively, a front view representation including thickness data, a nominal radial thickness profile for a horizontal cross-section through
15 the lens center and a side view of a rotationally symmetric, spherical contact lens designed in accordance with a method of the present invention. The regions bounded by broken lines (2a) designate transition regions between adjacent areas of substantially different surface
20 types.

Figs 3a, 3b and 3c show, respectively, a front view representation including thickness data, a nominal radial thickness profile for a horizontal cross-section through the lens center and a side view of a rotationally
25 asymmetric, toric contact lens designed in accordance with a method of the present invention. The regions bounded by broken lines (3a) designate transition regions between adjacent areas of substantially different surface types.

Fig 4 shows a front view representation, a cross-sectional view including thickness data of a complex
30 design contact lens designed in accordance with a method of the present invention. The regions bounded by broken lines designate transition regions between adjacent areas of substantially different surface types.

35 Figs. 5a and 5b show three dimensional representations of, respectively, a rear surface/cornea separation (α) and a radial thickness (δ) profile for the

radially symmetric lens of Figs 2a-2c;

Figs. 6a and 6b show three dimensional representations of, respectively, a rear surface/cornea separation (α) and a radial thickness (δ) profile for the
5 toric lens of Figs 3a-3c; and

Fig. 7a and 7b show three dimensional representations of, respectively, a rear surface/cornea separation (α) and a radial thickness (δ) profile for the complex design lens of Fig. 4.

10 Fig. 8 is a schematic diagram illustrating one method for producing lenses in accordance with the present invention.

Detailed Description of the Drawings

15 The present invention is directed to ophthalmic lenses and methods for designing and producing such lenses, including but not limited to monofocal, multifocal and toric contact lenses, intraocular lenses, corneal inlay lenses and other ophthalmic lenses.

20 It has been discovered that the methods of manufacturing ophthalmic lenses in accordance with the present invention are particularly advantageous with lenses made from a hydrophilic lens materials, including, but not limited to, hydrophilic silicone polymer
25 components and the like, and mixtures thereof.

In reference to the disclosure herein, a polymeric hydrogel includes a hydrogel-forming polymer, such as a water swellable polymer. The hydrogel itself includes such a polymer swollen with water. Polymeric hydrogels
30 useful as ophthalmic lenses, for example, contact lenses, typically have about 30% to about 80% by weight water, but may have about 20% and about 90% by weight water, and have refractive indices between about 1.3 and about 1.5, for example about 1.4. Examples of suitable hydrogel-
35 forming polymer materials or components of the disclosed lenses include, without limitation, poly(2-hydroxyethyl

methacrylate) PHEMA, poly(glycerol methacrylate) PGMA, polyelectrolyte materials, polyethylene oxide, polyvinyl alcohol, polydioxaline, poly(acrylic acid), poly(acrylamide), poly(N-vinyl pyrrolidone) and the like
5 and mixtures thereof. Many of such materials are publicly available. In addition, one or more monomers which do not themselves produce homopolymers which are hydrogel-forming polymers, such as methylmethacrylate (MMA), other methacrylates, acrylates and the like and mixtures
10 thereof, can also be included in such hydrogel-forming polymer materials provided that the presence of units from such monomers does not interfere with the desired formation of a polymeric hydrogel.

Ophthalmic lenses in accordance with the present
15 invention may also be manufactured from a biocompatible, non-hydrogel material or component. Examples of non-hydrogel materials include, and are not limited to, acrylic polymers, polyolefins, fluoropolymers, silicones, styrenic polymers, vinyl polymers, polyesters,
20 polyurethanes, polycarbonates, cellulose, proteins including collagen-based materials and the like and mixtures thereof.

Preferably, the lenses in accordance with this invention are hydrophilic. Hydrophilic lenses may be
25 constructed from one or more monomeric unit components, i.e., monomeric components. For example, and without limitation, the monomeric unit component may comprise hydrophilic monomers which provide -OH, -COOH, -NCO(CH₂)₃ (e.g., pyrrolidone) and the like groups. Examples of
30 useful hydrophilic monomeric components include, without limitation, hydroxyalkyl methacrylates, such as hydroxyethyl methacrylate, methacrylic acid N-vinylpyrrolidone, acrylamide, alkyl acrylamides, vinyl alcohol, monomers, such as hydrophilic (meth)acrylates and
35 the like and mixtures thereof, useful for inclusion in hydrophilic silicone polymeric materials, e.g., silicone

hydrogels, silicon-containing monomers for polymerization into hydrophilic silicone polymers, siloxanes, such as organosiloxanes and the like and mixtures thereof, silicon-containing acrylates, silicon-containing methacrylates, and the like and mixtures thereof. Preferably, the lens is a hydrogel-containing lens, more preferably a silicone hydrogel-containing lens.

For the sake of simplicity and illustrative clarity, the following detailed description will be directed primarily to the design of contact lenses. It will be appreciated by persons of ordinary skill in the art that the methods in accordance with the invention, possibly with one or more appropriate modifications thereto, can be utilized in the design of these and other types of lenses.

In accordance with a method of the invention, an ophthalmic lens is designed using a mathematical algorithm and a limited number of specifications to achieve a single, continuous, non-compositing mathematical surface in three dimensional space.

More particularly, after a corneal shape is determined for a population or a selected patient, a posterior surface of a contact lens is designed by interpolating between sample scattered data points using a mathematical algorithm, preferably including relationships directed to one or more parameters desired for the resulting lens to have, for example, the space or gap between the cornea and the posterior surface of the lens, as described elsewhere herein, to produce a simulated three dimensional surface (posterior lens surface), for example, that is based at least in part on the corneal shape, such as closely approximating one or more of the varying curvatures of the cornea. In certain embodiments, the lenses are formed to have a posterior surface that corresponds to the surface topography of a cornea, such that a substantially uniform distance is maintained between the posterior surface of the lens and the cornea.

By reducing variations in distance between the lens and

the cornea, enhanced lens fit and/or lens wearer comfort are obtained. Thickness data as well as specifications or relationships or for one or more lens performance requirements or parameters, as described elsewhere herein, are provided and, in conjunction with the selected mathematical algorithm, define a three dimensional surface (anterior lens surface) having a desired thickness profile.

The simulated three dimensional surfaces can be formed onto a lens using conventional manufacturing techniques, for example by cast molding techniques. Moreover, the present invention complements the use of modern CNC lathes.

By using this approach as detailed herein, anterior and/or posterior lens surfaces can be designed, preferably without substantial compromise.

Referring now to Fig. 1, a simplified, vertical cross sectional view of a contact lens 10 and cornea 12 is shown, taken across x and z coordinate axes, with the y-axis being directed into the page. The lens 10 includes a back surface (i.e. posterior surface) 14, that is tangential to the x and y axes at (0,0,0). The cornea 12 lies a distance α mm below a center of the back surface 14 of the lens 10, and a front surface (i.e. anterior surface) 18 lies a distance δ mm above the cornea 12. The cornea has a surface 22 that is ellipsoidal with semi-axial lengths R_0 and R_1 , as further described herein.

Any contact lens can be designed using the present invention. However, as indicated herein, it has been found that lenses comprising one or more hydrophilic silicone polymer components particularly benefit from the methods disclosed herein. For example, contact lenses, such as contact lenses containing silicone hydrogel components, in accordance with the present invention which have a varying surface topography effectively facilitate at least one of enhanced lens comfort, enhanced lens orientation, enhanced vertical lens translation, and/or

enhanced lens stabilization when placed on a corneal surface. Obtaining one or more of such enhancements with lenses containing silicone hydrogels is particularly useful since such lenses may be used for extended wear, e.g., used in the eye for at least about 1 week or about 2 weeks to about 1 month or more without being removed. Lenses including one or more features of the present invention are particularly useful as extended wear lenses.

Such contact lenses include toric contact lenses or multifocal lenses. Thus, substantial benefits, for example, in terms of comfort, orientation, and stabilization, among other things, are obtained with the lenses of the present invention. This is particularly important since lenses which comprise a hydrophilic silicone polymer component typically have a high modulus relative to other hydrogel lenses.

In addition, a lens of the present invention may have a lens body with a portion or portions that are relatively thicker than other portions of the lens body. For example, a lens body may have an inferior portion that is thicker than a superior portion. Or, a lens body may include a plurality of protrusions extending from a surface, such as the anterior surface of the lens body, which result in a greater thickness at those protrusions than the remaining portions of the lens body. Such thickened portions may be particularly useful in toric lenses, and/or multifocal lenses that provide enhanced vertical lens translation. Thus, for example, with extended wear contact lenses, the silicone hydrogel lenses with thickened regions advantageously provide enhanced gas permeability relative to non-silicone hydrogel lenses. The silicone hydrogel lenses typically have enhanced oxygen and carbon dioxide permeability, relative to other (non-silicon-containing) hydrogel lenses.

For example, turning now to Figs 2a-2c, a rotationally symmetric, single vision contact lens 30 is shown, to represent one of the most simplest contact lens

designs.

The present invention is particularly advantageous in the design and production of more complex, rotationally asymmetric lenses. For example, Figs. 3a-3c show a toric
5 contact lens 40, specifically a prism ballast toric lens, designed in accordance with the invention.

Fig. 4 shows a very complex lens design, produced in accordance with the present invention. This complex lens includes asymmetrical three dimensional surface components
10 that can not be satisfactorily designed using conventional two dimensional methods and techniques.

Lens design using the present invention more specifically comprises the following steps. A corneal shape of a patient is first determined. A selected number
15 of sample data points representing the cornea are provided using conventional means. A desired fitting relationship of the lens back surface to the cornea is then specified to meet the wearer's physiological, physical and/or optical requirements. A simulated three dimensional
20 surface is then defined using an algorithm to interpolate between the data points. This simulated three dimensional surface can be formed on a tooling insert, or directly onto a lens posterior surface, for example by using a computer driven surface cutting tools, mills or lathes.

25 Next, an anterior surface of the lens is designed. Particularly, key lens thickness data points are specified to achieve the desired clinical performance, e.g. vision correction, rotational orientation of a toric lens and the like. Examples of such thickness data for the three lens
30 types are shown in Figs 2a-2b, Figs. 3a-3b, and Fig 4. The anterior surface of the lens is now designed by using an algorithm in conjunction with the key lens thickness data.

In certain embodiments, the lens is designed to correct or reduce wavefront aberrations of a patient's
35 eye. A wavefront aberration is the three dimensional profile of the distance between a real light wave front of a central spot of light and a reference surface, e.g., an

ideal spherical shape, as shown in FIG. 1 of U.S. Patent No. 6,585,375, and as described in Mierdel et al., "Der Ophthalmologe", No. 6, 1997. A wavefront aberration may be understood to be an optical path difference between an actual image wavefront and an ideal reference wavefront centered at an image point, at any point in the pupil of an eye. Methods of measuring wavefront aberration are well known to persons of ordinary skill in the art.

Briefly, and as described by Nader, N., Ocular Surgery News, "Learning a new language: understanding the terminology of wavefront-guided ablation" (February 1, 2003), an aberrometer (e.g., an instrument that measures the aberrations of an eye) may be used to measure an aberrated image that leaves an eye, or may be used to measure the shape of a grid projected onto the retina. For example, while a patient is maintaining a view on a visual fixation target, a relatively narrow input laser beam may be directed through the pupil and focused onto the retina of the patient's eye to generate a point-light source on the retina. The light is reflected from the retina back through the pupil, and the wavefront of the light passing from the eye is passed to a wavefront sensor. As understood by persons of ordinary skill in the art, a wavefront can be defined as a surface that connects all field points of an electromagnetic wave that are equidistant from a light source. The light rays leave the eye and may pass through an array of lenses that detects the light rays' deviation. The wavefront gets deviated or distorted by inhomogeneities in the refractive properties in the refractive media of the eye, such as the lens, the cornea, the aqueous humor, and the vitreous humor. The resulting image is then typically recorded by a charge coupled device (CCD) camera, for example.

The wavefront is then typically reconstructed and the deviations are described mathematically in three

dimensions. The wavefront deviations may be calculated, at least in part, by analyzing the direction of the light rays. Generally, parallel light beams indicate a wavefront with little, if any, aberrations, and
5 nonparallel light beams indicate a wavefront with aberrations that do not give equidistant focal points.

Typically, Zernike polynomials are used to measure or analyze the ocular aberrations. Each Zernike polynomial describes a shape or a three-dimensional surface. As
10 understood by persons of ordinary skill in the art, Zernike polynomials are an infinite set, but in ophthalmology, the Zernike polynomials are usually limited to the first fifteen polynomials. Second-order Zernike terms represent conventional aberrations, such as defocus
15 and astigmatism. Aberrations above second-order aberrations are called higher-order aberrations. Higher-order aberrations typically cannot be corrected by conventional spherocylindrical lenses. Examples of higher-order aberrations include, but are not limited to,
20 coma, spherical aberrations, trefoil (wavefronts with threefold symmetry), and quadrefoil (wavefront shapes with fourfold symmetry). Many higher-order aberrations are not symmetrical, but some higher-order aberrations, such as spherical aberrations, may be symmetrical.

25 In accordance with the present invention, the wavefront aberration of a patient's eye may be measured and analyzed to facilitate appropriate lens construction.

The lenses of the present invention can then be shaped, as discussed herein, taking into account the configuration
30 or topography of the patient's corneal surface, as well as any wavefront aberrations. For example, by first shaping the lens body to have a posterior surface that corresponds to the corneal surface topography of an eye, and then shaping the lens body to correct any wave-front aberration
35 associated with the patient's eye. Thus, a contact lens is obtained with a lens body configured to correct a wavefront aberration of a patient's eye. Advantageously,

contact lenses are provided that may be custom-fit for a particular patient taking into consideration factors, such as, corneal surface topography, astigmatisms, wavefront aberrations, and variations in optical power. In one
5 embodiment, a contact lens is provided with a ballast, and an optical zone including a wavefront aberration corrective surface. The wavefront aberration corrective surface may be provided on either the anterior surface, the posterior surface, or both the anterior and posterior
10 surfaces. Thus, in certain embodiments, the present lenses correct or reduce higher-order wavefront aberrations. In situations where the higher-order wavefront aberrations are asymmetrical, the lenses are configured to substantially maintain a desired orientation
15 to correct the wavefront aberrations. In some embodiments, the wavefront aberration correction orientation is achieved by utilizing a ballast on the lens. In other embodiments, the lens may include a plurality of thickened regions or portions which
20 facilitate proper orientation to correct or reduce a wavefront aberration.

The outcomes of the construction of posterior and anterior surfaces, in accordance with a method of the invention, of the three lens types are demonstrated by the
25 three dimensional schematic representations in Figs. 5a - 7b. More specifically, Figs 5a, 6a and 7a show rear surface/cornea separation of the three lens types, and Figs. 5b, 6b and 7b show radial thickness profiles of the three lens types.

30 Turning now specifically to Figs. 7a and 7b, the complex lens design is shown as smooth and substantially junctionless, despite the varied surface topography thereof. Those of skill in the art will appreciate that this complex lens design cannot be produced using
35 conventional two dimensional mathematically based lens design techniques and methods. It is further noted that the contours of the lens surface shown in Fig 7b can not

be produced using offset rotationally symmetric curves and other sophisticated current design methods.

The step of providing sample data points may be accomplished using conventional techniques and equipment
5 in which sample data points, for example, sagittal depths, can be designated, supplied or selected, for representing the designated surface.

As will be appreciated by those skilled in the art, the task of mathematically representing a surface smoothly
10 in three dimensions, given a limited number of scattered data points and specifications, can be accomplished by many methods and for particular shapes and design specifications. It is known that one algorithm may provide a better description than another, for example by
15 providing different degrees of accuracy. The present invention can be exemplified by three algorithms, which follow hereinafter, although it is recognized that the present invention is not limited to any particular algorithms or combinations of algorithms.

20 The step of forming the lens surface having the three dimensional contour may include shaping a lens using a computer driven mill or lathe or other suitable cutting tool. The simulated three dimensional surface may be inputted in digital form into a computer driven lathe, and
25 the lathe programmed to cut the junctionless, three dimensional surface into a lens blank, a tooling insert (for example in cast molded lenses), or a cornea (for example during laser surgery).

The central portion of an ophthalmic lens is
30 typically referred to as the "optical zone" of the lens in that it provides the optical correction. Depending on the wearer, the optical zone may be described by a spherical conic section, or it may be another, more complicated configuration, such as a toric optical zone.
35 The present invention is especially advantageous in design of toric contact lenses, as well as even more complex designs.

Contact lenses having a toric surface, such as a toric optical zone (commonly referred to as ``toric contact lenses'') are commonly used to correct refractive abnormalities of the eye relating to astigmatism.

5 Astigmatism may be associated with other refractive abnormalities, such as myopia (nearsightedness), and hypermetropia (farsightedness), presbyopia and the like. Toric contact lenses can be prescribed with one or more spherical corrections.

10 Whereas spherical contact lenses may freely rotate on the eye, toric contact lenses typically include a ballast, or a thickened lens section, to inhibit or reduce rotation of the lens on the eye such that the cylindrical axis of the toric zone remains generally aligned with the axis of
15 the astigmatism. The ballast provides an asymmetric component to the lens that can be addressed by the present invention. In certain embodiments, a ballast is defined by varying the anterior surface of the lens body. In other embodiments, a ballast is defined by varying both
20 the anterior surface and posterior surface of the lens body.

Multifocal contact lenses may be provided with a varied surface topography to facilitate vertical lens translation. The varied surface topography may include a
25 ballast, or may include another structural feature on the anterior surface, the posterior surface, or both the anterior surface and posterior surface of the lens, such as one or more protuberances or protrusions, that facilitate vertical lens translation. Examples of
30 protuberances include ledges, ridges, lips, and ribs, among other things. Ridges and ribs may be provided as regions of the lens body that project anteriorly from the anterior surface of the lens body. A ledge may be provided as a region of the lens body where the lens body
35 rapidly, but smoothly, transitions from a thickened region to a thinner region.

Vertical lens translation, as used herein, refers to

the relative up and down, or vertical, movement of the contact lens on an eye with respect to the pupil of the eye. Thus, vertical lens translation may refer to changes in relative position of the contact lens with respect to
5 the pupil of the eye caused by movement of the lens, movement of the eye, or a combination of movement of the lens and the eye.

By way of example, and not by way of limitation, a multifocal lens, such as a bifocal lens, may include an
10 optical zone with two optical powers. Thus, the optical zone may have an inferior portion with a first optical power, and a superior portion with a second optical power.

The inferior portion of the optical zone may have an optical power suitable for reading, thereby defining a
15 reading or near zone. Typically, when the eye with the multifocal optical zone is looking forward (e.g., towards the horizon), the reading zone will be located below or substantially below the center of the pupil of the eye, and substantially all of the vision correction is provided
20 by the superior portion of the optical zone of the lens. As the eye moves down to look at a book, for example, the lens of the present invention will typically effectively move vertically upward so that the reading zone covers at least a portion of the pupil to provide vision correction
25 based on the optical power of the reading zone.

In certain embodiments, the effective upward movement of the lens may be achieved by substantially maintaining the lens in a fixed position as the eye rotates downward so that the pupil is covered by the inferior portion of
30 the lens as the eye moves downward. In other embodiments, the effective upward movement of the lens may be achieved by movement of the lens upwardly, for example, by actions imposed on the lens by one or more of the eyelids of the eye. In yet another embodiment, a lower eyelid may engage
35 with a ballast or other feature on the surface of the lens to hold the lens in a relatively fixed position. As the eye looks down, for example by rotating, the lower eyelid

may move the lens slightly downward, but the rotation of the eye is relatively greater than the movement of the lens to cause the pupil to be covered by at least a portion of the inferior zone of the optical zone.

5 The varied surface topography of such lenses may be in the form of a ballast, which may be formed by varying the thickness or shape of the anterior and/or posterior surface of the lens body. In some embodiments, effective vertical lens translation is obtained by controlling the
10 rate of change of lens thickness. Compared to toric contact lenses, multifocal lenses with ballasts may have a relatively greater rate of change in the ballast region. Thus, the multifocal lenses in accordance with the present invention may have ballasts that are configured to provide
15 effective vertical lens translation, as described above.

With particular reference to Fig. 8, the present invention further includes tools or tooling inserts 112 and 113 useful for cast molding a posterior surface and an anterior surface, respectively, of an ophthalmic lens.
20 The tooling inserts 112 and 113 are adapted to be placed in molding apparatus 115 and 116 in forming a first mold section or half 117 and a second mold section or half 118, each having a negative impression of a surface of the respective tooling insert. The surfaces of the inserts
25 112 and 113 are substantially smooth, junctionless three dimensional asymmetrical surfaces corresponding to a desired ophthalmic lens posterior surface and anterior surface, respectively. The mold sections or halves 117 and 118 are assembled together to form an assembled mold
30 120, which defines a lens-shaped cavity. A polymerizable/curable monomer composition is placed in the cavity and is processed, e.g., polymerized and/or cured, to form a contact lens. Such processing may be conventional and well known in the art and, therefore,
35 needs not be described in detail. The lens is demolded and may be subjected to conventional additional processing steps, such as sterilization, packaging and the like.

Tool inserts and molding sections produced by such tool inserts, as described herein, are within the scope of the present invention.

In another embodiment of the invention, a method for
5 reshaping the cornea of an eye is provided. The method generally comprises selecting or designating sample data points representing a corrected corneal surface of an eye of a patient, e.g., human being, and interpolating, using at least one algorithm, between the sample data points, to
10 produce a substantially smooth, continuous, three dimensional surface. Preferably, sample data points from a three dimensional surface of the uncorrected surface of the patient's cornea are obtained and are interpolated between using at least one algorithm to produce a smooth,
15 substantially junctionless simulated three dimensional uncorrected surface. Using a conventional computer driven laser system supplied with the simulated surface contour, and preferably the simulated uncorrected surface contour, the cornea is reshaped to approximate the simulated
20 surface contour. In this embodiment of the invention, the method can be used with conventional corneal refractive laser surgical systems to alter the refractive capabilities of the eye by selectively ablating or reshaping the corneal stromal tissue, and in some cases,
25 following temporary removal of an anterior corneal flap. The method is useful in producing an asymmetric surface. such as a corneal surface, for example, to correct astigmatism, in providing custom corneal shaping for improved optical correction, in providing a correction
30 centered over the corneal apex which is often not aligned with the pupil center and the like.

The following non-limiting Examples illustrate certain aspects of the invention.

EXAMPLESDesigning a toric lens based on
a method of the present invention

5 The steps to be employed to design a toric contact lens in accordance with the present invention include:

- (1) Determine a corneal shape.
- (2) Select and represent a desired lens/cornea fitting relationship.
- 10 (3) Specify a posterior surface including a toric optical zone.
- (4) Use Algorithm X to represent the posterior surface of the lens in three dimensions.
- (5) Specify center thickness of the lens.
- 15 (6) Select an optical power of the lens.
- (7) Determine lens mass distribution (selected sample points).
- (8) Use Algorithm X to represent the anterior surface of the lens in three dimensions, including a
- 20 graphical representation.

Algorithm X can be any suitable algorithm effective for interpolation to provide the desired simulated three dimensional surfaces. Three such mathematical methods using suitable algorithms used in interpolation between

25 data points are provided and discussed below.

INTERPOLATION METHODS

Generally speaking, a list of n data points and their values $(z_1 \dots z_n) = [z(x_1, y_1) \dots z(x_n, y_n)]$ is specified

30 which constitutes an incomplete representation of the unknown underlying surface $f^*(x, y)$. Overall, an interpolating function $f(x, y)$ is chosen for which $f(x_i, y_i) = z_i$, $i=1, \dots, n$ and $f \rightarrow f^*$ monotonically as $n \rightarrow \infty$.

It has been assumed that the smoothness of the

35 underlying surface f^* is generally considered to be at

least C^1 (or possibly piecewise C^1), and this assumption is built into the mathematical formation.

I. THE SHEPARD METHOD (Shepard 1968)

In the basic Shepard method, the interpolated value ϕ at any point (x,y) is defined by a weighted sum of the data points, where the weighting is proportional to the inverse square of the distance between (x, y) and the data points.

In its simplest form, the algorithm can be represented by the equation

$$\phi(x,y) = \frac{\sum_{i=1}^N h_i |(x,y) - (x_i, y_i)|^{-2}}{\sum_{i=1}^N |(x,y) - (x_i, y_i)|^{-2}}$$

where h_i is the i th data point, (x_i, y_i) its position, and N is the number of data points.

II. THE INTERPOLATION METHOD (Cline and Renka, 1984)

The following is a summary description of the interpolation method hereinafter referred to as the CR scheme; this method is described more fully in, Cline A.K. and Renka, R.J., "A Storage-efficient Method for Construction of A Thiessen Triangulation", Rocky Mountain J. Math. 14(1), 119-139 (1984); Renka, R.J. and Cline, A.K., "A Triangle-based C^1 Interpolation Method", Rocky Mountain J. Math. 14(1) 223-237 (1984); and Renda R.J., "Algorithm 624: Triangulation and Interpolation At Arbitrarily Distributed Points In The Plane"; ACM Trans. Math, Software 10(4) 440-442 (1984).

The CR scheme comprises the following steps:

5

a. Partition the convex hull associated with the set of known data points $\{(x_1, y_1), \dots, (x_n, y_n)\}$ into triangles (CR Step 1).

10 b. Estimate the partial derivatives of the interpolating function $f(x, y)$ at each data point (CR Step 2).

15 c. For any arbitrary point (x_0, y_0) in the convex hull, the value of the interpolating function $f(x_0, y_0)$ can then be calculated using the data values and partial derivatives at each of the vertices of the triangle containing (x_0, y_0) . The calculation is based on a cubic surface capping the triangle (CR Step 3).

STEP 1. Triangulation.

20 Let S be the set of nodes (data points) $\{(x_1, y_1), \dots, (x_n, y_n)\}$, where $n \geq 3$ and $(x_i, y_i) \neq (x_j, y_j)$ for $i \neq j$. N_i is used to denote the node (x_i, y_i) . Let H be the convex hull of S .

25 A triangulation of S is a set of triangles T with the following properties: (i) each triangle contains exactly three nodes, (ii) the interior regions of the triangles are pairwise disjoint, and (iii) every point in H is contained in some triangle of T .

30 To maximize the accuracy of Steps (ii) and (iii) above, construct a triangle that is as nearly equiangular as possible. To do this, define an arc as the undirected line segment $N_i \leftrightarrow N_j$, $i \neq j$, joining two vertices of a triangle in T . An arc $N_i \leftrightarrow N_j$ is locally optimal if it lies on the boundary of H or if the quadrilateral defined

by a pair of adjacent triangles that share nodes is not strictly convex.

The triangulation required is one in which all arcs are locally optical. The resulting triangulation is
 5 called a Thiessen triangulation, or a Delaunay triangulation. Cline and Renka (1984) give the following algorithm for producing a Thiessen triangulation.

- 10 • For each node N_i , define the Thiessen region associated with N_i to be the set of points (x,y) which satisfy $|(x,y) - N_i| < |(x,y) - N_j|$ for all $i \neq j$.
- 15 • A pair of nodes N_1, N_2 are said to be Thiessen neighbours if their corresponding Thiessen regions share at least one point. If the regions share exactly one point, N_1 and N_2 are called weak Thiessen neighbours, if they share two or more points, they are called strong Thiessen neighbours.
- 20 • Connect all pairs of strong Thiessen neighbours, and arbitrarily choose $k - 3$ nonintersecting arcs connecting weak neighbours when k nodes lie on a common circle ($k \geq 4$).

25 **STEP 2.** Estimate partial derivatives of the interpolating function $f(x,y)$ at each data point.

After performing the triangulation, the next step in the CR scheme is to determine the partial derivatives of the interpolating functions at each node.

30 The value of the following partial derivative vectors are to be found:

(1)

$$D_{(x,y)} = \left(\frac{\partial f}{\partial(x,y)}(x_1, y_1), \dots, \frac{\partial f}{\partial(x,y)}(x_n, y_n) \right)$$

5 Such vectors minimize the L_2 norm of the linearized curvature over H of the interpolating function $f(x,y)$. This leads directly to the problem of finding the value of the partial derivatives (1) which minimize the quadrilateral functional

10

(2)

$$Q_k(D_x, D_y) = \int_{P_k} \left\{ \left(\frac{\partial^2 f}{\partial x^2} \right)^2 + 2 \left(\frac{\partial^2 f}{\partial x \partial y} \right)^2 + \left(\frac{\partial^2 f}{\partial y^2} \right)^2 \right\} dx dy$$

where P_k is the patch of triangles containing node k .

15 As described in Renka and Cline (1984), equation (2) leads to a linear system

(3)

$$\frac{\partial Q_k}{\partial D_x} = 0, \frac{\partial Q_k}{\partial D_y} = 0$$

20

which is solved by a block Gauss-Seidel method to recover the required derivatives D_x and D_y .

STEP 3. Sampling.

25 For any arbitrary point in the convex hull, the value of the interpolating function can be calculated using the

data values and partial derivatives at each of the vertices of the triangle containing the arbitrary point. The calculation is based on a cubic surface capping the triangle.

5 The previous two steps have constructed the skeleton of the interpolating function at the known data points of the surface. In the absence of an elementary formula for the underlying surface, the mathematical description of the surface will be complete when the algorithm
10 representing $f(x,y)$ returns a reasonable value for any $(x,y) = (x_0,y_0)$ in the region of interest.

 This process is a common one in interpolation and finite-element analysis, and therefor will not be described in detail herein. In summary, the value of
15 $f(x_0,y_0)$ for some $(x_0,y_0) = H$ is calculated by a procedure due to Lawson (1976). On the triangle T containing (x_0,y_0) , the local structure of f is represented by the cubic element $F(x,y)$ spanning the triangle, so that $f(x_0,y_0) = F(x_0,y_0)$. The local element F has the following
20 properties:

1. F is a true cubic (not bicubic) in each of the three subtriangles of equal area formed by connecting the vertices to the barycenter of the
25 triangle containing (x_0,y_0) .

2. F is C^1

3. On each triangle edge, $N_i \leftrightarrow N_j$, F is a
30 Hermite cube interpolate of z_i, z_j and their directional derivatives at the endpoints N_i and N_j . Furthermore, the derivative of F in the direction normal to $N_i \leftrightarrow N_j$ interpolates the normal derivative at N_i and N_j .

The last two properties guarantee the C^1 continuity across triangle borders (and hence over the whole region H), since the derivatives at any point on a triangle side
 5 are completely determined by their values at the endpoints of the side.

With the construction of local cubic elements F , values lying between the local known data points can be determined. The surface is thus knowable at any point in
 10 the region covered by the data.

III. INTERPOLATION METHOD (THE BICUBIC SPLINE)

This interpolation method, described in Dierck, P., "An Algorithm for Surface Fitting With Spline Functions",
 15 IMA Journal of Numerical Analysis, v.1, pp. 267-283 (1981), calculates a smooth, bicubic spline approximation $\phi(x,y)$ to the set of scattered data points (x_i, y_i, h_i) weights w_i , where $i = 1 \dots N$. The spline is given the B-spline representation

20

(4)

$$\phi(x,y) = \sum_k \sum_l c_{kl} Q_k(x) P_l(y)$$

where $Q_k(x)$ and $P_l(y)$ are normalized cubic B-splines
 25 defined on an interactively calculated set of knots, and the coefficients c_{kl} are to be determined.

At the k th iteration, the current knot set is used to fit a bicubic spline to the data in a least - squares sense. The residual variance

30

(5)

$$\theta = \sum_{i=1}^N w_i^2 (h_i - \phi_k(x_i, y_i))^2$$

is then calculated. If θ is greater than a user-specified
5 non-negative limit S , the knot set is refined by adding
extra knots in regions where the fit is most poor (that
is, where θ is largest) to produce the knot set for the $(k$
 $+ 1)$ th iteration. After many such iterations, the
criterion

10 $\theta \leq S$ is satisfied, the set of knots is accepted.

The above-noted publication by P. Kierck is hereby
incorporated in its entirety herein by reference.

The final approximation to the surface is then
calculated as the solution to the optimization problem of
15 finding the coefficients in equation (4) that minimizes a
global smoothness measure subject to the constraint $\theta < S$.

Although there has been hereinabove described
specific ophthalmic lenses having a junctionless, three
dimensional surface, and methods for producing same, in
20 accordance with the present invention, for the purpose of
illustrating the manner in which the present invention may
be used to advantage, it should be appreciated that the
invention is not limited thereto.

While this invention has been described with respect
25 to various specific examples and embodiments, it is to be
understood that the invention is not limited thereto and
that it can be variously practiced within the scope of the
following claims.

1. A contact lens comprising:

a cast-molded lens body including a silicone hydrogel and structured and adapted to be located on an eye and having an anterior surface and a generally opposing posterior surface, wherein at least one of the anterior surface and the posterior surface is a substantially smooth, junctionless three dimensional asymmetrical surface, and the contact lens has a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,

wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.

2. The contact lens of claim 1, wherein the posterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.

3. The contact lens of claim 1, wherein the anterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.

4. The contact lens of claim 1, wherein both the anterior surface and the posterior surface are the substantially smooth, junctionless three dimensional asymmetrical surfaces.

5. The contact lens of claim 1, 2, 3, or 4, wherein the contact lens has a varied anterior surface defining a ballast.

6. The contact lens of claim 1, 2, 3, or 4, wherein the lens body has a varied anterior surface and a varied posterior surface defining a ballast.

7. The contact lens of any one of claims 1 to 6, wherein the lens body includes a toric surface.

8. The contact lens of any one of claims 1 to 7, wherein the posterior surface of the lens body is structured to approximate a curvature of a corneal surface when the lens body is placed on a surface of a cornea of an eye.
9. The contact lens of any one of claims 1 to 8, wherein the lens body includes a multifocal optical zone.
10. The contact lens of any one of claims 1 to 9, which is swelled with water.
11. A contact lens comprising:
a cast-molded lens body including a hydrophilic silicone polymer component, the lens body having a toric surface, and a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,
wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.
12. The contact lens of claim 11, wherein the lens body comprises a silicone hydrogel.
13. The contact lens of claim 11 or 12, wherein the hydrophilic silicone polymer component includes units from at least one monomer consisting of silicon-containing monomers for polymerization into hydrophilic silicone polymers or mixtures thereof.
14. The contact lens of claim 13, wherein the at least one monomer is a siloxane, a silicon-containing acrylate, a silicon-containing methacrylate, or a mixture thereof.
15. The contact lens of any one of claims 11 to 14, wherein the lens body is structured to correct an astigmatism of an eye.

16. The contact lens of any one of claims 11 to 15, wherein the lens body includes a ballast.
17. The contact lens of any one of claims 11 to 16, wherein the varied surface topography is provided on an anterior surface of the contact lens.
18. The contact lens of any one of claims 11 to 17, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical posterior surface.
19. The contact lens of any one of claims 11 to 18, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical anterior surface.
20. The contact lens of any one of claims 11 to 17, wherein the lens body includes a posterior surface structured to approximate a curvature of a corneal surface when the lens body is placed on a surface of a cornea of an eye.
21. The contact lens of claim 20, wherein the posterior surface is structured to maintain a substantially uniform distance between the posterior surface of the lens body and the corneal surface when the lens body is placed on a surface of a cornea of an eye.
22. The contact lens of any one of claims 11 to 21, which is swelled with water.
23. A contact lens comprising:
a cast-molded lens body including a hydrophilic silicone polymer component, the lens body being structured and adapted to be located on an eye and having an anterior surface and a generally opposing posterior surface, wherein at least one of the anterior surface and the posterior surface is a substantially smooth, junctionless three dimensional asymmetrical surface, and the contact lens has a varied surface topography defining a ballast and at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens

comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,

wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.

24. The contact lens of claim 23, wherein the lens body includes a silicone hydrogel.

25. The contact lens of claim 23 or 24, wherein the lens body includes a toric surface.

26. The contact lens of claim 23, 24, or 25, wherein the posterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.

27. The contact lens of claim 23, 24, or 25, wherein the anterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.

28. The contact lens of claim 23, 24, or 25, wherein both the anterior surface and the posterior surface are the substantially smooth, junctionless three dimensional asymmetrical surfaces.

29. The contact lens of any one of claims 23 to 28, which is swelled with water.

30. A contact lens comprising:

a cast-molded lens body including a hydrophilic silicone polymer component, the lens body having a multifocal optical zone, and a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,

wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.

31. The contact lens of claim 30, wherein the lens body comprises a silicone hydrogel.
32. The contact lens of claim 30 or 31, wherein the hydrophilic silicone polymer component includes units from at least one monomer consisting of silicon-containing monomers for polymerization into hydrophilic silicone polymers or mixtures thereof.
33. The contact lens of claim 32, wherein the at least one monomer is a siloxane, a silicon-containing acrylate, a silicon-containing methacrylate, or a mixture thereof.
34. The contact lens of any one of claims 30 to 33, wherein the lens body includes a ballast.
35. The contact lens of any one of claims 30 to 34, wherein the varied surface topography is provided on an anterior surface of the contact lens.
36. The contact lens of any one of claim 30 to 35, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical posterior surface.
37. The contact lens of any one of claims 30 to 36, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical anterior surface.
38. The contact lens of any one of claims 30 to 35, wherein the lens body includes a posterior surface structured to approximate a curvature of a corneal surface when the lens body is placed on a surface of a cornea of an eye.
39. The contact lens of claim 38, wherein the posterior surface is structured to maintain a substantially uniform distance between the posterior surface of the lens body and the corneal surface when the lens body is placed on a surface of a cornea of an eye.
40. The contact lens of any one of claims 30 to 39, wherein the lens body includes a bifocal optical zone.

41. The contact lens of any one of claims 30 to 33, wherein the lens body includes a varied anterior surface and a varied posterior surface defining a ballast.
42. The contact lens of any one of claims 30 to 41, which is swelled with water.
43. A contact lens comprising:
a water absorbing lens body including a silicone hydrogel and structured and adapted to be located on an eye and having an anterior surface and a generally opposing posterior surface, wherein at least one of the anterior surface and the posterior surface is a substantially smooth, junctionless three dimensional asymmetrical surface, and the contact lens has a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,
wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.
44. The contact lens of claim 43, wherein the posterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.
45. The contact lens of claim 43, wherein the anterior surface is the substantially smooth, junctionless three dimensional asymmetrical surface.
46. The contact lens of claim 43, wherein both the anterior surface and the posterior surface are the substantially smooth, junctionless three dimensional asymmetrical surfaces.
47. The contact lens of any one of claims 43 to 46, wherein the contact lens has a varied anterior surface defining a ballast.
48. The contact lens of any one of claims 43 to 47, wherein the lens body has a varied anterior surface and a varied posterior surface defining a ballast.

49. The contact lens of any one of claims 43 to 48, wherein the lens body includes a toric surface.
50. The contact lens of any one of claims 43 to 49, wherein the posterior surface of the lens body is structured to approximate a curvature of a corneal surface when the lens body is placed on a surface of a cornea of an eye.
51. The contact lens of any one of claims 43 to 50, wherein the lens body includes a multifocal optical zone.
52. The contact lens of any one of claims 43 to 51, which is swelled with water.
53. A contact lens comprising:
a water absorbing lens body including a hydrophilic silicone polymer component, the lens body having a toric surface, and a varied surface topography with at least one contour that defines a substantially junctionless varying radial thickness of the contact lens, the varied surface topography facilitating at least one of lens comfort, lens orientation, vertical lens translation, and lens stabilization when the contact lens is placed on a surface of a cornea of an eye,
wherein the lens body is configured to correct or reduce a higher order wavefront aberration of a patient's eye.
54. The contact lens of claim 53, wherein the lens body comprises a silicone hydrogel.
55. The contact lens of claim 53 or 54, wherein the hydrophilic silicone polymer component includes units from at least one monomer consisting of silicon-containing monomers for polymerization into hydrophilic silicone polymers, or mixtures thereof.
56. The contact lens of claim 53, wherein the at least one monomer is a siloxane, a silicon-containing acrylate, a silicon-containing methacrylate, or a mixture thereof.

57. The contact lens of any one of claims 53 to 56, wherein the lens body is structured to correct an astigmatism of an eye.

58. The contact lens of any one of claims 53 to 57, wherein the lens body includes a ballast.

59. The contact lens of any one of claims 53 to 58, wherein the varied surface topography is provided on an anterior surface of the contact lens.

60. The contact lens of any one of claims 53 to 59, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical posterior surface.

61. The contact lens of any one of claims 53 to 60, wherein the lens body includes a substantially smooth, junctionless three dimensional asymmetrical anterior surface.

62. The contact lens of any one of claims 53 to 59, wherein the lens body includes a posterior surface structured to approximate a curvature of a corneal surface when the lens body is placed on a surface of a cornea of an eye.

63. The contact lens of claim 62, wherein the posterior surface is structured to maintain a substantially uniform distance between the posterior surface of the lens body and the corneal surface when the lens body is placed on a surface of a cornea of an eye.

64. The contact lens of any one of claims 53 to 63, which is swelled with water.

1/7

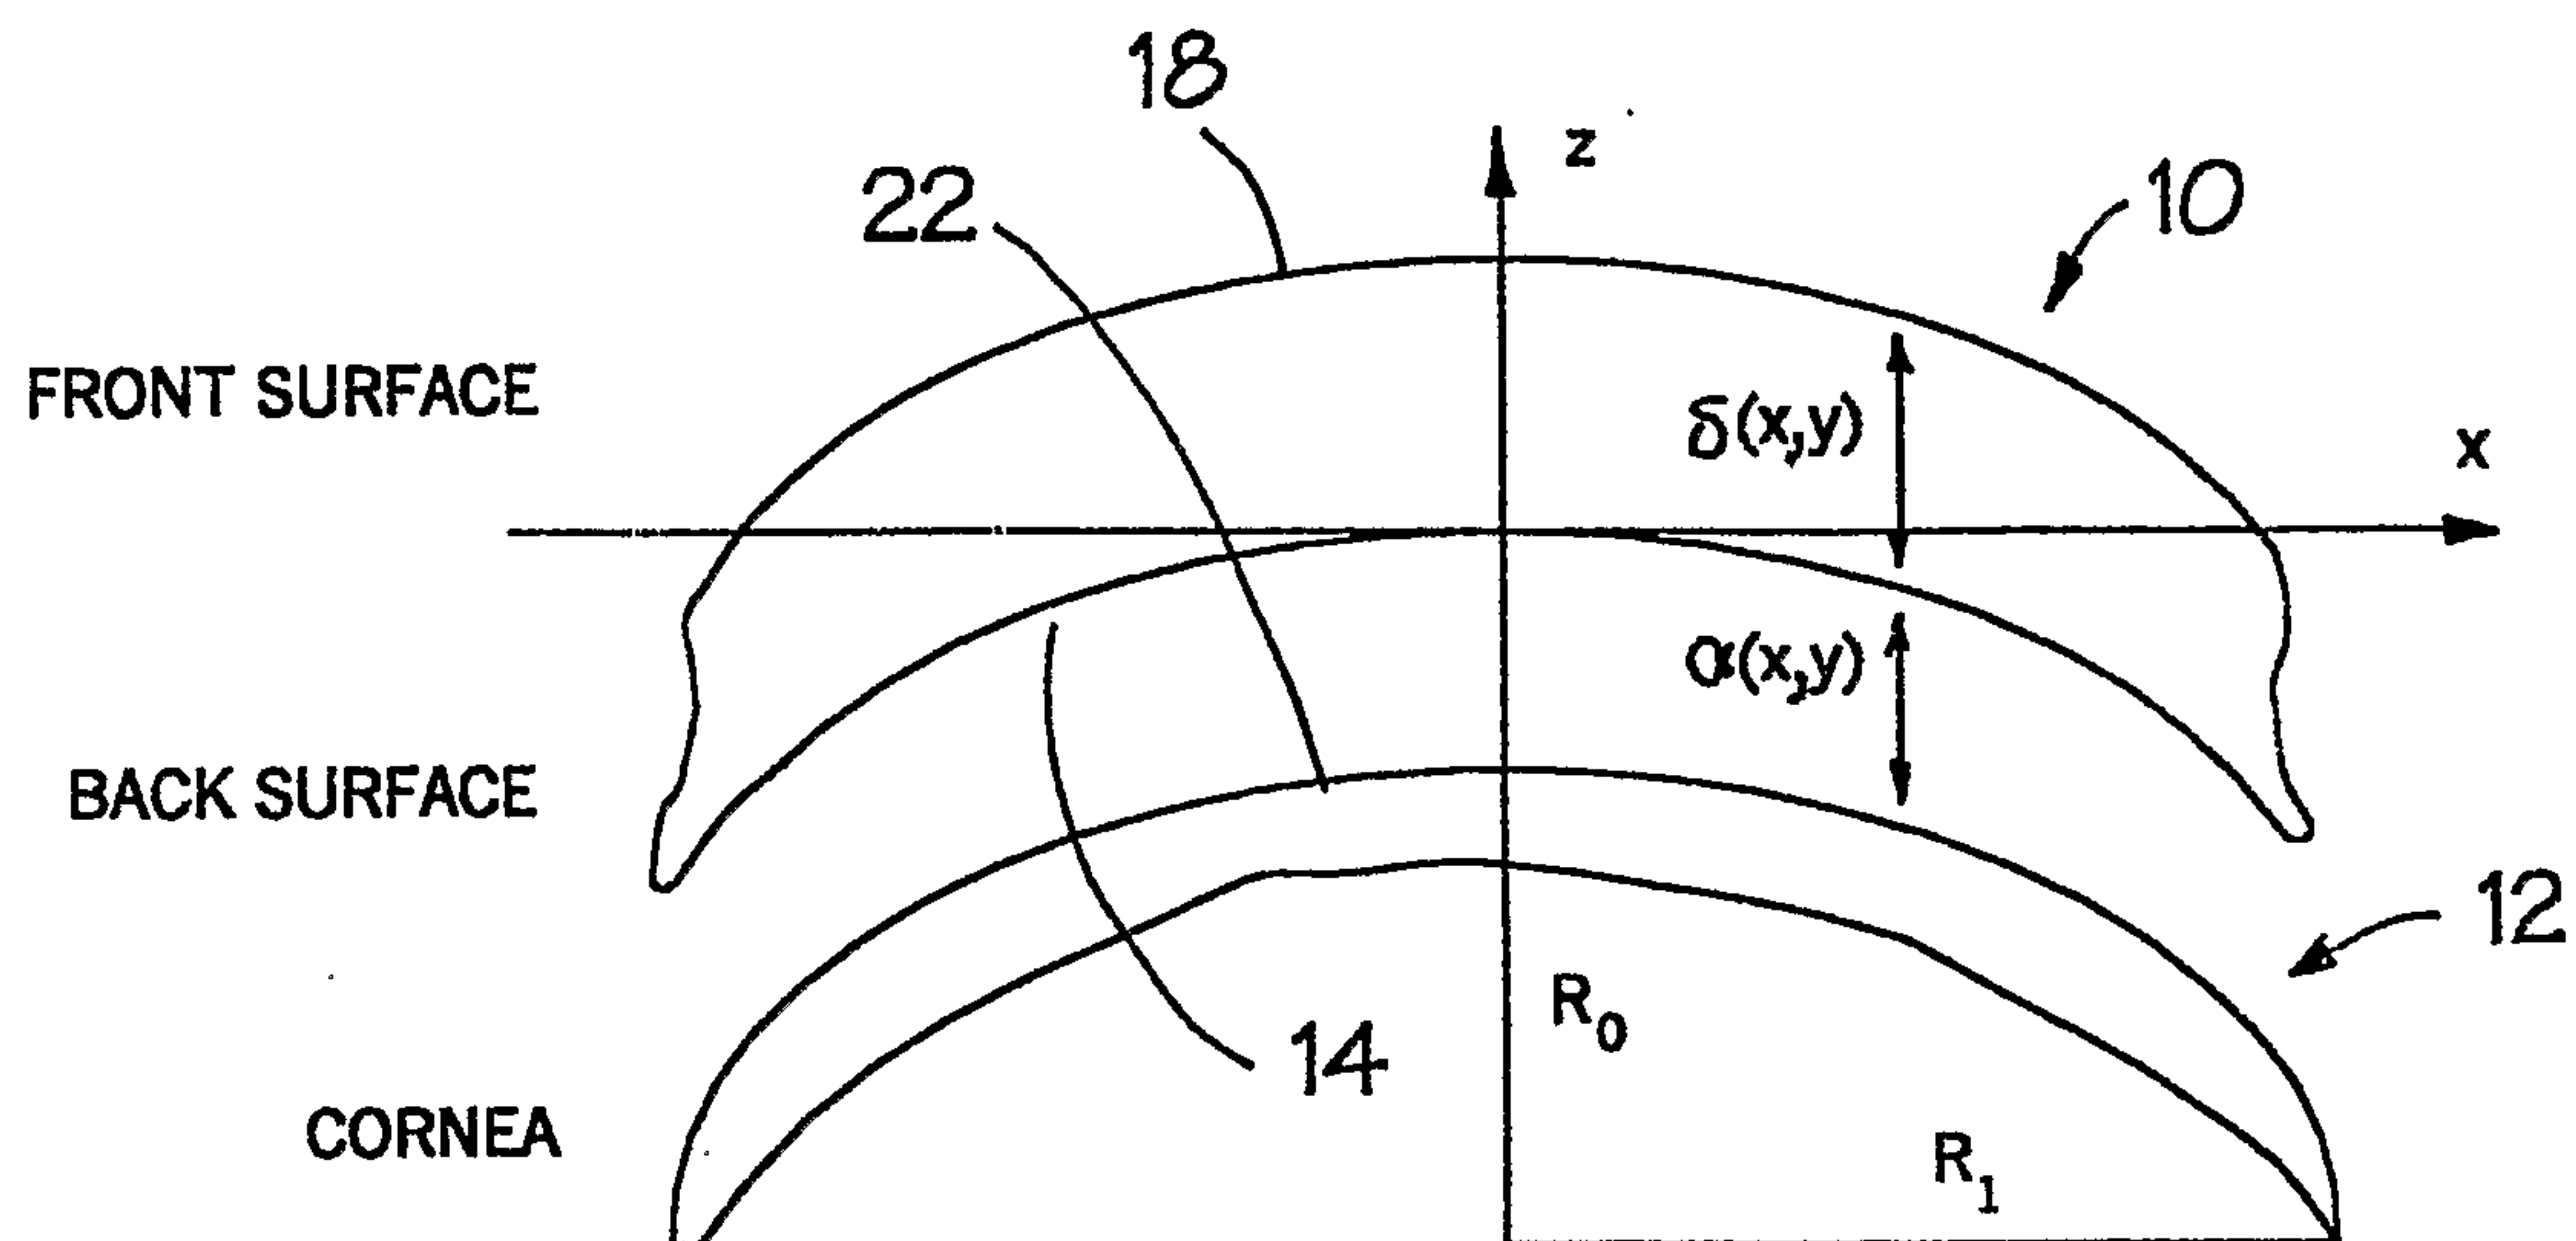


Fig. 1

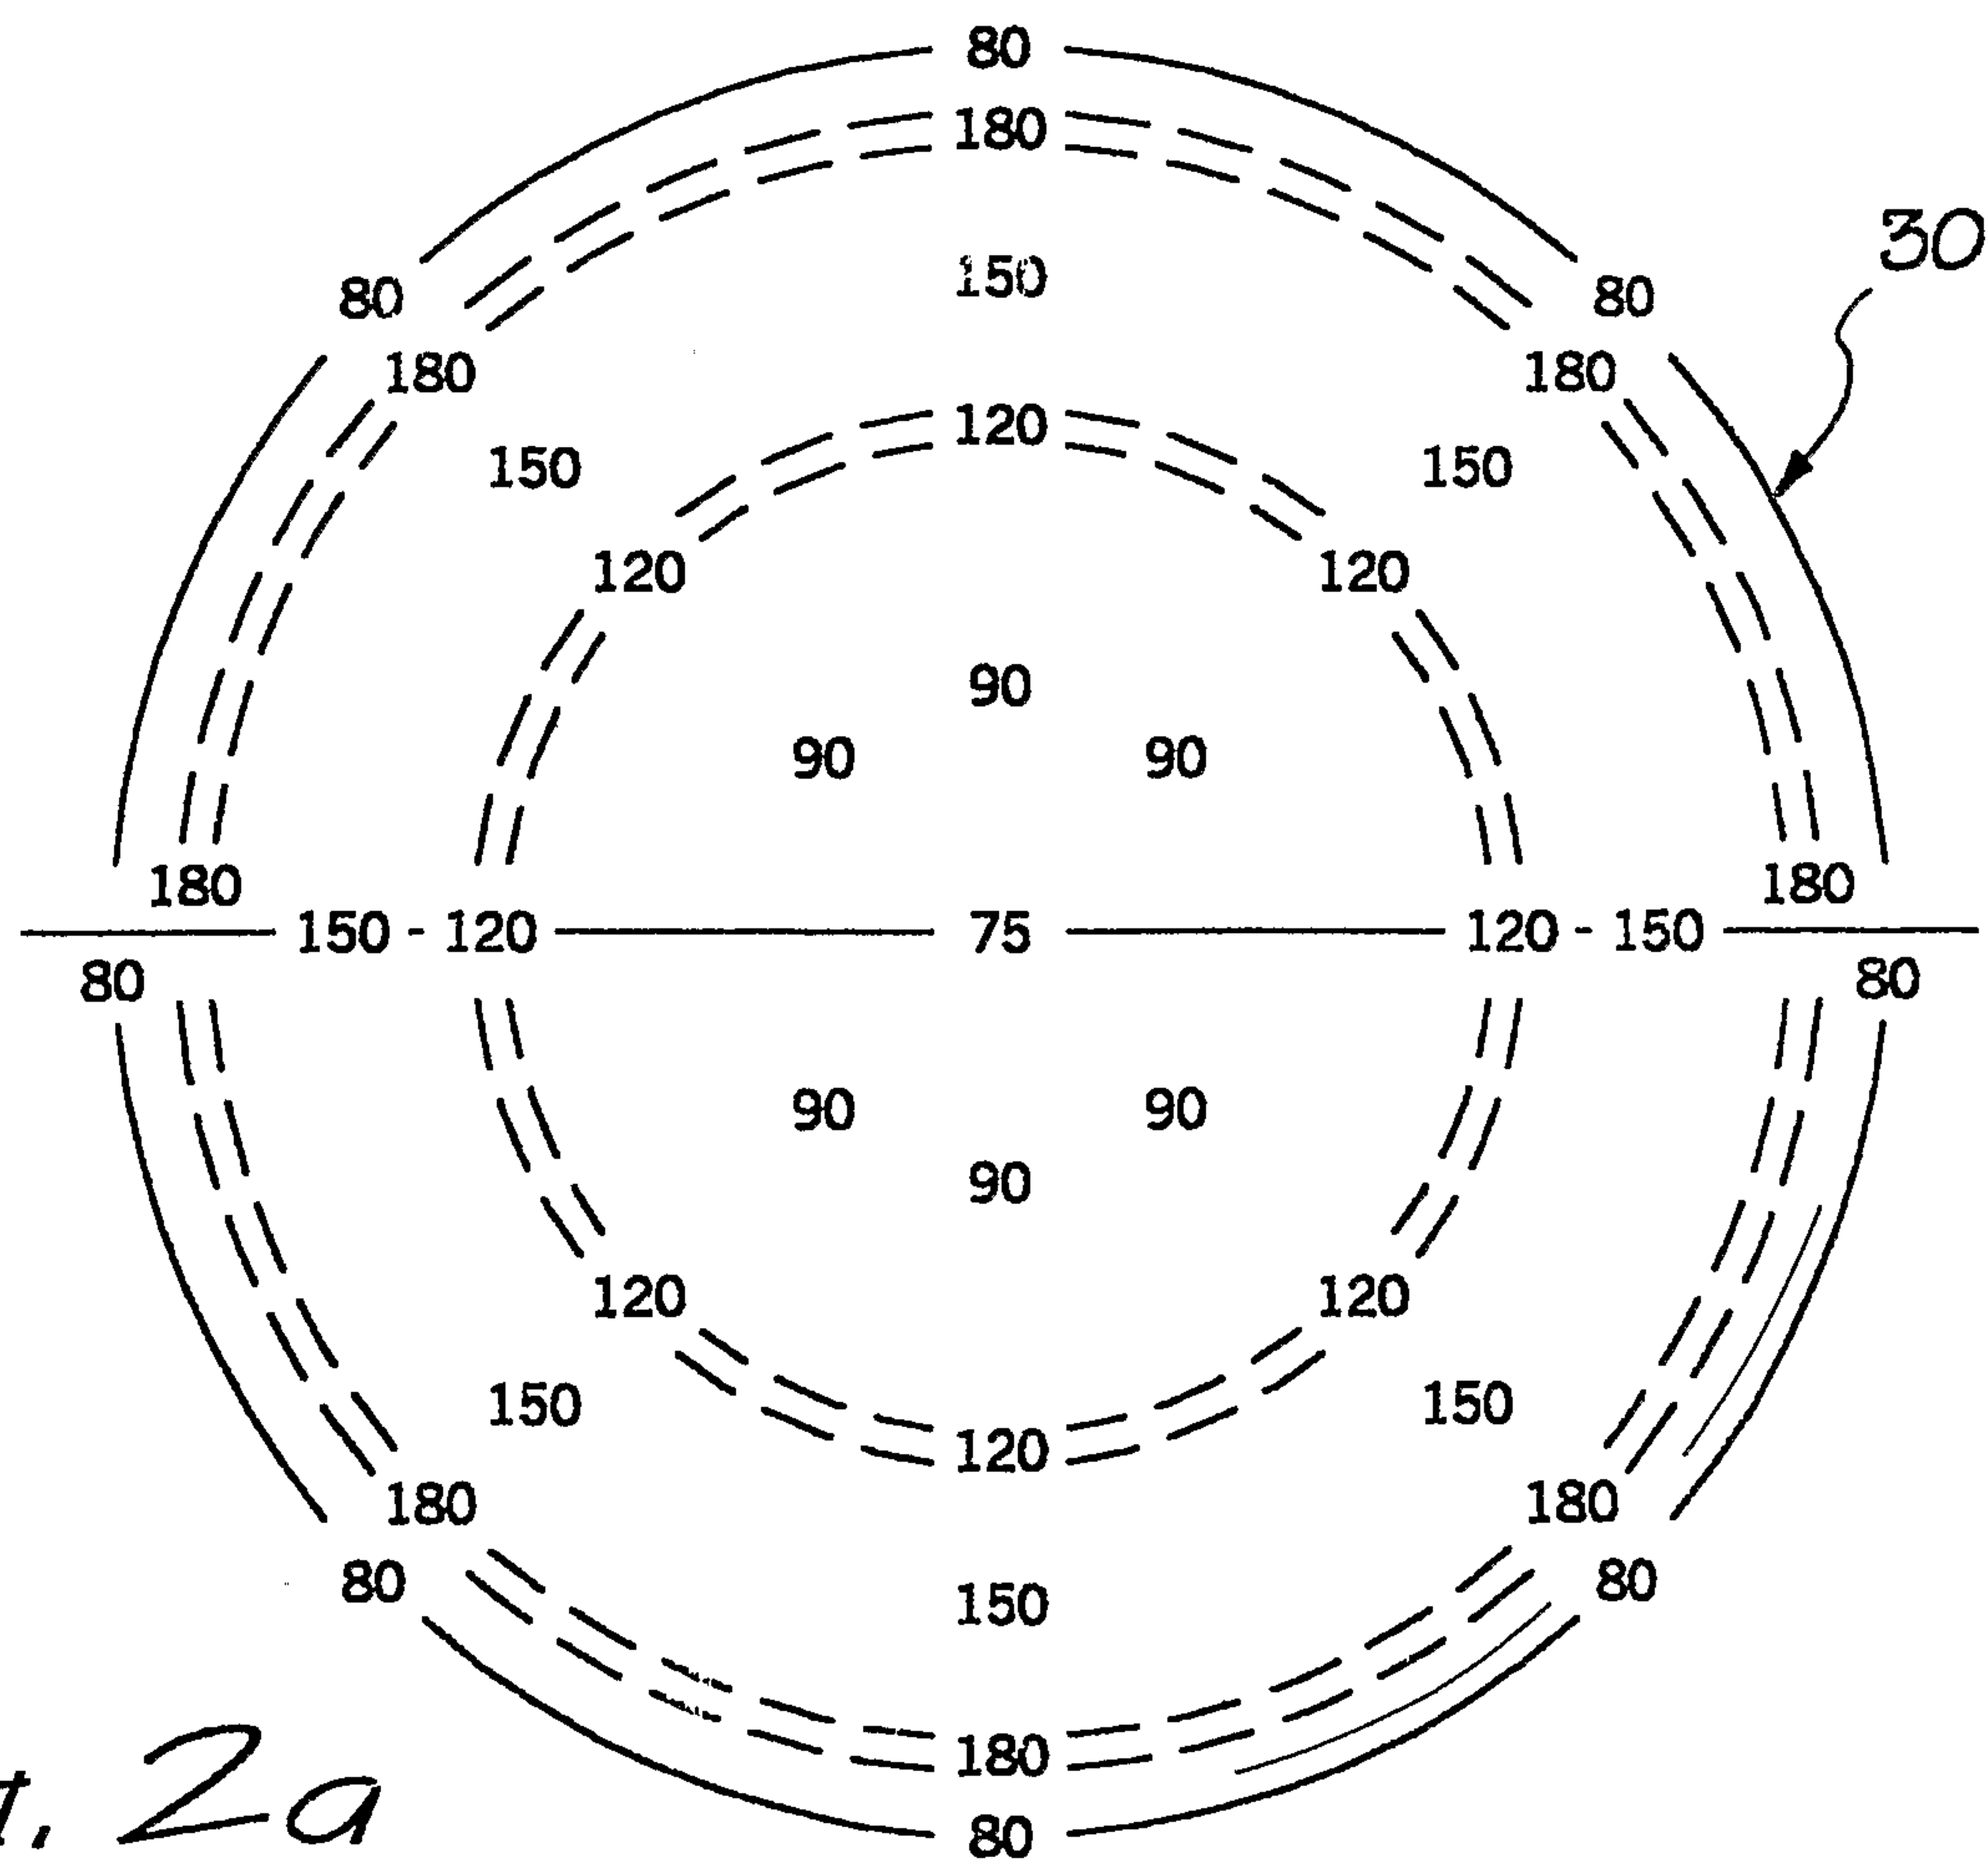
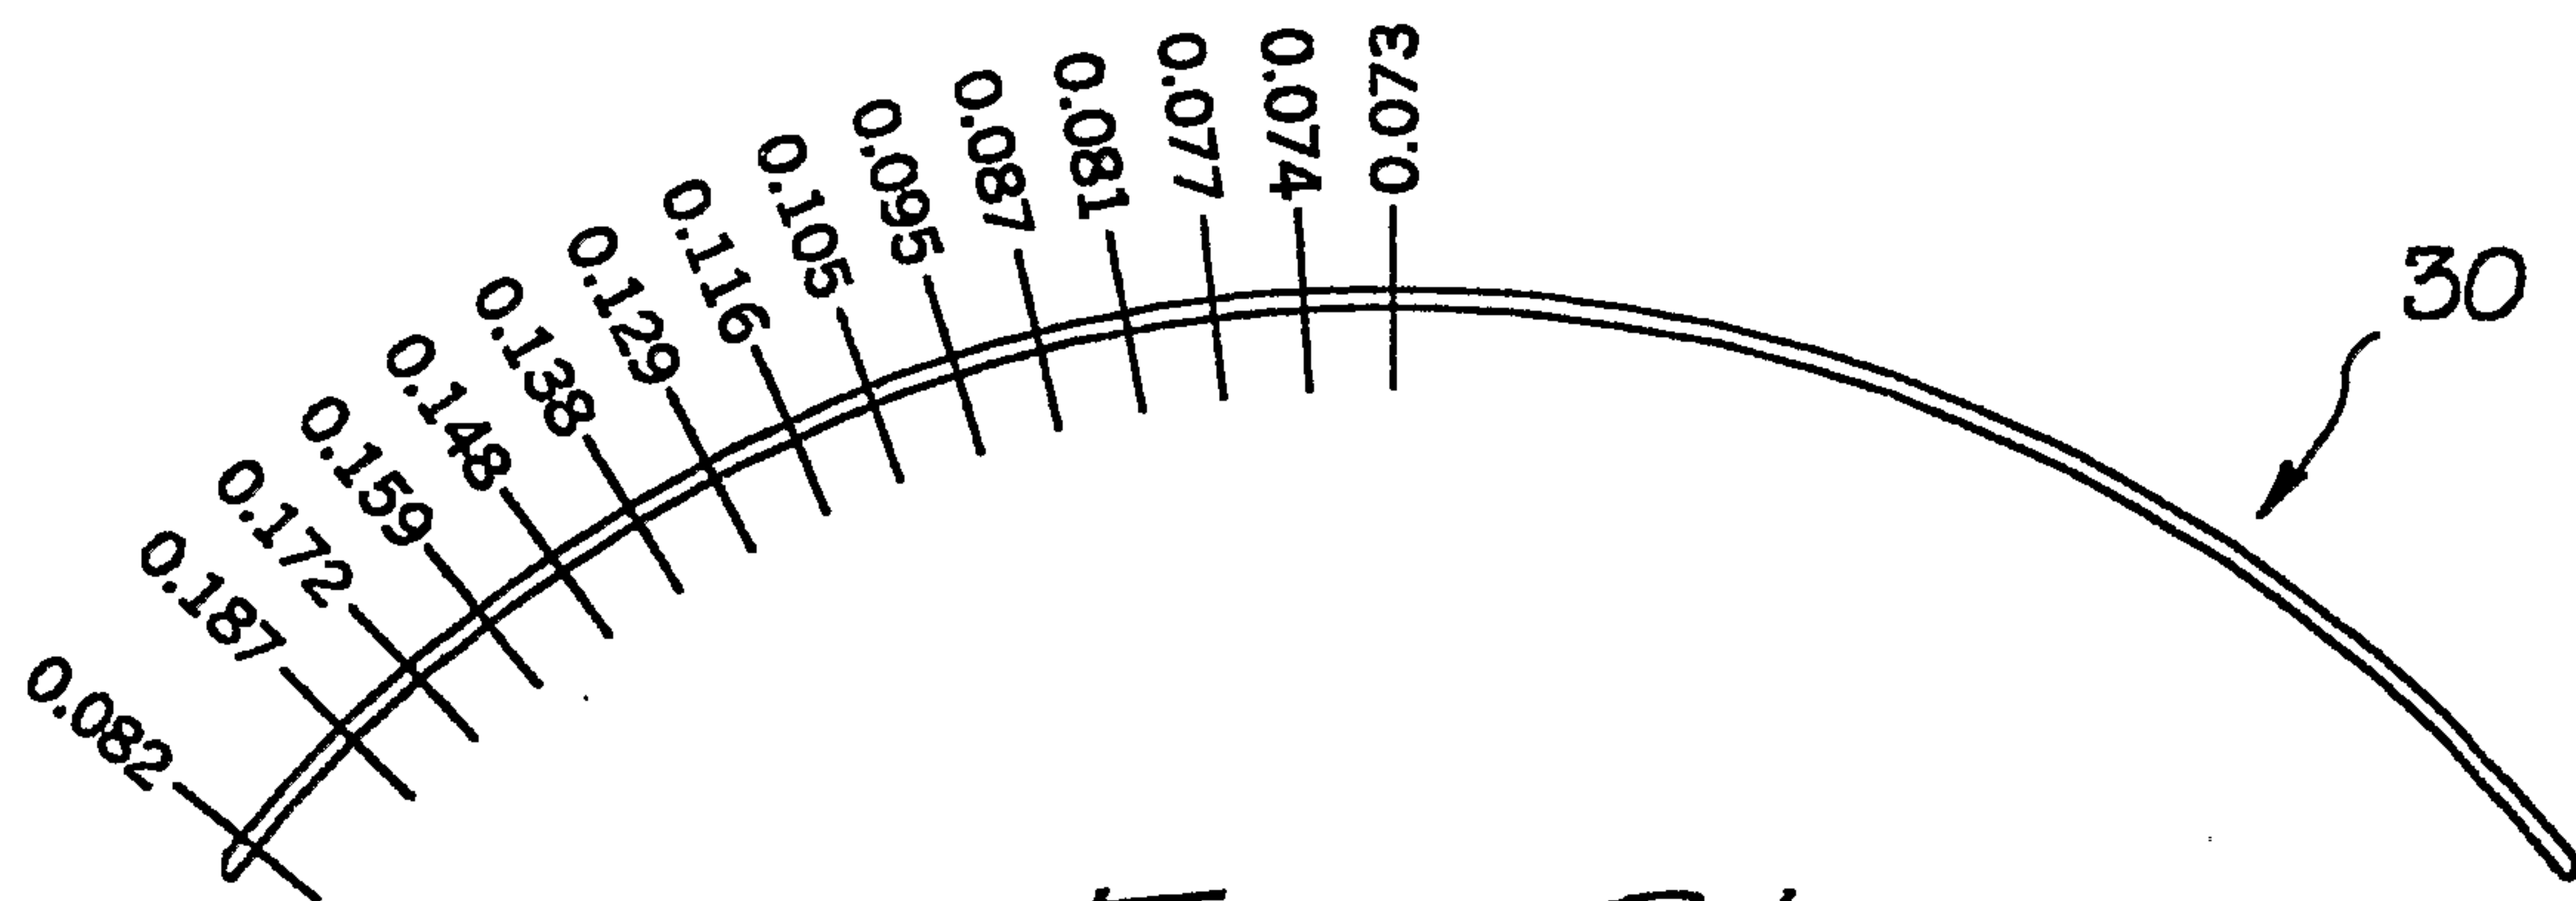
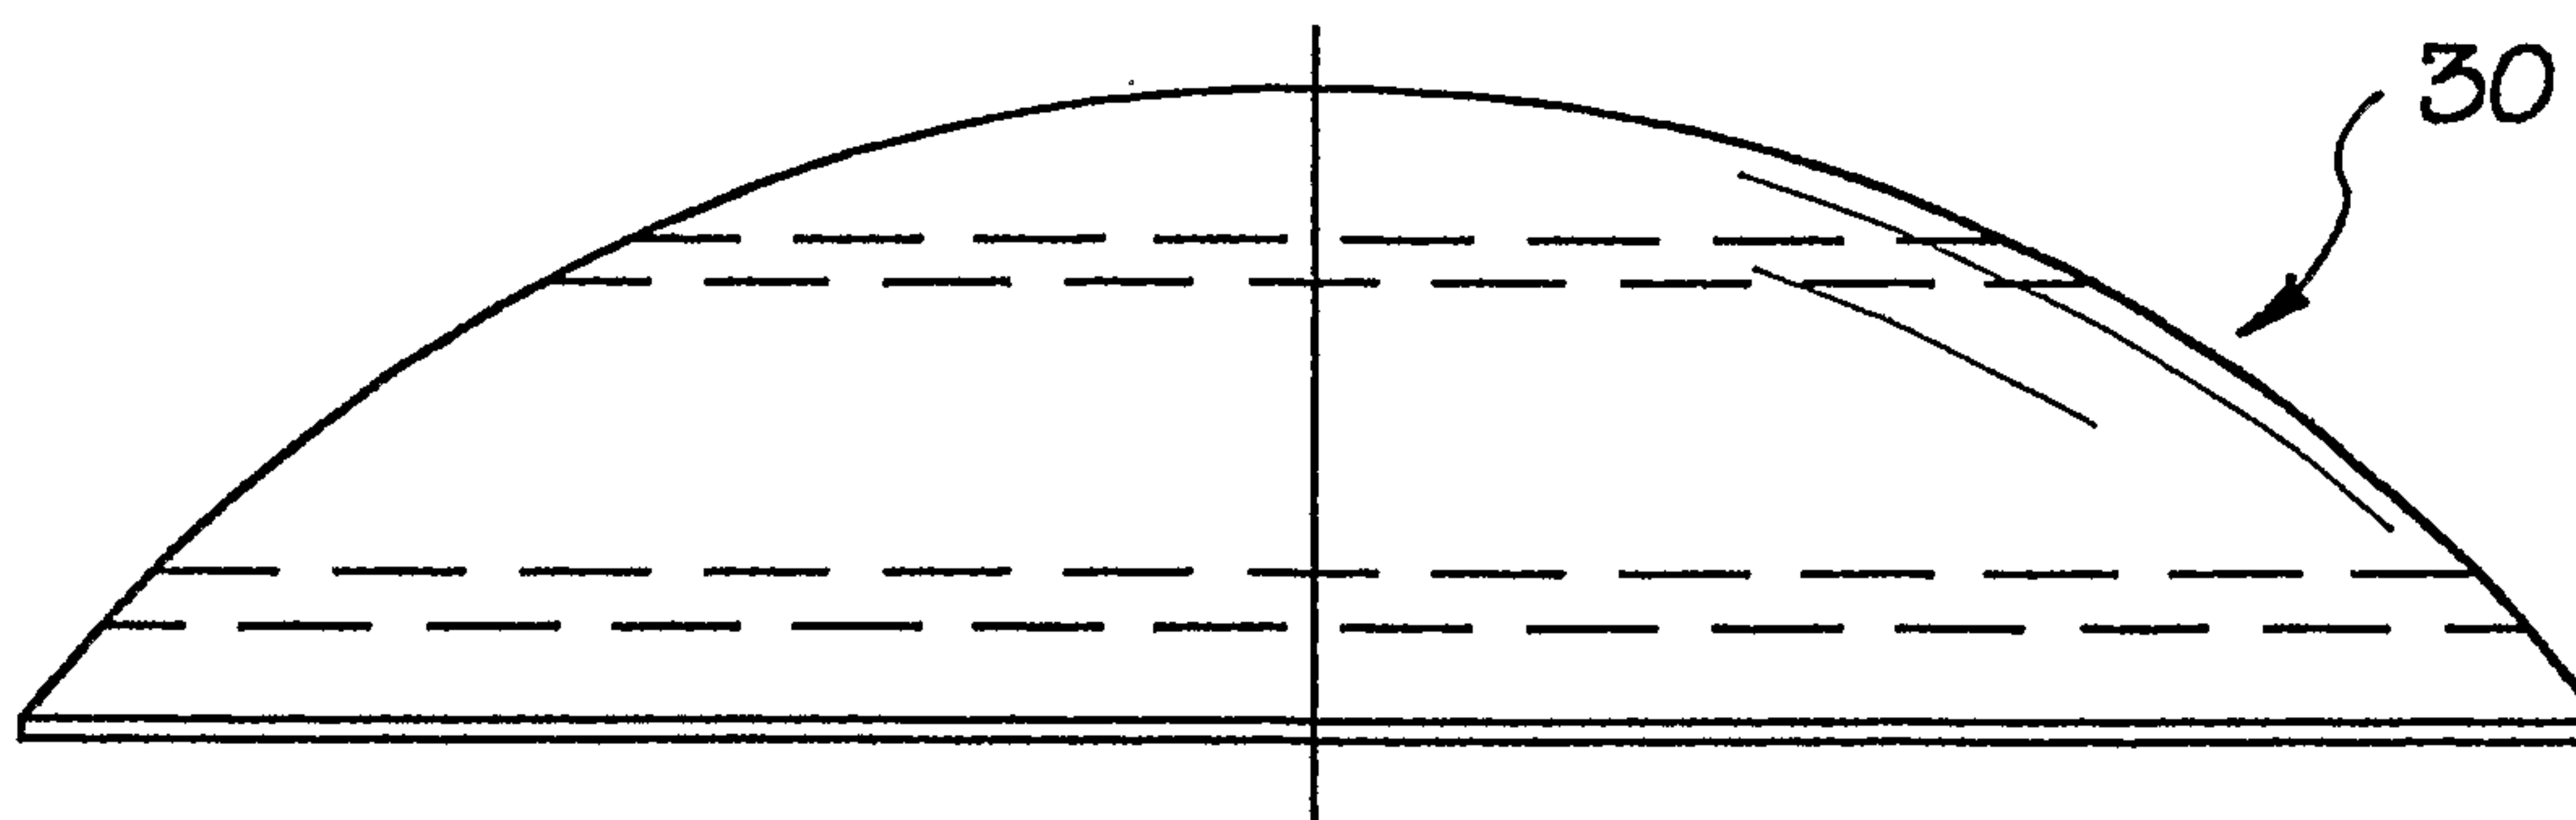
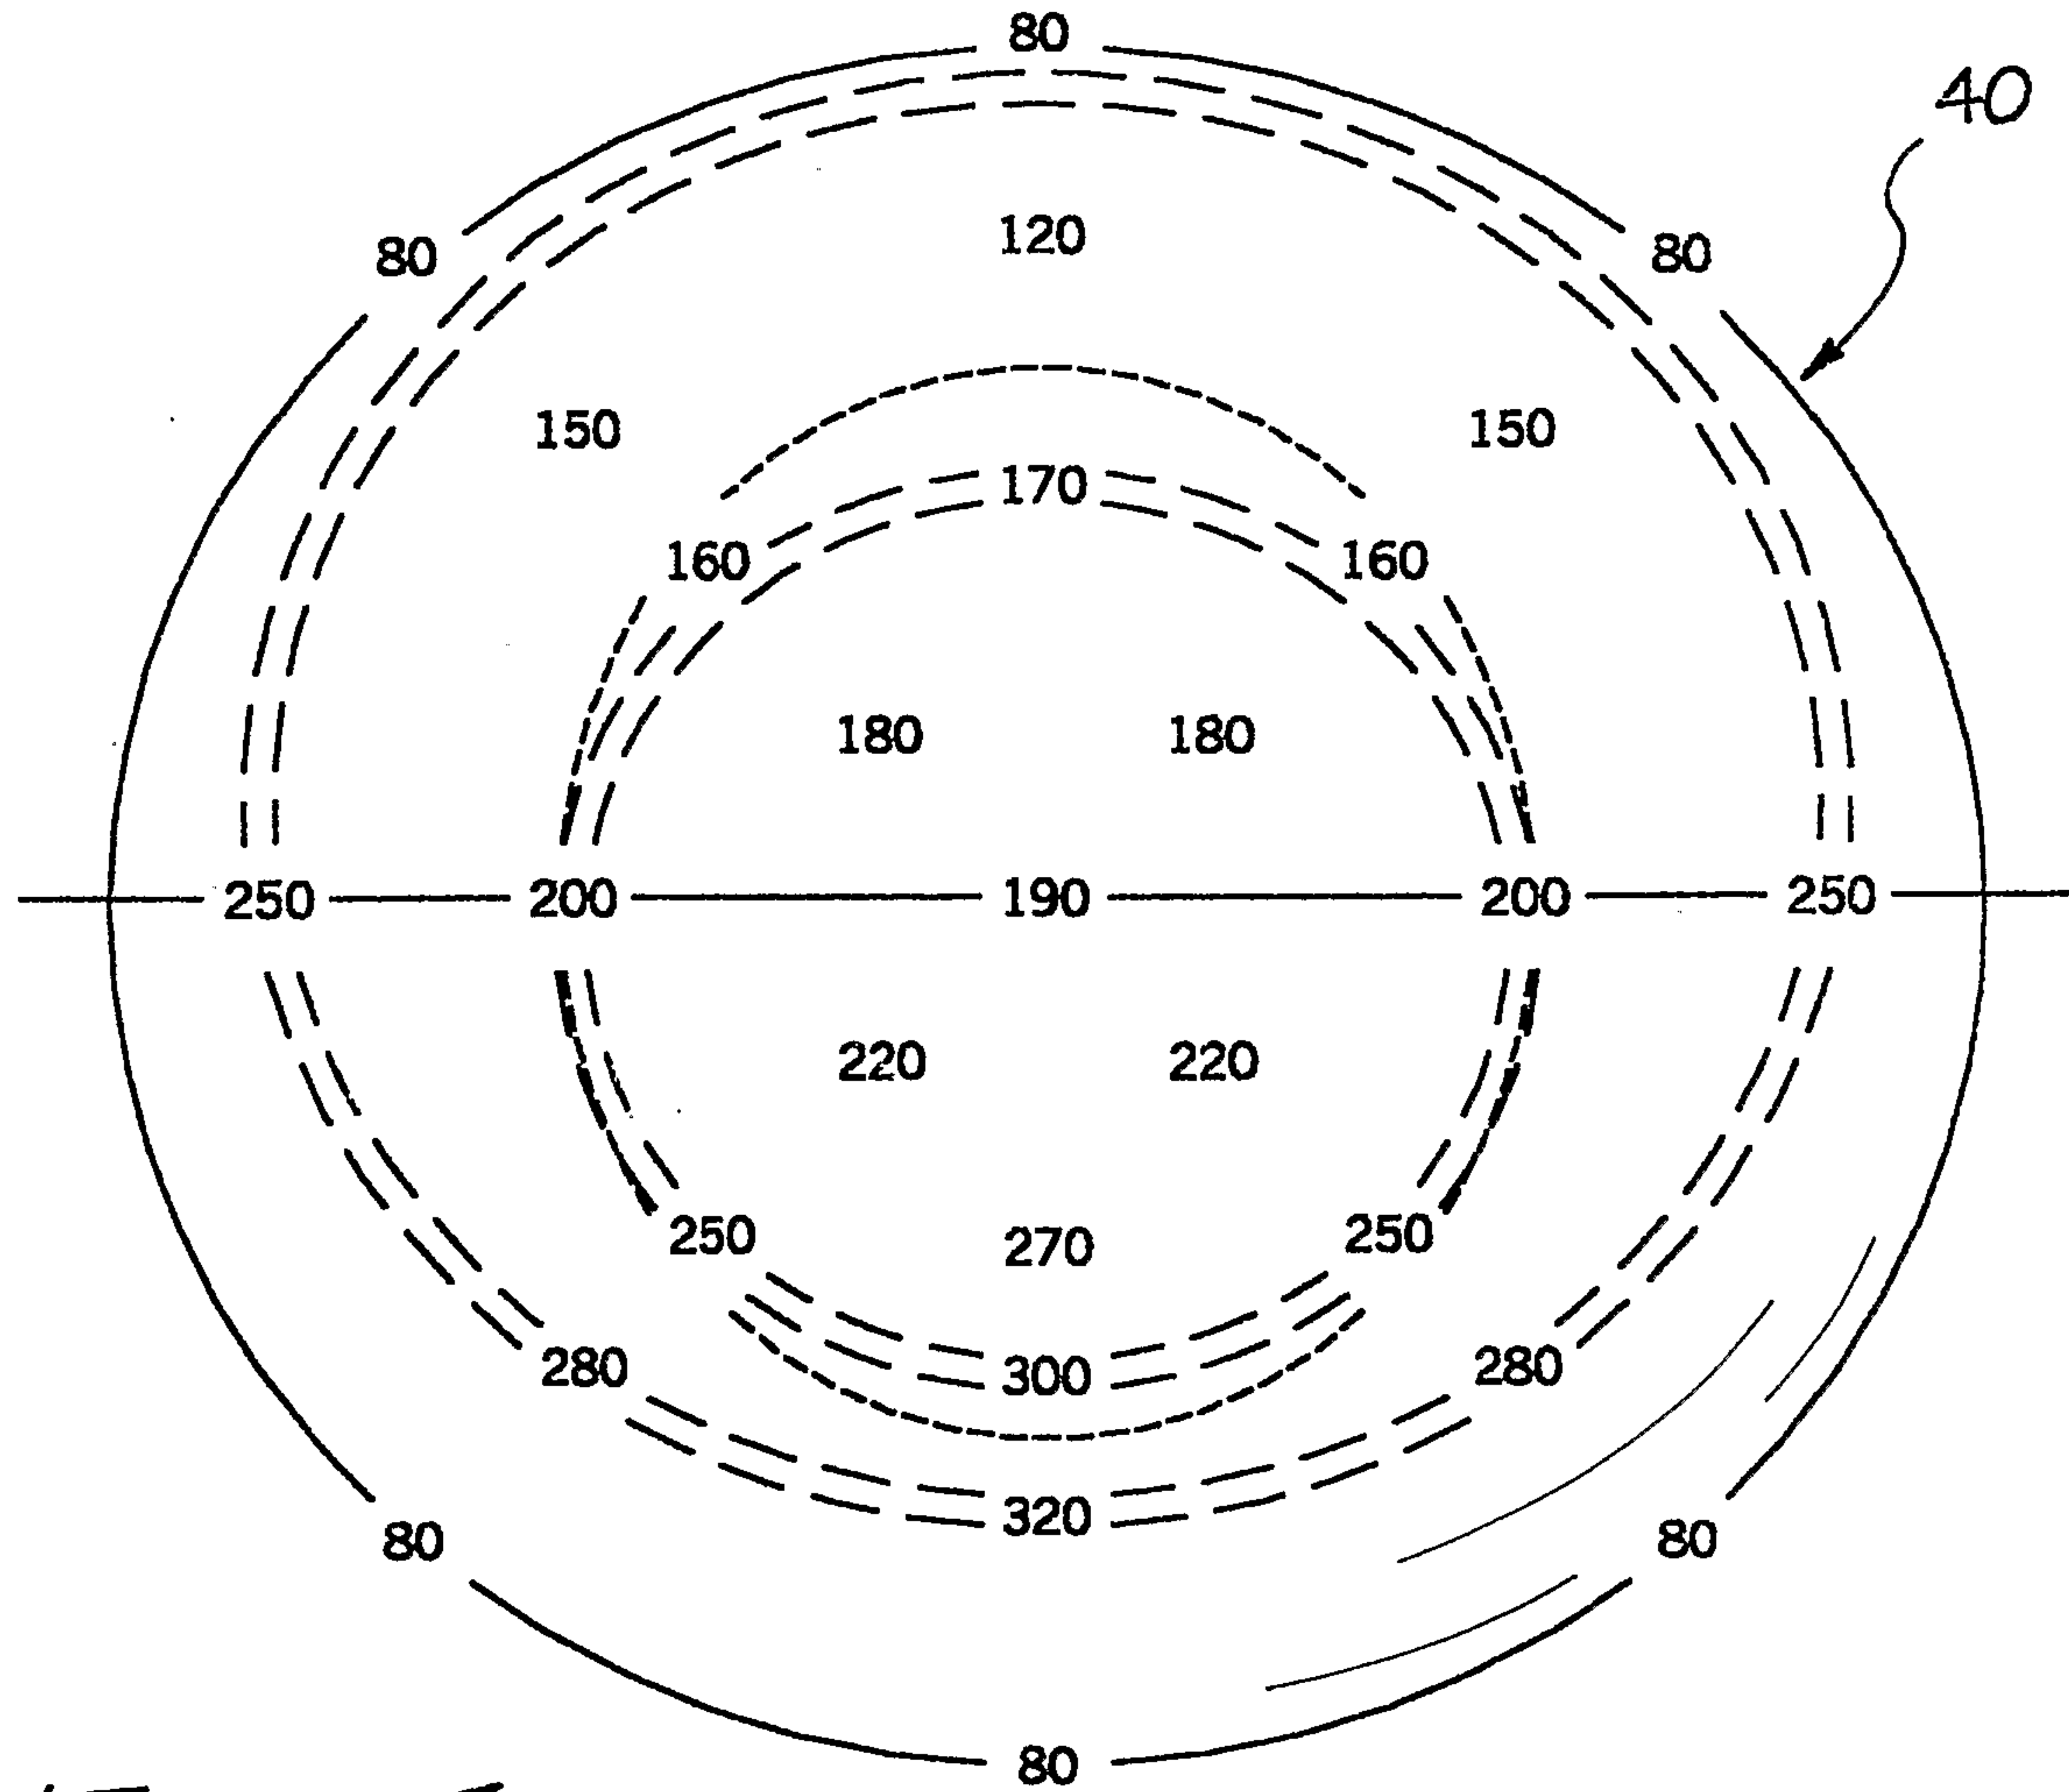
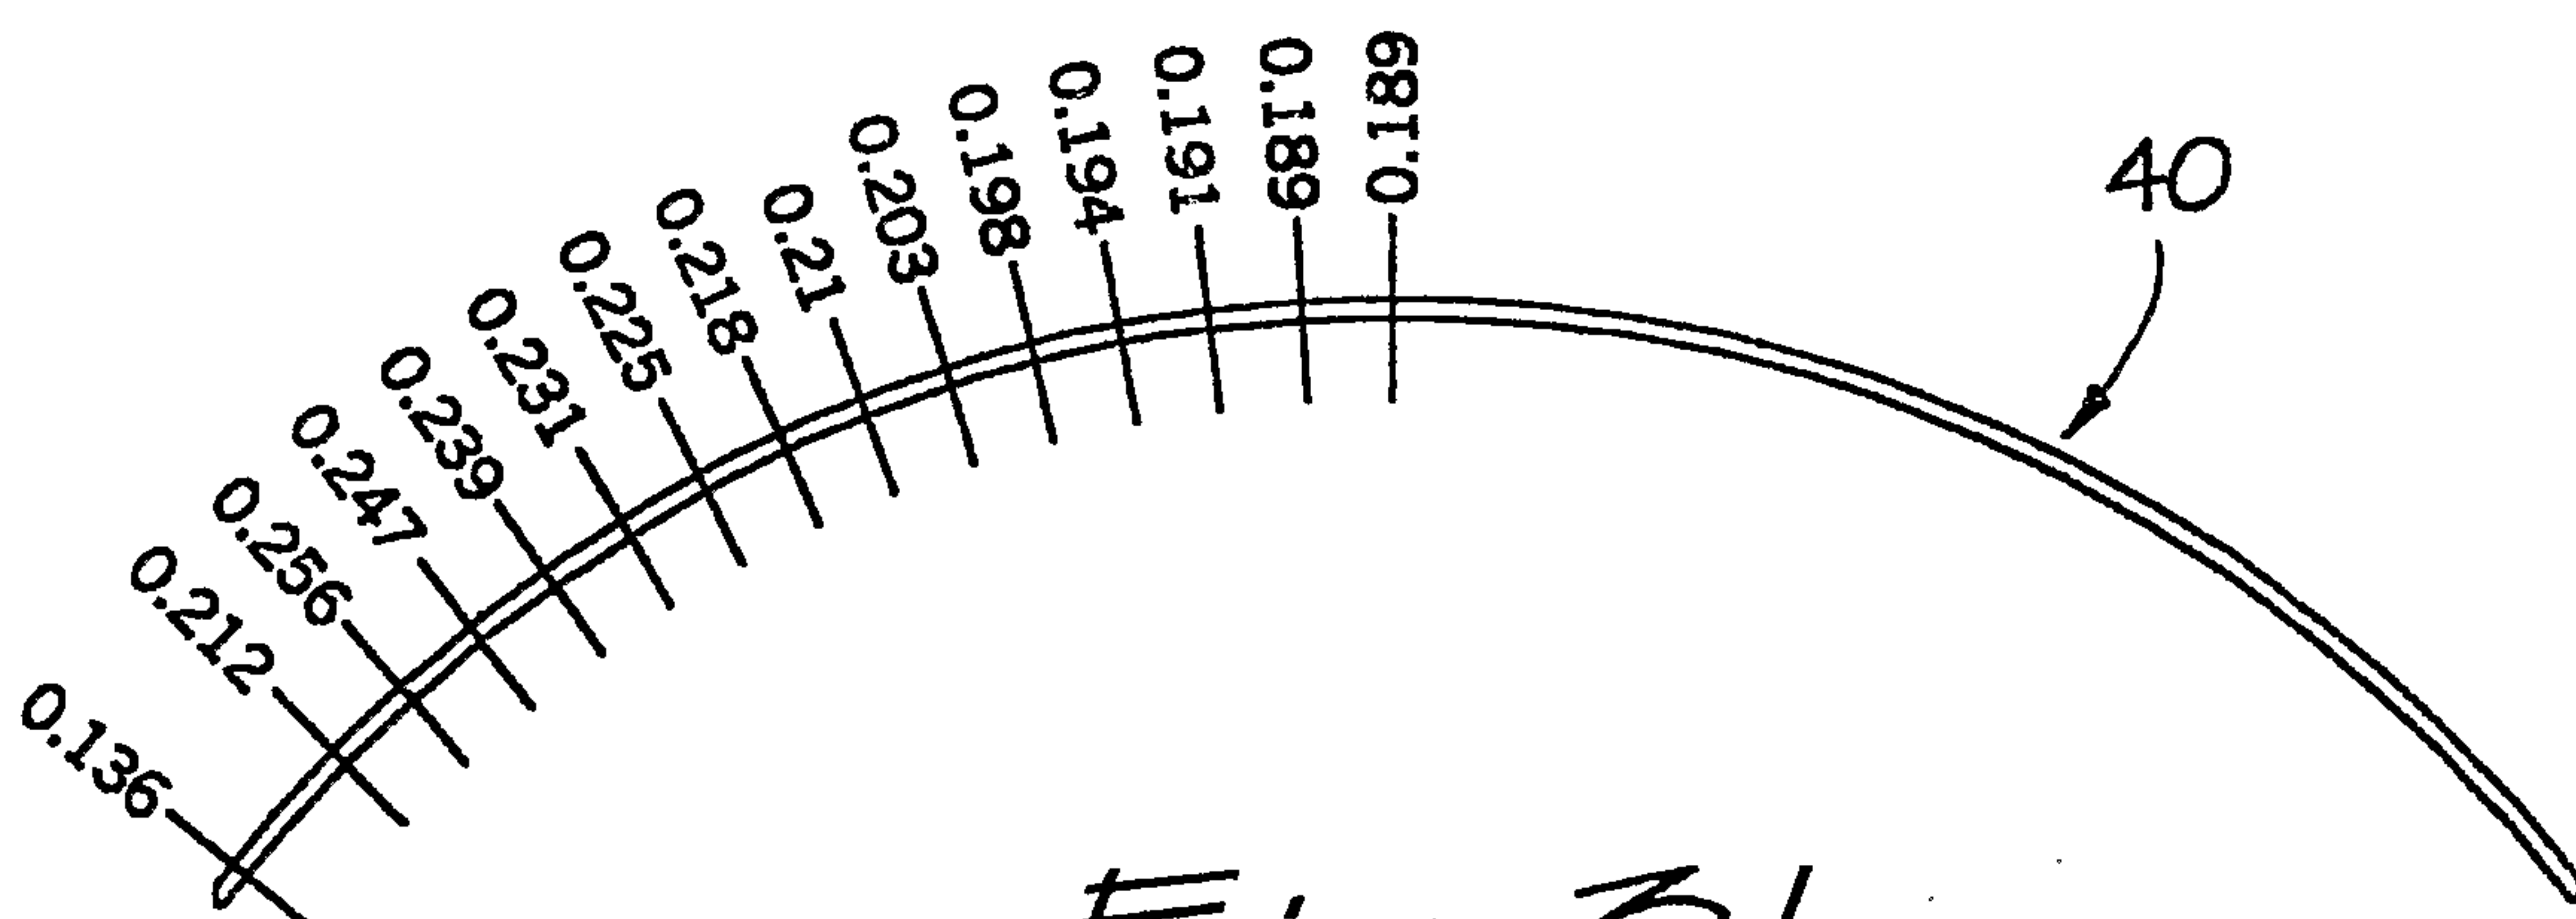


Fig. 2a

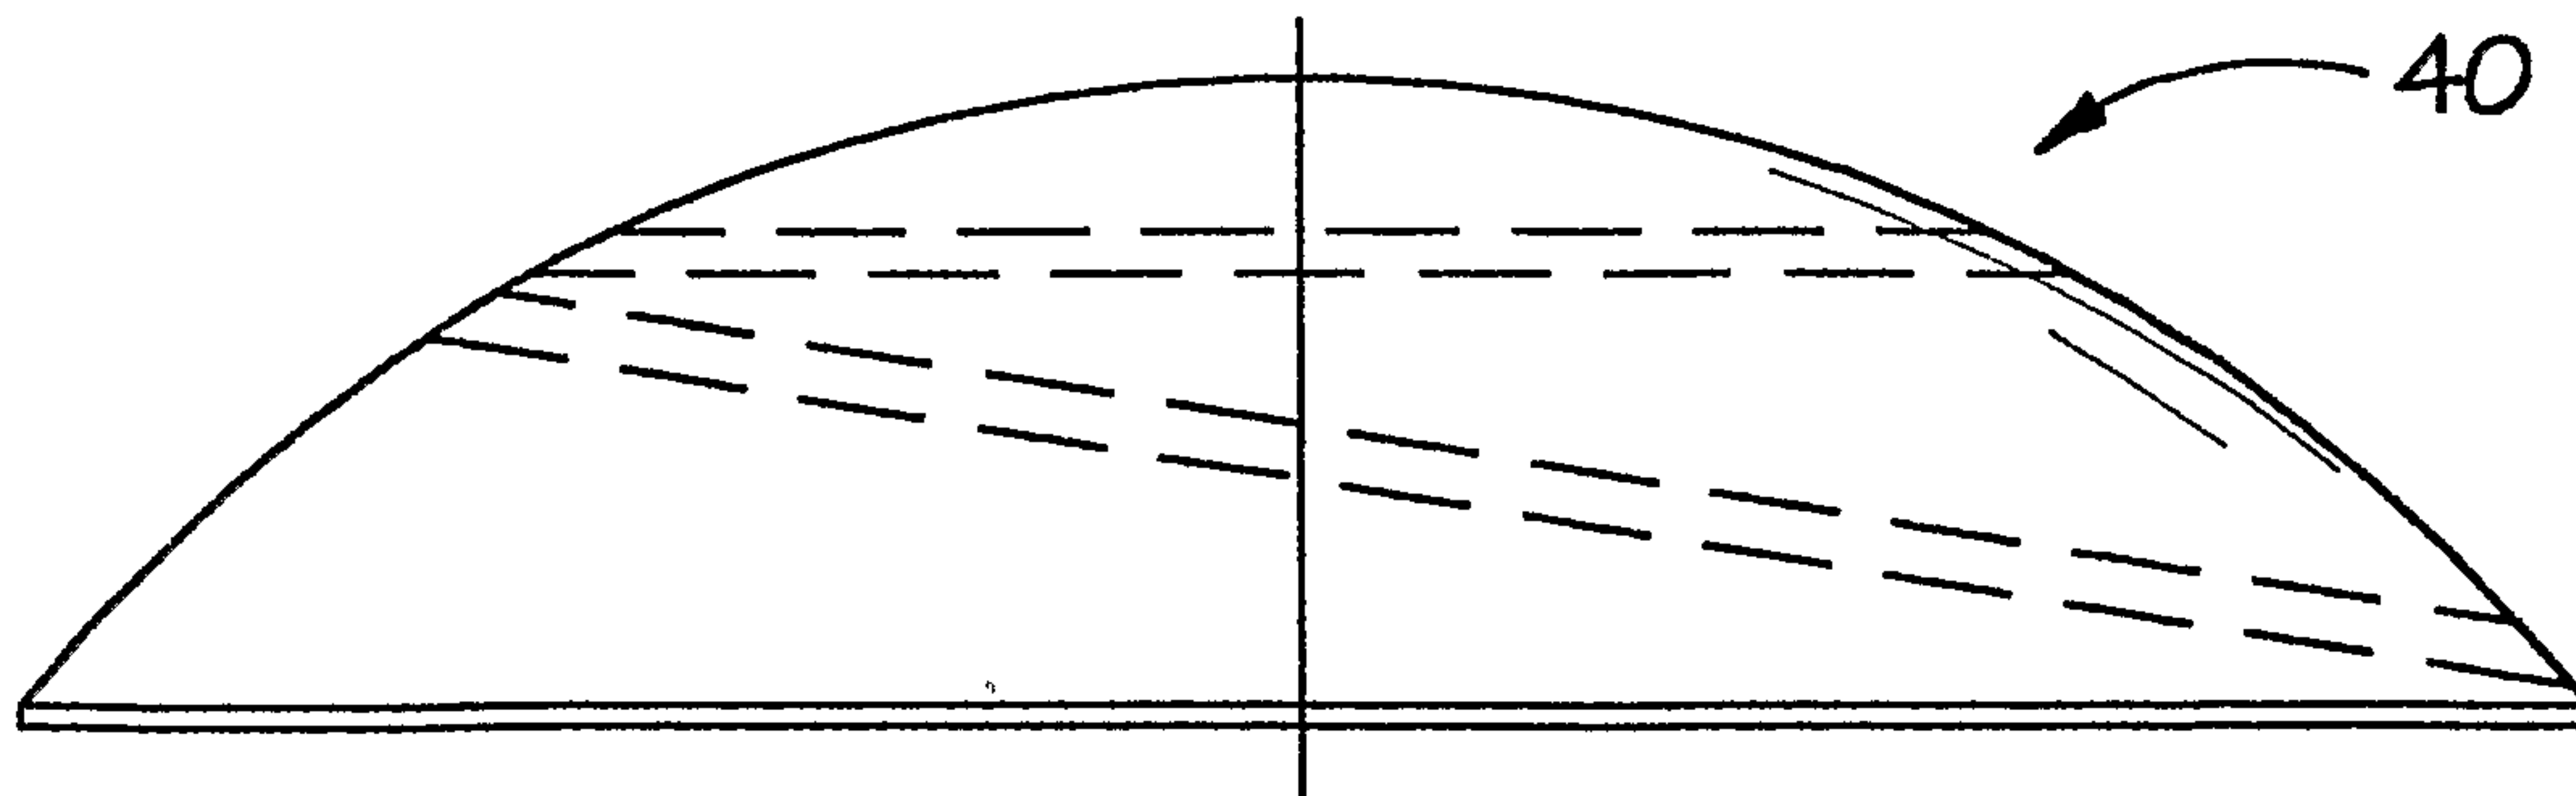
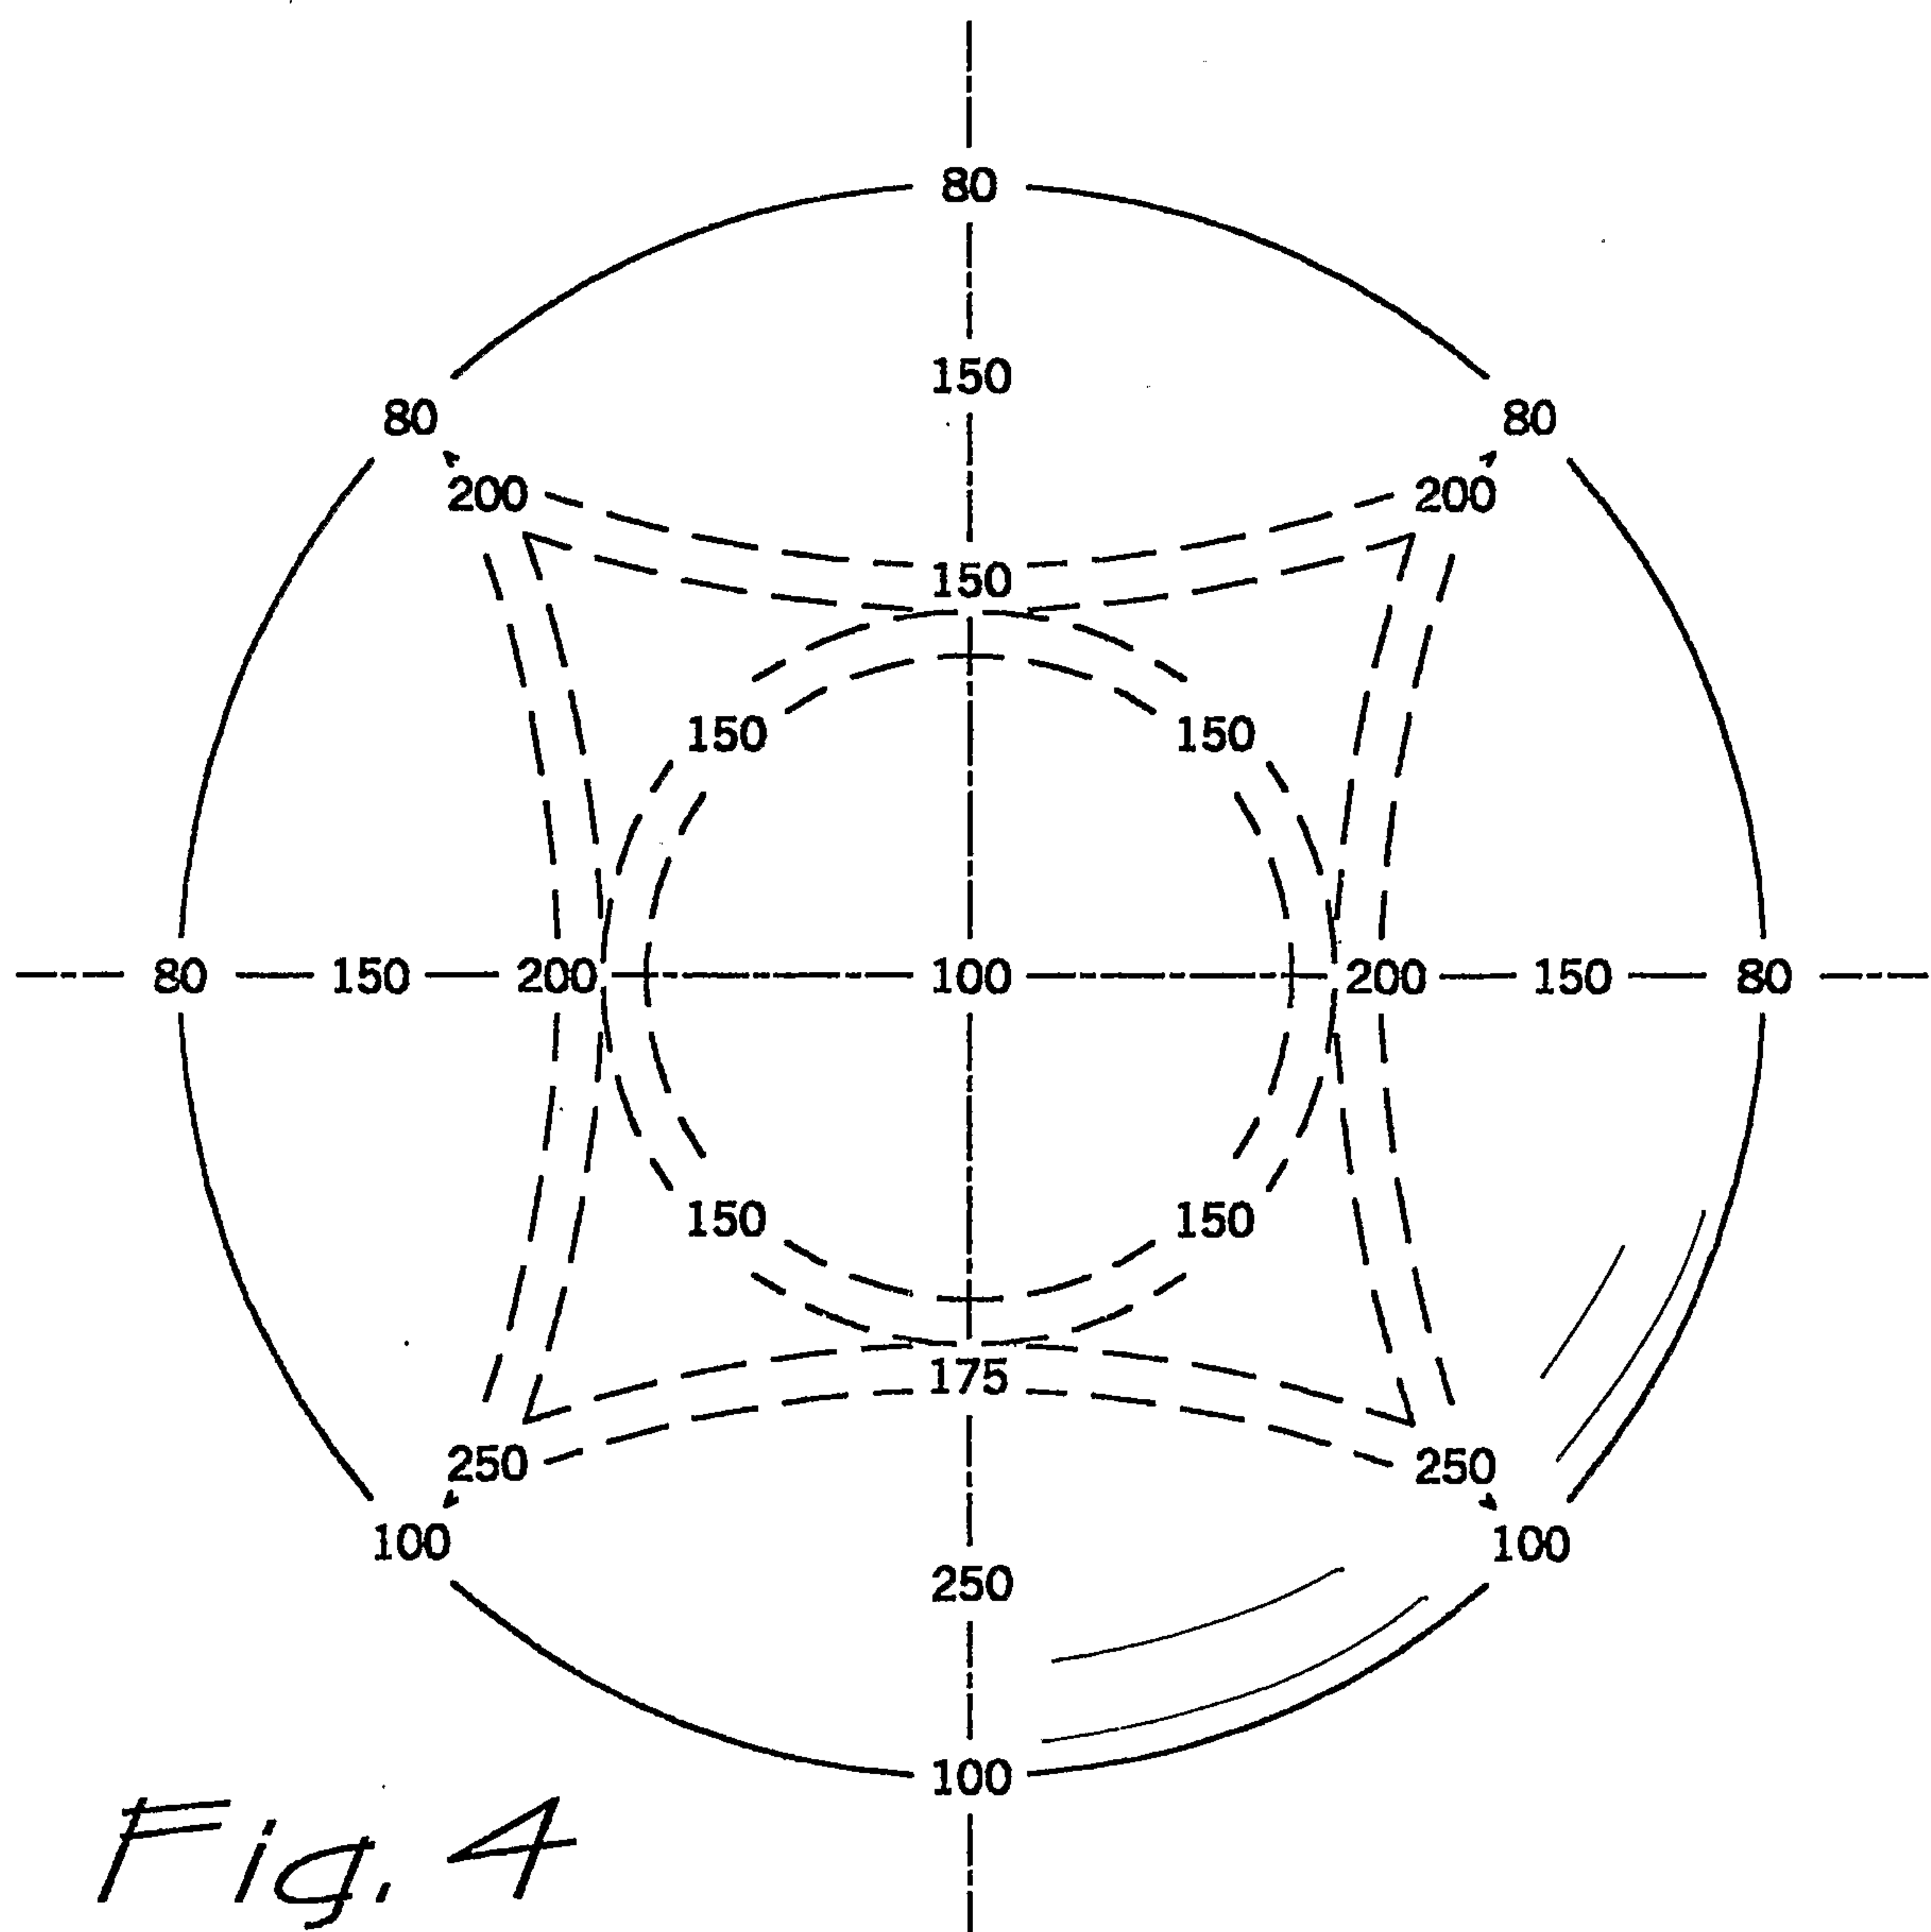
2/7

*Fig. 2b**Fig. 2c*

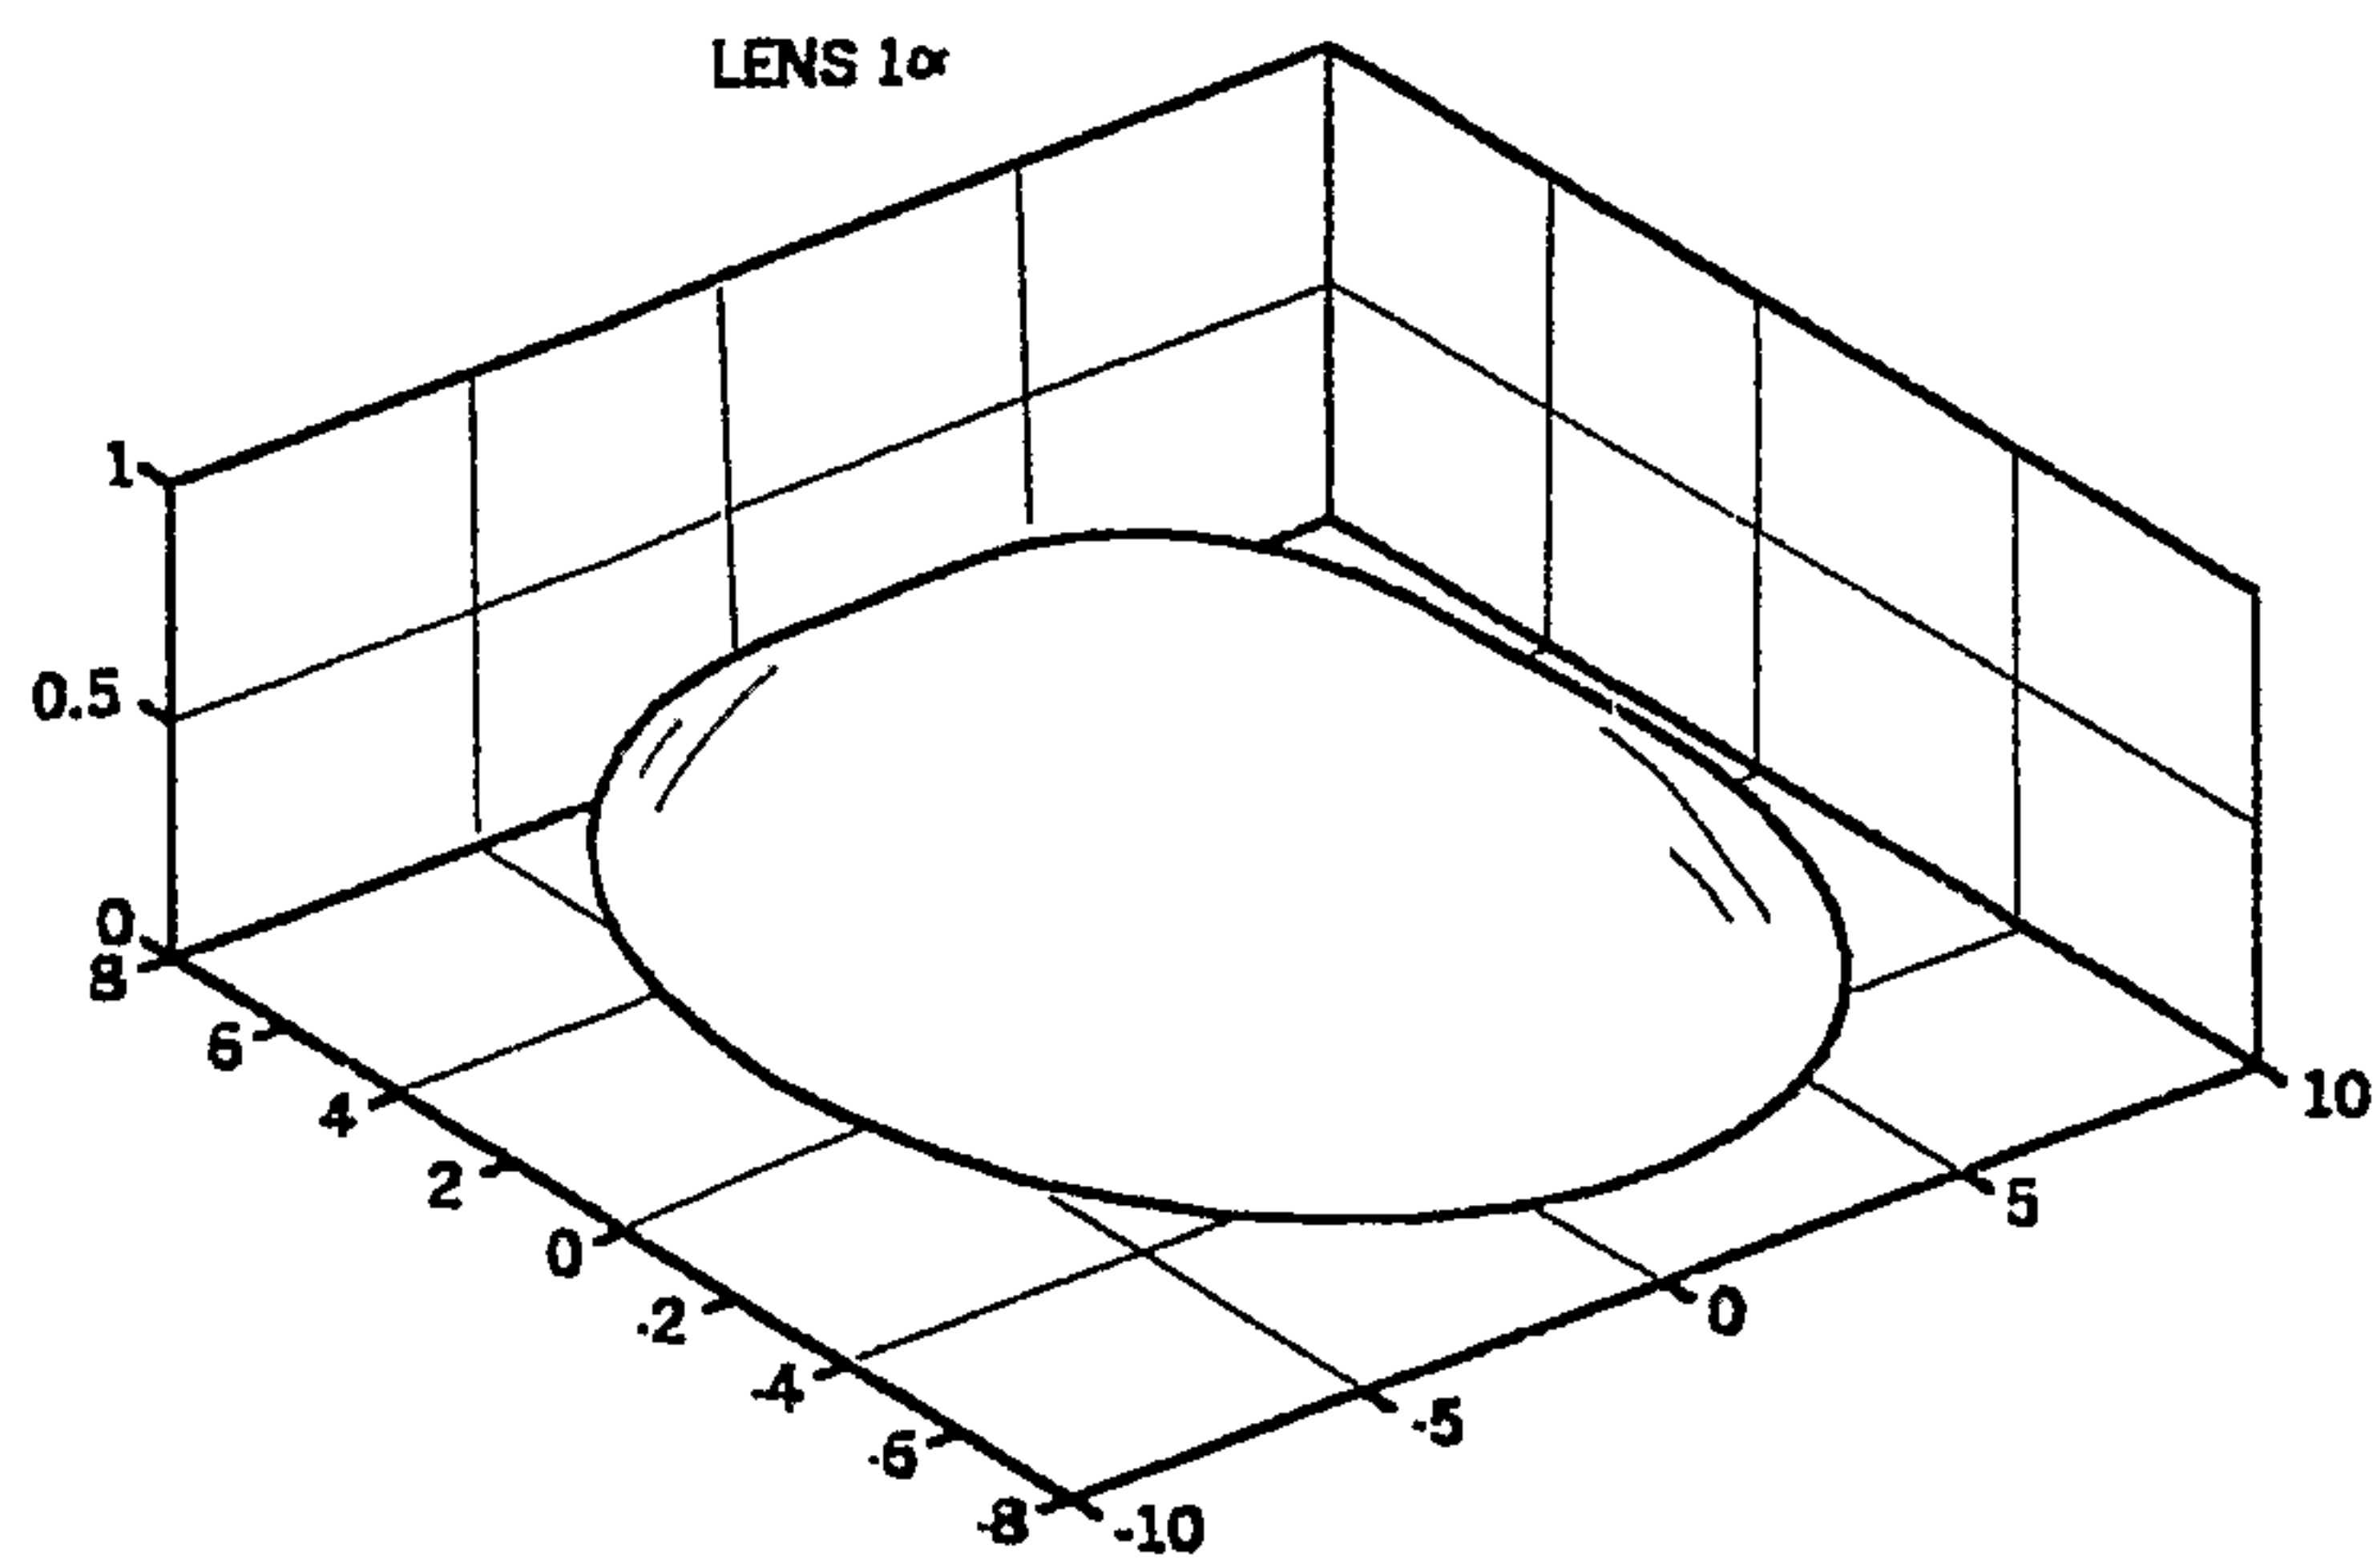
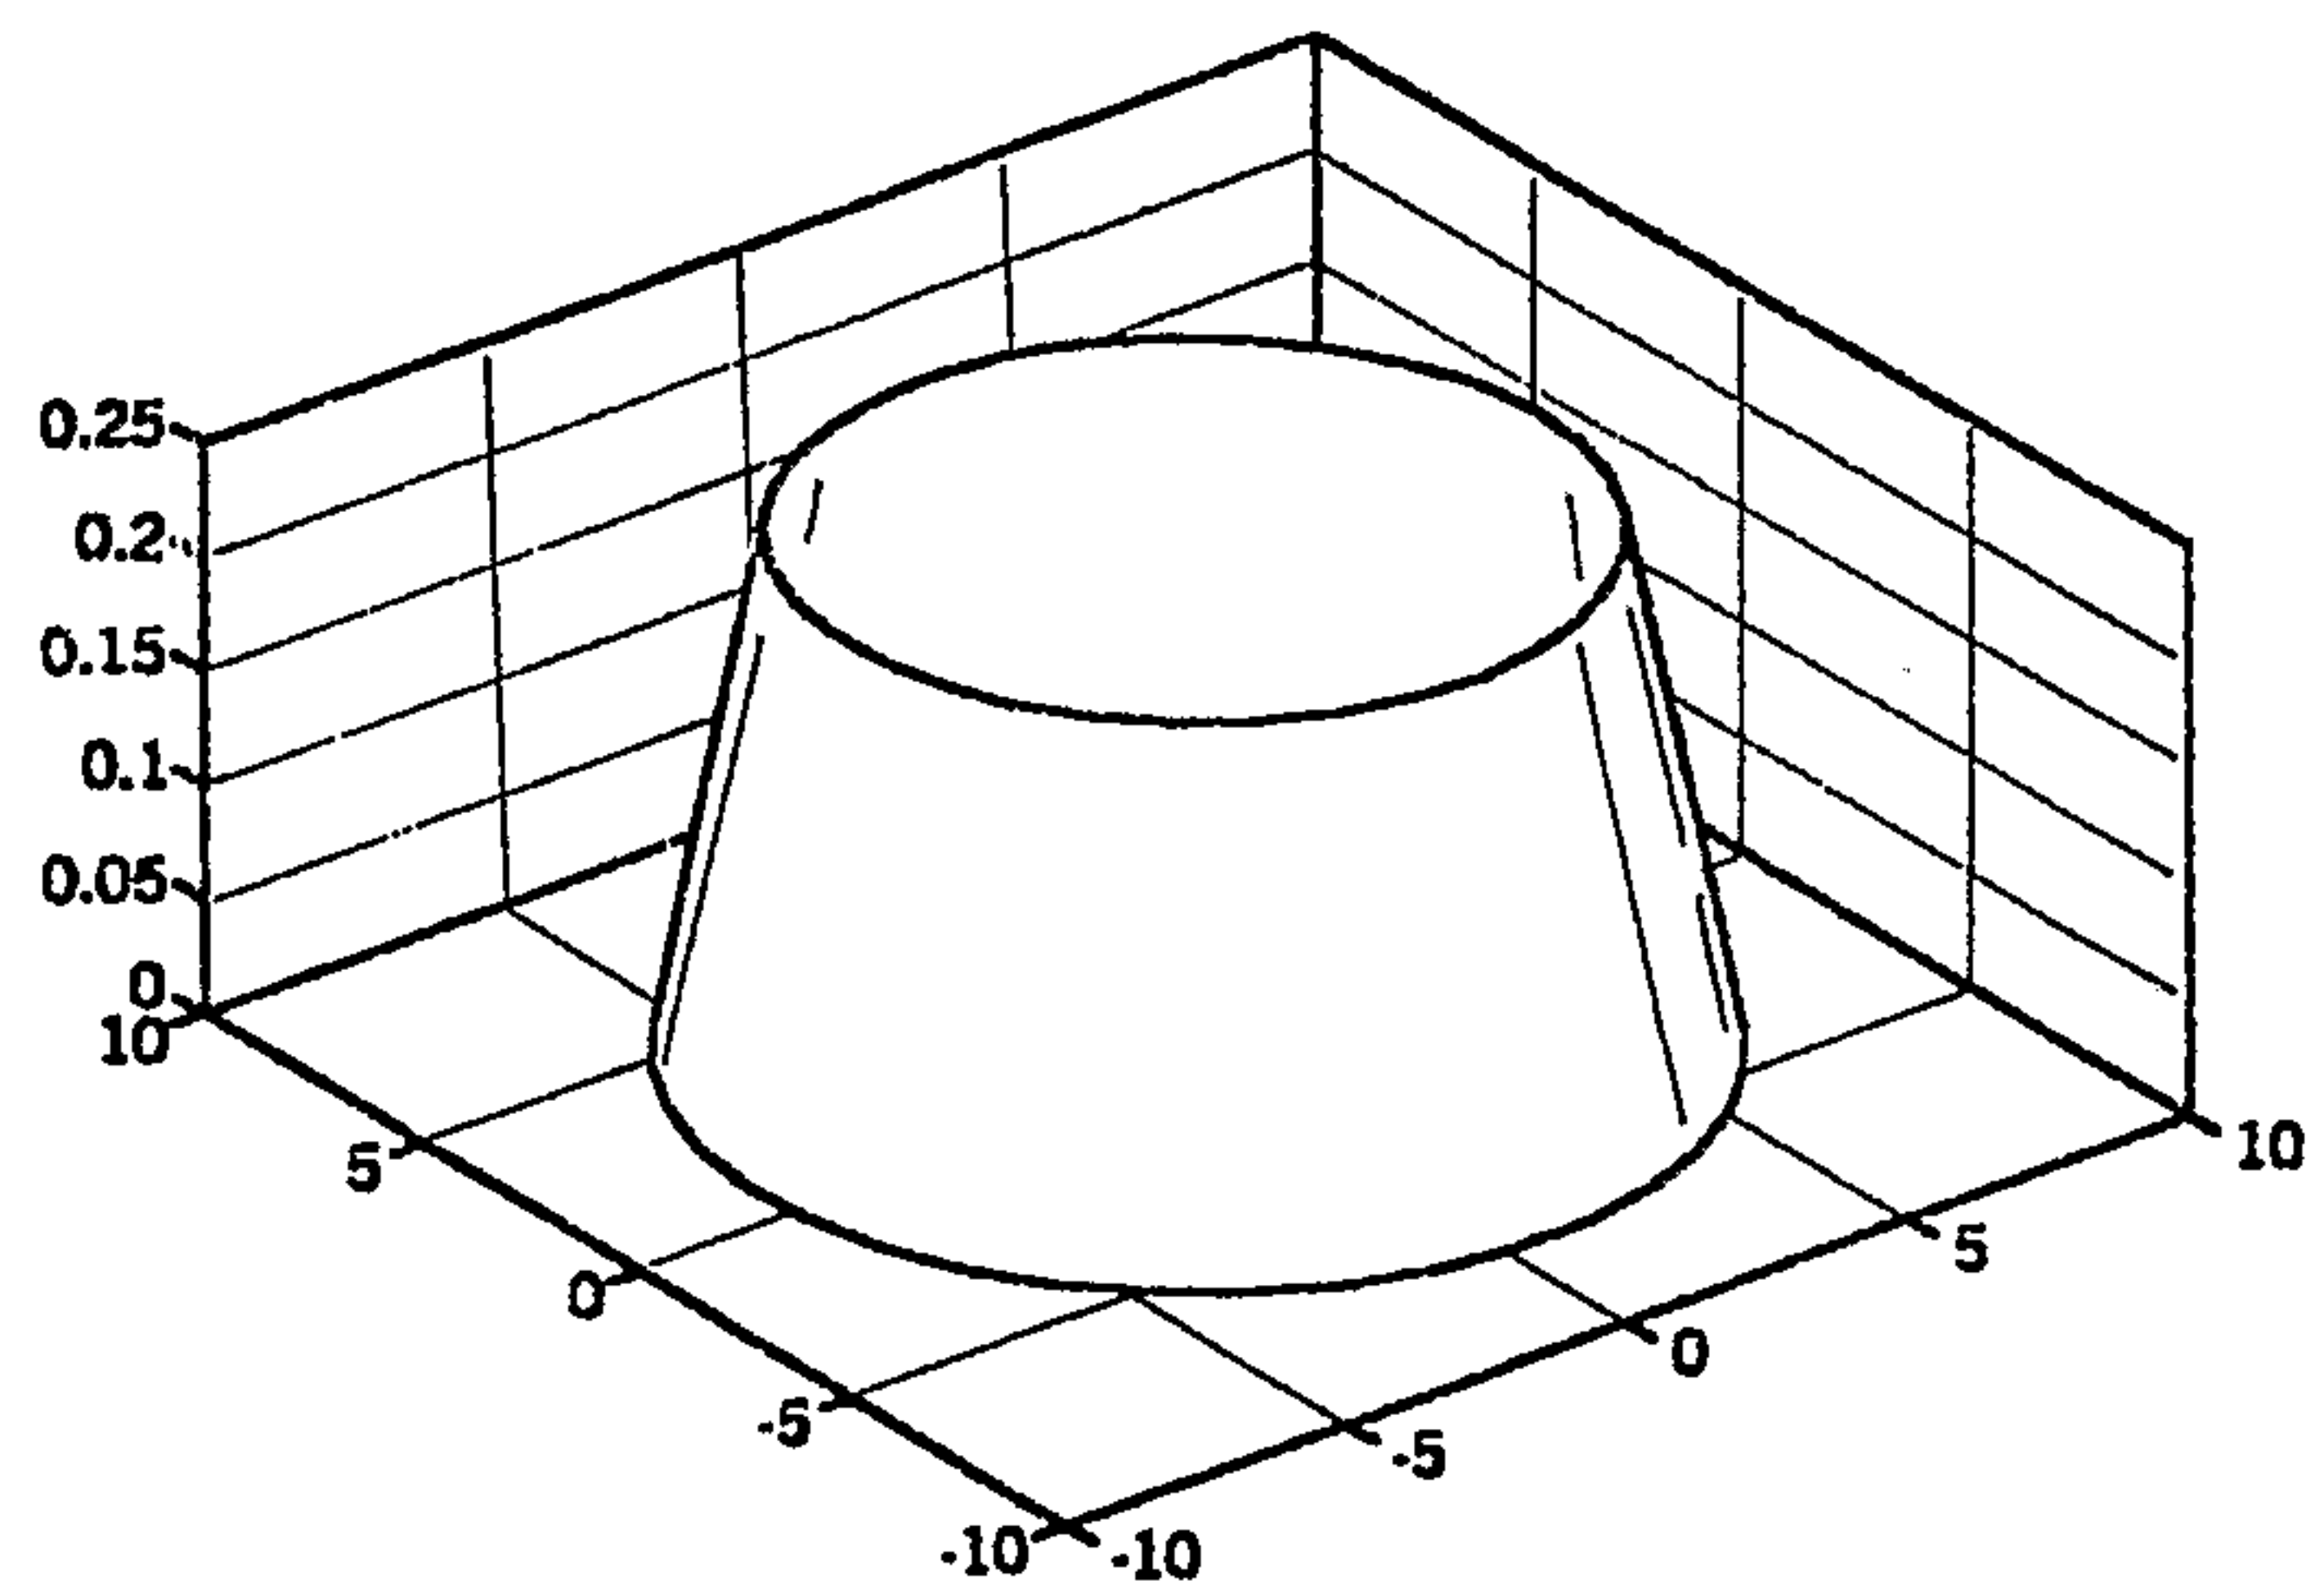
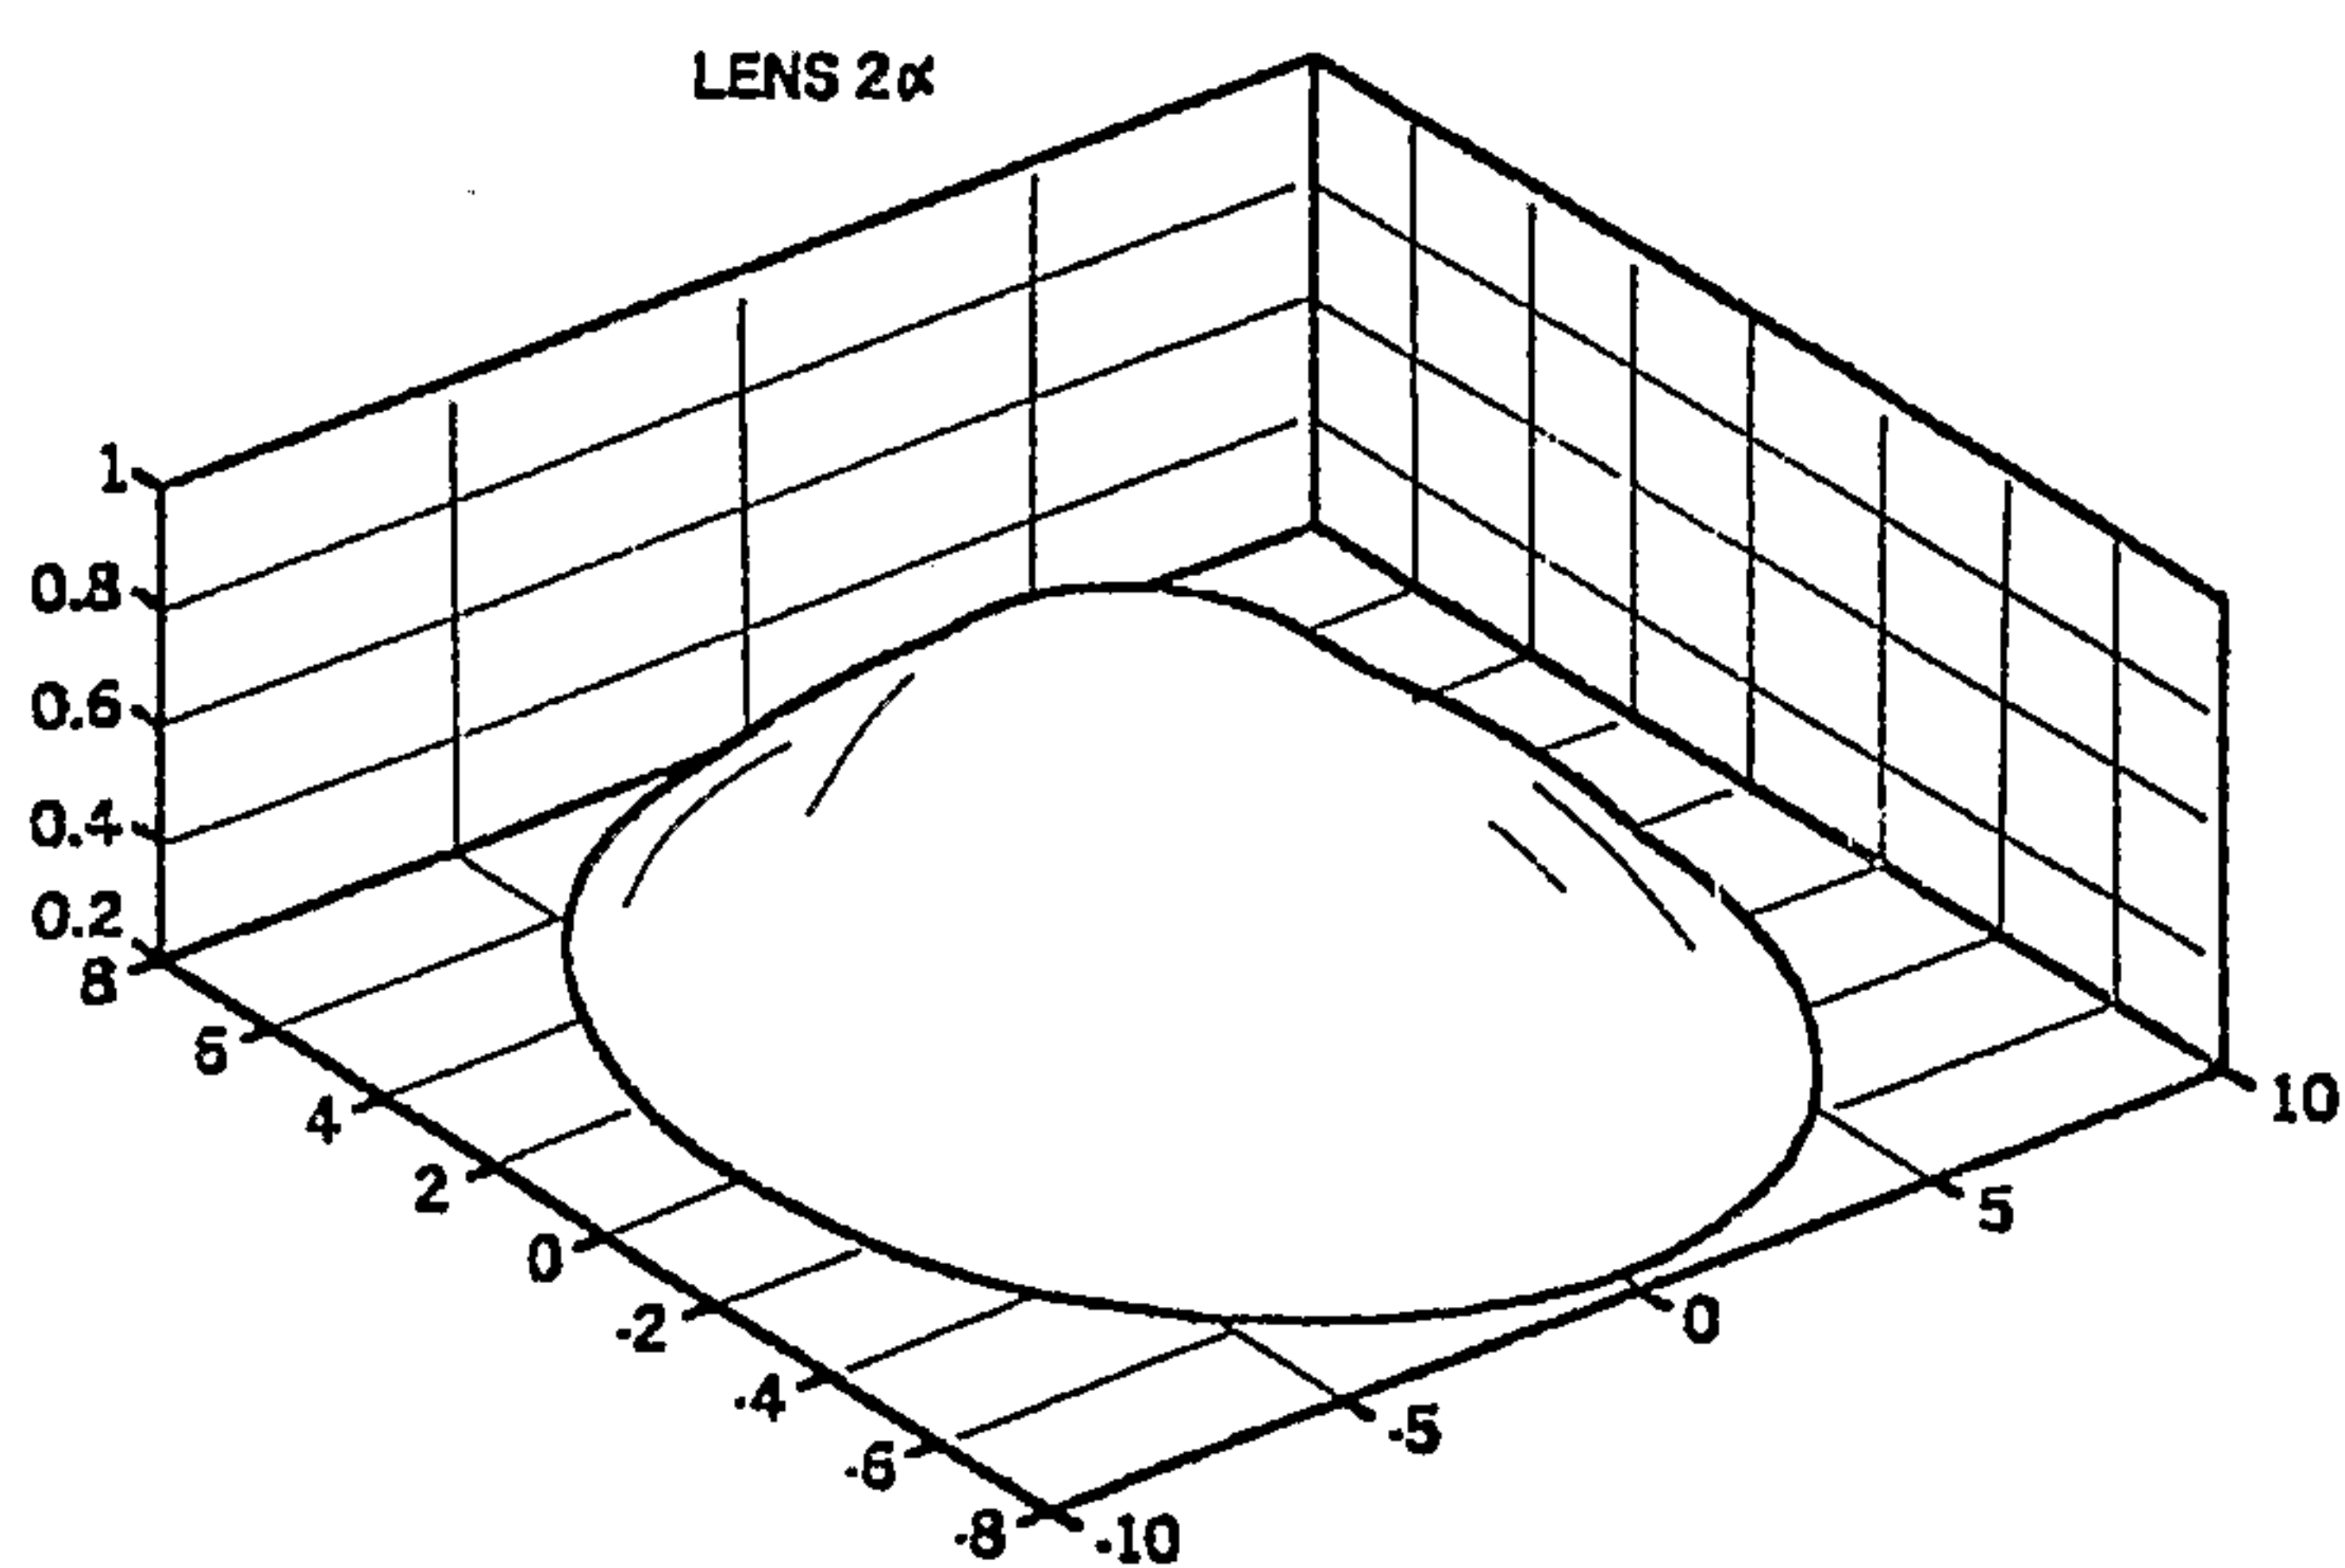
3/7

*Fig. 3a**Fig. 3b*

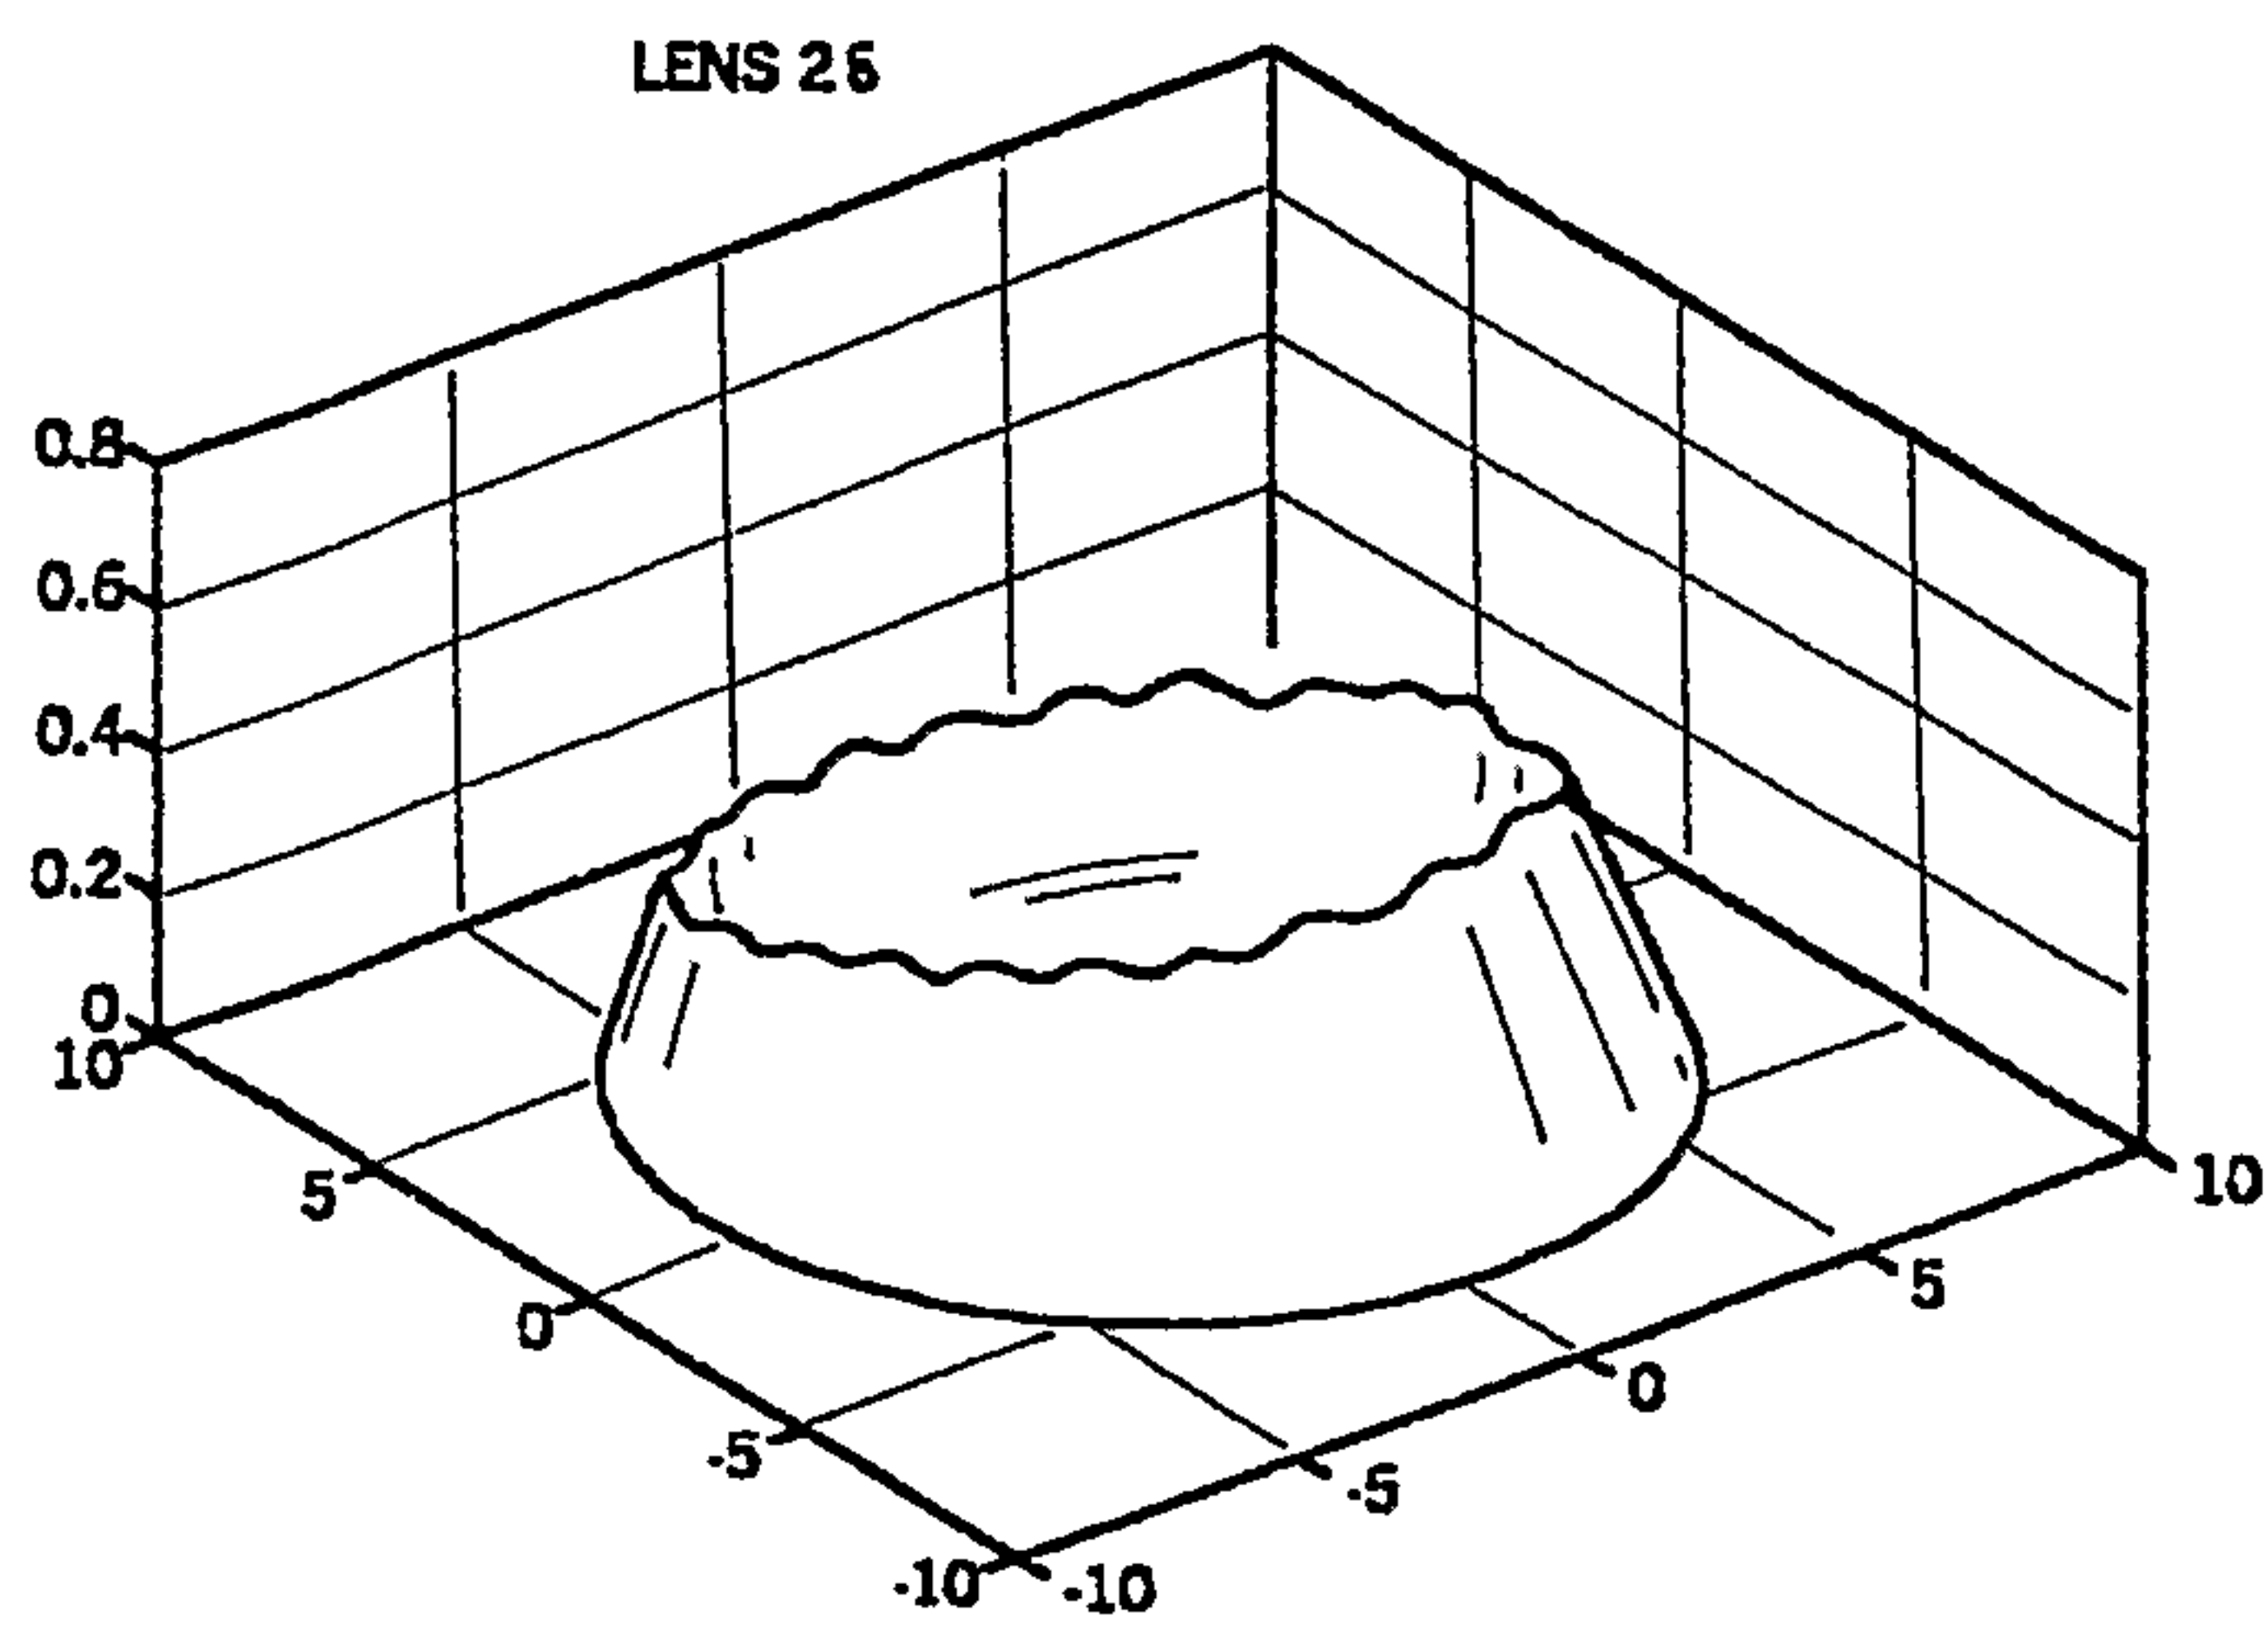
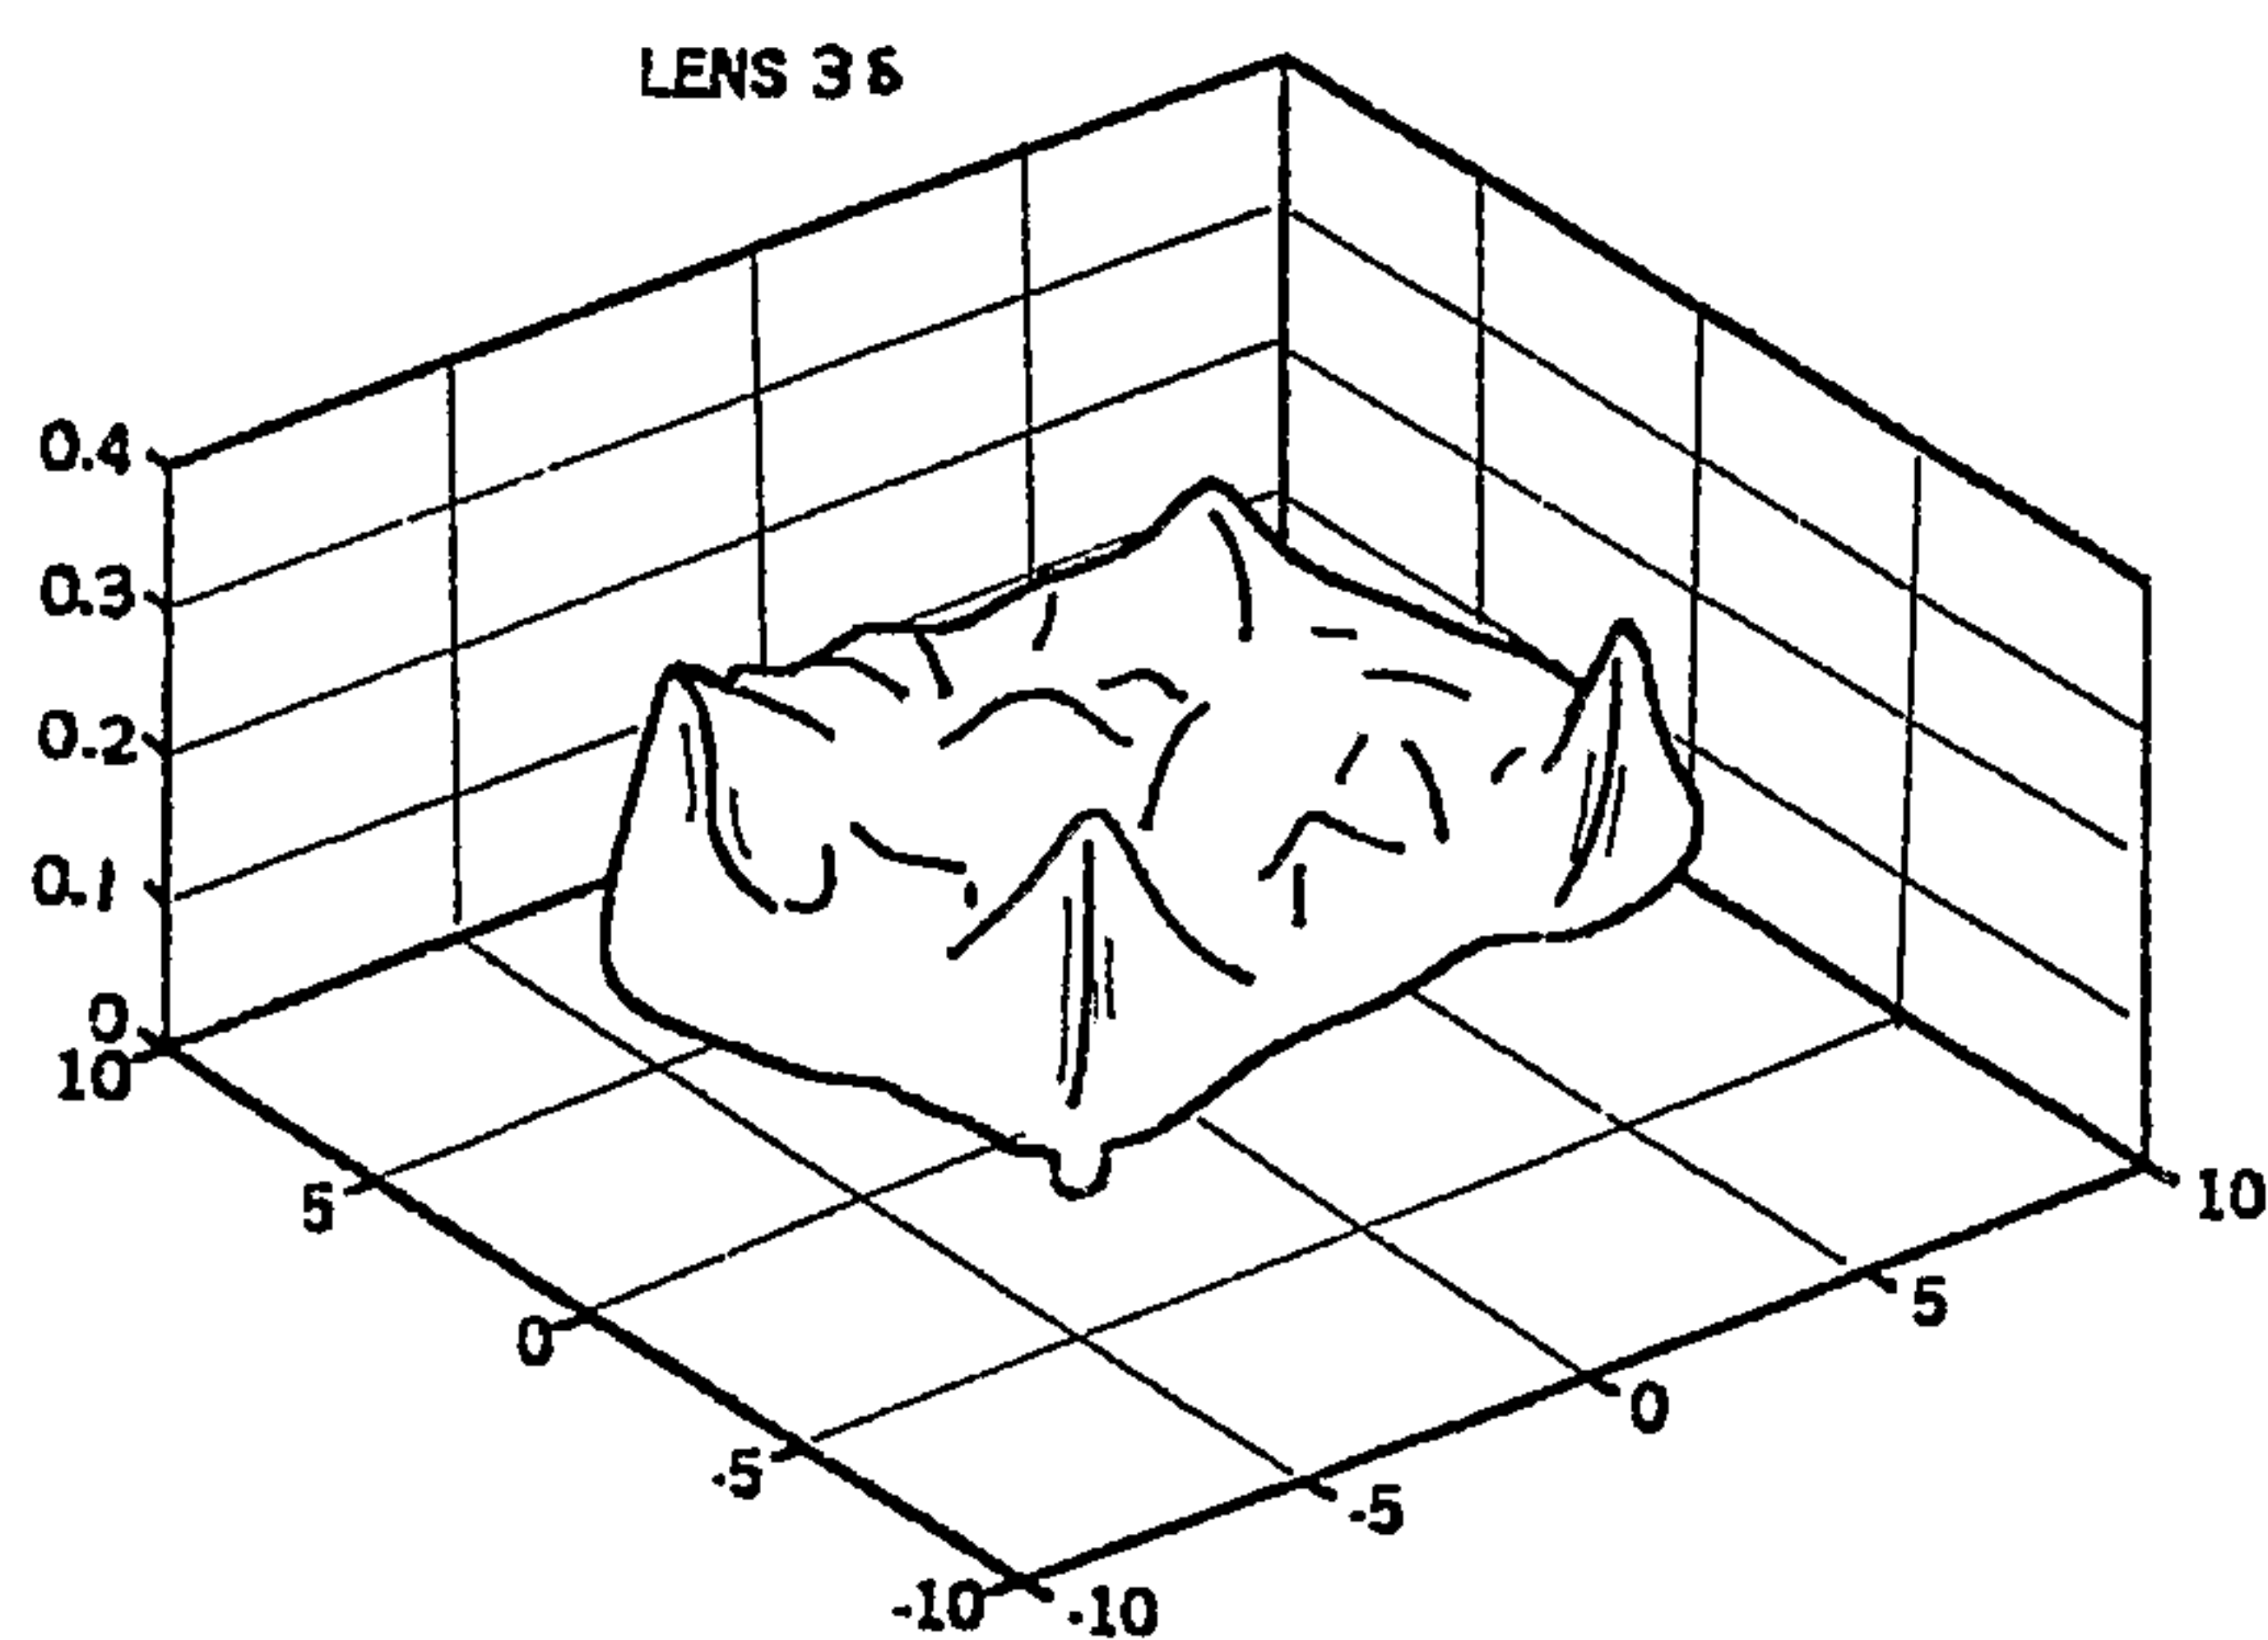
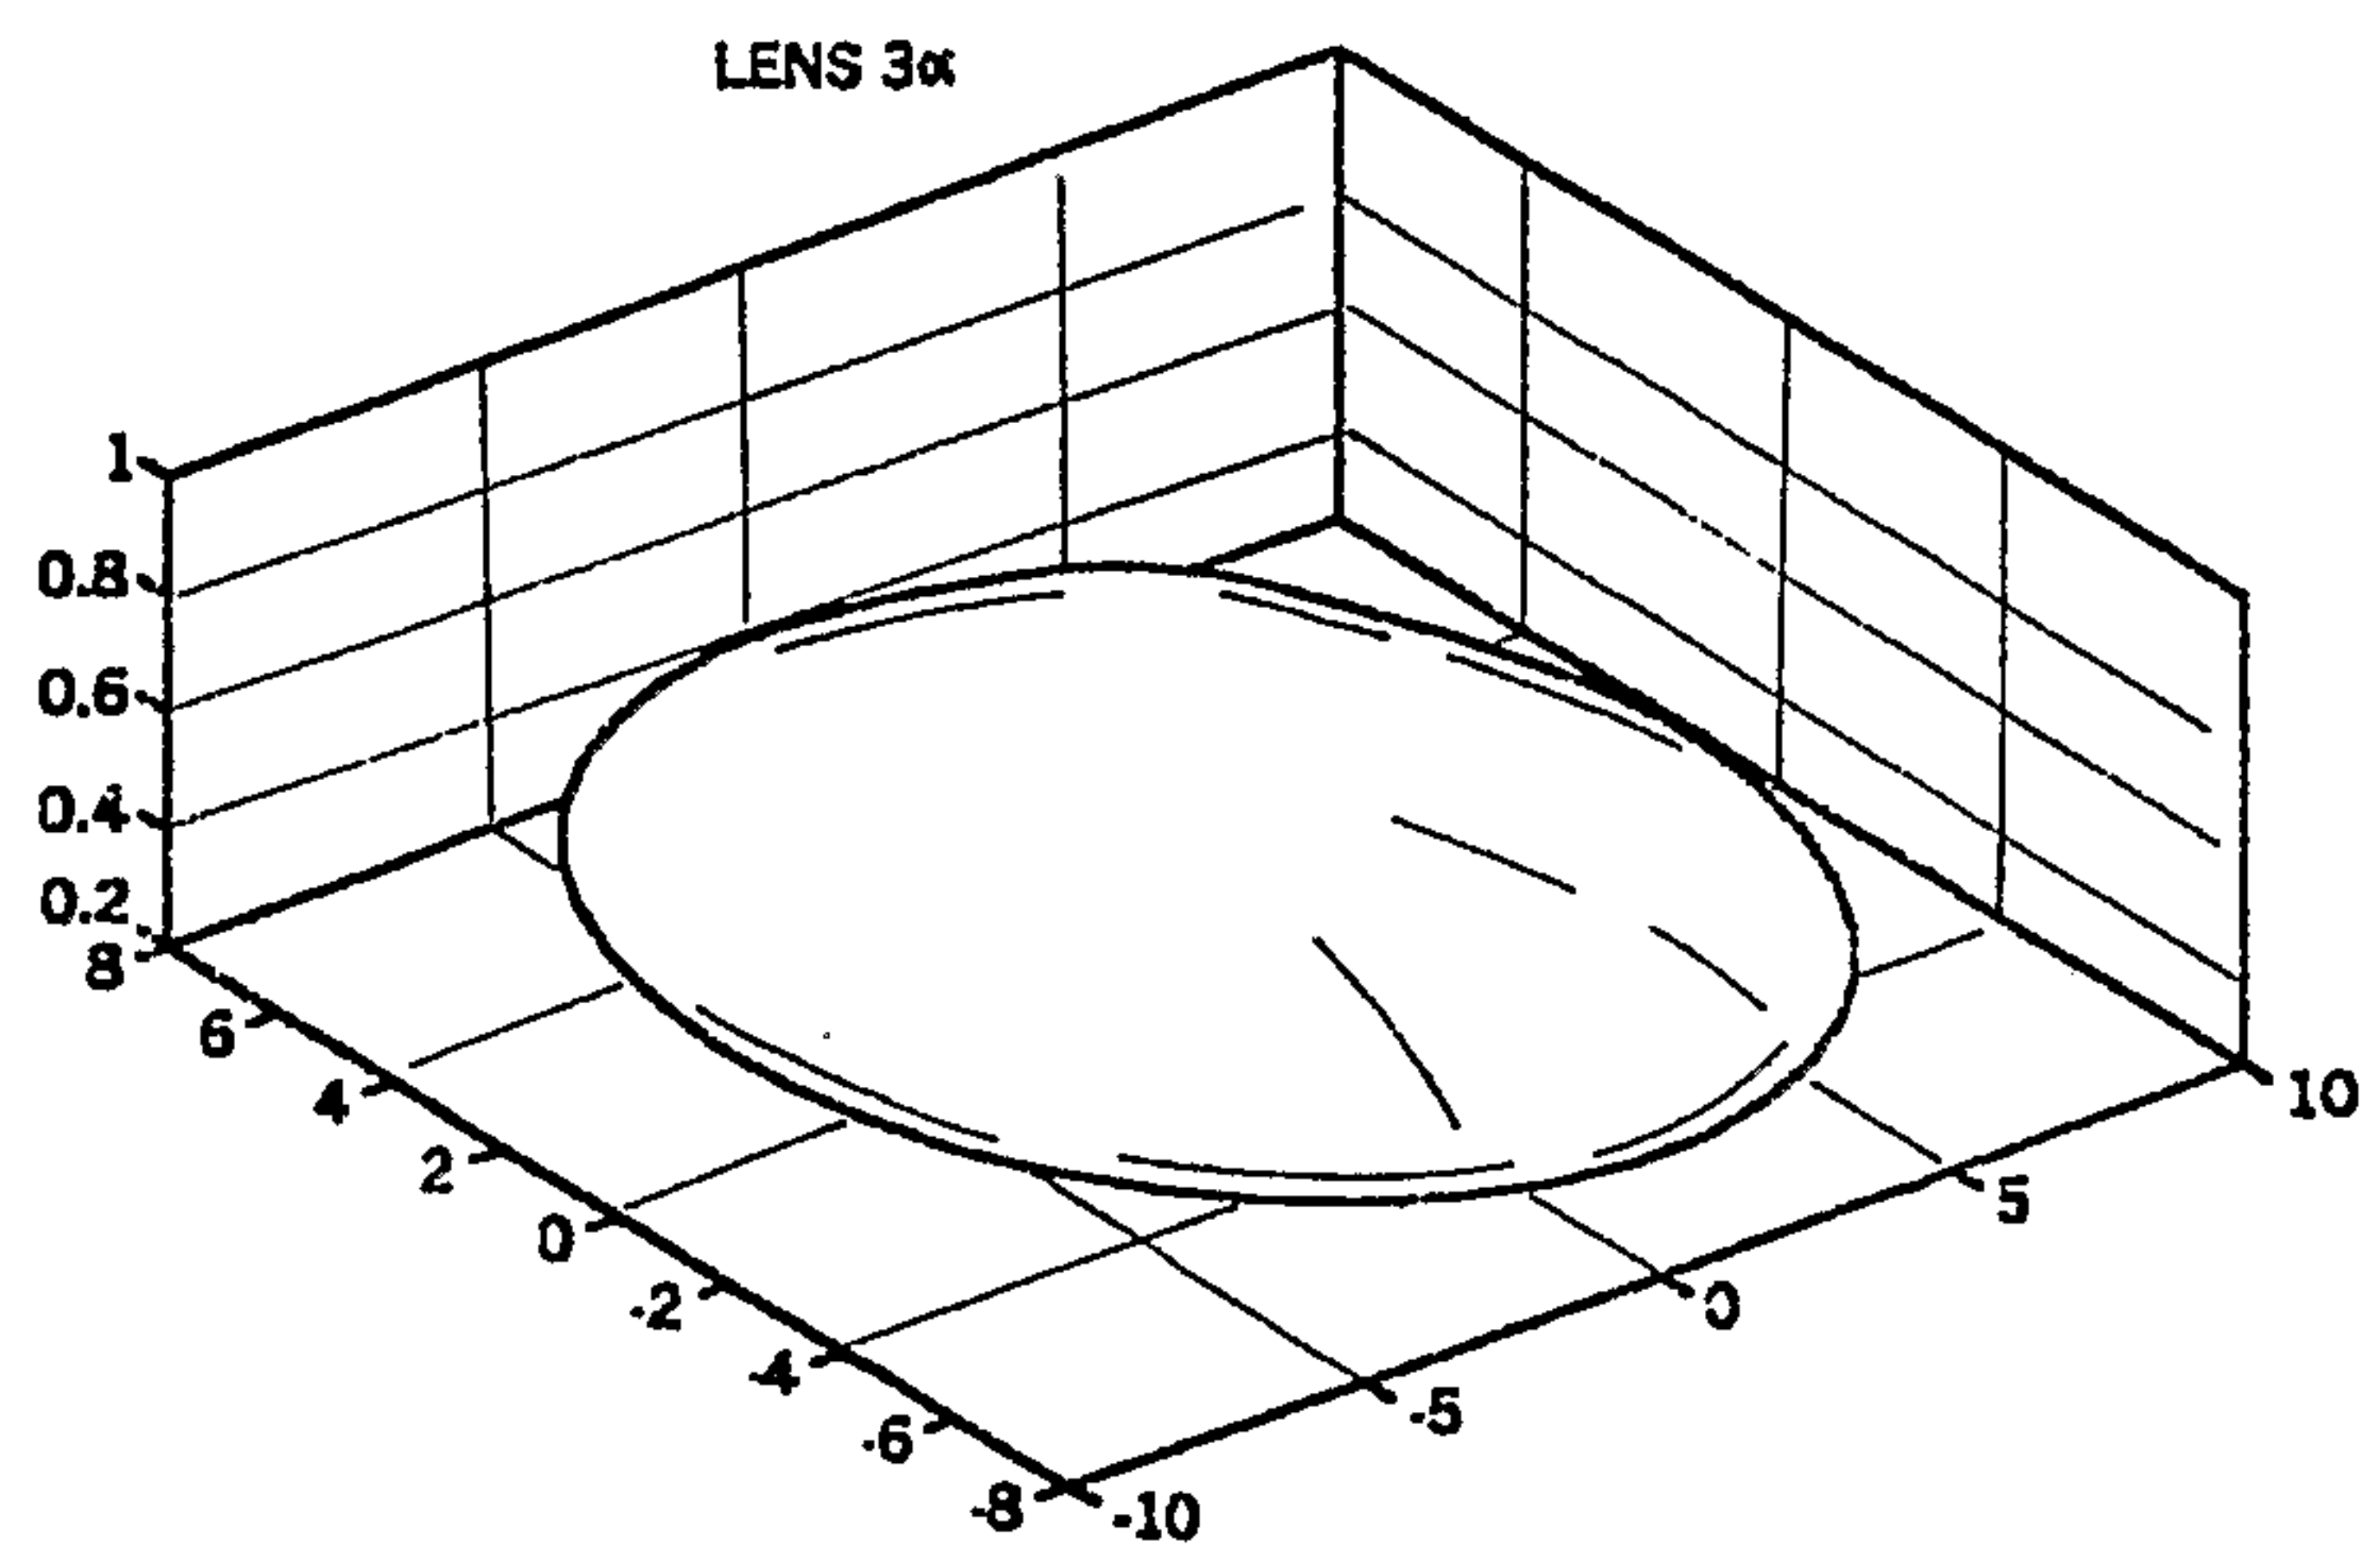
4/7

*Fig. 3c**Fig. 4*

5/7

*Fig. 5a**Fig. 5b**Fig. 6a*

6/7

*Fig. 6b**Fig. 7a**Fig. 7b*

7/7

