

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 August 2003 (28.08.2003)

PCT

(10) International Publication Number  
**WO 03/070483 A1**

(51) International Patent Classification<sup>7</sup>: **B42D 15/00**,  
B41M 3/14, 5/00

(21) International Application Number: PCT/US03/04087

(22) International Filing Date: 12 February 2003 (12.02.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/357,909 19 February 2002 (19.02.2002) US

(71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: **DUNNE, Brian, W.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **GRAHAM, Paul, D.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **JUNCK, Thomas**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **MANN, Graeme, R.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **SCHULZ, Mark, F.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: **BARDELL, Scott, A.** et al.; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

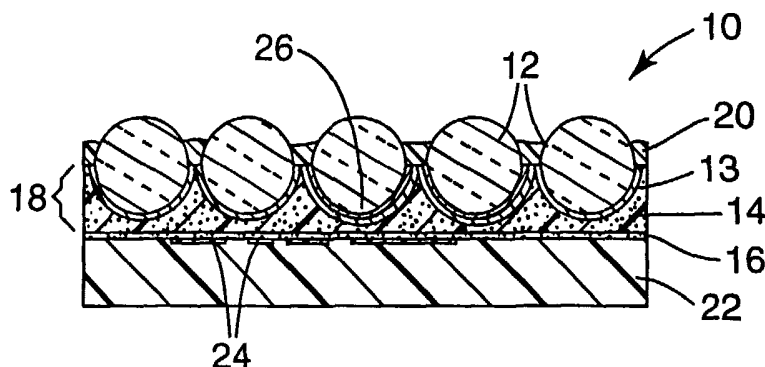
(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SECURITY LAMINATE



(57) Abstract: In one aspect, the invention provides a security laminate (10) comprising a retroreflective layer comprising a plurality of retroreflective microbeads (12) partially embedded in and protruding from a beadbond layer (14) and having image receptive material disposed around the protruding microspheres. In another embodiment, the security laminate (10) further comprises indicia patterns viewable in retroreflective light. In another embodiment, the security laminate (10) is imaged on the image receptive material.

WO 03/070483 A1

## **SECURITY LAMINATE**

### **BACKGROUND**

The invention relates to security laminates for use as a security feature on or in documents.

Documents of value such as passports, identification cards, entry passes, ownership certificates, financial instruments, and the like, are often assigned to a particular person by personalization data. Personalization data, often present as printed images, can include photographs, signatures, fingerprints, personal alphanumeric information, and barcodes, and allows human or electronic verification that the person presenting the document for inspection is the person to whom the document is assigned. There is widespread concern that forgery techniques can be used to alter the personalization data on such a document, thus allowing non-authorized people to pass the inspection step and use the document in a fraudulent manner.

A number of security features have been developed to authenticate the document of value, thus preventing forgers from producing a document, which resembles the authentic document during casual observation, but lacks the overt or covert security features known to be present in the authentic document. Overt security features include holograms and other diffractive optically variable images, embossed images, and color-shifting films, while covert security features include images only visible under certain conditions such as inspection under light of a certain wavelength, polarized light, or retroreflected light. Even more sophisticated systems require specialized electronic equipment to inspect the document and verify its authenticity. Often, these security features are directed at verifying the authenticity of the parent document, but convey little information regarding the authenticity of the personalization data. Further features that convey information about, or prevent, tampering with the personalization data are needed.

Of particular interest today is the ability to be able to determine that a forgery has been attempted without the need to resort to a special tool. There is a strong desire to be able to determine such tamper attempts using normal lighting conditions such as diffuse incandescent or fluorescent light sources.

Commonly, the personalization data on documents of value is protected by encapsulation of the printed images between laminated layers, one or more layers of such

laminates often being designed to show visible evidence of tampering. Production of a document which protects the personalization data by encapsulation requires hardware which can perform the combined functions of printing and heat laminating, often including the associated functions of roll feeding and die cutting. While such hardware is available, it can be rather complex and expensive, often beyond the reach of smaller issuing authorities.

Of additional concern is that typically the laminate and the data being protected by the laminate are resident in two discrete and separate layers and it is a commonly attempted practice to carefully separate the two layers and alter the data without inflicting any visible damage to the security document. There would be great utility and value in a technology which enabled simple, fast and inexpensive production of personalized documents of value having durability and tamper resistance.

### SUMMARY

In one aspect, the invention provides a security laminate comprising a retroreflective layer comprising a plurality of retroreflective microbeads partially embedded in and protruding from a beadbond layer and having image receptive material disposed around the protruding microspheres in a manner such that the microbeads remain retroreflective. In another embodiment, the security laminate further comprises indicia patterns viewable in retroreflected light. In another embodiment, the security laminate is imaged on the image receptive material.

In another aspect, the invention provides a security document wherein a security laminate of the invention is inserted into or otherwise attached to a document.

In another aspect, the invention provides a method of making an imaged security laminate comprising the step of printing an image onto a security laminate of the invention.

In another aspect, the invention provides a method of making a security document comprising the steps of providing a security laminate of the invention and providing instructions for printing and attaching said security laminate to a document of value.

The term "retroreflective" as used herein refers to the attribute of reflecting an incident light ray in a direction antiparallel to its incident direction, or nearly so, such that it returns to the light source or the immediate vicinity thereof.

The present invention provides a security laminate that indicates physical tampering with an image on the image receptive material by dislodgement of microbeads. Dislodgement of microbeads results in either a loss of retroreflectivity, or in the observation of clear patches in the laminate when viewed against a normal light source. The security laminates of the invention also indicate tampering by destruction of the laminate or separation of paper fibers from a document during delamination or attempted delamination. The security laminates of the invention may also include one or more overt or covert security features, including security indicia that are only visible by inspection under retroreflected light.

### BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 is an illustrative cross-section of an embodiment of a security laminate of the invention bonded to a substrate.

FIG. 2 is an illustrative cross-section of another embodiment of a security laminate of the invention bonded to a substrate.

### DETAILED DESCRIPTION

The security laminate of the present invention comprises an image receptive material disposed onto a retroreflective layer such that when an image is provided on the image receptive material, the retroreflective layer and a security indicia is visible under retroreflected light but are not substantially perceptible with an unaided eye under normal lighting conditions. The construction of the security laminate of the invention is such that the security features and the printed images are combined into a single layer.

In an embodiment of the invention, the security laminate is transparent. In other embodiments of the invention, the security laminate is translucent. Such embodiments of the invention may include security features such that printed images may be observed in reverse format on the rear side and evidence of tampering in the laminate may be detected by holding the laminate against normal lighting conditions.

As used herein, the term "normal lighting conditions" refers to the presence of ambient light that is substantially diffused, as with light typically used to light a room. The term "retroreflected light" refers to ambient light that is substantially collimated, as

with the light cast by the headlight of an automobile, or by a flashlight, and returns to the light source or the immediate vicinity thereof. The term "unaided eye" means normal (or corrected to normal) human vision not enhanced by, for example, magnification.

As shown in FIG. 1 in cross-section, one embodiment of a security laminate 10 of the present invention comprises retroreflective glass microbeads 12 having a reflector layer 13 partially embedded in and protruding from a beadbond 14 (together, retroreflective layer 18), an adhesive layer 16 bonded to the beadbond, and image receptive material 20 disposed between and/or around the microbeads. In this FIG. 1, the security laminate 10 is bonded to a substrate 22 wherein the substrate has an overt indicia 24 that is preferably visible through the security laminate 10 when viewed under normal lighting conditions. In this embodiment, the retroreflective layer is substantially transparent with overt indicia 24 being visible when illuminated under normal lighting conditions and the retroreflective layer 18 with a covert security indicia 26 is visible when illuminated by retroreflected light. An example of such a retroreflective layer is CONFIRM Security Laminate. CONFIRM Security Laminate comprises an exposed monolayer of glass microbeads, indicia patterns printed on the back surface of the microbeads, a transparent reflector layer on the back surface of the printed indicia and the microbeads, and a beadbond layer. The reflector layer is preferably a transparent, high refractive index material as described in U.S. Patent No. 3,801,183.

Another embodiment of the present invention of the invention is shown in FIG.2. In this embodiment, security laminate 40 comprises retroreflective glass microbeads 42 having a reflector layer 43 partially embedded in and protruding from a beadbond 44 (together, retroreflective layer 48), an adhesive layer 46 bonded to the beadbond, and image receptive material 20 disposed between and/or around the microbeads. The security laminate 40 is bonded to a substrate 52 wherein the substrate has an image or overt indicia 24 that is preferably visible through the security laminate 10 when viewed under normal lighting conditions. In this embodiment, the retroreflective layer 48 is retroreflective when illuminated with retroreflected light, but no security indicia is present on the beads. An example of such a retroreflective layer comprising microbeads having single or multiple reflector layers is described in U.S. Patent No. 3,700,305.

Other useful retroreflective layers comprising glass beads having a reflector layer in a beadbond include those found in CONFIRM ES Security Laminate and any other

retroreflective layer having an exposed microbead construction, that is, microbeads partially embedded into a beadbond. The reflector layer is preferably transparent, high refractive index material or is translucent. Examples of useful reflector layer materials include bismuth trioxide, zinc sulfide, titanium dioxide, zirconium oxide, and a stack of zinc sulfide/ $\text{Na}_3\text{AlF}_6$ .

Typically, the microbeads of the retroreflective layer are about hemispherically embedded into the beadbond. However, the amount of the microbeads embedded into the beadbond may vary from 25 to 75 % of the microbead diameter.

Generally, the amount of ink receptive material present in between and/or around the microbeads depends upon the volume of the microbeads that is not embedded in the beadbond. The amount is not limited as long as the microbeads remain retroreflective, that is, some or a substantial portion, or all of the microbeads may be covered with transparent ink receptive material, provided that the microbeads remain retroreflective, preferably after the ink receptive material is imaged. Preferably, the microbeads are not completely covered with ink receptive material.

Microbeads used in the security laminates are typically glass and range in size of from 10 to 200 micrometers. In another embodiment, the glass beads range in size from 25 micrometers to 75 micrometers. Such glass microbeads typically have a refractive index of at least about 1.8.

Useful beadbonds comprise urethanes, acrylics, hot melt adhesives, and combinations thereof. Preferably, the beadbond is transparent.

Useful adhesives for bonding to the beadbond include hot melt adhesives, such as those which comprise ethylene/acrylic acid (EAA) copolymers, ethylene/vinyl acetate (EVA) copolymers, ethylene/ethyl acrylate (EEA) copolymers, ethylene/methyl acrylate (EMA) copolymers, and polyethylene. Preferably, the adhesive is transparent.

#### Image receptive material

The image receptive material of the security laminates of the invention is used to accept images or other information in a discernable or readable form. Typically, the image receptive materials are water and abrasion resistant. Preferred image receptive materials are capable of receiving an image comprising aqueous ink. In another embodiment, the image receptive material is capable of receiving an image from an inkjet

printer. Preferably, the image receptive material is transparent. Useful image receptive materials include multi-valent metal salts such as aluminum sulfate, vinylpyrrolidone homopolymers and copolymers and substituted derivatives thereof; vinyl acetate copolymers, for example, copolymers of vinylpyrrolidone and vinyl acetate, copolymers of vinyl acetate and acrylic acid; polyvinyl alcohol; acrylic acid homopolymers and copolymers; cellulosic polymers; styrene copolymers with allyl alcohol, acrylic acid, and/or maleic acid or esters thereof; alkylene oxide polymers and copolymers; gelatins and modified gelatins; polysaccharides; and the like as disclosed in U.S. Patent Nos. 5,766,398; 4,775,594; 5,126,195; 5,198,306. Such materials may optionally also include inorganic materials such as alumina and/or silica particles.

In one embodiment, the image receptive material comprises polyvinylpyridine and may further include a crosslinker and/or a mordant. Polyvinylpyridines, when at least partially neutralized with an appropriate acid, are water-soluble polymers that can be crosslinked. A preferred polyvinylpyridine is poly(4-vinylpyridine). The image receptive materials may contain from greater than 15 to about 100 dry weight percent polyvinylpyridine. In one embodiment, an image receptive material of the invention contains at least greater than 15 weight percent polyvinylpyridine on a dry basis. In other embodiments, the image receptive material contains at least 20, at least 25, at least 30, or at least 35 weight percent polyvinylpyridine. In other embodiments, the image receptive material contains from 20 to 100, 30 to 100, 40 to 100, 45 to 100, or 45 to 85 weight percent polyvinylpyridine on a dry basis and any whole or fractional amount between 20 and 100 weight percent.

The image receptive materials of the invention may contain one or more crosslinkers. The crosslinker provides a durable ink receptor by crosslinking the polyvinylpyridine. Useful crosslinkers include, but are not limited to, polyfunctional aziridine compounds (for example, XAMA-2 and XAMA-7, available from Sybron Chemicals, Birmingham, NJ), polyfunctional epoxy compounds (for example, HELOXY Modifier 48, available from Resolution Performance Products, Houston, TX, or CR-5L, available from Exprit Technologies, Sarasota, FL), polyfunctional isopropylloxazoline compounds (for example, EPOCROS WS-500, available from Exprit Technologies, Sarasota, FL), and epoxy functional methoxy silane compounds (for example, Z-6040 SILANE, available from Dow Corning, Midland, MI).

The image receptive materials of the invention may contain an effective amount of crosslinker to crosslink the polyvinylpyridine so to form a durable and waterfast receptor. The number of crosslinking sites per unit mass of crosslinker typically characterizes the effectiveness of a particular crosslinker. The number of crosslinking sites (also sometimes referred to as “equivalents”) refers to the maximum number of bonds that an amount of crosslinker is theoretically able to form with a material to be crosslinked. An equivalent weight refers to the number of grams of crosslinker that contains 1 mole of equivalents or crosslinking sites.

Image receptive materials of the invention may contain from 0.006 to 1.5 millimoles crosslinking sites, from 0.03 to 0.6 millimoles crosslinking sites, or from 0.03 to 0.3 millimoles crosslinking sites per gram of polyvinylpyridine.

The image receptive materials comprising polyvinylpyridine may contain one or more mordants. A “mordant” as used herein is a material that forms a bond or interaction with dyestuffs in inks. A mordant is used to fix the ink dyestuffs so to provide increased durability to images, particularly water resistance. Preferred mordants are those materials or compounds that contain cationic moieties, for example, quaternary amino groups. Useful mordants include, but are not limited to, FREETEX 685 (a polyquaternary amine, available from Noveon, Inc., Cleveland, OH), DYEFIX 3152 (a ammonium chloride-cyanoguanidine-formaldehyde copolymer, available from Bayer, Pittsburgh, PA), GLASCOL F207 (2-Propen-1-aminium, N,N-dimethyl-N-2-propenyl-, chloride, homopolymer, available from Ciba Specialty Chemicals). The image receptive materials comprising polyvinylpyridine may contain up to about 70, up to about 60, up to about 50, up to about 40, or up to about 30 dry weight percent mordant and any whole or fractional amount between zero and 70 dry weight percent. In other embodiments, the image receptive materials may contain from 40 to 90 weight percent mordant.

The security laminates of the invention are generally made by applying an image receptive material composition to a retroreflective layer such that the microbeads protrude or nearly protrude from the image receptive material, and then drying the composition to form the image receptive material. Drying may be done at room temperature or at elevated temperature.

The image receptive material composition may be applied to a retroreflective layer by commonly known methods such as Mayer Rod.

A typical method for making the retroreflective layer of the security laminates of the present invention is described in U.S. Patent No. 3,801,183. In general, the method comprises the steps of coating the microbeads onto a pressure-sensitive adhesive or polyethylene coated carrier paper, optionally, printing an indicia on the microbeads, applying a reflector to the microbeads (over the indicia, if present), applying a beadbond composition over the reflective microbeads to form a beadbond, applying an adhesive layer, for example, a hot-melt adhesive layer, over the beadbond, and then removing the carrier paper to expose the microbeads. Optionally, the retroreflective layer having an adhesive layer on the beadbond may include a release liner over the adhesive layer.

The security laminates of the invention may be imaged using inks through known imaging techniques such as inkjet printing. Advantageously, the security laminates of the invention may be imaged using an inkjet printer and aqueous inks. The inks may utilize pigment or dye-based colorants.

The security laminates of the invention can be used with any document of value such as passports, identification cards, labels, entry passes, ownership certificates, financial instruments, and the like. The document of value may be non-woven or woven. The security laminates of the invention may be imaged and adhered to a document of value or imaged, adhered to a backing, and then inserted into a document, such as a passport, as part of the manufacturing process. Alternatively, the security laminates of the invention may be first attached to or inserted into the document, and then imaged.

### Examples

All of the amounts given are by weight unless otherwise stated. Unless otherwise stated, all of the components are available from Aldrich Chemical Co., Milwaukee, WI. Water used was de-ionized.

"CONFIRM ES" is a brand of a security laminate having glass beads in a beadbond, available from Minnesota Mining and Manufacturing Company, Saint Paul, MN.

"FREETEX 685" is a trade designation for a cationic polyamine, available from Noveon, Inc., Cleveland, OH.

"HELOXY MODIFIER 48" is a trade designation for a polyfunctional epoxy crosslinker, available from Resolution Performance Products, Houston, TX.

"REILLINE 420" is a trade designation for a solution of 40 % poly(4-vinylpyridine), available from Reilly Industries, Inc., Indianapolis, IN.

#### Example 1

The following three compositions were prepared.

Composition A: Prepared by adding 2 parts glacial acetic acid to 10 parts REILLINE 420, mixing well, then adding 5 parts IPA, mixing well, then adding 15 parts water.

Composition B: Prepared by mixing 10 parts FREETEX 685 with 38 parts water.

Composition C: Prepared by mixing 1 part HELOXY MODIFIER 48 with 15 parts ethanol.

A piece of CONFIRM ES was placed on top of an approximately 5 mm thick aluminum plate with the exposed retroreflective bead side of the CONFIRM ES facing away from the plate. A corona treatment was applied to the exposed microbead side of the CONFIRM ES by passing a high frequency generator (120 volts, 50/60 Hertz, 0.35 amps, available from Electro Technic Products Inc., Chicago, IL) approximately 20 mm above the surface of the CONFIRM ES. A mixture comprising 21 parts of Composition A, 4 parts of Composition B, and 1 part of Composition C was prepared. This image receptive material composition was coated using a #4 Mayer rod (nominal wet thickness = 0.009 mm) onto the exposed retroreflective bead side of the CONFIRM ES laminate, followed by drying in an oven at approximately 80 °C for approximately 5 minutes.

Upon viewing the coated CONFIRM ES with a retroreflective viewer, the retroreflective beads could clearly be observed to be retroreflective and the security indicia could be observed. This material was then printed on the coated side using an Epson

Stylus C80 inkjet printer equipped with aqueous pigmented inkjet inks (printer and T032120 black and T032520 multi color cartridges all available from Epson America, Inc., Long Beach, CA). The resulting image exhibited high color density and excellent line sharpness with no bleed or feathering between colors.

The imaged sample was submerged in water for about 24 hours, and the image quality was virtually unchanged with very little bleed or feathering between colors. An additional imaged sample was submerged in methyl ethyl ketone for about 24 hours. The yellow colorant was nearly completely removed, but the remaining colorants (black, cyan, and magenta) remained on the sample. An additional sample was submerged in a solution comprising 5 % ammonium hydroxide in water for about 24 hours, and the image quality was virtually unchanged with very little bleed or feathering between colors.

#### Example 2

Coated samples were prepared as in Example 1. The coated samples were printed with a Hewlett-Packard Deskjet 970Cse inkjet printer equipped with pigment-based black aqueous inkjet ink (cartridge 51654A) and dye-based color (cyan, magenta, yellow) aqueous inkjet ink (cartridge C6578DN) (printer and cartridges all available from Hewlett-Packard, Palo Alto, CA). The printed samples were submerged in water, methyl ethyl ketone, and 5 % ammonium hydroxide in water for about 24 hours as in Example 1. In both cases, a significant portion of the colorants was retained on the sample.

#### Example 3

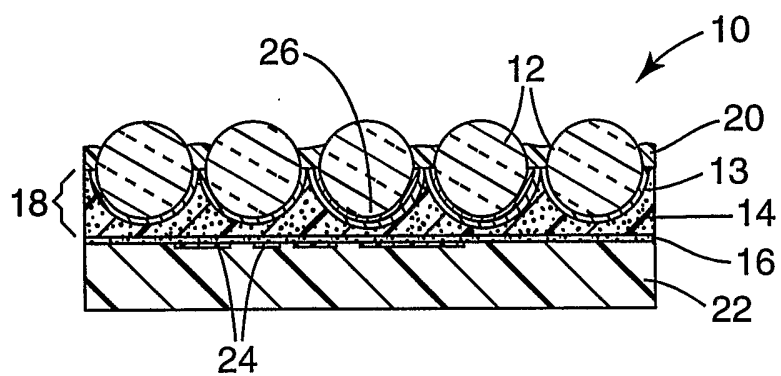
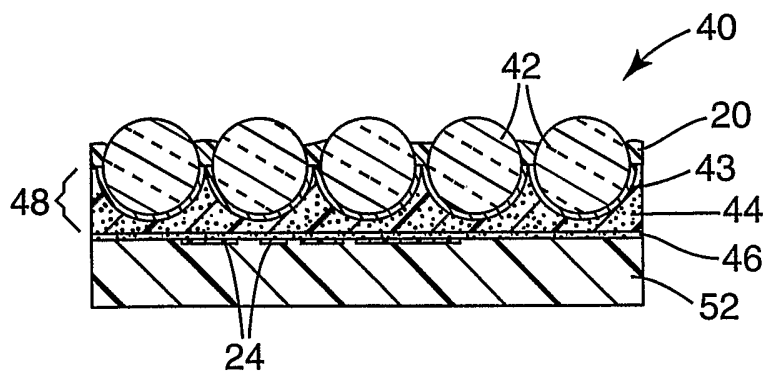
Coated samples were prepared as in Example 1 except that the image receptive material composition coated comprised 5 parts aluminum sulfate, 0.5 parts dioctyl sulfosuccinate sodium salt, 75 parts water, and 25 parts isopropyl alcohol. Upon viewing the coated CONFIRM ES substrate with a retroreflective viewer, the retroreflective beads could clearly be observed to be retroreflective and the security indicia could be observed. The coated CONFIRM ES was printed as in Example 1. The resulting image exhibited high color density and excellent line sharpness with no bleed or feathering between colors. Results of submersion in water, methyl ethyl ketone, and 5 % ammonium hydroxide in water for about 24 hours were similar to those in Example 1.

What is Claimed is:

1. A transparent or translucent security laminate comprising:  
a retroreflective layer comprising a plurality of retroreflective microbeads partially embedded in and protruding from a beadbond and having image receptive material disposed around the protruding microbeads in a manner such that the microbeads remain retroreflective.
2. The security laminate of claim 1 further comprising security indicia viewable under retroreflective light.
3. The security laminate of claim 1 further having an overt image on the image receptive material.
4. The security laminate of claim 1 wherein the image receptive material comprises polyvinylpyridine.
5. The security laminate of claim 3 wherein the overt image comprises a dye or pigment based ink.
6. The security laminate of claim 3 wherein the image comprises an aqueous ink.
7. The security laminate of claim 6 wherein the aqueous ink is an inkjet ink.
8. The security laminate of claim 3 wherein the image includes a printed image of a human face, signature, fingerprint, alphanumeric information, a barcode, or any combination thereof.
9. The security laminate of claim 1 further comprising a carrier paper over the microbeads.

10. The security laminate of claim 1 wherein the image receptive material comprises a multi-valent metal salt.
11. A security document comprising in combination:
  - (a) a security laminate of claim 1; and
  - (b) a document of value, wherein the security laminate is inserted or otherwise attached to the document of value.
12. The security document of claim 11 wherein the document of value is a passport, identification card, financial instrument, entry pass, or ownership certificate.
13. The security document of claim 11 wherein the document of value is woven or non-woven.
14. A method of imaging a security laminate comprising the step of printing an image onto a security laminate of claim 1.
15. The method of claim 14 wherein the image is printed using an inkjet printer.
16. A method of making a security document comprising the steps of:
  - providing a security laminate of claim 1; and
  - providing instructions for printing and attaching said security laminate to a document of value.
17. The method of claim 16 wherein the document of value is a passport, identification card, financial instrument, entry pass, or ownership certificate.

1/1

**Fig. 1****Fig. 2**

## INTERNATIONAL SEARCH REPORT

 Interna pplication No  
 PCT/US 03/04087

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B42D15/00 B41M3/14 B41M5/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B42D B41M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 700 305 A (BINGHAM WALLACE KARL) 24 October 1972 (1972-10-24) cited in the application the whole document ---	1,11,14, 16
A	DE 38 13 301 A (PFNUER FRITZ) 2 November 1989 (1989-11-02) column 3, line 3 -column 4, line 26; figure 1 -----	1,11,14, 16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## ° Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&\* document member of the same patent family

Date of the actual completion of the international search

22 July 2003

Date of mailing of the international search report

31/07/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Evans, A

**INTERNATIONAL SEARCH REPORT**  
information on patent family members

International Application No  
PCT/US 03/04087

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3700305	A	24-10-1972	AR 211758 A1	15-03-1978
			AT 327750 B	10-02-1976
			AT 1064771 A	15-04-1975
			AU 458362 B2	27-02-1975
			AU 3605671 A	31-05-1973
			CA 946805 A1	07-05-1974
			DE 2160907 A1	29-06-1972
			DK 128197 B	18-03-1974
			ES 397418 A1	16-05-1975
			FR 2117893 A5	28-07-1972
			GB 1350649 A	18-04-1974
			IT 945114 B	10-05-1973
			JP 54018119 B	05-07-1979
			NL 7116535 A ,B	16-06-1972
			SE 378915 B	15-09-1975
			ZA 7107807 A	30-08-1972
DE 3813301	A	02-11-1989	DE 3813301 A1	02-11-1989