




- (51) **International Patent Classification:**  
*C10G 3/00* (2006.01)
- (21) **International Application Number:**  
PCT/US2016/039739
- (22) **International Filing Date:**  
28 June 2016 (28.06.2016)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
62/186,902 30 June 2015 (30.06.2015) US
- (71) **Applicant (for US only):** SHELL OIL COMPANY [US/US]; One Shell Plaza, P.O. Box 2463, Houston, Texas 77252-2463 (US).
- (71) **Applicant (for all designated States except US):** SHELL INTERNATIONALE RESEARCH MAATSCHAPPIJ B.V. [NL/NL]; Carel van Bylandtlaan 30, NL-2596 The Hague (NL).
- (72) **Inventors:** JOHNSON, Kimberly Ann; 3026 Jane Long League Drive, Richmond, Texas 77469 (US). POWELL, Joseph Broun; 10506 Normont Drive, Houston, Texas 77070 (US).
- (74) **Agent:** IWATA, Yukiko; Shell Oil Company, One Shell Plaza, P.O. Box 2463, Houston, Texas 77252-2463 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report (Art. 21(3))

(54) **Title:** BIOMASS CONVERSION PROCESS USING AMORPHOUS SILICA ALUMINA TO OBTAIN A MONOOXYGEN-ATED STREAM

FIGURE 1

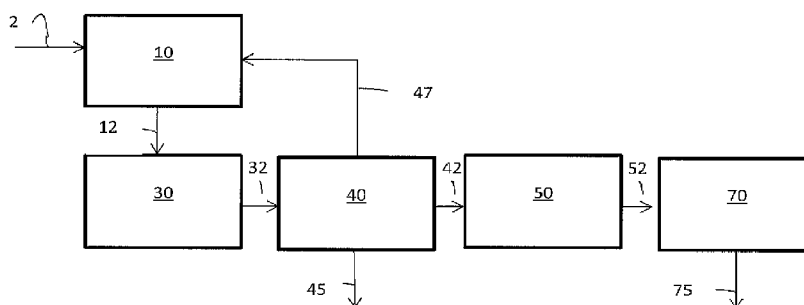

(57) **Abstract:** A process for the production of a higher hydrocarbon from solid biomass is provided. The process provides for ready separation of organic phase from aqueous phase which organic phase maybe recycled as a digestive solvent in a digestion and/or deoxygenation of solid biomass. By contacting the oxygenated hydrocarbon intermediate containing diols produced from the digestion and deoxygenation of solid biomass with an amorphous silica alumina catalyst reduces the diols content and product stream readily separates into organic phase and aqueous phase.

BIOMASS CONVERSION PROCESS USING AMORPHOUS SILICA ALUMINA TO  
OBTAIN A MONOOXYGENATED STREAM

The present application claims the benefit of pending U. S. Provisional Application Serial No. 62/186,902, filed 30 June 2015.

5     Field of the Invention

The invention relates to conversion of biomass to hydrocarbons. More specifically, the invention relates to improved production of higher hydrocarbons useful as liquid biofuels from solid biomass.

Background of the Invention

10           A significant amount of attention has been placed on developing new technologies for providing energy from resources other than fossil fuels. Biomass is a resource that shows promise as a fossil fuel alternative. As opposed to fossil fuel, biomass is also renewable.

          Biomass may be useful as a source of renewable fuels. One type of biomass is  
15     plant biomass. Plant biomass is the most abundant source of carbohydrate in the world due to the lignocellulosic materials composing the cell walls in higher plants. Plant cell walls are divided into two sections, primary cell walls and secondary cell walls. The primary cell wall provides structure for expanding cells and is composed of three major polysaccharides (cellulose, pectin, and hemicellulose) and one group of glycoproteins. The  
20     secondary cell wall, which is produced after the cell has finished growing, also contains polysaccharides and is strengthened through polymeric lignin covalently cross-linked to hemicellulose. Hemicellulose and pectin are typically found in abundance, but cellulose is the predominant polysaccharide and the most abundant source of carbohydrates. However, production of fuel from cellulose poses a difficult technical problem. Some of the factors  
25     for this difficulty are the physical density of lignocelluloses (like wood) that can make penetration of the biomass structure of lignocelluloses with chemicals difficult and the chemical complexity of lignocelluloses that lead to difficulty in breaking down the long chain polymeric structure of cellulose into carbohydrates that can be used to produce fuel. Another factor for this difficulty is the nitrogen compounds and sulfur compounds  
30     contained in the biomass. The nitrogen and sulfur compounds contained in the biomass can poison catalysts used in subsequent processing.

          Most transportation vehicles require high power density provided by internal combustion and/or propulsion engines. These engines require clean burning fuels which are generally in liquid form or, to a lesser extent, compressed gases. Liquid fuels are more

portable due to their high energy density and their ability to be pumped, which makes handling easier.

Currently, bio-based feedstocks such as biomass provide the only renewable alternative for liquid transportation fuel. Unfortunately, the progress in developing new technologies for producing liquid biofuels has been slow in developing, especially for  
5 liquid fuel products that fit within the current infrastructure. Although a variety of fuels can be produced from biomass resources, such as ethanol, methanol, and vegetable oil, and gaseous fuels, such as hydrogen and methane, these fuels require either new distribution technologies and/or combustion technologies appropriate for their characteristics. The  
10 production of some of these fuels also tends to be expensive and raise questions with respect to their net carbon savings. There is a need to directly process biomass into liquid fuels, amenable to existing infrastructure.

Processing of biomass as feeds is challenged by the need to directly couple biomass hydrolysis to release sugars, and catalytic hydrogenation/hydrogenolysis/  
15 hydrodeoxygenation of the sugar, to prevent decomposition to heavy ends (caramel, or tars). Further, it is a challenge to minimize generation of waste products that may require treating before disposal and/or catalyst deactivation by poisons.

#### Summary of the Invention

It was found that glycols in the oxygenated hydrocarbon intermediate produced by digesting and hydrodeoxygenating solid biomass in a liquid digestive solvent tend to  
20 rapidly coke the condensation catalyst in the subsequent condensation reaction that produces higher hydrocarbons. Applicants have found that by contacting the oxygenated hydrocarbon intermediate with an acidic silica alumina catalyst under certain reaction conditions producing monooxygenated stream prior to condensation reaction provides  
25 processing advantages. These advantages include at least one of extending the life of catalysts used in subsequent processing steps, producing components valuable as liquid biofuels, and providing a readily separable solvent for use in production of biofuels.

In one embodiment, a process for the production of a higher hydrocarbon from solid biomass, said process comprising:

- 30 a. a biomass solid containing cellulose, hemicellulose, and lignin;
- b. digesting and hydrodeoxygenating the biomass solid in a liquid digestive solvent, said digestive solvent containing a solvent mixture having a boiling point of greater than 40°C in the presence of a hydrothermal hydrocatalytic in

- the presence of hydrogen at a temperature in the range of 110°C to less than 300°C at a pressure in a range of from 20 bar to 200 bar to form a stable oxygenated hydrocarbon intermediate product having a viscosity of less than 100 centipoise (at 50°C), a diol content of at least 2 wt.%, less than 2wt% of sugar, and less than 2wt% acid (acetic acid equivalent) based on the intermediate product, and at least 60% of carbon exists at less than or equal to 9;
- 5
- c. reacting at least a portion of the stable oxygenated hydrocarbon intermediate product with an acidic amorphous silica alumina catalyst at a temperature in the range from 300°C to 400°C thereby producing monooxygenated stream containing water and monooxygenates having a boiling point of at least 40°C;
- 10
- d. condensing at least a portion of the monooxygenated stream to liquid phase producing an aqueous phase and an organic phase;
- e. removing the aqueous phase from the organic phase;
- 15
- f. recycling at least a first portion of the organic phase to step b as a portion of the digestive solvent;
- g. contacting the monooxygenates in the second portion of the organic phase having boiling point of at least 40°C and/or non-condensed monooxygenates if any with a solid condensation catalyst at a temperature in the range from 275°C to about 425°C producing a higher hydrocarbons stream.
- 20

The features and advantages of the invention will be apparent to those skilled in the art. While numerous changes may be made by those skilled in the art, such changes are within the spirit of the invention.

#### Brief Description of the Drawing

- 25 The drawings illustrate certain aspects of some of the embodiments of the invention, and should not be used to limit or define the invention.

The Figure is a schematic illustration of an embodiment of a process of this invention.

#### Detailed Description of the Invention

- 30 In one embodiment, the invention relates to contacting the oxygenated hydrocarbon intermediate, produced from digesting and hydrodeoxygenating a solid biomass in a liquid digestive solvent, with an acidic amorphous silica alumina catalyst under certain reaction conditions producing monooxygenated stream prior to condensation reaction. It has been

found that the acidic silica alumina catalyst treatment prior to the condensation reaction extends the catalyst life of the condensation catalyst. In another aspect, the process provides means to readily separate an organic phase from an aqueous phase, which at least a portion of the organic phase can be recycled to be used as a digestive solvent

5           The higher hydrocarbons produced are useful in forming transportation fuels, such as synthetic gasoline, diesel fuel, and jet fuel, as well as industrial chemicals. As used herein, the term “higher hydrocarbons” refers to hydrocarbons having an oxygen to carbon ratio less than the oxygen to carbon ratio of at least one component of the biomass feedstock. The higher hydrocarbon predominantly contains C4 to C30 hydrocarbons, more preferably C6 to C18 hydrocarbons. As used herein the term “hydrocarbon” refers to an organic compound comprising primarily hydrogen and carbon atoms, which is also an unsubstituted hydrocarbon. In certain embodiments, the hydrocarbons of the invention also comprise heteroatoms (i.e., oxygen sulfur, phosphorus, or nitrogen) and thus the term “hydrocarbon” may also include substituted hydrocarbons. As used herein, the term “soluble carbohydrates” refers to monosaccharides or polysaccharides that become solubilized in a digestion process. Although the underlying chemistry is understood behind digesting cellulose and other complex carbohydrates and further transforming simple carbohydrates into organic compounds reminiscent of those present in fossil fuels, high-yield and energy-efficient processes suitable for converting cellulosic biomass into fuel blends have yet to be developed. In this regard, the most basic requirement associated with converting cellulosic biomass into fuel blends using digestion and other processes is that the energy input needed to bring about the conversion should not be greater than the available energy output of the product fuel blends. Further the process should maximize product yield while minimizing waste products. These basic requirements lead to a number of secondary issues that collectively present an immense engineering challenge that has not been solved heretofore.

          In a method of production of hydrocarbons, pyrolysis of biomass has been reported. Pyrolysis is the thermal decomposition of biomass occurring in the absence of oxygen. The products of biomass pyrolysis include biochar, bio-oil and gases including methane, hydrogen, carbon monoxide, and carbon dioxide. Depending on the thermal environment and the final temperature, pyrolysis will yield mainly biochar at low temperatures, less than 450°C, when the heating rate is quite slow, and mainly gases at high temperatures, greater than 800°C, with rapid heating rates. At an intermediate temperature and under relatively

high heating rates, the main product is bio-oil. Pyrolysis products can be upgraded to fuel such as disclosed in US8143464. However, such process produces a large quantity of biochar and gases such as methane, hydrogen, carbon monoxide, and carbon dioxide.

Unlike a pyrolysis process, digestion and hydrocatalytic hydrodeoxygenation  
5 produces a liquid oxygenated hydrocarbon intermediate with minimal biochar or gaseous carbon monoxide and carbon dioxides. However, under the milder conditions that produce the oxygenated hydrocarbon intermediates also forms glycols that tend to coke the condensation catalyst to produce the higher hydrocarbons.

Processing of biomass as feeds is challenged by the need to directly couple biomass  
10 hydrolysis to release sugars, and catalytic hydrogenation/hydrogenolysis/hydrodeoxygenation of the sugar, to prevent decomposition to heavy ends (caramel, or tars). It was found that glycols in the oxygenated hydrocarbon intermediate produced by digesting and catalytically hydrodeoxygenating solid biomass in a liquid digestive solvent tend to rapidly coke the condensation catalyst in the subsequent condensation reaction that  
15 produces higher hydrocarbons. It was found that contacting (and reacting) the oxygenated hydrocarbon intermediate containing diols with an acidic amorphous silica alumina catalyst at a temperature in the range of 325°C to 400°C producing monooxygenated stream prior to condensation reaction can reduce coke formation on the catalyst during condensation reaction.

20 It has further been found that when the monooxygenated stream is condensed to liquid phase, water can be effectively removed from the process by phase separation, further protecting the condensation catalyst from degradation. Upon condensation, the monooxygenated stream readily separates into an aqueous phase containing water and an organic phase containing the monooxygenates. At least a portion of the organic phase can  
25 be recycled to be used as digestive solvent.

Various illustrative embodiments will be further described with reference to the Figure. In the Figure show illustrative embodiments of biomass conversion process to hydrocarbon.

Any suitable (e.g., inexpensive and/or readily available) type of lignocellulosic  
30 biomass can be used as a solid biomass. Suitable lignocellulosic biomass can be, for example, selected from, but not limited to, wood, forestry residues, agricultural residues, herbaceous material, municipal solid wastes, pulp and paper mill residues, and combinations thereof. Thus, in some embodiments, the biomass can comprise, for example,

corn stover, straw, bagasse, miscanthus, sorghum residue, switch grass, duckweed, bamboo, water hyacinth, hardwood, hardwood chips, hardwood pulp, softwood, softwood chips, softwood pulp, and/or combination of these feedstocks. The biomass can be chosen based upon a consideration such as, but not limited to, cellulose and/or hemicelluloses content, lignin content, growing time/season, growing location/transportation cost, growing costs, harvesting costs and the like.

Prior to processing, the untreated biomass can be reduced in size (e.g., chopping, crushing or debarking) to a convenient size and certain quality that aids in moving the biomass or mixing and impregnating the chemicals from digestive solvent. Thus, in some embodiments, providing biomass can comprise harvesting a lignocelluloses-containing plant such as, for example, a hardwood or softwood tree. The tree can be subjected to debarking, chopping to wood chips of desirable thickness, and washing to remove any residual soil, dirt and the like.

The biomass solids are introduced in to a vessel from an inlet. The vessel can be in any shape that include, for example, vertical, horizontal, incline, and may include bends, curves or u shape. The vessel will further have at least one inlet and at least one outlet.

The biomass may optionally be washed with an acidic or basic solution to remove metal species and its corresponding anions such as Mg, Ca, Na, K Fe, Mn, Cl, SO<sub>4</sub>, PO<sub>4</sub>, NO<sub>3</sub> that are detrimental to catalysts or equipment used in the hydrothermal hydrocatalytic treatment from the biomass. Such treatment disclosed in commonly owned co-pending U.S. Patent Application Nos. 61/917382, 61/917400, 61/917406, 61/917414, 61/917393, 61/917402, 61/917419, 61/917422, 61/917445, and 61/917448, filed December 18, 2013.

At least a portion of the optionally treated cellulosic biomass solids is provided to a digestion and/or reaction zone (collectively referred to as “hydrothermal hydrocatalytic reaction zone” 10) for digesting and hydrodeoxygenating. This zone may be conducted in a single step or in multiple steps or vessels as described below.

For the hydrothermal catalytic reaction zone, the zone may have one or more vessels. In one embodiment in the digestion/reaction zone hydrolysis and hydrothermal hydrocatalytic reaction of the treated biomass is carried out in one or more vessels. These vessels may be digesters or reactors or combination thereof including a combination hydrothermal hydrocatalytic digestion unit.

In some embodiments, lignocellulosic biomass (solids), 2 being continuously or semi-continuously added to the hydrothermal digestion unit or hydrothermal hydrocatalytic

digestion unit may be pressurized before being added to the unit, particularly when the hydrothermal (hydrocatalytic) digestion unit is in a pressurized state. Pressurization of the cellulosic biomass solids from atmospheric pressure to a pressurized state may take place in one or more pressurization zones before addition of the cellulosic biomass solids to the hydrothermal (hydrocatalytic) digestion unit. Suitable pressurization zones that may be used for pressurizing and introducing lignocellulosic biomass to a pressurized hydrothermal digestion unit or hydrothermal hydrocatalytic digestion unit are described in more detail in commonly owned U. S. Patent Application Publication Nos. US20130152457 and US20130152458. Suitable pressurization zones described therein may include, for example, pressure vessels, pressurized screw feeders, and the like. In some embodiments, multiple pressurization zones may be connected in series to increase the pressure of the cellulosic biomass solids in a stepwise manner. The digestion and the hydrothermal hydrocatalytic reaction in the hydrothermal catalytic reaction zone (or digestion reaction zone) may be conducted separately, partially combined, or *in situ*.

The biomass solid is hydrothermally digested and hydrodeoxygenated in a liquid-phase digestive solvent, in the presence of hydrogen and a catalyst capable of activating molecular hydrogen (hydrothermal hydrocatalytic catalyst), at a temperature in the range of from 110°C to less than 300°C at a pressure in a range of from 20 bar to 200 bar to form stable oxygenated hydrocarbon intermediate product mixtures. The stable oxygenated hydrocarbon intermediate product mixture, in general, has a viscosity of less than 100 centipoise (at 50°C), a diol content of at least 2 wt.% of diols, less than 2 wt.% of sugar, and less than 2 wt.% organic acid based on acetic acid equivalent, and at least 60% of carbon in formed product exists in molecules having 10 carbon atoms or less.

In some embodiments, the digestion rate of cellulosic biomass solids may be accelerated in the presence of a liquid phase containing a digestion solvent. In some instances, the liquid phase may be maintained at elevated pressures that keep the digestion solvent in a liquid state when raised above its normal boiling point. Although the more rapid digestion rate of cellulosic biomass solids under elevated temperature and pressure conditions may be desirable from a throughput standpoint, soluble carbohydrates may be susceptible to degradation at elevated temperatures. One approach for addressing the degradation of soluble carbohydrates during hydrothermal digestion is to conduct an *in situ* catalytic reduction reaction process so as to convert the soluble carbohydrates into more stable compounds as soon as possible after their formation.



In certain embodiments, a slurry catalyst may be effectively distributed from the bottom of a charge of cellulosic biomass solids to the top using upwardly directed fluid flow to fluidize and upwardly convey slurry catalyst particulates into the interstitial spaces within the charge for adequate catalyst distribution within the digesting cellulosic biomass solids. Suitable techniques for using fluid flow to distribute a slurry catalyst within cellulosic biomass solids in such a manner are described in commonly owned U. S. Patent Application Publication Nos. US20140005445 and US20140005444. In addition to affecting distribution of the slurry catalyst, upwardly directed fluid flow may promote expansion of the cellulosic biomass solids and disfavor gravity-induced compaction that occurs during their addition and digestion, particularly as the digestion process proceeds and their structural integrity decreases. Methods of effectively distributing molecular hydrogen within cellulosic biomass solids during hydrothermal digestion is further described in commonly owned U. S. Patent Application Publication Nos. US20140174433 and US20140174432.

In another embodiment the hydrothermal hydrocatalytic digestion unit may be configured as disclosed in a co-pending U.S. Patent Application Publication No. US20140117276. In the digestion zone, the size-reduced biomass is contacted with the digestive solvent where the digestion reaction takes place. The digestive solvent must be effective to digest lignins. The digestive solvent is typically a solvent mixture having a boiling point of at least 40°C.

In some embodiments, at least a portion of oxygenated hydrocarbons produced in the hydrothermal hydrocatalytic reaction zone are recycled within the process and system to at least, in part, form the *in situ* generated solvent, which is used in the biomass digestion process. Further, by controlling the rate of digestion of biomass to lower molecular weight fragments in the hydrothermal hydrocatalytic reaction (e.g., hydrogenolysis process), hydrogenation reactions can be conducted along with the hydrogenolysis reaction at temperatures ranging of from 110°C, preferably from about 150°C to less than 300°C, most preferably from about 240°C to about 270°C. As a result the fuel forming potential of the biomass feedstock fed to the process can be increased.

In various embodiments, the fluid phase digestion medium (liquid digestive solvent) in which the hydrothermal digestion and catalytic reduction reaction (in the hydrothermal hydrocatalytic reaction zone) are conducted, may comprise an organic solvent and water. The liquid digestive solvent mixture may have a normal boiling point

(i.e., at atmospheric pressure) of at least 40°C, preferably at least 60°C, more preferably at least 80°C. Although any organic solvent that contains some oxygen atoms may be used as a digestion solvent, particularly advantageous organic solvents are those that can be directly converted into fuel blends and other materials and hence do not require extensive separation from intermediate streams used in the production of biofuels, or co-product streams used as fuel or separated and processed as chemical products. That is, particularly advantageous organic solvents are those that may be co-processed along with the alcoholic or oxygenated components during downstream processing reactions into fuel blends and other materials. Suitable organic solvents in this regard may include, for example, ethanol, ethylene glycol, propylene glycol, glycerol, phenolics and any combination thereof. *In situ* generated organic solvents are particularly desirable in this regard.

In some embodiments, the liquid phase digestive solvent may comprise between about 1% water and about 99% water. Although higher percentages of water may be more favorable from an environmental standpoint, higher quantities of organic solvent may more effectively promote hydrothermal digestion due to the organic solvent's greater propensity to solubilize carbohydrates and promote catalytic reduction of the soluble carbohydrates. In some embodiments, the liquid phase digestive solvent may comprise about 90% or less water by weight. In other embodiments, the fluid phase digestion medium may comprise about 80% or less water by weight, or about 70% or less water by weight, or about 60% or less water by weight, or about 50% or less water by weight, or about 40% or less water by weight, or about 30% or less water by weight, or about 20% or less water by weight, or about 10% or less water by weight, or about 5% or less water by weight.

In some embodiments, catalysts capable of activating molecular hydrogen hydrothermal hydrocatalytic catalysts, which are capable of activating molecular hydrogen (e.g., hydrogenolysis catalyst) and conducting a catalytic reduction reaction may comprise a metal such as, for example, Cr, Mo, W, Re, Mn, Cu, Cd, Fe, Co, Ni, Pt, Pd, Rh, Ru, Ir, Os, and alloys or any combination thereof, either alone or with promoters such as Au, Ag, Cr, Zn, Mn, Sn, Bi, B, O, and alloys or any combination thereof. In some embodiments, the catalysts and promoters may allow for hydrogenation and hydrogenolysis reactions to occur at the same time or in succession of one another. In some embodiments, such catalysts may also comprise a carbonaceous pyropolymer catalyst containing transition metals (e.g., Cr, Mo, W, Re, Mn, Cu, and Cd) or Group VIII metals (e.g., Fe, Co, Ni, Pt, Pd, Rh, Ru, Ir, and Os). In some embodiments, the foregoing catalysts may be combined

with an alkaline earth metal oxide or adhered to a catalytically active support. In some or other embodiments, the catalyst may be deposited on a catalyst support that may not itself be catalytically active.

In some embodiments, the hydrothermal hydrocatalytic catalyst may comprise a  
5 slurry catalyst. In some embodiments, the slurry catalyst may comprise a poison-tolerant catalyst. As used herein the term “poison-tolerant catalyst” refers to a catalyst that is capable of activating molecular hydrogen without needing to be regenerated or replaced due to low catalytic activity for at least about 12 hours of continuous operation. Use of a poison-tolerant catalyst may be particularly desirable when reacting soluble carbohydrates  
10 derived from cellulosic biomass solids that have not had catalyst poisons removed therefrom. Catalysts that are not poison tolerant may also be used to achieve a similar result, but they may need to be regenerated or replaced more frequently than does a poison-tolerant catalyst.

In some embodiments, suitable poison-tolerant catalysts may include, for example,  
15 sulfided catalysts. In some or other embodiments, nitrided catalysts may be used as poison-tolerant catalysts. Sulfided catalysts suitable for activating molecular hydrogen and buffers suitable for use with such catalysts are described in commonly owned U. S. Patent Application Publication Nos. US2012/0317872, US2013/0109896, US2012/0317873, and US20140166221. Sulfiding may take place by treating the catalyst with hydrogen sulfide  
20 or an alternative sulfiding agent, optionally while the catalyst is disposed on a solid support. In more particular embodiments, the poison-tolerant catalyst may comprise (a) sulfur and (b) Mo or W and (c) Co and/or Ni or mixtures thereof. The pH buffering agent, may be suitable be an inorganic salt, particularly alkali salts such as, for example, potassium hydroxide, sodium hydroxide, and potassium carbonate or ammonia. In other  
25 embodiments, catalysts containing Pt or Pd may also be effective poison-tolerant catalysts for use in the techniques described herein. When mediating *in situ* catalytic reduction reaction processes, sulfided catalysts may be particularly well suited to form reaction products comprising a substantial fraction of glycols (*e.g.*, C<sub>2</sub> – C<sub>6</sub> glycols) without producing excessive amounts of the corresponding monohydric alcohols. Although  
30 poison-tolerant catalysts, particularly sulfided catalysts, may be well suited for forming glycols from soluble carbohydrates, it is to be recognized that other types of catalysts, which may not necessarily be poison-tolerant, may also be used to achieve a like result in alternative embodiments. As will be recognized by one having ordinary skill in the art,

various reaction parameters (*e.g.*, temperature, pressure, catalyst composition, introduction of other components, and the like) may be modified to favor the formation of a desired reaction product. Given the benefit of the present disclosure, one having ordinary skill in the art will be able to alter various reaction parameters to change the product distribution  
5 obtained from a particular catalyst and set of reactants.

In some embodiments, slurry catalysts suitable for use in the methods described herein may be sulfided by dispersing a slurry catalyst in a fluid phase and adding a sulfiding agent thereto. Suitable sulfiding agents may include, for example, organic sulfoxides (*e.g.*, dimethyl sulfoxide), hydrogen sulfide, salts of hydrogen sulfide (*e.g.*,  
10 NaSH), and the like. In some embodiments, the slurry catalyst may be concentrated in the fluid phase after sulfiding, and the concentrated slurry may then be distributed in the cellulosic biomass solids using fluid flow. Illustrative techniques for catalyst sulfiding that may be used in conjunction with the methods described herein are described in U. S. Patent Application Publication No. US2010/0236988.

In various embodiments, slurry catalysts used in conjunction with the methods described herein may have a particulate size of about 250 microns or less. In some  
15 embodiments, the slurry catalyst may have a particulate size of about 100 microns or less, or about 10 microns or less. In some embodiments, the minimum particulate size of the slurry catalyst may be about 1 micron. In some embodiments, the slurry catalyst may  
20 comprise catalyst fines in the processes described herein.

Catalysts that are not particularly poison-tolerant may also be used in conjunction with the techniques described herein. Such catalysts may include, for example, Ru, Pt, Pd, or compounds thereof disposed on a solid support such as, for example, Ru on titanium  
25 dioxide or Ru on carbon. Although such catalysts may not have particular poison tolerance, they may be regenerable, such as through exposure of the catalyst to water at elevated temperatures, which may be in either a subcritical state or a supercritical state.

In some embodiments, the catalysts used in conjunction with the processes described herein may be operable to generate molecular hydrogen. For example, in some  
30 embodiments, catalysts suitable for aqueous phase reforming (*i.e.*, APR catalysts) may be used. Suitable APR catalysts may include, for example, catalysts comprising Pt, Pd, Ru, Ni, Co, or other Group VIII metals alloyed or modified with Re, Mo, Sn, or other metals such as described in U. S. Patent Publication No. US2008/0300435.

As described above, one or more liquid phases may be present when digesting cellulosic biomass solids. Particularly when cellulosic biomass solids are fed continuously or semi-continuously to the hydrothermal (hydrocatalytic) digestion unit, digestion of the cellulosic biomass solids may produce multiple liquid phases in the hydrothermal digestion unit. The liquid phases may be immiscible with one another, or they may be at least partially miscible with one another. In some embodiments, the one or more liquid phases may comprise a phenolics liquid phase comprising lignin or a product formed therefrom, an aqueous phase comprising the alcoholic component, a light organics phase, or any combination thereof. The alcoholic component being produced from the cellulosic biomass solids may be partitioned between the one or more liquid phases, or the alcoholic component may be located substantially in a single liquid phase. For example, the alcoholic component being produced from the cellulosic biomass solids may be located predominantly in an aqueous phase (*e.g.*, an aqueous phase digestion solvent), although minor amounts of the alcoholic component may be partitioned to the phenolics liquid phase or a light organics phase. In various embodiments, the slurry catalyst may accumulate in the phenolics liquid phase as it forms, thereby complicating the return of the slurry catalyst to the cellulosic biomass solids in the manner described above. Alternative configurations for distributing slurry catalyst particulates in the cellulosic biomass solids when excessive catalyst accumulation in the phenolics liquid phase has occurred are described hereinafter.

Accumulation of the slurry catalyst in the phenolics liquid phase may, in some embodiments, be addressed by conveying this phase and the accumulated slurry catalyst therein to the same location where a fluid phase digestion medium is being contacted with cellulosic biomass solids. The fluid phase digestion medium and the phenolics liquid phase may be conveyed to the cellulosic biomass solids together or separately. Thusly, either the fluid phase digestion medium and/or the phenolics liquid phase may motivate return the slurry catalyst back to the cellulosic biomass solids such that continued stabilization of soluble carbohydrates may take place. In some embodiments, at least a portion of the lignin in the phenolics liquid phase may be depolymerized before or while conveying the phenolics liquid phase for redistribution of the slurry catalyst. At least partial depolymerization of the lignin in the phenolics liquid phase may reduce the viscosity of this phase and make it easier to convey. Lignin depolymerization may take place chemically by hydrolyzing the lignin (*e.g.*, with a base) or thermally by heating the lignin to a temperature of at least about 250°C in the presence of molecular hydrogen and

the slurry catalyst. Further details regarding lignin depolymerization and the use of viscosity monitoring as a means of process control are described in commonly owned U. S. Patent Application Publication No. US20140117275.

In some embodiments, a phenolics liquid phase formed from the cellulosic biomass solids may be further processed. Processing of the phenolics liquid phase may facilitate the catalytic reduction reaction being performed to stabilize soluble carbohydrates. In addition, further processing of the phenolics liquid phase may be coupled with the production of glycols or dried monohydric alcohols for feeding to a condensation catalyst. Moreover, further processing of the phenolics liquid phase may produce methanol and phenolic compounds from degradation of the lignin present in the cellulosic biomass solids, thereby increasing the overall weight percentage of the cellulosic biomass solids that may be transformed into useful materials. Finally, further processing of the phenolics liquid phase may improve the lifetime of the slurry catalyst.

Various techniques for processing a phenolics liquid phase produced from cellulosic biomass solids are described in commonly owned U. S. Patent Application Publication Nos. US20140121419, US20140117277. As described therein, in some embodiments, the viscosity of the phenolics liquid phase may be reduced in order to facilitate conveyance or handling of the phenolics liquid phase. As further described therein, deviscosification of the phenolics liquid phase may take place by chemically hydrolyzing the lignin and/or heating the phenolics liquid phase in the presence of molecular hydrogen (*i.e.*, hydrotreating) to depolymerize at least a portion of the lignin present therein in the presence of accumulated slurry catalyst. Deviscosification of the phenolics liquid phase may take place before or after separation of the phenolics liquid phase from one or more of the other liquid phases present, and thermal deviscosification may be coupled to the reaction or series of reactions used to produce the alcoholic component from the cellulosic biomass solids. Moreover, after deviscosification of the phenolics liquid phase, the slurry catalyst may be removed therefrom. The catalyst may then be regenerated, returned to the cellulosic biomass solids, or any combination thereof. In some embodiments, heating of the cellulosic biomass solids and the fluid phase digestion medium (liquid digestive solvent) to form soluble carbohydrates and a phenolics liquid phase may take place while the cellulosic biomass solids are in a pressurized state. As used herein, the term “pressurized state” refers to a pressure that is greater than atmospheric pressure (1 bar). Heating a fluid phase digestion medium in a pressurized

state may allow the normal boiling point of the digestion solvent to be exceeded, thereby allowing the rate of hydrothermal digestion to be increased relative to lower temperature digestion processes. In some embodiments, heating the cellulosic biomass solids and the fluid phase digestion medium may take place at a pressure of at least about 30 bar. In some embodiments, heating the cellulosic biomass solids and the fluid phase digestion medium may take place at a pressure of at least about 60 bar, or at a pressure of at least about 90 bar. In some embodiments, heating the cellulosic biomass solids and the fluid phase digestion medium may take place at a pressure ranging between about 30 bar and about 430 bar. In some embodiments, heating the cellulosic biomass solids and the fluid phase digestion medium may take place at a pressure ranging between about 50 bar and about 330 bar, or at a pressure ranging between about 70 bar and about 130 bar, or at a pressure ranging between about 30 bar and about 130 bar.

The digestion and hydrodeoxygenation of the biomass solid described above, produces a stable oxygenated hydrocarbon intermediate product, that have a viscosity of less than 100 centipoise (at 50°C), preferably less than 40 centipoise, a diol content (e.g., glycols) of at least 2 wt%, preferably of at least 5wt%, less than 2wt% of sugar, and less than 2wt% acid (based on acetic acid equivalent), based on the total stream composition, , and at least 60% of carbon exists in molecules having 9 carbon atoms or less. By the term “stable”, the product is stable enough to be stored for at least 30 days where the viscosity does not change more than 50% and the main components (top 10 percent based on mass basis) does not change in concentration by more than 10%.

Optionally, the stable oxygenated hydrocarbon intermediate product can be vaporized to allow ash separation from the liquid product. The vaporized stable oxygenated hydrocarbon can then be provided to the diol conversion zone described below.

It was found that contacting (and reacting) the oxygenated hydrocarbon intermediate containing diols with an acidic amorphous silica alumina catalyst, preferably mildly acidic amorphous silica alumina catalyst, at a temperature in the range of 300°C to 400°C producing monooxygenated stream prior to condensation reaction can reduce coke formation on the catalyst during subsequent condensation reaction.

In the inventive process, at least a portion of the stable oxygenated hydrocarbon intermediate product is contacted, in a diol conversion zone, **30**, with an acidic amorphous silica alumina catalyst at a temperature in the range from 300°C to 400°C, preferably 325°C to 375°C, thereby producing monooxygenated stream **32** containing water and

monooxygenates having a normal boiling point of at least 40°C. The temperature and pressure is at a range that optimizes diol conversion while minimizing coke formation (by oligomerization or condensation reactions). The pressure range may be from ambient pressure (atmospheric) to slight partial pressure, for example, total pressure of up to about  
5 200psi. The reaction typically converts at least 25%, preferably at least 50%, most preferably at least 75% of diols initially present. Typically, the weight hourly space velocity is in the range of 0.2 to 5 for the monooxygenate formation step.

The acidic amorphous silica-alumina catalyst is a solid catalyst that may be prepared in a number of ways which are known in the art. For example, by precipitating  
10 alumina in a silica slurry, followed by firing. Some other examples include precipitation of hydrous alumina onto amorphous silica hydrogel, reacting a silica sol with an alumina sol, coprecipitation from sodium silicate / aluminum salt solution. The sulfate and the sodium, which may be introduced with the alumina precursors and sulfuric acid, may be removed by washing. The resulting silica alumina material can be shaped in various shapes, for  
15 example, by extruding, oil drop process, or pressing. To produce the acidic amorphous silica-alumina catalyst, the material is dried and calcined. The BET surface area of the catalyst is typically greater than 200 m<sup>2</sup>/g, preferably in the range of 300 m<sup>2</sup>/g to 500 m<sup>2</sup>/g. The total pore volume is typically in the range of 0.7 to 1.0 cc/g measured using water method. Although described herein as amorphous, the silica alumina materials useful in  
20 embodiments described herein may contain a minor amount of crystalline alumina and/or aluminosilicate, depending on the source of the alumina material used to prepare the precipitated alumina-silica precursor, the amount of the alumina in the alumina-silica, as well as the calcination temperature. The ratio of silica to alumina may vary between 1:99 to 99:1, preferably 15:85 to 96:4. In some embodiment, 15:85 to 65:35, preferably 15:85  
25 to 30:70 for low silica content solid amorphous silica-alumina catalyst, preferably 35:65 to 55:45 for higher silica solid amorphous silica-alumina catalyst. In another embodiment, milder acidity amorphous silica to alumina catalyst, the ratio of silica to alumina may vary between 45:55 to 96:4, more preferably 45:55 to 90:10. Solid acid amorphous silica-alumina catalyst is available commercially, for example, from Criterion Catalyst Co., such  
30 as X-600 catalyst series, X-503 catalyst, X-801 catalyst or from CRI Catalyst Co. such as KL-7122 catalyst.

As used herein, the term “condensation reaction” will refer to a chemical transformation in which two or more molecules are coupled with one another to form a



carbon-carbon bond in a higher molecular weight compound, usually accompanied by the loss of a small molecule such as water or an alcohol. The term “condensation catalyst” will refer to a catalyst that facilitates, causes or accelerates such chemical transformation.

The monooxygenated stream (as whole or in part as a slip stream) can be condensed (in this instance referred to liquid condensation without chemical transformation) in a cooling zone, **40**, to liquid producing an aqueous phase and an organic phase. It has been found that the process provides additional advantage that the monooxygenated stream can be readily phase separated into an aqueous phase and an organic phase upon (physical) condensation, thus allowing the aqueous phase containing water and a residual amount of unconverted monooxygenated compounds and diols of carbon number less than four, to be readily removed from the organic phase enriched in monooxygenated organic compounds greater than carbon number four, and phenolic compounds. This removal of the aqueous phase, **45**, provides for an additional advantage of removal of water from the process that reduce the degradation of the subsequent condensation catalyst and extends catalyst life.

The separation of the aqueous phase and the organic phase can be by decanting, liquid-liquid extraction, centrifugation, or use of hydroclones or other devices using the density differences between immiscible phases as the basis for separation. Distillation may also be used for a process where the digestion and hydrodeoxygenation step has been optimized to produce mainly diols and higher molecular weight monooxygenations, such that water with only a small amount of monooxygenates less than C4 are present as the aqueous miscible component. .

Further, the organic phase provides a good digestive solvent. At least a first portion of the organic phase (monooxygenates having a boiling point of at least 40°C) and/or non-condensed monooxygenates if any (monooxygenate stream prior to physical condensation) is recycled via a recycle stream (recycle line), **47**, to the hydrothermal catalytic reaction zone (digestion and hydrodeoxygenation) as a portion of the digestive solvent. It has been found that the monooxygenate stream produced by the diol conversion zone after removal of water is a good digestive solvent for the digestion and hydrodeoxygenation of the biomass solid. Such monooxygenate stream contains, for example, ketones and cyclic ethers. Such stream contains minimal water and contains monooxygenates that can be converted to biofuel components in the subsequent condensation reaction step(s).

At least a second portion of the organic phase having boiling point of at least 40°C is contacted with a solid condensation catalyst at a temperature in the range from 275°C to about 425°C producing a higher hydrocarbons stream in a condensation reaction zone, 50.

In various embodiments, the higher molecular weight compound produced by the condensation reaction may comprise  $\geq C_4$  hydrocarbons. In some or other embodiments, the higher molecular weight compound produced by the condensation reaction may comprise  $\geq C_6$  hydrocarbons. In some embodiments, the higher molecular weight compound produced by the condensation reaction may comprise  $C_4 - C_{30}$  hydrocarbons. In some embodiments, the higher molecular weight compound produced by the condensation reaction may comprise  $C_6 - C_{30}$  hydrocarbons. In still other embodiments, the higher molecular weight compound produced by the condensation reaction may comprise  $C_4 - C_{24}$  hydrocarbons, or  $C_6 - C_{24}$  hydrocarbons, or  $C_4 - C_{18}$  hydrocarbons, or  $C_6 - C_{18}$  hydrocarbons, or  $C_4 - C_{12}$  hydrocarbons, or  $C_6 - C_{12}$  hydrocarbons. As used herein, the term “hydrocarbons” refers to compounds containing both carbon and hydrogen without reference to other elements that may be present. Thus, heteroatom-substituted compounds are also described herein by the term “hydrocarbons.”

The particular composition of the higher molecular weight compound produced by the condensation reaction may vary depending on the catalyst(s) and temperatures used for both the catalytic reduction reaction and the condensation reaction, as well as other parameters such as pressure.

In some embodiments, a single catalyst may be used to form a higher molecular weight compound via a condensation reaction. Without being bound by any theory or mechanism, it is believed that such catalysts may mediate an initial dehydrogenation of the alcoholic component, followed by a condensation reaction of the dehydrogenated alcoholic component. Zeolite catalysts are one type of catalyst suitable for directly converting alcohols to condensation products in such a manner. A particularly suitable zeolite catalyst in this regard may be ZSM-5, although other zeolite catalysts may also be suitable.

In some embodiments, two catalysts may be used to form a higher molecular weight compound via a condensation reaction. Without being bound by any theory or mechanism, it is believed that the first catalyst may mediate an initial dehydration of the alcoholic component, and the second catalyst may mediate a condensation reaction of the dehydrated alcoholic component. Like the single-catalyst embodiments discussed previously above, in some embodiments, zeolite catalysts may be used as either the first

catalyst or the second catalyst. Again, a particularly suitable zeolite catalyst in this regard may be ZSM-5, although other zeolite catalysts may also be suitable.

Various catalytic processes may be used to form higher molecular weight compounds by a condensation reaction. In some embodiments, the catalyst used for mediating a condensation reaction may comprise a basic site, or both an acidic site and a basic site. Catalysts comprising both an acidic site and a basic site will be referred to herein as multi-functional catalysts. In some or other embodiments, a catalyst used for mediating a condensation reaction may comprise one or more metal atoms. Any of the condensation catalysts may also optionally be disposed on a solid support, if desired.

In some embodiments, the condensation catalyst may comprise a basic catalyst comprising Li, Na, K, Cs, B, Rb, Mg, Ca, Sr, Si, Ba, Al, Zn, Ce, La, Y, Sc, Y, Zr, Ti, hydrotalcite, zinc-aluminate, phosphate, base-treated aluminosilicate zeolite, a basic resin, basic nitride, alloys or any combination thereof. In some embodiments, the basic catalyst may also comprise an oxide of Ti, Zr, V, Nb, Ta, Mo, Cr, W, Mn, Re, Al, Ga, In, Co, Ni, Si, Cu, Zn, Sn, Cd, Mg, P, Fe, or any combination thereof. In some embodiments, the basic catalyst may comprise a mixed-oxide basic catalyst. Suitable mixed-oxide basic catalysts may comprise, for example, Si--Mg--O, Mg--Ti--O, Y--Mg--O, Y--Zr--O, Ti--Zr--O, Ce--Zr--O, Ce--Mg--O, Ca--Zr--O, La--Zr--O, B--Zr--O, La--Ti--O, B--Ti--O, and any combination thereof. In some embodiments, the condensation catalyst may further include a metal or alloys comprising metals such as, for example, Cu, Ag, Au, Pt, Ni, Fe, Co, Ru, Zn, Cd, Ga, In, Rh, Pd, Ir, Re, Mn, Cr, Mo, W, Sn, Bi, Pb, Os, alloys and combinations thereof. Use of metals in the condensation catalyst may be desirable when a dehydrogenation reaction is to be carried out in concert with the condensation reaction. Basic resins may include resins that exhibit basic functionality. The basic catalyst may be self-supporting or adhered to a support containing a material such as, for example, carbon, silica, alumina, zirconia, titania, vanadia, ceria, nitride, boron nitride, a heteropolyacid, alloys and mixtures thereof.

In some embodiments, the condensation catalyst may comprise a hydrotalcite material derived from a combination of MgO and Al<sub>2</sub>O<sub>3</sub>. In some embodiments, the condensation catalyst may comprise a zinc aluminate spinel formed from a combination of ZnO and Al<sub>2</sub>O<sub>3</sub>. In still other embodiments, the condensation catalyst may comprise a combination of ZnO, Al<sub>2</sub>O<sub>3</sub>, and CuO. Each of these materials may also contain an additional metal or alloy, including those more generally referenced above for basic

condensation catalysts. In more particular embodiments, the additional metal or alloy may comprise a Group 10 metal such Pd, Pt, or any combination thereof.

[In some embodiments, the condensation catalyst may comprise a basic catalyst comprising a metal oxide containing, for example, Cu, Ni, Zn, V, Zr, or any mixture thereof. In some or other embodiments, the condensation catalyst may comprise a zinc aluminate containing, for example, Pt, Pd, Cu, Ni, or any mixture thereof.

In some embodiments, the condensation catalyst may comprise a multi-functional catalyst having both an acidic functionality and a basic functionality. Such condensation catalysts may comprise a hydrotalcite, a zinc-aluminate, a phosphate, Li, Na, K, Cs, B, Rb, Mg, Si, Ca, Sr, Ba, Al, Ce, La, Sc, Y, Zr, Ti, Zn, Cr, or any combination thereof. In further embodiments, the multi-functional catalyst may also include one or more oxides from the group of Ti, Zr, V, Nb, Ta, Mo, Cr, W, Mn, Re, Al, Ga, In, Fe, Co, Ir, Ni, Si, Cu, Zn, Sn, Cd, P, and any combination thereof. In some embodiments, the multi-functional catalyst may include a metal such as, for example, Cu, Ag, Au, Pt, Ni, Fe, Co, Ru, Zn, Cd, Ga, In, Rh, Pd, Ir, Re, Mn, Cr, Mo, W, Sn, Os, alloys or combinations thereof. The basic catalyst may be self-supporting or adhered to a support containing a material such as, for example, carbon, silica, alumina, zirconia, titania, vanadia, ceria, nitride, boron nitride, a heteropolyacid, alloys and mixtures thereof.

In some embodiments, the condensation catalyst may comprise a metal oxide containing Pd, Pt, Cu or Ni. In still other embodiments, the condensation catalyst may comprise an aluminate or a zirconium metal oxide containing Mg and Cu, Pt, Pd or Ni. In still other embodiments, a multi-functional catalyst may comprise a hydroxyapatite (HAP) combined with one or more of the above metals.

In some embodiments, the condensation catalyst may also include a zeolite and other microporous supports that contain Group IA compounds, such as Li, Na, K, Cs and Rb. Preferably, the Group IA material may be present in an amount less than that required to neutralize the acidic nature of the support. A metal function may also be provided by the addition of group VIIIB metals, or Cu, Ga, In, Zn or Sn. In some embodiments, the condensation catalyst may be derived from the combination of MgO and Al<sub>2</sub>O<sub>3</sub> to form a hydrotalcite material. Another condensation catalyst may comprise a combination of MgO and ZrO<sub>2</sub>, or a combination of ZnO and Al<sub>2</sub>O<sub>3</sub>. Each of these materials may also contain an additional metal function provided by copper or a Group VIIIB metal, such as Ni, Pd, Pt, or combinations of the foregoing.

The condensation reaction mediated by the condensation catalyst may be carried out in any reactor of suitable design, including continuous-flow, batch, semi-batch or multi-system reactors, without limitation as to design, size, geometry, flow rates, and the like. The reactor system may also use a fluidized catalytic bed system, a swing bed  
5 system, fixed bed system, a moving bed system, or a combination of the above. In some embodiments, bi-phasic (*e.g.*, liquid-liquid) and tri-phasic (*e.g.*, liquid-liquid-solid) reactors may be used to carry out the condensation reaction.

The condensation products **52** may be aromatics-rich hydrocarbon stream when a shape selective condensation catalyst, such as zeolitic catalyst, particularly ZSM-5 catalyst  
10 is used in the condensation reaction. To produce aromatics-rich hydrocarbon stream, the acidic ZSM-5 catalyst is contacted at a temperature in the range from 325°C to about 425°C, preferably 350°C to 400°C, in the condensation reaction zone. The temperature and pressure is at a range that optimizes condensation reaction while minimizing coke formation. The pressure range may be from ambient pressure (atmospheric) to slight partial  
15 pressure, for example, total pressure of up to about 200psi. The aromatics rich hydrocarbon stream can optionally be washed with aqueous base such as sodium hydroxide, potassium hydroxide to remove residual acids and phenolics (washing zone, **70**) to produce biofuel useful as gasoline, **75**. These aqueous base typically have a pH of at least 9, preferably at least 10.

The condensation product **52**, may be low aromatics, paraffinics-containing stream when other than shape selective condensation catalyst described above is used in the condensation reaction. The low aromatics, paraffinic-containing stream may further  
20 treated in a hydrotreating step (hydrotreating zone, **70**) to produce biofuel useful as diesel, **75**. This step can be any conventional hydrotreating process. This includes fixed or ebulated bed operations at conventional operating conditions such as temperatures in the range of 250° C to 450° C, preferably 300° C to 380° C. Pressures are also conventional such as 20-70 bar of hydrogen. Catalysts used in the hydrotreating step are preferably those employed conventionally, such as mixed cobalt and/or nickel and molybdenum  
25 sulfides supported on alumina and mixed nickel and tungsten sulfides supported on alumina or silica. The combined process of this invention will also benefit newly developed catalysts such as those containing ruthenium sulfide and catalysts using novel supports such as silica-aluminas, carbons or other materials. For details on the state of the art in conventional hydrotreating processes, we refer to “Hydrotreating Catalysis—Science  
30

and Technology”, by H. Topsøe, B.S. Clausen and F. E. Massoth, Springer-Verlag Publishers, Heidelberg, 1996.

To facilitate a better understanding of the present invention, the following examples of preferred embodiments are given. In no way should the following examples be read to  
5 limit, or to define, the scope of the invention.

### **ILLUSTRATIVE EXAMPLES**

#### **Example 1: Digestion and Hydrodeoxygenation of Lignocellulosic Biomass**

To screen for reaction selectivity in digestion of biomass, a 50-milliliter Parr 4590 reactor was charged with 6.01 grams of tetrahydrofuran and 17.99 grams of deionized water solvent, together with 0.099 grams of potassium hydroxide, and 0.1075 grams of Raney<sup>TM</sup> cobalt catalyst (from WR Grace 2724).

The reactor was then charged with 1.99 grams of southern pine mini-chips (10% moisture), of nominal size 3 x 5 x 5 mm in dimension, before pressuring with 52 bar of hydrogen, and heating with stirring to 190 °C for 1 hour, followed by heating to 240 °C for 4 hours. At the end of the 5-hour reaction cycle, the reactor was cooled, and allowed to gravity settle overnight.

The reaction cycle was repeated three times via addition of 2 more grams of wood chips, and re-pressuring with 52 bar of H<sub>2</sub> before heating using the same temperature profile.

After four cycles, the reactor product was analyzed by gas chromatography using a 60-m x 0.32 mm ID DB-5 column of 1 micrometer thickness, with 50:1 split ratio, 2 ml/min helium flow, and column oven at 40°C for 8 minutes, followed by ramp to 285°C at 10°C/min, and a hold time of 53.5 minutes. The injector temperature was set at 250°C, and the detector temperature was set at 300°C. A range of alkanes, ketone and aldehyde monooxygenates as well as glycol intermediates including ethylene glycol (EG), 1,2-propylene glycol (PG) and glycerol were observed. Total products observed in the gas chromatographic analysis summed to about 30% of the maximum expected yield if all carbohydrates were converted to mono-oxygenated or diol products. Ethylene glycol (EG) formation, and 1,2-propylene glycol (PG) formation comprised approximately 20% of observed products. All observed reaction products exhibited volatility greater than C6 sugar alcohol sorbitol.

#### **Examples 2 and 3: Digestion and Hydrodeoxygenation of Lignocellulosic Biomass**

Example 1 was repeated with use of 0.3083 (Example 2) and 0.4051 (Example 3) grams of Raney Cobalt catalyst. For example 2, the amount of ethylene glycol formed increased to 1.49 weight percent, and 1,2-propylene glycol formation increased to 1.65 weight percent. Total GC observable products increased to 10.5 wt.%, or 96% of the expected product formation from selective conversion of carbohydrates present in wood feed. Glycols EG and PG comprised about 29% of observed products.

For example 3 with 0.4051 grams of Raney Cobalt catalyst, 1.4 wt.% ethylene glycol was formed, together with 1.64 wt.% of 1,2-propylene glycol. Observed yields were estimated as 99% of those expected from complete conversion of carbohydrates in wood feed, while ethylene glycol and 1,2-propylene glycol comprised about 28% of  
5 observed products.

These examples show formation of diols ethylene glycol and 1,2-propylene glycol via simultaneous digestion and hydrotreating reaction of woody biomass, in the presence of hydrogen and a metal catalyst capable of activating molecular hydrogen. The diols were the largest single components observed in gas chromatographic analysis of product.  
10 Yields were increased by increasing the catalyst concentration, to increase the rate of hydrotreating and stabilization of intermediates derived from the hydrothermal digestion of woody biomass.

Example 4: Digestion and Hydrodeoxygenation of Lignocellulosic Biomass

A 75-ml Parr5000 reactor was charged with 6.04 grams of 2, 6-dimethyl phenol  
15 (xyleneol), 18.06 grams of deionized water, 0.207 grams of a mixture of 860 ppm dimethylsulfoxide in deionized water, 0.085 grams of potassium hydroxide buffer, and 0.45 grams of nickel-oxide promoted cobalt molybdate catalyst (DC-2534, containing 1–10% cobalt oxide and molybdenum trioxide (up to 30 wt.%) on alumina, and less than 2% nickel), obtained from Criterion Catalyst & Technologies L.P., and sulfided by the method  
20 described in US2010/0236988 Example 5.

The reactor was then charged with 2.07 grams of southern pine mini-chips (10% moisture), of nominal size 3 x 5 x 5 mm in dimension, before pressuring with 40 bar of hydrogen, and heating to 200 °C for 1 hours, then ramping to 255 °C for 1.5 hours.

GC analysis of final liquid revealed 1.63 wt.% ethylene glycol and 1.60 wt.%  
25 propylene glycol, for a yield of more than 30% of the GC-measured products derived from carbohydrates.

Example 5: Sulfided Cobalt Molybdate Catalyst at higher temperature

Example 4 was repeated with a heating cycle of 1 hour at 200 °C followed by 1.5 hours at 265 °C. Observed ethylene glycol and propylene glycol produced was 1.01 and  
30 1.08 wt.% respectively, with the higher temperature end condition.



Examples 6 & 7: Digestion and Hydrodeoxygenation of Lignocellulosic Biomass

For Example 6, the experiment of Example 4 was repeated with a solvent mixture of 12.5% cresol in deionized water, and a heating cycle of 1 hour at 190 °C followed by 4 hours at 240 °C. GC analysis indicated a yield of ethylene glycol (EG) and 1,2-propylene glycol (PG) corresponding to 6.75% of total carbohydrates charged, with ethylene glycol comprising 36% of these total of these diols. Wood digestion was complete, and more than 100 components with retention time less than sorbitol were detected in the GC analysis.

For Example 7, the experiment of Example 6 was repeated with addition of 1.8 grams of 99% purity cellulosic floc, instead of pine wood. Yield of EG and PG was calculated as 8.5% of the total carbohydrate charged.

Examples 8 & 9: Digestion and Hydrodeoxygenation of Lignocellulosic Biomass

Experiment 6 was repeated with use of 0.251 grams of 5% Platinum/alumina as catalyst (STREM Chemicals). The reactor was again heated for 1 hour at 190 °C followed by 4 hours at 240 °C. Yield of diols EG and PG was 4.78% of the carbohydrate charged to the reactor.

Experiment 7 was repeated with 0.248 grams of the 5% Pt/alumina catalyst as reaction catalyst. Yields of diols EG and PG were calculated as 5.26% of the total carbohydrate charged to the reactor as cellulosic floc.

Experiments 6 – 9 conducted under otherwise identical conditions, show substantial formation of diols as products, among a large number of components formed with boiling points less than sorbitol. Yields of diols EG and PG were higher with the sulfided cobalt molybdate catalyst, than for the supported platinum catalyst, under the conditions tested.

Example 10: Generation of Digester/Hydrodeoxygenation Intermediate

A 2-Liter Parr reactor with was charged with 1000.5 grams of deionized water solvent, 0.401 grams of potassium hydroxide buffer, and 29.8 grams of Raney Cobalt 2724 catalyst (WR Grace). 66.7 grams of southern pine wood at nominal 10% moisture were added for reaction cycles conducted under 52 bar of H<sub>2</sub>, with heating to 160 °C for 1 hour, followed by 190°C for 1 hour, followed by 240°C for 3 hours.

Six cycles of wood addition were completed, with KOH buffer added at 1.5 – 2.0 grams per cycle, to maintain pH greater than 4.5. After 6 cycles, 250 grams of toluene were added (Sigma-Aldrich HPLC grade), and the reactor was stirred for one hour at 150 °C to extract. Stirring was stopped, the reactor was cooled, vented, and opened for removal of liquid phases.

44.2 grams of organic upper layer, and 1019 grams of aqueous lower layer were decanted via suction. The remaining wood residue and catalyst were dissolved in 250 grams of acetone solvent, for analysis by gas chromatography.

A sample of the aqueous layer product was analyzed by gas chromatography using a 60-m x 0.32 mm ID DB-5 column of 1  $\mu$ m thickness, with 50:1 split ratio, 2 ml/min helium flow, and column oven at 40°C for 8 minutes, followed by ramp to 285°C at 10°C/min, and a hold time of 53.5 minutes. The injector temperature was set at 250°C, and the detector temperature was set at 300°C. Gas Chromatographic – Mass Spec (GCMS) was effected using the same protocol.

Principal products were ethylene glycol, 1,2-proplene glycol, along with light monooxygenates C1 – C3, intermediate C4 – C6 monooxygenates (ketones, alcohols) and diols. Several phenolic components were formed (methoxypropylphenol, propylphenol) and extracted via toluene into the upper organic layer.

Example 11: Distillation of Aqueous Product From Reaction

771.6 grams of the aqueous intermediate product from Example 10 and 8.1 grams of ceramic boiling chips were charged to a 2-liter 24/40 3-neck flask equipped with a short path Vigreux column (approximately 4 stages). The flask was brought to a boil under a nominal atmosphere of nitrogen, and 702.5 grams of a water-rich cut were removed. Vacuum was applied (approximately 50- 100 Torr), and 77.9 grams of a middle boiling cut were removed as the bottoms kettle temperature was ramped from 100 to 350 °C. Maximum tops temperature was 150 °C. A bottoms residue of 13.1 grams was obtained, for a mass balance closure of 98.8%.

The middle boiling second distillate fraction was analyzed by GC-mass spec, to reveal the composition shown in Table 1 below. A large number of diol intermediates were formed.

Example 12:

Feed: Fraction 2 from Example 11 was diluted 1/1 with DI water

7.5g of ASA X600 (amorphous silica alumina trilobe extrudate from Criterion Catalyst Co., LP, 55% alumina ( $\text{Al}_2\text{O}_3$ ), 45% silica ( $\text{SiO}_2$ )) was charged to a 10 inch reactor and heated to 350 ° C under flowing nitrogen (50cc/min, 130 psig reactor pressure). Feed was introduced at 7.2 g/hr. 85g of liquid product was collected of which 7g was organic phase while the remainder comprised an aqueous phase.

A table of compiled GCMS data from Examples 11 and 12 above is provided below. Other is C5-C6 higher oxygenates such as triols etc.

10

Table 1

Digestion/Hydroxyoxygenation  
liquor

mono-ol	diol	ketone	cyclic ether	lactone	other
9.62	48.52	3.69	3.73	3.11	31.33

ASA product

olefin	diene	cyclic ether	ketones	aldehyde	aromatic
17.70	9.49	20.42	19.20	19.28	14.59

As can be seen from the table above, diols were below detection limit after diol conversion reaction with ASA.

GC/MS identification of ASA product organic phase components is provided in Table 2 below.

15

Table 2.

Name	wt% norm
acetaldehyde	0.87
pentene	0.39
pentanediene	0.77
pentanediene	0.40
propanal and cyclopentene	5.86
Isobutyraldehyde	0.96
methyl cyclopentene	8.12
hexadiene	1.23
2-butanone	2.36
THF	3.86
hexadiene	0.87
methy cyclopentadiene	4.02
benzene	5.11
Isopentanal	0.92
ethyl furan	2.78
Dihydropyran	1.81
cyclohexadiene	0.73
Tetrahydropyran	8.95
2-pentanone	3.22
pentanal	9.57
Methyltetrahydropyran	1.38
methy cyclohexene	0.58
Butyltetrahydrofuran	1.66
toluene	1.50
methyl pentanal	1.00
methyl butanal	0.78
hexanone	2.26
hexanone	1.75
hexanal	1.66
cyclopentanone	3.46
ethyl benzene	0.98
xylene	1.36
methyl-2-pentenal	0.79
cyclopentanealdehyde	2.72
3-hexen-2-one	0.88
cyclohexanone	1.14
propyl benzene	1.54
methyl ethyl benzene	1.83
methyl cyclopentanone	1.93
dimethyl cyclopentenone	2.21
Methyl butyrolactone	1.27
unknown	2.04
methyl indane	1.00
unknown	1.47

Cyclic ethers and ketones are particularly suitable as a digestive solvent to be recycled to the digestion and deoxygenation step.

Example 13 Recycle

A model feed mixture was prepared with PG/EG/water (wt.% 45/5/50), and  
5 charged to a ½ inch OD continuous flow reactor containing 10.28g of ASA X600  
(amorphous silica alumina from Criterion Catalyst Co., LP, 55% alumina ( $\text{Al}_2\text{O}_3$ ), 45%  
silica ( $\text{SiO}_2$ )) at 350 °C, 7.6 barg, nitrogen flow at 100cc/min. WHSV 3.5g/g (total feed  
basis), 1.75g/g on organic basis. The product was cooled to ambient temperature producing  
liquid organic and aqueous phases. Product from this reaction was 13-15% organic phase.

10 Coke burns every 4 days. Ran for 52 days. 44,930g feed reacted during this time.

Organic layer product from reaction of EG/PG/water over ASA was used as  
solvent for wood digestion.

15 15.04g of 27788-118-7UL was charged to a reactor containing 2.7g of wood,  
0.1180g  $\text{K}_2\text{CO}_3$  and 0.5090g CoMoS catalyst DC-2534, containing 1–10% cobalt oxide  
and molybdenum trioxide (up to 30 wt.%) on alumina, and less than 2% nickel), obtained  
from Criterion Catalyst & Technologies L.P., and sulfided by the method described in  
US2010/0236988 Example 5. and heated to 190°C under 188 psig  $\text{H}_2$  with stirring for 1hr.  
Then temperature was increased to 250°C and held for 4 hrs. heat and stirring were  
stopped overnight. Next morning, reactor was vented, opened, sampled for GC, reloaded  
20 with additional 2.7g wood and the cycle repeated. Observations after 7 cycles: All wood  
was dissolved. Upper layer was an oil (organic) phase and bottom layer was a phenolics  
phase which contained the catalyst. Middle layer was aqueous. Liquid yield after reaction  
was: 22g (~10g aqueous) plus 7g pulled as intermediate samples resulting in 29g total.

CLAIMS

1. A process for the production of a higher hydrocarbon from solid biomass, said process comprising:
  - a. a biomass solid containing cellulose, hemicellulose, and lignin;
  - b. digesting and hydrodeoxygenating the biomass solid in a liquid digestive  
5 solvent, said digestive solvent containing a solvent mixture having a boiling point of greater than 40°C in the presence of a hydrothermal hydrocatalytic in the presence of hydrogen at a temperature in the range of 110°C to less than 300°C at a pressure in a range of from 20 bar to 200 bar to form a stable oxygenated hydrocarbon intermediate product having a viscosity of less than  
10 100 centipoise (at 50°C), a diol content of at least 2 wt.%, less than 2wt% of sugar, and less than 2wt% acid (acetic acid equivalent) based on the intermediate product, and at least 60% of carbon exists at less than or equal to 9;
  - c. reacting at least a portion of the stable oxygenated hydrocarbon intermediate  
15 product with an acidic amorphous silica alumina catalyst at a temperature in the range from 300°C to 400°C thereby producing monooxygenated stream containing water and monooxygenates having a boiling point of at least 40°C;
  - d. condensing at least a portion of the monooxygenated stream to liquid phase producing an aqueous phase and an organic phase;
  - e. removing the aqueous phase from the organic phase;
  - f. recycling at least a first portion of the organic phase to step (b) as a portion of  
20 the digestive solvent;
  - g. contacting the monooxygenates in the second portion of the organic phase having boiling point of at least 40°C and/or non-condensed monooxygenates if  
25 any with a solid acid condensation catalyst at a temperature in the range from 275°C to about 425°C producing a higher hydrocarbons stream.
2. A process according to claim 1, wherein step (b) is carried out at a temperature in the range of 150°C to 300°C.
3. A process according to claim 1 or claim 2, wherein the acidic amorphous silica alumina  
30 catalyst has BET surface area of greater than 200 m<sup>2</sup>/g.
4. A process according to any of claims 1 to 3, wherein the hydrothermal hydrocatalytic catalyst is heterogeneous.

5. A process according to any of claims 1 to 4, wherein the solid biomass is a lignocellulosic biomass.
6. A process according to any of claims 1 to 5, wherein the fraction of diol converted in step (c) is at least 25%, preferably at least 50%, more preferably at least 75%.
- 5 7. A process according to any of claims 1 to 6, wherein the organic phase in step (f) comprises at least one ketone and/or cyclic ether.
8. A process according to any of claims 1 to 7, wherein the removal of aqueous phase from liquid phase comprise phase separation.
9. A process according to any of claims 1 to 7, wherein the removal of aqueous phase  
10 from liquid phase comprises distillation.
10. A process according to any of claims 1 to 7, wherein the removal of aqueous phase from liquid phase comprises at least one of decanting, liquid-liquid extraction, centrifugation, hydrocyclones.
11. A process according to any of claims 1 to 10, wherein the acid condensation catalyst is  
15 a ZSM-5 catalyst.
12. A process according to any of claims 1 to 10, wherein the acid condensation catalyst is a mineral based acidic catalyst or acidic zeolites.

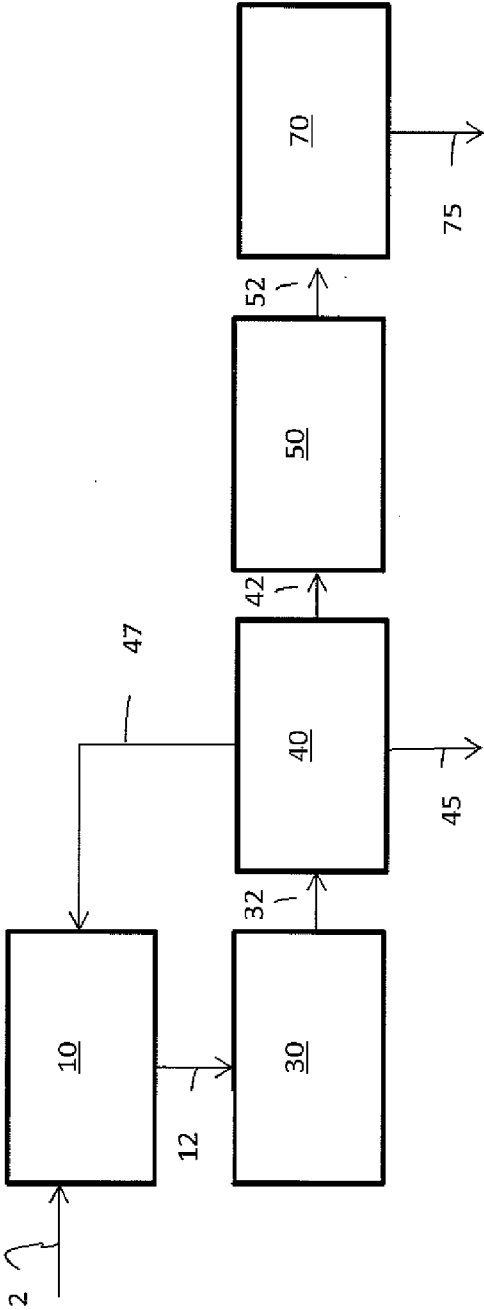


FIGURE 1



## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2016/039739

A. CLASSIFICATION OF SUBJECT MATTER  
INV. C10G3/00  
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
C10G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/128639 A1 (POWELL JOSEPH BROWN [US] ET AL) 8 May 2014 (2014-05-08) paragraphs [0016], [0028], [0030], [0031], [0055], [0057], [0058], [0062], [0077], [0078], [0080] -----	1-12
A	DAOLAI SUN ET AL: "Catalytic Dehydration of 1,2-Propanediol into Propanal over Ag-Modified Silica-Alumina", CHEMISTRY LETTERS, vol. 43, no. 4, 21 December 2013 (2013-12-21), pages 450-452, XP055304618, JAPAN ISSN: 0366-7022, DOI: 10.1246/cl.131106 page 450; tables 1,2 ----- -/--	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

7 October 2016

Date of mailing of the international search report

14/10/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Gzil, Piotr

## INTERNATIONAL SEARCH REPORT

International application No  
PCT/US2016/039739

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2015/057475 A1 (WANG HUAMIN [US] ET AL) 26 February 2015 (2015-02-26) paragraph [0012]; figure 4 -----	1-12
A	US 2 406 630 A (HERMAN PINES ET AL) 27 August 1946 (1946-08-27) column 2, line 9 - line 15; claim 2 -----	1-12
A	US 2014/121418 A1 (POWELL JOSEPH BROUN [US] ET AL) 1 May 2014 (2014-05-01) the whole document -----	1-12

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/039739

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2014128639 A1	08-05-2014	AU 2013338281 A1 CN 104884580 A EP 2914696 A1 US 2014128639 A1 WO 2014070581 A1	11-06-2015 02-09-2015 09-09-2015 08-05-2014 08-05-2014
US 2015057475 A1	26-02-2015	US 2015057475 A1 WO 2015026412 A1	26-02-2015 26-02-2015
US 2406630 A	27-08-1946	NONE	
US 2014121418 A1	01-05-2014	CA 2889485 A1 CN 104781374 A EP 2914691 A1 US 2014121418 A1 WO 2014070583 A1	08-05-2014 15-07-2015 09-09-2015 01-05-2014 08-05-2014