



(22) Date de dépôt/Filing Date: 2009/08/26

(41) Mise à la disp. pub./Open to Public Insp.: 2010/02/26

(45) Date de délivrance/Issue Date: 2011/10/18

(30) Priorités/Priorities: 2008/08/26 (US61/091,839);
2009/08/25 (US12/546,868)

(51) Cl.Int./Int.Cl. *B61K 5/06* (2006.01)


(72) Inventeur/Inventor:
PEASE, RONALD, US

(73) Propriétaire/Owner:
WESTERN-CULLEN-HAYES, INC., US

(74) Agent: SMART & BIGGAR

(54) Titre : DERAILLEUR PEU ENCOMBRANT

(54) Title: LOW PROFILE DERAIL

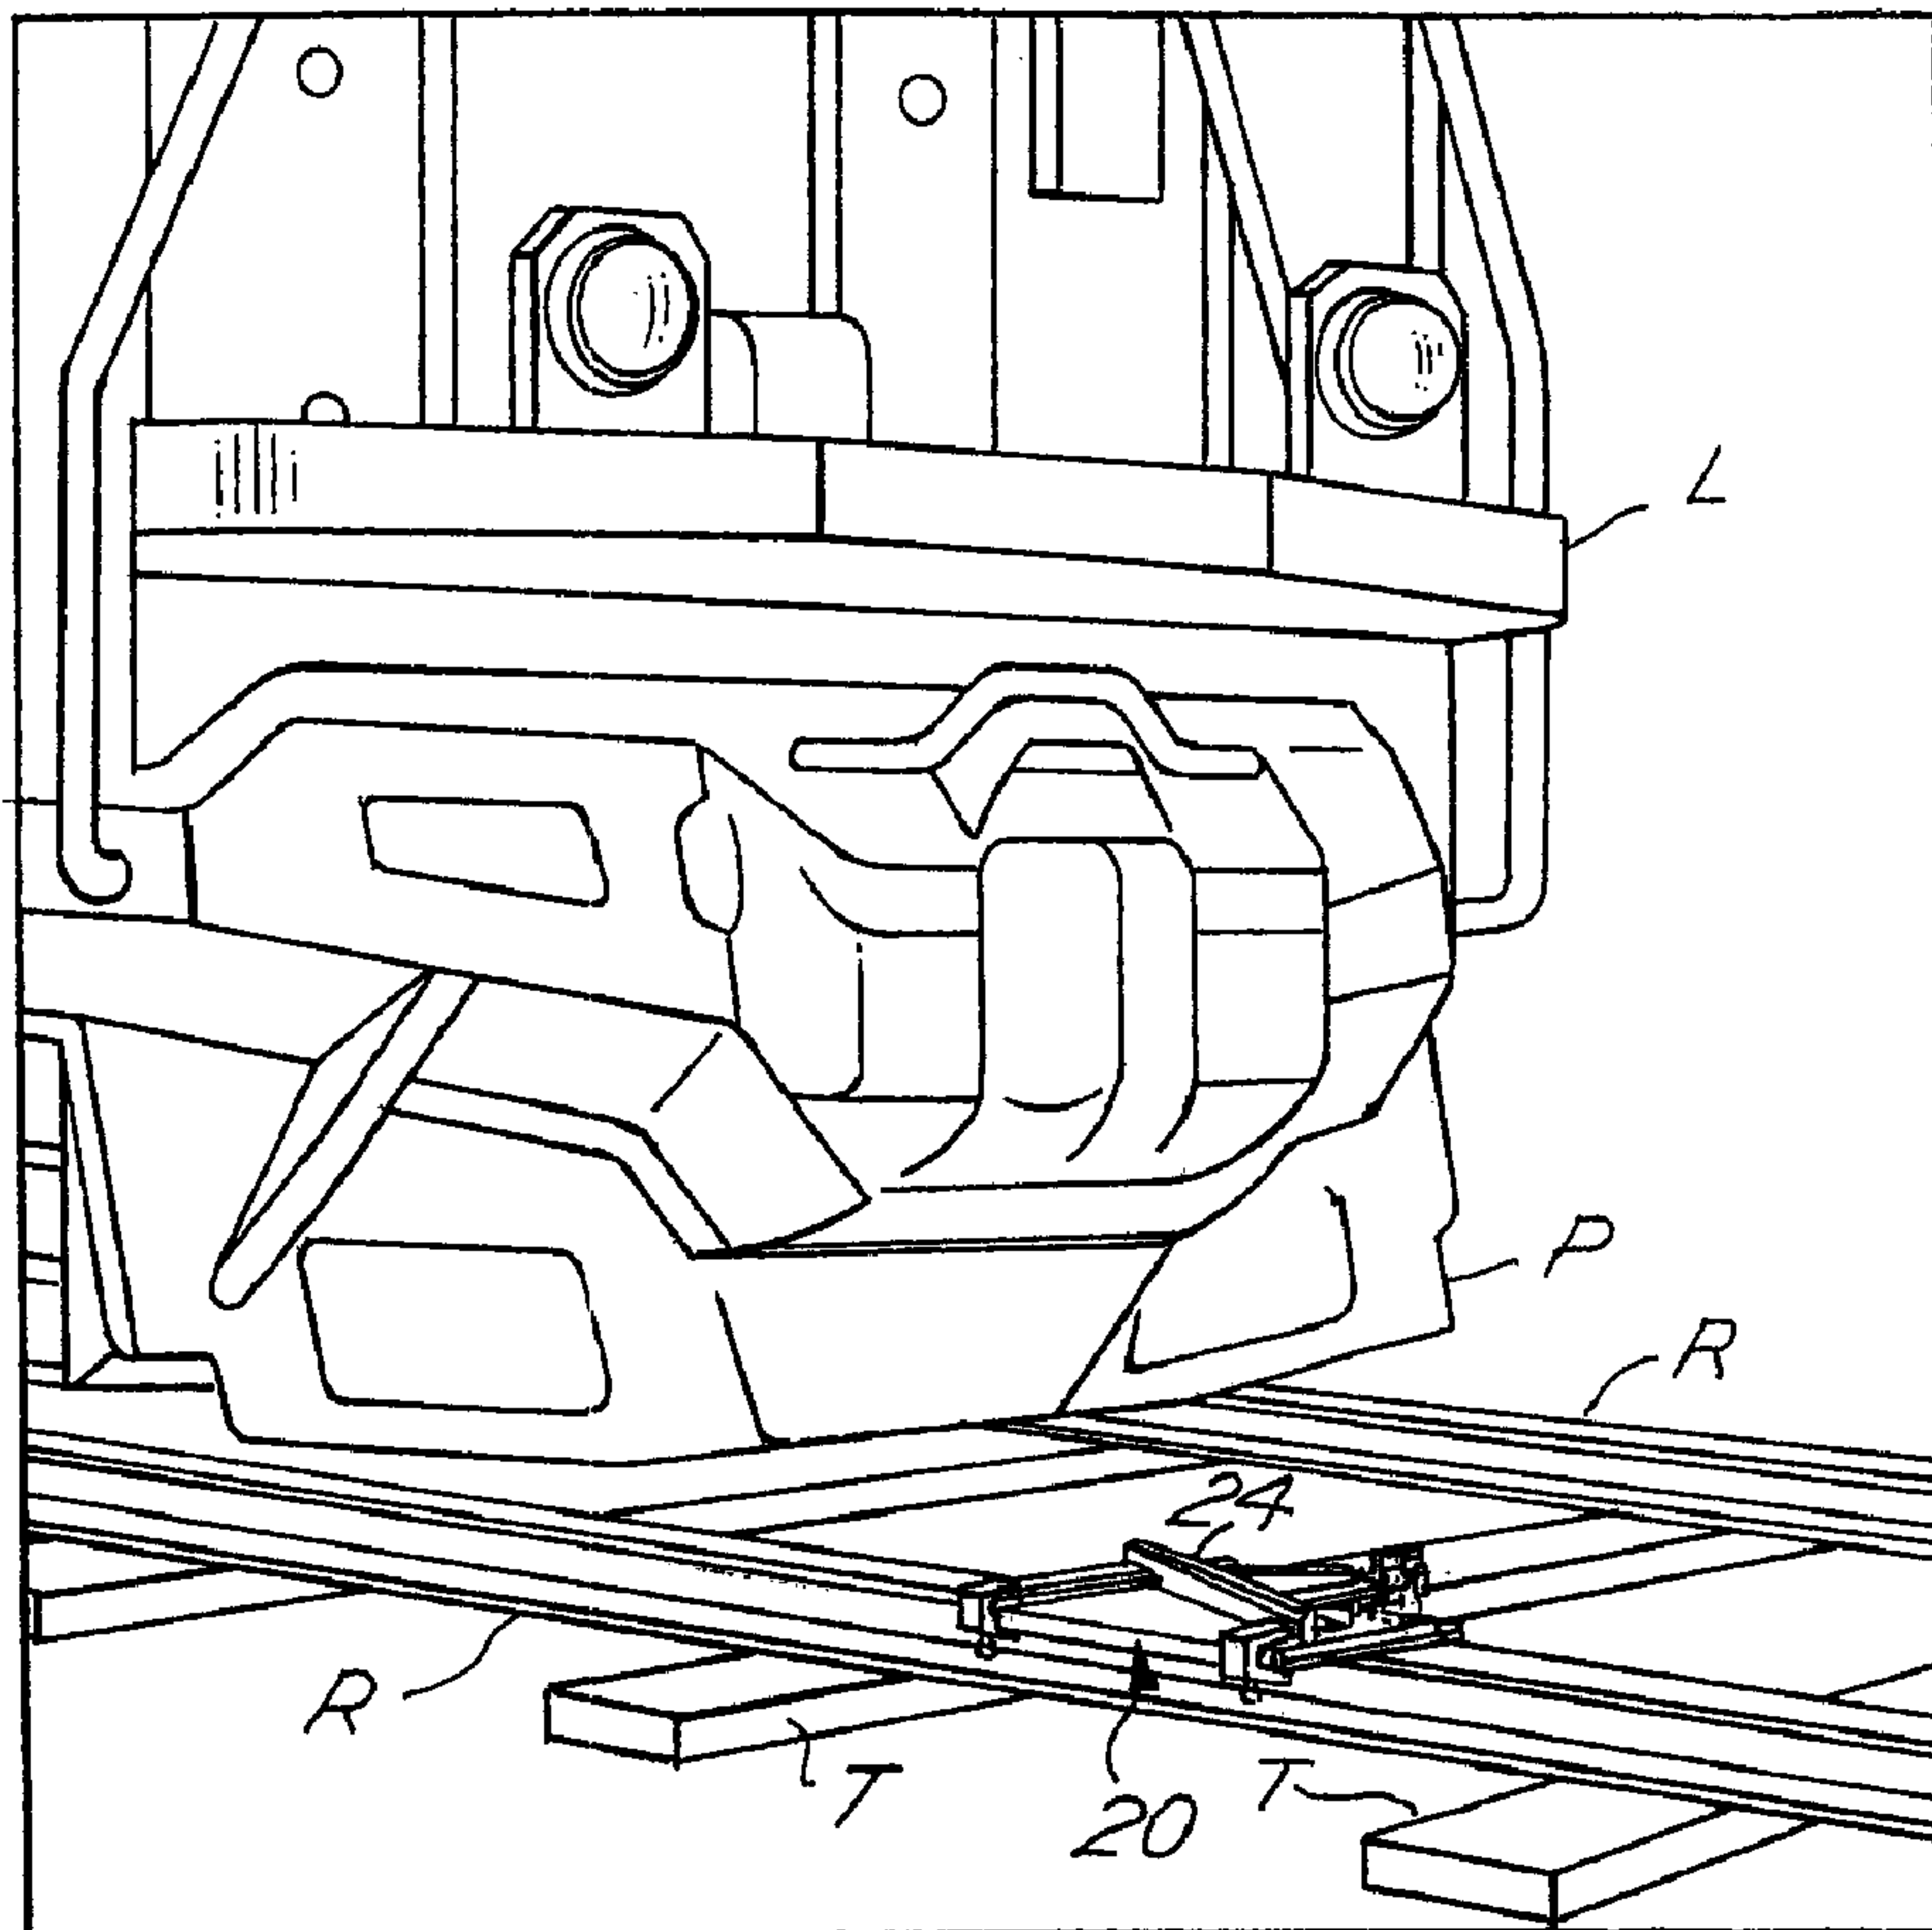

(57) Abrégé/Abstract:

This invention relates to a derail assembly used in the railroad industry for derailing the wheel of an undesirably moving railed vehicle and, in particular, relates to derailing a moving locomotive having a pilot at the front of the locomotive. The derail assembly

(57) **Abrégé(suite)/Abstract(continued):**

includes a full rigid derail plate which is in direct contact with the entire upper surface of the rail. An upright derail bar is securely mounted on the derail plate and the derail bar is angled outwardly for engaging a wheel of the locomotive when moving undesirably for causing a desired derailment. The derail includes longitudinally spaced rigid hooks at opposite ends of the derail. The hooks secure one side of the derail assembly to the rail. On the opposite side of the rail, a clamp assembly is provided on the derail shoe from the hooks. The hooks and the clamp cooperate to secure the derail assembly to the rail. The derail has an overall height which is less than three inches measured from the upper surface of the rail to the highest point of the derail assembly so a clearance is always provided between the pilot of the moving locomotive and the highest point of the derail assembly.

ABSTRACT

This invention relates to a derail assembly used in the railroad industry for derailing the wheel of an undesirably moving railed vehicle and, in particular, relates to derailing a moving locomotive having a pilot at the front of the locomotive. The derail assembly includes a full rigid derail plate which is in direct contact with the entire upper surface of the rail. An upright derail bar is securely mounted on the derail plate and the derail bar is angled outwardly for engaging a wheel of the locomotive when moving undesirably for causing a desired derailment. The derail includes longitudinally spaced rigid hooks at opposite ends of the derail. The hooks secure one side of the derail assembly to the rail. On the opposite side of the rail, a clamp assembly is provided on the derail shoe from the hooks. The hooks and the clamp cooperate to secure the derail assembly to the rail. The derail has an overall height which is less than three inches measured from the upper surface of the rail to the highest point of the derail assembly so a clearance is always provided between the pilot of the moving locomotive and the highest point of the derail assembly.

LOW PROFILE DERAIL

BACKGROUND OF THE INVENTION

This invention relates to railway safety equipment, namely, derails which are commonly used for derailing railed vehicles including locomotives, railroad cars and the like, which may be undesirably moving along railroad tracks, normally at a relatively low speed. There are many types of derails, known in the rail industry, which have been used for many years. Certain types of derails are substantially permanently fixed to one rail of a pair of railroad track rails and various methods may be used to move the derail between an operative position and an inoperative position. Some derails are relatively light in weight so as to be portable and are not movable between operative and inoperative positions.

At least in connection with certain types of derails, the railway industry historically required that the highest point of a derail was not to be higher than four inches measured from the top of the rail upon which the derail was affixed. A principal reason for this requirement was that the pilot (sometimes called a "cowcatcher") of a railway locomotive must be allowed to clear the highest point of the derail so that a heavy locomotive's pilot did not sweep, push or knock off the entire derail when the locomotive was undesirably moving at a relatively low speed, such as up to 10 miles per hour. If the derail is moved out of derailing position by the pilot, the derail becomes ineffective and the undesirably moving locomotive may cause serious damage to other locomotives or railway cars, such as at a railroad yard, or even cause serious injury or death to railway workers in the area.

Relatively recently, the railway industry changed its standards to require that certain derails could not have its highest point more than three inches above the upper surface of a railroad rail upon which the derail is affixed. In essence, certain existing derails higher than or just at three inches above the rail could be unsafe to use, particularly in connection with undesirably moving heavy locomotives, because the entire derail could be forced off the track by the pilot of the locomotive before the lead wheel of the undesirably moving locomotive could be engaged by the derail, thereby causing the undesirably moving locomotive to continue moving unsafely rather than allowing the derail to remain in place and cause a safe derailment of the locomotive if needed.

SUMMARY OF THE INVENTION

The subject of this invention is a redesign of the derails as disclosed in U.S. Pat. No. 4,165,060 and particularly in U.S. Pat. No. 6,105,906. More specifically, the invention herein is a redesign and an improvement over the embodiment of FIGS. 10-13 of the '906 patent and
5 is designed to assure that the pilot (cow catcher) of an undesirably moving locomotive does not move, such as by forcing or pushing, the derail off the rail so the derail is effective in causing a safe derailment.

The present invention is directed to a low profile, portable derail, such as shown in the above-mentioned patents (particularly the embodiment of FIGS. 10-13 of the '906 patent) and
10 which is particularly designed to have a height of less than three inches, preferably at least $2\frac{3}{4}$ ", from the highest point of the derail down to the upper surface of the track upon which the derail is mounted. Preferably, a clearance of at least $\frac{1}{4}$ " is provided by the maximum height of the derail between the lowest point of the locomotive pilot and the derail. Since the
15 the derail is designed to derail a moving locomotive having a pilot at the lower front-end thereof, the derail must have high strength capacity to effectively derail the undesirably moving very heavy locomotive(s) which could move at speeds as high as 10 miles per hour. Since the pilot of the locomotive may be as low as three inches above the rail upon which it is moving, the design of the derail herein cannot be pushed or forced off the rail by the pilot of the locomotive before the lead wheel approaches the derail. The derail of the present invention,
20 although being particularly effective to derail locomotives, will also be effective in derailing undesirably moving railway cars.

In actual testing, two locomotives were ganged or attached together and were caused to move at speeds up to 10 miles per hour. In this test, one embodiment of the present invention was effective in derailing the locomotive. However, the initial testing, although effective,
25 resulted in an improved redesign of the derail that was first tested. Apparent potential problem areas of the tested design were found. Improvements were made in a second and later preferred embodiment of the invention.

There is a need in the railroad industry to provide a derail, preferably relatively light in weight, to be portable and yet be effective to derail an undesirably moving locomotive, having
30 a weight of approximately 350,000 pounds or even two such locomotives, at about 950,000 pounds connected together, wherein the locomotive's pilot will clear the derail of the present invention used on the track without the derail being forced off by the pilot of the locomotive

before the lead wheel reaches the derail. The derail must be less than three inches in height above the upper surface of the track, preferably providing a 1/4" clearance between the pilot and the derail, and yet be strong and sturdy enough to effectively derail 350,000 pounds of one locomotive or, possibly, even two connected locomotives moving at speeds up to 10 miles per hour.

The above-mentioned need for a portable derail sufficiently strong to derail one or two locomotives at speeds up to 10 miles per hour is accomplished by an improved derail design. The low profile derail (less than three inches in overall height clearance from the top of the rail) includes an elongated derail shoe in direct contact with and completely covering the entire length of substantially the entire upper surface area portion of the one rail upon which the derail is mounted. The elongated derail shoe has a wheel entrance end and a wheel exit end. An upright derail bar is securely mounted on the derail shoe and is angled outwardly, that is, towards the field side of the rail from the wheel entrance end to the wheel exit end of the elongated derail shoe which rests upon the one rail. The derail assembly further includes at least two longitudinally spaced one-piece rigid hooks which are fixedly secured to the derail shoe one side thereof at the wheel entrance end and at the wheel exit end. Securing members, such as screws, are operatively mounted on the hooks for selectively securing the derail assembly on the outer side of one side of the one rail. A clamp assembly is secured to the derail shoe on the opposite side of the derail shoe from the hooks. The hooks, the securing members and the clamp assembly cooperate to secure the entire derail assembly to the one track. Preferably, a reinforcing portion is provided on the exit hook for reinforcing the critical exit end of the derail bar for assuring successful derailing of the lead wheel of the moving locomotive or other moving railroad car.

The invention therefore provides a low profile derail assembly for derailing a wheel of a lead wheel of a moving railway vehicle when the railway vehicle is undesirably moving along a pair of laterally spaced rails, railroad ties being securely and transversely mounted to and between the rails, each of the rails having an upper surface, an outer side and an inner side, the derail assembly being secured to a portion of one of the rails, the derail assembly comprising: (a) an elongated rigid derail plate being in direct contact with substantially the entire upper surface portion of one of the rails upon which the derail assembly is secured, the elongated derail plate having a wheel entrance end and a wheel exit end longitudinally spaced from the wheel entrance end; (b) an upright rigid derail bar being rigidly secured to the derail

3a

plate, the upright derail bar being angled outwardly from the wheel entrance end to the wheel exit end for engaging a wheel of the undesirably moving vehicle to thereby cause a desired safe derailment of the undesirably moving vehicle; (c) at least two longitudinally spaced unitary rigid hooks fixedly secured to the derail plate at the wheel entrance end and at the wheel exit end, each of the hooks including means operably mounted on the hooks for securing the derail assembly along one side of the rails, the entrance end hook having a lower inwardly directed portion extending toward the rail, a screw being received in the lower portion of the entrance end hook for bearing against the rail, a unitary upright outer portion, and a unitary upper inwardly directed portion extending inwardly toward the upright derail bar and passing beyond and below the upright derail bar, the inwardly directed portion of the hook being rigidly connected to the derail plate and to the derail bar, the exit end hook having a lower, inwardly directed portion toward the rail, a screw being received in the lower portion of the exit end hook for bearing against the rail, a unitary upright outer portion, a unitary upper inwardly directed portion extending toward and below the derail bar, and a unitary upright inner portion bearing against the inner side of the derail bar, the upright portion being rigidly secured to the inner side of the derail bar at the exit end; and (d) a clamp assembly secured to the derail plate on the opposite side of the derail plate from the hooks, the clamp assembly including means for releasably securing the derail assembly to the rail opposite the hooks, the hooks and the clamp assembly cooperating to secure the derail assembly to the rail on the opposite side of the rail from the hooks.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings are incorporated into and are a part of the description of the invention. The drawings illustrate certain embodiments of the present invention and serve to explain and describe embodiments of the invention. The drawings are not to be construed as limiting the scope of the invention, but are intended to assist in the description of the invention.

Referring to the drawings:

FIG. 1 is an illustration showing the front of a locomotive with a pilot located in

the front lower portion thereof and showing a derail assembly affixed to one rail of a pair of railroad tracks upon which the locomotive is moving;

Fig. 2 is a perspective view showing one embodiment of the derail assembly of the present invention mounted on the one rail illustrated in Fig. 1;

5 Fig. 3 is an illustration of a portion of the wheel assembly of the locomotive of Fig. 1 showing a front wheel approaching the derail assembly of the present invention;

Fig. 4 is a top plan view of the derail assembly of Figs. 1-3 with a rail shown in hidden view lines;

Fig. 5 is an end elevational view of the derail assembly of Fig. 4;

10 Fig. 6 is a side elevational view of the derail assembly of Figs. 4 and 5;

Fig. 7 is a pictorial view of a derail assembly made in accordance with a second embodiment of the present invention;

Fig. 8 is a side elevational view of the derail assembly embodiment of Fig. 7 of the present invention;

15 Fig. 9 is an end elevational view of the embodiment of the derail assembly illustrated in Figs. 7 and 8;

Fig. 10 is a detail side view of the exit and of one screw hook used in the derail assembly embodied in Figs. 7-9; and

Fig. 11 is an end elevational view of the screw hook of Fig. 10.

20 DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Referring to Figs. 1-3 of the attached drawings, the manner of using the derail assembly, general **20**, is shown. Referring to Fig. 1, the front of a locomotive **L** is shown as it moves along a pair of conventional spaced steel railroad track rails **R** which are fixedly supported in a conventional manner upon conventional railroad ties **T**. The ties **T** are mounted transverse to the elongated rails **R** upon which the locomotive **L** is moving. The front lower portion of the locomotive **L** is shown having a pilot **P** (historically formerly known as a cowcatcher). Under relatively new railroad industry specifications, the lowest point of the pilot **P** may now having a clearance of only 3" above the top of the rail **R**. If the locomotive **L** is

moving undesirably at speeds above 5 MPH, and up to 10 MPH, the derail **20**, as shown in Fig. 1, must be lower in height, such as 2- $\frac{3}{4}$ " to preferably give at least $\frac{1}{4}$ " clearance below the lowest point of the pilot **P** to the highest point of the derail **20**. Otherwise the pilot **P** could simply push or force the derail assembly **20** off the rail **R** upon which derail **20** is affixed. If
5 this occurs, the derail **20** would be useless in effecting a desired derailment of an undesirably moving locomotive **L**.

Again, referring to Fig. 1, the derail assembly **20** is shown mounted on the rail **R**. The derail **20** is positioned in such a manner as to cause a derailment of the undesirably moving locomotive **L** to the right side of the moving locomotive **L** for derailment to the field side of the
10 spaced rails **R**. (The space between the rails **R** is known as the gage side.)

Referring to Fig. 2, the derail assembly **20** is shown mounted upon a rail **R**. The derail assembly **20** includes a steel, rigid derail shoe plate **22** which is mounted directly upon and rests upon and substantially completely covers the entire upper surface portion of the rail **R** to which the derail assembly **20** is attached. A wheel deflecting bar **24** is rigidly fixed in a
15 substantially upright position, preferably vertical, on the upper surface of the derail shoe plate **22**. The bar **24** is mounted at an angle effective to engage the wheel **W**, as shown in Fig. 3, which is the lead wheel **W** of the moving locomotive **L**. The deflecting **24** is angled outwardly from the entrance end to the exit end of the derail **20** at between 11-28 degrees.

The derail assembly **20** further includes an entrance derail hook **26** and an exit derail
20 hook **27**. The derail hooks **26** and **27** are rigidly secured to the derail shoe plate **22** and are spaced at opposite ends of the plate **22**. The hooks **26** and **27** are provided so as to secure one side of the derail assembly **20** to the field or outer side of the rail **R**. Again referring to Fig. 2, the derail assembly **20** further includes an adjustable clamp assembly **28** that is operatively secured to the plate **22** and is designed to secure the opposite side or gage side of the derail
25 assembly **20** to the rail **R**.

Although not shown in Figs. 1-2, a rigid upright bracing assembly, generally **38**, is shown in Figs. 3, 5 and 6, is mounted on the underside of the shoe plate **22** of the derail assembly **20** and is designed to vertically support the derail assembly **20** as the heavy load of the front wheel **W** of the moving locomotive **L** comes into forcible contact with the assembly
30 **20**, and specifically the deflecting bar **24**.

Referring to Fig. 3, the lead wheel **W** of the moving locomotive **L**, which may be moving undesirably at speeds of up to 10 miles per hour, is effectively derailed by the derail

assembly **20** since the pilot **P**, which may be as low as 3" above the upper surface of the rail, has cleared the derail assembly **20** which is less than 3" above the upper surface of the rail **R**, preferably 2- $\frac{3}{4}$ " above the rail **R**, to provide a clearance of at least $\frac{1}{4}$ ".

First Derail – Figs. 4-6

5 Referring to Figs. 4-6, the derail embodiment **20** is shown in somewhat greater detail. Some common details are found in U.S. Patent No. 6,105,906, which is incorporated herein by reference. As previously indicated, the upright deflecting bar **24** is effectively angled outwardly to engage the moving lead wheel **W** of the locomotive **L** since the pilot **P** of the locomotive **L** has cleared the highest point of the derail assembly **20**, thereby derailing the
10 moving locomotive **L** to the field side of the rail **R**.

Referring to Figs. 4-6, the entrance derail hook **26** is rigidly secured to the derail shoe plate **22**, as by welding, along its lower surface while the inner end or gage side end **32** of the entrance derail hook **26** is welded to the outer or field side face of the entrance end of the deflecting bar **24**.

15 The derail shoe **22** is a rigid heavy duty plate that is welded to the lower edge of the upright deflecting bar **24** along the entire length of the bar **24** along the field side face of the deflecting bar **24**. The field side of the derail shoe plate **22** has a unitary, upright, downwardly extending flange **35** that covers the outer edge of the upper flange of rail **R**, as best seen in Fig. 2. The flange **35** as seen best in Fig. 2, and the substantially complete coverage of the adjacent
20 upper surface portion of the rail **R** by the derail shoe on plate **22** provides significantly greater strength to the derail plate **22** to thereby significantly strengthen the entire derail **20**. The plate **22** and flange **35** are stronger than the ultralight embodiment of Figs. 10-13 of the '906 patent and such a design feature is important to derail an undesirably moving locomotive **L**. As seen best in Fig. 4, towards the exit end of the upright deflecting bar **24**, upright support plates **34**
25 are rigidly positioned against the upright of the derail bar **24**. These upright plates **34** are also welded along the lower edges thereof to the derail shoe plate **22** while their upright edges are welded to the inner side or gage side face of the deflecting bar **24** to provide added strength to the deflecting bar **24** as the wheel **W** has been engaged by the bar **24** and cause the controlled derailment.

30 Referring to Fig. 5, the derail assembly **20** is shown resting upon a rail **R**. A clamp assembly **36** is securely and operatively carried by a support assembly **38**. The clamp **36** includes an upright end plate **40** which is designed to bear against the outer upright face of the

upper flange of the rail **R**. The clamp **36** on the gage side of the rail **R** and the longitudinally spaced screw hook blocks **26** and **27**, on the field side, cooperate to secure the derail **20** to the rail **R**. Although two hook blocks **26** and **27** are shown in the drawing, for further strengthening, one or more additional hook blocks could be provided.

5 Referring again to Figs. 4-6, the hook block assembly **26** and the hook block assembly **27** each have an inwardly and downwardly angled portion that threadably receives a screw **42** that is designed to be rotated generally upwardly to bear against the lower surface of the upper flange of the rail **R**. In assembling the derail assembly **22** to the rail **R**, it is preferred that the screws **42** in the hook blocks **26** and **27** first be adjusted to bear against the lower surface of the
10 upper flange of the rail **R** and then the clamp **36** is adjusted to cause the end plate **40** to bear firmly against the upright outer surface of the upper flange of the rail **R**. The screws **42** are then firmly tightened the rail **R**. In Fig. 5, there is shown an upright pole **P** for a warning flag (not shown) that is merely an identifying signal that lets workers know that the derail **20** is in place. The pole **P** and flag assembly have no operative function relative to the invention
15 described herein.

The upright rigid support assembly **38** is rigidly secured to the underside of the derail shoe plate **22** on the gage side of the derail assembly **20** as seen best in Fig. 5. The lower surface of the upwardly angled support **38** has teeth **39** that are designed to bear against the upper side corner of a transverse railroad tie **T** so as to enable the outer portion of the derail
20 assembly **20** to be vertically supported by the support **38** during derailment of a locomotive **L**. Multiple teeth **39** are provided so that the derail plate **22** can be adjusted to a selected position to rest against the upper surface of the upper flange of the rail **R**.

The derail assembly **20** differs from U.S. Patent No. 6,105,906 primarily in the fact that the derail shoe plate **22** is not only adjacent the surface of the rail flange but it covers
25 substantially the entire upper surface area of the rail **R**. The unitary flange **35** portion of the plate **22** provides significant further strength. Upright supports **34** are provided on the gage side of the deflecting bar **24** to further strengthen the assembly **20**. The weight of a tested derail **20** was about 35 pounds while the weight of the "ultralight" derail of the '906 patent was about 28 pounds. In other words, the plate **22** is continuous and rigid and does not include a
30 cut-out portion as shown in Fig. 13 of the '906 patent. In testing, it was found that the derail **20**, as shown and discussed above, did provide enough strength to cause a derailment during an

actual test. Certain weaknesses in the test derail resulted in further improvements to be discussed relative to the derail, general **48**, shown in Figs. 7-11..

Strengthened Derail Embodied in Figs. 7-11

The improved derail embodiment **48** is shown in Figs. 7-11 which includes a derail shoe plate **50** which, like the derail plate **22** of the derail **20**, substantially covers the entire upper surface area of the rail **R** upon which the assembly **50** is secured. The plate **50** includes a unitary downturned flange **51**. The heavy duty derail shoe plate **50** and flange **51** provide significant stability and rigidity to the assembly **48** to better resist torquing resulting from the heavy weight of the front end of an undesirably moving locomotive **L** during a controlled derailment.

A deflecting bar **52** is rigidly secured as by welding to the upper surface of the derail shoe **50** and is angled outwardly, that is, from the gage side, toward the field side of the rail **R**. The mounting of the derail assembly **48** upon the rail **R** is substantially the same as the mounting of the derail assembly **20** upon the rail **R**, as discussed in Figs. 1-6.

Upright support plates **60** are secured by welding to the upper surface of the plate **50** and to the inner upright surface of the deflecting bar **52** in order to support the inner side or gage side of the deflecting bar **52**. The deflecting bar support plates **60** are preferably about 3/8" thick as opposed to the 3/16" thickness of the supports **34** of the derail **20**. A clamp assembly **62** is located on the field side of the assembly **62** and is securely attached to the derail shoe plate **50**. The clamp assembly **62** is supported on the derail assembly **48** in substantially the same manner as with the derail embodiment **20** of Figs. 4-6. The clamp assembly **62** includes an end plate (not shown), which bears against the outer upright face of the upper flange of the rail **R** as like the derail embodiment **20** of Figs. 4-6.

Like the embodiment **20** of Figs. 4-6, the derail assembly **48** also includes an entrance derail hook **54** and an exit derail hook **56**. Each hook **54** or **56** is rigidly secured, as by welding, to the upper surface of the derail shoe **50**. An upright bracing assembly **58**, is designed to be positioned on the gage side of the derail assembly **20**. The bracing assembly **58** is rigidly constructed in order to better support the heavy weight of a moving locomotive **L** as it is being derailed. More specifically, the bracing assembly **58** of the embodiment **48** is doubled in thickness from the bracing assembly **20**, that is, the brace is 3/8" thick versus the 3/16" thickness of the brace **38** of the first derail assembly **20**.

A further difference between the derail embodiment **20** of Figs. 4-6 and the derail embodiment **48** of Figs. 7-9 is found in the design of both the entrance hook **54** and the exit hook **56**. Referring to Figs. 7 and 9, the entrance end hook **54** includes an inwardly facing slightly downwardly angled portion **64**, a unitary upright outer portion **66**, and an inwardly directed or gage directed unitary upper portion **68**, which is directed straight inwardly. The upper portion **68**, for substantially its entire length, is secured to the upper surface of the derail shoe **52** such as by welding. In contrast to the embodiment **20** of Figs. 4-6, the embodiment of Fig. 7 provides a stronger interconnection between the deflecting bar **52** and the upper portion **68** of the entrance hook **54**. As seen in Fig. 7, the upper portion **68** passes beneath a cut-out portion of the entrance end of the deflecting bar **52** and passes externally beyond the inner surface of the upright deflecting bar **52**. The entrance hook **54** is welded along and to the front surface of the deflecting bar **52**, and is also welded along the rear surface of the deflecting bar **52** at the outer portion of the bar **52**.

Referring to Figs. 7, 10 and 11, the exit hook **56** includes a lower, inwardly and downwardly angled portion **70**, a unitary upright portion **72**, and a substantially horizontal inwardly directed unitary upper portion **74**. In contrast to the entrance hook **54**, the exit hook **56** includes a unitary upwardly directed upright portion **76**. The exit hook **56** generally has an S-shape. The upright portion **76** provides greater rigidity for the exit hook **56** by supporting the exit end of the deflecting bar **52** to better assure derailment of a moving locomotive. The upright portion **76** is welded to the inner face of the deflecting bar **52** to provide added rigidity to the exit hook **56**. Particularly in the case of a heavy locomotive, the exit end of the derail **48** must be exceptionally strong to assure effective derailing of a locomotive **L** to the field side of the rail **R** when the wheel **W** engages the derail **48**. In effect, the exit end of the derail assembly **48** takes the highest level of weight or force from the wheel **W** of the heavy, moving locomotive **L** during a derailment.

The derail assembly **48** of Figs. 7-11 is secured to a rail **R** in substantially the same manner as previously described. First, the screws **78** carried by the entrance hook **54** and exit hook **56** are rotated upwardly so that the upper ends of the screws **78** bear against the lower flange of the rail **R** to secure one side of the derail **48** to the rail **R**. The clamp assembly **62** is then adjusted by rotation to cause the end plate (not shown in Fig. 7) to bear against the outward upper surface of the upper flange of the rail **R** as seen best in Fig. 5 on the opposite side of the rail **R** from the hooks **54** and **56**. The screws **78** are then tightened against the rail

R. The clamp assembly **62** and the hooks **54** all cooperate to securely hold the derail **48** in place as a moving locomotive **L** is being derailed by the derail assembly **48**.

The derail **48** of Figs. 7-11 is generally more robust in design than the derail **20**, as described above. The overall weight of the derail **48** is about 42 pounds versus the 35 pounds
5 of the derail **20**, and the 28 pounds of the ultralight derail of the '906 patent. This generally robust design of the derail **20** thereby provides greater assurance that the desired derailing of an undesirably moving locomotive **L** or two ganged locomotives **L** will be accomplished.

While in the foregoing, there has been provided a detailed description of embodiments of the present invention, it should be recognized to those skilled in the art that the described
10 embodiments may be altered or amended without departing from the spirit or scope of the invention defined in the accompanying claims.

CLAIMS

1. A low profile derail assembly for derailing a wheel of a lead wheel of a moving railway vehicle when the railway vehicle is undesirably moving along a pair of laterally spaced rails, railroad ties being securely and transversely mounted to and between the rails, each of the rails having an upper surface, an outer side and an inner side, the derail assembly being secured to a portion of one of the rails, the derail assembly comprising:

(a) an elongated rigid derail plate being in direct contact with substantially the entire upper surface portion of one of the rails upon which the derail assembly is secured, the elongated derail plate having a wheel entrance end and a wheel exit end longitudinally spaced from the wheel entrance end;

(b) an upright rigid derail bar being rigidly secured to the derail plate, the upright derail bar being angled outwardly from the wheel entrance end to the wheel exit end for engaging a wheel of the undesirably moving vehicle to thereby cause a desired safe derailment of the undesirably moving vehicle;

(c) at least two longitudinally spaced unitary rigid hooks fixedly secured to the derail plate at the wheel entrance end and at the wheel exit end, each of the hooks including means operably mounted on the hooks for securing the derail assembly along one side of the rails, the entrance end hook having a lower inwardly directed portion extending toward the rail, a screw being received in the lower portion of the entrance end hook for bearing against the rail, a unitary upright outer portion, and a unitary upper inwardly directed portion extending inwardly toward the upright derail bar and passing beyond and below the upright derail bar, the inwardly directed portion of the hook being rigidly connected to the derail plate and to the derail bar, the exit end hook having a lower, inwardly directed portion toward the rail, a screw being received in the lower portion of the exit end hook for bearing against the rail, a unitary upright outer portion, a unitary upper inwardly directed portion extending toward and below the derail bar, and a unitary upright inner portion bearing against the inner side of the derail bar, the upright portion being rigidly secured to the inner side of the derail bar at the exit end, and

(d) a clamp assembly secured to the derail plate on the opposite side of the derail plate from the hooks, the clamp assembly including means for releasably securing the derail

assembly to the rail opposite the hooks, the hooks and the clamp assembly cooperating to secure the derail assembly to the rail on the opposite side of the rail from the hooks.

2. The low profile derail assembly of claim 1 wherein the elongated derail plate includes
5 a unitary flange extending downwardly and positioned against the outer side of the rail.

3. The low profile derail assembly of claim 1 or 2 wherein the railway vehicle is a locomotive having a pilot, the pilot having a lowest point at a preselected distance above the upper surface of one of the rails, and the derail assembly having an overall height which is less
10 than the preselected distance between the low point of the pilot and the upper surface of one of the rails thereby assuring that the pilot does not engage the derail assembly when the locomotive is undesirably moving.

4. The low profile derail assembly of claim 3 wherein the preselected distance between
15 the low point of the pilot and the upper surface of one of the rails is about three inches and the preselected distance between the upper surface of one of the rails and the highest point of the derail assembly is about $2\frac{3}{4}$ inches.

5. The low profile derail assembly of any one of claims 1 to 4 further including upright
20 support plates secured to the upper surface of the derail plate and to the inner upright surface of the derail bar for providing additional support for the deflecting bar during derailment of the moving vehicle.

FIG.1

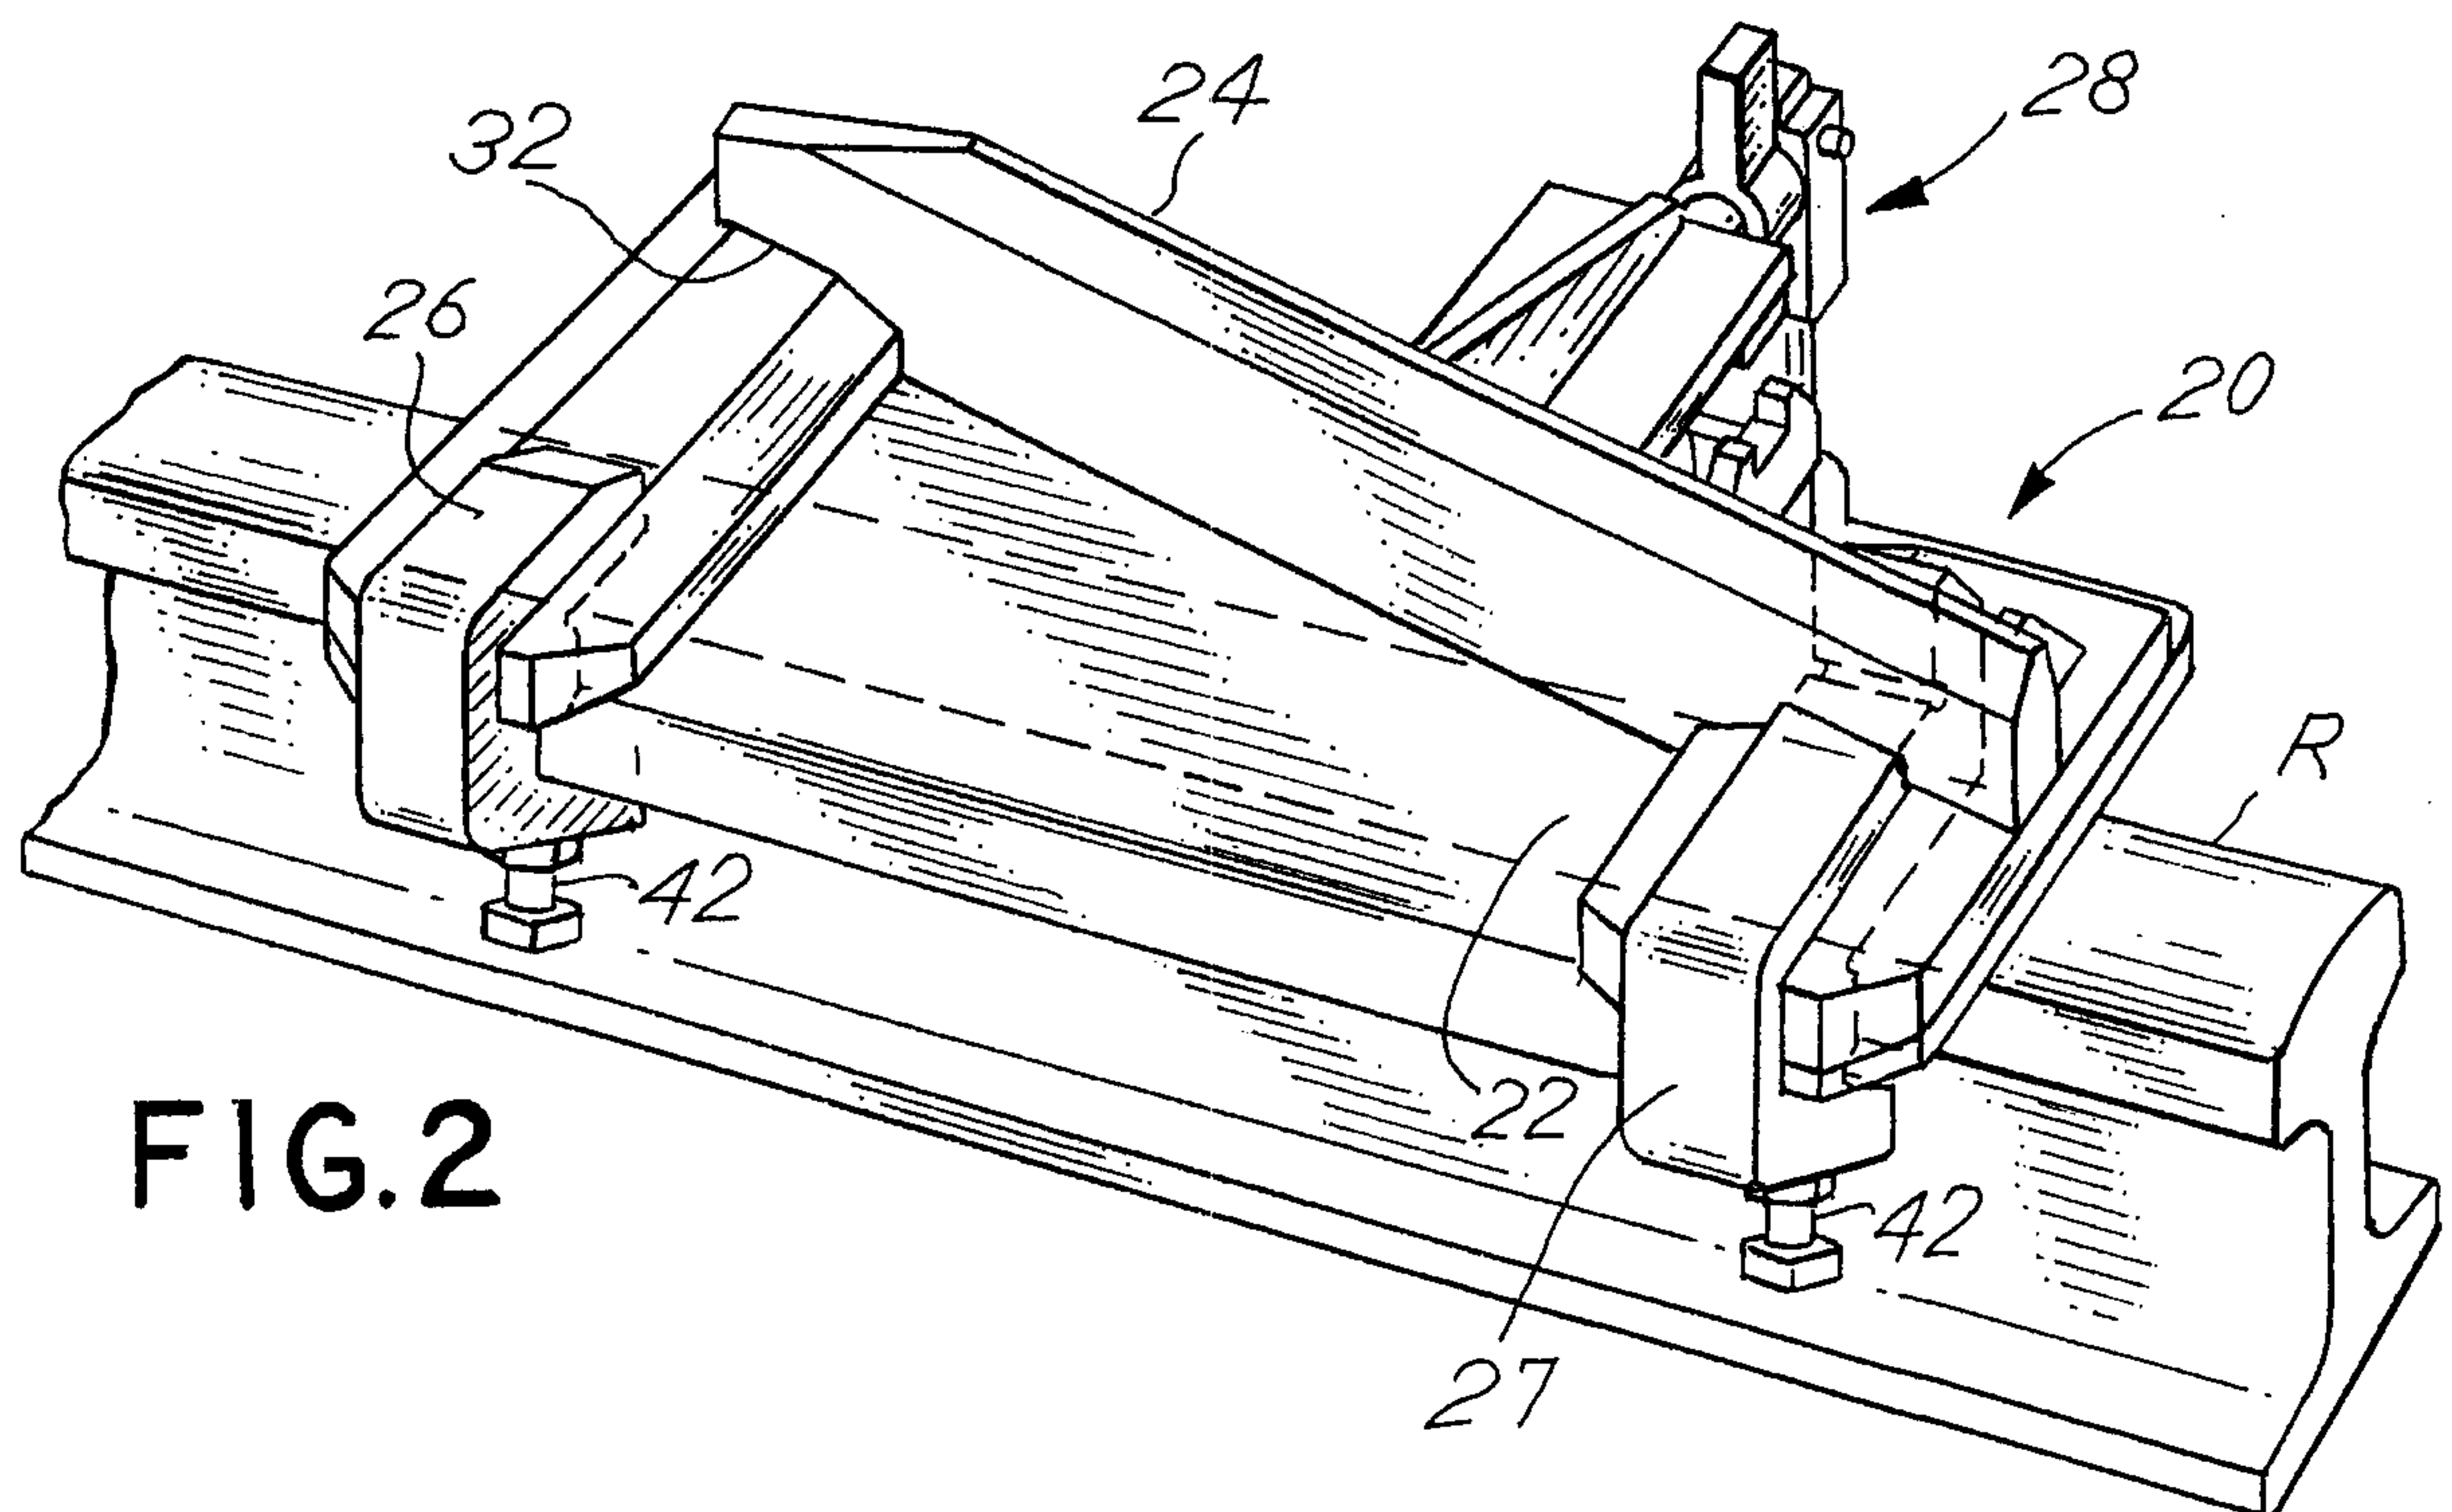
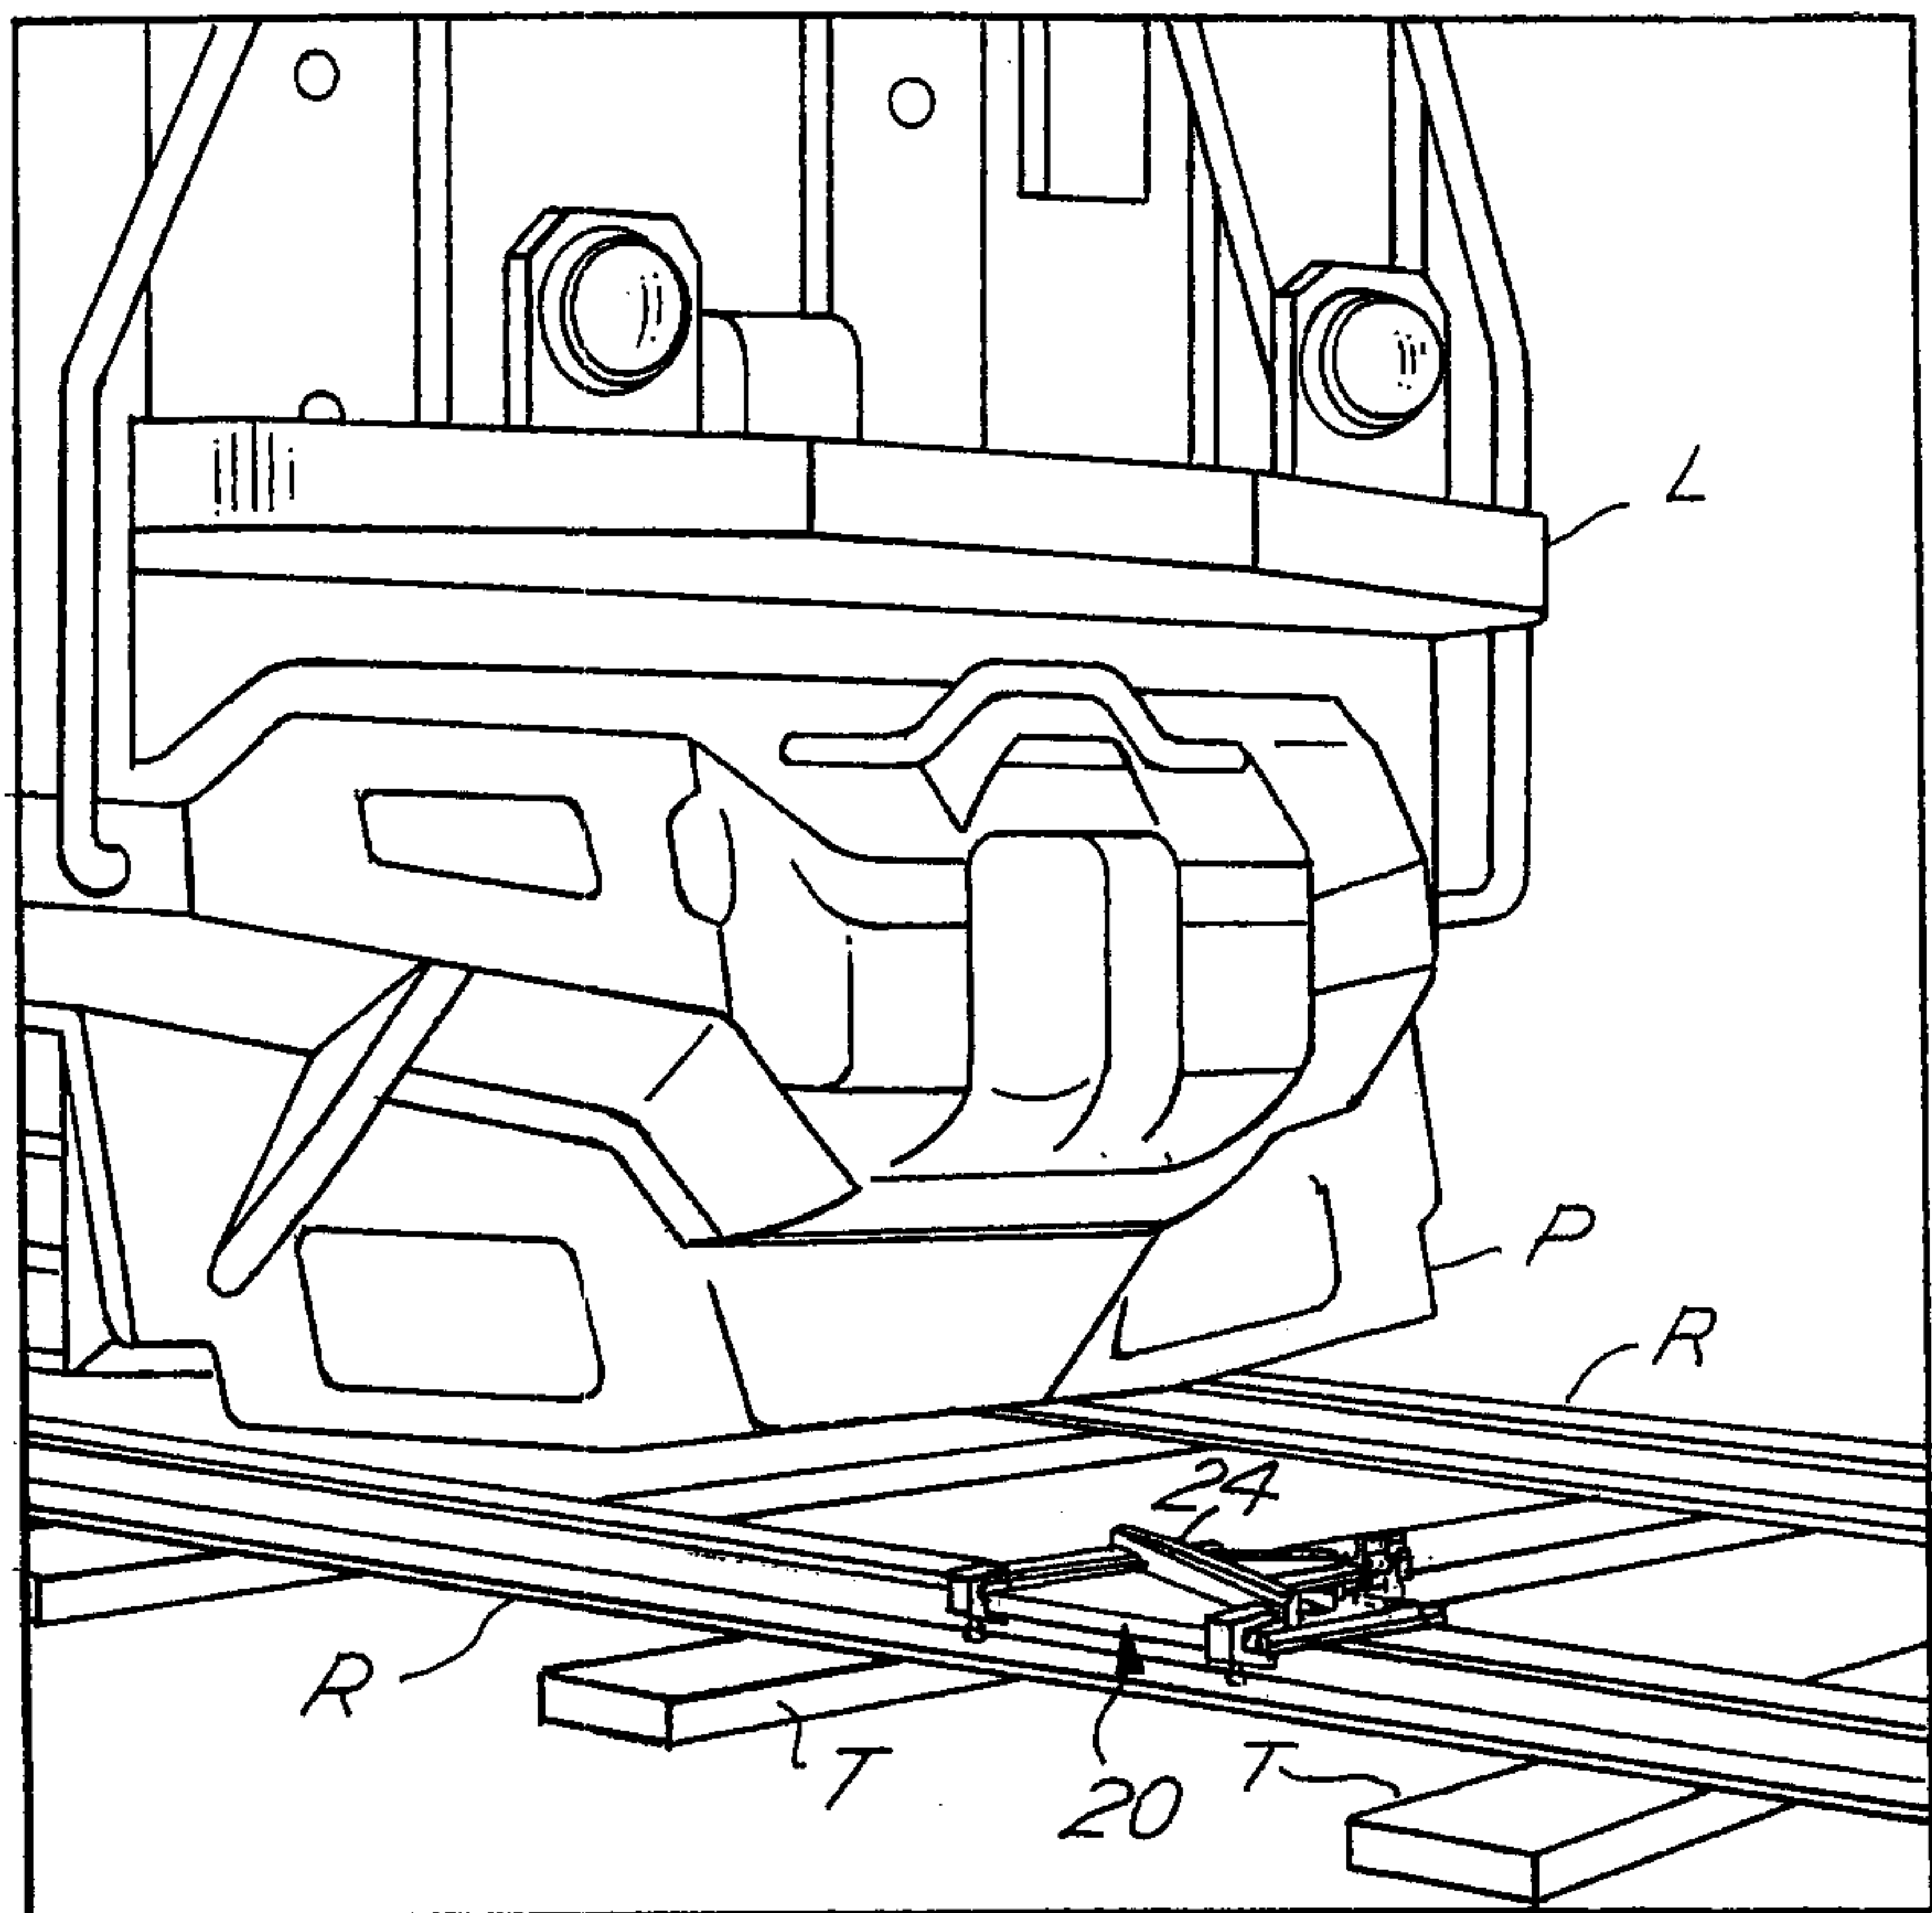


FIG.2

FIG.3

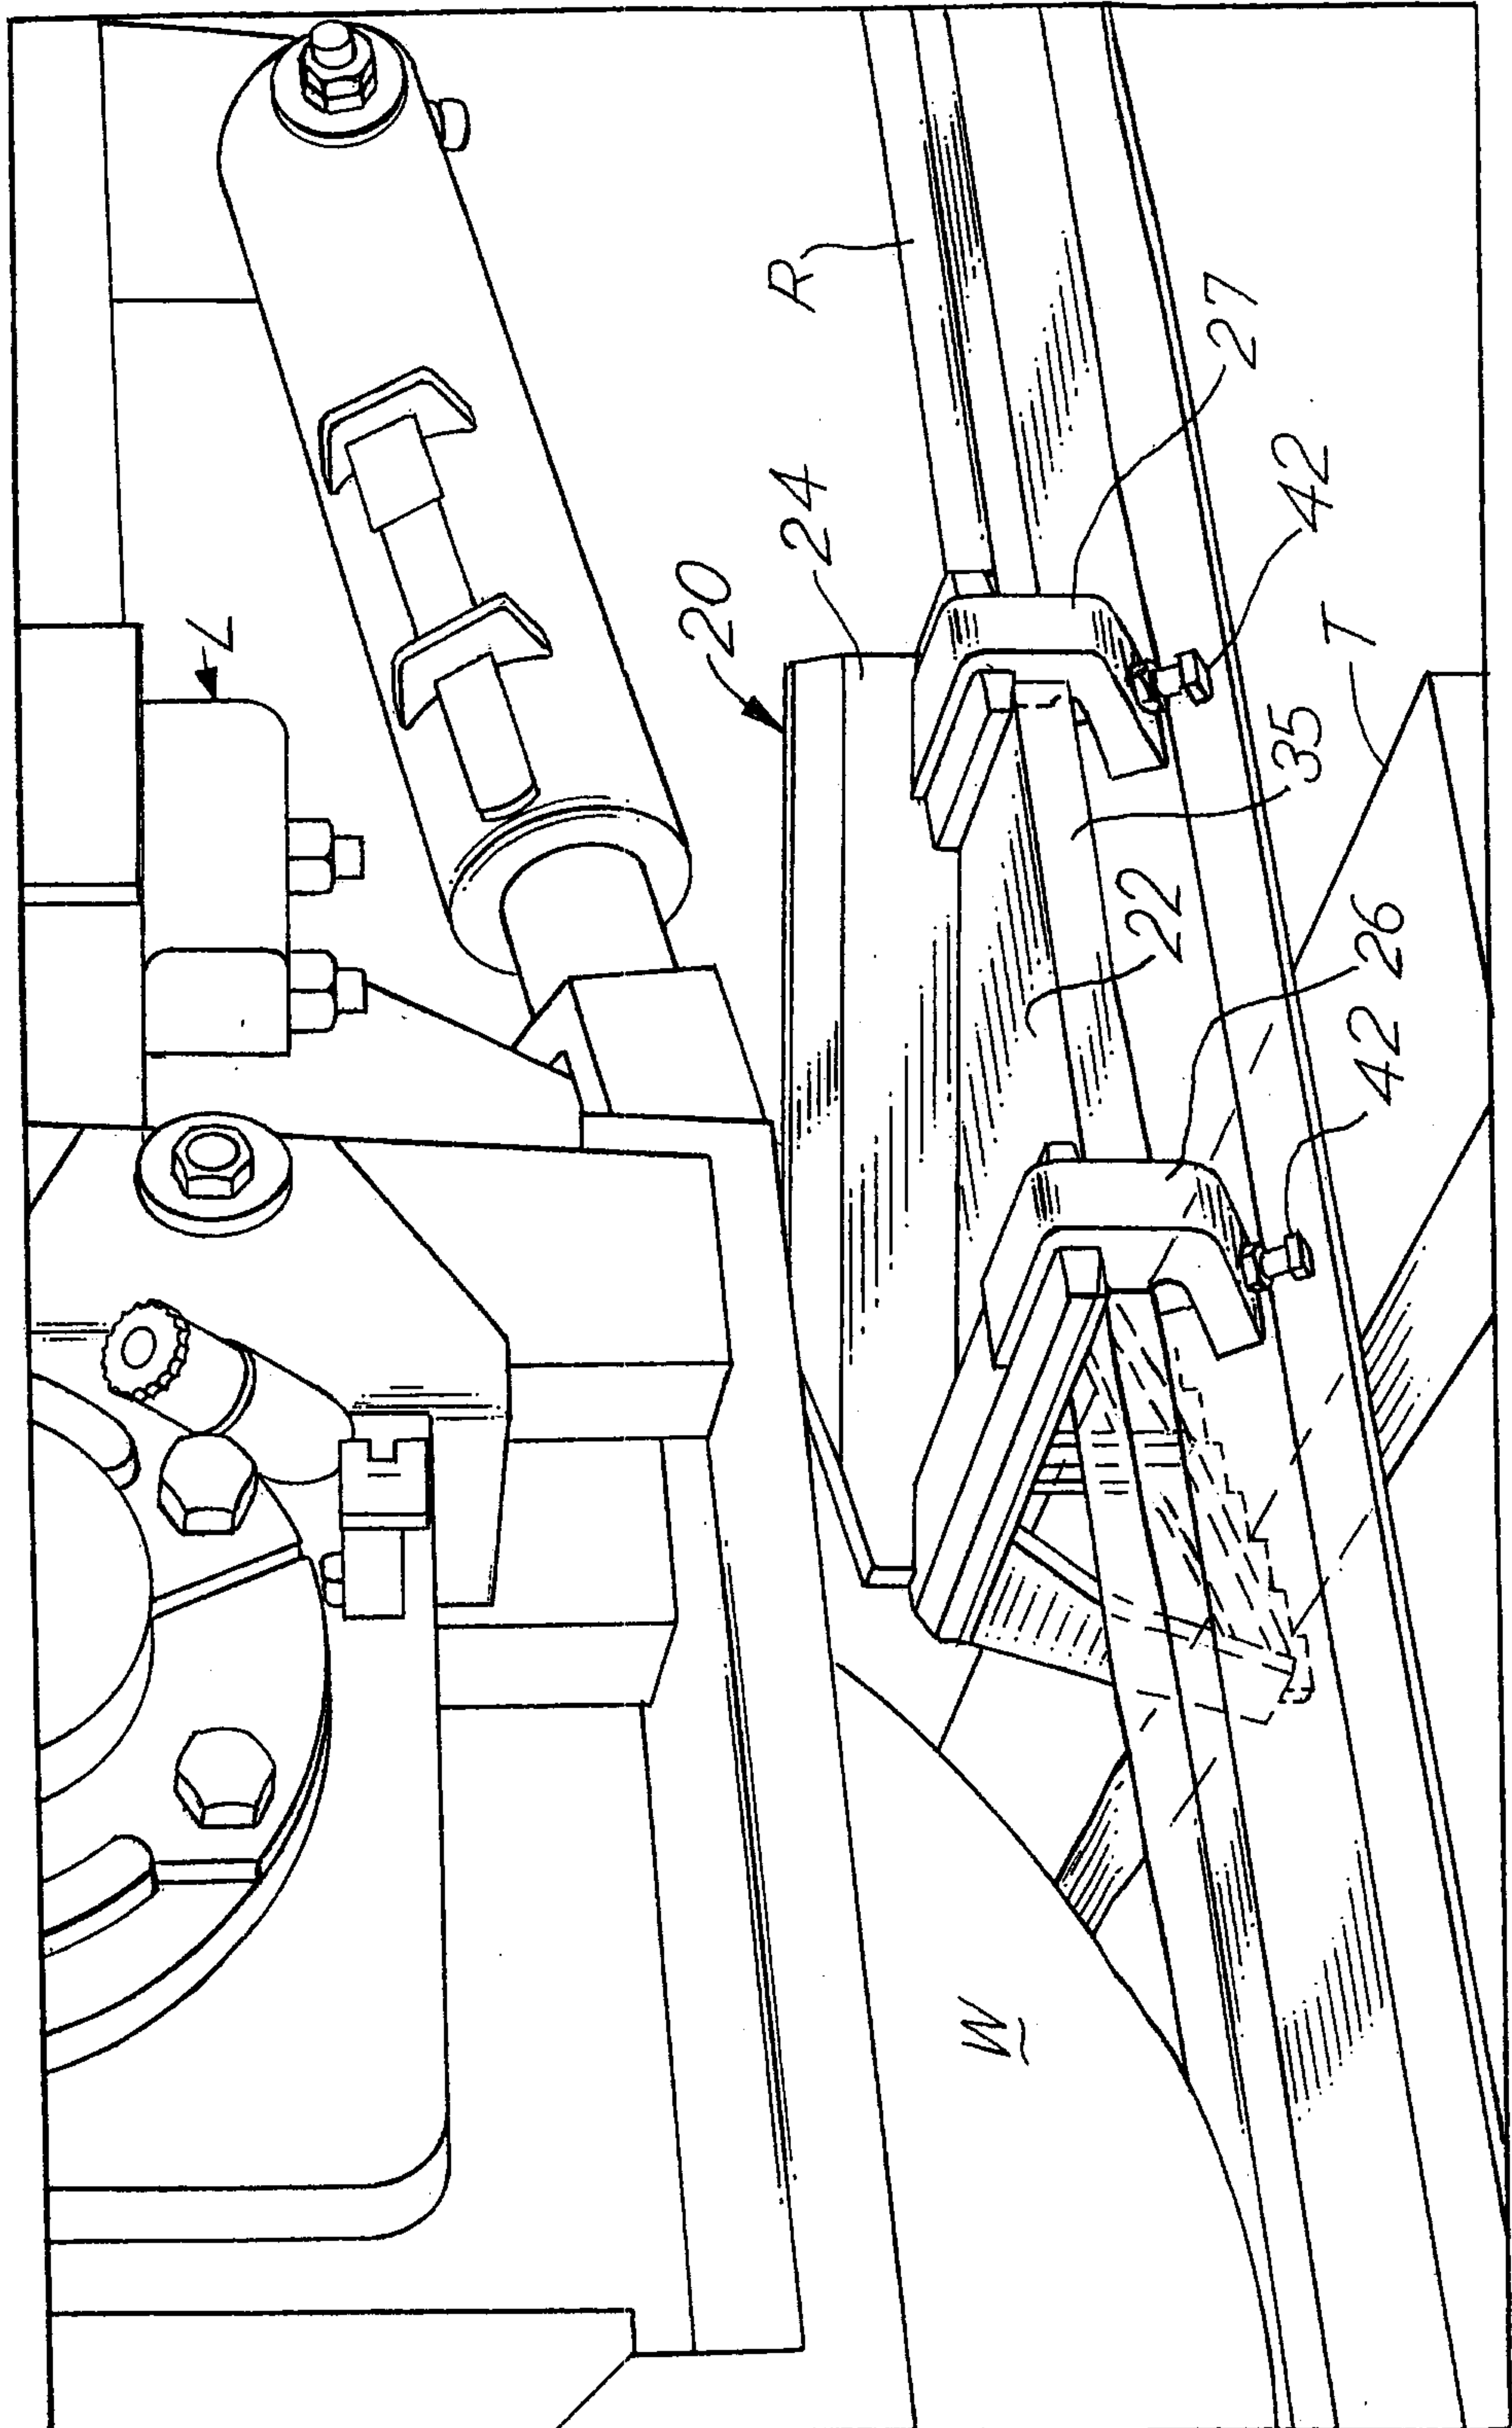


FIG.4

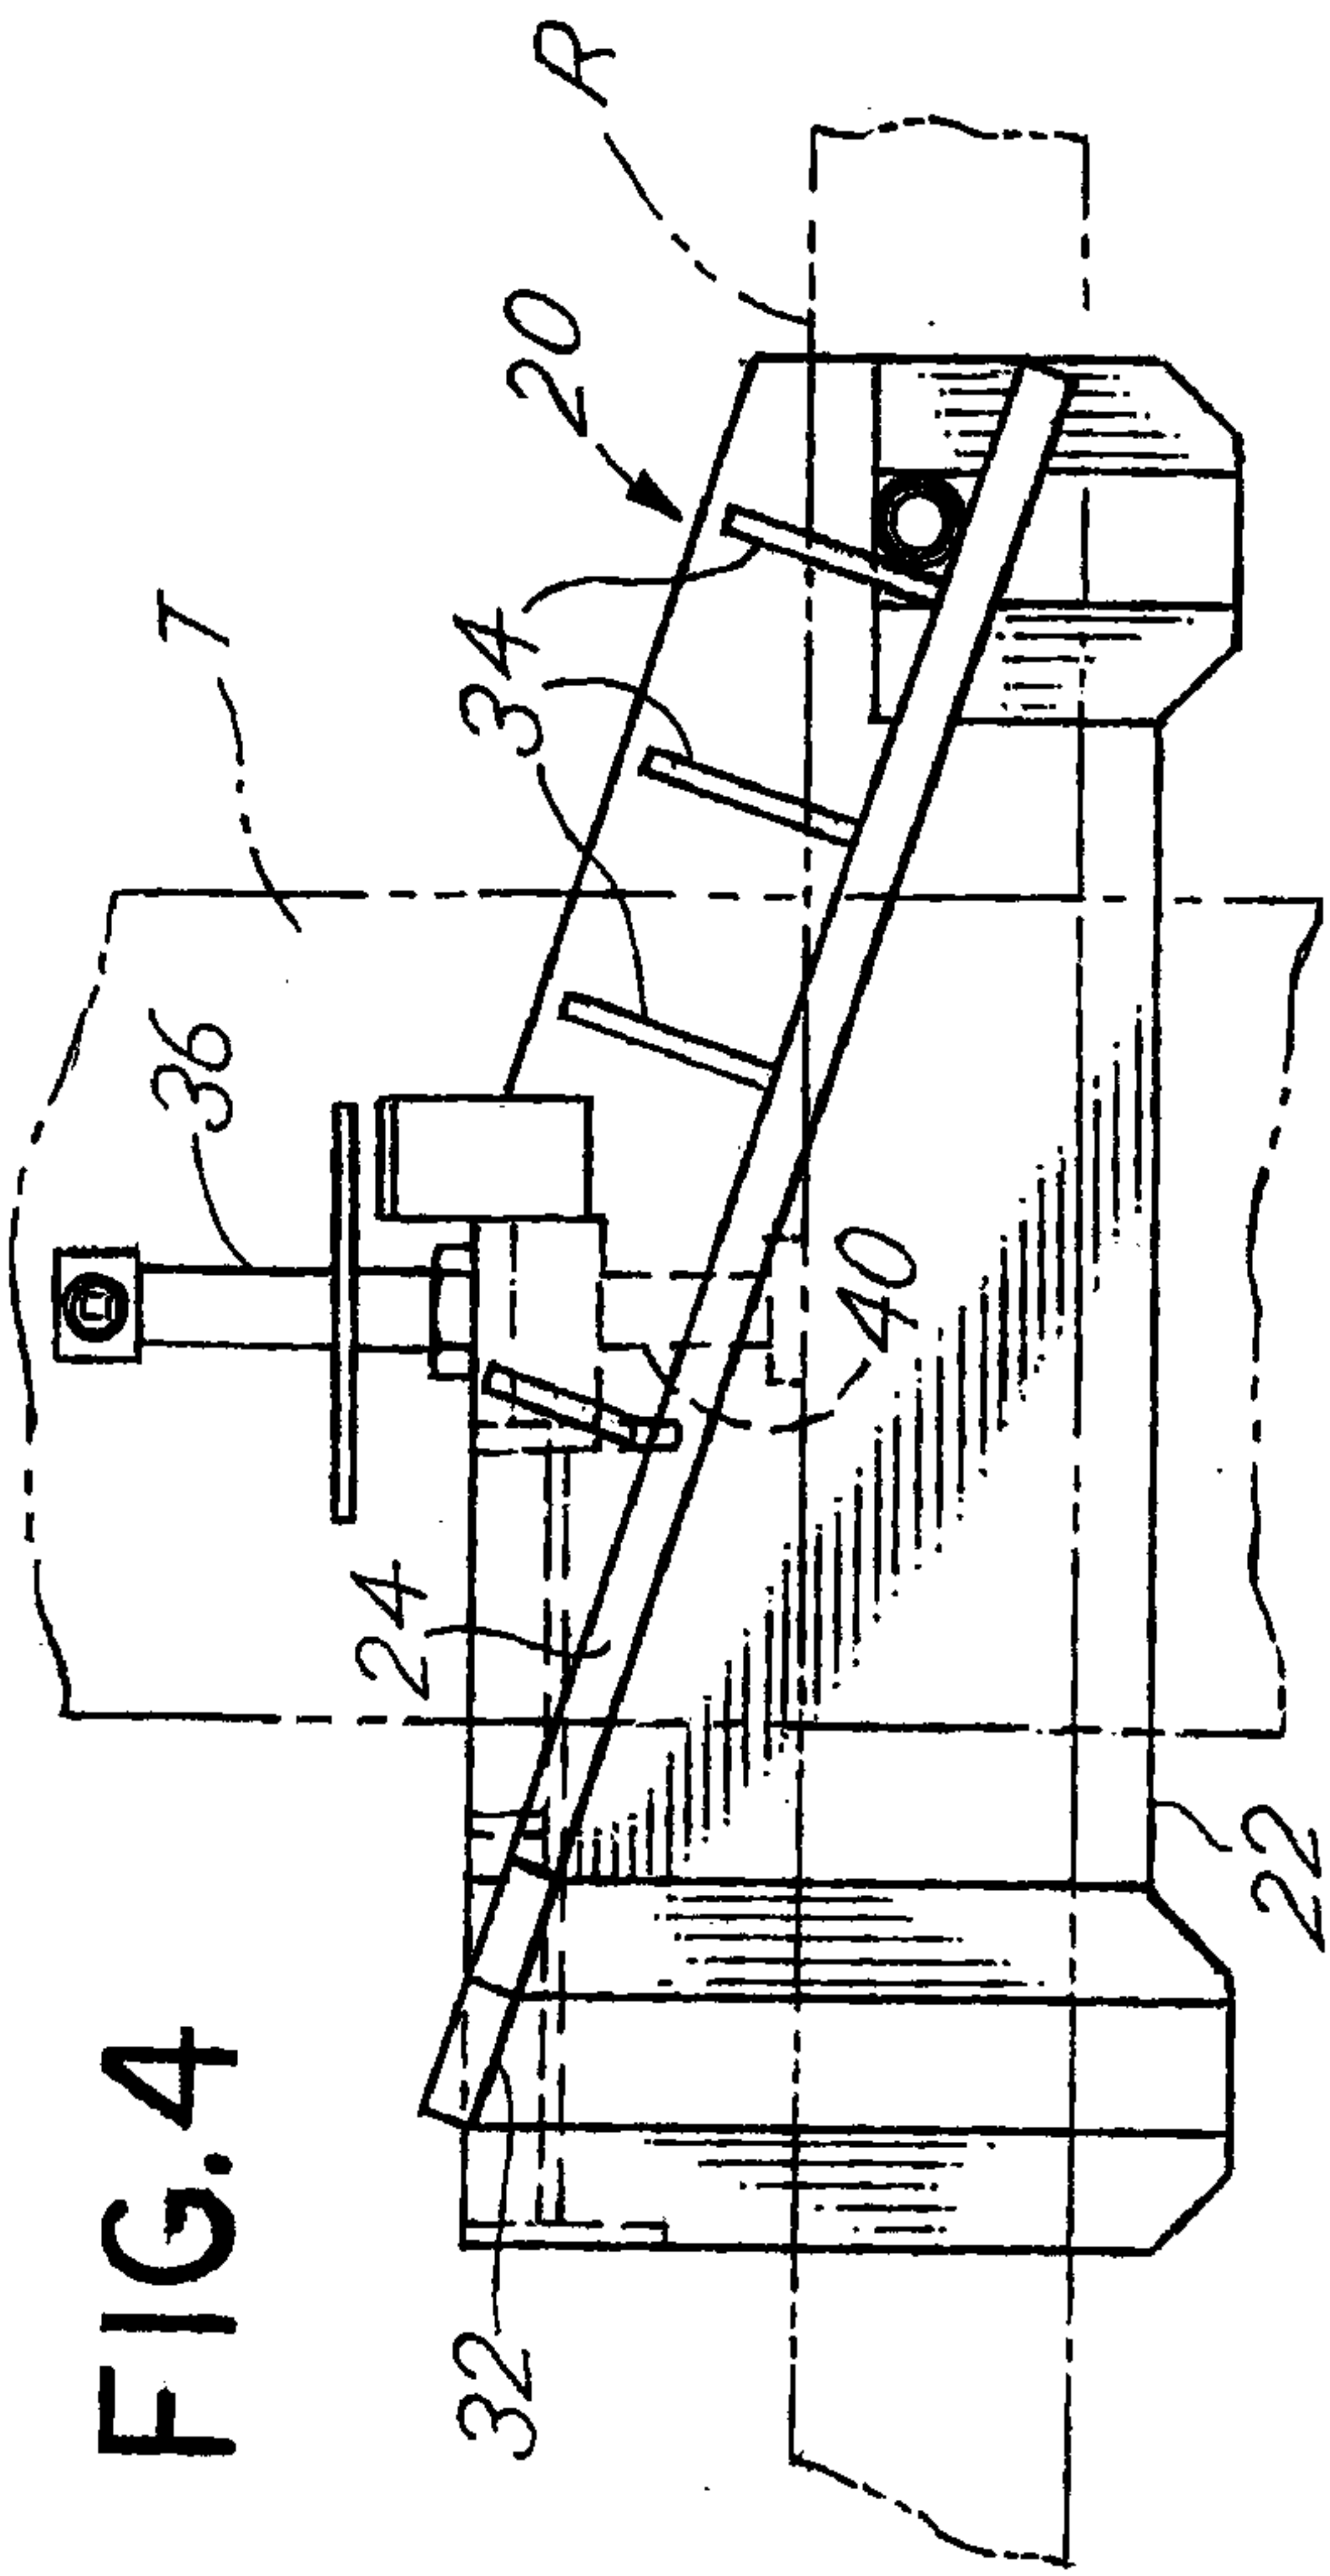


FIG.5


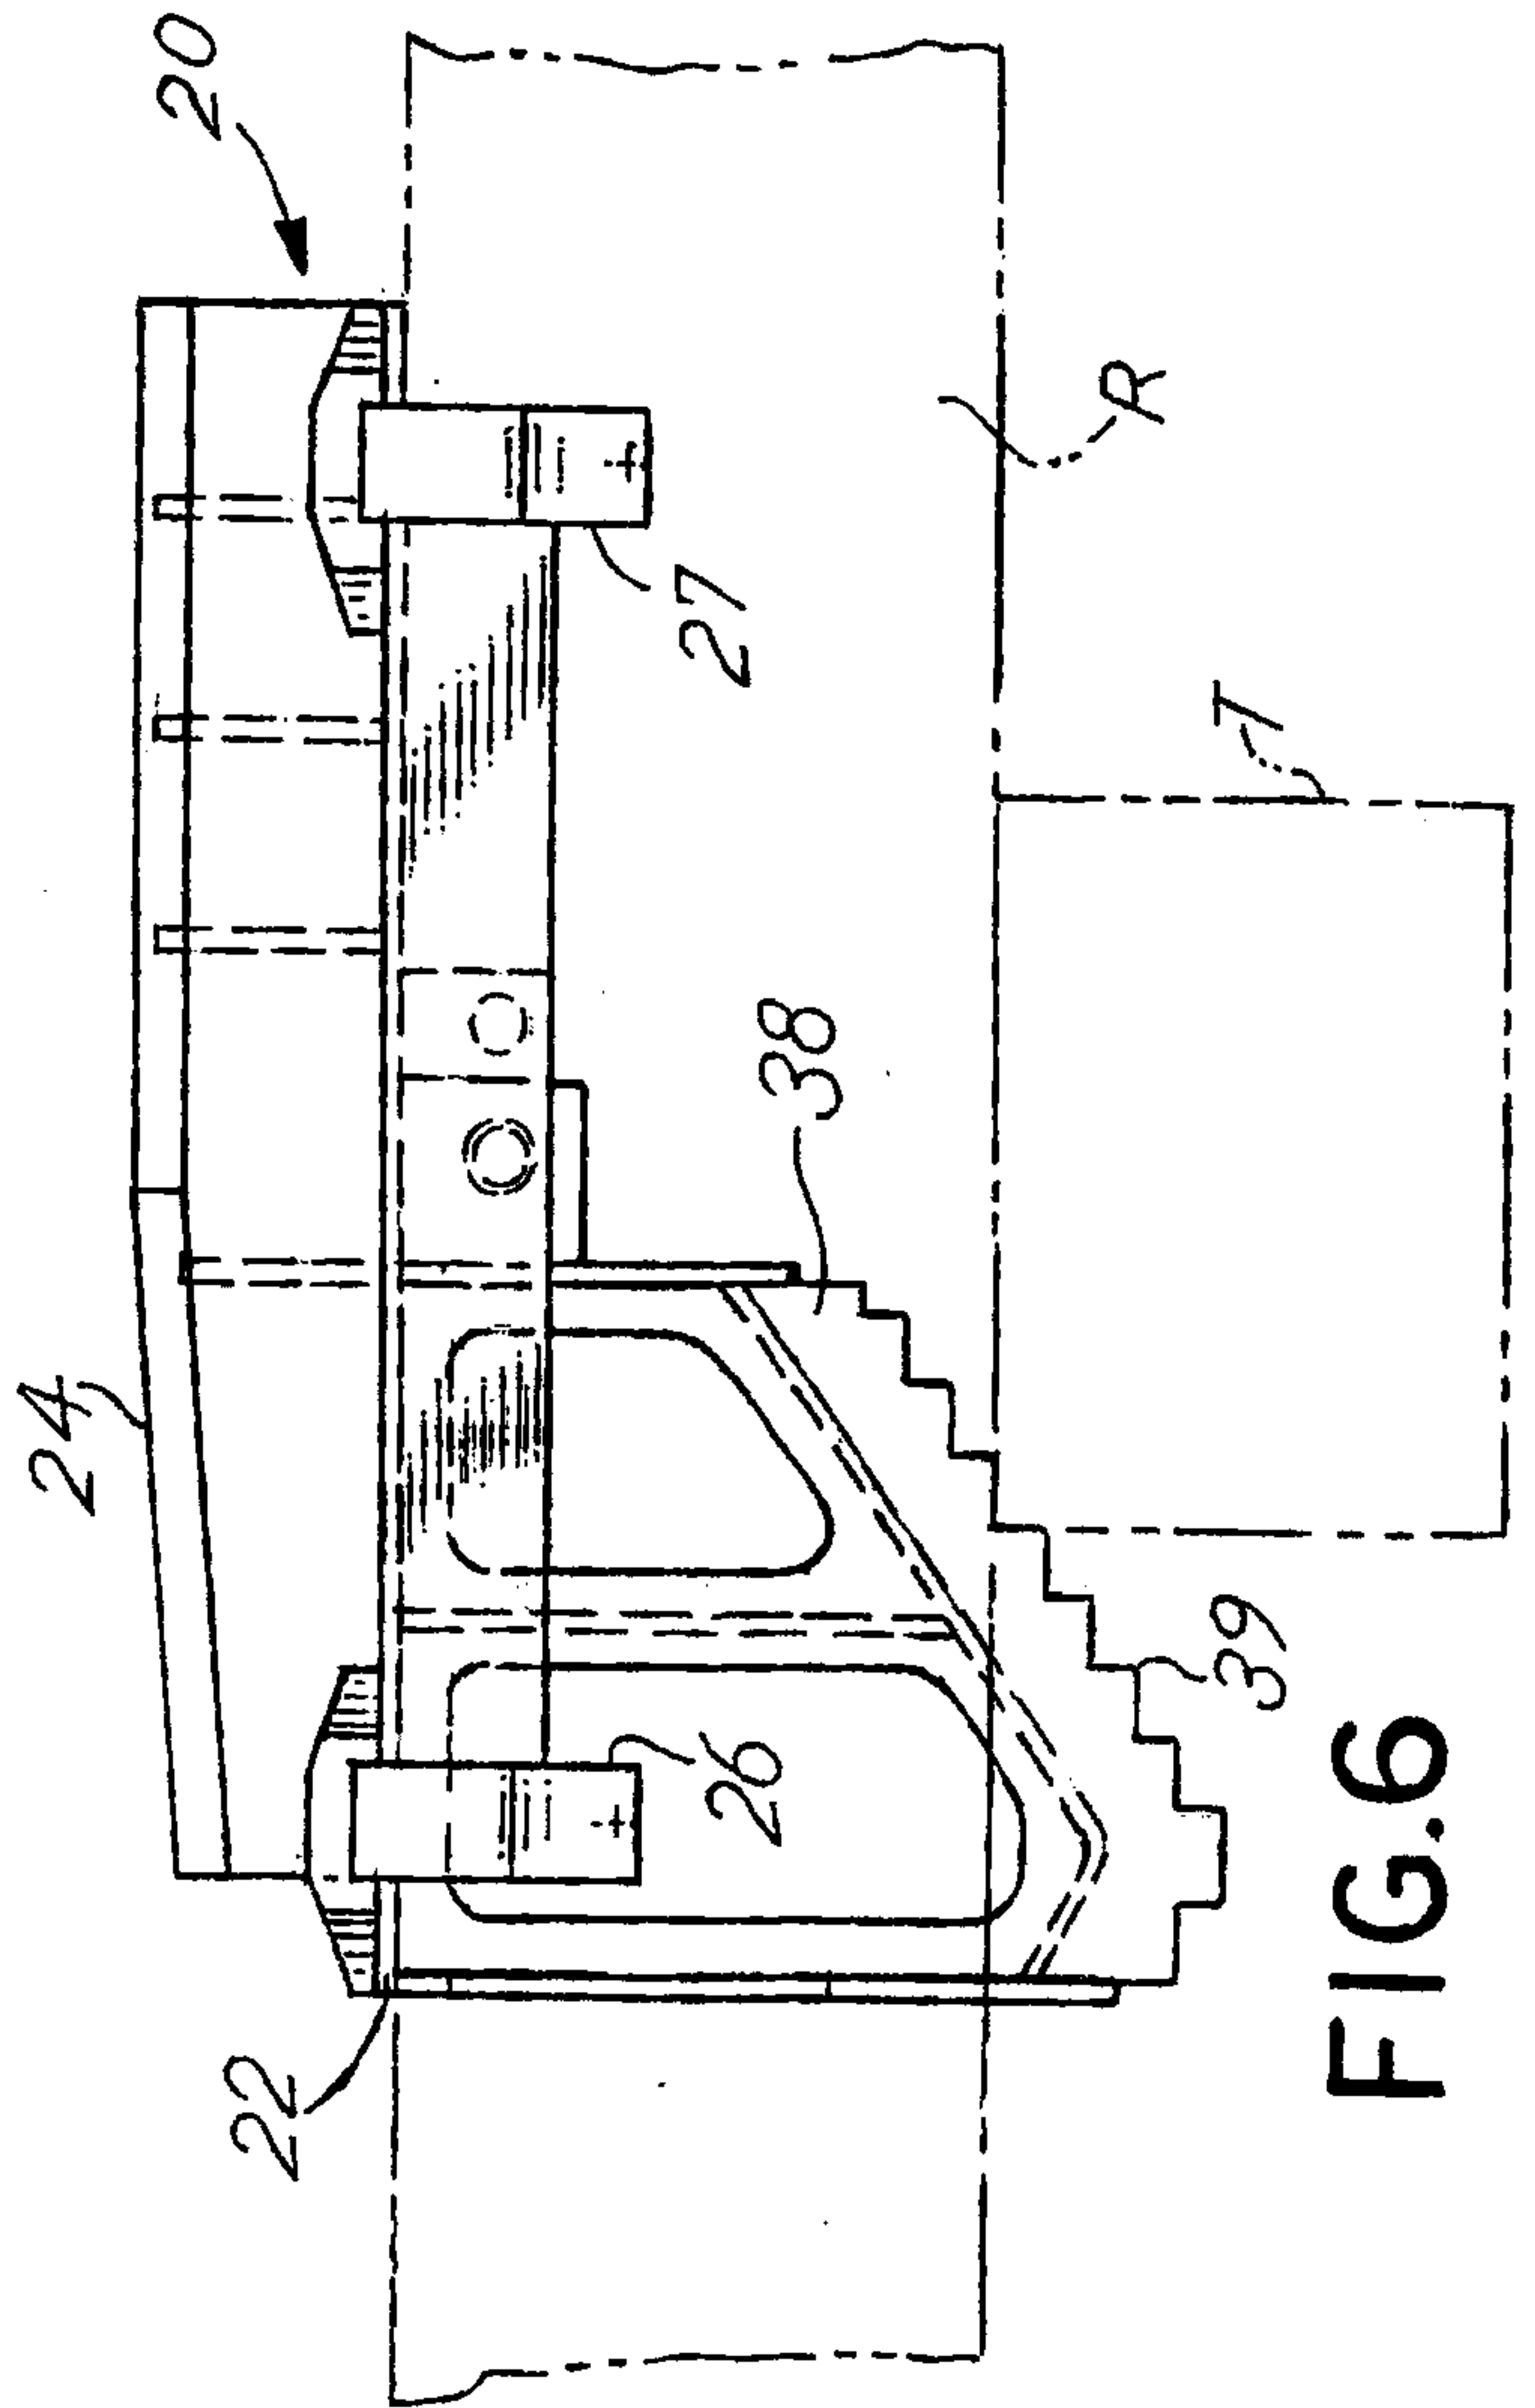


FIG.6

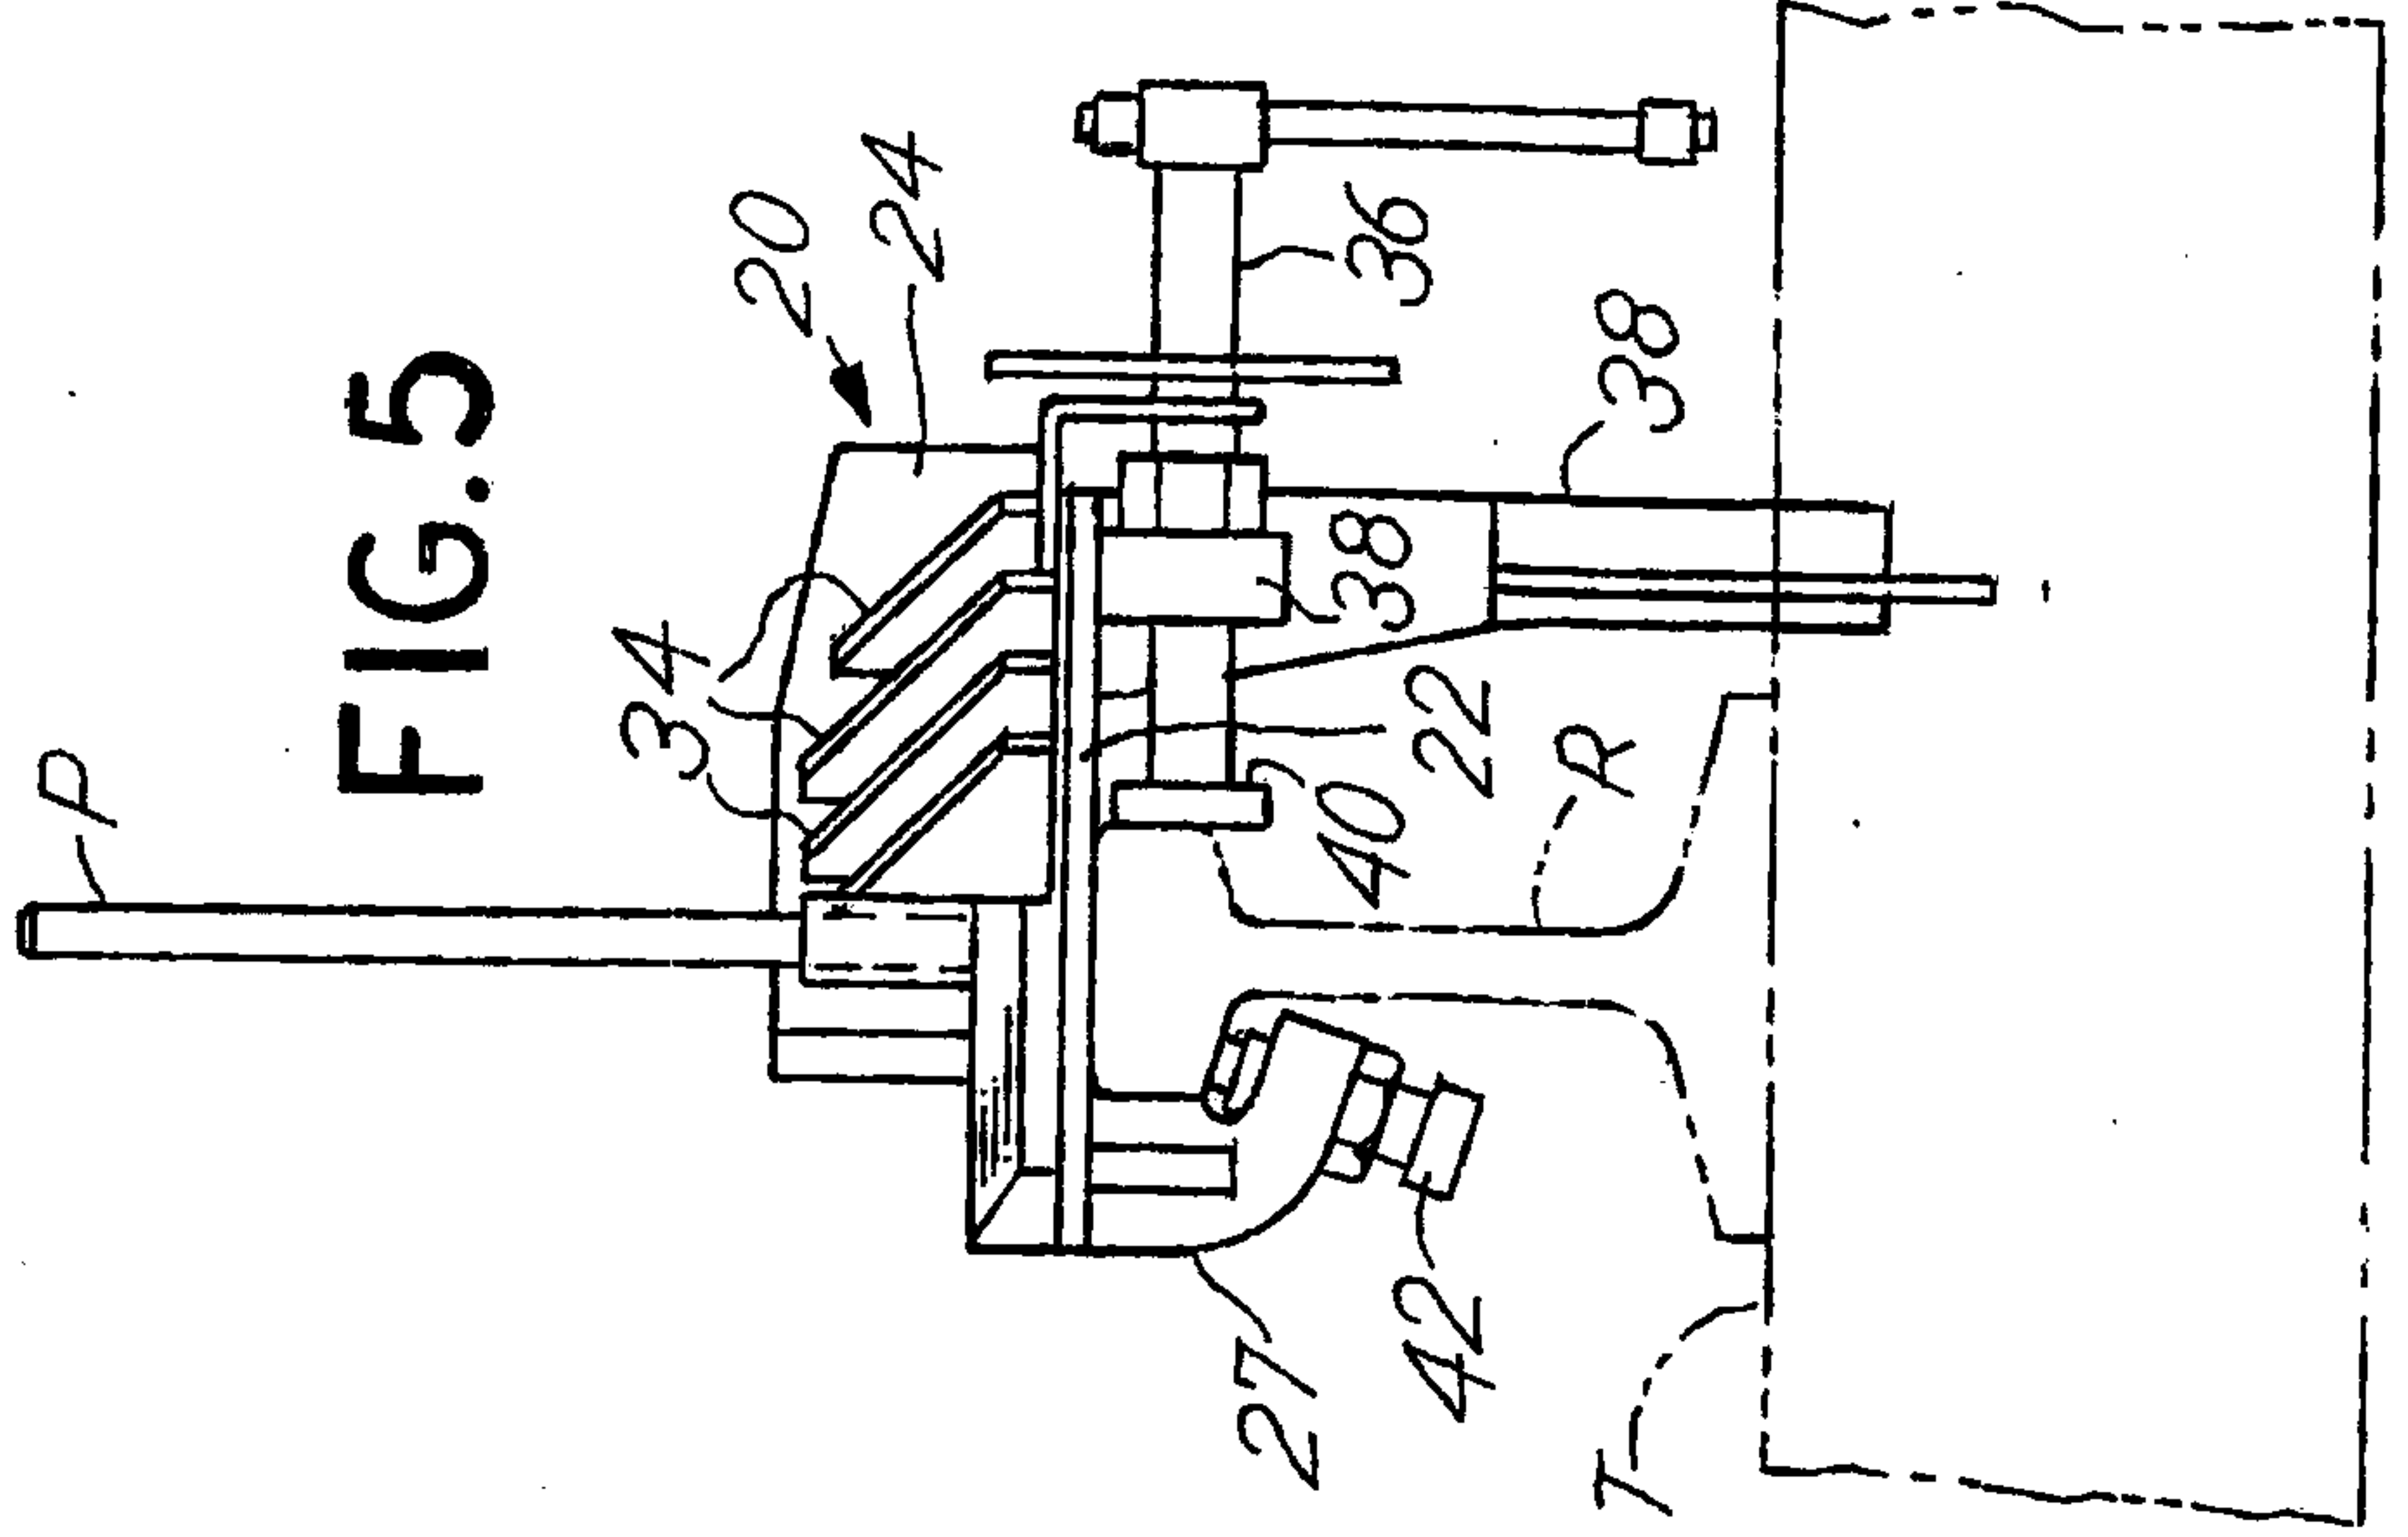