




(86) Date de dépôt PCT/PCT Filing Date: 2009/10/01
(87) Date publication PCT/PCT Publication Date: 2010/04/08
(45) Date de délivrance/Issue Date: 2013/05/14
(85) Entrée phase nationale/National Entry: 2011/04/01
(86) N° demande PCT/PCT Application No.: US 2009/059248
(87) N° publication PCT/PCT Publication No.: 2010/039971
(30) Priorité/Priority: 2008/10/01 (US12/243,933)

(51) Cl.Int./Int.Cl. *C07C 67/08* (2006.01),
C12P 7/62 (2006.01)
(72) Inventeurs/Inventors:
BERRY, WILLIAM W., US;
TEGEN, MARK G., US;
SUTTERLIN, WILLIAM RUSTY, US
(73) Propriétaire/Owner:
INVENTURE RENEWABLES, INC., US
(74) Agent: MBM INTELLECTUAL PROPERTY LAW LLP

(54) Titre : PRODUCTION DE BIODIESEL, DE SUCRES CELLULOSIQUES ET DE PEPTIDES A PARTIR DE L'ESTERIFICATION SIMULTANEE ET DE L'ALCOOLYSE/HYDROLYSE DE MATIERES AVEC DES SUBSTITUANTS CONTENANT DE L'HUILE INCLUANT DES PHOSPHOLIPIDES ET AVEC TENEUR CELLULOSIQUE ET PEPTIDIQUE

(54) Title: PRODUCTION OF BIODIESEL, CELLULOSIC SUGARS, AND PEPTIDES FROM THE SIMULTANEOUS ESTERIFICATION AND ALCOHOLYSIS/HYDROLYSIS OF MATERIALS WITH OIL-CONTAINING SUBSTITUENTS INCLUDING PHOSPHOLIPIDS AND CELLULOSIC AND PEPTIDIC CONTENT

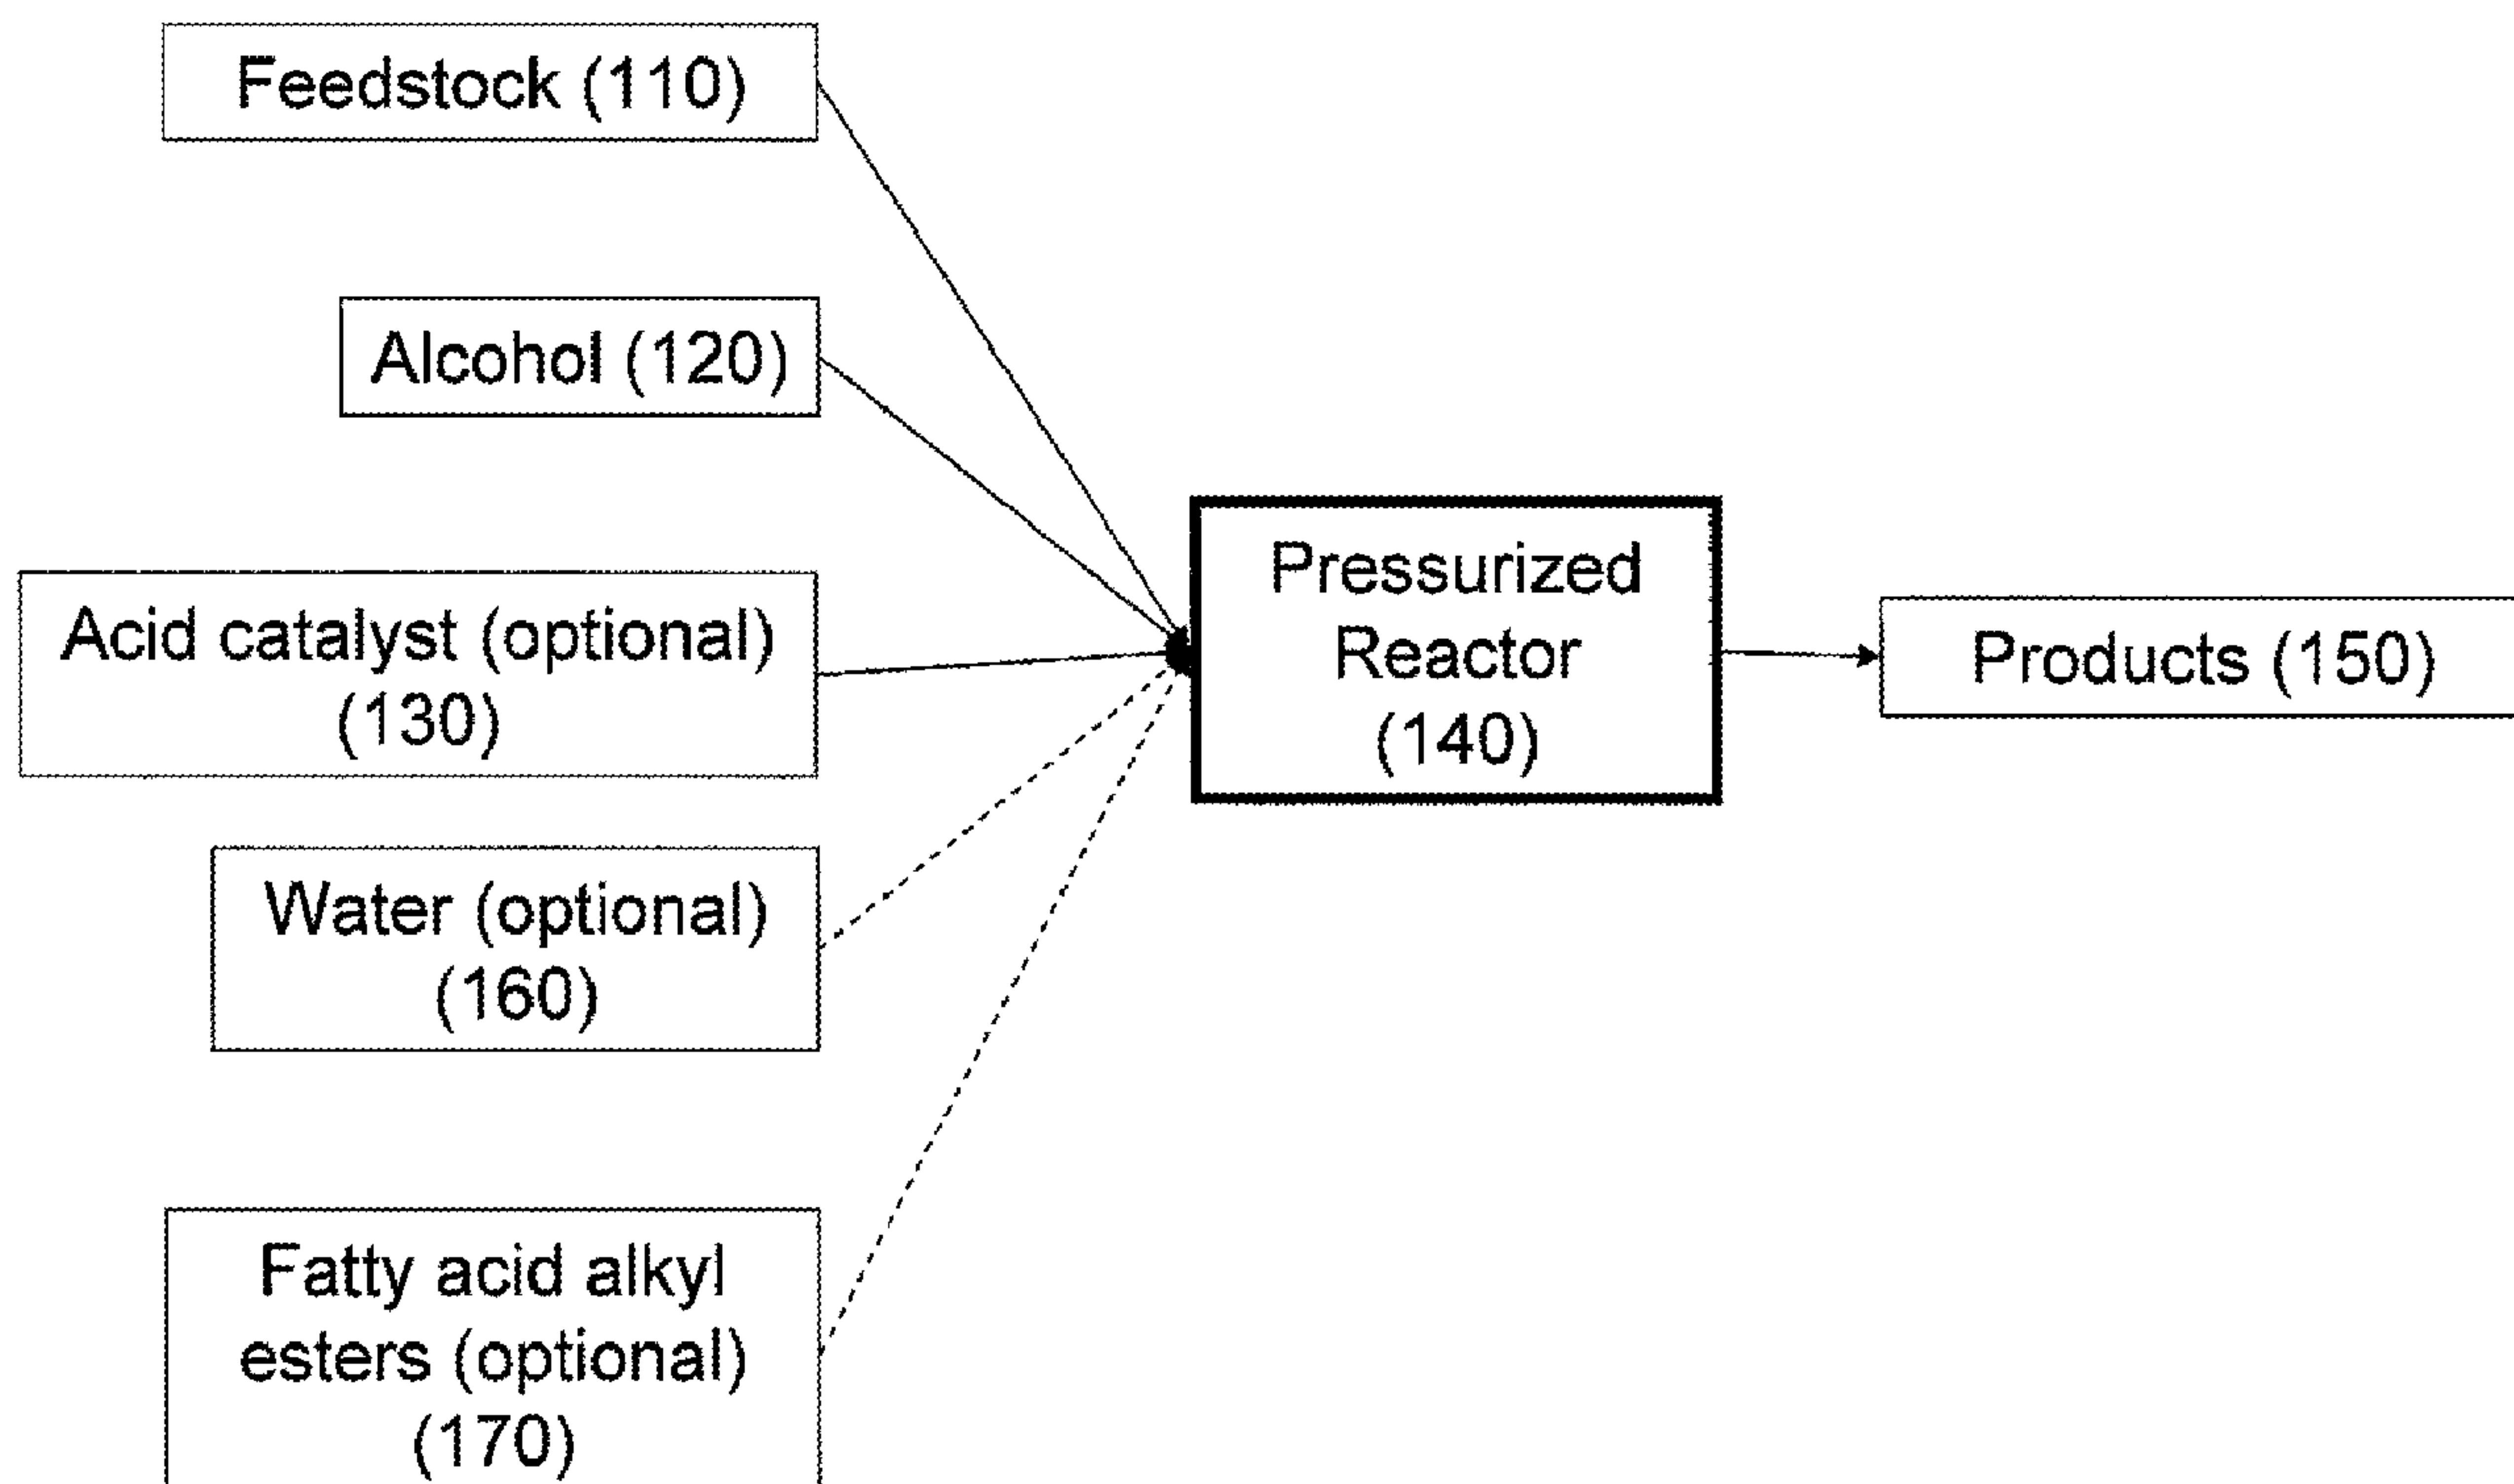

(57) Abrégé/Abstract:

The present invention relates to a method for producing fatty acid alkyl esters as well as cellulosic simplified sugars, shortened protein polymers, amino acids, or combination thereof resulting from the simultaneous esterification and hydrolysis, alcoholysis, or



(57) **Abrégé(suite)/Abstract(continued):**

both of algae and other oil containing materials containing phospholipids, free fatty acids (FFA), glycerides, or combination thereof as well as polysaccharides, cellulose, hemicellulose, lignocellulose, protein polymers, or combination thereof in the presence of an alcohol and an optional acid catalyst.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
8 April 2010 (08.04.2010)



(10) International Publication Number
WO 2010/039971 A3

(51) International Patent Classification:

C07C 67/08 (2006.01) C12P 7/62 (2006.01)

(21) International Application Number:

PCT/US2009/059248

(22) International Filing Date:

1 October 2009 (01.10.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12/243,933 1 October 2008 (01.10.2008) US

(71) Applicant (for all designated States except US): **INVENTURE CHEMICAL, INC.** [US/US]; Po Box 861417, 202 Aime Building, University Of Alabama, 720 2nd Street, Tuscaloosa, AL 35486-0012 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BERRY, William, W.** [US/US]; P.o.box 6636, Lakeland, FL 33807 (US). **TEGEN, Mark, G.** [US/US]; 6720 94th Street Court Nw, Gig Harbor, WA 98332 (US). **SUTTERLIN, William Rusty** [US/US]; 1609 Tide Water Drive, Columbia, Missouri 65202 (US).

(74) Agent: **BRANCH, John, W.**; FROMMER LAWRENCE & HAUG LLP, 745 Fifth Avenue, New York, NY 10151 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:


- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(88) Date of publication of the international search report:

1 July 2010

(54) Title: PRODUCTION OF BIODIESEL, CELLULOSIC SUGARS, AND PEPTIDES FROM THE SIMULTANEOUS ESTERIFICATION AND ALCOHOLYSIS/HYDROLYSIS OF MATERIALS WITH OIL-CONTAINING SUBSTITUENTS INCLUDING PHOSPHOLIPIDS AND CELLULOSIC AND PEPTIDIC CONTENT

Fig. 1

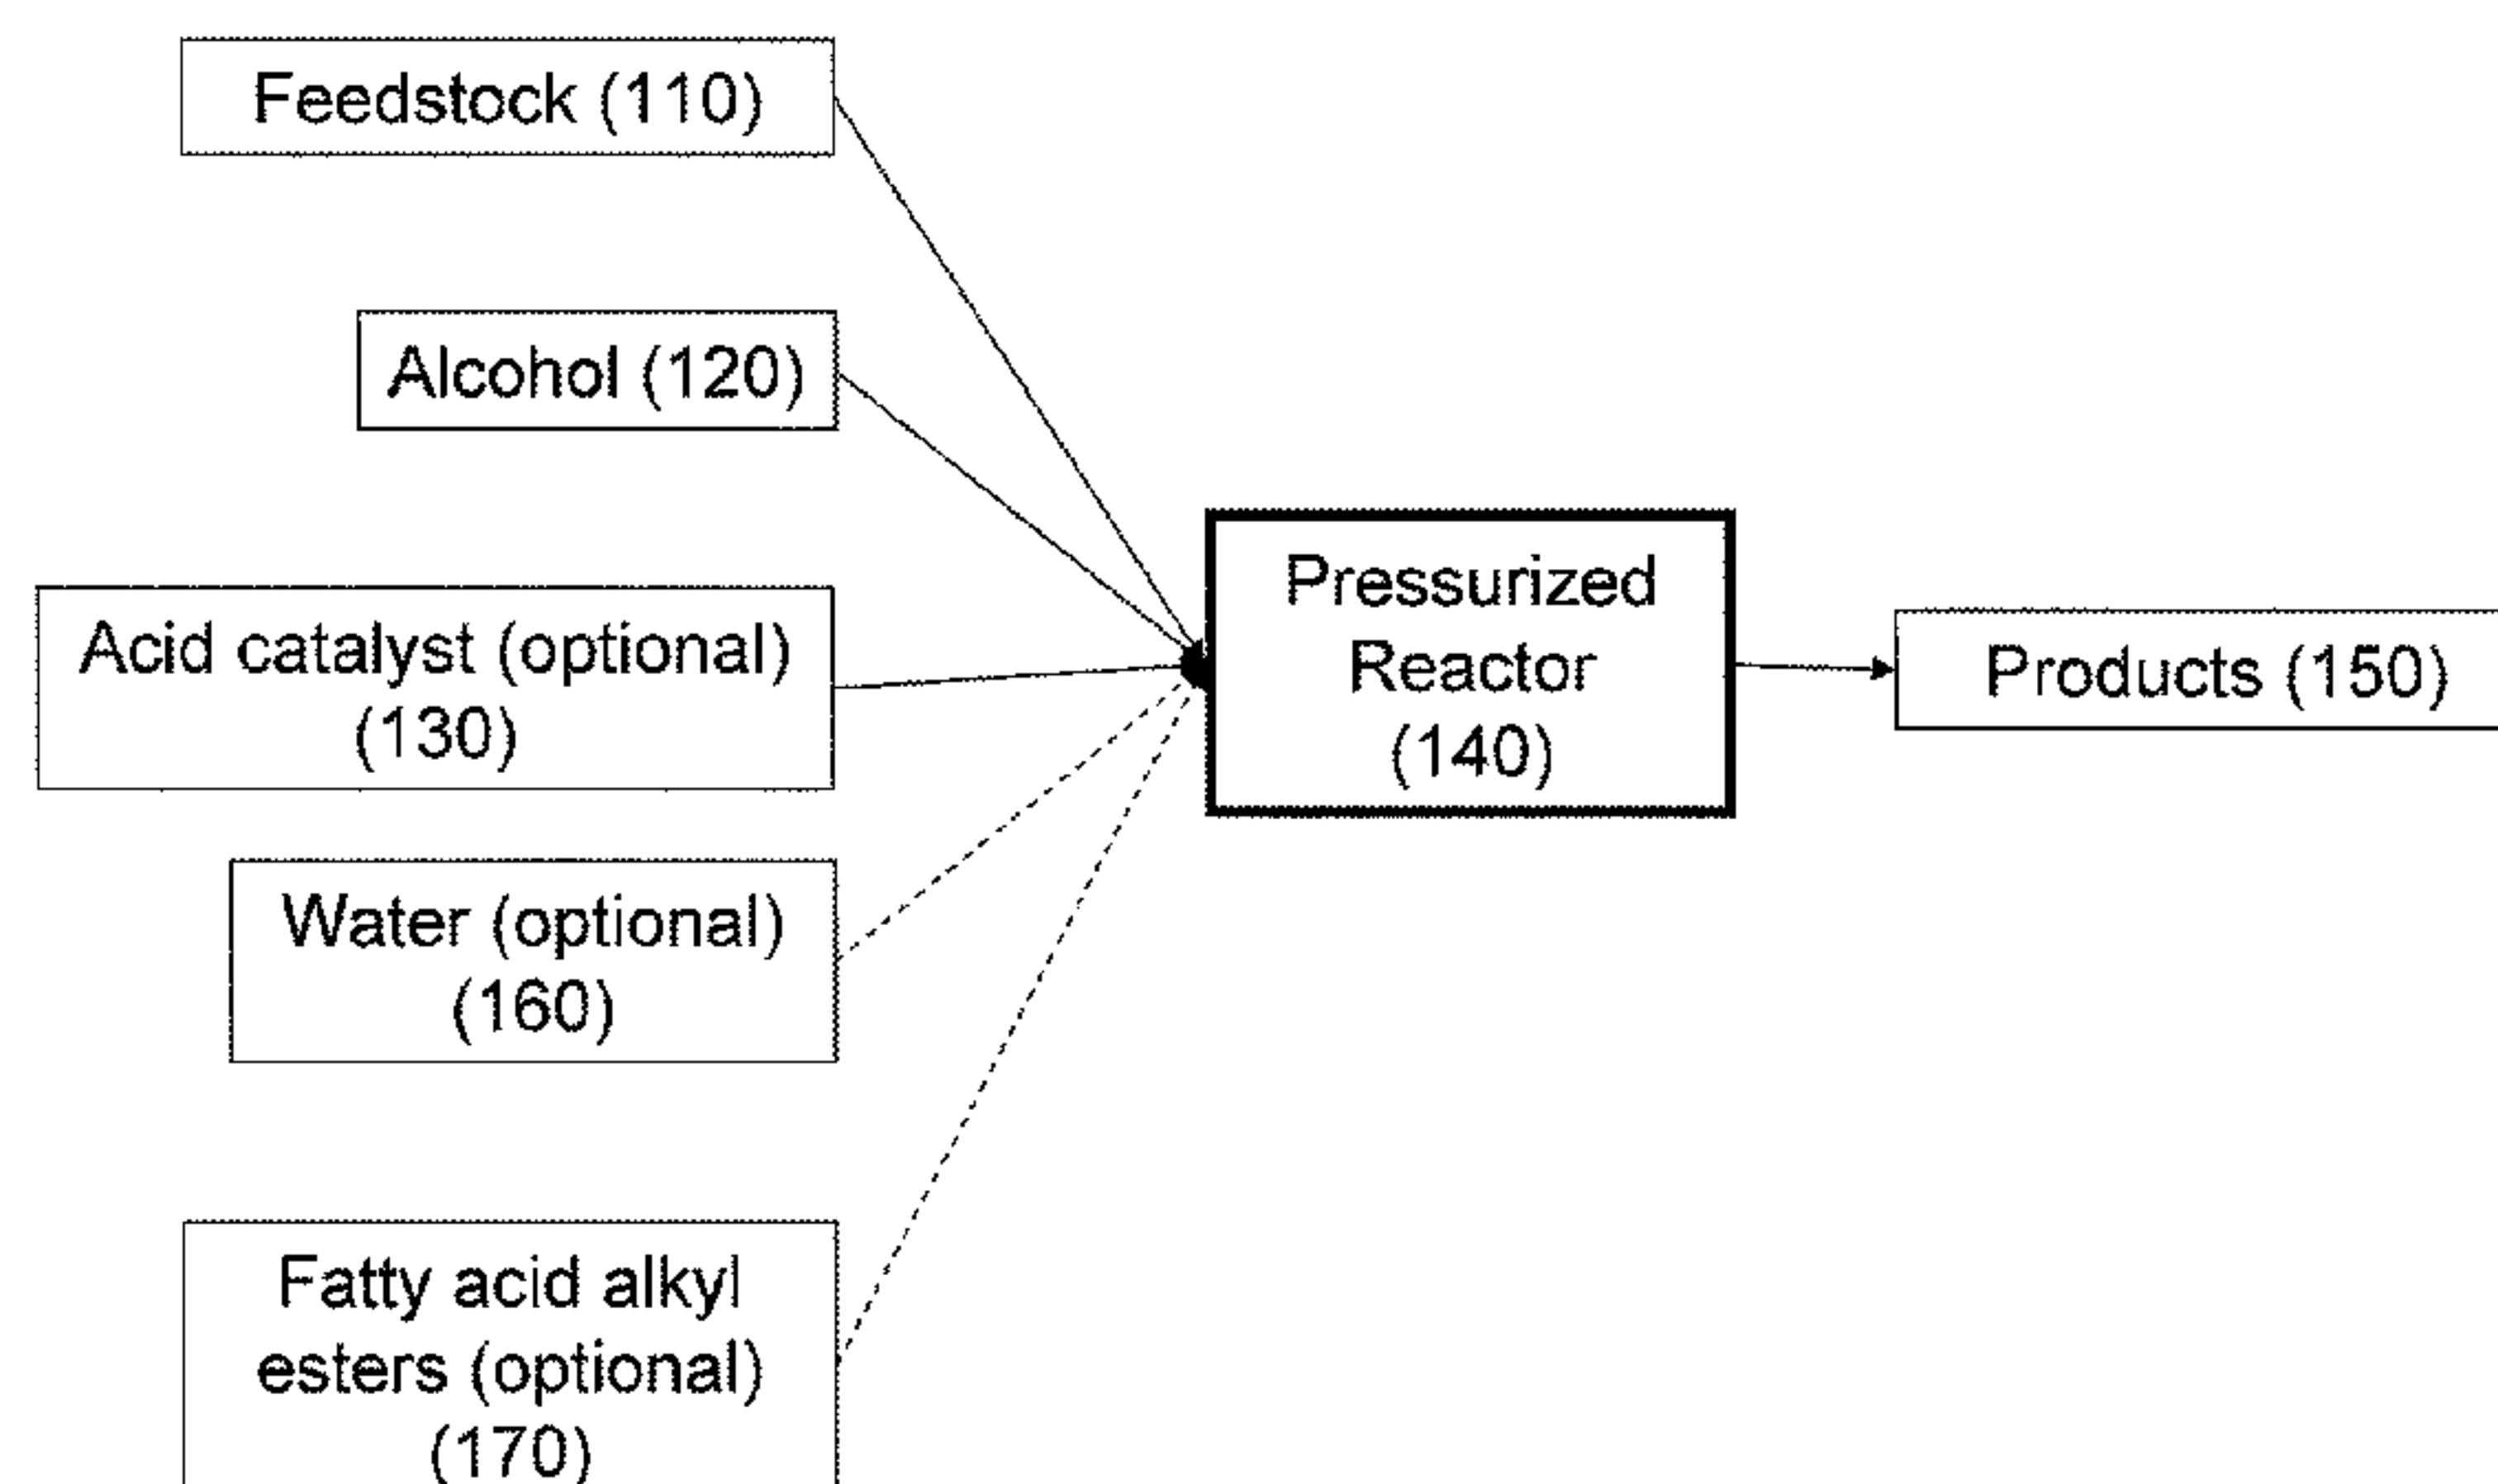

(57) Abstract: The present invention relates to a method for producing fatty acid alkyl esters as well as cellulosic simplified sugars, shortened protein polymers, amino acids, or combination thereof resulting from the simultaneous esterification and hydrolysis, alcoholysis, or both of algae and other oil containing materials containing phospholipids, free fatty acids (FFA), glycerides, or combination thereof as well as polysaccharides, cellulose, hemicellulose, lignocellulose, protein polymers, or combination thereof in the presence of an alcohol and an optional acid catalyst.



WO 2010/039971 A3

**PRODUCTION OF BIODIESEL, CELLULOSIC SUGARS, AND PEPTIDES
FROM THE SIMULTANEOUS ESTERIFICATION AND
ALCOHOLYSIS/HYDROLYSIS OF MATERIALS WITH OIL-
CONTAINING SUBSTITUENTS INCLUDING PHOSPHOLIPIDS AND
CELLULOSIC AND PEPTIDIC CONTENT**

FIELD OF THE INVENTION

[0002] The present invention pertains to the esterification of phospholipids, free fatty acids (FFAs) and glycerides with alcohol optionally in the presence of an acid catalyst to form fatty acid alkyl esters. The present invention further pertains to the simultaneous esterification and hydrolysis/alcoholysis of a feedstock containing phospholipids, free fatty acids (FFAs), glycerides, or a combination thereof as well as cellulosic material, proteins, or both in the presence of an alcohol and, optionally, acid catalyst to form fatty acid alkyl esters as well as cleaved cellulosic material, shorter peptides, amino acids, or a combination thereof.

BACKGROUND OF THE INVENTION

[0003] Over the past three decades interest in the reduction of air pollution, and in the development of domestic energy sources, has triggered research in many countries on the development of non-petroleum fuels for internal combustion engines. For compression ignition (diesel) engines, it has been shown that the simple alcohol esters of fatty acids (biodiesel) are acceptable alternative diesel fuels. Biodiesel has a higher oxygen content than petroleum diesel, and therefore reduces emissions of particulate matter, hydrocarbons, and carbon monoxide, while also reducing sulfur emissions due to a low sulfur content.

[0004] For spark ignition (gasoline) engines, ethanol, produced by fermentation of simple sugars generated from corn starch, can be blended with petroleum gasoline to substitute petroleum content with renewable content fuel, reduce dependence on foreign oil, reduce

carbon dioxide emissions, and improve octane in the blended fuel. Since both ethanol and biodiesel are made from agricultural materials, which are produced via photosynthetic carbon fixation (e.g., by plants and by animals that consume plants), the combustion of biodiesel and ethanol does not contribute to net atmospheric carbon levels.

[0005] Initial efforts at the production, testing, and use of biodiesel employed refined edible vegetable oils (e.g. soybean oil, canola oil), used cooking oils (e.g. spent fryer oils) and animal fats (e.g., beef tallow) as feedstocks for fuel synthesis (Krawczyk, T., *INFORM*, 7: 800-815 (1996); Peterson, C. L., et al., *Applied Engineering in Agriculture*, 13: 71-79 (1997); Holmberg, W. C., and J. E. Peeples, *Biodiesel: A Technology, Performance, and Regulatory Overview*, National Soy Diesel Development Board, Jefferson City, Mo. (1994)).

[0006] Simple alkali-catalyzed transesterification technology (Freedman, B., et al., *J. Am. Oil Chem. Soc.*, 61(10): 1638-1643 (1984)) is efficient at esterifying the acylglycerol-linked fatty acids of such feedstocks and is employed in making these fuels. More recently, methods have been developed to produce fatty acid methyl esters (FAME) from cheaper, less highly refined lipid feedstocks such as spent restaurant grease (Mittelbach, M., and P. Tritthart, *J. Am Oil Chem. Soc.*, 65(7):1185-1187 (1988); Graboski, M. S., et al., *The Effect of Biodiesel Composition on Engine Emissions from a DDC Series 60 Diesel Engine*, Final Report to USDOE/National Renewable Energy Laboratory, Contract No. ACG-8-17106-02 (2000); Haas, M. J., et al., *Enzymatic Approaches to the Production of Biodiesel Fuels*, in Kuo, T. M. and Gardner, H. W. (Eds.), *Lipid Biotechnology*, Marcel Dekker, Inc., New York, (2002), pp. 587-598).

[0007] In addition to acylglycerols, less highly refined lipid feedstocks can contain substantial levels of free fatty acids (FFA) and other nonglyceride materials. Biodiesel synthesis from these feedstocks can be accomplished by conventional alkaline catalysis, which then requires an excess of alkali since the FFA (which are not esterified by this method) are converted to their alkali salts. These alkali salts can cause difficulties during product washing due to their ready action as emulsifiers. Ultimately, the alkali salts are removed and discarded. This approach thus involves a loss of potential product, increases catalyst expenses, and can entail a disposal cost.

[0008] Further, with higher FFA levels, i.e. typically in excess of 2%, a general approach is to utilize an acid esterification step, since at higher FFA values the extent of soap formation

with a single stage, transesterification process is excessive and renders the process uneconomical and potentially unworkable. To handle the higher FFA content, a two step process involving first acid-catalyzed esterification of the free fatty acids and then alkali-catalyzed transesterification of glyceride-linked fatty acids can be employed to achieve conversion of mixed, heterogeneous feedstocks (Canakci, M., and J. Van Gerpen, Biodiesel Production from Oils and Fats with High Free Fatty Acids, Abstracts of the 92nd American Oil Chemists' Society Annual Meeting & Expo, p. S74 (2001); U.S. Pat. Nos. 2,383,601; 2,494,366; 4,695,411; 4,698,186; 4,164,506). However, these methods can require multiple acid-catalyzed esterification steps to reduce the concentration of free fatty acids to acceptably low levels. In addition, high separation efficiency is required between the two stages to minimize the potential for acid catalyst transfer into the base catalyst section.

[0009] The feedstocks used for current biodiesel production are conventional commodity materials, thus they have other established markets which basically set the minimum commodity prices. As a result, the bulk of the biodiesel production cost relates to the feedstock cost. While there are a number of established process technologies in the biodiesel industry, as a result of the feedstock cost being such a high factor (i.e. 75% to 80%) there is a surprisingly small difference between the various processes in overall operational costs (due to this feedstock factor).

[0010] The production of ethanol for fuel use is well established and the growth in this industry over the past 2 decades has been significant. Fermentation is an (obviously) old process going back literally thousands of years to early wine and beer making. The basic techniques remain the same, however in the modern ethanol production process highly efficient enzymes and yeasts have been developed to provide for more efficient conversion of the fermentable materials. Further, the process technology associated with fuel grade ethanol production has also advanced over the years, e.g. energy recovery, so that current technology has a high degree of efficiency.

[0011] The primary feedstocks for current commercial ethanol production are corn (primarily in the United States) and sugar (especially in Brazil). As in the biodiesel case, these materials are “conventional” agricultural commodities and have historically had various markets associated with them, i.e. food sources and the like. It is also apparent that since these are commodity products, there are various non-fuel market pressures that dictate price.

As such, for ethanol production, as in the case of biodiesel, the feedstock represents the vast majority of the operating cost (i.e. as much as 80%).

[0012] For both the biodiesel and ethanol fuel markets and for the large-scale expansion of the renewable fuels industries, it is apparent that development of a potentially large scale, lower cost feedstock source would be advantageous. Recently, significant advances have been made in carbon dioxide sequestering technology (aquatic species program reference, NREL, GFT, a U.S. company) using various species of algae to provide photosynthetic carbon fixation. This technology has tremendous value when applied to industrial sources of carbon dioxide such as; coal fired power generation, natural gas fired power generation, petroleum fired power generation, industrial gas generation, cement manufacturing, industrial fermentation, as well as various additional industries that are significant emitters of carbon dioxide. The algae resulting from the photosynthetic carbon fixation represents an opportunity for the production of transportation fuels as well as various value added chemical products. The volume of algae produced per acre, in a designed pond or “farming” system, is estimated at between 200,000 pounds to 600,000 pounds per year of algae on a dry basis; and is substantially greater, in terms of oil content and fermentable material content, than the volume of soybeans or corn produced per acre at 2,500 pounds to 10,000 lbs per year. The volume of algae produced using the above method allows for a far greater production density versus corn or soybeans with a relatively small geographic footprint. In addition, the algae selected comprise free fatty acids (FFA), triglycerides, polysaccharides, cellulose, hemicellulose and/or lignocellulose. However, the economical processing of the selected algae provides significant challenges for conventional biofuel processing techniques.

[0013] For the algae scenario, a significant degree of pretreatment of the sludge is required to prepare the material for the more traditional solvent extraction methods to recover the contained oil. This front-end pretreatment would then need to be combined with multi-stage esterification, (for free fatty acid esterification) and transesterification (for triglyceride conversion), and a completely separate process would be required for acid hydrolysis of the lipid depleted algae pulp to produce monosaccharides, disaccharides, trisaccharides or polysaccharides for production of ethanol by fermentation. This series of processing steps would add significant cost to the resulting materials to be produced from algae. Therefore, there is a need for further development of simplified processing routes for the production of

fatty acid alkyl esters (i.e. FAME), monosaccharides, disaccharides, trisaccharides or polysaccharides in a simplified, direct process.

[0014] In addition, the current growth in biofuel production from food commodities is generating a substantial increase in co-products such as corn distillers grains, sorghum distillers grains, and rice bran meal. These co-products have underutilized value from the cellulosic content (45-55% by mass) and oil content (7-22% by mass) which represent an opportunity to increase the supply of biofuels to market by simply increasing the processing efficiency of current methods.

[0015] Again, the interest in cellulosic feeds for ethanol has increased considerably over the past several years, however some of the same issues apply to this source as to feeds such as algae. For example, with cellulosic feeds the typical approaches include enzyme treatment followed by yeasts which convert the cellulosic materials to sugars and subsequent alcohol, but has little effect on any contained oil content. For example distillers grains have both cellulosic content as well as contained oil values, both of which could be useful for conversion to biofuels.

[0016] Thus, there remains a significant need in the art to develop a simple and efficient method for the production of biofuels and ethanol from renewable energy sources.

SUMMARY OF THE INVENTION

[0017] The present invention relates to a method for making fatty acid alkyl esters by (a) combining a feedstock with an alcohol and, optionally, an acid catalyst and (b) reacting the combination at a pH in the range of 0 to 7, at a temperature in the range of 140°C to 300°C, wherein the feedstock comprises (a) phospholipids, free fatty acids (FFAs), glycerides, or a combination thereof and (b) cellulosic material, proteins, or both and wherein the reaction products comprise (a) fatty acid alkyl esters and (b) cleaved cellulosic material, shortened proteins, amino acids, or a combination thereof. The pressure of this reaction can be in a range of 500 psig to 2800 psig or sufficient to prevent boiling of the alcohol during the reaction.

[0018] The following reactions can occur in the above method: (a) the transesterification or esterification of phospholipids into fatty acid alkyl esters, (b) the direct esterification of FFAs into fatty acid alkyl esters, (c) the transesterification of glycerides into fatty acid alkyl esters,

(d) the hydrolysis, alcoholysis, or both of the cellulosic material into cleaved cellulosic material, and (e) the hydrolysis, alcoholysis, or both of protein into shorter peptides, amino acids, or both.

[0019] The present invention is further directed to the product from the reaction of the feedstock with the alcohol and, optionally, acid catalyst.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1 provides a schematic of the reaction of the feedstock (110) with the alcohol (120) in the presence of the optional acid catalyst (130) and optionally in the presence of water (160) and fatty acid alkyl esters (170) in a pressurized reactor (140) to products (150).

[0021] FIG. 2 shows the detailed process concept used for the simultaneous production of biodiesel and ethanol from the algae and/or feedstocks, such as agricultural by-product material. The overall approach is shown for multiple feedstocks. If dry material is received, then the front end drying system would not necessarily be required.

DETAILED DESCRIPTION OF THE INVENTION

[0022] The present invention relates to a method for producing fatty acid alkyl esters as well as cellulosic simple sugars, shortened protein peptide polymers, and amino acids involving esterifying and performing hydrolysis, alcoholysis, or both on a material containing phospholipids, free fatty acids, glycerides, or a combination thereof as well as polysaccharides, cellulose, hemicellulose, lignocellulose, protein, or combination thereof with an alcohol and an optional acid catalyst.

[0023] Prior to the present invention, the conversion of biomass into biofuel and ethanol was a time-consuming and multi-step procedure that was both economically inefficient and wasteful. Additionally, conventional methods are inhibited by the presence of water. In contrast, a fast, single-step, and efficient method for the conversion of biomass into biofuel and sugars to produce ethanol can be performed in the presence of water. Fig. 1 illustrates a method of the present invention in which feedstock (110) is reacted with alcohol (120) in the presence of an optional acid catalyst (130) and optionally in the presence of water (160) and fatty acid alkyl esters (170) in a pressurized reactor to yield products (150).

[0024] The feedstock for this process can be, for example, algae (*e.g.*, fresh or salt water algae, prokaryotic algae), dried distillers grains (DDG) from, *e.g.*, corn or sorghum, rice bran, jatropha seed, palm seed, vegetable oil seeds (*e.g.*, soybean, canola), eukaryota, protozoa, phytoplankton, cyanobacteria, bacteria, corn ethanol fermentation residuals, or other oil-containing material that may also contain potentially fermentable cellulosic material (*e.g.*, polysaccharides, cellulose, hemicellulose, and lignocellulose), protein, or both. The oils of the feed stock can include phospholipids, FFAs, monoglycerides, diglycerides, triglycerides, or a combination thereof. The feedstock can also be a combination of different oil-containing materials.

[0025] The feedstock can contain from about 0 wt% to about 100 wt% phospholipids, *e.g.*, from about 5 wt% to about 50 wt% phospholipids. The feedstock can contain from about 0 wt% to about 100 wt% FFA, *e.g.*, from about 5 wt% to about 10 wt% FFA. The feedstock can contain about 0 wt% to about 100 wt% glycerides, *e.g.*, from about 10 wt% to about 50 wt% glycerides. The feedstock can contain from about 0 wt% to about 50 wt% cellulosic material (preferable less than about 30 or 40 wt%, but at least about 1, 5, 10, or 15 wt%). The feedstock can contain from about 0 wt% to about 50 wt% protein (preferable less than about 30 wt%, but at least about 1, 5, 10, or 15 wt%). Each of the amounts for the feedstock components listed above is based on the dry weight of the feedstock.

[0026] The feedstock can be unextracted meaning that it has not been purified to remove certain components (*e.g.*, water, cellulosic material, proteins, or mixtures thereof). For example, the feedstock can contain phospholipids, FFAs, glycerides, at least about 10 wt% cellulosic material, and at least about 10 wt% proteins, wherein both weight percentages are based on the total dry weight of the feedstock. The feedstock can also be purified (*e.g.*, a soapstock or crude vegetable oil). The feedstock can contain husks, shells, or other materials that are grown by the feedstock source other than the feedstock. Materials that contain both oil and cellulosic components lead to attractive renewable fuel alternatives. The feedstock, prior to reaction, can be dried as, *e.g.*, discussed below. The feedstock can be ground to reduce its particle size prior to reaction.

[0027] For purposes of this description, algae, such as cyanobacteria, is used as the feedstock, however those skilled in the art would understand that other feedstock can be used. Also, the overall process is, as indicated, applicable to the other feedstocks with adjustments

to the process configuration, e.g. if a dry distillers grain or dry rice bran is used as a feedstock, then the drying step would not be required.

[0028] In addition, with other feedstocks, there may be some variations in the acid esterification chemistry such that alternate co-products are formed in the reaction. For example, with a high cellulosic feed (*e.g.*, at least about 1, 5, 10, or 15 wt% but less than about 30, 40, or 50 wt% based on the dry weight of the feedstock) there may be further conversion of that component to derivatized sugar compounds such as methyl or ethyl glucosides. For example, when a solution of glucose in methyl alcohol is saturated with hydrochloric acid a crystallizable compound having the formula $C_6H_{11}O_6CH_3$, is formed.

[0029] A similar reaction takes place with all of the alcohols which are capable of dissolving glucose, such as methanol, ethanol, propanol, butanol, and their isomers, and the compounds formed correspond to natural glucosides. The sugar entering into the reaction need not necessarily be glucose, so that a number of such artificial alcohol-derivatized sugars can be prepared. The hydrochloric acid of the reaction to produce derivatized sugars can also be replaced by another acid such as H_2SO_4 . These derivatized sugars, when boiled with dilute acid, react with water and are decomposed into the sugar and alcohol. In addition, further derivatization at the higher ranges of temperatures and pressures can lead to valuable products from the sugars such as methyl glucosides, ethyl glucosides, 5-(hydroxymethyl)furfural, levulinic acid, formic acid, and esters thereof. The categorization of each feedstock may be necessary to determine the best process splits and optimal end-products.

[0030] The alcohol for the invention can be, for example, methanol, ethanol, propanol, butanol, isopropyl alcohol, sec-butanol, t-butanol, benzyl alcohol or combination thereof. From a practical standpoint, and for general fuel and potential downstream chemical considerations, alcohols containing from 1 to 5 carbons would be preferred, however, there may be specific situations and conditions wherein higher alcohols could be used. Testing with a specific alcohol would readily determine the amenability of a particular alcohol. Again, for purposes of this discussion, methanol is used as the alcohol, however those skilled in the art would understand that other alcohols can be used. For example, in a combined system that produces both ethanol and biodiesel, it is potentially attractive to use some of the produced ethanol as the alcohol reactant.

[0031] The optional acid catalyst for the invention can be, for example, an inorganic acid (*e.g.*, sulfuric acid, anhydrous hydrochloric acid, anhydrous nitric acid, boron trifluoride, and phosphoric acid), an organic acid (*e.g.* organic sulfonic acid), a solid phase catalyst (*e.g.*, EnvirocatTM EPZG, natural kaolinite clay, B₂O₃/ZrO₂, sulfated SnO₂, and zeolites), or a combination thereof.

[0032] For the purposes of this description, sulfuric acid is used as the acid catalyst, however those skilled in the art would understand that other acid catalysts can be used.

[0033] In the process (see FIG. 2), the algae sludge (1), produced via various algae growing processes, *e.g.* the recovery of CO₂ from a power plant or other major CO₂ producing stack gases, or other feedstock is first dried in a flash drying system wherein a recycled stream of superheated steam is used to dry the feedstock. The water content of the feedstock after drying can be about 0 wt% to about 10 wt% of the dry weight of the feedstock, from about 3 wt% to about 10 wt% of the dry weight of the feedstock, or from about 3 wt% to about 5 wt% dry weight of the feedstock. The resulting steam, from the wet material, is purged from the system (2) and used for downstream process heat.

[0034] Systems that are useful for this step include spin flash dryers; spray dryers; loop dryers; and the like. The main criterion for dryer choice is that the system can be operated at elevated pressure to allow for production of reasonably usable purge steam. A pressure of 10 psig to 30 psig is preferred with 15 psig to 20 psig most preferred. Drying can be carried out at atmospheric pressure, however, in this case the resulting vapor from the dryer cannot be reused for downstream steam uses. Pressurized drying enhances the overall economics of the process, but is not essential for practice of the technique, *i.e.* atmospheric drying is acceptable, recognizing the economics of the system.

[0035] The dried algae (3) or other feedstock can be ground to reduce its particle size and is then transferred to the Direct Esterification Reactor system wherein the feedstock is mixed with the selected alcohol (*e.g.*, methanol) (5), and an optional acid catalyst (4). The amount of alcohol can vary, but would typically be sufficient to allow for a slurry mixture. This typically provides sufficient excess of alcohol for the reaction noting that 3 moles of alcohol are required for reaction with 1 mole of triglycerides to form 3 moles of fatty acid alkyl esters and 1 mole of alcohol is required for reaction with 1 mole of FFAs to form 1 mole of fatty

acid alkyl esters. As a minimum, the amount of alcohol should be in about a 15% molar excess of the contained oil. Preferably, the alcohol should be in an amount from about 50 mol% to about 600 mol% of the contained oil (*i.e.*, phospholipids, glycerides, FFAs, or a combination thereof), preferably from about 50 mol% to about 320 mol% of the contained oil and most preferably from about 200 mol% to about 300 mol% of the contained oil. On a weight percentage basis, the contained oil will require about 11% to 12% by weight of methanol to form the methyl ester. Higher alcohols would require a higher weight percentage of alcohol. For practical operation, the amount of alcohol would normally be in the range of about 50 wt% to 300 wt% of the dry feedstock and preferably in the range of about 100 wt% to about 200 wt% of the dry feedstock.

[0036] To reduce the amount of alcohol used, and subsequently reduce the downstream demethylation requirements, a portion of the produced biodiesel (8A) can be recycled to the reactor to provide liquid for slurry formation. The amount of fatty acid alkyl ester (*i.e.*, biodiesel) added to the reaction can be in an amount from about 50 wt% to about 300 wt%, preferably from about 100 wt% to about 200 wt%, and most preferably from about 125 wt% to about 150 wt% of the dry weight of the feedstock.

[0037] This will allow for introduction of alcohol in amounts sufficient to provide the amount required for the reaction, plus some excess to ensure complete reaction. In this case, the amount of make-up alcohol (e.g. methanol) could be in the range of 5% to 15% by weight of the dry input feedstock.

[0038] The amount of optional acid catalyst can range from about 0% to about 15% by weight of the dry feedstock, preferably from about 3% to about 9% by weight of the dry feedstock, and most preferably from about 4% to about 8% by weight of the dry feedstock. The final amount of acid will depend on the composition of the feedstock, since there may be acid consuming compounds in the feed, *e.g.* reactive protein materials and the like. Thus the actual acid rate will depend on this factor. From a general process consideration standpoint, the key process factor is the amount of “free catalyst” in the system, *i.e.* free acid after consideration of any components in the feedstock that will consume acid. Preferably the amount of free acid remaining in the mixture is such that the resulting pH of the slurry is in the range of about 0 to about 5, preferably from about 1 to about 4, and most preferably in the range of about 2 to about 3.

[0039] In the presence of acid catalyst, the reaction temperature is, *e.g.* in the range of about 140° C to about 300° C, in the range of about 160° C to about 275° C, or in the range of about 175° C to about 275° C. A pressure reactor system is used that will allow for the elevated temperature and keep the alcohol from boiling in the presence of acid catalyst. The pressure of reactor operation is slightly in excess of the vapor pressure of the alcohol of choice at the selected operating temperature (*e.g.* 20 psig over the vapor pressure). Typical pressures ranges for a reaction in the presence of acid catalyst are from about 150 psig to about 650 psig, preferably from about 200 psig to about 500 psig, and most preferably from about 300 psig to about 400 psig. Pressures significantly in excess of the alcohol vapor pressure are not required in the process approach.

[0040] In the absence or reduction of acid catalyst (*e.g.*, in the range from about 0.01 to 1 wt% based on the dry weight of the feedstock), the temperature of the reaction is increased to a range of about 240°C to about 300°C, about 240°C to about 270°C, or about 250°C to about 280°C. The pressure of the reaction in the absence of acid catalyst is increased to a range of about 500-2800 psig, from about 1000-2000 psig, or from about 1500 to 2000 psig. The initial pH of the reaction in the absence of acid catalyst is in the range of 0 to 7 or in the range of 5 to 7.

[0041] When the acid content is eliminated or significantly reduced in the absence of water under the conditions of the above paragraph, a yield towards cellulosic sugar formation, ester formation, and derivatized sugar formation and away from the acid consuming peptide polymer breakdown is observed. In the presence of water as described in below and the absence of acid under the conditions of the above paragraph, ester formation from glycerides, FFAs, and phospholipids, sugar polymer breakdown, and peptide polymer breakdown are observed.

[0042] The reaction mixture before reaction can also contain water in an amount of at least about 3 wt% of the dry weight of the feedstock, at least about 5 wt% of the dry weight of the feedstock, at least about 10 wt% of the dry weight of the feedstock, at least about 30 wt% of the dry weight of the feedstock, at least about 40 wt% of the dry weight of the feedstock, or at least about 50 wt% of the dry weight of the feedstock. The reaction mixture before reaction preferably contains water in an amount from about 30 wt% to about 40 wt% of the dry weight of the feedstock.

[0043] The reactor system can be batch or continuous. There are several conventional pressure vessel systems available that will operate in batch and continuous modes and the process lends itself to the “conventional” methods for this stage.

[0044] In addition, a continuous pipe-type reactor can be used to carry out the reaction. The reactor is a pipe with sufficient residence time to allow for the reaction to complete and is operated under the target pressure and temperature range. The pipe allows for reasonable reaction to occur with minimized vessel complexity.

[0045] The reaction can be carried out for a period of about 5 minutes to 120 minutes and the reaction time can depend on the selected reaction system and operating temperature. In a conventional stirred tank reactor, the reaction time can be in the range of 60 to 90 minutes for a batch reactor. At higher temperatures, and corresponding pressures, the reaction time can be reduced.

[0046] The reaction product slurry (6) typically consists of the algae pulp (containing cleaved cellulosic material, shortened peptides, and amino acids), crude biodiesel, excess alcohol, catalyst, water and glycerin. The resulting fatty acid alkyl esters will be in the range of 10-50wt% of the product slurry. The resulting peptides/amino acids will be in the range of 0-50wt% of the product slurry. The resulting cleaved cellulosic materials will be in the range of 0-50wt% of the product slurry. The reaction slurry is transferred to a Liquid/Solid Separation system. In this step, the liquid fraction is separated from the solids portion. Separation can be carried out using any number of standard separation techniques, such as filtration, centrifugation, combinations of each approach, and the like. Slight washing of the solids, in the separation device, can be carried out with a small amount of the alcohol (9A) recovered for recycle. The spent wash would then be added into the crude biodiesel fraction.

[0047] The washed solids (7) are then sent to a demethylation step wherein the methanol (or other alcohol) is removed from the material via heating. Steam, from the aforementioned drying system can be used for this step. The recovered alcohol (14) is transferred to the Methanol (Alcohol) Recovery System. The solids fraction (20) is transferred, for example, to the ethanol production portion of the process.

[0048] The crude biodiesel liquid from the separation (8) is then sent to a Biodiesel Demethylation/Bottoms Separation system. In this process step, the liquid is first demethylated, i.e. alcohol removal, and the vaporized alcohol (9) sent to the Methanol

(Alcohol) Recovery System. In the recovery system, the alcohol is distilled to eliminate traces of moisture then returned (15) to the reaction system for reuse.

[0049] When the alcohol is removed from the crude biodiesel, the co-products, i.e. water and glycerin separate from the biodiesel fraction. The catalyst reports to the aqueous/glycerin phase. This two phase system is then treated in a separation system, e.g. settling, centrifugation, and the like. The separated water/glycerin/catalyst is referred to as the “bottoms” fraction. This material (11) is transferred to a storage tank for subsequent disposition. Depending on the feedstock, the bottoms from the demethylation/bottoms separation step may contain high levels of protein-bearing materials. In this case, the protein-rich fraction (11A) can be sent to a separate surge and (if desirable) downstream processes for further separation of the protein fraction from the remainder of the material.

[0050] The demethylated biodiesel (10) is then sent to the Biodiesel Distillation unit. In this step, the biodiesel is heated to about 340° F. to 360° F. and subject to a high vacuum in the range of 750mm to 755mm Hg (vacuum). Under these conditions, the biodiesel fraction vaporizes and separates from the various lower volatility impurities in the liquid.

[0051] The biodiesel vapor is then condensed using conventional indirect heat exchangers with cooling supplied by cooling water. The condensed biodiesel (12) is the transferred to biodiesel storage tanks where the material is analyzed and confirmed for shipment.

[0052] The demethylated solids (20) are transferred to a Solids Neutralization/Separation system. In this stage, the pulp is mixed with water (22) and a caustic solution (21), e.g. sodium hydroxide, potassium hydroxide, etc. Ideally potassium hydroxide is used since the resulting potassium salt, i.e. potassium sulfate, is a feed source for the downstream fermentation process. The material is neutralized to a pH of about 5.5 to 7.0. The target pH is that which is consistent with the specific reagent used in the fermentation process.

[0053] After neutralization, the slurry can be subjected to a separation step, if required, to remove a portion of the aqueous fraction with an accompanying removal of dissolved salts. This solution (24) would be returned to the algae farms and the potassium sulfate salt used as a food make-up source for the algae material.

[0054] The neutralized pulp (23) then enters a Fermentation System wherein it is mixed with conventional fermentation reagents (25), e.g. yeasts, etc., then allowed to react in a

conventional fashion. Information relative to the conventional processing approaches are available on numerous web-sites and a significant resource is the Renewable Fuels Association, which is the key industry trade association. The main advantage is that a potentially lower cost feedstock has now been made available that does not involve a current agricultural food source commodity but rather second generation non food materials such as algae or agricultural by-products.

[0055] In the fermentation system, the cellulosic sugars convert to ethanol, with the co-production of carbon dioxide. The CO₂ fraction would normally be vented back to the CO₂ recovery system for pick-up by the algae used in the carbon dioxide recovery system if algae are used.

[0056] The fermentation slurry (26) is then sent to a Solid/Liquid Separation system, and the non-fermented solids removed from the liquid (beer) phase. Again, conventional separation methods may be utilized, such as filters, centrifuges, and the like. The solids fraction (27) can then be used elsewhere e.g. return to the algae farms as a supplemental food source.

[0057] The fermented liquid (28) is transferred to an Evaporation System wherein the alcohol phase is evaporated from the liquid, along with some water. The aqueous fraction from the evaporator (30) is returned to the algae farm system.

[0058] The alcohol fraction (29) is next treated in a Distillation/Molecular Sieve system. In this process step, the aqueous alcohol is first distilled, to produce a nominal 95% ethanol material, then processed in a molecular sieve unit to remove the remaining water (32) and produce a 99.5%+ ethanol product (31). This operation is conventional and widely used in the current ethanol production industry.

[0059] The residual solids from the fermentation stage will contain the non-fermentable materials that may also contain significant levels of useful proteins or amino acids. This solids fraction could be combine with other animal feed products or, depending on the exact nature of the material (based on the feedstock), further processed, via drying, to produce a specialized feed product.

EXAMPLE 1: Algae Testing

[0060] The following example illustrates the basic process approach and resulting product potential for algae feedstocks. Table 1 summarizes a series of tests conducted with algae feedstocks (either fresh or salt water algae) using the process described above. The initial pH was at 0.4. The temperature was between 140 – 180°C. The pressure was between 200 and 500 psig. The reaction time was between 1-2 hours. The starting algae contained anywhere from 10% to 25% lipid content of which the FFA values ranged from 5% to as much as 10%. The resulting recovered biodiesel indicated that the contained oil was essentially completely converted to the methyl ester. The percent conversion of oil to fatty acid methyl ester was greater than 95%.

TABLE 1

Test	1	2	3	4	5	6	7
Dry algae (grams)	1,000	1,000	1,000	1,000	1,000	1,000	1,000
Acid catalyst (grams)	25	25	25	25	25	25	25
MeOH (grams)	1500	1400	1300	1200	1200	1200	1200
* material subjected to temperature and pressure reaction conditions							
* reactor product separated in centrifuge, centrate taken to demethylation							
* two phases observed after demethylation, centrifuged to separate ester from starch/protein							
Results							
Dry weight pulp	550	544	555	539	553	630.5	611
Fatty Acid Methyl Ester (FAME)	222	219	224	217	223	94	98
Starch	193	191	195	189	194	225	247.5
* minor amounts of material lost in handling through laboratory equipment							
* variations from tests 1-5 and tests 6-7 represent various fresh and salt water algae.							
* Process technique is capable of processing all algae tested into FAME and starch							

[0061] A sample of the solid residue material (*i.e.*, pulp), that contained the starch fraction was then mixed with water and neutralized to a pH of about 6.5-7. Standard ethanol processing yeast was added and the material was allowed to ferment for a period of about 5 days. A small laboratory system was used wherein the mixture was contained in a contained

flask. A CO₂ discharge tube was located on top of the flask and the CO₂ was discharged, via a dip leg, into a separate flask containing water. This maintained a “water seal” on the fermentation flask and also allowed for visual observation of CO₂ bubbles, which, when they stopped, indicated fermentation completion.

[0062] After the CO₂ evolution stopped, the resulting fermentation broth was filtered to remove residual solids. The resulting liquid was heated to evaporate a mixture of ethanol and water in a single stage evaporation flask with a condenser. The condensed ethanol water phase contained about 8% ethanol. In commercial practice, the weak ethanol would be treated in a conventional evaporation/distillation/molecular sieve system (e.g. the standard approach used in the conventional ethanol production processes) to recover an anhydrous ethanol product. The techniques are well established.

[0063] About 50% of the contained starch converts to actual ethanol (the remainder forming CO₂). The expected ethanol recovery from the algae feedstocks would be on the order of 10% by weight of the algae. This conversion factor will depend on the potential starch content of the starting algae and can vary between various species of material. The recovery factors are for illustration and are no way meant to limit the scope or require a specific recovery.

EXAMPLE 2: Algae Soapstock Testing

[0064] Algae soapstock is a by-product of the conventional algae oil processing route wherein the oil, containing high levels of free fatty acids (FFA), is treated with an alkali solution to neutralize the FFA and produce a “soapstock” that consists of neutralized fatty acids. This material is separated from the aqueous salt solution and typically recovered as a “soapstock” material. A similar product is formed, in large amounts, from soybean oil treatment and is sold, at relatively low cost, for subsequent acidulation and recovery of the fatty acid values, as a free fatty acid, for use in animal feeds or other lower valued applications.

[0065] To assess the potential for soapstocks as feeds, a sample of algae soapstock was obtained and processed in a manner similar to that outlined for the algae (Example 1), with the exception that a solids/liquid separation after the esterification stage was not required.

Briefly, the soapstock was initially neutralized with sulfuric acid, then methanol and additional sulfuric acid was added to provide excess acid (for catalyst). The mass of soapstock was 100g. The mass of the initial sulfuric acid was 17g to acidify the soap. The mass of the methanol was 200g. The additional mass of the sulfuric acid used for the catalyst was 4g. The initial pH was below 1. The moisture content in the feedstock was on the order of 10 wt% to 15 wt% of the weight of the feedstock, based on the indicated supplier estimates (as supplied by Advanced Bio Nutrition, Columbia, MD). The mass was reacted for about 2 hours at about 140°C under pressure sufficient to avoid methanol evaporation.

[0066] The reaction mass was then neutralized with lime (to eliminate any free sulfuric acid) and the material then separated via a centrifuge into an aqueous phase, containing the water, glycerin, and salt fraction, and an organic phase. The organic phase containing essentially the biodiesel fraction was then distilled to recover the ester fraction. The resulting biodiesel was analyzed and met the ASTM standards for this material. In this case there was no sugar or starch-like fraction so ethanol is not a consideration for this feedstock.

[0067] Of considerable note with this test is that the esterification was carried out in a relatively high free water environment (i.e. in excess of 10% free water), since the soapstock, as indicated, is a neutralized FFA from the oil feed. This is of significance since for the conventional biodiesel processing approaches, including the two stage processes consisting of acid esterification followed by base transesterification, water must be limited, typically to levels of less than 1% to 2% for acid esterification and less than 0.5% for the transesterification step.

EXAMPLE 3: Distillers Grain (Corn Feedstock)

[0068] Distillers grain is a major co-product from the production of ethanol using the conventional corn feedstocks. Dry distillers grain (DDG) is the material remaining after the fermentation process and contains proteins, fats, fiber, ash, and other various components. Much of this material is used in animal feed products, but its value, compared to corn, is lower.

[0069] The quantities of this material are significant. For example, a 100 million gallon/year ethanol facility using a dry corn feed would produce on the order of 660 million pound/year of DDG. In general, the DDG from corn contains about 10% to 11% fat (oil content that is

potentially convertible to biodiesel) and about 45% to 50% carbohydrates (which if properly prepared could serve as a fermentation feed).

[0070] It should be noted that with preparation, the resulting sugars consist of both C6 and C5 fractions. The C6 fraction is fermentable via the use of standard yeast materials. C5 sugars will not ferment with yeasts only, and specialized enzymes have been developed that will convert C5's. In addition, there are other processes that have been developed that utilize C5 sugars to produce other (non-ethanol) products.

[0071] Significant advantages could be brought about in the biofuels industries if this feedstock could be further processed to recover additional ethanol and produce a biodiesel product as well. Incorporation of DDG treatment operations within existing ethanol plants could further enhance the potential economic attractiveness.

[0072] To assess the potential for the process to handle this feed, samples of DDG from ethanol facilities (Verasun Energy of Brookings, SD and White Energy of Dallas, TX) that processed both corn and sorghum feedstocks were obtained. The basic testing approach was as follows:

- The DDG was mixed with methanol and sulfuric acid catalyst then reacted at elevated temperature and pressure for about 2 hours. Typically the temperature was maintained at about 200 deg C. The mass of the DDG was 100 grams, the mass of the methanol was 200 grams, the mass of the sulfuric acid was 8 grams, the initial pH was 0.5.
- After reaction, the ester product mass was then filtered and washed with additional alcohol to remove residual ester, sugars, etc.
- The solids fraction was then set aside and would be used as a lower grade animal feed in a commercial scenario.
- The liquid fraction was then heated to remove excess alcohol (that would be recovered for recycle in a commercial scenario).
- The mixture was then neutralized to convert the free sulfuric acid to a neutral salt. Neutralizing agents can include common alkalis, e.g. sodium hydroxide, potassium hydroxide, sodium bicarbonate, potassium carbonate, calcium oxide, calcium hydroxide, etc. The use of calcium is ideal since it allows for subsequent animal feed nutrition. The liquid, containing the esters, glycerine, derivitized sugars, amino

acids and the like was treated in an additional separation stage to remove the ester fraction from the non-ester fraction. Several methods are available for this including solvent extraction, with e.g. hexane, or water dissolution (preferred) to solublize the glycerin and sugar fraction and allow for separation of the ester as an separate phase (i.e. liquid/liquid separation).

- The ester fraction was then treated in a distillation system to recover the ester as a high grade material.
- The sugar, amino acid fraction (non-esters) was then neutralized and, if a calcium material used, filtered to remove the resulting calcium sulfate salt. This has the effect of reducing the potential ash in the final amino acid.
- With the reaction conditions employed, derivatized sugars, such as 5-(hydroxymethyl)furfural, were formed which will allow for potential production and recovery of other products.

[0073] For the example test, the material used was the corn DDG and contained about an 11 wt% oil fraction based on the total weight of the DDG. The above process was carried out and after separation and analysis, the resulting biodiesel fraction was about 10% by weight of the feed, indicating that essentially all of the contained oil was converted to the ester.

[0074] The ester fraction was then distilled and the recovered biodiesel analyzed for total and free glycerin, since these are the key components of successful ester production based on previous laboratory testing. The material was well below the allowable ASTM standards.

EXAMPLE 4: Rice Bran:

[0075] Rice bran is another material that is a major co-product of this grain processing industry. There are significant amounts of this material produced in the U.S and especially overseas. The bulk of this material is used in various feed additives and has a relatively low value.

[0076] A sample of rice bran was processed in the same manner as that used for the DDG sample (in Example 3). The composition of the bran was somewhat similar to that of the DDG with respect to carbohydrate content (i.e. potentially fermentable) but the oil content was somewhat higher (typically 18 wt% or so).

[0077] After ester recovery, the material was distilled and the biodiesel analyzed. Again the material was well within specifications. Also, the amount of biodiesel produced was in line with the expected value based on the oil content. Several tests have indicated that the expected biodiesel production is about the same (volume-wise) as the oil content in the starting feedstock.

[0078] The remaining treated carbohydrate fraction would then normally be subject to fermentation since the composition at this stage is similar to the material obtained in the DDG processing.

EXAMPLE 5: Analysis of cyanobacteria for free neutral lipid and free phospholipid content

[0079] The cyanobacteria sample was stored at -20°C until analysis. Appropriate weights of the sample were diluted with Hexane:Isopropanol for neutral lipid analysis and Chloroform:Methanol for phospholipid analysis. Samples were vortexed, sonicated, and syringe filtered prior to injection for HPLC analysis to extract the free lipids (*i.e.*, lipids not bound to protein) of the sample.

[0080] HPLC Analysis. Neutral lipid analysis was performed by gradient normal phase high performance liquid chromatography with evaporative light scattering detection. For neutral lipid determination, standards consisted of TG, DG, MG, and FFA at 1.0 mg/ml - 0.03125 mg/ml each. For phospholipid determination, the standards and the sample were injected on a normal phase HPLC column and analyzed by evaporative light scattering detector. The six-level calibration curve was used to calculate the amount of each phospholipid in the sample. HPLC standards for phospholipids consisted of Soy PC, Soy PE, Soy PI, Soy LPC, Soy PS and 16:0-18:1 PA at 1.0 mg/ml - 0.0625 mg/ml each.

[0081] Results. Table 2 reports the weight (w/w) percent results of the neutral lipid analysis. Table 3 reports the weight (w/w) percent results of the phospholipid analysis.

TABLE 2: Neutral lipids in weight %.

Sample	TG	DG	FFA	MG	Total
Spirulina Lot 9808	2.8	0.2	0.2	ND	3.2

ND = none detected; TG, triglycerides; DG, diglycerides; FFA, free fatty acids; MG, monoglycerides.

TABLE 3: Phospholipids in weight %.

Sample	PE	PC	PA	PI	PS	LPC	Total
Spirulina Lot 9808	1.2	ND	ND	ND	ND	ND	1.2

ND = none detected; PE, phosphatidylethanolamine; PC, phosphatidylcholine; PA, phosphatidic acid; PI, phosphatidylinositol; PS, phosphatidylserine; LPC, lypophosphatidylcholine.

[0082] The total free lipid content was 4.4 wt%. Based on these results, a sample of cyanobacteria was expected to yield 4 wt% fatty acid methyl esters (FAMES) based on the total weight of cyanobacteria and assuming 100% conversion of the free lipid content to FAMES.

EXAMPLE 6: Cyanobacteria Testing using the Discovered Method

[0083] The following example illustrates the process and resulting product for cyanobacteria feedstocks. Fifty grams of dry cyanobacteria, 0 grams of [what kind] acid catalyst, 20 grams of water and 100 grams of methanol were reacted. No acid catalyst was added to the reaction. The temperature was between 250C – 280°C. The pressure was between 1500 and 1900 psig. The reaction time was between 5-30 minutes. The starting algae was expected to contain from 4 wt% to 6 wt% lipid content of which the phospholipid values ranged from 1 wt% to 2 wt%.

[0084] The resulting reaction products were centrifuged to separate the solid material (*i.e.*, pulp) from the biofuel. The biofuel was demethylated as described above. The pulp from centrifugation can be processed into, for example, ethanol as described above.

[0085] The experiment was repeated two times generating 8 grams (16 wt% based on the total weight of the cyanobacteria starting material) and 10 grams (20 wt% based on the total weight of the cyanobacteria starting material) of FAMES, respectively. Table 4 lists the types and percentage amounts of FAMES in the 10 gram sample. These results indicated that the contained oil, including the phospholipids, was essentially completely converted to fatty acid methyl esters. In addition, the amount of FAMES generated was about 4 to 5 more than expected based on the total free lipid content of cyanobacteria as observed in Example 5. The reaction also generated 75-80 wt% of dry pulp and 5 wt% ash.

TABLE 4

<u><i>FFA</i></u>	M.W.	FAME (uM)	FAME (mM)	Dilution 1E3	FAME (mg/ml)	<u><i>Percent FAME</i></u>
<u><i>UNK</i></u>	228.38	92.4	0.0924	1000	21.1	<u><i>0.89</i></u>
<u><i>UNK</i></u>	228.38	42.5	0.0425	1000	9.7	<u><i>0.41</i></u>
<u><i>14:0 FFA</i></u>	228.38	553.2	0.5532	1000	126.3	<u><i>5.31</i></u>
<u><i>15:0 FFA</i></u>	242.21	54.8	0.0548	1000	13.3	<u><i>0.56</i></u>
<u><i>UNK</i></u>	242.21	30.2	0.0302	1000	7.3	<u><i>0.31</i></u>
<u><i>16:0 FFA</i></u>	256.43	2385.1	2.3851	1000	611.6	<u><i>25.70</i></u>
<u><i>UNK</i></u>	256.43	101.6	0.1016	1000	26.1	<u><i>1.09</i></u>
<u><i>16:1 FFA</i></u>	254.43	1966	1.966	1000	500.2	<u><i>21.02</i></u>
<u><i>UNK</i></u>	254.43	172.7	0.1727	1000	43.9	<u><i>1.85</i></u>
<u><i>UNK</i></u>	254.43	62.6	0.0626	1000	15.9	<u><i>0.67</i></u>
<u><i>UNK</i></u>	254.43	36.7	0.0367	1000	9.3	<u><i>0.39</i></u>
<u><i>17:0 FFA</i></u>	270.48		0	1000	0.0	<u><i>0.00</i></u>
<u><i>UNK</i></u>	270.48	64	0.064	1000	17.3	<u><i>0.73</i></u>
<u><i>17:1 FFA</i></u>	268.48		0	1000	0.0	<u><i>0.00</i></u>
<u><i>18:0 FFA</i></u>	284.48	57.3	0.0573	1000	16.3	<u><i>0.68</i></u>
<u><i>18:1 FFA</i></u>	282.48	449	0.449	1000	126.8	<u><i>5.33</i></u>
<u><i>18:2 FFA</i></u>	280.48	280.1	0.2801	1000	78.6	<u><i>3.30</i></u>
<u><i>UNK</i></u>	280.48	49.4	0.0494	1000	13.9	<u><i>0.58</i></u>
<u><i>18:3 FFA</i></u>	278.48	57.9	0.0579	1000	16.1	<u><i>0.68</i></u>
<u><i>19:0</i></u>	298.51		0	1000	0.0	<u><i>0.00</i></u>

<u>FFA</u>						
<u>20:0</u>						
<u>FFA</u>	312.54		0	1000	0.0	<u>0.00</u>
<u>20:1</u>						
<u>FFA</u>	310.54		0	1000	0.0	<u>0.00</u>
<u>20:2</u>						
<u>FFA</u>	308.53		0	1000	0.0	<u>0.00</u>
<u>UNK</u>	308.53	58.5	0.0585	1000	18.0	<u>0.76</u>
<u>20:4</u>						
<u>FFA</u>	304.52	277.2	0.2772	1000	84.4	<u>3.55</u>
<u>UNK</u>	304.52	167.9	0.1679	1000	51.1	<u>2.15</u>
<u>UNK</u>	304.52	136	0.136	1000	41.4	<u>1.74</u>
<u>20:5</u>						
<u>FFA</u>	302.54	790.1	0.7901	1000	239.0	<u>10.04</u>
<u>UNK</u>	302.54	250.7	0.2507	1000	75.8	<u>3.19</u>
<u>UNK</u>	302.54	151.9	0.1519	1000	46.0	<u>1.93</u>
<u>UNK</u>	302.54	600.8	0.6008	1000	181.8	<u>7.64</u>
<u>UNK</u>	302.54	64.5	0.0645	1000	19.5	<u>0.82</u>
<u>22:6</u>						
<u>FFA</u>	328.57		0	1000	0.0	<u>0.00</u>

* * *

[0086] The disclosed process has been tested with a variety of oil/starch-containing feedstocks as well as high soap materials. The examples are shown for illustration purposes only and in no way restrict the scope as to the potential feedstocks that are suitable for this approach.

THE EMBODIMENTS OF THE INVENTION IN WHICH AN EXCLUSIVE PROPERTY OR PRIVILEGE IS CLAIMED ARE DEFINED AS FOLLOWS:

1. A method for making a fatty acid alkyl ester, the method comprising:
 - (a) providing
 - (i) a feedstock comprising or derived from a biomass, wherein the feedstock comprises
 - (1) phospholipids, free fatty acids (FFAs), glycerides, oils, or a combination thereof; and
 - (2) a cellulosic material, and
 - (ii) an alcohol;
 - (b) making a combination mixture by combining the feedstock with the alcohol; and
 - (c) reacting the combination mixture at a pH in the range of 0 to 7, at a temperature in the range of 140°C to 300°C, and at a pressure that is at least sufficient to prevent boiling of the alcohol during the reaction, for a sufficient period of time to
 - (i) generate the fatty acid alkyl ester, and
 - (ii) cleave cellulosic material.
2. The method of claim 1, wherein the biomass comprises algae feedstock, an algae, corn feedstock, dried distillers grain (DDG), rice, or rice bran.
3. The method of claim 2, wherein the algae is algae sludge or algae soapstock.
4. The method of any one of claims 1 to 3, wherein step (c) is carried out at a temperature in the range of 160°C to 275°C.
5. The method of any one of claims 1 to 4, wherein the temperature is in the range of 175°C to 275°C.

6. The method of any one of claims 1 to 3, wherein the temperature of the reaction is in the range of 240° C to 300°C.
7. The method of any one of claims 1 to 6, wherein the feedstock further comprises proteins.
8. The method of claim 7, wherein step (c) is carried out for a sufficient period of time to (i) generate the fatty acid alkyl ester, (ii) cleave cellulosic material, and (iii) shorten the proteins, or form amino acids, or both.
9. The method of any one of claims 1 to 8, wherein the reaction time in step (c) is between 1 to 2 hours.
10. The method of any one of claims 1 to 9, wherein the reaction in step (c) is carried out at a pressure at least 20 psig above the vapor pressure of the alcohol at the temperature of the reaction.
11. The method of any one of claims 1 to 9, wherein the pressure of the reaction is in the range of 1500 psig to 2000 psig.
12. The method of any one of claims 1 to 11, wherein the alcohol comprises methanol or ethanol.
13. The method of any one of claims 1 to 12, wherein the alcohol is in an amount from 50% to 320% molar excess of any oil in the feedstock.
14. The method of any one of claims 1 to 13, wherein the feedstock comprises at least 10 wt% cellulosic material based on the dry weight of the feedstock.
15. The method of any one of claims 7 to 14, wherein the feedstock comprises at least 10 wt% proteins based on the dry weight of the feedstock.

16. The method of any one of claims 1 to 15, further comprising adding a fatty acid alkyl ester to the combination mixture before the reacting step of (c).
17. The method of any one of claims 1 to 16, wherein the method further comprises combining an acid catalyst to the combination mixture in step (b) to generate a pH in the combination mixture in a range of 0 to 5.
18. The method of claim 17, wherein the pH is 0.4 to 5.
19. The method of claim 17, wherein the pH of the reaction is in the range of pH 2 to 3.
20. The method of any one of claims 1 to 16, wherein the method further comprises combining an acid catalyst to the combination mixture in step (b) to generate a pH in the combination mixture in a range of pH 5 to 7.
21. The method of any one of claims 17 to 20, wherein the acid catalyst comprises sulfuric acid.
22. The method of any one of claims 1 to 21, wherein the method is carried out in the presence of water.
23. The method of claim 22, wherein the water content of the combination before the reaction is from 30 wt% to 40 wt% of the dry weight of the feedstock.
24. The method of any one of claims 1 to 23, further comprising drying the feedstock prior to combining the feedstock with the alcohol.
25. The method of any one of claims 17 to 19, further comprising drying the feedstock prior to combining the feedstock with the alcohol and acid catalyst.

26. The method of claim 24 or 25, wherein the water content of the feedstock after drying is in the range of 3 wt% to 5 wt% of the dry weight of the feedstock.
27. A method for making fatty acid alkyl esters, the method comprising:
- (a) providing
 - (i) a feedstock comprising or derived from a biomass, wherein the feedstock comprises
 - (1) phospholipids, free fatty acids (FFAs), glycerides, oils, or a combination thereof;
 - (2) at least 10 wt% cellulosic material based on the dry weight of the feedstock; and
 - (3) at least 10 wt% proteins based on the dry weight of the feedstock, and
 - (ii) an alcohol,
 - (b) making a combination mixture by combining the feedstock with the alcohol; and
 - (c) reacting the feedstock and the alcohol at a pH in the range of 0 to 7, at a temperature in the range of 240° C to 300° C, and at a pressure in the range of 1500 psig and 2000 psig to generate fatty acid alkyl esters, cleave the cellulosic material, shorten the proteins, and form amino acids.
28. The method of claim 27, wherein step (c) is carried out at a pH in the range of 5 to 7.
29. The method of claim 27, wherein step (c) is carried at a pH in the range of 2 to 3.
30. The method of claim 27, wherein the method further comprises combining an acid catalyst to the combination mixture.
31. The method of claim 30, wherein the acid catalyst comprises sulfuric acid.

32. The method of any one of claims 27 to 31, wherein the biomass comprises algae feedstock, an algae, corn feedstock, dried distillers grain (DDG), rice, or rice bran.
33. The method of claim 32, wherein the algae is algae sludge.
34. The method of any one of claims 27 to 33, wherein the method is carried out in the presence of water.
35. The method of claim 34, wherein the water content of the combination before the reaction is at from 30 wt% to 40 wt% of the dry weight of the feedstock.
36. The method of any one of claims 27 to 35, further comprising adding a fatty acid alkyl ester to the combination mixture before the reacting step.
37. The method of any one of claims 27 to 36, further comprising separating the resulting fatty acid alkyl esters from the resulting cleaved cellulosic material.
38. The method of claim 1, wherein the initial pH is 0.4, the temperature is between 140°C to 180°C, and the pressure is between 200 and 500 psig.
39. The method of any one of claims 1 to 38, further comprising: (d) neutralizing a product of the reacting of step (c) to a pH of 5.5 to 7.0; and (e) fermenting the cleaved cellulosic material to produce ethanol.
40. The method of any one of claims 1 to 38, further comprising; (d) fermenting the cleaved cellulosic material to produce ethanol after neutralizing a product of the reacting of step (c) to a pH of 5.5 to 7.0.
41. The method of claim 39 or 40, wherein the fermenting comprises adding a yeast.

42. The method of claim 17 or 18, wherein the acid catalyst is in an amount from 4 wt% to 8 wt% of the dry weight of the feedstock.
43. The method of any one of claims 1 to 26, further comprising: isolating the ester product mass by filtration.
44. The method of claim 43, further comprising washing the isolated ester product mass with alcohol after filtration.
45. A method for making a biofuel comprising fatty acid alkyl esters in a pressurized reactor, the method comprising:
- (a) providing
 - (i) a feedstock comprising or derived from a biomass, wherein the feedstock comprises
 - (1) free fatty acids (FFAs), glycerides, oils, or a combination thereof; and
 - (2) cellulosic material;
 - (ii) an alcohol, and
 - (iii) a pressurized reactor;
 - (b) making a combination mixture by combining the feedstock with the alcohol; and
 - (c) reacting the combination mixture at a pH in the range of 0 to 7, at a temperature in the range of 140°C to 300°C, and at a pressure that is at least sufficient to prevent boiling of the alcohol during the reaction, for a sufficient period of time to
 - (i) generate a fatty acid alkyl ester, and
 - (ii) cleave cellulosic material.
46. The method of claim 45, wherein the method further comprises combining an acid catalyst to the combination mixture in step (b) to generate a pH in the combination mixture in a range of 0 to 5.

47. The method of claim 46, wherein the pH is 0.4 to 5.
48. The method of any one of claims 45 to 47, wherein the method is carried out in the presence of water.
49. The method of any one of claims 45 to 48, wherein the reaction is at a temperature in the range of 160°C to 275°C.
50. The method of any one of claims 45 to 48, wherein the reaction is at a temperature in the range of 175°C to 275°C.
51. The method of any one of claims 45 to 50, wherein the feedstock further comprises proteins.
52. The method of claim 51, wherein step (c) is carried out for a sufficient period of time to (i) generate a fatty acid alkyl ester, (ii) cleave cellulosic material, and (iii) shorten the proteins, or form amino acids, or both.
53. The method of any one of claims 45 to 52, wherein the biomass comprises algae feedstock, an algae, algae soapstock, corn feedstock, dried distillers grain (DDG), rice, or rice bran.
54. The method of claim 53, wherein the algae feedstock comprises algae sludge.
55. The method of any one of claims 45 to 54, wherein the reaction time is between 1 to 2 hours.
56. The method of any one of claims 45 to 55, further comprising: (d) neutralizing a product of the reacting of step (c) to a pH of 5.5 to 7.0; (e) fermenting the cleaved cellulosic material to produce ethanol.

57. The method of any one of claims 45 to 55, further comprising: (d) fermenting the cleaved cellulosic material to produce ethanol after neutralizing a product of the reacting of step (c) to a pH of 5.5 to 7.0.
58. The method of claim 56 or 57, wherein the fermenting comprises adding a yeast.
59. The method of any one of claims 45 to 58, further comprising: isolating the ester product mass by filtration.
60. The method of claim 59, further comprising washing the isolated ester product mass with alcohol after filtration.

1/2

Fig. 1

