



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
23.01.2013 Bulletin 2013/04

(51) Int Cl.:
B41M 5/24 (2006.01)

(21) Application number: **12188525.5**

(22) Date of filing: **04.01.2005**

(84) Designated Contracting States:
AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR

- **Tevä, Erkki**
FI-55100 Imatra (FI)
- **Miikki, Nina**
FI-55100 Imatra (FI)

(30) Priority: **05.01.2004 FI 20040006**

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:
05701721.2 / 1 701 850

(74) Representative: **Saijonmaa, Olli-Pekka**
Berggren Oy Ab
P.O. Box 16
00101 Helsinki (FI)

(71) Applicant: **Stora Enso Oyj**
00101 Helsinki (FI)

Remarks:

This application was filed on 15-10-2012 as a divisional application to the application mentioned under INID code 62.

(72) Inventors:
• **Räsänen, Jari**
FI-55420 Imatra (FI)

(54) **A method for producing identification marks on paper or board and a marked material made with the method**

(57) The invention comprises a method for producing identification marks (5) on layer-structured paper or board (7) to be manufactured in a continuous web and the marked papers and boards obtained with this method. With this method, the marks (5) are made with a laser beam on a moving web form fiber layer (1), on which a second layer of material (6) is subsequently overlaid in such a way that the marks remain inside the layer-structure of the moving web. The second material layer (6) may comprise a second fiber layer or, for example, a polymer coating. The laser marking takes place by engraving the surface of the fiber layer (1). Inside the layer structure, the marks (5) are protected, but detectable with a detector to ensure the authenticity of the material. The marked paper or board is suitable for product packages to be protected against product forgeries.

ture of the moving web. The second material layer (6) may comprise a second fiber layer or, for example, a polymer coating. The laser marking takes place by engraving the surface of the fiber layer (1). Inside the layer structure, the marks (5) are protected, but detectable with a detector to ensure the authenticity of the material. The marked paper or board is suitable for product packages to be protected against product forgeries.

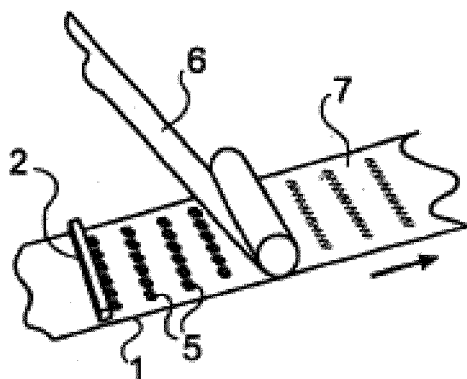


Fig. 1

Description

[0001] The invention involves a method for producing identification marks on layered paper or board made in a continuous web. In addition, the invention also concerns layered paper or board made with this method, containing identification marks.

[0002] Visible marks can be made on consumer packages at the packing phase, for the purpose of informing the consumer about the packaging date or the "consume by" date of the product. In addition, marks which may be partially or entirely invisible are used as product identifiers, which identifies the origin of the product and ensuring its authenticity.

[0003] Well-known package marking methods include ink printing, embossings and cuttings or perforations made in the packaging material by pressing or cutting. However, laser package marking is used increasingly. With this method, the marks are made with a laser beam without physically touching the packaging material or leaving printing ink or any other extra substance on the packaging.

[0004] With a laser beam, it is possible to affect fiber-based material, such as paper or board, in a number of ways. As is well-known, a laser beam burns through thin paper. To prevent this, US patent publication 6306493 presents a fine polymer additive to be mixed in with the paper to act as absorbent and char, thus leaving a dark, distinguishable mark on the paper. According to the knowledge and experience of the applicant, it is, however, possible to burn the surface fiber layer of the paper with a laser beam to produce a mark, without any through-burning of the paper and without the need to add polymer or other additives to the pulp, as described in the publication.

[0005] Other possible fiber-layer laser working methods are cutting the surface of the layer or engraving using an inert gas to prevent the burning of the material. The marks made in this manner are hollow on the surface of the fiber-layer, where no significant material color alteration takes place. A mark can also be produced by changing the structure of the fiber-layer by reacting one of its components with a laser beam or by vaporizing it. The mark can be detected so it can be used as an identifier.

[0006] A laser-marked paper or board similar to US patent 6306493 has been put forward for use as packaging material, labels or wrapping papers for various consumer packages marked by targeting the laser beam on the surface of the material. The laser marking is thus essentially related to the packaging process of the products. US patent publication 5340628 describes a laser-marked layered packaging material where the paper base is introduced with a polymer layer of polyester or polypropylene, which the laser beam later penetrates, leaving a mark on the paper layer below. The material was designed for labels attached to product packages where the laser marks contain package-specific information about the product.

[0007] According to the publications mentioned earlier, known fiber-based laser-marked materials are meant mainly for making marks serving consumers in the product packaging phase. Their applicability is not the best possible to identifier marks to prove the authenticity of the product, i.e. where the marking is mainly intended to prevent or complicate product forgery. A forger who copies the product with the package naturally tries to produce the laser marks on the package.

[0008] The objective of the invention presented is to provide a solution by marking paper or board used particularly as packaging material with a suitable laser mark, which is significantly more difficult to forge. The starting point of the invention is that in the packaging phase instead of making marks on the ready-made package or the package being manufactured, the mark is included in the packaging material itself, in the paper or board, which is layer-structured. Characteristic for the method according to the invention is that the marks are made with a laser beam on a moving web form fiber layer, by engraving hollows on the fiber layer, and a second layer of material is overlaid on said fiber layer in such a way that the marks remain inside the layer structure of the moving web.

[0009] With this invention, identification marks are produced in a moving web on an on-line principle with a paper or board machine or with a paper or board coating unit. The laser heads can be located, for example, in a stationary beam installed crosswise to the web, which would produce a suitably covering regular figure in the moving web. Any figure can be used as identification mark, for example, a logo or a trademark of the paper or board manufacturer or the product manufacturer, or, significantly, a mark specific to the product being packaged. As the identification remains inside the layer structure of the paper or board, it cannot be tampered with or easily reproduced by a forger. To succeed, the forger would need to copy the product and package including the packaging material, which, even if technically possible, would make the activity unprofitable.

[0010] The laser markings can be made by engraving the surface of the fiber layer by using a higher power density CO₂ laser beam (as opposed to low power density CO₂ laser beam which burns the surface of a fiber layer). By using a CO₂ laser beam of higher power density and an inert gas preventing oxidation hollows can be engraved by vaporizing material from the fiber layer. The hollow relief works as identification marks identified by a detector on raying.

[0011] The applications of the invention include a board containing two or more overlaid fiber layers. The marks are created on the surface of the web form fiber layer before the layers are joined together. At the joining stage, the fiber webs may still be moist, in which case the marks are made before the final drying of the joint web with a board machine, and are inseparably integrated into the final board. As the marks are hollows formed in the fiber layer, moist or elastic fiber layers overlaid fill

the hollows in such a way that the board takes on an even thickness and density. If different materials are used for the layers, the marks formed by the hollows are still recognizable in the final board. If the materials differ in darkness and the hollows were made in the darker layer, the figures formed by the hollows can be seen (by raying) in the board as lighter than the surrounding area. Correspondingly the hollows made in the lighter layer show up as darker than their surroundings. Chemical and chemical/mechanical or mechanical pulps, and particularly unbleached pulps, such as brown kraft pulp, and bleached pulps, have these kinds of darkness or color differences sufficient for identification purposes.

[0012] In paper or board manufactured by the method used in the invention, the material layer placed on the fiber layer and marked online may be formed by a coating paste or glue layer, applied during the manufacturing process with a paper or board machine, or on a fiber layer, for example, by extruding the polymer coating to be joined. With a transparent polymer coating the identification marks can be left visible, while at the same time they are protected against being tampered with by the coating. The identification marks and subsequent coating takes place, according to the invention, as a continuous process without interrupting the movement of the web.

[0013] With this method, products contain a paper or a board in the form of a layered web containing identification marks, and the paper or board is equipped with marks made by a laser beam that are embedded inside the layer structure of the web. A marked product such as this can be manufactured in large scale in a paper or board factory, from where it is delivered in rolls to a customer who then uses it for individual product packages. The material may be multi-layered board, coated paper or board or polymer-coated paper or board; and the marks may be hidden under the coating or a layer of fiber, where they can be detected by raying or with a detector, or the marks may be left visible under a transparent polymer coating.

[0014] As an example of the application of the invention, laser-marked packaging cartons may be made of a three-layered folded carton form having outer pulp layers of sulfate and the middle layer made of chemical-thermo-mechanic pulp (CTMP). In this carton the marks are burned darker in the interface of the sulfate and CTMP layers or the marks are hollows engraved in either layer, detectable due to differences in the composition of the pulp.

[0015] The invention is explained in more detail below with examples by reference to a drawing, depicting:

figure 1: the laser marking of a fiber material web and subsequent joining to another web to produce a layer-structured web format

figure 2: laser marking according to figure 1 and the joining of the webs, seen from the side

figure 3: marking of the web as a III-III intersection of figure 2

figure 4: the layer structure of a laser-marked carton using the invention

[0016] Figures 1-3 show the fiber material web 1; its route has been introduced with a beam 2 in a crosswise direction to the web. From the laser heads 3 beside the beam, identifying marks 5 are produced on the surface of the web with the aligned laser beams 4. The marks may be any figure 5, such as a company or product name, logo or trademark, and in the case of Figure 1 they form crosswise lines spaced at even intervals on the web. The web should include enough coverage for the marks 5 in such a way that there are enough marks for each sheet or packaging preform later to be separated from the layer-structured web.

[0017] The laser heads 3 in Figures 2 and 3 may comprise higher density CO₂ laser heads 3, and inert gas is directed simultaneously so that the surface of the web 1 is engraved with hollows as identification marks, based on vaporizing the material.

[0018] After the marking phase, as the web 1 continues its movement, another moving material web 6 is brought against it, as shown in Figures 1 and 2, in such a way that together the webs form a layer-structured, web format 7. Wherever necessary, adhesives can be used to join the webs 1 and 6. The product 7 delivered as a continuous web is rolled (not presented) and after further converting phases - if any - it is delivered in the form of a roll, sheets or preform to be used as individual product packages containing identification marks 5.

[0019] Fiber material can also be used as the second web 6 to be joined to the fiber material web 1 equipped with marks 5. In this case, multilayered board is produced as the web form product 7. In the schematic figures 1 and 2, only two layers 1 and 6 are presented, but boards may have more layers, and if needed, identification marks 5 can be produced on the extra fiber layers or on the opposite sides of the same layer.

[0020] The second material layer to be introduced on the marked fiber material web 1 may also comprise, for example, a polymer sheeting or a single- or multi-layered extruded polymer coating to be laminated with the web. It is possible to laser-mark the fiber material web 1 with a paper or board machine, in which case, in the next phase the web is introduced with a coating paste covering the identification marks.

[0021] When another fiber material web 6 is brought onto the fiber marked material web 1, the identification marks 5 remain hidden inside the obtained layer-structured board 7 from which the marks however can be detected with a suitable device. If the layers are thin enough, the marks 5 are visible to the naked eye when the material is held up against the light. If the marked fiber material web 1 is equipped with a transparent polymer coating, the burned marks 5 can be seen through the polymer

layer.

[0022] Figure 4 shows layer-structured products made using the invention: a three-layer board 7, in which the middle layer 1 fiber material differs from the fiber material of outer layers 6 and 8. The material used for the middle layer could be, for example, CTMP and the outer layers 6 and 8 could be, for example, bleached sulfate pulp. The identification marks inside the layer-structure are hollows 5' engraved on the surface of the middle layer 1. The laser marking of the middle layer 1 and join to the outer layer 6 covering the marks 5' take place as per Figures 1-3. The second outer layer 8 may have been joined to the middle layer 1 before the marking phase or after the phases described in the figures 1-3.

[0023] If the marking was made with a board machine while the fiber material layers 1 and 6 were still moist, the hollows 5' fill with the material of the outer layer 6 in such a way that the board 7 rendered as the final product is essentially uniform in thickness and density. When the materials of middle and outer layers 1, 6 differ, the marks formed by the hollows 5' are still detectable using a detector. For example, in one case, the CTMP may be darker than the sulfate pulp, shown by raying as lighter than the surrounding area.

[0024] For professionals, clearly, many other examples of the invention could be used. The relevant claims are set out below:

Claims

1. A method for producing identification marks (5) in a layer-structured paper or board (7) to be manufactured as a continuous web, **characterized in that** the marks (5) are made with a laser beam (4) on a moving web form fiber layer (1), by engraving hollows (5') on the fiber layer, and a second layer of material (6) is overlaid on said fiber layer in such a way that the marks remain inside the layer structure (7) of the moving web.
2. A method according to claim 1, **characterized in that** after the marking phase, the moving fiber layer (1) is laid against another moving, web form fiber layer (6).
3. A method according to claim 2, **characterized in that** the marking takes place with a paper or board machine as the fiber layer (1) contains moisture originating from pulp, in which case the web (7) is dried after the joining of the layers (1, 6).
4. A method according to claim 3, **characterized in that** the materials of the fiber layers (1, 6) to be joined differ from one another.
5. A method according to claim 4, **characterized in that** one fiber layer to be joined is of chemical pulp

and the other of mechanical or chemical/mechanical pulp.

6. A method according to claim 4 or 5, **characterized in that** one of the fiber layers to be joined is of unbleached pulp and the other of bleached pulp.
7. A method according to one of the previous claims, **characterized in that** the marked web form fiber layer (1) is applied with a coating layer, covering the marks (5).
8. Layer-structured paper or board (7) containing identification marks produced by a method according to one of the previous claims, **characterized in that** the web form paper or board (7) contains marks, which are hollows (5') engraved on a fiber layer (1) by means of a laser beam, and these marks are embedded inside the layer-structure.
9. A paper or board according to claim 8, **characterized in that** the web is rolled around a drum or core.
10. A board according to claim 8, **characterized in that** the board contains marks (5') made with a laser beam, and the marks are embedded inside the structure formed by a series of fiber layers (6, 1, 8) of the board.
11. Board according to claim 10, **characterized in that** the marks are hollows (5') cut with a laser beam on the fiber layer (1) and that these hollows are filled with a different type of material present in the next fiber layer (6).
12. A board according to claim 11, **characterized in that** one of the fiber layers is of chemical pulp and the other of mechanical or chemical/mechanical pulp.
13. A board according to one of the claims 10-12, **characterized in that** it is a fold-carton formed of sulfate and CTMP layers.

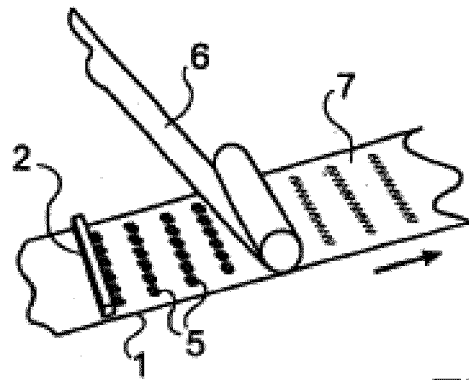


Fig. 1

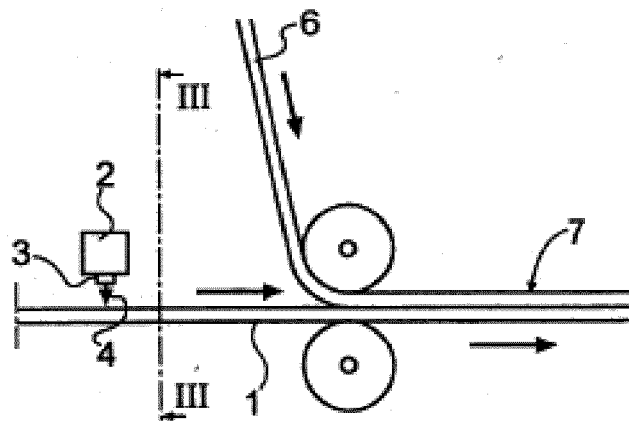


Fig. 2

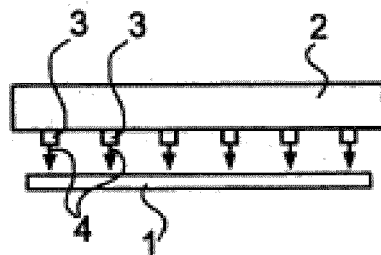


Fig. 3

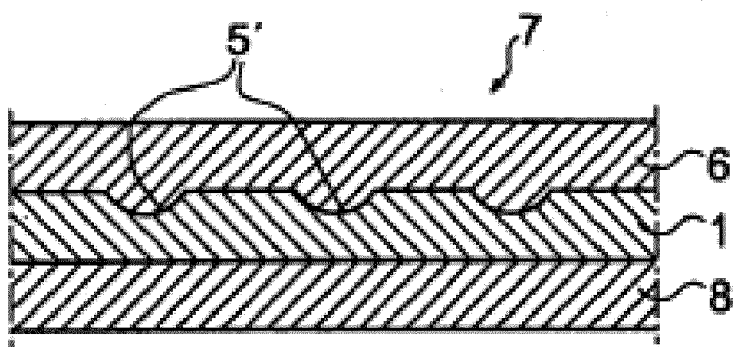


Fig. 4



EUROPEAN SEARCH REPORT

Application Number
EP 12 18 8525

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	DE 34 31 577 A1 (HEINR AUG SCHOELLER SOEHNE GMB [DE]) 13 March 1986 (1986-03-13) * page 6, line 1 - line 5 * * page 7, line 10 - line 19 * * page 10, line 11 - line 36 * * page 15, line 1 - line 16 * -----	1-13	INV. B41M5/24
A	DE 198 22 605 A1 (ZANDERS FEINPAPIERE AG [DE]) 25 November 1999 (1999-11-25) * page 2, line 39 - line 54 * * page 3, line 37 - line 39 * * page 4, line 60 - line 68 * * page 7, line 43 - line 53 * -----	1,7,8	
			TECHNICAL FIELDS SEARCHED (IPC)
			B41M D21H D21F
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 12 December 2012	Examiner Pulver, Michael
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

4
EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 12 18 8525

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-12-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3431577	A1	13-03-1986	NONE
DE 19822605	A1	25-11-1999	AU 4142899 A 06-12-1999
		DE 19822605 A1	25-11-1999
		EP 1089882 A2	11-04-2001
		WO 9960208 A2	25-11-1999

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 6306493 B [0004] [0006]
- US 5340628 A [0006]