




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B29C 47/30, 47/68, B05C 5/02, B29C 47/02	A1	(11) International Publication Number: WO 00/50216 (43) International Publication Date: 31 August 2000 (31.08.00)
<p>(21) International Application Number: PCT/US00/03326</p> <p>(22) International Filing Date: 9 February 2000 (09.02.00)</p> <p>(30) Priority Data: 09/258,497 26 February 1999 (26.02.99) US</p> <p>(71) Applicant: THE PROCTER AND GAMBLE COMPANY [US/US]; One Procter and Gamble Plaza, Cincinnati, OH 45202 (US).</p> <p>(72) Inventor: VINSON, Kenneth, D.; 303 Wyoming Avenue, Cincinnati, OH 45215 (US).</p> <p>(74) Agents: REED, T., David et al.; The Procter & Gamble Company, 5299 Spring Grove Avenue, Cincinnati, OH 45217-1087 (US).</p>	<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CN, CR, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), DM, EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>	

(54) Title: EXTRUSION DIE

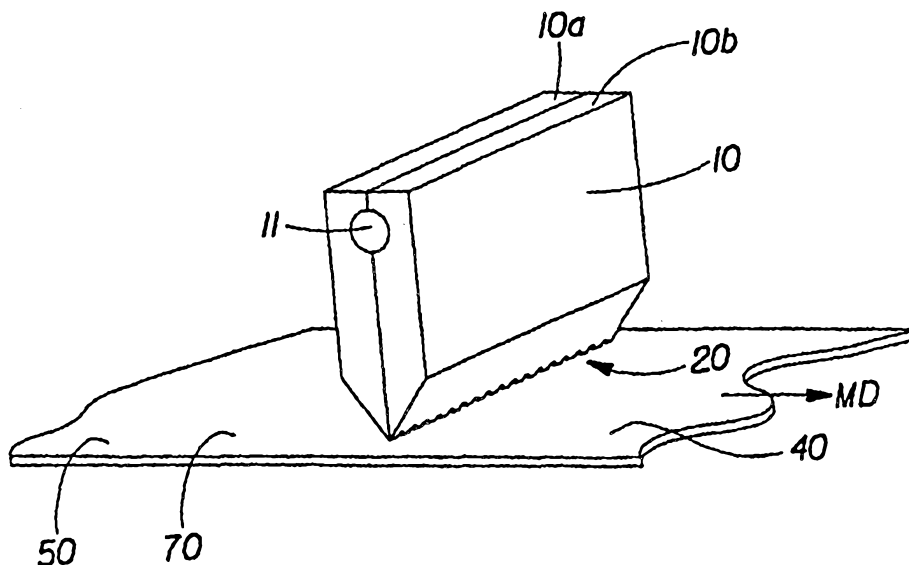

(57) Abstract

An extrusion die for extruding a chemical functional additive for making a disposable paper product comprises a supply port and a distribution channel in fluid communication with the supply port. The distribution channel terminates with at least one discharge mouth having a passage cross-section therethrough. The discharge mouth comprises an entry orifice having an entry open area A_e , an exit orifice having an exit open area A_x , and a discharge distance defined between the entry orifice and the exit orifice. The exit open area A_x is greater than the entry open area A_e . This ensures that contaminants would pass through the discharge mouth, whereby plugging thereof is substantially avoided. Preferably, the passage cross-section of the discharge mouth continuously and gradually increases from the entry orifice to the exit orifice.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

EXTRUSION DIE

FIELD OF THE INVENTION

The present invention generally relates to extrusion processes and apparatuses therefor. More specifically, the present invention is concerned with processes and apparatuses for extruding chemical functional additives used in making disposable items, such as paper toweling, napkins, toilet tissue, facial tissue, etc.

BACKGROUND OF THE INVENTION

Extrusion dies for depositing an extrudable fluid onto a substrate are known in the art. Dies of a type generally known in the art as a coat-hanger die are described, for example, in the following U. S. patents: 4,043,739 issued on August 23, 1997 to Appel and assigned to Kimberly-Clark Corporation; 4,372,739 issued on February 8, 1983 to Vetter et al. and assigned to Röm GmbH of Darmstadt, Germany; 5,234,330 issued on August 10, 1993 to Billow et al. and assigned to Eastman Kodak Company; 5,494,429 issued on February 27, 1996 to Wilson et al. and assigned to Extrusion Dies, Inc. Several other types of extrusion apparatuses are disclosed, for example, in the following U. S. patents: 5,607,726 issued on March 1997 to Flattery et al. and assigned to E. D. du Pont de Nemours and Company; 5,522,931 issued to Iwashita et al. on June 4, 1996 and assigned to Konica Corporation of Japan; 5,740,963 issued to Riney on April 21, 1998 and assigned to Nordson Corporation; 5,511,962 issued to Lippert and assigned to Extrusion Dies, Inc.

One of the concerns relating to extrusion dies of prior art has been plugging of a die's discharge mouth, i. e., the outlet through which the extrudable fluid exits the extrusion die. Extrusion dies are frequently used

in dusty environments. In papermaking, for example, some paper webs tend to be particularly prone to release surface fibers. A dust comprising primarily papermaking fibers may cause contamination of a chemical functional additive, such as, for example, a topical tissue softener, which is routinely deposited onto the paper web. Other common contaminants may include degradation products of the extrudable fluid itself, which particularly may occur in stagnant areas around the walls of the extrusion die. Build up of these degradation products can form over a period of time, harden and eventually separate from the walls of the die, thereby becoming a contaminant. More generally, particulate soil, sand, dirt, and grit tend to become airborne in the vicinity of the extrusion operation and settle into the supply of the extrudable fluid feeding the extrusion die.

If the chemical functional softener, for example, is deposited onto a substrate by extrusion, the contaminants, which have found their way into the functional additive being extruded, may plug the discharge outlet of the extrusion die. A process of cleaning of the extrusion dies is usually costly, for it involves stoppage of a production line and/or a substantial effort. The cleaning may be further complicated in extrusion dies designed to extrude very thin layers of extrudates and therefore comprising the discharge mouths having very small (in the range of 0.0002-0.00450 inches) dimensions requiring maintenance of high-precision tolerances.

Now it has been found that the discharge mouth having a divergently "flared" shape on a cross-section can beneficially mitigate, and even eliminate the problem of plugging of the discharge mouth. Accordingly, the present invention advantageously provides a novel extrusion apparatus comprising a discharge mouth having an entry open area and an exit open area which is greater than the entry orifice. The present invention also provides an advantage of an extrusion process which substantially eliminates plugging of the discharge mouth of the extrusion apparatus.

Other objects, features, and advantages of the present invention will be readily apparent from the following description taken in conjunction with accompanying drawings, although variations and permutations may be had without departing from the spirit and scope of the disclosure.

SUMMARY OF THE INVENTION

The present invention provides an extrusion die and a process for extruding an extrudable fluid onto a web substrate. A preferred extrudable fluid comprises a chemical functional additive commonly used in making consumer disposable articles, such as such as paper toweling, napkins, toilet tissue, facial tissue, sanitary napkins, diapers, etc. The extrudable fluid may be selected from the group consisting of softeners, emulsions, emollients, lotions, topical medicines, soaps, anti-microbial and anti-bacterial agents, moisturizers, coatings, inks and dyes, and binders. A preferred web substrate comprises a fibrous web, such as, for example, a paper web. It is to be understood, however, that the extrusion die and the process of the present invention may be beneficially used with other types of the extrudable fluids and other types of the substrates.

An extrusion die of the present invention comprises a supply port and a distribution channel in fluid communication with the supply port. The distribution channel terminates with at least one discharge mouth having a passage cross-section therethrough. The discharge mouth comprises an entry orifice, an exit orifice, and a discharge distance therebetween. The entry orifice has an entry open area A_e , and the exit orifice has an exit open area A_x . According to the present invention, the exit open area A_x is greater than the entry open area A_e . A ratio A_x/A_e is preferably between about 1.1 and about 10, more preferably between about 1.2 and about 5, and most preferably between about 1.5 and about 2.

In a preferred embodiment of the extrusion die, the passage cross-section of the discharge mouth continuously and gradually increases from the entry open area A_e to the exit open area A_x . The discharge mouth is flared, preferably gradually and continuously, in at least one cross-section. More preferably, the discharge mouth is flared in at least two mutually perpendicular cross-sections, and most preferably, the discharge mouth is gradually and continuously flared in any of its cross-sections, i. e., around 360° . The discharge mouth may have various configurations, including but not limited to: an elongate slot, a substantially circular aperture, and any combination thereof.

The discharge distance of the discharge mouth is preferably from about 0.0075 to about 0.1 inches, and more preferably from about 0.010 to about 0.050 inches. The exit open area A_x of the discharge mouth is preferably from about 0.10 to about 2.5 square inches, and more preferably from about 0.2 to about 1.0 square inches.

In the preferred embodiment, the extrusion apparatus further has a knife-edge lip. The discharge mouth(s) are associated with the lip such that during the process of extruding the web substrate may contact the edge-knife lip. In a particularly preferred embodiment of the extrusion die comprising a plurality of the circular discharge mouths, the edge-knife lip extends between the exit orifices of the discharge mouths. Such discharge mouths can be formed by drilling flared holes in the die through the edge-knife lip.

The process of the present invention comprises the following steps: providing an extrudable fluid; providing a web substrate; providing an extrusion die of the present invention described herein above; extruding the extrudable fluid through the discharge mouth of the extrusion die, while continuously moving the web substrate relative to the extrusion die; and contacting the web substrate with the extrudate. During the process, at

least some of relatively large contaminants contained in the extrudable fluid, i. e., those contaminants that have at least one dimension which is greater than at least one dimension of the entry open area, are precluded from entering the discharge mouth. At the same time, at least some of relatively small contaminants, i. e., the contaminants having at least one dimension which is less than at least one dimension of the entry open area, pass through the discharge mouth without being obstructed therein. It is believed that during the described process using the extrusion die of the present invention, plugging of the discharge mouth is substantially reduced or even avoided.

Some of the contaminants that are precluded from entering the discharge mouth may still be disposed in the proximity of the entry orifice, thereby restricting flow of the extrudable fluid through the discharge mouth. To avoid this problem, a back-pressure may, for a short period of time, be applied to the extrudable fluid inside the distribution channel.

BRIEF DESCRIPTION OF THE DRAWINGS

- FIG. 1** is a schematic perspective view of an exemplary process of the present invention showing one embodiment of an extrusion apparatus of the present invention in conjunction with a moving paper web.
- FIG. 2** is a schematic partial cross-sectional view of the extrusion die of the present invention, showing a discharge mouth of the die.
- FIG. 3** is a schematic and more detailed view of the discharge mouth shown in **FIG. 2**.
- FIG. 3A** is a schematic cross-sectional view of the discretely flared discharge mouth.

- FIG. **4A** is a schematic partial cross-sectional view of the extrusion apparatus, taken along lines **4-4** of FIG. **3**, showing an embodiment of the discharge mouth.
- FIG. **4B** is a schematic partial cross-sectional view similar to that shown in FIG. **4A**, showing another embodiment of the discharge mouth.
- FIG. **5** is a schematic partial view taken in the direction of an arrow **5** of FIG. **4A**, showing an embodiment of the discharge mouth comprising a circular aperture.
- FIG. **6** is a schematic partial view similar to that shown in FIG. **5**, showing another embodiment of the discharge mouth comprising an elongate slot.
- FIG. **7** is a schematic partial view similar to that shown in FIG. **5**, showing still another embodiment of the discharge mouth comprising an elongate slot.
- FIG. **8** is a schematic partial cross-sectional view of the extrusion die of the present invention, having a discharge mouth comprising a knife-edge lip.
- FIG. **9** is a schematic partial cross-sectional view of the extrusion apparatus, taken along lines **9-9** of FIG. **8**.
- FIG. **10** is a schematic partial view taken in the direction of an arrow **10** of FIG. **9**, showing an embodiment of the discharge mouth comprising a semi-circular aperture.
- FIG. **11** is a schematic partial view of the extrusion apparatus shown in conjunction with a substrate.

DETAILED DESCRIPTION OF THE INVENTION

An extrusion die **10** of the present invention comprises a body having a supply port **11** and a distribution channel **15** in fluid communication with

the supply port **11**, as schematically shown in FIGs. **1** and **2**. As used herein, the term "supply port" **11** refers to an inlet in the body of the extrusion die **10**, through which an extrudable fluid is supplied, preferably under pressure, into the distribution channel **15**. As used herein, the term "extrudable fluid" refers to any fluid, including liquid, as well as gaseous material, which is capable of being extruded using the apparatus **10** and the process of the present invention. The examples of the extrudable fluid **80** include, but are not limited to: water; alcohol; functional additives, such as softeners (siloxanes, oils, quaternary ammonium, waxes, and others), emulsions, emollients, lotions, topical medicines, soaps, various anti-microbial and anti-bacterial agents, and moisturizers (for example, glycol); fillers, such, for example, as clay slurry; a variety of resins; coatings, such, for example, as clay and latex, and various opacifiers; inks and dyes; binders; reactive and non-reactive vapors, such, for example, as oxygen and nitrogen.

In FIG. **1**, a carrier **70** comprising a web substrate **50** is shown as moving in a machine direction **MD**. As used herein, the term "carrier" is generic and refers to any medium onto which the extrudate may be deposited according to the process of the present invention. Two embodiments of the preferred carrier **70** is a transfer roll (not shown) and a web substrate **50**. One skilled in the art will appreciate that a transfer roll, such as, for example, an off-set roll may be used in a printing process for indirect application of the extrudate to the substrate.

The reference was also made to the "machine direction" designated in several drawings as a directional arrow "**MD**" and a "cross-machine direction" designated as a directional arrow "**CD**." As used herein, the term "machine direction" indicates a direction which is parallel to the flow of the substrate **50** through the equipment. The term "cross-machine direction" indicates a direction which is perpendicular to the machine direction and

lies in the general plane of the substrate **70**. In some embodiments of the process according to the present invention, the extrusion apparatus **10** may be disposed relative to the substrate **70** such that the outlet width **W** is parallel to the cross-machine direction **CD**, as schematically shown in FIGs. **2** and **4**. It should be noted, however, that embodiments are possible, and may be even desirable, in which the outlet is disposed such that the widthwise direction is not parallel to the cross-machine direction **CD**, i. e., the direction of the outlet width **W** and the cross-machine direction **CD** form an acute angle therebetween (not shown).

In one preferred embodiment, the extrusion die **10** comprises a one-piece body. However, the extrusion die may be formed by two matching halves **10a** and **10b** (FIG. **1**), a general design one skilled in the art will readily recognize. Each of the halves **10a** and **10b** has a cavity therein such that when the halves **10a** and **10b** are sealed together, their cavities form the distribution channel **15**. As used herein, the term "distribution channel" **15** refers to a three-dimensional space, or hollowness, within the die **10**, structured and designed to receive the extrudable fluid. As used herein, a term "lip" **20** (FIGs. **1** and **2**) refers to a furthestmost outer surface of the extrusion die **10**, relative to a general direction of a flow of the extrudable fluid at the point of exiting the die **10**. In some embodiments, the lip **20** may contact a substrate **50** (FIG. **1**) onto which the extrudable fluid is deposited. In the embodiment of the die **10** comprising two halves **10a** and **10b**, the lip **20** may be formed by at least one of a leading lip (belonging to one of the halves **10a**, **10b**) and a trailing lip (belonging to the other of the halves **10a**, **10b**). In one preferred embodiment of the die **10** according to the present invention, the lip **20** comprises a "knife edge" i. e., a relatively sharp surface formed by two surfaces connected at an angle α , as best shown in FIG. **8**.

The distribution channel **15** terminates with at least one discharge mouth **21** having a passage cross-section for the extrudable fluid to pass therethrough. As used herein, the term “discharge mouth” **21** refers to an opening, or hole, in the lip **20**, through which opening the extrudable fluid exits the die **10**, thereby forming an extrudate. As best shown in FIGs. **3**, **4A**, and **4B**, the discharge mouth **21** comprises and extends between an entry orifice **21e**, an exit orifice **21x**. The discharge mouth has a discharge distance **H** defined between the entry orifice **21e** and the exit orifice **21x**. The discharge distance **H** is in the range of preferably 0.005 – 0.250 inches, more preferably 0.0075 – 0.100 inches, and most preferably 0.010 – 0.050 inches. It should be carefully noted that an angle α_1 formed between the inner surfaces of the halves **10a** and **10b** may or may not be equal to the angle α (FIG. **8**). Preferably, the angle α is greater than the angle α_1 . Thus, the discharge distance **H** may be minimized.

The passage cross-section of the discharge mouth **21** has a variable open area **A** which increases from the entry orifice **21x** to the exit orifice **21e**, as will be explained in more detail below. The entry orifice **21e** has an entry open area **Ae**, and the exit orifice **21x** has an exit open area **Ax**. As used herein, the term “entry open area” **Ae** is an area through which the extrudable fluid enters the discharge mouth **21**; and the term “exit open area” **Ax** is an area through which the extrudable fluid exits the discharge mouth **21** – and hence the extrusion die **10**. Stated differently, the entry open area **Ae** and the exit open area **Ax** refer to areas through which the extrudable fluid consecutively passes when entering and exiting, respectively, the discharge mouth **21**. The open areas **Ae** and **Ae** are typically measured in square units in a plan defined by a perimeter of a given open area -- either a plan defined by the perimeter of the entry orifice **21e**, or a plan defined by the perimeter of the exit orifice **21x**, respectively. A reference was also made above to the generic term “open area”

designated by "A" (FIG. 4A). The open area **A** refers to any area within the discharge mouth **21**, which area is generally orthogonal to the flow of the extrudable fluid through the discharge mouth **21** and defined by a perimeter thereof at any point between the entry open area **Ae** and the exit open area **Ax**. One skilled in the art will appreciate that within the discharge distance **H** of the discharge mouth **21**, i. e., between the entry open area **Ae** and the exit open area **Ae**, there may be unlimited number of cross-sectional open areas "A."

In some embodiments, both of the entry orifice **21e** and the exit orifice **21x** are disposed in plans that are generally orthogonal to the flow of the extrudable fluid (FIGs. 3, 4A, and 4B). If, however, at least one of the entry orifice **21e** or a portion thereof and the exit orifice **21x** or a portion thereof is disposed in a plan that is not orthogonal to the flow of the extrudable fluid (FIGs. 8-10), the entry open area **Ae** and/or the exit open area **Ax** is/are also not orthogonal to the flow of the extrudable fluid. In FIGs. 8-10, the extrusion die **10** has the knife-edge lip **20**, formed between two surfaces at the angle α and a plurality of discharged mouths **21** having a circular shape. As one skilled in the art will appreciate, the circular shape of the discharge mouth **21** appears as a semi-elliptical shape in each of the plans of the surfaces which form the angle α . In FIGs. 8-10, the entry open area **Ae** comprises a first entry portion **Ae1** and a second entry portion **Ae2**; and the exit open area **Ax** comprises a first exit portion **Ax1**, and a second exit portion **Ax2**. It should be carefully noted that in FIGs. 8-10, the first entry portion **Ae1** is not parallel to the second entry portion **Ae2**, and the first exit portion **Ax1** is not parallel to the second exit portion **Ax2**. Stated differently, each of the entry open area **Ae** and the exit open area **Ax** lies in two plans (FIG. 9), both of which may not be orthogonal to the flow of the extrudable fluid through the discharge mouth **21**. It should also be noted that the first entry portion **Ae1** need not be parallel to the first exit

portion **Ax1**, and the second entry portion **Ae2** need not be parallel to the second exit portion **Ax2**. In the embodiments principally shown in FIGS. 8-10, the discharge distance **H** may be computed as an average arithmetic of a first distance and a second distance, the first distance being a distance between a center of mass of the first entry portion **Ae1** and a center of mass of the first exit portion **Ax1**, and the second distance being a distance between a center of mass of the second entry portion **Ae2** and a center of mass of the second exit portion **Ax2**. Assuming that a longitudinal axis (not shown) of the discharge mouth **21** divides the angle α equally, a total exit open area **Ax/2** of the single semi-elliptical portion (either **Ax1** or **Ax2**) of the exit orifice **21x** is equal to $Ax = \pi(x4)^2/4\cos[90^\circ-(\alpha/2)^\circ]$, where **x4** is the diameter of the exit orifice **21x**. Analogously, a total entry open area **Ae/2** of the discharge mouth **21** may be computed. It should be kept in mind, however, that an angle formed between the surfaces in which the first entry portion **Ae1** and the second entry portion **Ae2** are formed may be different from the angle α .

Regardless of its specific embodiment, the discharge mouth **21** of the extruder die **10** of the present invention possesses certain characteristics. According to the present invention, the exit open area **Ax** of the discharge mouth **21** is greater than the entry open area **Ae** thereof. This ensures that at least some of relatively large contaminants **30a** (FIG. 4A) contained in the extrudable fluid and having at least one dimension which is greater than at least one dimension **e2** of the entry open area **21e** will be precluded from entering the discharge mouth. At the same time, at least some of relatively small contaminants **30b** (FIG. 4A) contained in the extrudable fluid and having at least one dimension which is less than at least one dimension **e2** of the entry open area **21e** will pass through the discharge mouth **21** without being obstructed therein. In other words, if a particular contaminant is small enough to enter the discharge mouth **21** through the entry open

area **21e** thereof, it will certainly pass through the exit open area **21x** which is greater than the entry open area **21e**. Thus, plugging of the discharge mouth **21** is substantially avoided. Preferably, a ratio A_x/A_e is between 1 and 10, more preferably the ratio A_e/A_x is between about 1.2 and 5, and most preferably the ratio A_e/A_x is between 1.5 and 2.

Preferably, the passage cross-section of the discharge mouth **21** -- and consequently the open area **A** -- continuously and gradually increases from the entry open area **Ae** to the exit open area **Ax**. As used herein, by "continuous and gradual" increase of the open area **A** it is meant that any increase in a distance from the entry open area **Ae** to the exit open area **Ax** corresponds to an increase in the cross-sectional area **A** of the discharge mouth **21**. In a given discharge mouth **21**, the passage cross-section has a variable open area **A** that is minimal when the open area **A** comprises the entry open area **Ae**, and maximal when the open area **A** comprises the exit open area **Ax**. Preferably, a ratio A_x/H is from about 0.005 to about 10, more preferably, the ratio A_x/H is from about 0.10 to about 5, and most preferably, the ratio A_x/H is from about 0.10 to about 1.5

FIGs. **3-10** show several embodiments of the discharge mouth **21**, according to the present invention. Preferably, the discharge mouth **21** is divergently flared in at least one cross-section, as shown in FIGs. **3** and **4B**, viewed in combination. In the cross-section shown in FIG. **3**, a dimension **e1** of the entry orifice **21e** is less than a dimension **x1** of the exit orifice **21x**, while in the cross-section shown in FIG. **4B** (which is orthogonal to the cross-section of FIG. **3**), a dimension **e3** is equal to a dimension **x3**. More preferably, the discharge mouth **21** flared in at least two mutually perpendicular cross-sections, as shown in FIGs. **3** and **4A**, viewed in combination. In FIG. **4A**, a dimension **e2** of the entry orifice **21e** is less than a dimension **x2** of the exit orifice **21x**. Most preferably, the discharge mouth **21** is flared in each of its cross-sections, as best shown in FIGs. **5**

and 7. While an embodiment is possible in which the discharge mouth **21** is flared discretely, or discontinuously, as shown in FIG. **3A**, it is highly preferable that the discharge mouth **21** is gradually flared, as best shown in FIGs. **3** and **4A**. As used herein, the requirement that the discharge mouth **21** is “gradually flared” refers to an uninterrupted continuity of an increase in the cross-sectional open area **A** of the discharge mouth **21** from the entry open area **A_e** to the exit open area **A_x**, wherein any increment in a distance from the entry open area **A_e** to the exit open area **A_x** corresponds to an increment in the cross-sectional area **A** of the discharge mouth **21**. It should be understood that while in several embodiments walls **22** of the discharge mouth **21** are shown as straight lines (FIGs. **3** and **4A**), embodiments are possible in which the walls **22** comprise curved lines (not shown).

Depending on requirements of a particular extrusion process, the discharge mouth **21** may comprise a variety of shapes and configurations. FIGs. **5** and **7**, for example, show a plurality of the discharge mouths **21** distributed along the lip **20** of the die **10**. In FIG. **5**, the discharge mouth **21** comprises a circular aperture having a diameter **e₂** of the entry orifice and a diameter **x₂** of the exit orifice. FIG. **6** shows the discharge mouth **21** comprising an elongate slot extending throughout a width of the die **10**, while FIG. **7** shows a plurality of the discharge mouths **21**, each comprising an elongate slot. Other variations and permutations of shapes of the discharge mouth **21**, including rectangular and irregular configurations (not shown) of the open areas, are included in the scope of the present invention.

One skilled in the art will know how to compute the entry open area **A_e** and the exit open area **A_x**, depending on their respective shapes. At least one method of computing an open area which has a non-circular (or irregular) shape involves an equivalent diameter. The term “equivalent

diameter" is used herein to define the cross-sectional open area having a non-circular shape, in relation to the equal cross-sectional area having a circular geometrical shape. An open area of any geometrical shape can be described according to the formula: $A=1/4\pi D^2$, where "A" is the open area of any geometrical shape, $\pi = 3.14159$, and "D" is the equivalent diameter. For example, an open area **A** having a rectangular shape can be expressed as a circle of an equivalent open area "a" having a diameter "d." Then, the diameter **d** can be calculated from the formula: $a=1/4\pi d^2$, where **a** is the known open area of the rectangle. In the foregoing example, the diameter **d** is the equivalent diameter **D** of this rectangular. Of course, the equivalent diameter of a circle is the circle's real diameter. Thus, in FIG. 5, the entry open area **Ae** of the discharge mouth **21** equals $Ae = 1/4\pi(e2)^2$ where **e2** is a diameter of the entry open area **Ae**; and the exit open area **Ae** of the discharge mouth **21** equals $Ae = 1/4\pi(x2)^2$ where **x2** is a diameter of the exit open area **Ae**.

FIGs. 8-10 show an exemplary embodiment of the die **10** of the present invention having the lip **20** which comprises a "knife edge." The knife-edge lip **20** is characterized by a relatively sharp edge **23** formed by two angled surfaces. During the extrusion process, the edge **23** preferably (but not necessarily) contacts a surface of the web **50**. The preferred knife-edge lip **20** is especially suited for applications wherein the knife-edge **23** can beneficially provide attenuation of the extrudate by causing the substrate **50** to pass in the direction substantially parallel to and in contact with either the surface of the half **10a** or the surface of the half **10b**, or both, when the extrudate is being deposited into the substrate.

FIG. 11 shows one preferred embodiment of the extrusion apparatus **10** having the knife-edge lip **20** contacting the substrate **50** moving in the machine direction **MD**. The die **10** has a plurality of circular mouths **21** consecutively spaced along the lip **20**. Each mouth **21** has the entry open

area **Ae** and the exit open area **Ax**, in accordance with the present invention. In FIG. 11, the extrudable fluid is deposited onto the substrate **50** at an acute angle, relative to the surface of the substrate **50**. Stated differently, the die **10** and the substrate **50** are disposed relative to each other such that an angle β is formed between the general direction of the movement of the extrudable fluid through the discharge mouth **21** and the general plan of the substrate **50**. This embodiment of the process, especially coupled with the semi-circular shape of the discharge mouth **21**, is believed to be especially beneficial because it advantageously provides for gradual introduction of the extrudable fluid onto the substrate **50** or another carrier, such as, for example a printing roll. Typically, in a continuous process, a velocity of the substrate **50** is in the range of approximately 1000 – 5000 feet per minute, while a velocity of the extrudate is in the range of approximately 100 – 500 feet per minute. In some instances, this velocity differential may cause longitudinal discontinuity of the extrudate being deposited onto the substrate – due to a sudden acceleration of the extrudate at the moment of contacting the substrate. Without wishing to be bound by theory, applicants believe that the semi-circular shape of the discharge mouth **21** causes the extrudate to gradually (relative to the cross-machine direction **CD**) contact the substrate **50**.

The first step of the process of the present invention comprises providing a carrier **50** having a width. A variety of materials may be used as the carrier **50**. Examples include but are not limited to: paper, fabric, plastic, including film, metal, wood, woven and non-woven materials. The carrier **50** may comprise the web substrate, or alternatively – a printing roll (not shown). Structured papers, as well as non-structured papers, may be used as the carrier **50**. Several examples of the structured papers may be found in the following commonly assigned U. S. patents: 4,529,480 issued

July 16, 1985 to Trokhan; 4,637,859 issued Jan. 20, 1987 to Trokhan; 5,364,504 issued Nov. 15, 1994 to Smurkoski, et al.; 5,529,664 issued June 25, 1996 to Trokhan, et al.; and 5,679,222 issued Oct. 21, 1997 to Rasch, et al. Other examples of the papers that may be used as the substrate **50** are described in the following U. S. patents: 3,301,746 issued Jan. 31, 1967 to Sanford, et al.; 3,974,025 issued August 10, 1976 to Ayers; 4,191,609 issued March 04, 1980 to Trokhan; and 5,366,785 issued Nov. 22, 1994 to Sawdai. One-ply, as well as multi-ply webs may be used as the substrate **50** in the present invention. The first step of the process of the present invention comprises providing a web substrate.

The next step comprises providing an extrusion die **10** according to the present invention and described in a sufficient detail above.

The next step comprises providing a chemical functional additive which is capable of being extruded with the extrusion die **10**. The functional additive is preferably selected from the group consisting of softeners, emulsions, emollients, lotions, topical medicines, soaps, anti-microbial and anti-bacterial agents, moisturizers, coatings, inks and dyes, and binders, the functional additive being extrudable with the extrusion die.

The next step comprises extruding the functional additive with the extrusion die **10**. As has been discussed herein above, during extrusion, at least some of relatively large contaminants contained in the functional additive and having at least one dimension which is greater than at least one dimension of the entry open area are precluded from entering the discharge mouth, while at least some of relatively small contaminants contained in the functional additive and having at least one dimension which is less than at least one dimension of the entry open area pass through the discharge mouth without being obstructed therein, wherein plugging of the discharge mouth is substantially avoided.

The next step comprises contacting the web substrate **50** with the functional additive, thereby depositing the functional additive onto the web substrate.

What is claimed is:

1. An extrusion die for extruding a chemical functional additive for making a disposable paper product, the extrusion die comprising a supply port and a distribution channel in fluid communication with the supply port, the distribution channel terminating with at least one discharge mouth having a passage cross-section therethrough,
the at least one discharge mouth comprising an entry orifice, an exit orifice, and a discharge distance defined therebetween, the entry orifice having an entry open area A_e , and the exit orifice having an exit open area A_x , the exit open area A_x being greater than the entry open area A_e .
2. The extrusion die according to Claim 1, wherein the passage cross-section of the discharge mouth continuously and gradually increases from the entry open area A_e to the exit open area A_x , preferably the discharge mouth being flared in at least one cross-section, and more preferably the discharge mouth being gradually flared in at least two mutually perpendicular cross-sections.
3. The extrusion die according to Claim 2, wherein a ratio A_x/A_e is between about 1.1 and about 10, preferably between 1.2 and 5, and more preferably between 1.5 and 2.
4. The extrusion die according to Claim 2, wherein the discharge mouth comprises a substantially circular aperture.
5. The extrusion die according to Claim 4, wherein the discharge distance of the discharge mouth is from about 0.005 to about 0.250

inches, preferably from about 0.0075 to about 0.100 inches, and more preferably from about 0.010 to about 0.050 inches.

6. The extrusion die according to Claim 2, wherein a ratio A_x/H is from about 0.005 to about 10, preferably from about 0.010 to about 5, and more preferably from about 0.1 to about 1.5.
7. The extrusion die according to Claim 1, further comprising a knife-edge lip associated with the at least one discharge mouth.
8. A process for extruding a chemical functional additive used in making a disposable paper product, the process comprising steps of:
 - (a) providing a chemical functional additive;
 - (b) providing an extrusion die comprising a supply port and a distribution channel in fluid communication with the supply port, the distribution channel terminating with at least one discharge mouth comprising an entry orifice, an exit orifice, and a discharge distance defined therebetween, the entry orifice having an entry open area, and the exit orifice having an exit open area, the exit open area being greater than the entry open area;
 - (c) extruding the functional additive through the discharge mouth of the extrusion die, whereby at least some of relatively large contaminants contained in the functional additive and having at least one dimension which is greater than at least one dimension of the entry open area are precluded from entering the discharge mouth, while at least some of relatively small contaminants contained in the functional additive and having at least one dimension which is less than at least one dimension

of the entry open area pass through the discharge mouth without being obstructed therein, wherein plugging of the discharge mouth is substantially avoided.

9. The process according to Claim 1, further comprising a step of periodically applying back-pressure to the functional additive contained in the distribution channel of the extrusion die, thereby displacing the relatively large contaminants which are located at the proximity of the entry orifice of the discharge mouth.
10. A process for depositing a chemical functional additive onto a web substrate, the process comprising steps of:
 - (a) providing a web substrate, preferably moving in a machine direction;
 - (b) providing an extrusion die comprising a supply port and a distribution channel in fluid communication with the supply port, the distribution channel terminating with at least one discharge mouth comprising an entry orifice, an exit orifice, and a discharge distance defined therebetween, the entry orifice having an entry open area, and the exit orifice having an exit open area, the exit open area being greater than the entry open area;
 - (c) providing a chemical functional additive selected from the group consisting of softeners, emulsions, emollients, lotions, topical medicines, soaps, anti-microbial and anti-bacterial agents, moisturizers, coatings, inks and dyes, and binders, the functional additive being extrudable with the extrusion die;
 - (d) extruding the functional additive with the extrusion die through the at least one discharge mouth of the extrusion die, whereby

at least some of relatively large contaminants contained in the functional additive and having at least one dimension which is greater than at least one dimension of the entry open area are precluded from entering the discharge mouth, while at least some of relatively small contaminants contained in the functional additive and having at least one dimension which is less than at least one dimension of the entry open area pass through the discharge mouth without being obstructed therein, wherein plugging of the discharge mouth is substantially avoided;

- (e) contacting the web substrate with the functional additive, thereby depositing the functional additive onto the web substrate.

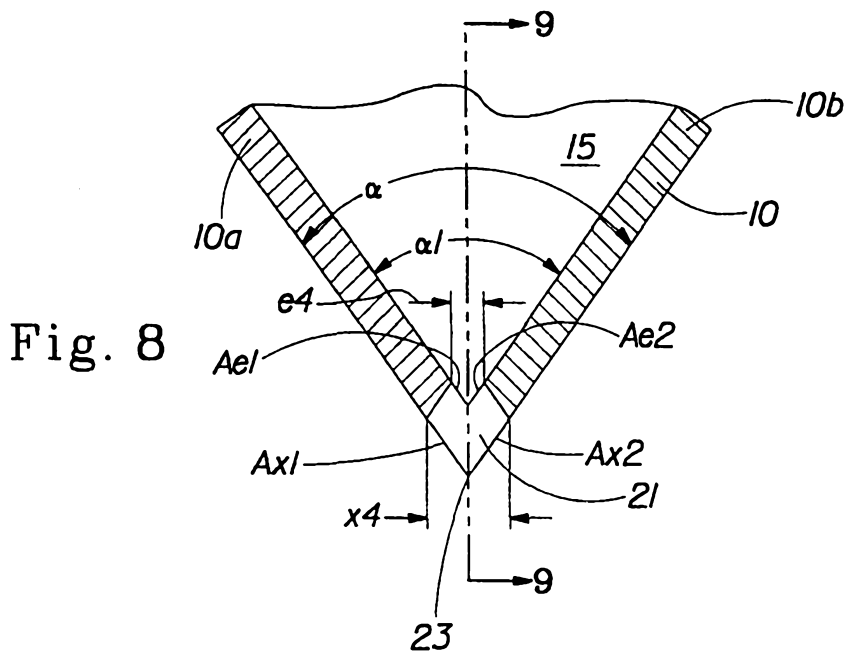

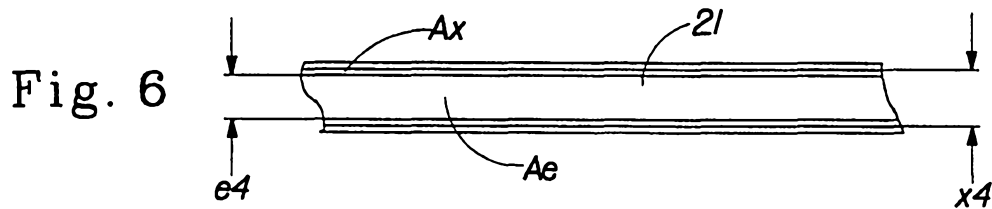
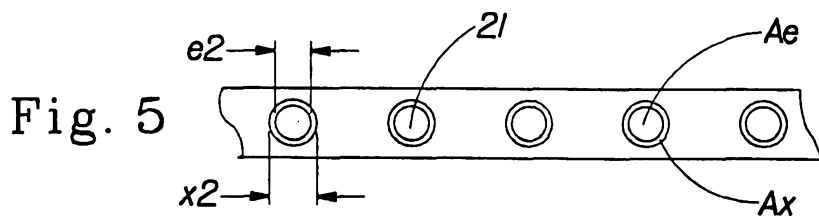
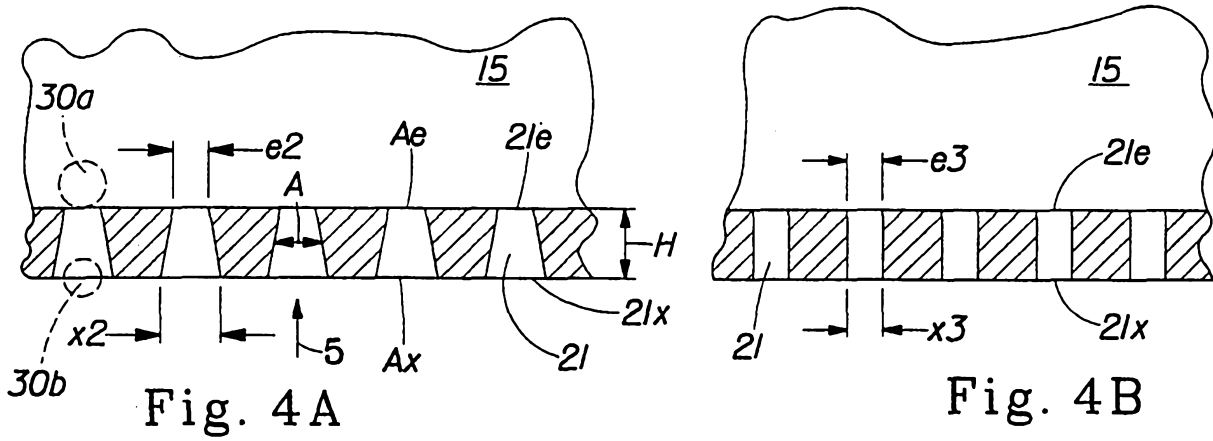


Fig. 9

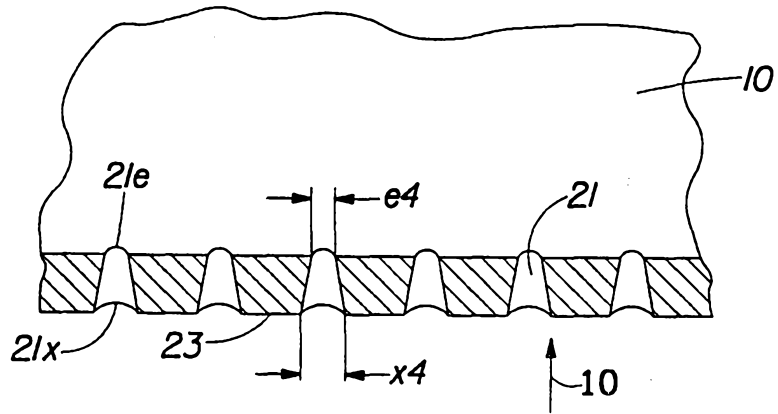


Fig. 10

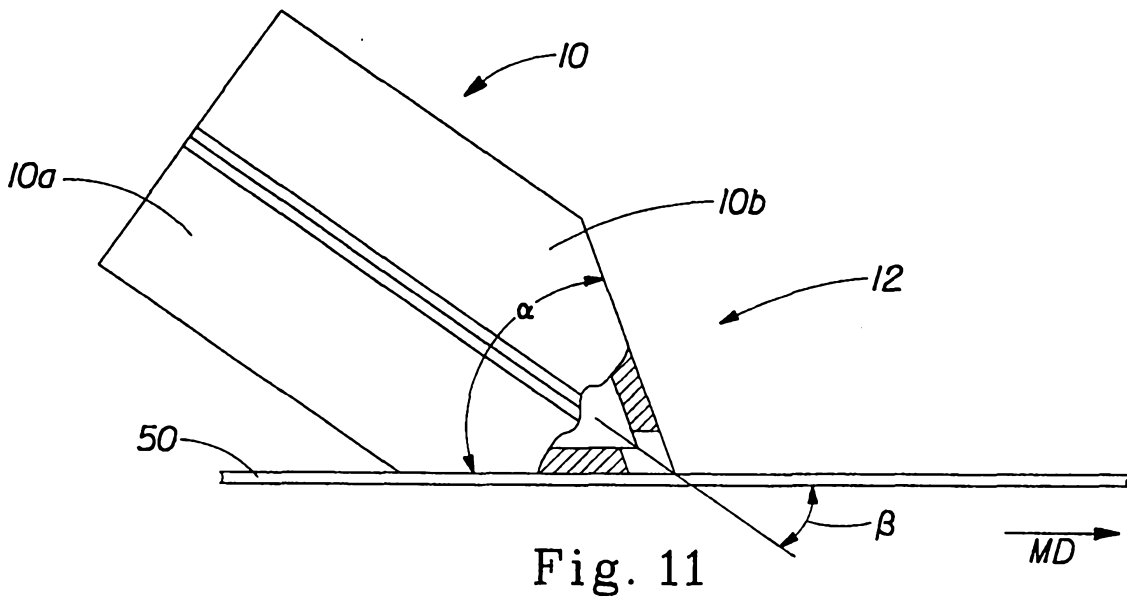
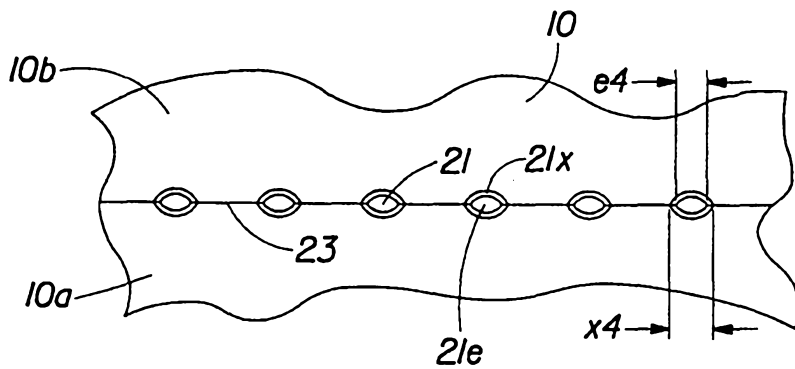


Fig. 11