



(86) Date de dépôt PCT/PCT Filing Date: 1999/05/12
(87) Date publication PCT/PCT Publication Date: 1999/11/18
(45) Date de délivrance/Issue Date: 2004/05/11
(85) Entrée phase nationale/National Entry: 2000/11/10
(86) N° demande PCT/PCT Application No.: FI 1999/000408
(87) N° publication PCT/PCT Publication No.: 1999/058803
(30) Priorité/Priority: 1998/05/14 (981081) FI

(51) Cl.Int.⁶/Int.Cl.⁶ E06B 5/16, B66B 13/30


(72) Inventeur/Inventor:
KETONEN, ARI, FI

(73) Propriétaire/Owner:
KONE CORPORATION, FI

(74) Agent: ROBIC

(54) Titre : IGNIFUGATION D'UNE PORTE PALIERE D'ASCENSEUR

(54) Title: FIREPROOFING FOR AN ELEVATOR LANDING DOOR

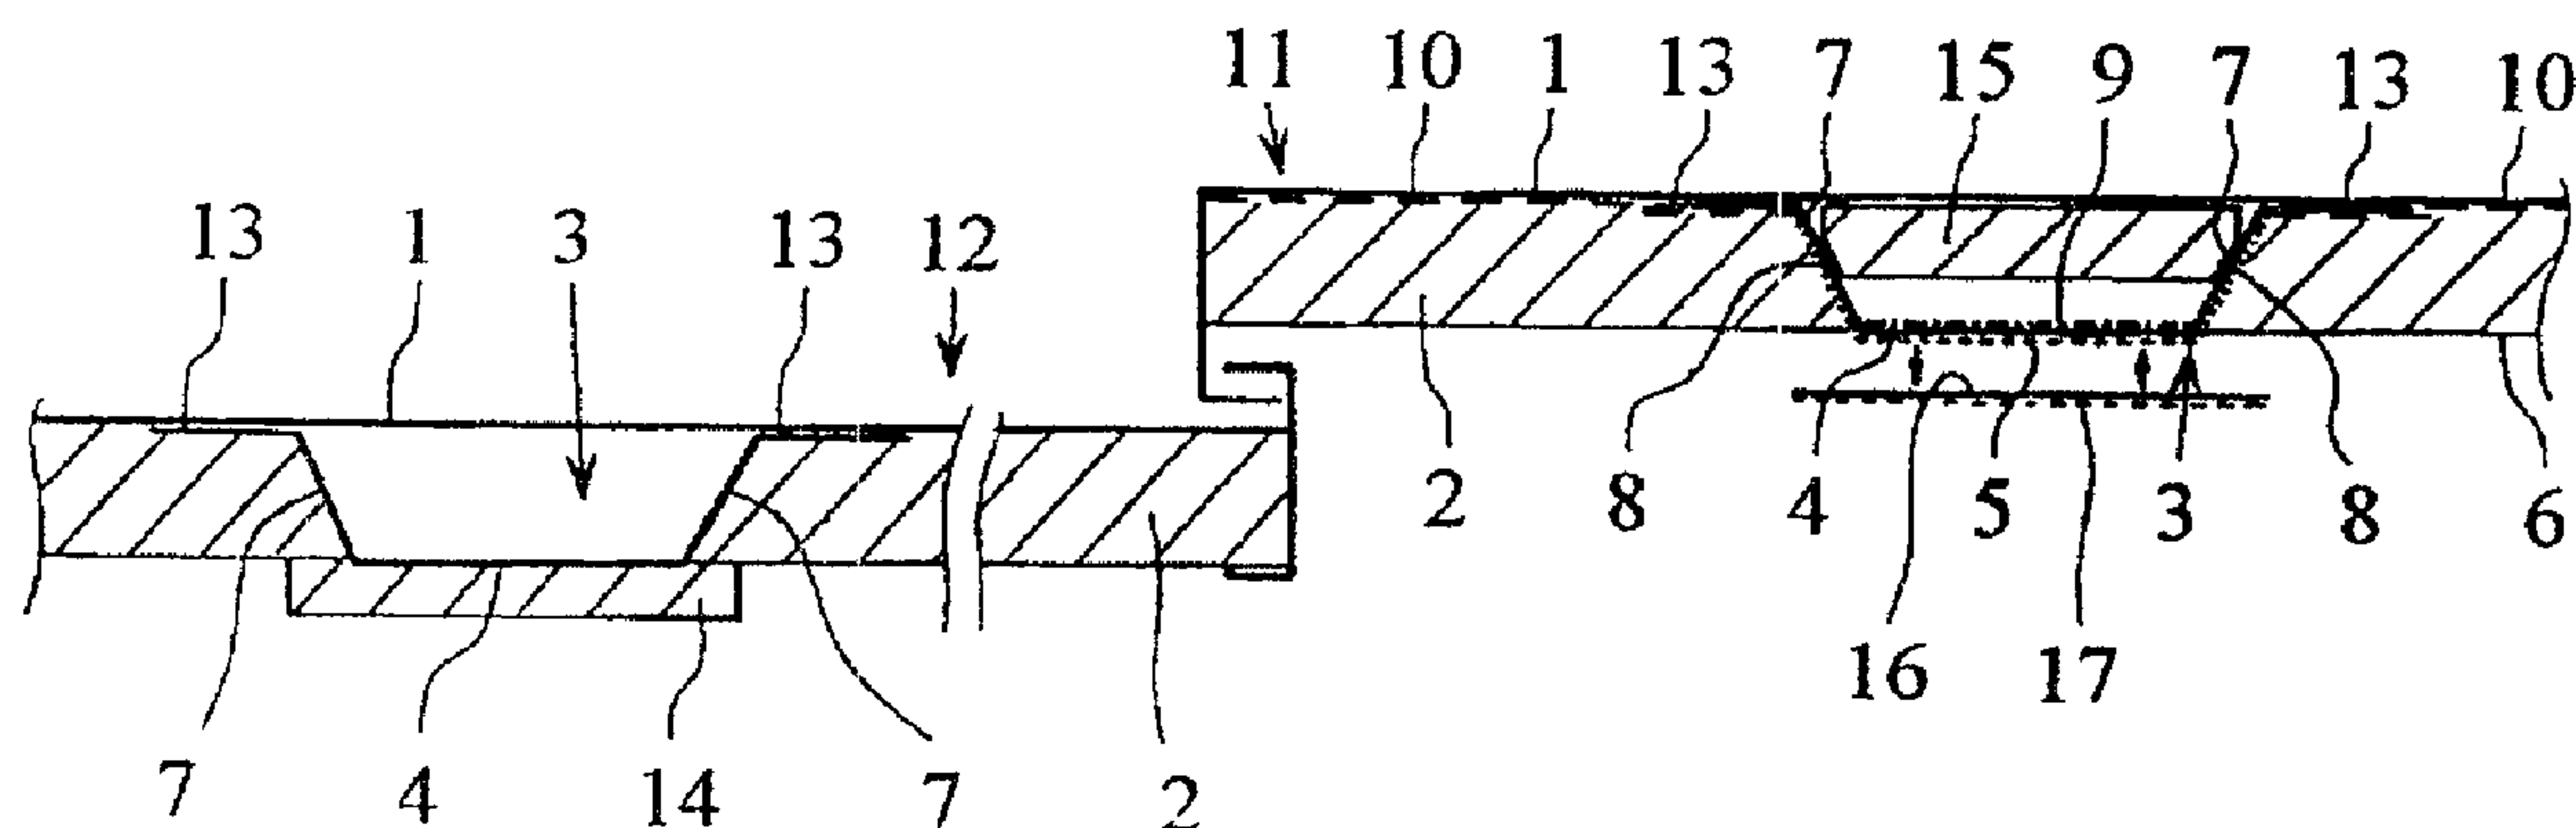

(57) Abrégé/Abstract:


Fireproofing arrangement for an elevator landing door, said landing door comprising a skin plate (1) facing toward the landing and a steel section reinforcement (3) laid in the vertical direction of the door and attached to the skin plate. The surface of the steel section reinforcement (3) on the side facing toward the shaft is provided with a layer of paint (5) becoming foamy when exposed to heat.



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : E06B 5/16, B66B 13/30	A1	(11) International Publication Number: WO 99/58803 (43) International Publication Date: 18 November 1999 (18.11.99)
(21) International Application Number: PCT/FI99/00408 (22) International Filing Date: 12 May 1999 (12.05.99) (30) Priority Data: 981081 14 May 1998 (14.05.98) FI (71) Applicant (for all designated States except US): KONE CORPORATION [FI/FI]; Kartanontie 1, FIN-00330 Helsinki (FI). (72) Inventor; and (75) Inventor/Applicant (for US only): KETONEN, Ari [FI/FI]; Perttulankatu 32, FIN-05900 Hyvinkää (FI). (74) Agent: KONE CORPORATION; Patent Dept., P.O. Box 677, FIN-05801 Hyvinkää (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

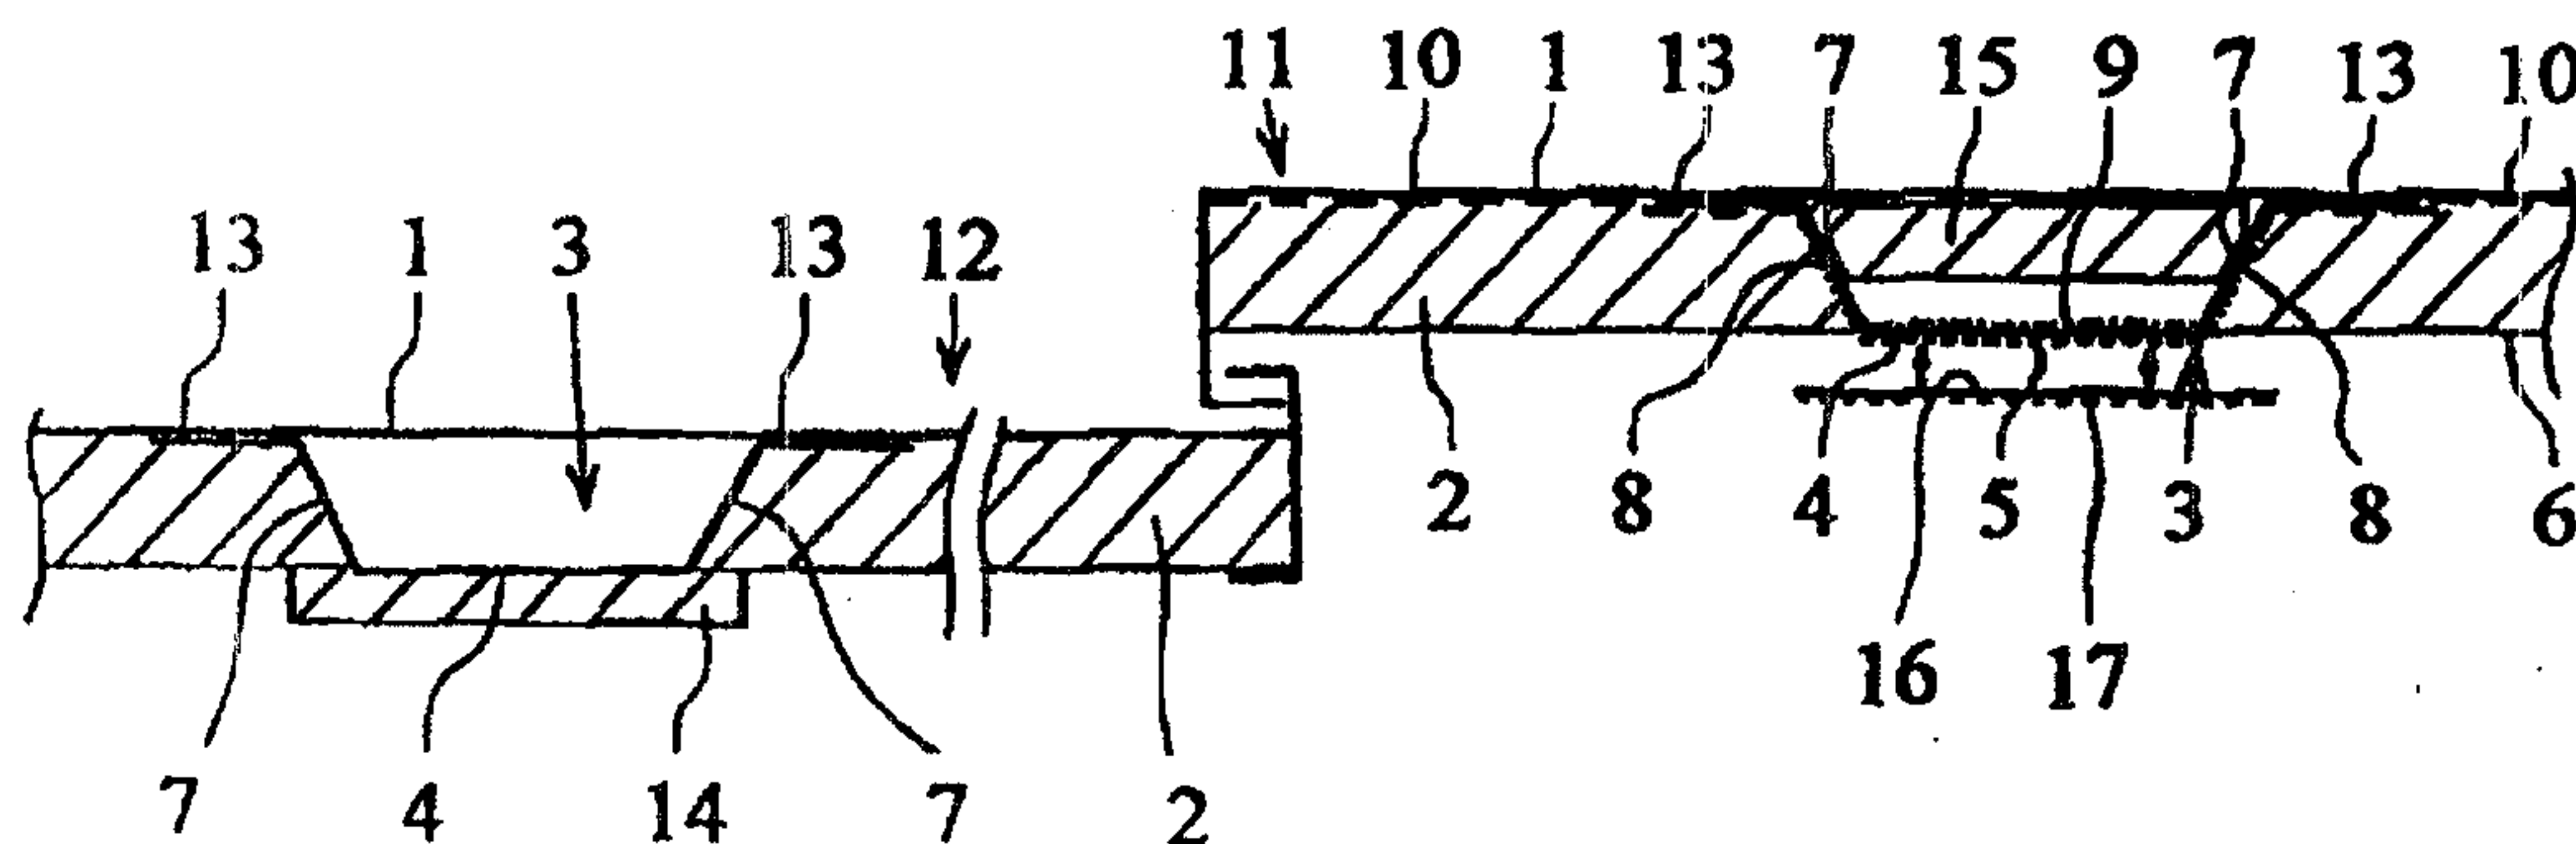(54) Title: FIREPROOFING FOR AN ELEVATOR LANDING DOOR**(57) Abstract**

Fireproofing arrangement for an elevator landing door, said landing door comprising a skin plate (1) facing toward the landing and a steel section reinforcement (3) laid in the vertical direction of the door and attached to the skin plate. The surface of the steel section reinforcement (3) on the side facing toward the shaft is provided with a layer of paint (5) becoming foamy when exposed to heat.

FIREPROOFING FOR AN ELEVATOR LANDING DOOR

The present invention relates to a fireproofing arrangement for an elevator landing door.

Elevator doors are generally manufactured from non-combustible materials. Although they cannot catch fire, additional thermally insulating and fire retarding materials are generally used in them, in the first place to obstruct the propagation of fire and emergence of flames and to give more time for people to escape.

10

In practice, fire resistance of a door means a partitioning capacity. Partitioning is a central concept in fire technical design of buildings. Partitioning is used to restrict a fire that has already broken out so as to contain it within a certain area for a required length of time to allow time for rescue and firefighting efforts and to avoid unnecessary damage.

20

The door panels of an elevator door are generally provided with a layer of mineral wool on the shaft-side face of the metal plate forming the door surface on the side facing toward the landing, the door panel having a total thickness of e.g. about 20-30 mm. However, the door panel has to be provided with steel section reinforcements to stiffen the door panel. The steel section reinforcement is of a thickness substantially equal to that of the door panel, so it forms an effective heat transfer path through the insulating layer.

30

The faster door panel could be provided with additional insulation on the steel section reinforcement on the shaft-side surface as there is sufficient space for it, whereas no such space is available on the slower door panel as the faster door panel moves in direct contact

with the surface of the insulation on the slower door panel.

To eliminate these problems, the landing-side surface the skin plate of at least the slower door panel is treated with flame-proofing paint, i.e. a substance that, when exposed to heat, expands and forms foamy insulating material. This insulation is intended to prevent the main steel structure of the door from being heated and to stop heat transfer via the heat transfer path formed by the reinforcing steel section.

10

However, this prior-art structure has obvious drawbacks. As the flame-proofing paint is visible on the surface of the skin plate and is therefore exposed to touch and wear, it is unlikely to remain completely intact and retain a uniform thickness through the years, as is required of high-quality fire insulation. In addition, in a fire situation, flames at the landing will come in direct contact with the paint layer, most fireproofing paints being combustible. Thus, in the event of a fire, they quickly lose their efficiency and functionality as a fireproofing or fire retarding structure.

20

The object of the present invention is to eliminate the above-mentioned drawbacks. A specific object of the present invention is to disclose a new type of fireproofing arrangement for an elevator landing door that is reliable and endures for years.

According to the present invention, there is provided a fireproofing arrangement for an elevator landing door, said landing door comprising

30

- a skin plate (1) facing toward the landing and
- a steel section reinforcement (3) laid in the vertical direction of the door and attached to the skin plate,

characterised in that the surface of the steel section reinforcement (3) on the side facing toward a shaft is provided with a layer of paint (5) becoming foamy when exposed to heat.

Preferably, in the fireproofing arrangement for an elevator landing door according to the present invention, the landing door comprises a skin plate facing toward the landing and a steel section reinforcement laid in the
10 vertical direction of the door and attached to the skin plate.

Preferably, according to the invention, the shaft-side surface of the reinforcing steel section is provided with a layer of fireproofing paint, i.e. paint that becomes foamy when heated. Thus, the invention is based on the new basic idea that the door is only designed to stop the propagation of heat beyond the door, without regard to the steel structure of the door itself becoming heated. Thus, the fireproofing paint can be applied to the shaft-side surface
20 of the door so that it remains out of sight and is not exposed to touch and wear but is preserved unchanged.

Preferably, the foaming fireproofing paint can be applied directly to the shaft-side surface of the reinforcing steel section. Another possibility is to attach a separate plate to the shaft-side surface of the reinforcing steel section e.g. by means of screws and then treat the surface of this plate with foaming paint.

Preferably, the door is provided with thermal insulation placed on the shaft-side surface of the skin plate. In this

case, the reinforcing steel section preferably extends through the thickness of the thermal insulation.

Preferably, the reinforcing steel section may comprise a shaft-side surface which is substantially parallel to the skin plate and to which the fireproofing paint is applied. This surface may be substantially flush with the shaft-side surface of the rest of the thermal insulation of the door.

10 Preferably, in an embodiment of the invention, the steel section reinforcement consists of a box in which the reinforcing plate formed by the shaft-side surface is connected to the skin plate of the door e.g. by oblique side plates so that the cross-section of the reinforcement is a trapezoid tapering toward the shaft. In this case, fireproofing paint can also be applied to the side plate surfaces facing obliquely toward the shaft. It is also possible to use fireproofing paint on the other surfaces of the steel section reinforcement as well, i.e. on the surfaces facing e.g. squarely or obliquely toward the skin plate.

20 Preferably, in an embodiment of the invention, fireproofing paint is applied to the entire shaft-side surface of the skin plate, whereupon thermal insulation can be mounted on it or it may be left without insulation.

As compared with prior art, the fireproofing arrangement of the present invention has significant advantages. The fireproofing can be so placed on the landing door that it remains out of sight and is therefore not susceptible to wear. Thus, the fireproofing is preserved intact and in good working order for a long time. Furthermore, in


4a

fire situations, the fireproofing paint will not come into direct contact with flames but only into thermal contact via steel structures, so it will be preserved unburned and function as insulation for a considerably longer period than the fireproofing paints used in current solutions.

10 In the following, the invention will be described in detail by referring to the attached drawing, which presents a cross-section of a fireproofing arrangement on an elevator landing door according to the invention.

In the embodiment in Fig. 1, the slow door panel 11 and the fast door panel 12 have an identical basic structure. They comprise a skin plate 1 generally made of steel, placed on the side of the door facing toward the landing. Attached by its flanges 13 to the shaft-side surface of the skin plate 1 is a steel section reinforcement 3, which consists of a reinforcing plate 4 parallel to the skin plate 1 and oblique side plates 7.

20 Both door panels are provided with thermal insulation 2

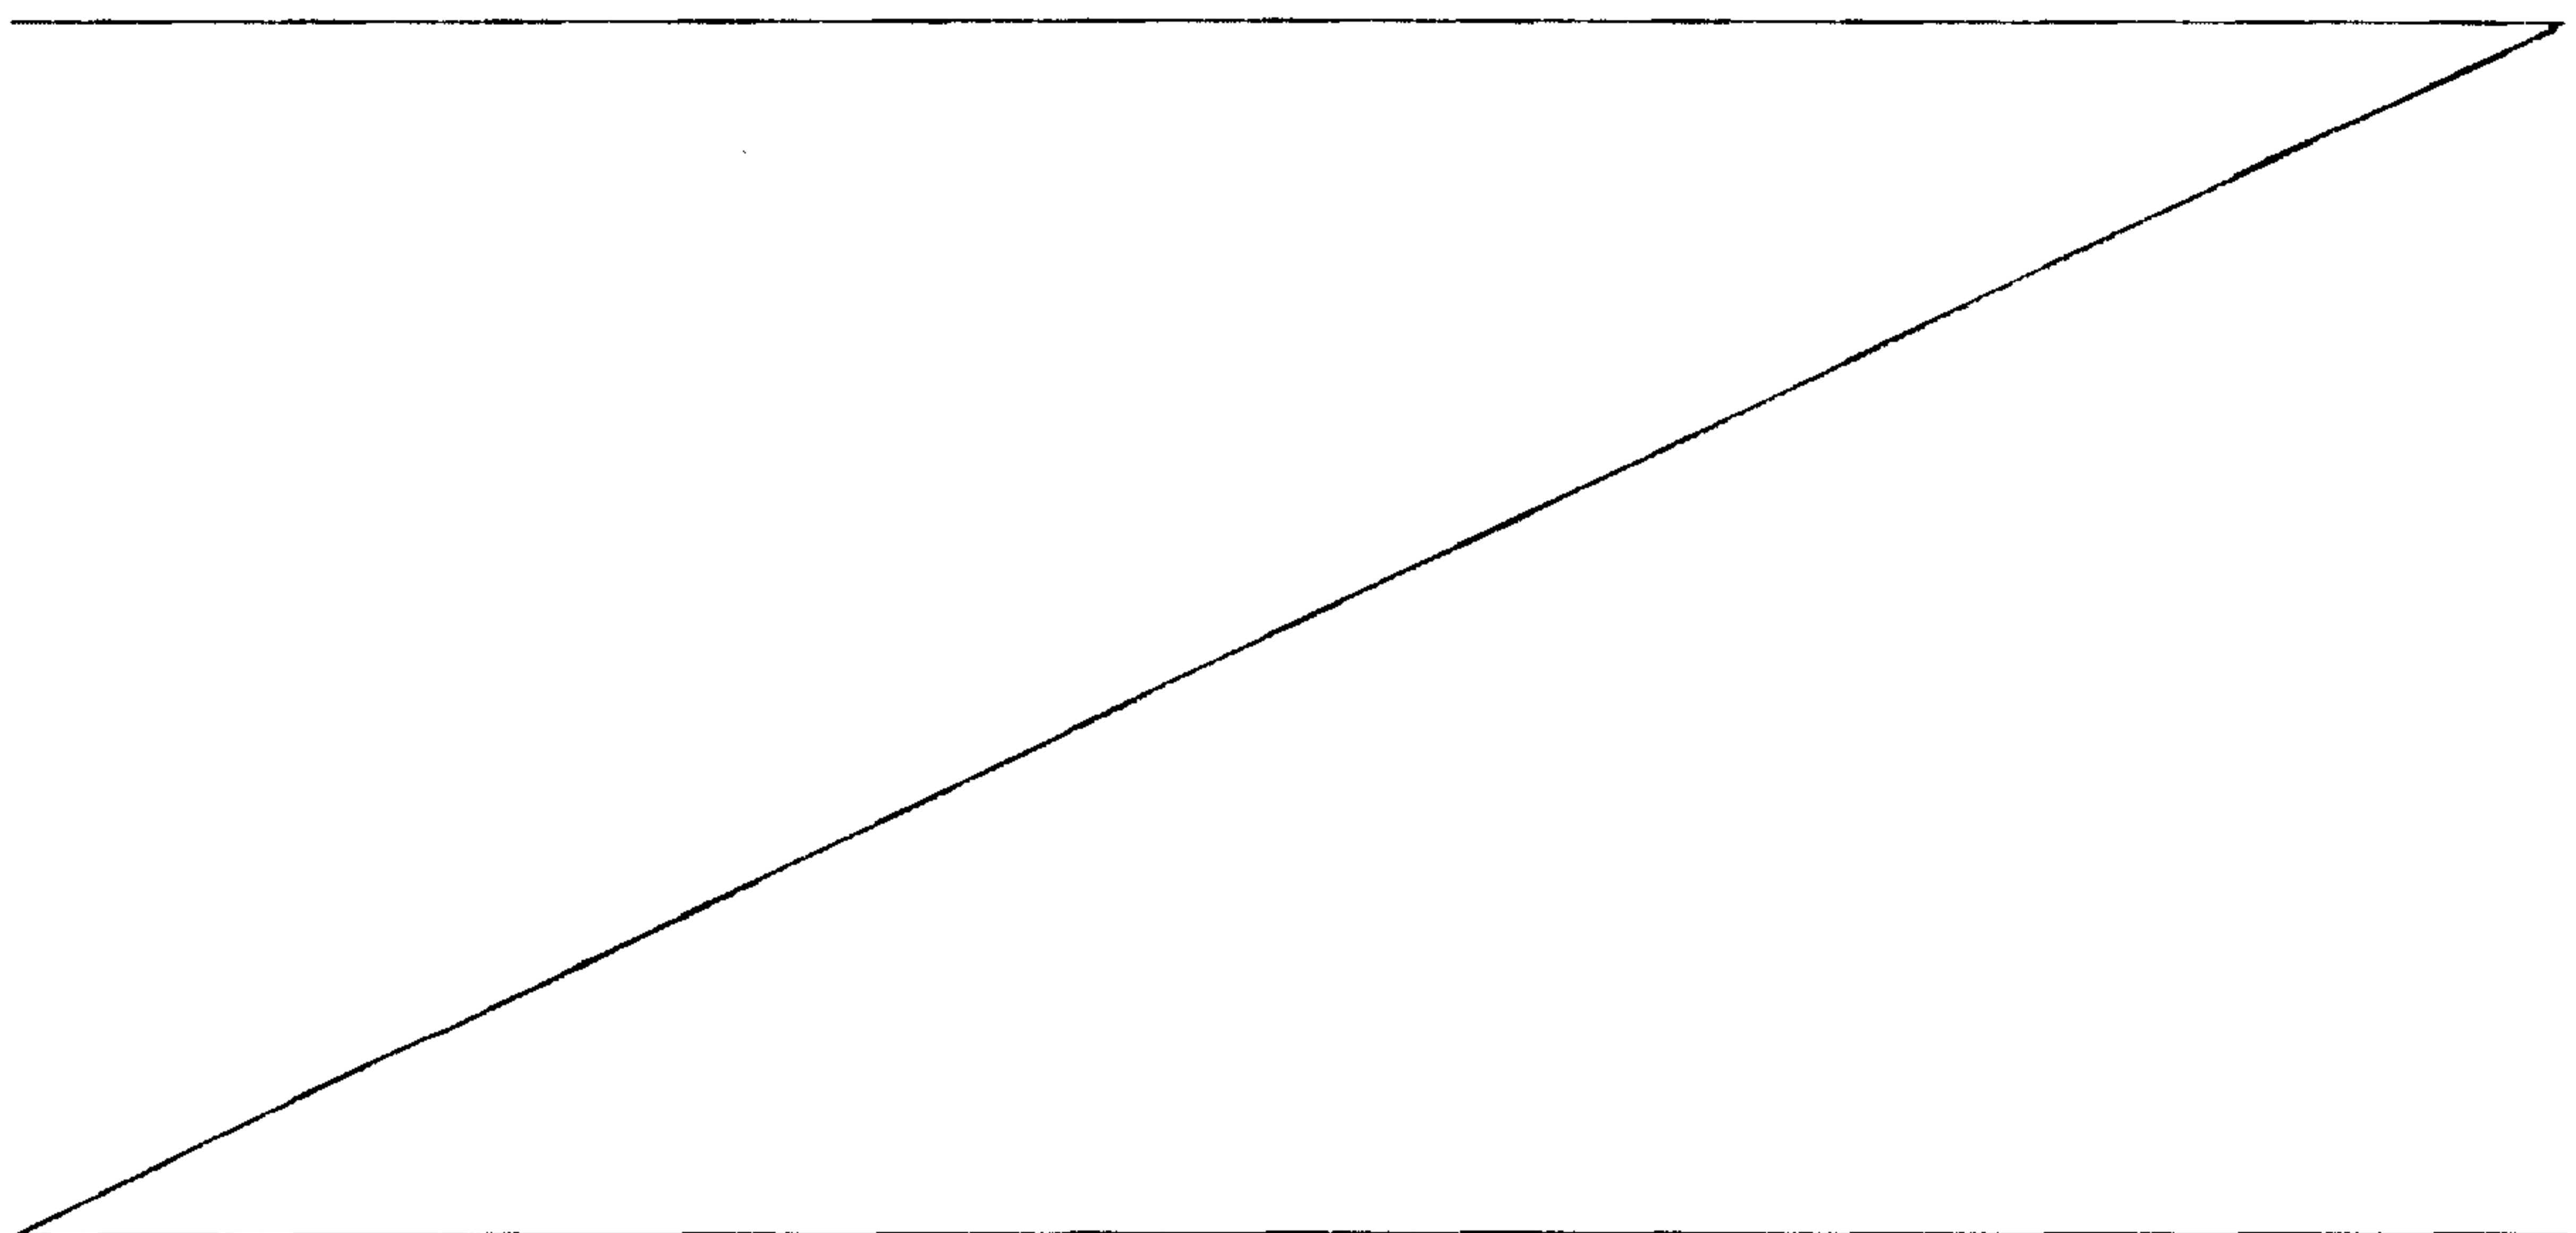

placed on the side of the skin plate 1 facing toward the shaft, the thickness of the insulating layer being substantially the same as the thickness of the steel section reinforcement 3. The faster door panel 12 is provided with additional insulating material 14 in the area of the steel section reinforcement 3. The additional insulation prevents thermal leakage through the steel section reinforcement from the landing to the shaft.

In the slower door panel 11, additional insulation 15 can be used inside the steel section reinforcement 3 to reduce thermal leakage through the reinforcement. However, it does not significantly prevent thermal leakage through the slower door panel. The slower door panel 11 cannot be provided with the type of insulation 14 used on the faster door panel 12 because the door panels travel at an almost zero distance from each other, leaving no space for such insulation.

To avoid thermal leakage through the steel section reinforcement 3 from the landing into the shaft, the shaft-side outer surface of the reinforcing plate 4 is coated with fireproofing paint 5, i.e. with a layer of paint that becomes foamy when exposed to heat. It is also possible to extend the layer of fireproofing paint so as to form paint layers 8 covering the shaft-side oblique surfaces of the side plates 7 of the steel section reinforcement 3.

If the insulating effect of the fireproofing paint is to be further enhanced, then a layer of paint 9 becoming foamy when exposed to heat can also be applied to the landing-side surface of the reinforcing plate 4, and similarly the landing-side surfaces of the skin plate 1 and of the reinforcement 3 flanges 13 attached to it can be provided with a layer of paint 10 becoming foamy when exposed to heat.

As an alternative structure, Fig. 1 shows a plate 16 provided with a layer of paint 17 becoming foamy when exposed to heat, which plate can be attached e.g. with screws to the shaft-side surface of the steel section reinforcement 3 instead of applying a layer such paint
5 directly to that surface.

Of course, the fast door panel 12 may also be provided with a layer of foaming paint according to the present invention, especially when no heat insulation is used in
10 either one of the door panels.

The fireproofing paints, i.e. the layers of paint becoming foamy when exposed to heat, used in the invention may consist of various known products applicable for this use, which will not be described in detail in this
15 application.

The invention has been described above by way of example by referring to the attached drawing, but different embodiments of the invention are possible within the scope of the inventive idea defined in the claims.

CLAIMS

1. Fireproofing arrangement for an elevator landing door, said landing door comprising

- a skin plate (1) facing toward the landing and

5 - a steel section reinforcement (3) laid in the vertical direction of the door and attached to the skin plate,

characterised in that the surface of the steel section reinforcement (3) on the side facing toward a shaft is provided with a layer of paint (5) becoming
10 foamy when exposed to heat.

2. Fireproofing arrangement as defined in claim 1, characterised in that thermal insulation (2) is provided on the side of the skin plate (1) facing toward the shaft while the steel section reinforcement (3) extends substantially through the thickness of the thermal
15 insulation.

3. Fireproofing arrangement as defined in claim 1, characterised in that the layer of paint (5) is on the side of the steel section reinforcement (3) facing
20 toward the shaft.

4. Fireproofing arrangement as defined in claim 1, characterised in that the layer of paint is on a plate (16) attached to or supported by the surface of the steel section reinforcement (3) on the side facing
25 toward the shaft.

5. Fireproofing arrangement as defined in any one of claims 1 - 4, characterised in that the surface (4) of the steel section reinforcement (3) facing toward the shaft is substantially parallel to the skin plate
30 (1).

6. Fireproofing arrangement as defined in any one of claims 2 - 5, characterised in that the surface (4) of the steel section reinforcement (3) facing toward the shaft is substantially flush with the surface (6) of the thermal insulation (2) facing toward the shaft.


7. Fireproofing arrangement as defined in any one of claims 1 - 6, characterised in that the steel section reinforcement (3) consists of a box in which the reinforcing plate (4) formed by the shaft-side surface is connected to the skin plate (1) by oblique side plates (7).

8. Fireproofing arrangement as defined in claim 7, characterised in that a layer of paint (8) becoming foamy when exposed to heat is provided on the surfaces of the side plates (7) obliquely facing toward the shaft.

9. Fireproofing arrangement as defined in claim 7, characterised in that a layer of paint (9) becoming foamy when exposed to heat is provided on the surface of the reinforcing plate (4) facing toward the skin plate (1).

10. Fireproofing arrangement as defined in any one of claims 1 - 9, characterised in that a layer of paint (10) becoming foamy when exposed to heat is provided on the surface of the skin plate (1) facing toward the shaft.

1/1

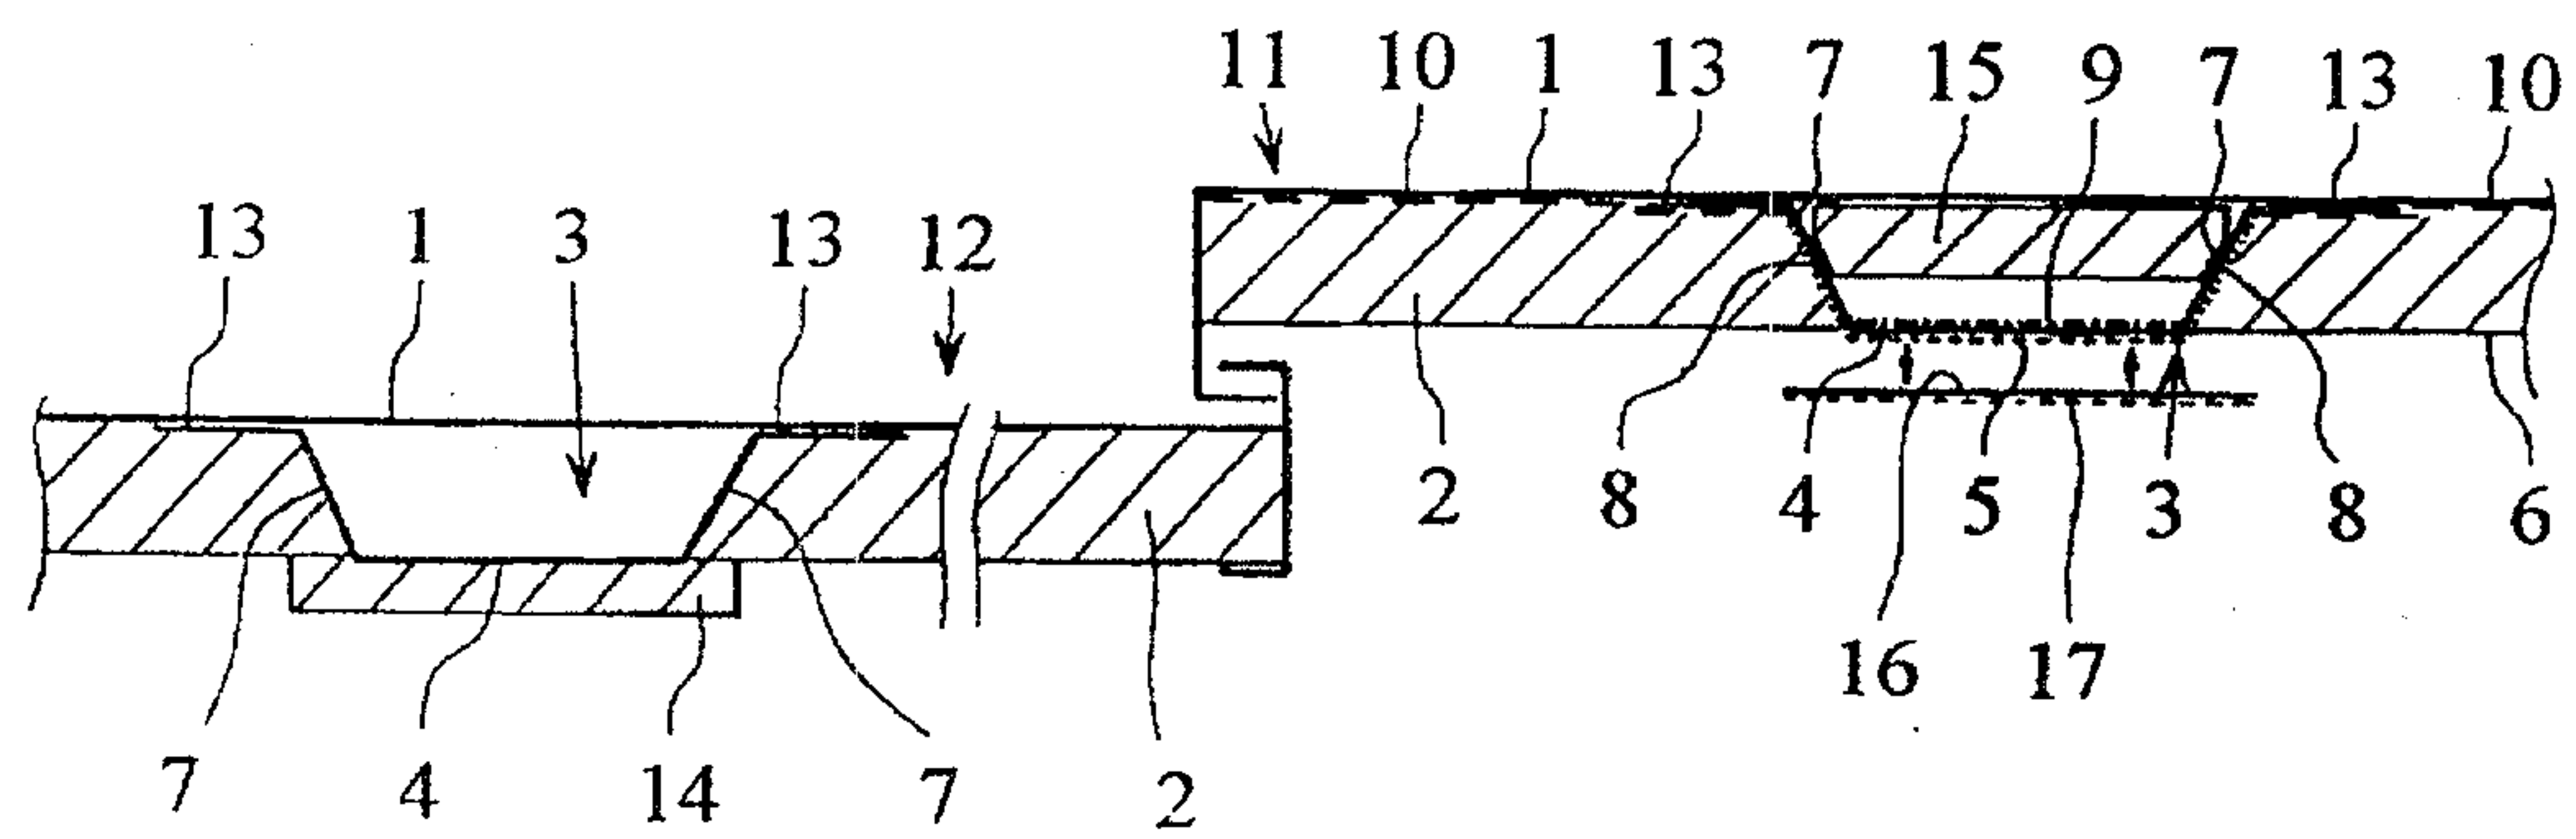**Fig.1**

