



(51) International Patent Classification:

B64C 11/04 (2006.01) *B64C 27/50* (2006.01)
B64C 11/28 (2006.01) *B64C 27/473* (2006.01)
B64C 27/46 (2006.01)

(21) International Application Number:

PCT/US2016/033902

(22) International Filing Date:

24 May 2016 (24.05.2016)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

14/727,045 1 June 2015 (01.06.2015) US

(71) Applicant: **NORTHROP GRUMMAN SYSTEMS CORPORATION** [US/US]; 2980 Fairview Park Drive, Falls Church, VA 22042-4511 (US).

(72) Inventors: **WAINFAN, Barnaby, S.**; 264 Quincy Avenue, Long Beach, CA 90803 (US). **JOHNSON, Stephen, D.**; 10 Windcrest, Laguna Niguel, CA 92677 (US).

(74) Agent: **PATTI, Carmen, B.**; Patti And Malvone Law Group, LLC, One North Lasalle Street, 44th Floor, Chicago, IL 60602 (US).



(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: DEPLOYABLE PROPELLER

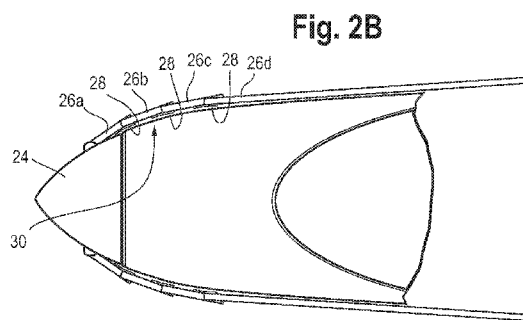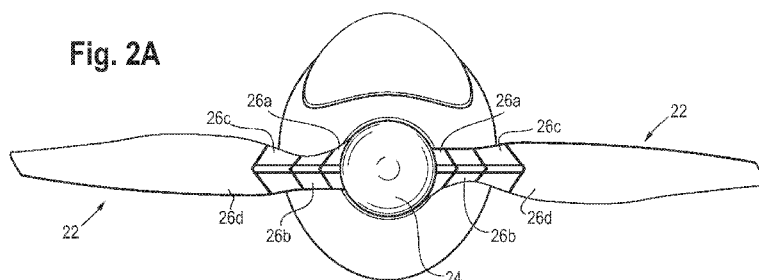

(57) Abstract: A propeller (10, 20) which can be folded and stowed in compact form and then deployed for powered flight is disclosed. The deployable propeller has two or more blades (22), and each blade is composed of multiple segments (26a-26d) which are disengaged when stowed and then interlock when deployed to form an efficient blade. The segmented deployable propeller retains all effective area to the spinner radius.

DEPLOYABLE PROPELLER

BACKGROUND

[0001] The invention relates generally to propellers for UAVs (unmanned aerial vehicles) and more particularly to collapsible propellers.

[0002] Collapsible, or folding, propellers are known in the prior art. Most commonly, prior art folding propellers use a single mechanical hinge close to the yoke of the propeller to deploy each blade. As shown in FIGS. 1A and 1B, a prior art folding propeller 10 includes one or more blades 12, each attached to a central yoke 16 by means of a hinge 14. Central yoke 16 is attached to shaft (not shown) which connects to a motor for causing rotation of propeller 10. FIG. 1A shows propeller 10 in a folded configuration, while FIG. 1B shows propeller 10 in an opened configuration.

[0003] Single hinge 14 in each blade 12 does not allow blade 12 to completely conform to the surface upon which it is stowed. Depending on the application, the stowed surface may have a variety of forms, including the nose of an aircraft, for example. Because of the required twist in the blade, an aerodynamically-designed blade is not flat, and a single hinge does not permit the blade to follow an arbitrary curvature. Additionally, the diameter of the yoke used in prior art folding propellers represents lost propeller disk area, and this can be significant if hinging at larger radii is required.

[0004] Thus, a need exists for more flexibility and better shape conformity in folding propellers. A need further exists for a folding propeller with a smaller central yoke and an improved hinging mechanism.

SUMMARY

[0005] The invention in one implementation encompasses a propeller which can be folded and stowed in compact form and then deployed for powered flight. Each blade is composed of multiple segments which are disengaged when stowed and then interlock when deployed to form an efficient blade. The segmented deployable propeller retains all effective area to the spinner radius.

[0006] One implementation of the invention is a deployable propeller having a central hub, two or more blades, each rotatably connected to said central hub by a hinge where each blade further comprising two or more segments, flexibly connected to each other using a tensile material such that the blade folds out of the plane of rotation for storage.

[0007] In a further embodiment, the deployable propeller includes a telescoping faring covering said hinge, said faring resting in a channel in the central hub when the propeller is stored, said faring further sliding over said hinge to cover a gap between the central hub and the first segment when the propeller is deployed.

[0008] In a further embodiment, the invention encompasses a collapsible propeller blade having two or more segments and a flexible hinge connecting adjacent segments.

[0009] In any of the above embodiments, adjoining edges of each segment have complementary curvatures, such that mating segments of each blade interlock when the propeller is deployed. The tensile material may be a flexible cloth or tape hinge connecting at least each segment. In an alternative, the tensile material may be one or more tensile fibers that extend through the center of each segment. In a further embodiment, the tensile fibers are connected to a spool in the central hub, said spool used to maintain tension on the tensile fiber when the propeller is deployed.

[0010] In any of the above embodiments, a hub facing surface of each segment includes a hook and a tip facing surface of each segment further comprises a slot for receiving the hook from a mating segment as the propeller is deployed, wherein the blade segments are held in place and aligned correctly.

[0011] In any of the above embodiments, adjoining edges of each segment have complementary curvatures, such that mating segments of each blade interlock when the propeller blade is deployed.

[0012] Another implementation of the invention encompasses an aircraft having a fuselage and a deployable propeller as described above.

DESCRIPTION OF THE DRAWINGS

[0013] Features of example implementations of the invention will become apparent from the description, the claims, and the accompanying drawings in which:

[0014] FIG. 1A shows a prior art folding propeller in a folded configuration.

[0015] FIG. 1B shows a prior art folding propeller in a deployed configuration.

[0016] FIG. 2A shows a top view of an embodiment of a deployable propeller according to the present invention.

[0017] FIG. 2B shows a side view of the deployable propeller of FIG. 2A.

[0018] FIG. 3 shows an alternative embodiment of the deployable propeller of FIG. 2A.

[0019] FIGS. 4A and 4B shows a telescoping faring for use with the propeller of FIGS. 2A, 2B and 3.

[0020] FIG. 4C shows a side view of the propeller of FIGS. 4A and 4B.

DETAILED DESCRIPTION

[0021] A deployable propeller is described which features blades having two or more segments, that are interconnected by flexible, high strength tensile fibers. The fibers permit the blades of the propeller to fold and conform to arbitrarily-curved surfaces for stowage. The segments are designed to unfold into the plane of rotation once rotation is begun, and interlock by chevron, curved, or other shaped interfaces which cause each segment to key into its unique position, setting the desired blade segment angle. When the propeller rotates, the segments are held in place by the tensile fibers as will be described in connection with several embodiments below.

[0022] A deployable propeller 20 according to an embodiment of the present invention is shown in FIGS. 2A and 2B. FIG. 2A shows a top view of propeller 20. Although two blades are shown, any number of blades could be used depending on the application. Blades 22 include an outer most section 26d which is attached to central yoke 24 by a plurality of hinged segments 26a, 26b and 26c. As shown in FIG. 2A, the segments have interlocking contours that cause blade 22 to auto-align when deployed. Although a v-shaped contour is depicted, any contour that causes the segments to nest in a unique position could be used.

[0023] FIG. 2B shows a side view of propeller 20 of FIG. 2A. Segments 26a, 26b, 26c and 26d are connected by means of a flexible hinge 28. Hinge 28 can be made from, for example, high-tensile strength fibers, cloth or tape. Hinge 28 is shown as separate hinges between each segment but could also be one single component along the length of the blade. These tensile components are flexible enough to allow the fibers between blade segments to bend while the propeller is not rotating. Although a blade with four segments is shown, any number of segments greater or less than four can be used. Increasing the number of blade segments increases the conformity to the stowing surface, for example the nose of an aircraft as indicated at 30, significantly reducing the

volume required for the stowed blade. This feature also reduces the aerodynamic drag of the propeller if the propeller is collapsed during flight, for example, while gliding.

[0024] In both of FIGS. 2A and 2B, a relatively flat blade is depicted for ease of representation and to effectively illustrate the inventive concepts. Any shape of the blade or degree of twist may be used. Likewise, the hinges between segments may be at an angle on a twisted blade so that when folded, the blade follows a radial line in order to get the best flatness when stowed. In other words, the blade spirals around the nose of the aircraft when folded. The shape and twist of the blade depends on the application of the aircraft and what flexibility is required.

[0025] In a preferred embodiment, the hinge is located on the back, or pressure, side of the propeller. In other words, on the side away from the direction of thrust. In this configuration, the collapsed blades are capable of folding down over a large variety of shapes and structures. The segmented blade of the current invention allows the stowed propeller to conform to a smaller space than current single-hinge designs, and allows the deployed blade to have a more aerodynamically efficient shape than single-hinged blades. Aerodynamic forces or thin strips of spring material can position the blade to a preferred position, overcoming for instance, the blade weight. When employed as a “pusher propeller” the hinge would need to be on the suction side to allow the blade to fold forward, or a hook interlocking segment described below, would be used.

[0026] In an alternative embodiment, the mating surfaces of the blades have hook-shaped, interlocking portions to hold the segments in place and assist in alignment of the blade segments, as shown in FIG. 3. Representative segments 26a and 26b from FIG. 2A, for example, are shown connected by hinge 28. Hook 40 is attached to segment 26b and is inserted into slot 42 in segment 26a as the propeller is deployed.

[0027] Another embodiment of the invention is shown in front view in FIGS. 4A and 4B. In this embodiment, the segments are arranged on one or more tensile fibers 52 near the center of blade segments 26a, 26b, 26c and 26d. Telescoping faring 54 is a sleeve that slides over the hinge (not shown) to cover gap 50 that forms when all the segments are extended during rotation. Prior to deployment, faring 54 would be located as shown in FIG. 4B. Faring 54 is located inside central yoke 24 around propeller base 56. As blade 22 begins to rotate and deploy, centrifugal forces would act on faring 54 to cause it to slide out of channel 46 as shown in FIG. 4A, which depicts so that it nests in notch 48 of segment 26a and covers gap 50. A side view of central yoke 24 is shown in FIG. 4C. In an alternative embodiment, innermost segment 26a is designed to slide into the central yoke 24 a short distance to provide the slack in tensile fibers 40 needed for manipulating the propeller for stowage. This would eliminate the need for a separate sleeve, or faring.

[0028] In yet another alternative configuration, a deployable propeller as shown in FIGS. 4A and 4B, having tensile fibers near the center of the blades, adjusts each fiber length via a spool at the hub that rotates to take up the excess fiber and applies a tension to the fiber. Alternatively, the fiber can be adjusted via rotation. Although the deployable propeller according to the present invention has been shown in a folded configuration, in a further embodiment the blade segments would be rolled into a coiled shape if the airfoil required can be achieved with a cambered, thin material.

[0029] This deployable propeller is suitable for UAVs and aircraft which must deploy a propeller during flight. The inventive deployable propeller concept is useful in aircraft that require a storable propeller that can also be deployed during flight. Further, using flexible material as a hinge combined with a segmented blade allows more compact stowage and a more

efficient blade shape. It is also mechanically simpler than a conventional hinge (does not apply to the hook type).

[0030] If used and unless otherwise stated, the terms "upper," "lower," "front," "back," "over," "under," and similar such terms are not to be construed as limiting the invention to a particular orientation. Instead, these terms are used only on a relative basis.

[0031] An illustrative description of operation of the apparatus 100 is presented, for explanatory purposes.

[0032] In a first scenario, an aircraft is launched with the propeller in a collapsed configuration, for example, from a tube or other storage container. The propeller is deployed after launch and stays under power for the entire mission. When launching the aircraft from a container, it is very beneficial to be able to collapse the aircraft into as small a diameter as possible.

[0033] In a second scenario, an aircraft is launched similarly to the first scenario; the propeller is deployed, folded during flight, and redeployed in one or more cycles as required for the remainder of the mission.

[0034] In a third scenario, the deployable propeller remains collapsed for a gliding operation of the aircraft. Folding the propeller and redeploying is desired when moderate to long glides are possible. These situations include making descents from high altitude with subsequent powered cruise mission segment, or short power off glides for acoustic signature suppression.

[0035] The apparatus 100 in one example comprises any (e.g., horizontal, oblique, or vertical) orientation, with the description and figures herein illustrating one example orientation of the apparatus 100, for explanatory purposes.

[0036] The steps or operations described herein are just for example. There may be many variations to these steps or operations without departing from the spirit of the invention. For

instance, the steps may be performed in a differing order, or steps may be added, deleted, or modified.

[0037] Although example implementations of the invention have been depicted and described in detail herein, it will be apparent to those skilled in the relevant art that various modifications, additions, substitutions, and the like can be made without departing from the spirit of the invention and these are therefore considered to be within the scope of the invention as defined in the following claims.

CLAIMS

What is claimed is:

1. A deployable propeller, comprising:
a central hub;
two or more blades, each rotatably connected to said central hub by a hinge; and
each blade further comprising two or more segments, flexibly connected to each other using a tensile material such that the blade folds out of the plane of rotation for storage.
2. The deployable propeller of claim 1, wherein adjoining edges of each segment have complementary curvatures, such that mating segments of each blade interlock when the propeller is deployed.
3. The deployable propeller of claim 2, wherein the tensile material is a flexible cloth or tape hinge connecting at least each segment.
4. The deployable propeller of claim 2, wherein the tensile material is one or more tensile fibers that extend through the center of each segment.
5. The deployable propeller of claim 4, wherein the tensile fibers are connected to a spool in the central hub, said spool used to maintain tension on the tensile fiber when the propeller is deployed.
6. The deployable propeller of claim 4, wherein each blade further comprises:

a telescoping faring covering said hinge, said faring resting in a channel in the central hub when the propeller is stored, said faring further sliding over said hinge to cover a gap between the central hub and the first segment when the propeller is deployed.

7. The deployable propeller of claim 1, wherein a hub facing surface of each segment further comprises a hook and a tip facing surface of each segment further comprises a slot for receiving the hook from a mating segment as the propeller is deployed, wherein the blade segments are held in place and aligned correctly.

8. The deployable propeller of claim 6, wherein the tensile material is a hinge connecting each segment.

9. The deployable propeller of claim 6, wherein the tensile material is one or more tensile fibers that extend through the center of each segment.

10. A collapsible propeller blade, comprising:
two or more segments;
a flexible hinge connecting adjacent segments.

11. The collapsible propeller blade of claim 10, wherein adjoining edges of each segment have complementary curvatures, such that mating segments of each blade interlock when the propeller blade is deployed.

12. The collapsible propeller blade of claim 12, wherein the tensile material is a flexible cloth or tape hinge connecting at least each segment.

13. The collapsible propeller blade of claim 12, wherein the tensile material is one or more tensile fibers that extend through the center of each segment.

14. The deployable propeller of claim 10, wherein a hub facing surface of each segment further comprises a hook and a tip facing surface of each segment further comprises a slot for receiving the hook from a mating segment as the propeller is deployed, wherein the blade segments are held in place and aligned correctly.

15. An aircraft, comprising:

a fuselage; and

a deployable propeller, said deployable propeller further comprising:

two or more blades, each rotatably connected to said central hub by a hinge;

each blade further comprising two or more segments, flexibly connected to each other using a tensile material such that the blade folds out of the plane of rotation for storage.

16. The aircraft of claim 15, wherein adjoining edges of each segment have complementary curvatures, such that mating segments of each blade interlock when the propeller is deployed.

17. The aircraft of claim 16, wherein the aircraft is an unmanned aerial vehicle.

18. The aircraft of claim 16, wherein the aircraft is launched from a storage container while the propeller is collapsed.

19. The aircraft of claim 16, wherein the tensile material is one or more tensile fibers that extend through the center of each segment and each blade further comprises a telescoping

faring covering said hinge, said faring resting in a channel in the central hub when the propeller is stored, said faring further sliding over said hinge to cover a gap between the central hub and the first segment when the propeller is deployed.

20. The deployable propeller of claim 15, wherein a hub facing surface of each segment further comprises a hook and a tip facing surface of each segment further comprises a slot for receiving the hook from a mating segment as the propeller is deployed, wherein the blade segments are held in place and aligned correctly.

* * * * *

1/4

Fig. 1A
Prior Art

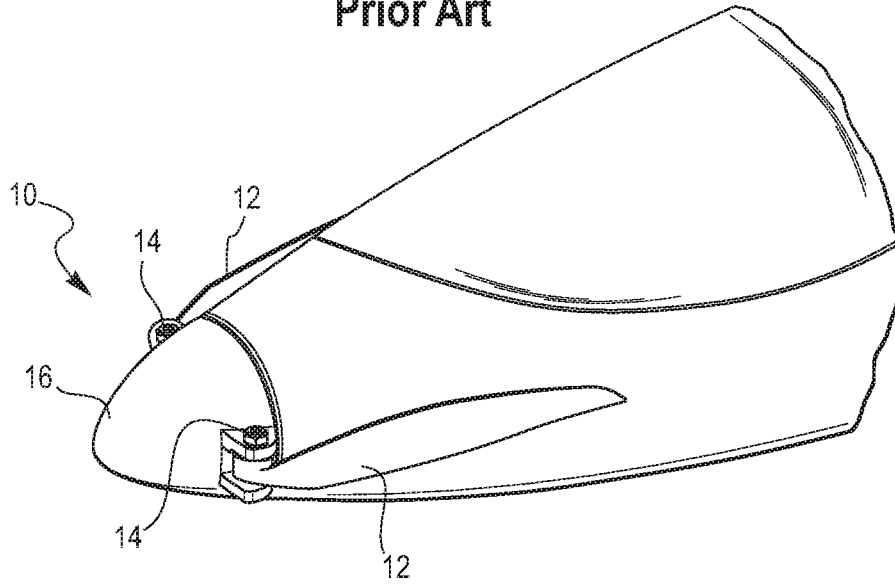
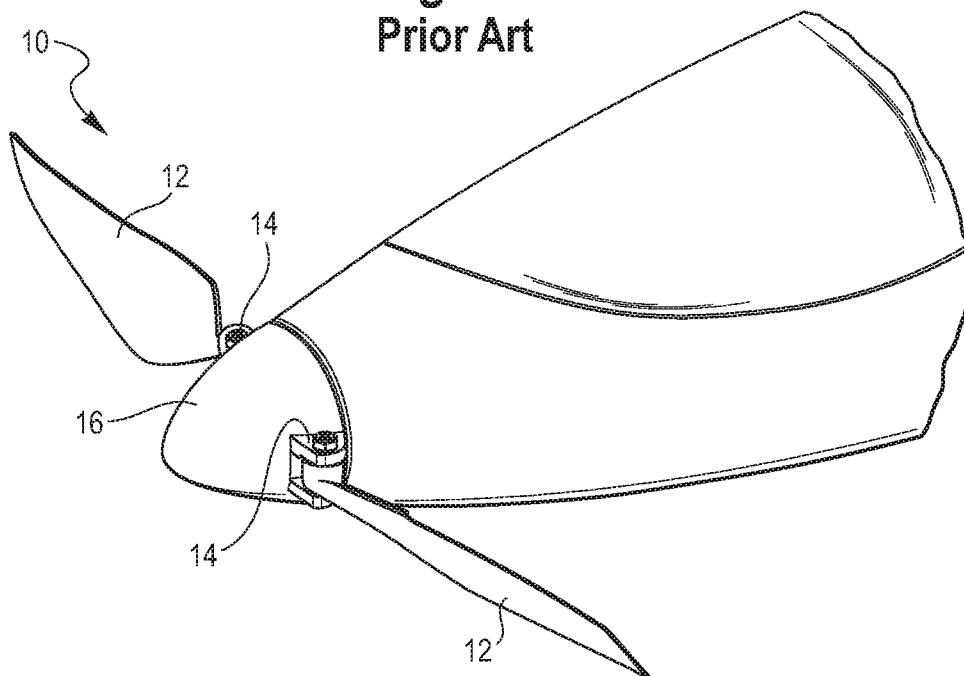


Fig. 1B
Prior Art




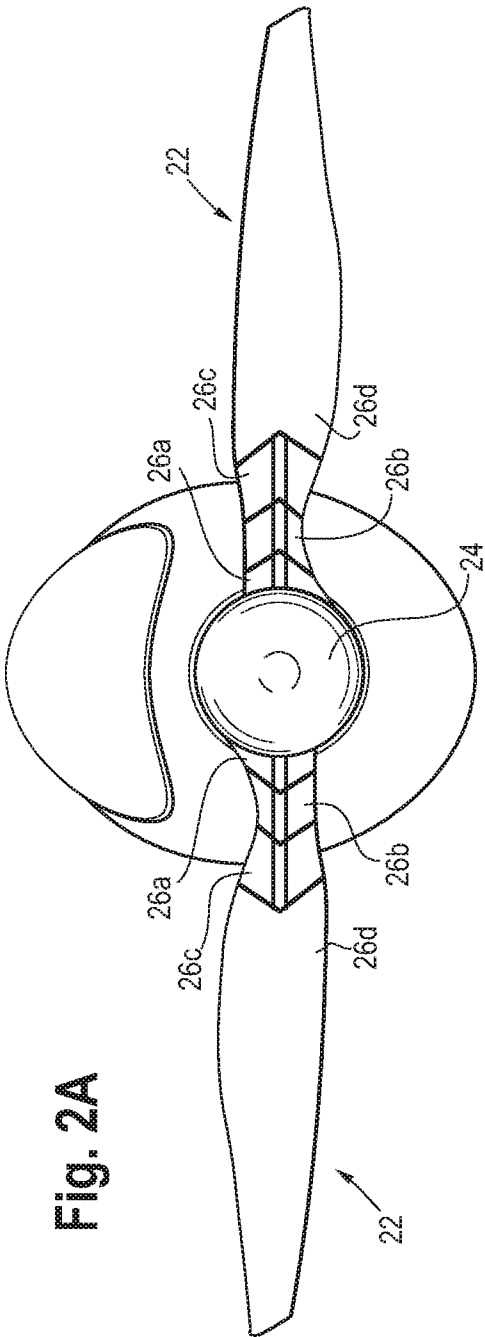


Fig. 2B

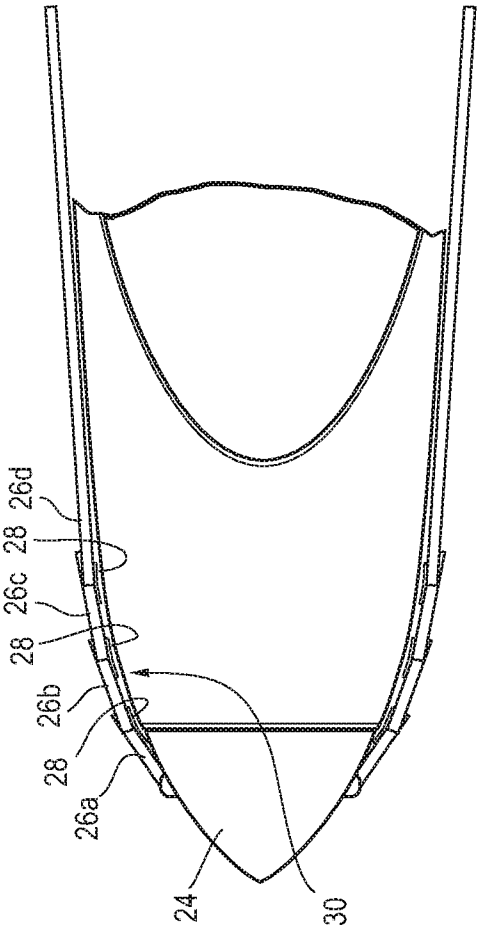

3/4

Fig. 3


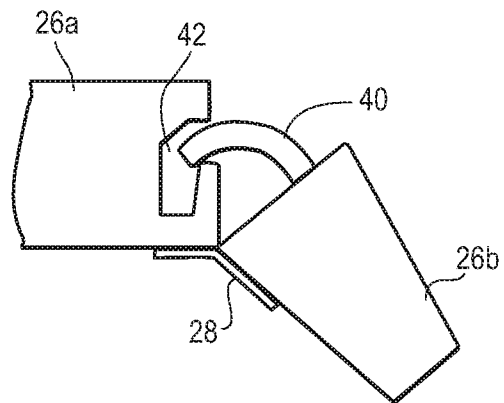


Fig. 4A

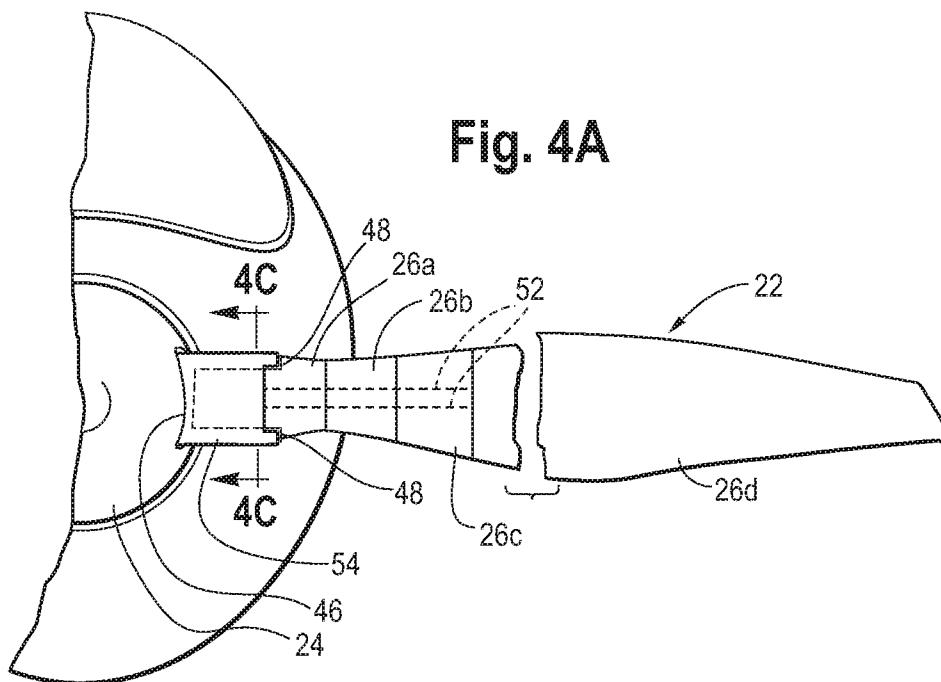

4/4

Fig. 4B


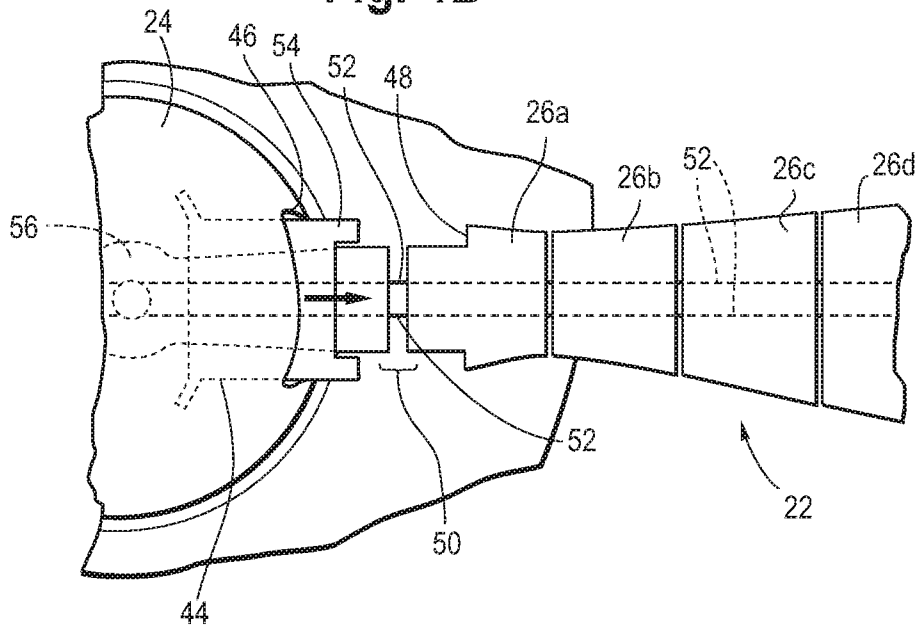


Fig. 4C

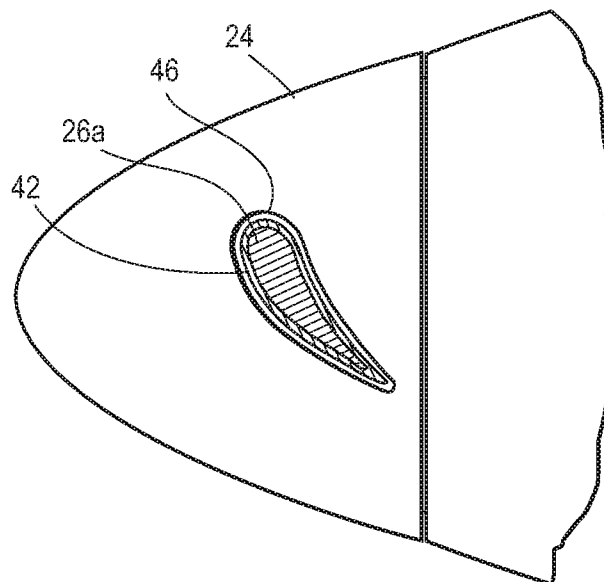

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2016/033902

A. CLASSIFICATION OF SUBJECT MATTER

INV. B64C11/04 B64C11/28 B64C27/46 B64C27/50 B64C27/473
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B64C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EP0-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 19 60 262 A1 (TRAPPE RICHARD) 3 June 1971 (1971-06-03)	1-4, 10-13, 15-18
Y	pages 1-9; figures 1-13	5,6,8,9, 19
X	US 2010/104437 A1 (CARABALLOSO ESTEBAN A [US] ET AL) 29 April 2010 (2010-04-29) pages 7-8; figures 1-2,5-8	1,10,15
Y	DE 32 46 635 A1 (FISCHER THOMAS DIPL ING) 20 June 1984 (1984-06-20) pages 3-7; figures 1-22	5,6,8,9, 19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 July 2016

Date of mailing of the international search report

04/08/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Carlier, François

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/033902

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 1960262	A1	03-06-1971	NONE

US 2010104437	A1	29-04-2010	US 2010104437 A1 29-04-2010
			US 2013251529 A1 26-09-2013
			US 2015086365 A1 26-03-2015

DE 3246635	A1	20-06-1984	NONE
