

(19)



Europäisches  
Patentamt  
European  
Patent Office  
Office européen  
des brevets



(11)

EP 3 501 634 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
26.06.2019 Bulletin 2019/26

(51) Int Cl.:  
**B01J 8/02** (2006.01)      **B01J 8/04** (2006.01)

(21) Application number: 19155981.4

(22) Date of filing: 12.05.2016

(84) Designated Contracting States:  
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB  
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO  
PL PT RO RS SE SI SK SM TR**  
Designated Validation States:  
**MA MD**

(30) Priority: 18.05.2015 US 201514714798

(62) Document number(s) of the earlier application(s) in accordance with Art. 76 EPC:  
**16730931.9 / 3 297 754**

(71) Applicant: **Saudi Arabian Oil Company**  
**Dhahran 31311 (SA)**

(72) Inventors:  

- KOSEOGLU, Omer Refa**  
31311 Dhahran (SA)
- AL-KHALDI, Salman J.**  
31311 Dhahran (SA)

(74) Representative: **Studio Torta S.p.A.**  
**Via Viotti, 9**  
**10121 Torino (IT)**

Remarks:

This application was filed on 07-02-2019 as a divisional application to the application mentioned under INID code 62.

## (54) CATALYST REACTOR BASKET

(57) A catalyst reactor basket is provided that includes an outer side wall extending along the outer circumferential periphery and an inner side wall disposed within the outer side wall. An aperture is sized and shaped to allow a fluid to flow axially with respect to the basket. First and second covers are disposed on opposite ends of the outer side wall and inner side wall and a dividing

wall is disposed between the first and second covers. The dividing wall defines a first and second chamber within the inner volume of the basket. A plurality of partitions are disposed within the first and second chambers. The plurality of partitions define a plurality of compartments within the first and second chambers, each compartment being sized and shaped to receive a catalyst.

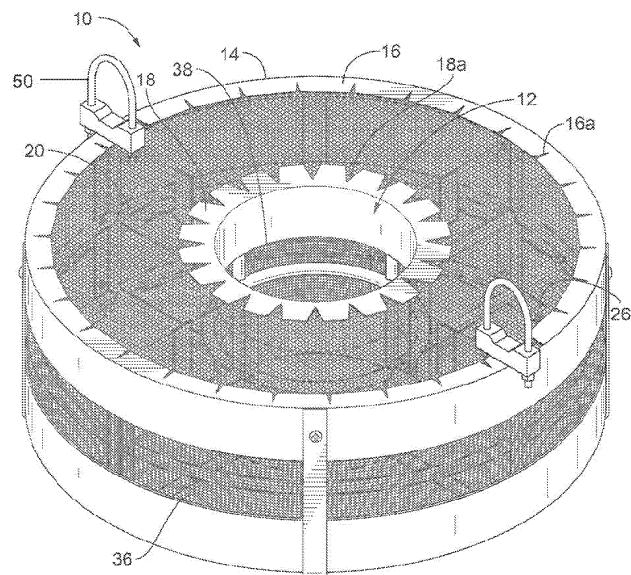


FIG. 1A

## Description

### FIELD OF THE INVENTION

**[0001]** The present invention relates to catalyst reactor baskets.

### BACKGROUND OF THE INVENTION

**[0002]** Catalyst reactor systems having differing designs are known in various documents, including, among others, U.S. Design Patent No. D257,281 entitled "Fossil Fuel Catalyst Generator" and U.S. Pat. Pub. No. 2004/0018124 entitled "Comprises cylindrical basket suitable for containing predetermined amount of catalyst; improved materials handling." The specific designs and features of the catalyst baskets described in these documents can best be appreciated by a review of their respective disclosures.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### [0003]

Fig. 1A is a top perspective view of the catalyst reactor basket with a cover attached according to an embodiment of the invention.

Fig. 1B is an exploded, top perspective view of the catalyst reactor basket;

Fig. 2 is a side perspective view of the catalyst reactor basket with the cover removed;

Fig. 3 is a top perspective view close up of the aperture of the catalyst basket; and

Fig. 4 is a top perspective view of the catalyst reactor basket according to another aspect of the invention.

### SUMMARY OF THE INVENTION

**[0004]** According to an aspect of the present invention, a catalyst reactor basket is provided. The catalyst basket includes an outer side wall extending along the outer circumferential periphery of the basket and extending in an axial direction to define a generally cylindrical inner volume of the basket. At least a portion of the outer side wall is fluid permeable. The catalyst basket includes an inner side wall disposed within the outer side wall. The inner side wall extends circumferential and axially to define an aperture that defines an inner boundary of the volume of the basket. The aperture is sized and shaped to allow a fluid to flow axially with respect to the basket. At least a portion of the inner side wall is fluid permeable. First and second covers are disposed on opposite ends of the outer side wall and inner side wall. The first and second covers define respective ends of the inner volume of the basket, at least a portion of the first and second covers being fluid permeable. A dividing wall is disposed between the first and second covers. The dividing wall defines a first and second chamber within the inner vol-

ume of the basket. At least a portion of the dividing wall is fluid permeable. A plurality of partitions are disposed within the first and second chambers. Each partition extends radially between the outer side wall and the inner side wall and extends axially between the dividing wall and a respective cover. The plurality of partitions define a plurality of compartments within the first and second chambers, each compartment being sized and shaped to receive a catalyst.

**[0005]** In accordance with a further aspect, a first compartment in the first chamber is aligned with a second compartment in the second chamber along an axis of the basket such that any fluid can flow through the first compartment and subsequently flow through the second compartment.

**[0006]** In accordance with yet a further aspect, the first compartment is sized to receive a first catalyst and the second compartment is sized to receive a second catalyst such that the fluid first contacts the first catalyst and subsequently contacts a second catalyst along an axial flow path of the fluid.

**[0007]** In accordance with a yet further aspect, the first catalyst has properties that are different from the second catalyst.

**[0008]** In accordance with a further aspect, the partitions provide a fluid barrier between adjacent compartments.

**[0009]** In accordance with a further aspect, at least one compartment is sized to receive a first catalyst that has different properties than a second catalyst in an adjacent compartment.

**[0010]** In accordance with a further aspect, the catalyst basket includes a support frame wherein the outer wall, inner wall, and dividing wall are supported by the frame.

**[0011]** In accordance with a yet further aspect, the catalyst reactor basket includes clips that removably secure the covers to respective ends of the basket.

**[0012]** In accordance with a further aspect, hooks are coupled to the basket, the hooks being sized and shaped to support the basket such that the basket hangs from the hooks.

**[0013]** In accordance with a further aspect, at least a portion of the inner side wall is fluid permeable.

**[0014]** In accordance with a further aspect, at least a portion of the outer wall is fluid permeable.

### DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS

**[0015]** Referring to Figs 1A and 1B, a catalyst reactor basket 10 is shown. The basket is generally cylindrical in shape and has a generally circular aperture 12 that extends axially through the basket. A cover 14 is provided at the top end of the basket. A cover is also provided at the bottom end of the basket. The cover includes an outer rim 16 and an inner rim 18. The rims 16, 18 extend around the periphery of the covers and provide structural rigidity to the cover. The rims can include relief cuts 16a and 18a

in order to aid in forming the rims into circular rings. The relief cuts can vary in size and shape. A mesh 20 extends between the rims 16 and 18. The mesh 20 is sized and shaped to provide holes that allow fluid to pass through the mesh during use of the catalyst basket while also preventing catalyst particles from passing through the mesh. As such, the catalyst particles are retained within the basket. The mesh 20 can be attached the rims 16 and 18 by, for example, welding the mesh to the rims such as by spot welding. Other suitable attachments are possible.

**[0016]** Referring to Figs. 1B and 3, the basket 10 includes a support frame 22. The support frame 22 can be arranged in layers such that the basket 10 includes an upper support frame layer 24 and a lower support frame layer 26. In addition, an intermediate support frame layer 25 (See Fig. 2) that is disposed between the upper and lower support frame layers can be included. Each support frame layer includes an outer ring 28 and an inner ring 30. The support frame 22 can include vertical supports 32 that can extend between the rings of the different layers of the support frame. The support frame can also include radial supports 34 that extend between the outer and inner rings of a respective layer. As shown in Fig. 1B, for example, four vertical supports 32 extend between the outer ring 28 of the upper layer and the outer ring of the intermediate layer. Similarly, four vertical supports 32 extend between the inner ring 30 of the upper layer and the inner ring of the intermediate layer. The vertical supports that connect the inner rings and the outer rings of the upper and intermediate layers are preferably the same length such that the upper and intermediate layers are maintained in generally parallel planes. In a similar arrangement, vertical supports connect the outer and inner rings of the intermediate layer and the bottom layer. In addition, as noted, radial supports 34 extend between the outer ring 28 and the inner ring 30 of the intermediate layer. The arrangement shown in Fig. 1B is structured such that radial supports are not required in the upper and lower layers, but they can optionally be included. The support frame elements (e.g., inner rings, outer rings, vertical supports and radial supports) can be metal, such as tubular metal, for example. The support frame elements can be connected using suitable fasteners and/or fastening methods, such as welding, for example.

**[0017]** The outer wall 36 of the basket 10 is supported by the outer rings 28 of each of the layers of the support frame. The outer wall 36 of the basket extends cylindrically around the basket to define the outer circumferential periphery thereof. Accordingly, the outer wall defines the outer limit of the cylindrical volume of the catalyst basket. The inner wall 38 of the basket is supported by the inner rings 28 of each of the layers of the support frame. The inner wall 38 of the basket extends cylindrically to define the inner boundary of the cylindrical volume of the catalyst basket. The inner wall 38 of the basket extends also defines the circumferential periphery of the aperture 12.

The outer wall 36 is preferably permeable such that liquids can flow through the outer wall so that fluid can be exchanged between the interior and exterior of the basket. Similarly, the inner wall 38 is preferably permeable such that liquids can flow through the inner wall so that fluid can be exchanged between the interior and exterior of the basket.

5 Optionally, the outer, inner and dividing walls, or at least a portion thereof, can alternatively be made from non-permeable steel plate to prevent liquid entering and exiting the basket. In certain down flow reactors, the liquid flow is axial therefore no flow is expected to flow through the outer and inner walls and, therefore, surfaces, or at least 10 portions thereof, that are parallel to the axial flow direction can be non-permeable. In some embodiments, for example, the mesh can be steel wire cloth, woven, 14 x 14 mesh with a .020 inch wire diameter. As can be seen in Fig. 3, for example, the wire mesh of the inner and outer 15 walls can be secured to the support frame member using wire 39. Other suitable attachment means and methods are also contemplated.

**[0018]** A dividing wall 40 can extend between the outer ring 28 and the inner ring 30 and can be secured to the 20 intermediate layer 25. As can be seen in Figs. 1B and 2, the dividing wall 40 divides the interior of the basket into first and second chambers 42 and 44, respectively. The dividing wall 40 is fluid permeable so that fluid can flow through the dividing wall in an axial direction along the 25 length (height) of the basket. For example, the dividing wall can be made of the same woven mesh as the inner and outer walls. In addition, partitions 46 can extend radially between the inner and outer rings of the support frames. As shown in Fig. 1B, four partitions 46 are provided in each of the upper and lower chambers, for example. The partitions 46 define compartments 48 in the upper and lower chambers. The compartments 48 can receive materials such as catalyst material. The partitions 46 are preferably not fluid permeable so that effect of 30 material in one compartment can be more readily isolated from the material in an adjacent compartment. For example, the partitions can be solid steel sheet material.

**[0019]** As shown in Fig. 1B, the partitions can define 35 four compartments in each of the upper and lower chambers, respectively, for example. Partitions can be added or removed to increase or decrease the number of compartments. Accordingly, the partitions 46 and the dividing wall 40 define the interior of the basket such that the basket has an upper chamber with four compartments and a lower chamber with four compartments, as illustrated. Preferably, the partitions in the upper and lower 40 chambers are aligned so that a compartment in the lower chamber is aligned with a corresponding compartment in the upper chamber and are sized and shaped to be coextensive, without overlap. Alternatively, the partitions in the upper and lower chambers can be arranged such that a compartment in one chamber is sized, shaped, and positioned such that there is overlap between com- 45

parts along the axial direction.

**[0020]** The structural arrangement of basket in which each chamber includes multiple compartments allows for testing several different catalysts at the same time. In addition, dividing the basket into an upper chamber and a lower chamber allows for two-stage reactions in a single pass of the fluid in the axial direction along the basket. For example, in one compartment of one chamber a first catalyst is provided. In a second, corresponding compartment in the other chamber (i.e., the second compartment is axially aligned with the first compartment) a second catalyst is provided. Accordingly, fluid can pass through two layers of catalyst having differing properties. For example, the liquid can pass through the first compartment and come into contact with the catalyst contained therein. The catalyst in the first compartment can be one that hydrotreats the fluid by removing sulfur and hydrogen from the fluid. As the fluid travels along the axial direction of the basket the fluid enters the second compartment in the next chamber of the basket. The second compartment can include a different catalyst that can be used for cracking or further hydrogenation of the liquid as it comes into contact with the catalyst contained in the compartment. Two-stage reactions can thus be achieved with the catalyst basket of the present invention. The design is made to simulate a once-thru hydrocracking unit with two reactors in series of a single pass of the fluid through the basket. In addition, adjacent compartments can contain different catalyst materials so that different catalyst combinations can be tested simultaneously using the same reactor basket.

**[0021]** The two layer, multi-compartment design of the catalyst basket allows different combinations of catalysts to be tested using the same basket. For example, two different compartments in the first layer can contain catalysts A1 and A2. In addition, two different compartments in the second layer can contain catalysts B1 and B2. Accordingly, as the fluid passes through the reactor basket, the fluid is exposed to different combinations of catalysts. For example, one fluid flow path through the basket can first expose the fluid to the catalyst A1 contained in one compartment in the first layer of the basket. After the fluid is exposed to the catalyst A1, it passes into the second layer of the basket whereupon it is exposed to the second catalyst B1 contained in a compartment in the second layer of the basket. Similarly, the fluid can progress through another flow path in which the fluid is exposed to catalyst A2 in another compartment in the first layer of the basket and then is exposed to catalyst B2 in another compartment in the second layer of the basket. As such, the fluid flowing through the reactor basket and be exposed to a combination of catalysts A1 and B1 and, using the same catalyst basket in the same reactor, the fluid simultaneously can be exposed to the combination of catalysts A2 and B2. Accordingly, multiple combinations of catalysts can be tested in the same chamber using the same basket simultaneously. As such, the basket design allows for efficient and effective testing of many catalysts

and combinations so that more suitable and effective catalysts can be identified and employed in future reactions.

**[0022]** The covers 14 can be removed from the top and bottom ends of the basket to allow for filling the compartments with catalyst material. Clips can be provided on the sides of the basket for selectively attaching the covers to the ends of the basket. For example, the clips can be detached from a first cover and the cover can be removed to expose the compartments in the first chamber. Various catalyst materials can be added to the exposed compartments and the cover can be re-secured using the clips. Then the basket can be flipped so that the second cover at the other end of the basket can be removed to expose the compartment of the second chamber. Various catalyst materials can be added to the exposed compartments of the second chamber and the second cover can be re-secured using the clips. Accordingly, the two-layer, multi-compartment catalyst reactor basket can be loaded with catalyst. Hooks 50 (See Fig. 1) can optionally be connected to the frame of the basket. The hooks can support the basket and couple the basket to the internals of the reactor. The hooks can also be used to support the basket during loading and unloading of the catalyst at the end of the reactor cycle. The catalysts are usually vacuumed at the end of the cycle. By hanging the basket, the basket will be untacked during the catalyst vacuuming.

**[0023]** Fig. 4 illustrates a catalyst basket having a single layer with four chambers. The four chamber can contain catalyst that allows axial flow through in a similar manner as described above.

**[0024]** The subject matter described above is provided by way of illustration only and should not be construed as limiting. Various modifications and changes can be made to the subject matter described herein without following the example embodiments and applications illustrated and described, and without departing from the true spirit and scope of the present invention, which is set forth in the following claims.

40

## Claims

1. A catalyst reactor basket arranged to receive a combination of catalysts in separate chambers, comprising:

an outer side wall extending along the outer periphery of the basket and extending to define an inner volume of the basket;

an inner side wall disposed within the outer side wall, the inner side wall extending to define an aperture that defines an inner boundary of the volume of the basket, the aperture being sized and shaped to allow a fluid to flow axially with respect to the basket;

first and second covers disposed on opposite ends of the outer side wall and inner side wall,

the first and second covers defining respective ends of the inner volume of the basket, at least a portion of the first and second covers being fluid permeable; and

a dividing wall disposed between the first and second covers, the dividing wall defining a first and second chamber within the inner volume of the basket, at least a portion of the dividing wall being fluid permeable, wherein each of the first and second chambers being sized to receive a respective catalyst so as to enable a two-stage reaction in a single pass of the fluid in the axial direction.

2. The catalyst reactor basket as in claim 1, further comprising a plurality of partitions disposed within the first and second chambers, each partition extending between the outer side wall and the inner side wall and between the dividing wall and a respective cover, the plurality of partitions defining a plurality of compartments within the first and second chambers, each compartment being sized and shaped to receive a catalyst.

3. The catalyst reactor basket as in claim 2, wherein a first compartment in the first chamber is aligned with a second compartment in the second chamber along an axis of the basket such that any fluid can flow through the first compartment and subsequently flow through the second compartment.

4. The catalyst reactor basket as in claim 3, wherein first compartment is sized to receive a first catalyst and the second compartment is sized to receive a second catalyst such that the fluid first contacts the first catalyst and subsequently contacts a second catalyst along an axial flow path of the fluid.

5. The catalyst reactor basket as in claim 4, wherein the first catalyst has properties that are different from the second catalyst.

6. The catalyst reactor basket as in claim 2, wherein the partitions provide a fluid barrier between adjacent compartments.

7. The catalyst reactor basket as in claim 2, wherein at least one compartment is sized to receive a first catalyst that has different properties than a second catalyst in an adjacent compartment.

8. The catalyst reactor basket as in claim 1, further comprising a support frame wherein the outer wall, inner wall, and dividing wall are supported by the frame.

9. The catalyst reactor basket as in claim 1, further comprising clips that removably secure the covers to respective ends of the basket.

5

10. The catalyst reactor basket as in claim 1, further comprising hooks coupled to the basket, the hooks being sized and shaped to support the basket such that the basket hangs from the hooks.

11. The catalyst reactor basket as in claim 1, wherein at least a portion of the inner side wall is fluid permeable.

10 12. The catalyst reactor basket as in claim 1, wherein at least a portion of the outer wall is fluid permeable.

13. A method of catalyzing a fluid, the method comprising:

15 disposing a catalyst reactor basket in a reactor, the basket defining a volume and having a fluid permeable dividing wall within the volume of the basket;

20 receiving a first catalyst within a first chamber on a first side of the fluid permeable dividing wall and a second catalyst within a second chamber on a second side of the fluid permeable dividing wall; and

25 flowing the fluid in the reactor through the first and second chambers of the catalyst reactor basket and across the fluid permeable dividing wall.

30 14. The method of claim 13, wherein the first chamber is aligned with the second chamber along an axis of the basket, the method further comprising flowing the fluid through the first chamber and subsequently through the second chamber along the axis of the basket.

35 15. The method of claim 14, wherein the flowing step comprises contacting the fluid with the first catalyst in the first chamber and subsequently contacting the fluid with the second catalyst in the second chamber.

40 16. The method of claim 13, further comprising:

45 partitioning at least one of the first and second chambers into a plurality of partitions which define a respective plurality of compartments, wherein the receiving step comprises loading a catalyst into each partition.

50 17. The method of claim 16:

55 wherein the fluid flows in an axial direction, wherein the partitions in the first chamber are aligned with the partitions in the second chamber such that the compartments in the first chamber are aligned with the compartments in the second chamber in the axial direction, and wherein the partitions are not fluid permeable,

the flowing step further comprising flowing the fluid through the compartments in the first chamber and subsequently flowing the fluid through the compartments in the second chamber along the axial direction.

5

18. The method of claim 13, wherein each catalyst in the first chamber is different from each catalyst in the second chamber, the flowing step further comprising flowing the fluid through the first chamber and subsequently flowing the fluid through the second chamber, the fluid contacting different combinations of catalysts in respective aligned compartments as it flows axially from the first chamber to the second chamber.

10

15

19. The method of claim 13, wherein the catalyst reactor basket further comprises first and second covers spaced from the fluid impermeable dividing wall, first clips to removably secure the first cover and second clips to removably secure the second cover, the method comprising, prior to the step of disposing the catalyst reactor basket in the reactor:

loading the first catalyst within the first chamber;  
placing the first cover on the catalyst reactor basket;  
securing the first cover with the first clips;  
flipping the basket over;  
loading the second catalyst within the second chamber;  
placing the second cover on the catalyst reactor basket; and  
securing the second cover with the second clips.

25

30

20. The method of claim 13, wherein the catalyst reactor basket has hooks coupled to the basket, the method further comprising using the hooks to couple the basket to the reactor.


35

40

45

50

55

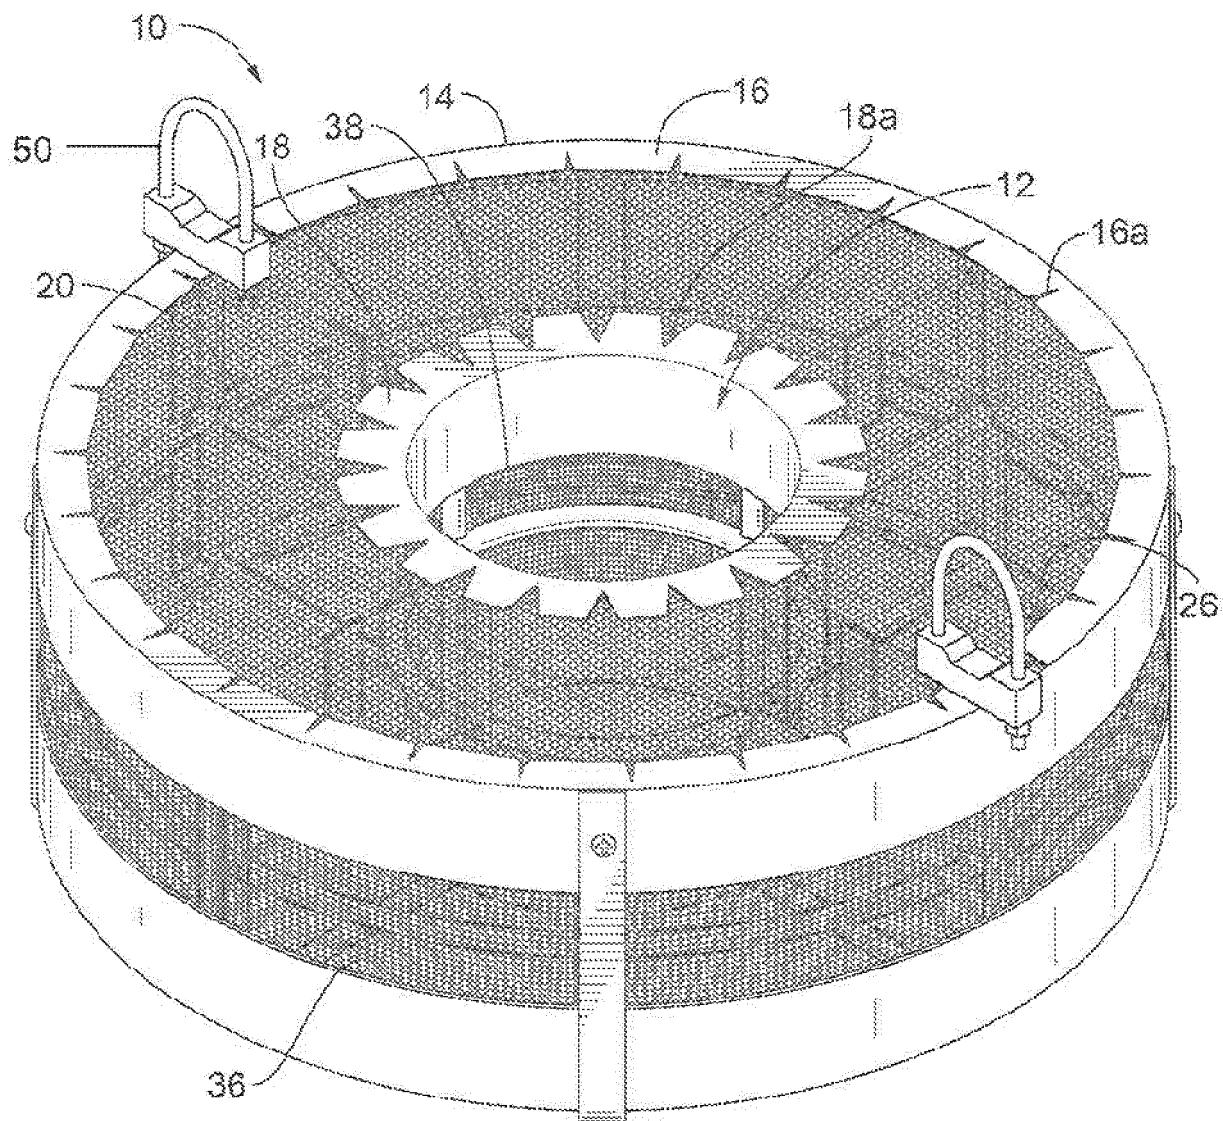

**FIG. 1A**



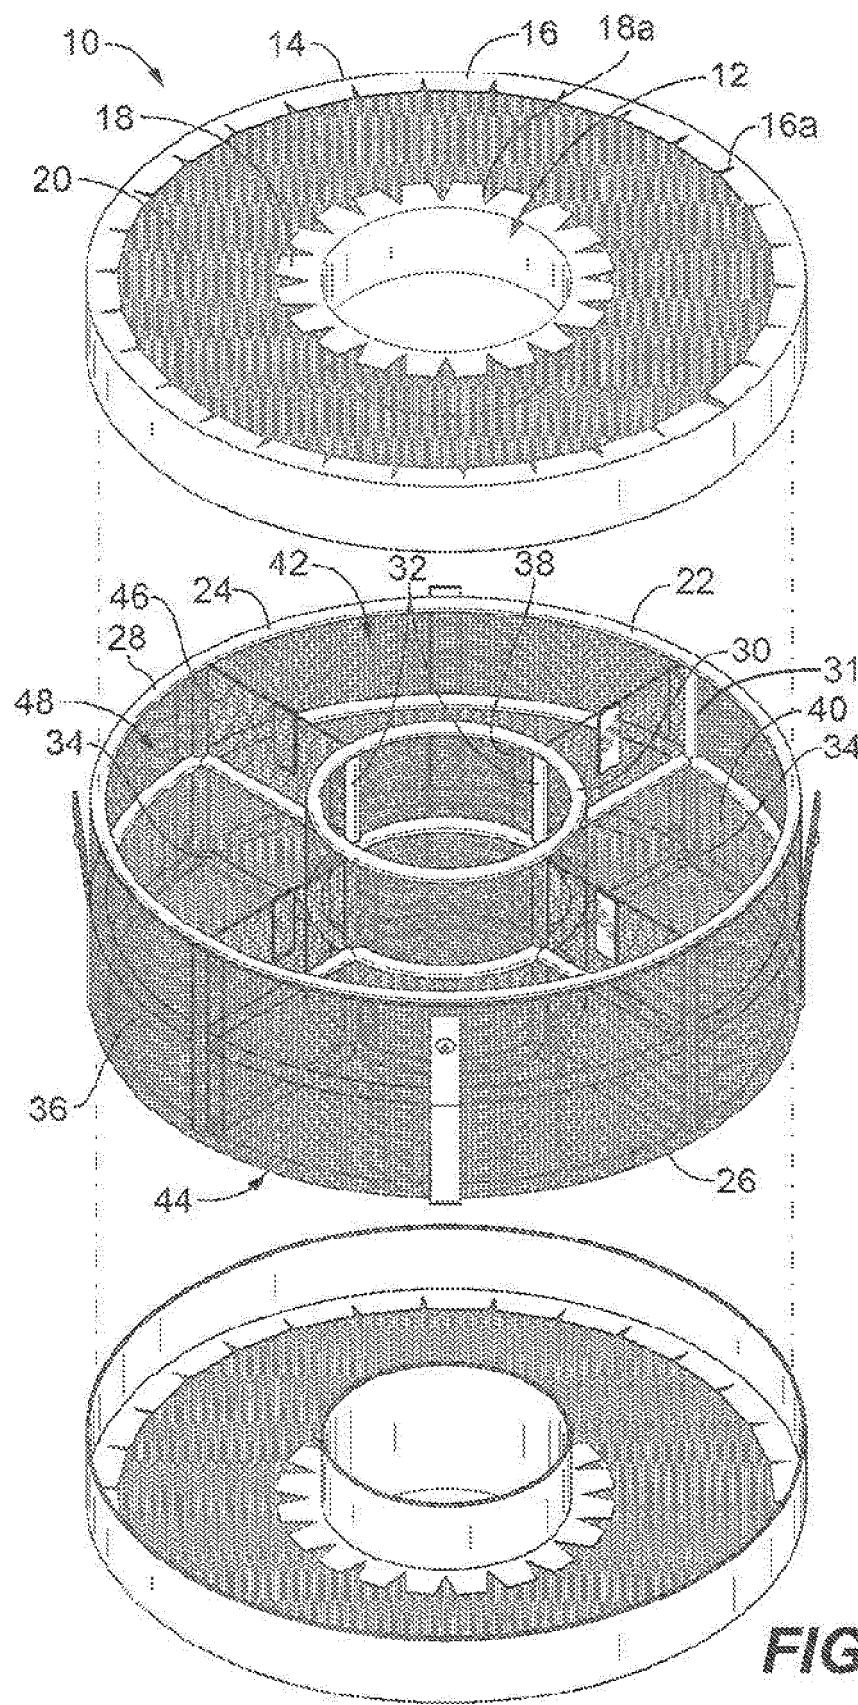



FIG. 1B

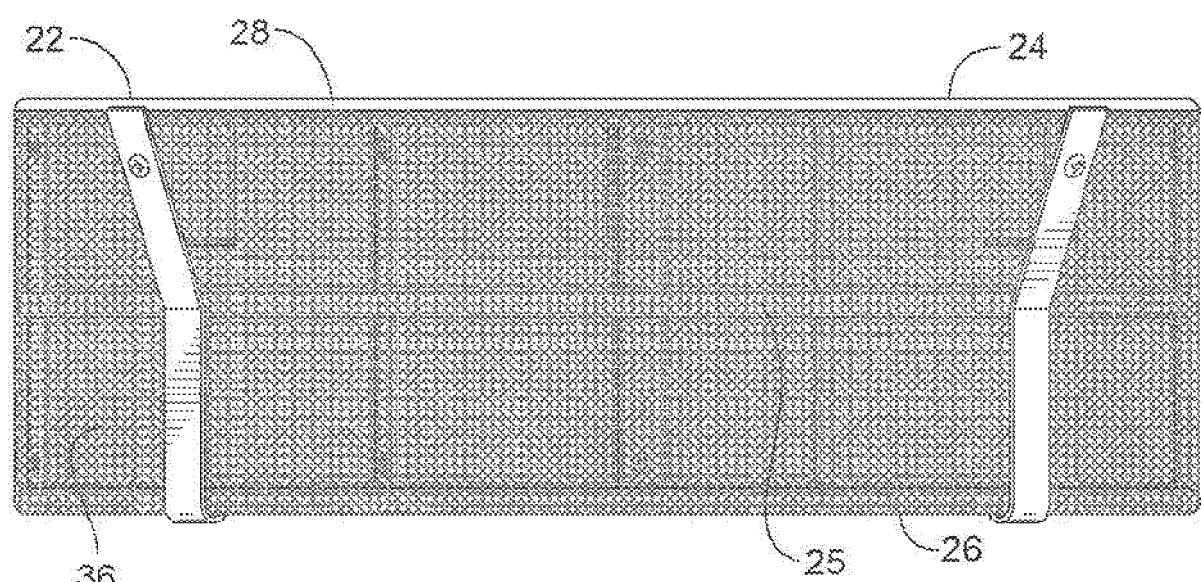

*FIG. 2*

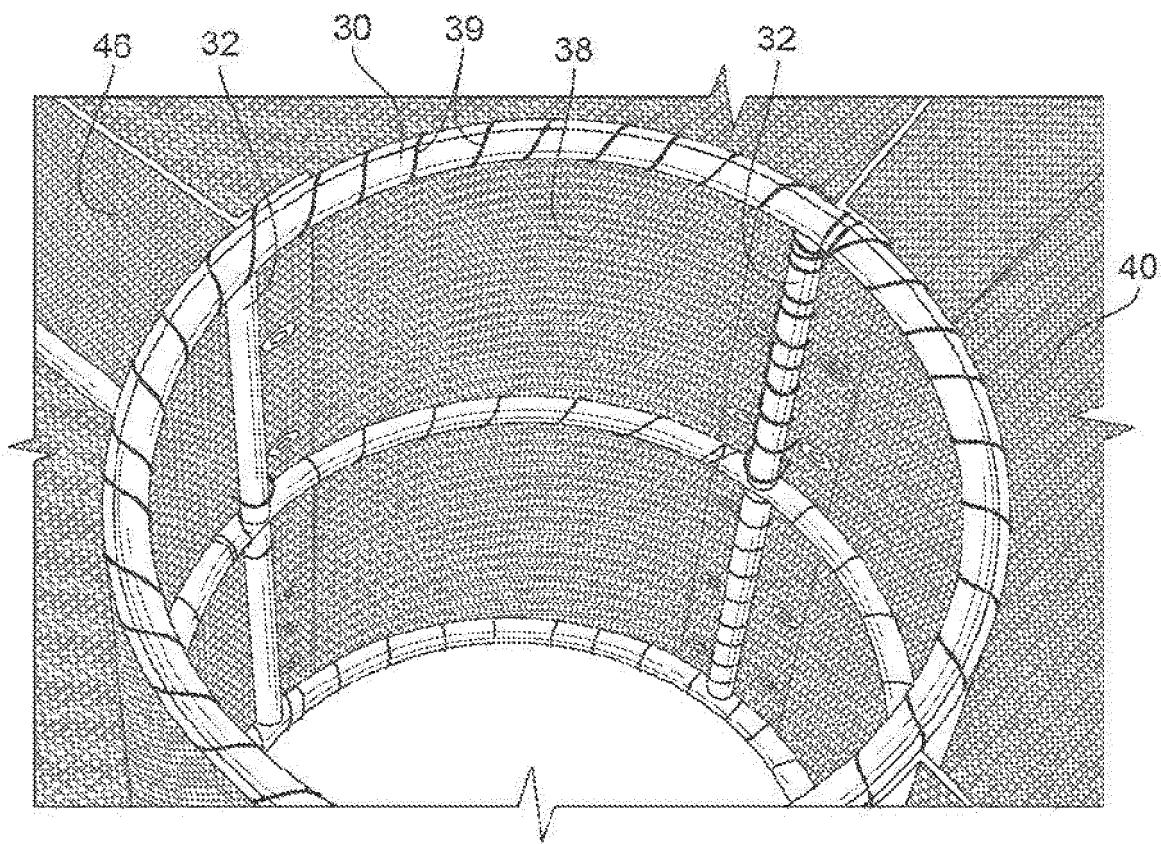

**FIG. 3**

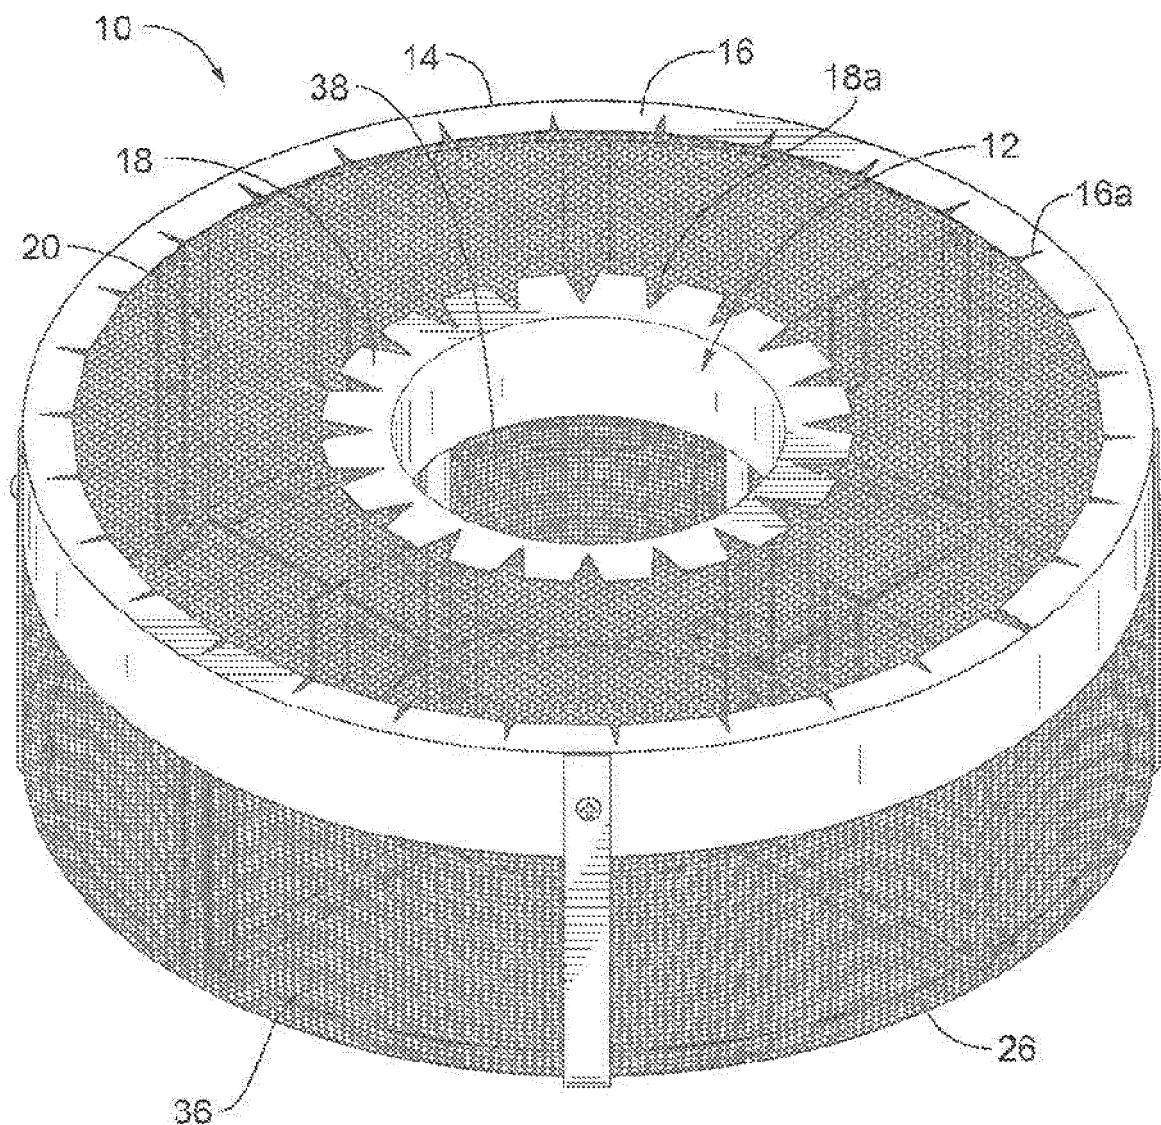

**FIG. 4**



## EUROPEAN SEARCH REPORT

Application Number

EP 19 15 5981

5

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
10 A	EP 0 483 975 A1 (NAGAOKA KK [JP]) 6 May 1992 (1992-05-06) * abstract * * column 8, line 26 - column 9, line 9; figure 2 * * column 10, line 33 - line 46; figures 9A, 9B * * column 10, line 55 - line 58 * * claim 1 *	1-20	INV. B01J8/02 B01J8/04
15 A	----- GB 705 705 A (GOTTFRIED BISCHOFF G M B H) 17 March 1954 (1954-03-17) * page 3, line 10 - line 30; claim 1; figure 1 *	1-20	
20 A	----- EP 1 300 190 A1 (METHANOL CASALE SA [CH]) 9 April 2003 (2003-04-09) * abstract; figure 1 * * column 4, paragraph 22; claim 1; figures 2, 3 *	1-20	
25	-----		TECHNICAL FIELDS SEARCHED (IPC)
30			B01J
35			
40			
45			
50 1	The present search report has been drawn up for all claims		
55	Place of search Munich	Date of completion of the search 21 March 2019	Examiner Thomasson, Philippe
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... & : member of the same patent family, corresponding document			

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 19 15 5981

5 This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-03-2019

10	Patent document cited in search report	Publication date		Patent family member(s)	Publication date
15	EP 0483975	A1 06-05-1992	AU	647181 B2	17-03-1994
			BR	9104257 A	02-06-1992
			CA	2052281 A1	04-04-1992
			CN	1062857 A	22-07-1992
			EP	0483975 A1	06-05-1992
			JP	H04141227 A	14-05-1992
			RU	2036711 C1	09-06-1995
			US	6221320 B1	24-04-2001
20	-----	-----	-----	-----	-----
	GB 705705	A 17-03-1954	NONE	-----	-----
25	-----	-----	-----	-----	-----
	EP 1300190	A1 09-04-2003	AR	036730 A1	29-09-2004
			AU	2002350479 A1	22-04-2003
			BR	0206058 A	02-09-2003
			CA	2430618 A1	17-04-2003
			CN	1477993 A	25-02-2004
			EG	23245 A	29-09-2004
			EP	1300190 A1	09-04-2003
			EP	1432507 A1	30-06-2004
30		-----	MX	PA03004957 A	06-12-2004
		-----	MY	138652 A	31-07-2009
		-----	US	2004018124 A1	29-01-2004
		-----	WO	03031048 A1	17-04-2003
35	-----	-----	-----	-----	-----
40	-----	-----	-----	-----	-----
45	-----	-----	-----	-----	-----
50	-----	-----	-----	-----	-----
55	-----	-----	-----	-----	-----

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**REFERENCES CITED IN THE DESCRIPTION**

*This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.*

**Patent documents cited in the description**

- US D257281 S [0002]
- US 20040018124 A [0002]