

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
30 October 2008 (30.10.2008)

PCT

(10) International Publication Number
WO 2008/129515 A2

(51) International Patent Classification:
F03B 17/02 (2006.01)

(21) International Application Number:
PCT/IB2008/051566

(22) International Filing Date: 23 April 2008 (23.04.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/913,619 24 April 2007 (24.04.2007) US
60/978,060 5 October 2007 (05.10.2007) US

(71) Applicant and

(72) Inventor: **BASTOS RIBEIRO, Renato** [BR/BR]; 933,
Pedro Ivo street, Mont'Serrat, 90.450-210 Porto Alegre
(BR).

(74) Agent: **GUERRA NETO, Alberto J.**; 1113, São Carlos
Street, Floresta, 90.220-121 Porto Alegre (BR).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

(54) Title: APPARATUS AND ASSOCIATED METHODS TO GENERATE USEABLE ENERGY

FIG. 18

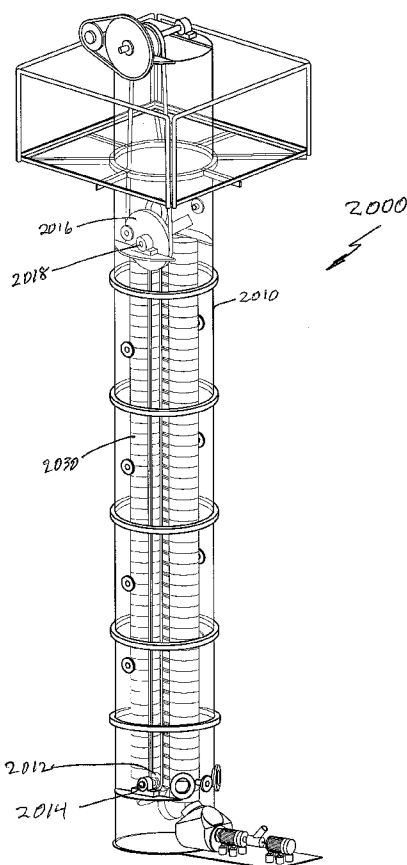

(57) Abstract: The present disclosure relates to an apparatus and associated methods for generating energy by capturing and taking benefit of the energy generated by any quantity of air surfacing inside water. In exemplary embodiments, the apparatus comprises compressing a lower density gas in a liquid medium, allowing the gas to naturally rise to the surface of the liquid medium and then capturing the energy generated by the surfacing gas. An apparatus and method is disclosed to provide a low energy technique to compress air into water. In exemplary embodiments, air is introduced into water by simultaneously providing a low pressure area in the liquid medium and compressing the air into the low pressure area. By compressing the air into water in low pressure areas, the energy required to compress the air is greatly reduced. The amount of energy generated by the rising air is less than the amount of energy required to compress air underneath the water.

APPARATUS AND ASSOCIATED METHODS TO GENERATE USEABLE ENERGY

BACKGROUND

[0001] 1. *Field*

[0002] The present disclosure is related to the generation of electrical energy, and more particularly the conversion of kinetic energy in rising air bubbles through water into usable electrical energy.

[0003] 2. *General Background*

[0004] Energy costs and concerns have highlighted the need for alternative and renewable energy sources. Recent research into different methods of producing energy involving the traditional uses of wind, water, and solar energy has been widespread. This reflects the major threats of climate change due to pollution, exhaustion of fossil fuels, and the environmental, social and political risks of fossil fuels.

[0005] One potential source of renewable energy is the kinetic energy created by rising air in water. Air rises in water because it is less dense than water, meaning that a given volume of air weighs less than the same volume of water. Water is nearly 1,000 times denser than air. Any object or substance that weighs less than the amount of fluid it displaces will float on that fluid.

[0006] Buoyancy is the upward force on an object produced by the surrounding fluid (i.e., a liquid or a gas) in which it is fully or partially immersed, due to the pressure difference of the fluid between the top and bottom of the object. The net upward buoyancy force is equal to the magnitude of the weight of fluid displaced by the body. This net force enables the object to float or at least to seem lighter.

[0007] Buoyancy provides an upward force on the object. The magnitude of this force is equal to the weight of the displaced fluid. The buoyancy of an object depends, therefore, only upon two factors: the object's volume, and the density of the surrounding

fluid. The greater the object's volume and surrounding density of the fluid, the more buoyant force it will experience. If the buoyancy of an unrestrained and unpowered object exceeds its weight, it will tend to rise. An object whose weight exceeds its buoyancy will tend to sink. This buoyant force on air bubbles in water causes the air bubbles to rise to the surface.

[0008] Thus, there is a need to provide an apparatus and associated methods wherein air is compressed into water at low energies and the kinetic energy created by the surfacing air is generated into useable energy.

SUMMARY

[0009] In one aspect of the present disclosure, a method and apparatus for generating energy is disclosed. The basic method comprises first introducing air into water below the surface of the water. Then the air bubbles in the water are allowed to rise to the surface. To generate energy, the kinetic energy in the upwardly moving and subsequently surfacing air bubbles is captured and converted into a useable form of energy.

[0010] In another aspect, there is disclosed an apparatus and method to compress air into water with minimal expenditure of energy. In exemplary embodiments, air is introduced into water by simultaneously providing a low pressure area in the liquid medium and compressing air as it is introduced into the low pressure area. By compressing the air introduced into water in low pressure areas, the energy required to compress the air is greatly reduced. At the same time the air in the water is forced outward to a peripheral location where the air is then released in the form of bubbles that then rise to the surface.

[0011] There are several different methods to compress air into water in accordance with the present disclosure. One apparatus capable of compressing air into water comprises providing a circular rotor on an axle in the water. The rotor may have a plurality of teeth on an outer edge of the rotor and a cavity formed within the rotor for the introduction of air into the water. In exemplary embodiments, the rotor forming the

cavity comprises a plurality of blades extending towards the outer edge, with each of the blades ending in an orifice in the teeth of the rotor.

[0012] To introduce the air, the rotor is rotated, for example, in a counter-clockwise direction to produce an area of lower pressure adjacent to each tooth or peripheral end on the outer edge of the blade to provide a low pressure region or vacuum for low energy compression of air into the water. Air is then introduced at that region. Since this end region is at a low pressure, a compressed volume of air may be easily introduced with minimal expenditure of energy.

[0013] In another embodiment, a cylinder attached to an axle is placed in the water. The cylinder may have a plurality of streaks or channels along the circumference of the cylinder and a plurality of orifices in each cylinder. A cavity formed in the cylinder has a plurality of blades extending towards each streak in the cylinder terminating in an orifice. To introduce the air, the cylinder is rotated to produce an area of lower pressure at each streak on the outer edge of the cylinder to provide a vacuum for the introduction of air.

[0014] In another further embodiment, a pipe enclosing an axle with lateral ducts in the form of a spiral, the ducts terminating in blades extends into the water. The axle is rotated within the pipe to produce an area of lower pressure at each blade on the end of the axle to provide a vacuum to allow for the introduction of air.

[0015] In a further aspect of the present disclosure, an apparatus generating usable energy from the air or other gas compressed into the water or other fluid per the present disclosure. The apparatus may preferably include a vertical tank filled with a liquid medium and a compressor to introduce a gas having a lower density than the liquid medium into the liquid medium. Air introduction equipment is utilized to provide a low pressure area in the liquid medium for low energy compression of the gas.

[0016] In this embodiment, the gas compressed into the liquid medium naturally rises and an energy conversion mechanism attached to an energy conversion axle, the energy conversion mechanism able to capture the rising and surfacing gas. Finally, a generator is attached to the energy conversion axle to convert the kinetic energy in the surfacing gas into usable energy.

[0017] In exemplary embodiments, the energy conversion mechanism comprises a pair of gear or pulley wheels, a chain or belt extending between the wheels and capable of rotating the wheels; and a plurality of upside down cups attached to the chain or belt to capture the surfacing gas at the bottom of the tank or column. The cups capture the escaping air or gas, displacing water or other fluid in the upside down cups, resulting in an upward buoyancy force being exerted on the cups attached to the belt or chain, causing upward movement of the gas containing cups. When the cups reach the top gear or pulley wheel, they each rotate about a horizontal axis, releasing the air or gas, and then returning right side up down to the bottom pulley wheel to once again collect escaping gas or air when upside down. The upper pulley wheel drives another pulley wheel that in turn turns a generator rotor to produce useable electrical energy.

DRAWINGS

[0018] The foregoing aspects and advantages of the present disclosure will become more readily apparent and understood with reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

[0019] **Figure 1** is a perspective upper view of an exemplary embodiment of a rotor disc for compressing a gas into a liquid medium.

[0020] **Figure 2** is a perspective view as in Figure 1 of another exemplary embodiment of a rotor disc for generating a low pressure region for compressing a gas into a liquid medium.

[0021] **Figure 3** illustrates a perspective view of the rotor disc shown in Figure 2 with a central axial axle and a tubular passage for entry of air into the central portion of the disc.

[0022] **Figure 4** is a perspective view of an alternative rotor disc which includes a counter rotating central impeller.

[0023] **Figure 5** is a perspective view of the alternative rotor disc shown in Figure 5 with the central impeller drive shaft and tubular airway shown in place.

[0024] **Figure 6a** is an upper plan view of an alternative rotor design in accordance with the present disclosure.

[0025] **Figure 6b** illustrates a plan view of another alternative rotor design in accordance with the present disclosure.

[0026] **Figure 7a** is a perspective view of a tubular rotor design in accordance with the present disclosure.

[0027] **Figure 7b** is an opposite end perspective view of the tubular rotor design shown in Figure 7a.

[0028] **Figure 8** is a separate perspective view of a flanged cone part of the screw rotor assembly shown fully assembled in Figure 14.

[0029] **Figure 9** is a separate rear perspective view of a tubular cylinder that is fastened to the flanged cone shown in Figure 8.

[0030] **Figure 10** is a separate front perspective view of the tubular cylinder shown in Figure 9.

[0031] **Figure 11** is a perspective view showing the parts shown in Figures 8, 9, and 10 assembled together.

[0032] **Figure 12** is a separate perspective top view of a cone part which is inserted into the conical cavity in the cone part shown in Figure 8, as shown in Figure 14.

[0033] **Figure 13** is a separate perspective bottom view of the cone part shown in Figure 12.

[0034] **Figure 14** is a fully assembled perspective view of the alternative screw rotor disc embodiment.

[0035] **Figure 15** is a perspective view of the bottom portion of the assembled energy production apparatus shown in Figure 18.

[0036] **Figure 16** is a perspective view of the bottom portion of an alternative energy production apparatus to that shown in Figure 18.

[0037] **Figure 17** is an enlarged view of the upper portion of the apparatus shown in Figure 18 illustrating a detailed view of one exemplary embodiment of a portion of the energy conversion mechanism.

[0038] **Figure 18** is a perspective view of one embodiment of the energy conversion system in accordance with the present disclosure.

DETAILED DESCRIPTION

[0039] The present disclosure refers to a system or a process with the goal of creating a new and clean energy, capture this energy and make it available for general use. This disclosure is formed by two stages that work integrated in this case. However, each of the stages involves a complete technology and could be used separately or together.

[0040] The first stage consists in the creation of energy with the introduction of “air” at the bottom part of a water column. Once introduced, the air creates a proper energy when moving towards surface direction.

[0041] This technique is well known and applied usually for several ends, as for example to raise objects from the bottom of a river or sea to the surface as boats, submarines, etc. Attaching tanks on those objects and introducing air, they are driven to float at the surface. This operation and this kind of air introduction would not bring any results to attain goals of the present disclosure.

[0042] At the present disclosure, the air introduction should be made by a new method, a new idea and conception which makes possible to introduce air with a very low cost of energy. Initially the present disclosure is about introducing air at the bottom of a water column formed by a common tank, and the introduced air at the inferior part is simply launched into water, forming bubbles that will have its own energy when freely moving towards surface.

[0043] The air introduction into water is the main point of this first part of the disclosure. A method and a conception were created which result in very specific function and effects, in order to spend or use a very small quantity of energy. I created

three models of the rotor, two in the disk or cylinder form and another in the form of a screw. In any of those cases there are teeth or salience in specific points as we are able to see in the attached drawing figures 1-18. When the rotors are turned in the water those salience or teeth create effects that consist in the removal (moving away) of water from the interior part of the teeth, which allow the introduction of air at this point. The conception of those teeth as well as their function when turning inside water is to create the effect of breaking pressure that exists at that point and with that, allow the formation of a vacuum where the air is introduced.

[0044] At figure number 1 we can see a red disk. This part is one of the laterals of the disk. At the central part there is a hole to support an internal rotor axle. Over the red disk we can see at figure 1, in the green color the central part of the disk with parts that have the function of capturing the air inside the disk and pushing the same air through the hole protected by the external tooth. When the disk is turned counter-clockwise the external tooth removes (moves away) water and breaks pressure at the internal part of the tooth, exactly where the air has been pushed. In order to understand perfectly it is needed to imagine the function of the tooth, which is to move away (remove) water from the interior part in a conjugated and synchronized way with the air introduction. When the disk is turned counter-clockwise both things happen at the same time, continually. As they are continuants, they are automatically synchronized and one function allows the other to happen and vice versa. So, it is only possible for the tooth to move away (remove) water from the interior part because air has been introduced at the same moment and at the same point. Without air introduction, water would not move away and the pressure would not be broken. In the same way it is only possible to introduce air with low energy cost if pressure is broken by moving away water in the interior part of the tooth and at the air introduction point. In this function, the effect created from the tooth and the air introduction comprises the concept and conception of the disclosure.

[0045] At the moment when the air is introduced at the internal part of the tooth a new and clean energy is created. The air naturally releases itself from the interior of the tooth by its own energy towards the surface of the water, allowing that another quantity of air fulfills the space where it was before. Therefore, a continuous movement of air

entrance is formed at the interior portion of the tooth and a continuous movement of air leaving this place towards surface.

[0046] At figure 2 we can see that the tooth can be extended in the form of a cylinder and also a cone to spread the air. At figure 3 we can see the disk with another lateral in the color transparent blue with a central hole where the disk is fixed at the axle, and the air enters by the center of this axle. The disk rotation at the inferior part of the water column is already enough to introduce the air inside water. With the disk rotation the air is pulled through the internal part of the axle and pushed to the internal part of the tooth, acquires own energy and moves towards surface. This system spends very low energy. This energy is much inferior to the energy created by the air moving from the interior part of the tooth towards surface, and this difference results in the gain of clean and new energy created, which is the goal of this disclosure.

[0047] In the interior of the disk, according to the case, we can put a fan rotor with blades, figure 4. This rotor is started by an axle that goes inside a bigger axle and is supported in the internal roller bearing that is in the lateral as per figure 1, figure 5 and at the external activating. When it is turned clockwise, therefore in an inverted rotation from the external part of the disk, the rotor has the function of speeding the movement of air introduced inside water and towards water surface.

[0048] We have a second model of the tooth in the form of a disk where we change the tooth form. In this case the disk would have its face rounded, even and without teeth. The internal part is the same as the previous disk and at the air exit point outside the disk we put a small round tube with a small curve matching the air exit alignment and at the external part, the cylinder circumference alignment. At the edge of this small tube we will have an enlargement of the wall. At figure 6 we can see this conception, applying the concept that in this tubular format at the air exit point, it makes it easier to make vacuum with the rotation of the disk and so, increasing the air transit from inside the disk to outside and from there to the surface.

[0049] In this case we still have the option to add another tube of small diameter which, with the disk rotation, would allow the water transit inside the tube, helping to

move (carry) the air to the vacuum zone at the edge of the tube and from there to surface as we can see on figure 7.

[0050] The third model is similar to a screw as we can see in Figures 8-14. The assembled screw rotor is shown in Figure 14. Figures 8, 9 and 10 show separate perspective views of the parts of the screw assembly. Figure 8 is a flanged cone part **800** of the screw rotor assembly. Figure 9 shows an inside perspective view of the tubular sleeve **900** that is fastened to the flanged cone **800** shown in Figure 8. At figure 10 we see the same part **900** from an opposite perspective view and at Figure 11 the two parts **800** and **900** are assembled together. A cone shaped impeller **1000** is shown in top and bottom views respectively in Figures 12 and 13. The impeller **1000** is assembled into the cone **800** shown in figure 11. This cone **1000** has a complementary cone portion **1404** which fits into the cone **800**. The impeller **1000** sends air to the entrance holes **1406** into water and teeth **1402** at the external part in the form of a part of a bottom. At figure 14 we can see the set **1400** assembled and including the teeth **1402** at the central part. These teeth **1402** at the central part show that we can make other central surfaces or other levels with the finality of increasing the number of teeth.

[0051] Once the screw rotor is turned (spun) at the inferior part of the water column, all happens in the same concept and the same conception of the tooth of the disc rotor or the tooth formed by the small tube. The spin of this screw **1400** will promote the water to move away (removal) from inside the teeth **1402**. This removal is possible because at the same moment and at the same point, the air is introduced and breaks pressure, allowing the air introduction at the interior part of the tooth. The air creates its own energy and is released from the interior of the tooth towards surface, forming a continuous movement.

[0052] In this case we can also substitute the teeth **1402** that we can see at the figure 14 by small tubes **72** such as are shown in Figures 7a and 7b with some curving that will allow the match with the air exit point and along the way of the rotor circumference.

[0053] Many variations in the rotor structure could be used to introduce the air into water. Thus any kind of tooth or salience may be used that causes a pressure break in

a certain point inside the liquid, e.g. water, that facilitates the air introduction at the same time that water moves away. The water moves away because there is air to be pulled and so the water moves this air that goes towards surface. Here we have a specific function that generates the desired effect. This results in air introduction at the bottom of the water column with a small cost of energy. This cost is less than the energy created naturally during the path of the air towards the surface.

[0054] The rotating movement of this rotor either in the form of a disk, with teeth or with small tubes at the exit, as well as in the form of a screw also with teeth or small tubes at the exit allow all functions and effects above mentioned and the air is introduced into the water column with a small energy cost, that less than the energy generated as we will see in the second stage as we mentioned initially.

[0055] The air introduction at the inferior part of a water column or tank filled with any kind of liquid, can be used for many other goals, for example: the air introduction or any kind of gas in tanks with any liquid, the homogenization or fastener of any liquid in tanks and many other functions/use.

[0056] In order to spin any of the types of rotors at the inferior part of the water column, a system with two engines that are connected by belts in the two axles may be utilized. In the bigger axle is connected the external part of the disk rotor or screw rotor and when it is the case, in the smaller axle, the internal ventilator of the disk. This system that is presented at figure 15 allows the two axles to spin in any direction and in high rotation, as well as to choose different rotation for each one of the axles. Any of the rotors are inside a small tank that is at the external wall of the water column. The air that leaves from any of the rotors naturally moves through the superior part of the small tank to inside the water column. When we are not using the fan small axle, we can just use the set of engine and bearing which are beside the water column.

[0057] When the disk rotor model or screw rotor does not need high rotation, I projected the model of figure 16 where we have only the two engines. The bigger axle is the same axle of the engine next to the tank. In this case, the air is passing inside the tubular engine axle to get to the rotors. When it is applicable, a second engine where

the smaller axle is supported starts this axle that passes inside the other engine axle, spinning the internal fan. This is a much simpler system, but the maximum rotation is limited to the engine rotation. At figure 16 we can see clearly that the air while releasing from any of the rotors, naturally moves inside the water column.

[0058] CAPTURING AND MAKING AVAILABLE THE AIR ENERGY INSIDE WATER WHILE MOVING TOWARDS SURFACE

[0059] This portion of the present disclosure refers to a system with the objective of capturing the air that was put at the inferior, i.e., lower, part of a water column or tank while moving towards water surface. This is the second stage of the total project in a separate way. Because, besides the air introduced in the bottom of the water column, at the first stage of the whole process as above described, there are other sources of air or gases in many types of industries, which are released into the atmosphere due to low pressure. These air or gases of lower pressure can be directed in the present disclosure and used for the creation of energy. For this reason, this disclosure, although it is the second stage of the set, has a proper utilization.

[0060] It is not known nowadays any technique with the objective of capturing air inside water, use its energy and make this energy available for general use.

[0061] The goal of this disclosure is to capture any quantity of air that exists in any way inside a water column or tanks in general, rivers and dams and to use the energy that this air has while moving towards water surface.

[0062] Figures 15-18 show an exemplary tank that we call "water column" 2010 where we can see at the bottom of the tank the described equipment to introduce air inside water. It is important to clarify that although in the disclosure here, we refer to water as the internal liquid of the tank, we also could use a very thin mineral oil, or mix a soluble mineral oil into water to promote lubrication and avoid rust.

[0063] This disclosure consists in driving the air to the interior of the buckets that are fixed in a chain. This chain moves supported by two axles over bearings. Those buckets **2030** that we can see in figures 15 and 16 make an ascending movement while they are filling with air. Still at Figures 15 and 16 we can watch all system of the

inferior part of the water column. The buckets **2030** go down lined at the descendent side of the chain **2020**, make the turn at the inferior axle **2014** and line up again at the ascending side of the chain. After turning around the inferior axle the bucket **2030** receives the airflow. We can also see the serrated wheel **2012** that supports and guides the chain **2020**, the chain **2020**, the bearings, and a curved plate which has the function of driving air inside the buckets **2030**.

[0064] At figure 17 we can see the system at the superior part of the water tank **2010** the buckets **2030** rising at the ascending point filled with air, turning around the superior axle **2018** and, at that point, releasing air at the water surface and entering the descendent side, to return to the inferior axle and to be again loaded with air. We can see the axle **2018**, the buckets **2030**, bearings and the (transparent) tank body **2010**. Still at figure 17 the primary axle **2018** with an estimated rotation at 120 rpm is pointed by an arrow. Just above is the water level. The energy captured in the air that exists in the inferior part of the column of water or tanks, dam, rivers, etc. will be available at the primary axle. The present disclosure is concluded with the generation of energy at the primary axle **2018**.

[0065] Still at figure 17 I am showing the transmission of this energy to an axle at the top of the water column where we have a generator **2050** for a rotation of 300 rpm plus an engine connected to another generator with rotation of 600 rpm. This part of the figure 17 is only illustrative to show that we shall generate energy at the primary axle at 120 rpm, or use any kind of transmission to more convenient rotations.

[0066] It is possible to project other kinds of mechanisms to capture the energy of air inside water while moving towards surface. However, I require and claim the patent registration for the second part of this project, which consists of the creation and conception of a concept which is to capture this energy and for the function that creates the effect of joining this energy and makes it available in an axle or in another way that it could be used. I require and claim this patent in a separated way and also together with the first stage of the system. I repeat once again that it is not only the air or gases introduced in the method of the first stage that could be used in the second stage. All

forms of air or gases with small pressure that today are lost in the atmosphere can be directed to a water column and generate energy following the presented disclosure.

FURTHER DETAILED DESCRIPTION

[0067] The present disclosure relates to an apparatus and associated methods for generating energy by capturing and taking benefit of the energy generated by any quantity of air surfacing inside water. In exemplary embodiments, the apparatus comprises compressing a lower density gas, such as air, in a liquid medium, such as water, allowing the gas to naturally rise to the surface of the liquid medium and capturing and taking benefit of the kinetic energy generated by the upwardly moving and surfacing gas.

[0068] It should be appreciated that for simplicity and clarity of illustration, elements shown in the Figures and discussed below have not necessarily been drawn to scale. For example, the dimensions of some of the elements are exaggerated relative to each other for clarity.

[0069] Figure 18 illustrates an exemplary embodiment of the overall apparatus in accordance with the present disclosure. The apparatus **2000** includes a kinetic energy to electrical energy conversion portion and a low energy consumption air or gas compression portion located at the bottom of a tank in the form of a vertical column **2010**. The low energy consumption air compression portion will be discussed further below.

[0070] Near the bottom of the column **2010**, there is a chain or pulley wheel **2012** bearing supported on a fixed transverse axle **2014**. Near the top of the column **2010** another serrated chain wheel or pulley **2016** is attached to a bearing supported fixed transverse axle **2018**. A chain or belt **2020** connects the two serrated wheels **2012** and **2016**. The wheels and the chain produce a minimum amount of friction when moving inside the water or other fluid. The top serrated wheel rotates about an axle at the center of the top wheel. An endless chain or stack of upside down cups **2030** are supported by the belt or chain **2020** such that as the chain **2020** moves around the pulleys **2012** and **2016**, the cups, upside down, move from bottom to top, flip over, then

from top to bottom of the column **2010**. The driving force for the movement of the cups and hence the chain or belt **2020** is provided by air or gas bubbles caught and carried in the upside down cups **2030** as they move from bottom to top of the column **2010** via the buoyancy force applied to the cups by displacement of water or other fluid within the cups.

[0071] At the top of the column **2010**, a mechanical linkage is provided from the wheel **2016** to the rotor of an electrical generator **2050** as described in more detail below. However, at this point of the description, it should be noted that this portion, shown in Figures 17 and 18, provides the kinetic energy to electrical energy conversion portion of the apparatus.

[0072] In order for an energy generation apparatus to be a useful and efficient generation system, the energy input requirement ideally must be less than the output requirement. In the present disclosure, there is provided an apparatus for compressing gas into a transfer liquid simply and with minimal consumption of energy. The process basically involves introducing air or gas into the liquid at a point of extremely low pressure within the liquid, so low as to be known as a pressure break region.

[0073] In accordance with the present disclosure, a unique apparatus for compressing gas into a liquid such as water and then releasing such compressed gases such as air using very low energy for compression of the gases is presented. This apparatus is overall shown in the enlarged bottom end views of the column **2010** shown in Figures 15 and 16. More particularly, the actual mechanisms for compression of gases into the liquid are shown with reference to figures 1 through 14.

[0074] Figure 1 shows a top perspective view of a first embodiment of an impeller disc **10** in accordance with the present disclosure. The impeller disc **10** is a circular flat disc that has a series of peripheral vanes **14** thereon. The disc **10** has a central hole **12** surrounded by a roller bearing **13**. Rotation of the rotor or impeller disc **10** is counterclockwise as shown by arrow **16**. The trailing end of each of the vanes **14** forms a tooth **18**. The leading tip **20** of the vane **14** leads into a very small gap **22** at the outer periphery of the disc **10**. Air or gas is introduced into the central region of the disc **10**

while the disc **10** is immersed in liquid. In operation, as the disc **10** spins in the direction of arrow **16**, water and air together is scooped into the narrowing passage causing an increased pressure toward the gap **22**. However, just beyond the narrowest point in that passage, the tooth **18** changes angle sharply. As the disc **10** spins, this region adjacent tooth or tip **18** is at very low pressure causing any air compressed in the liquid to be released. Because the spinning impeller causes the gases introduced therein to be compressed with the liquid, there is very little energy expended in production of this effect. The net result is compression of gas in liquid for little expense. In addition, the expulsion of gas may be directed in useful ways, for example, in the present disclosure, into the bottom region of the column **2010** such that it can be captured in the upside down cups **2030** as briefly described above.

[0075] Figure 2 shows another embodiment of an impeller disc **40** in accordance with the present disclosure. Disc **40** again is a flat disc shaped body **42** that has a series of spaced vanes **14**. However, in disc **40**, the vanes **14** are stacked together in groups of four, for example, in an axial direction. This stacking gives more volume to the impeller cavity. In addition, a central axial cone **44** is provided. The cone **44** assists in distribution of gas and liquid into the impeller disc **40** during rotation basically as above described with reference to Figure 1.

[0076] Figure 3 shows a cylindrical sleeve **46** positioned axially over the cone **44**. This cylindrical sleeve **46** directs air into the cavity formed by the vanes **14** in the impeller **40** for entry and distribution of air into the central portion of the impeller **40**.

[0077] Figure 4 shows an enhanced impeller **50** which again has stacks of vanes **14** positioned around a flat impeller disc **52**. However, here, the central cone is reduced in size and a counter-rotating impeller **54** that has spaced curved blades **56** round the central distribution cone **58**. The impeller **54** rotates clockwise while the disc **50** rotates counter clockwise. The advantage of this configuration is that the counter rotating impeller **54** increases the pressure in the fluid, in turn increasing the amount of gas that is entrained in the liquid, and hence increases the amount of gas bubbles that the impeller **50** produces and feeds into the bottom of the column **2010**.

[0078] Figure 5 shows a combination of the enhanced impeller **50** with the gas distribution sleeve **46** positioned over the cone **58**. A concentric drive axle **60** is fastened to the disc **50** and drives the disc counterclockwise while an internal drive axle drives the clockwise rotation of the disc **54**.

[0079] Alternative arrangements of the impeller disc shown in Figures 1-4 are shown in Figures 6a and 6b. Here the impeller disc **60** is clockwise rotation. At the point of maximum compression which corresponds in Figures 1-5 also to the point where the teeth exist, there are tubes **62** that trail in the fluid outside the impeller disc, thus further reducing pressure and enhancing expulsion of compressed gases into the surrounding fluid in which the impeller **60** is immersed. Figures 6a-b provide additional variations. In Figure 6b, each tube **62** is provided with a smaller tube **64** facing in an opposite direction to increase the water or liquid flow past the point of vacuum or pressure break, thus further enhancing the separation of entrained gas from the liquid in a similar manner to that of a venturi effect. In Figure 6b each tube **62** is further improved with a flared tip **66**.

[0080] Figures 7a and 7b illustrate a tubular impeller arrangement in which the impeller function is primarily performed by the peripheral tubes **72** simply radially extending from a tube **70**. Each tube **72** includes a terminal flare **74** to enhance the vacuum formation effect as the rotating tube **70** turns in the liquid such as water. The gas, in this embodiment is introduced axially through the tube **70**.

[0081] A third impeller arrangement may be in the form of a screw arrangement **1400** as shown in Figures 8 through 14. The assembled screw **1400**, as is shown in Figure 14, in this third model is rotated by a central axial shaft such that the entire assembly rotates as a unit. The teeth **1402** are shown best in Figures 12 and 14. The component parts **800**, **900** and **1000** of the screw **1400** are separately shown in Figures 8, 9 and 10. At Figures 9 and 10 we see front and rear views of the same part **900** and at Figure 11 the two parts **800** and **900** assembled and viewed from the other end in Figure 11. At Figure 12 and 13, which are assembled at the top of Figure 11, we can see the impeller **1000** which has the cone **1404** which sends air to the entrance holes **1406** into

water and teeth **1402** at the external part in the form of a part of a bottom. At Figure 14 we can see the screw set assembled and including the teeth **1402** at the central flange of part **800**. These teeth **1402** on the central flange show that we can make other central surfaces or other levels with the finality of increasing the number of teeth **1402**.

[0082] Once the screw rotor **1400** is turned (spun) at the bottom of the water column **2010**, the screw rotor **1400** operates similarly to that described above with reference to Figures 1-5, or the tooth formed by the small tubes in Figures 6a, 6b. The spin of this screw will promote the water to move away (removal) from inside the teeth. When this occurs, a low pressure region is created permitting air introduction. This removal is possible because at the same moment and at the same point, the air is introduced and breaks pressure, allowing the air introduction at the interior part of the tooth. The air creates its own energy and is released from the interior of the tooth towards surface, forming a continuous movement.

[0083] The screw rotor **1400** may be modified to a structure wherein some of the teeth **1402** are replaced by bent tubes as in Figures 6a and 6b. This alternative arrangement gives a slightly different flow of air bubbles due to the flow dynamics at the outlets of the tubes.

[0084] While the above description contains many particulars, these should not be considered limitations on the scope of the disclosure, but rather a demonstration of embodiments thereof. The process and methods disclosed herein include any combination of the different species or embodiments disclosed. Accordingly, it is not intended that the scope of the disclosure in any way be limited by the above description. The various elements of the claims and claims themselves may be combined in any combination, in accordance with the teachings of the present disclosure, which includes the claims.

CLAIMS

1. A method of generating energy comprising:
introducing a gas into a liquid medium below a surface of the liquid medium;
allowing the gas in the liquid medium to rise to the surface; and
converting the kinetic energy in the surfacing gas into useable energy.
2. The method of claim 1 wherein introducing the air into water below the surface of the water further comprises providing a low pressure area in the liquid medium and simultaneously compressing air into the low pressure area.
3. The method of claim 2 further comprising providing a circular rotor in the water, the rotor having a plurality of teeth on an outer edge of the rotor, a cavity formed within the rotor for the introduction of air, the cavity having a plurality of blades extending towards the outer edge, the blades ending in an orifice in the teeth of the rotor.
4. The method of claim 3 further comprising rotating the rotor to produce an area of lower pressure at each tooth on the outer edge to provide a vacuum for the introduction of air.
5. The method of claim 2 further comprising a cylinder in the water, the cylinder having a plurality of streaks along the circumference of the cylinder, a plurality of orifices in each cylinder, a cavity formed in the cylinder having a plurality of blades extending towards each streak in the cylinder terminating in an orifice.
6. The method of claim 5 further comprising rotating the cylinder to produce an area of lower pressure at each streak on the outer edge of the cylinder to provide a vacuum for the introduction of air.

7. The method of claim 2 further comprising a pipe enclosing and axle with lateral ducts in the form of a spiral, the ducts terminating in blades extending into the water.

8. The method of claim 7 further comprising rotating the axle within the pipe to produce an area of lower pressure at each blade on the end of the axle to provide a vacuum for the introduction of air.

9. The method of claim 2 wherein the useable energy generated is greater than the energy required to introduce air into the water.

10. A method of compressing a gas into a liquid medium comprising providing a low pressure area in the liquid medium; and simultaneously compressing air into the low pressure area.

11. The method of claim 10 further comprising providing a circular rotor in the liquid medium, the rotor having a plurality of teeth on an outer edge of the rotor, a cavity formed within the rotor for the introduction of air, the cavity having a plurality of blades extending towards the outer edge, the blades ending in an orifice in the teeth of the rotor.

12. The method of claim 11 further comprising rotating the rotor to produce an low pressure area at the orifice.

13. The method of claim 10 further comprising a cylinder in the liquid medium, the cylinder having a plurality of streaks along the circumference of the cylinder, a plurality of orifices in each cylinder, a cavity formed in the cylinder having a plurality of blades extending towards each streak in the cylinder terminating in an orifice.

14. The method of claim 13 further comprising rotating the cylinder to produce an area of lower pressure at each streak on the outer edge of the cylinder to provide a vacuum for the introduction of the gas.

15. The method of claim 10 further comprising a pipe enclosing and axle with lateral ducts in the form of a spiral, the ducts terminating in blades extending into the liquid medium.

16. The method of claim 15 further comprising rotating the axle within the pipe to produce an area of lower pressure at each blade on the end of the axle to provide a vacuum for the introduction of air.

17. The method of claim 10 wherein the useable energy generated is greater than the energy required to introduce the gas into the liquid medium.

18. An apparatus generating usable electrical energy comprising:
a tank filled with a liquid medium;
a compressor to introduce a gas having a lower density than the liquid medium into the liquid medium;
air introduction equipment to provide a low pressure area in the liquid medium for low energy compression of the gas;
an energy conversion mechanism attached to an energy conversion axle, the energy conversion mechanism able to capture the surfacing gas; and
a generator attached to the energy conversion axle to convert the kinetic energy in the surfacing gas into usable energy.

19. The apparatus of claim 18 wherein the energy conversion mechanism comprises a pair of serrated wheels, a chain or belt extending between the wheels and capable of rotating about the wheel; and a plurality of cups attached to the wheel to capture the surfacing gas.

20. The apparatus of claim 19 wherein the cups comprise a cylindrical body portion, the cylindrical body portion terminating in one end with a pair of doors, the doors having a density lower than the liquid medium, and terminating in the other end with widened opening.

21. The apparatus of claim 18 wherein the air introduction equipment comprises a circular rotor attached to an axle in the liquid medium, the rotor having a plurality of teeth on an outer edge of the rotor, a cavity formed within the rotor for the introduction of air, the cavity having a plurality of blades extending towards the outer edge, the blades ending in an orifice in the teeth of the rotor.

22. The apparatus of claim 21 wherein the rotor is rotated in the liquid medium to produce a low pressure area at the orifice.

23. The apparatus of claim 18 wherein the air introduction equipment comprises a cylinder attached to an axle in the liquid medium, the cylinder having a plurality of streaks along the circumference of the cylinder, a plurality of orifices in each cylinder, a cavity formed in the cylinder having a plurality of blades extending towards each streak in the cylinder terminating in an orifice.

24. The apparatus of claim 23 further comprising rotating the cylinder to produce an area of lower pressure at each streak on the outer edge of the cylinder to provide a vacuum for the introduction of the gas.

25. The apparatus of claim 18 wherein the air introduction equipment comprises a pipe enclosing an axle with lateral ducts in the form of a spiral, the ducts terminating in blades extending into the liquid medium.

26. The apparatus of claim 25 further comprising rotating the axle within the pipe to produce an area of lower pressure at each blade on the end of the axle to provide a vacuum for the introduction of air.

27. The apparatus of claim 18 wherein the useable energy generated is greater than the energy required to introduce the gas into the liquid medium.

28. The apparatus of claim 18 wherein the air introduction equipment is placed into a second water tank, the second water tank attached to the tank by an ascendant pipe allowing the gas to travel through the water into the tank.

1/13

FIG. 1


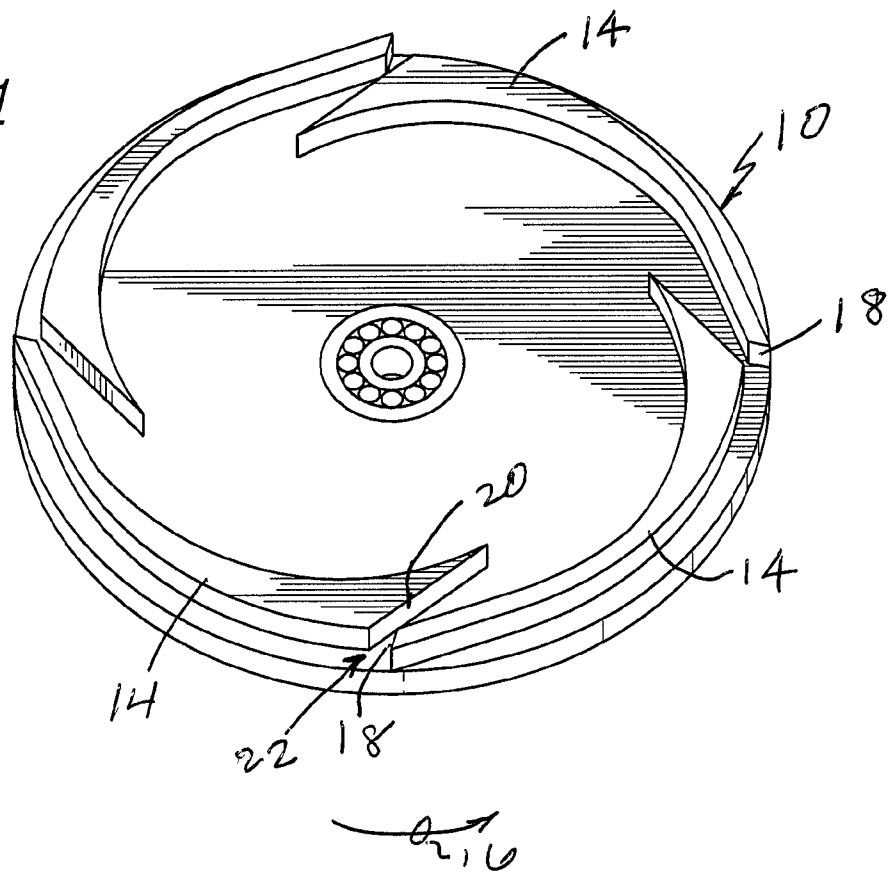


FIG. 2

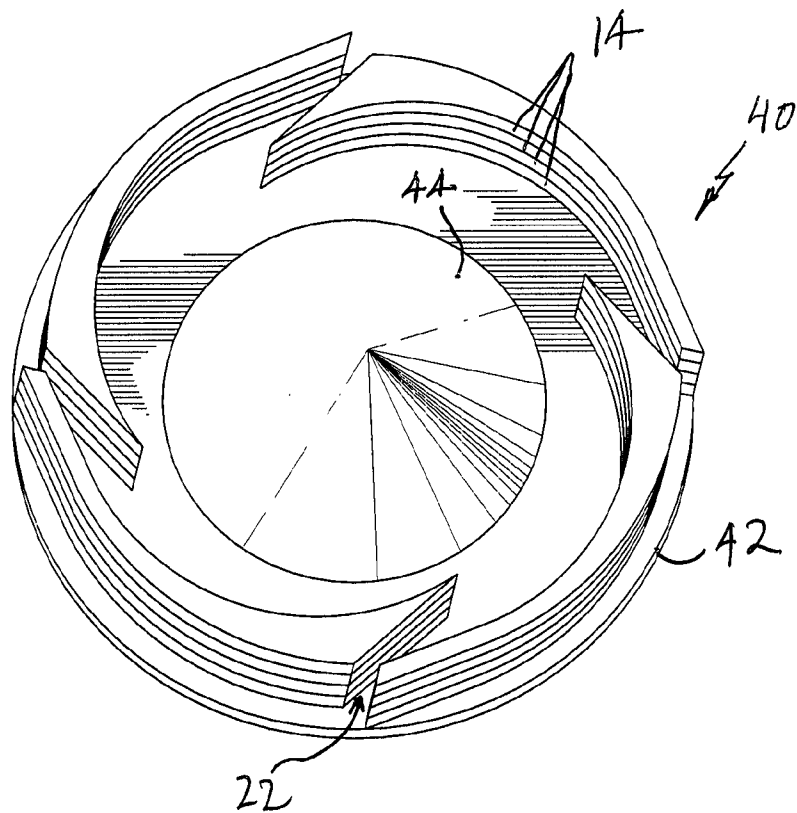

2/13

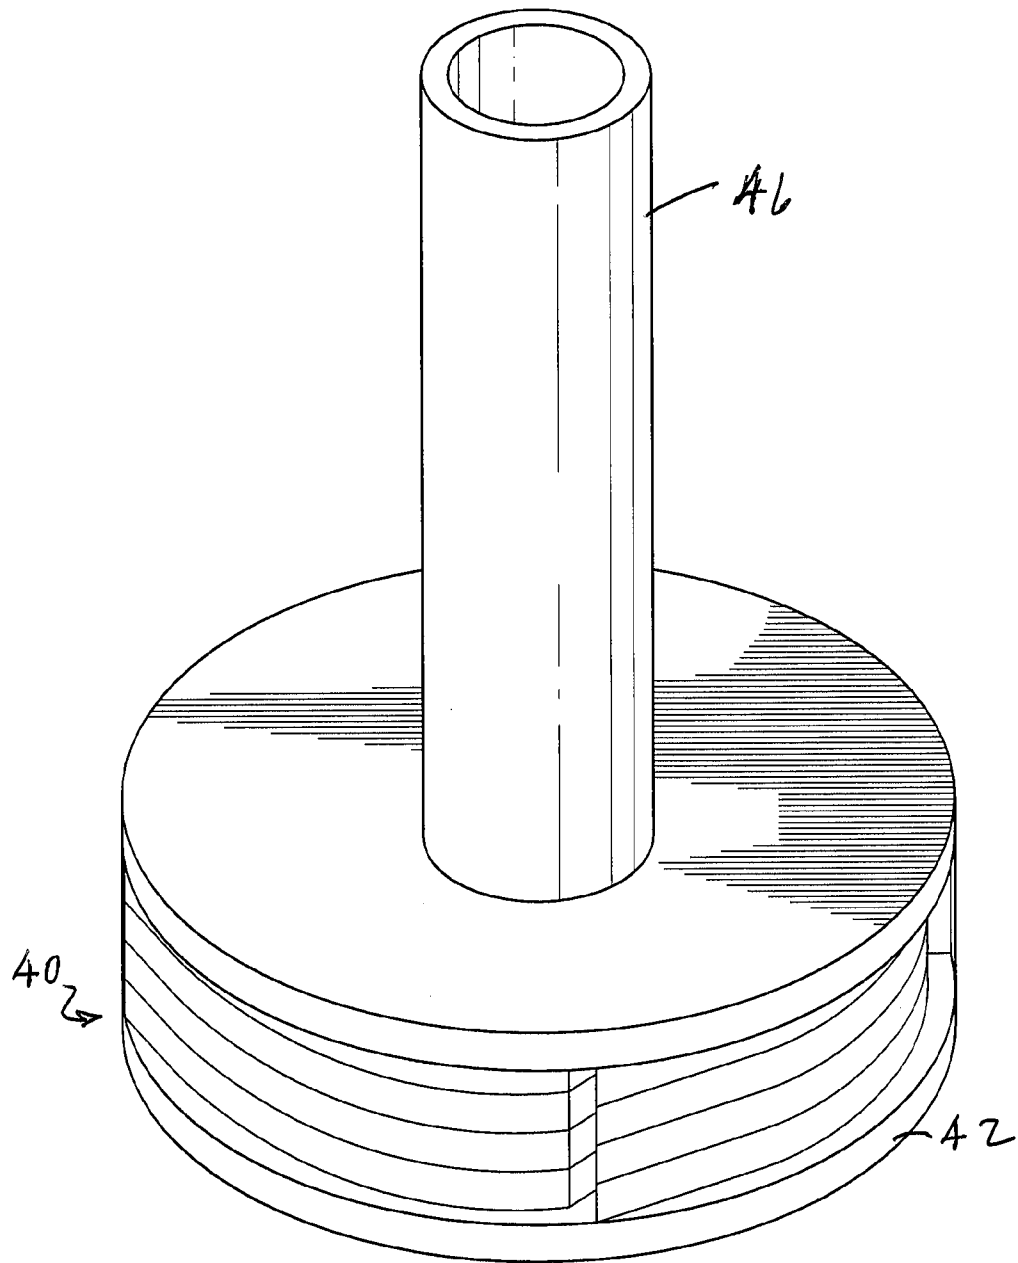


FIG. 3

3/13

FIG. 4


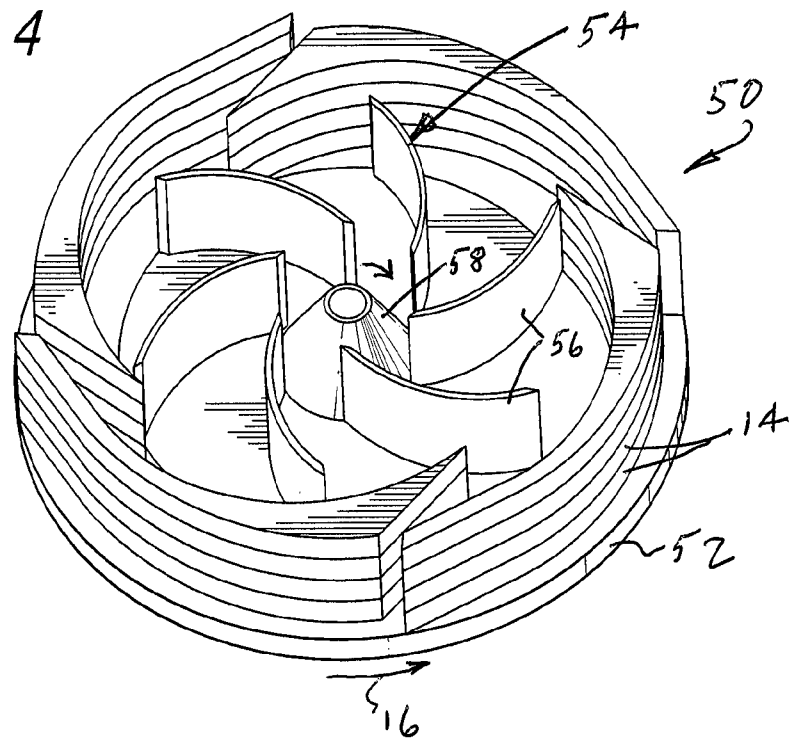


FIG. 5

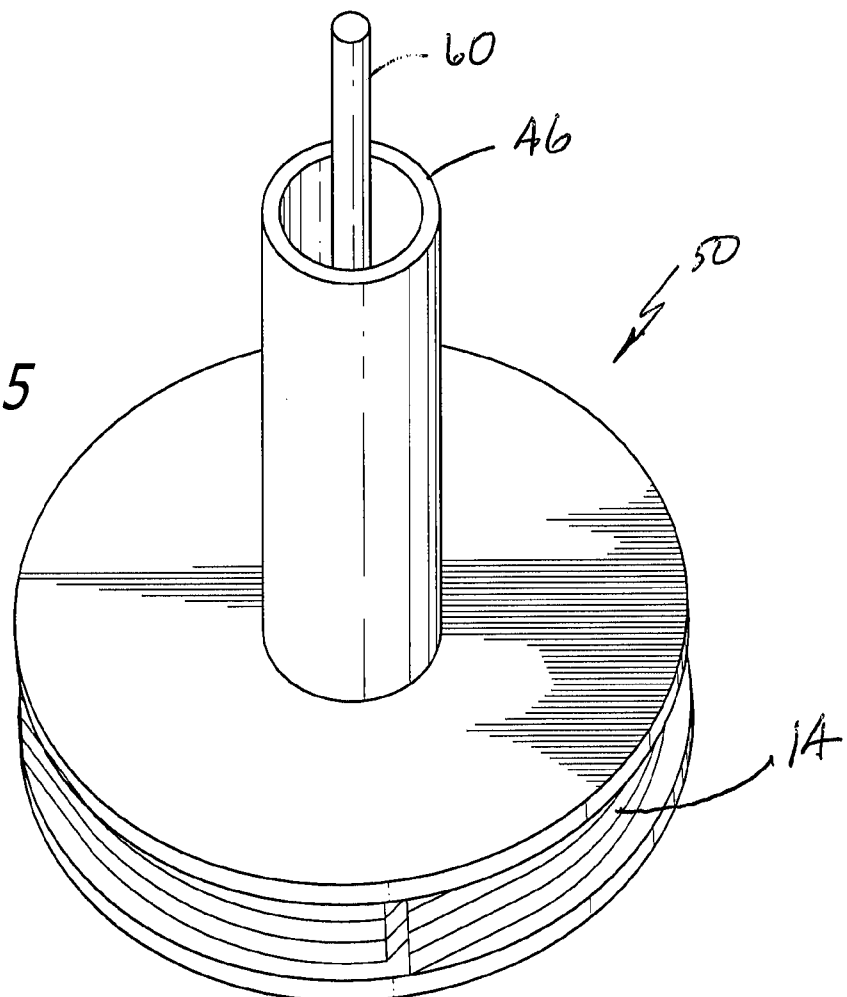

4/13

FIG. 6A




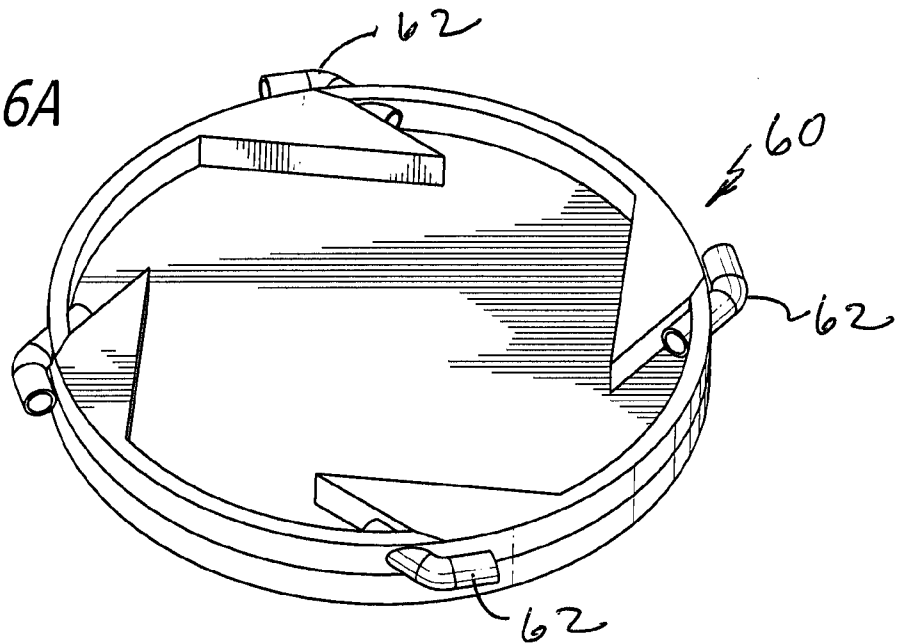


FIG. 6B

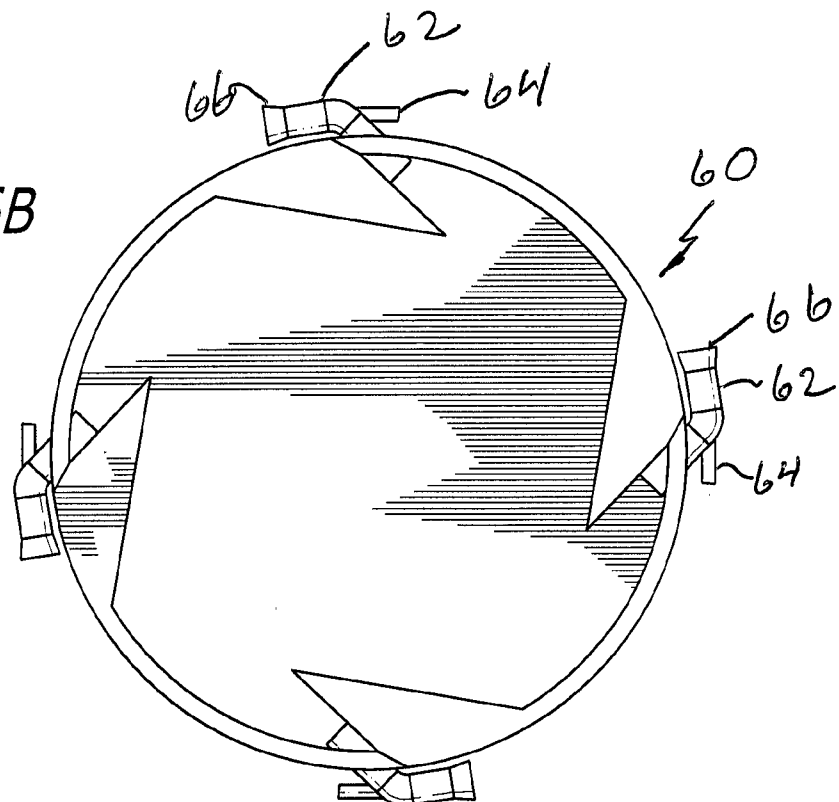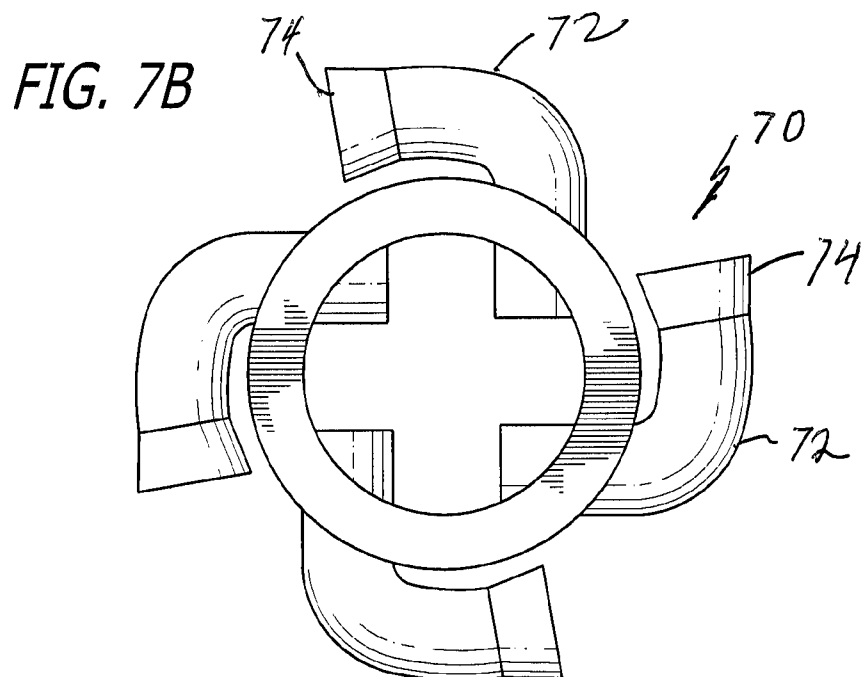

5/13

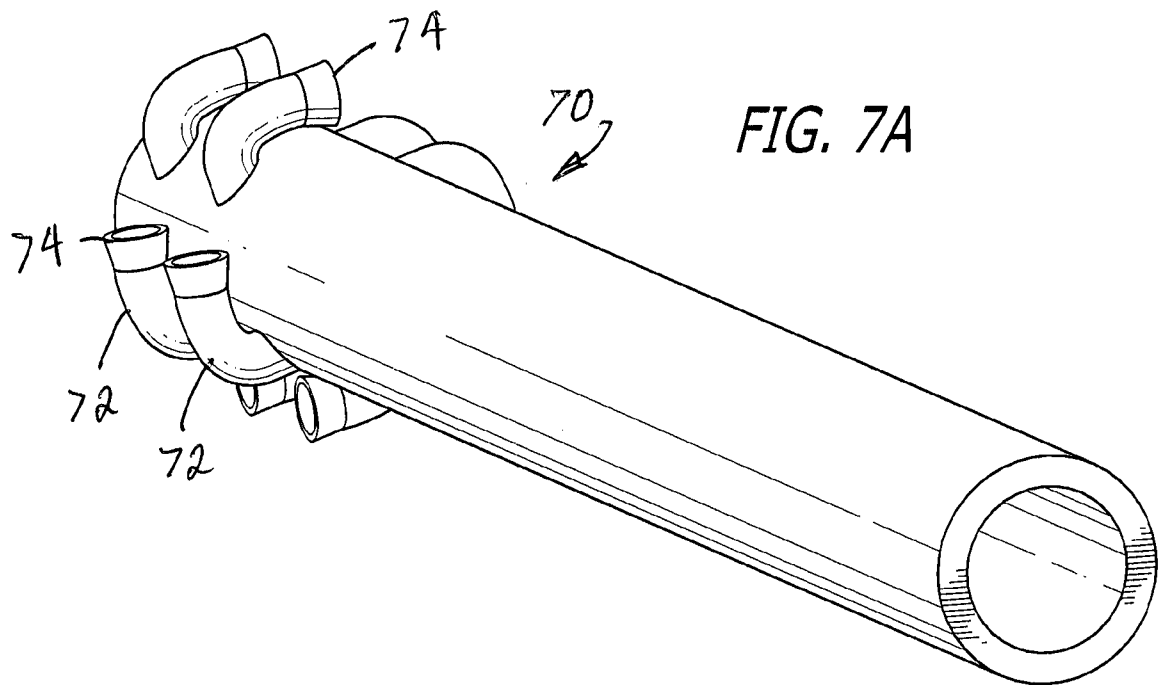

6/13

FIG. 8


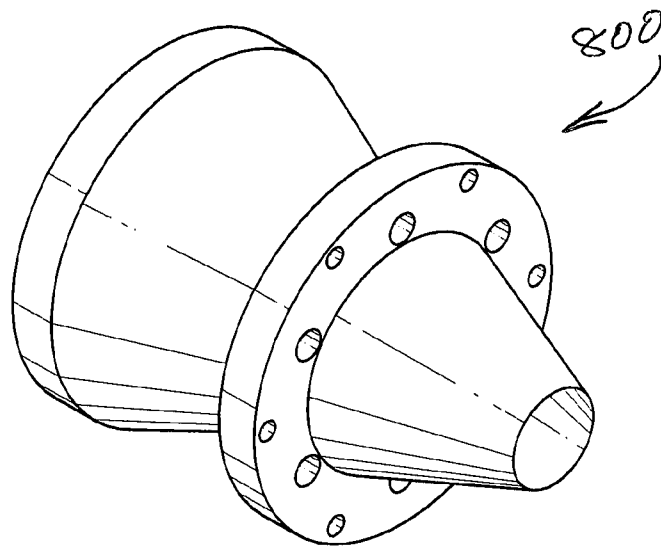


FIG. 9

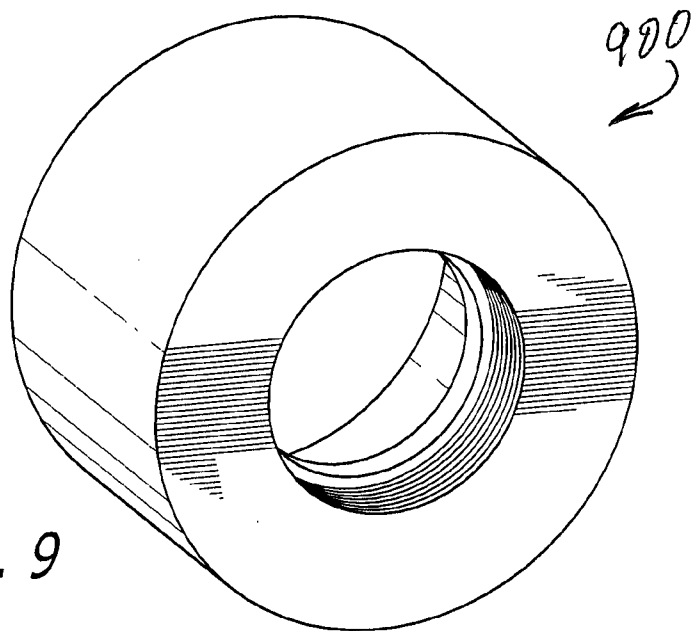

7/13

FIG. 10


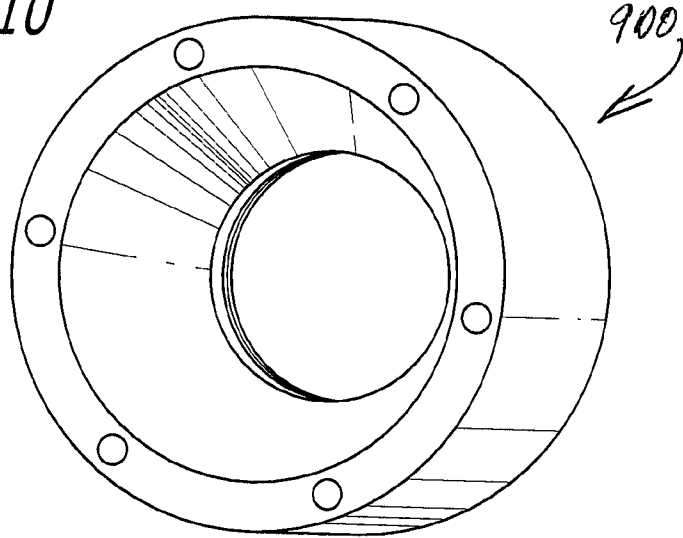


FIG. 11

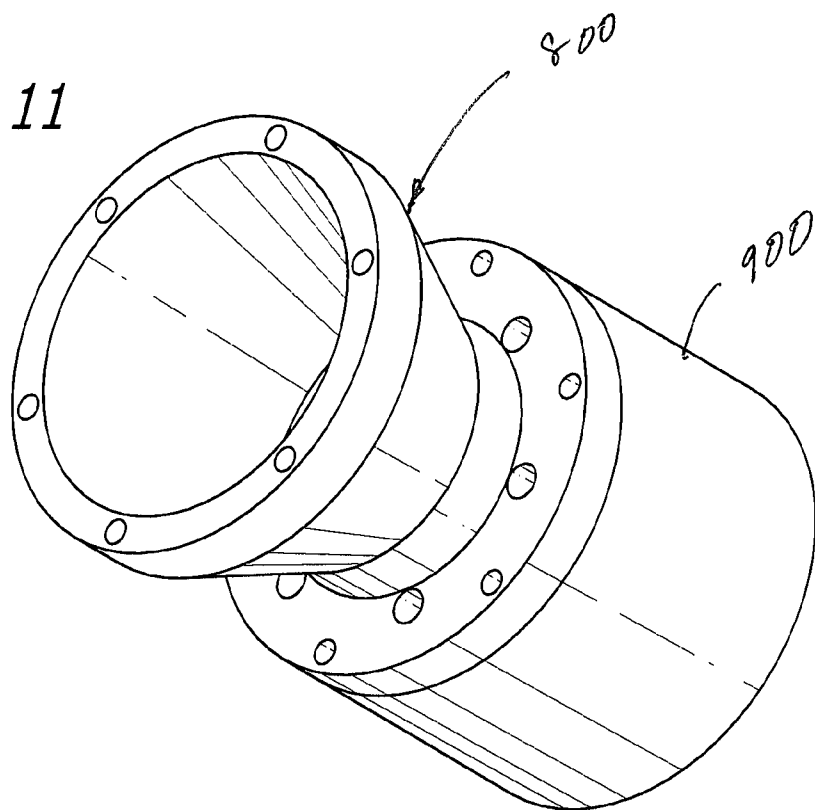

8/13

FIG. 12



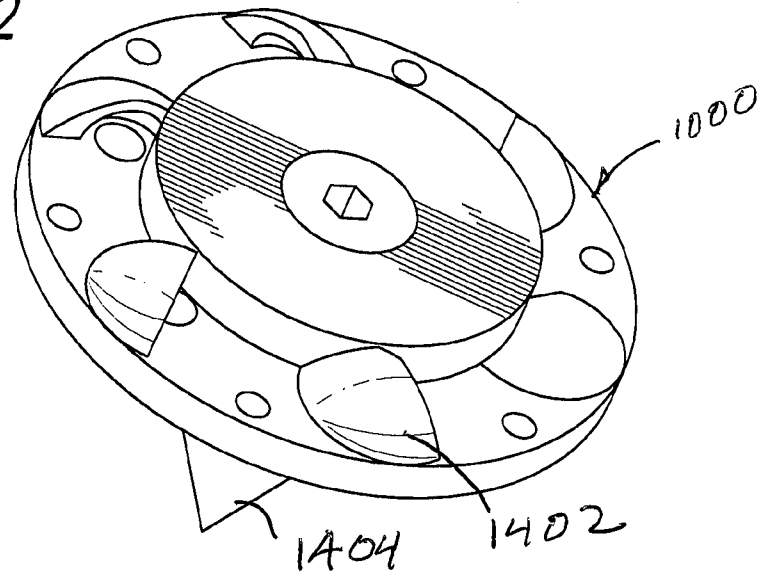


FIG. 13

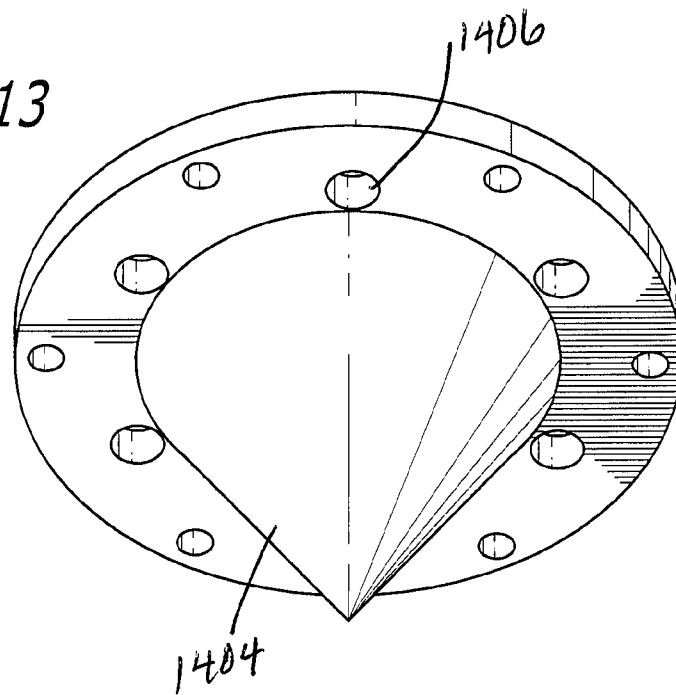

9/13

FIG. 14

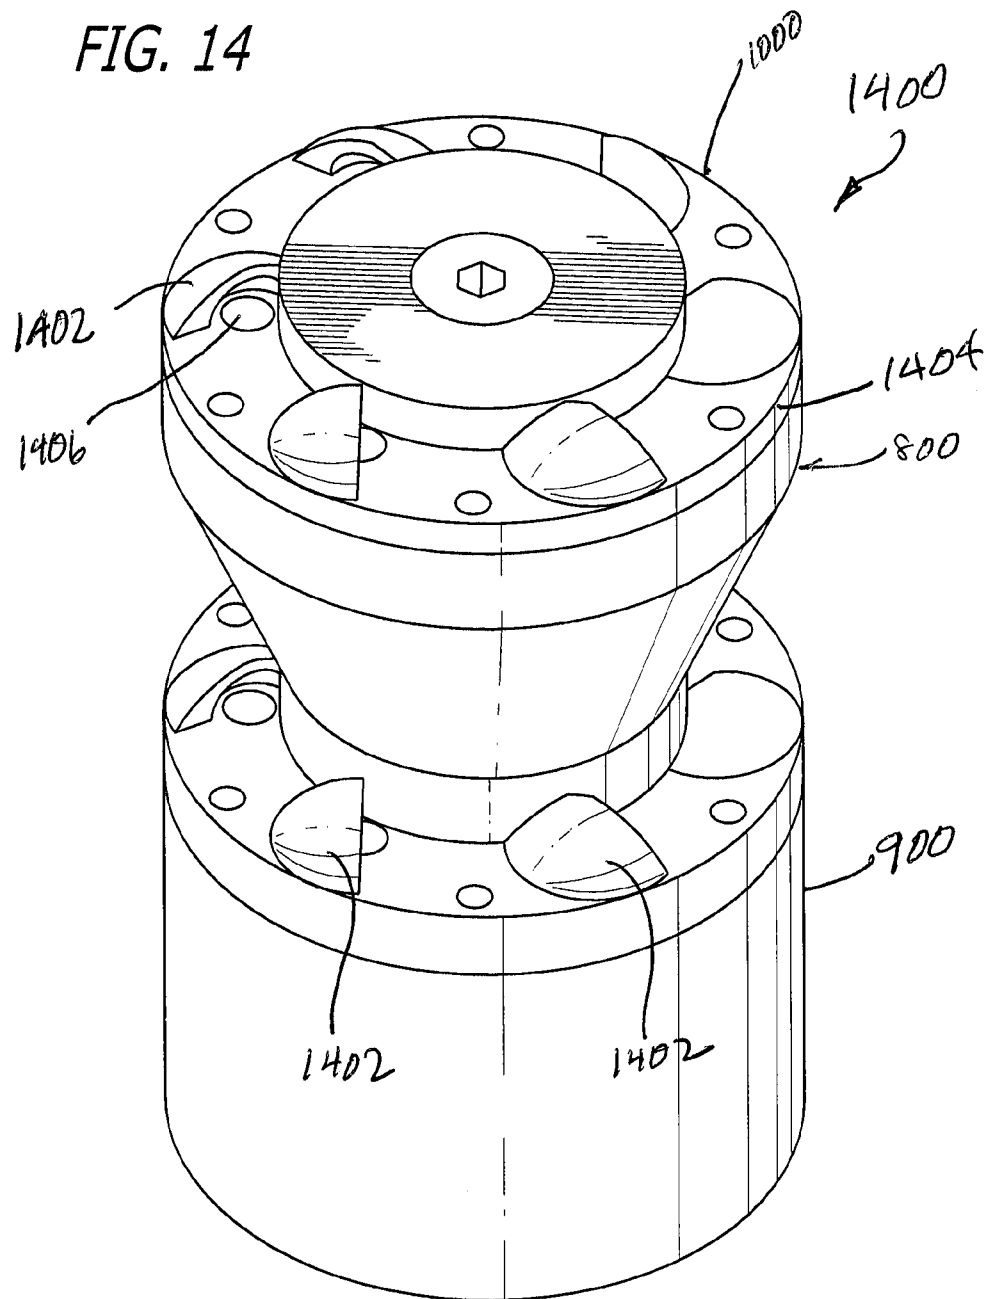

10/13


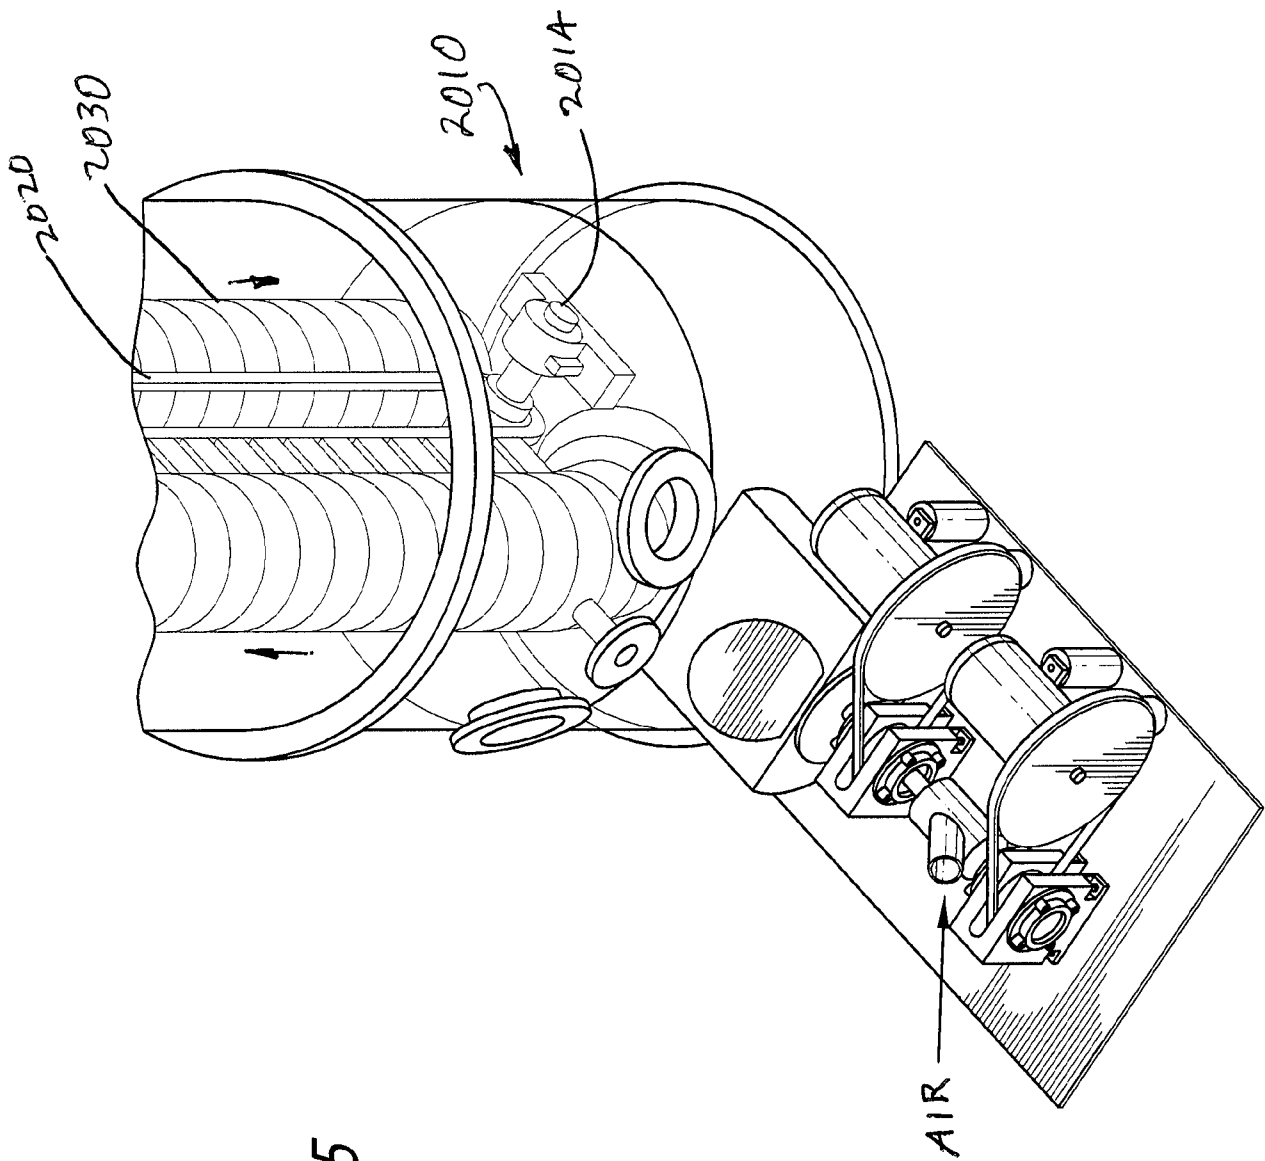


FIG. 15

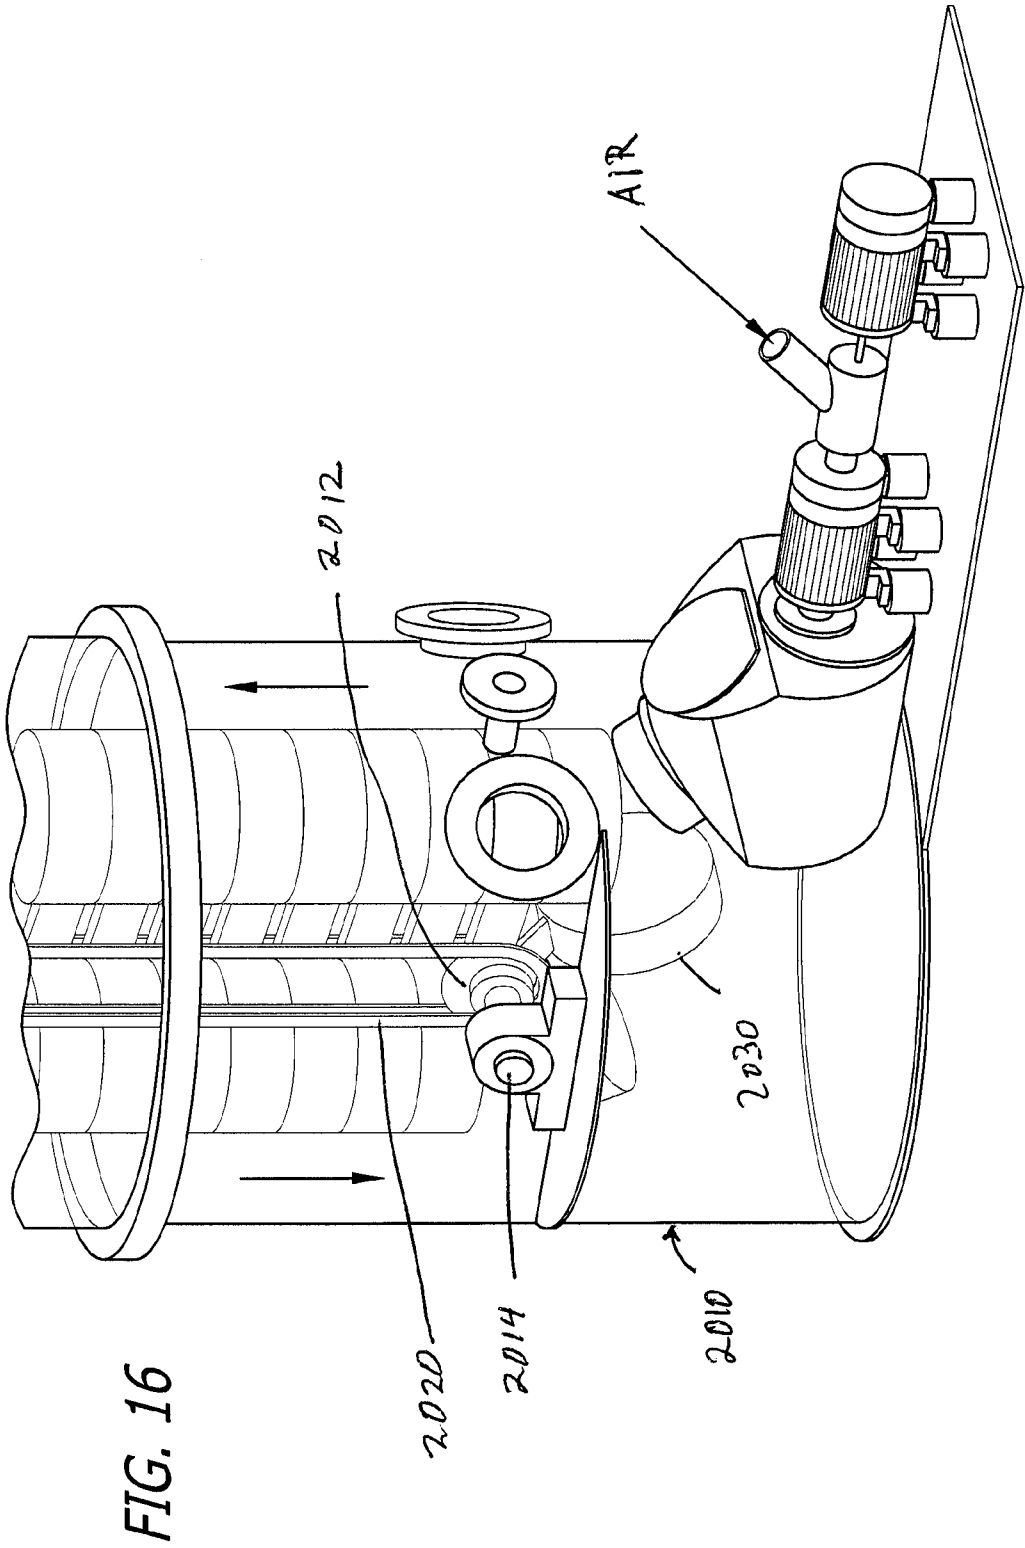

12/13

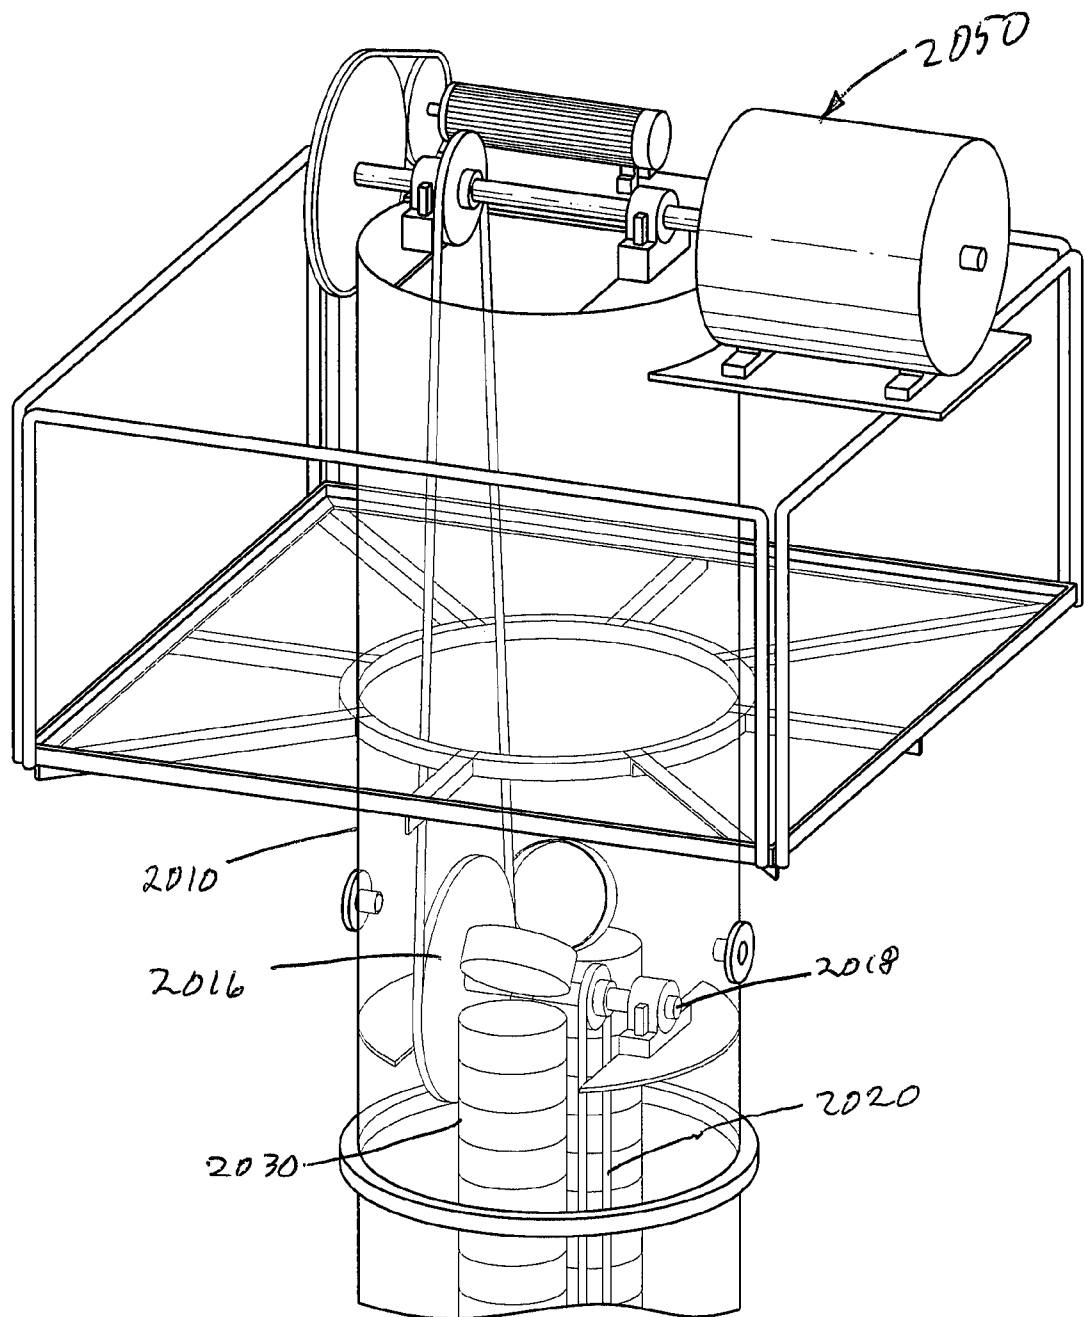


FIG. 17

13/13

FIG. 18

