

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 087 203 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
03.05.2006 Bulletin 2006/18

(51) Int Cl.:
F42B 12/18 ^(2006.01)

(21) Application number: **99850141.5**

(22) Date of filing: **27.09.1999**

(54) **Method for a multiple hollow charge and a multiple hollow charge for implementing the method**

Methode zum Gebrauch einer Mehrfachhohlladung und Mehrfachhohlladung zur Durchführung der Methode

Procédé d'utilisation d'une charge creuse multiple et charge creuse multiple pour réaliser ce procédé

(84) Designated Contracting States:
CH DE ES FR GB LI

(43) Date of publication of application:
28.03.2001 Bulletin 2001/13

(73) Proprietor: **Saab AB**
581 88 Linköping (SE)

(72) Inventor: **Magnusson, Björn**
632 26 Eskilstuna (SE)

(74) Representative: **Falk, Bengt**
Saab Bofors Support AB
Patents and Trademarks
691 80 Karlskoga (SE)

(56) References cited:
DE-A- 2 460 303 **FR-A- 999 974**
FR-A- 2 493 506 **US-A- 3 750 582**

EP 1 087 203 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] The present invention relates to a method for a multiple hollow charge for bringing about an increased effect on or after penetration of protection, and a multiple hollow charge comprising at least a first and a second hollow charge arranged so as to act in essentially the same direction against a protection in order to penetrate the same, which hollow charges comprise an explosive charge with a liner, and which multiple hollow charge comprises means of detonation of the hollow charges, a hollow-charge jet for action against the protection being formed from each charge on detonation of a hollow charge. In this context, hollow-charge jet relates to both extending jets and jets which have the nature of a projectile.

[0002] Multiple hollow charges and in particular tandem hollow charges of the above type have been known for a long time, see for example GB 2 239 694. In the known multiple hollow charges, the component hollow charges act one after another in essentially one and the same hole on penetration of a protection. This means that the penetration capacity of the charges is added completely or partly.

[0003] Another example of a multiple hollow charge is known from FR-A-2 493 506. A said document is taken as base for the preambles of both claims 1 and 9. Hollow charge jets from at least two hollow charges are added to each other during the generating phase of the hollow-charge jets. The hollow charge jets are added directly in the multiple hollow charge and any increased effect due to this adding is effecting within the multiple hollow charge.

[0004] Yet another example of a multiple hollow charge is known from US-A-3 750 582. In this case the slug of a jet of a rear charge is used to ignite a front charge. The high-velocity part of the jet of the rear charge is design to first hit the target. Then the high-velocity part of the jet of the front charge reaches the target followed by the slug of the jet of the front charge. As a last part the slug of the jet of the rear charge may reach the target in a weakened shape.

[0005] Still another example of a multiple hollow charge is disclosed in FR-A-999 974. The charges effect the protection or target one by one in succession. The effect of a charge is added to the effect of one or more former charges. The effect in the protection or target of each single charge is separated in time from the other charges.

[0006] A still further example of a multiple hollow charge is known from DE-A-24 60 303. The multiple hollow charge is intended for underwater applications and a jet of a first initiated charge is used to create an air or cavity hole for a subsequent jet generated by a second charges.

[0007] The object of the present invention is to increase the effect in connection with or after penetration of a protection, in particular armour protection. This is

achieved according to the method of the invention by causing a first hollow-charge jet from a first hollow charge and a second hollow-charge jet from a second hollow charge to collide in connection with penetration of the protection. In this context, the expression in connection with penetration of the protection means a period of time which lasts from a point in time immediately before penetration to a point in time immediately after penetration. In the event of collision having started immediately before penetration of the protection, it is a prerequisite that the collision procedure continues at least during parts of the penetration phase. The hollow charge according to the invention comprises means for causing the hollow-charge jets from at least the first and second hollow charges to collide in connection with penetration of the protection.

[0008] When the hollow-charge jet formed last collides with jet parts from the jet formed first, such as a slug, tail fragments or other parts with lower velocity than the tip of the hollow-charge jet formed last, on or after passage through the protection, the material from both the jets is spread. The spread material results in an increased effect according to one or more of the principles below.

- Production of a radial spread of splinters from fragments which collide, which increases the conventional fragmentation effect within a protected space, both because the number of splinters increases and because the splinters are sent out in other directions than is usual, that is to say from the inside of the protection.
- If the collision takes place within the (armour) protection, the conventional hole diameter is greatly increased on account of the radial force component caused by the collision. This produces an increased quantity of secondary splinters and thus a better effect. This phenomenon is particularly accentuated if the collision takes place close to the inside of the protection, that is to say at the end of the penetration process. The conventional effect in the form of splinters increases if the hole diameter increases.
- Combustion, alloying and other exothermic reactions are improved by various mechanisms. The spread of material leads to an improved oxygen supply and greater reaction surfaces. Furthermore, the energy supplied when the collision takes place can be sufficient to start reactions. The reactions have an effect within the spaces fired upon, in the form of an increase in temperature, pressure, hot splinters and smoke and so forth.

[0009] There are a number of possibilities for causing two hollow-charge jets to collide on or after penetration of the protection.

[0010] According to an advantageous embodiment, a control arrangement is adapted to initiate the second hol-

low charge depending on the initiation of the first hollow charge so as to cause the hollow-charge jets of the hollow charges to collide.

[0011] According to another advantageous embodiment, the geometrical distances between component hollow charges are dimensioned so that the faster part of the second jet catches up the slower part of the first jet on or after penetration of the protection.

[0012] According to other advantageous embodiments, the hollow charges have a different geometrical shape and/or different explosive properties as a result of the use of different explosive substances, initiation principles or the like.

[0013] Examples follow below of parameters which can be varied so as to change the properties of a hollow charge, including the mass/velocity of the hollow charge and the slug:

- the angle of the hollow-charge cone (the liner),
- the material thickness of the hollow-charge cone,
- the density of the hollow-charge cone,
- use of explosive substances with different detonation pressures,
- a greater or smaller quantity of explosive substance in the charge and the distribution of the explosive substance in relation to parts of the cone/the liner and the point of initiation,
- the selection of density and to a certain extent the thickness of the case of the charge,
- the initiation principle (central initiation/peripheral initiation).

[0014] The component charges are preferably of the jet-forming or projectile-forming type.

[0015] The ignition sequence of the hollow charges can be either that the front charge of two hollow charges is ignited first or that the rear charge is ignited first. In the latter case, according to one embodiment, the jet of the front hollow charge can also be included in a sectional area, which is to a greater or lesser extent empty, in the jet of the rear hollow charge. In this embodiment, parts other than the tip and tail of the hollow charges can be made to participate initially in the collision between two jets.

[0016] The invention is described in greater detail below with reference to the appended drawings, in which Figure 1 shows diagrammatically the activation of a multiple hollow charge of the tandem type at five points in time to illustrate the collision procedure, and Figure 2 shows diagrammatically a multiple hollow charge with a control arrangement.

[0017] The multiple hollow charge 10 shown in Figure 1 comprises a first and a second hollow charge 11 and, respectively, 12. The first hollow charge 11 comprises an explosive charge 13 with an associated liner 14, and the second hollow charge 12 comprises an explosive charge 15 with a liner 16. The central axes of the hollow charges coincide on a common centre line 17. No deto-

nators are shown but are assumed to be included according to any conventional solution.

[0018] Both the hollow charges can be of the projectile-forming type (IV) or of the jet-forming type (III). It is also possible for one hollow charge to be of the projectile-forming type and the other to be of the jet-forming type.

[0019] The activation procedure is described below.

[0020] At time T1, the multiple hollow charge is underway towards its target but neither of the hollow charges 11, 12 of the multiple hollow charge has as yet been ignited.

[0021] At time T2, the front charge 11 detonates. A hollow-charge jet 18 is generated.

[0022] At time T3, the jet 18 has moved forward a little in the trajectory.

[0023] At time T4, the rear charge 12 is ignited and a hollow-charge jet 19 is generated. The charges follow essentially the same trajectory towards the target.

[0024] At time T5, the jet 19 of the rear charge has caught up with the front hollow-charge jet 18 and a collision occurs between the faster parts of the rear hollow-charge jet and the rear parts of the front hollow charge, such as the slug, tail and other slow-moving parts. The hollow-charge jets 18, 19 penetrate or have at this time T5 penetrated a protection (not shown), for example armour protection on a tank. Arrows 20 indicate that great radial forces occur.

[0025] A procedure in which the front hollow charge is ignited before the rear charge has been described above. In the event that the rear hollow charge instead is ignited first, it must in some known way be ensured that the rear charge ignited first is allowed completely or partly to pass through the front charge. This does not form part of the invention and is therefore not described further. Refer to SE B 8205973-4 for examples of such charges.

[0026] The multiple hollow charge shown in Figure 2 is constructed in the same way as the multiple hollow charge shown in Figure 1 apart from that fact that a control arrangement 21 has been included between the two hollow charges. The control arrangement 21 delays the generation of the jet produced last of two hollow-charge jets to such an extent that the tip of the hollow-charge jet produced later catches up the slower parts of the hollow charge produced first in connection with penetration of the protection.

[0027] The delay between the ignition of two hollow charges can be brought about in many different ways. The decisive factors are inter alia the geometrical and other conditions in the charges and the distance from the charges to a predetermined collision point or a predetermined collision area in the vicinity of which a target to be combated is located.

[0028] An example of bringing about a delay is described in the abovementioned SE B 8205973-4. In this case, the delay is determined by the time it takes for the slug of relatively great diameter of the hollow-charge jet produced first to move to a predetermined position in order to initiate in this case the front charge. Other ex-

amples of known art are to use the delay which arises when a shock wave is made to travel a given predetermined distance in the shell structure or to include electronic delay circuits which prevent/delay initiation of charge two. Such delays can also be brought about by pyrotechnic or explosive elements or mechanical arrangements. Combinations of the above delay methods can also be used.

[0029] The invention is not limited to the exemplary embodiments described above, but a number of alternative embodiments are possible within the scope of the appended patent claims. The multiple hollow charge can thus comprise more than two hollow charges. The hollow charges can be ignited in reverse order, that is to say a rear charge before a front charge and so forth. Furthermore, the hollow charges can have different calibres, different geometries moreover and contain different materials.

Claims

1. Method for a multiple hollow charge (10) for bringing about an increased effect on or after penetration of protection, a first hollow-charge jet (18) from a first hollow charge (11) and a second hollow-charge jet (19) from a second hollow charge (12) interfering with each other, **characterized in that** the interfering of the first and second hollow charges (11, 12) is caused to take place in connection with the penetration of the protection by colliding the jets (18, 19) in connection with the penetration of the protection.
2. Method according to the preceding patent claim, **characterized in that** the geometrical distances between component hollow charges (11, 12) are dimensioned so that the faster part of the second jet (19) catches up the slower part of the first jet (18) on or after penetration of the protection.
3. Method according to either of the preceding patent claims, **characterized in that** the component hollow charges (11, 12) are given a different geometrical shape in order that the faster part of the second jet will catch up the slower part of the first jet in connection with penetration of the protection.
4. Method according to any one of the preceding patent claims, **characterized in that** the component hollow charges (11, 12) are given different explosive properties as a result of the use of different explosive substances, initiation principles or the like in order that the faster part of the second jet will catch up the slower part of the first jet in connection with penetration of the protection.
5. Method according to any one of the preceding patent claims, **characterized in that** the delay of activation of the second hollow charge (12) in relation to the first hollow charge (13) is controlled so that the faster part of the second jet catches up the slower part of the first jet in connection with penetration of the protection.
6. Method according to any one of the preceding patent claims, **characterized in that** the rear charge (12) of two hollow charges is ignited before the front charge (11).
7. Method according to Patent Claim 6, **characterized in that** the jet (18) of the front hollow charge is included in a sectional area, which is to a greater or lesser extent empty, in the jet (19) of the rear hollow charge.
8. Method according to any one of Patent Claims 1-5, **characterized in that** the front charge (11) of two hollow charges is ignited before the rear charge (12).
9. Multiple hollow charge (10) comprising at least a first and a second hollow charge (11, 12) arranged so as to act in essentially the same direction against a protection in order to penetrate the same, which hollow charges comprise an explosive charge (13 and, respectively, 15) with a liner (14 and, respectively, 16), and which multiple hollow charge comprises means of detonation of the hollow charges, a hollow-charge jet (18, 19) for action against the protection being formed from each charge on detonation of a hollow charge, the hollow charge jets interfering with each other, **characterized in that** the multiple hollow charge (10) comprises means (21) of causing the hollow-charge jets from at least the first and second hollow charge (11, 12) to collide in connection with penetration of the protection.
10. Multiple hollow charge according to Patent Claim 9, **characterized in that** the geometrical distances between component hollow charges (11, 12) are dimensioned in such a manner that the faster part of the second jet (19) catches up the slower part of the first jet (18) on or after penetration of the protection.
11. Multiple hollow charge according to any one of Patent Claims 9-10, **characterized in that** the component hollow charges (11, 12) have a different geometrical shape in order to cause the hollow-charge jets (18, 19) of the hollow charges to collide.
12. Multiple hollow charge according to any one of Patent Claims 9-11, **characterized in that** the component hollow charges (11, 12) have different explosive properties in order to cause the hollow-charge jets (18, 19) of the hollow charges to collide.
13. Multiple hollow charge according to any one of Pat-

ent Claims 9-12, **characterized by** a control arrangement (21) adapted to initiate the second hollow charge (12) depending on the initiation of the first hollow charge (11) in order to cause the hollow-charge jets (18, 19) of the hollow charges to collide.

14. Multiple hollow charge according to any one of Patent Claims 9-13, **characterized in that** the component hollow charges (11, 12) are of the jet-forming type or the projectile-forming type.

Patentansprüche

1. Verfahren für eine Mehrfachhohlladung (10) zum Herbeiführen einer verstärkten Wirkung bei oder nach Durchdringung eines Schutzes, wobei ein erster Hohlladungsstrahl (18) von einer ersten Hohlladung (11) und ein zweiter Hohlladungsstrahl (19) von einer zweiten Hohlladung (12) miteinander wechselwirken, **dadurch gekennzeichnet, dass** die Wechselwirkung der ersten und zweiten Hohlladung (11, 12) im Zusammenhang mit der Durchdringung des Schutzes erfolgt durch Kollision der Strahlen (18, 19) in Zusammenhang mit der Durchdringung des Schutzes.
2. Verfahren nach dem vorausgehenden Anspruch, **dadurch gekennzeichnet, dass** die geometrischen Abstände zwischen Hohlladungskomponenten (11, 12) so bemessen sind, dass der schnellere Teil des zweiten Strahls (19) den langsameren Teil des ersten Strahls (18) bei oder nach der Durchdringung des Schutzes einholt.
3. Verfahren nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Hohlladungskomponenten (11, 12) unterschiedliche geometrische Form haben derart, dass der schnellere Teile des zweiten Strahls den langsameren Teil des ersten Strahls in Zusammenhang mit der Durchdringung des Schutzes einholt.
4. Verfahren nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Hohlladungskomponenten (11, 12) unterschiedliche Explosiveigenschaften aufgrund der Verwendung unterschiedlicher Explosivstoffe, Zündverfahren oder dergleichen haben derart, dass der schnellere Teil des zweiten Strahls den langsameren Teil des ersten Strahls in Zusammenhang mit der Durchdringung des Schutzes einholt.
5. Verfahren nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die Verzögerung der Auslösung der zweiten Hohlladung (12) in Bezug auf die erste Hohlladung (13) so gesteuert wird, dass der schnellere Teil des zweiten Strahls

den langsameren Teil des ersten Strahls in Zusammenhang mit der Durchdringung des Schutzes einholt.

6. Verfahren nach einem der vorangehenden Ansprüche, **dadurch gekennzeichnet, dass** die hintere Ladung (12) von zwei Hohlladungen vor der vorderen Ladung (11) gezündet wird.
7. Verfahren nach Anspruch 6, **dadurch gekennzeichnet, dass** der Strahl (18) der vorderen Hohlladung in einem mehr oder weniger leeren Querschnittsbereichs des Strahls (19) der hinteren Hohlladung eingeschlossen ist.
8. Verfahren nach einem der Ansprüche 1 bis 5, **dadurch gekennzeichnet, dass** die vordere Ladung (11) von zwei Hohlladungen vor der hinteren Ladung (12) gezündet wird.
9. Mehrfachhohlladung (10) mit mindestens einer ersten und einer zweiten Hohlladung (11, 12), die derart angeordnet sind, dass sie im Wesentlichen in derselben Richtung gegen einen Schutz wirken, um diesen zu durchdringen, wobei die Hohlladungen eine Explosivladung (13 bzw. 15) mit einer Auskleidung (14 bzw. 16) umfassen, und wobei die Mehrfachhohlladung Mittel zum Detonieren der Hohlladungen aufweist, wobei ein Hohlladungsstrahl (18) zur Einwirkung gegen den Schutz von jeder Ladung bei Detonation der Hohlladung gebildet wird, wobei die Hohlladungsstrahlen miteinander wechselwirken, **dadurch gekennzeichnet, dass** die Mehrfachhohlladung (16) Mittel (21) aufweist, die ein Kollidieren der Hohlladungsstrahlen von mindestens der ersten und zweiten Hohlladung (11, 12) in Zusammenhang mit der Durchdringung des Schutzes bewirken.
10. Mehrfachhohlladung nach Anspruch 9, **dadurch gekennzeichnet, dass** die geometrischen Abstände zwischen Hohlladungskomponenten (11, 12) so bemessen sind, dass der schnellere Teil des zweiten Strahls (19) den langsamen Teil des ersten Strahls (18) bei oder nach Durchdringung des Schutzes einholt.
11. Mehrfachhohlladung nach einem der Ansprüche 9-10, **dadurch gekennzeichnet, dass** die Hohlladungskomponenten (11, 12) unterschiedliche geometrische Form haben derart, dass die Hohlladungsstrahlen (18, 19) der Hohlladungen zum Kollidieren gebracht werden.
12. Mehrfachhohlladung nach einem der Ansprüche 9-11, **dadurch gekennzeichnet, dass** die Hohlladungskomponenten (11, 12) unterschiedliche Explosioneigenschaften haben derart, dass die Hohlladungsstrahlen (18, 19) der Hohlladungen zum Kol-

lidieren gebracht werden.

13. Mehrfachhohlladung nach einem der Ansprüche 9-12, **gekennzeichnet durch** eine Steueranordnung (21) zum Zünden der zweiten Hohlladung (12) in Abhängigkeit von der Zündung der ersten Hohlladung (11) derart, dass die Hohlladungsstrahlen (18, 19) der Hohlladungen zum Kollidieren gebracht werden.
14. Mehrfachhohlladung nach einem der Ansprüche 9-13, **dadurch gekennzeichnet, dass** die Hohlladungskomponenten (11, 12) vom strahlbildenden Typ oder vom geschossbildenden Typ sind.

Revendications

1. Procédé destiné à une charge creuse multiple (10) en vue de provoquer un effet amplifié sur ou après pénétration de protection, un premier jet de charge creuse (18) provenant d'une première charge creuse (11) et un second jet de charge creuse (19) provenant d'une seconde charge creuse (12) interférant l'un avec l'autre, **caractérisé en ce que** l'interférence des première et seconde charges creuses (11, 12) est forcée à avoir lieu conjointement avec la pénétration de la protection en faisant entrer en collision les jets (18, 19) conjointement avec la pénétration de la protection.
2. Procédé selon la revendication précédente, **caractérisé en ce que** l'on dimensionne les distances géométriques entre les charges creuses (11, 12) de composition de façon à ce que la partie plus rapide du second jet (19) rattrape la partie plus lente du premier jet (18) sur ou après pénétration de la protection.
3. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** l'on donne aux charges creuses (11, 12) de composition une forme géométrique différente de façon à ce que la partie plus rapide du second jet rattrape la partie plus lente du premier jet conjointement avec la pénétration de la protection.
4. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** l'on donne aux charges creuses (11, 12) de composition des propriétés explosives différentes, en tant que résultat de l'utilisation de différentes substances explosives, de différents principes d'initiation, ou autres, de façon à ce que la partie plus rapide du second jet rattrape la partie plus lente du premier jet conjointement avec la pénétration de la protection.
5. Procédé selon l'une quelconque des revendications

précédentes, **caractérisé en ce que** l'on contrôle le retard d'activation de la seconde charge creuse (12) par rapport à la première charge creuse (13) de façon à ce que la partie plus rapide du second jet rattrape la partie plus lente du premier jet conjointement avec la pénétration de la protection.

6. Procédé selon l'une quelconque des revendications précédentes, **caractérisé en ce que** la charge arrière (12) des deux charges creuses est mise à feu avant la charge avant (11).
7. Procédé selon la revendication 6, **caractérisé en ce que** le jet (18) de la charge creuse avant est compris dans une section, plus ou moins vide, dans le jet (19) de la charge creuse arrière.
8. Procédé selon l'une quelconque des revendications 1 à 5, **caractérisé en ce que** la charge avant (11) des deux charges creuses est mise à feu avant la charge arrière (12).
9. Charge creuse multiple (10) comprenant au moins une première et une seconde charges creuses (11, 12) agencées de façon à agir essentiellement dans la même direction contre une protection afin de pénétrer cette dernière, lesquelles charges creuses comprennent une charge explosive (13 et, respectivement, 15) avec un revêtement (14 et, respectivement, 16), et laquelle charge creuse multiple comprend un moyen de détonation des charges creuses, un jet de charge creuse (18, 19) destiné à agir contre la protection étant formé à partir de chaque charge sur détonation d'une charge creuse, les jets de charge creuse interférant l'un avec l'autre, **caractérisée en ce que** la charge creuse multiple (10) comprend le moyen (21) d'obliger les jets de charge creuse provenant des première et seconde charges creuse (11, 12) au moins à entrer en collision conjointement avec la pénétration de la protection.
10. Charge creuse multiple selon la revendication 9, **caractérisée en ce que** les distances géométriques entre les charges creuses (11, 12) de composition sont dimensionnées de façon à ce que la partie plus rapide du second jet (19) rattrape la partie plus lente du premier jet (18) sur ou après pénétration de la protection.
11. Charge creuse multiple selon l'une quelconque des revendications 9 à 10, **caractérisée en ce que** les charges creuses (11, 12) de composition possèdent une forme géométrique différente de façon à obliger les jets de charge creuse (18, 19) des charges creuses à entrer en collision.
12. Charge creuse multiple selon l'une quelconque des revendications 9 à 11, **caractérisée en ce que** les

charges creuses (11, 12) de composition possèdent des propriétés explosives différentes de façon à obliger les jets de charge creuse (18, 19) des charges creuses à entrer en collision.

5

- 13.** Charge creuse multiple selon l'une quelconque des revendications 9 à 12, **caractérisée en ce qu'un** agencement de contrôle (21) est adapté pour initier la seconde charge creuse (12) en fonction de l'initiation de la première charge creuse (11) afin d'obliger les jets de charge creuse (18, 19) des charges creuses à entrer en collision.

10

- 14.** Charge creuse multiple selon l'une quelconque des revendications 9 à 13, **caractérisée en ce que** les charges creuses (11, 12) de composition sont du type à formation de jet ou du type à formation de projectile.

15

20

25

30


35

40

45

50

55

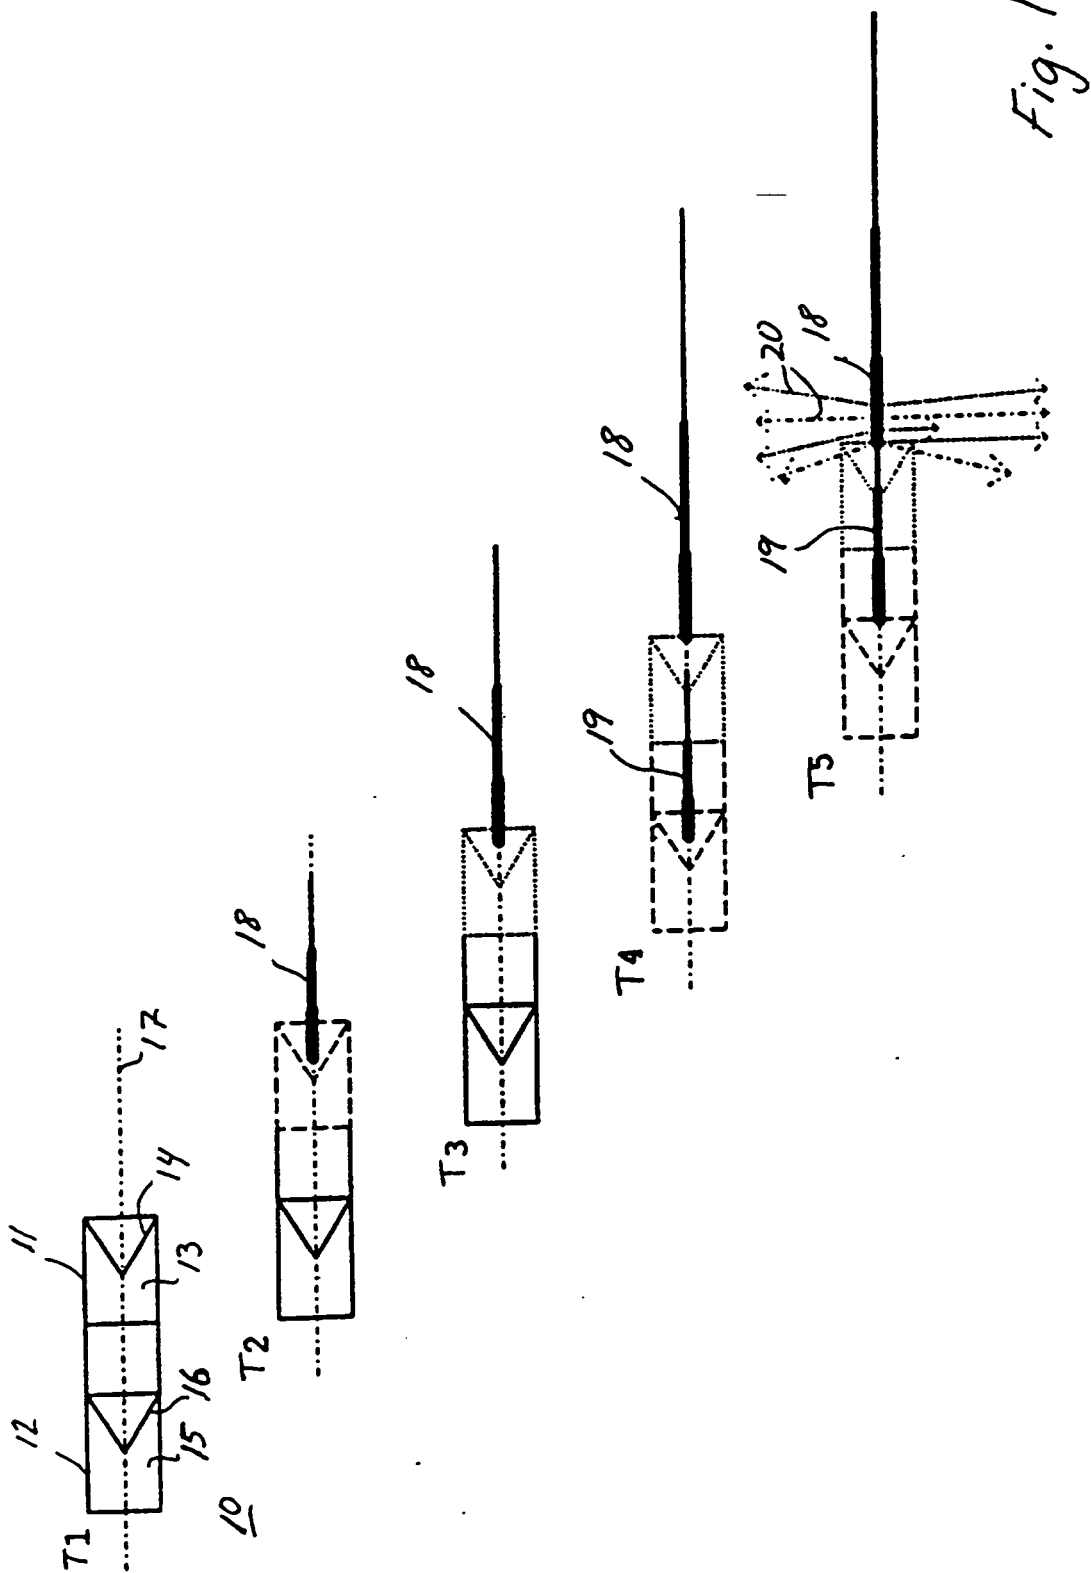

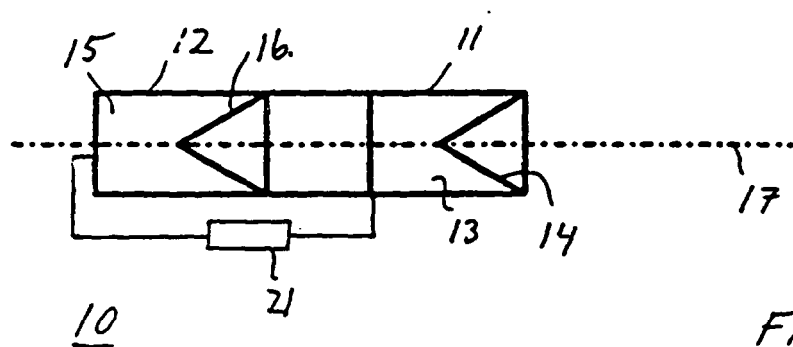


Fig. 2