



US00RE50222E

(19) **United States**
(12) **Reissued Patent**
Rachmady et al.

(10) **Patent Number:** **US RE50,222 E**
(45) **Date of Reissued Patent:** **Nov. 26, 2024**

(54) **NON-PLANAR GATE ALL-AROUND DEVICE AND METHOD OF FABRICATION THEREOF**

(71) Applicant: **Sony Group Corporation**, Tokyo (JP)
(72) Inventors: **Willy Rachmady**, Beaverton, OR (US); **Ravi Pillarisetty**, Portland, OR (US); **Van H. Le**, Portland, OR (US); **Jack T. Kavaileros**, Portland, OR (US); **Robert S. Chau**, Beaverton, OR (US); **Jessica S. Kachian**, Portland, OR (US)

(73) Assignee: **Sony Group Corporation**, Tokyo (JP)

(21) Appl. No.: **17/410,406**

(22) Filed: **Aug. 24, 2021**

Related U.S. Patent Documents

Reissue of:

(64) Patent No.: **10,418,487**
Issued: **Sep. 17, 2019**
Appl. No.: **14/946,744**
Filed: **Nov. 19, 2015**

U.S. Applications:

(63) Continuation of application No. 14/582,131, filed on Dec. 23, 2014, now Pat. No. 9,252,275, which is a
(Continued)

(51) **Int. Cl.**
H01L 29/78 (2006.01)
H01L 29/04 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **H01L 29/7848** (2013.01); **H01L 29/045** (2013.01); **H01L 29/0669** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC H01L 29/7848; H01L 29/045; H01L 29/0669; H01L 29/0673; H01L 29/1033;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,379,382 A 1/1995 Work et al.
6,770,516 B2 8/2004 Wu et al.
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1855390 A 11/2006
JP 2004-172178 6/2004
(Continued)

OTHER PUBLICATIONS

Li et al., Experimental investigation on superior PMOS performance of uniaxial strained silicon nanowire channel by embedded SiGe source/drain, 2007, IEEE, pp. 899-902; (Year: 2007).*


(Continued)

Primary Examiner — Leonardo Andujar
(74) *Attorney, Agent, or Firm* — Michael Best & Friedrich LLP

(57) **ABSTRACT**

A non-planar gate all-around device and method of fabrication thereby are described. In one embodiment, the device includes a substrate having a top surface with a first lattice constant. Embedded epi source and drain regions are formed on the top surface of the substrate. The embedded epi source and drain regions have a second lattice constant that is different from the first lattice constant. A channel nanowire having a third lattice is formed between and are coupled to the embedded epi source and drain regions. In an embodiment, the second lattice constant and the third lattice constant are different from the first lattice constant. A gate dielectric layer is formed on and all-around the channel nanowire. A gate electrode is formed on the gate dielectric layer and surrounding the channel nanowire.

15 Claims, 12 Drawing Sheets

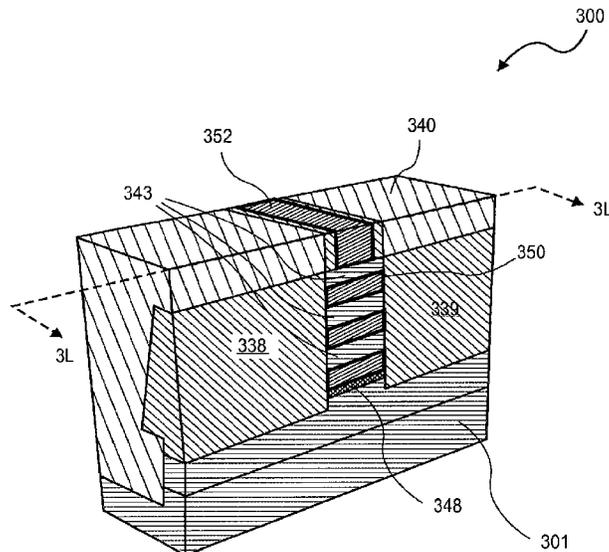

Related U.S. Application Data

continuation of application No. 13/997,118, filed as application No. PCT/US2011/067234 on Dec. 23, 2011, now Pat. No. 8,987,794.

(51) **Int. Cl.**

H01L 29/06 (2006.01)
H01L 29/10 (2006.01)
H01L 29/165 (2006.01)
H01L 29/423 (2006.01)
H01L 29/66 (2006.01)
H01L 29/775 (2006.01)
H01L 29/786 (2006.01)

(52) **U.S. Cl.**

CPC **H01L 29/0673** (2013.01); **H01L 29/1033** (2013.01); **H01L 29/165** (2013.01); **H01L 29/42392** (2013.01); **H01L 29/66795** (2013.01); **H01L 29/775** (2013.01); **H01L 29/785** (2013.01); **H01L 29/7851** (2013.01); **H01L 29/78618** (2013.01); **H01L 29/78696** (2013.01); **H01L 2029/7858** (2013.01)

(58) **Field of Classification Search**

CPC H01L 29/165; H01L 29/42392; H01L 29/66795; H01L 29/775; H01L 29/785; H01L 29/7851; H01L 29/78618; H01L 29/78696; H01L 2029/7858; H01L 29/1079; H01L 29/66439; H01L 29/7842; B82Y 10/00
 See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,855,588 B1 2/2005 Liao et al.
 7,026,199 B2 4/2006 Lee
 7,074,662 B2 7/2006 Lee et al.
 7,402,483 B2 7/2008 Yun et al.
 7,408,981 B2 8/2008 Chen
 7,642,578 B2 1/2010 Lee et al.
 7,781,771 B2* 8/2010 Lindert H01L 29/66795 257/17
 7,800,172 B2 9/2010 Lee et al.
 7,892,945 B2 2/2011 Bedell et al.
 7,895,945 B2 3/2011 Probian
 8,084,308 B2 12/2011 Chang et al.
 8,309,960 B2 11/2012 Iwayama et al.
 8,399,879 B2 3/2013 Liu et al.
 8,492,232 B2 7/2013 Ernst et al.
 8,519,379 B2 8/2013 Yu et al.
 8,975,144 B2* 3/2015 Kwok H01L 29/045 438/294
 8,987,794 B2* 3/2015 Rachmady H01L 29/42392 257/288
 9,252,275 B2* 2/2016 Rachmady H01L 29/42392
 2004/0217434 A1 11/2004 Lee et al.
 2004/0262690 A1 12/2004 Coronel et al.
 2005/0095793 A1 5/2005 Lee
 2005/0268195 A1 12/2005 Lund et al.
 2006/0024874 A1 2/2006 Yun et al.
 2006/0216897 A1 9/2006 Lee et al.
 2007/0004124 A1 1/2007 Suk et al.
 2007/0029586 A1* 2/2007 Orłowski B82Y 10/00 257/E29.05
 2007/0196973 A1 8/2007 Park
 2008/0093628 A1 4/2008 Lee et al.
 2008/0102586 A1 5/2008 Park
 2008/0121932 A1 5/2008 Ranade
 2008/0135949 A1 6/2008 Lo et al.
 2008/0277691 A1 11/2008 Ernst et al.

2009/0026505 A1* 1/2009 Okano H01L 29/66795 257/255
 2009/0065850 A1 3/2009 Oh
 2009/0065853 A1 3/2009 Hanafi
 2010/0155827 A1 6/2010 Kim
 2010/0207208 A1 8/2010 Bedell et al.
 2010/0295021 A1 11/2010 Chang et al.
 2010/0297816 A1* 11/2010 Bedell B82Y 10/00 438/151
 2011/0012090 A1 1/2011 Singh et al.
 2011/0031473 A1 2/2011 Chang et al.
 2011/0057163 A1 3/2011 Liu et al.
 2011/0062417 A1 3/2011 Iwayama et al.
 2011/0068407 A1 3/2011 Chieh et al.
 2011/0073842 A1 3/2011 Liu et al.
 2011/0147828 A1 6/2011 Murthy et al.
 2011/0163355 A1 7/2011 Tezuka et al.
 2011/0233522 A1 9/2011 Cohen et al.
 2011/0281412 A1 11/2011 Ernst et al.
 2012/0129354 A1 5/2012 Luong
 2012/0138886 A1* 6/2012 Kuhn H01L 29/78696 438/479

FOREIGN PATENT DOCUMENTS

JP 2004172178 A 6/2004
 JP 2004/336052 11/2004
 JP 2004336052 A 11/2004
 JP 2005-340810 12/2005
 JP 2005340810 A 12/2005
 JP 2009-522760 6/2009
 JP 2009522760 A 6/2009
 JP 2011-066151 A 9/2009
 JP 2010-501122 1/2010
 JP 2011-029503 A 2/2011
 JP 2011-66151 3/2011
 TW 201131795 A 9/2011
 TW 201131795 A1 9/2011
 WO 2009/151001 A1 12/2009
 WO 2011/067821 A1 9/2011
 WO 2011/119717 A1 9/2011
 WO 2011067821 9/2011

OTHER PUBLICATIONS

Liow et al., Germanium source and drain Stressors for ultrathin body and nanowire field effect transistors, 2008, IEEE, pp. 808-810 (Year: 2008).
 Tan et al., Strained p channel finFET with extended pi shaped silicon germanium source/drain stressors, 2007, IEEE, pp. 905-908 (Year: 2007).
 International Search Report and Written Opinion for International Patent Application No. PCT/US2011/062059, mailed Jul. 27, 2012.
 International Search Report and Written Opinion for International Patent Application No. PCT/US2011/067234, mailed Aug. 1, 2012, 9 pages.
 International Preliminary Report on Patentability for International Patent Application No. PCT/US2011/067234, mailed Jul. 3, 2014, 6 pages.
 Notice of Allowance for Taiwan Patent Application No. 101146622, mailed Aug. 19, 2014, 5 pages.
 Office Action from the Examiner of the Taiwan Intellectual Property Office dated Dec. 14, 2015 for Taiwan Patent Application No. 103136625 and English Translation thereof.
 Notice of Preliminary Rejection for Korean Patent Application No. 10-2014-7017953 mailed Aug. 16, 2015 and English Translation thereof.
 Notice of Preliminary Rejection for Korean Patent Application No. 10-2015-7017953 mailed Jan. 17, 2016 and English Translation thereof.
 Notice of Preliminary Rejection for Korean Patent Application No. 10-2015-7030021 mailed Jan. 17, 2016 and English Translation thereof.

(56)

References Cited

OTHER PUBLICATIONS

Notice of Preliminary Rejection from the Korean Patent Office dated Jan. 16, 2017 for Korean Patent Application No. 10-2016-7022425 and the English Translation thereof.
Office Action for Germany Patent Application No. 112011105995.7, mailed Jul. 22, 2019, 18 pages, with English translation.
Office Action (including Search Report) from the Examiner of the Intellectual Property Office (the IPO) dated Dec. 14, 2015 for Taiwan Patent Application No. 103136625 and English Translation thereof.
Notice of Preliminary Rejection (Non-Final) (3 pages) from the Korean Patent Office dated Jan. 16, 2017 for Korean Patent Application No. 10-2016-7022425 and English Translation (1 pages) thereof.
Notice of Allowance from the Taiwan IPO for Taiwan Patent Application No. 105113533, dated May 24, 2017, 2 pages.
Office Action (including Search Report) from the Examiner of the Intellectual Property Office (the IPO) dated Feb. 24, 2017 for Taiwan Patent Application No. 105113533 and English Translation thereof, 14 pages.
International Search Report and Written Opinion for International Patent Application No. PCT/US2011/067234, dated Aug. 1, 2012, 9 pages.
International Preliminary Report on Patentability for International Patent Application No. PCT/US2011/067234, dated Jul. 3, 2014, 6 pages.
Office Action for Taiwan Patent Application No. 106121119, dated Aug. 29, 2018, 6 pages.
Office Action for Taiwan Patent Application No. 105113533, dated Feb. 24, 2017, 11 pages.
Notice of Allowance for Taiwan Patent Application No. 103136625, dated Mar. 28, 2016, 2 pages.

Notice of Allowance for Taiwan Patent Application No. 101146622, dated Aug. 19, 2014, 5 pages.
Office Action for Korean Patent Application No. 10-2016-7022425, dated Jan. 16, 2017, 6 pages.
Office Action for Korean Patent Application No. 10-2016-7022425, dated Jun. 20, 2017, 5 pages.
Notice of Allowance for Korean Patent Application No. 10-2016-7022425, dated Oct. 18, 2017, 3 pages.
Notice of Preliminary Rejection for Korean Patent Application No. 10-2014-7017953 dated Aug. 16, 2015 and English Translation thereof.
Notice of Preliminary Rejection (Non-Final) from the Korean Intellectual Property Office dated Mar. 17, 2016 for Korean Patent Application No. 10-2014-7017953 and English Translation thereof.
First Office Action from the Chinese Patent Office dated May 4, 2016 for Chinese Patent Application No. 201180076433.X.
Notice of Final Rejection from the Korean Intellectual Property Office dated Feb. 4, 2016 for Korean Patent Application No. 10-2014-7017953 and English Translation thereof.
Notice of Allowance from the Korean Intellectual Property Office dated Jun. 10, 2016 for Korean Patent Application No. 10-2015-7030021.
Notice of Allowance (2 pages) from the Chinese State Intellectual Property (SIPO) Office dated Sep. 29, 2016 for Chinese Patent Application No. 201180076433.X and English Translation (2 pages) thereof.
Notice of Preliminary Rejection (Non-Final) from the Korean Intellectual Property Office dated Jan. 17, 2016 for Korean Patent Application No. 10-2015-7030021 and English Translation thereof.
Notice of Preliminary Rejection for Korean Patent Application No. 10-2015-7017953 dated Jan. 17, 2016 and English Translation thereof.

* cited by examiner

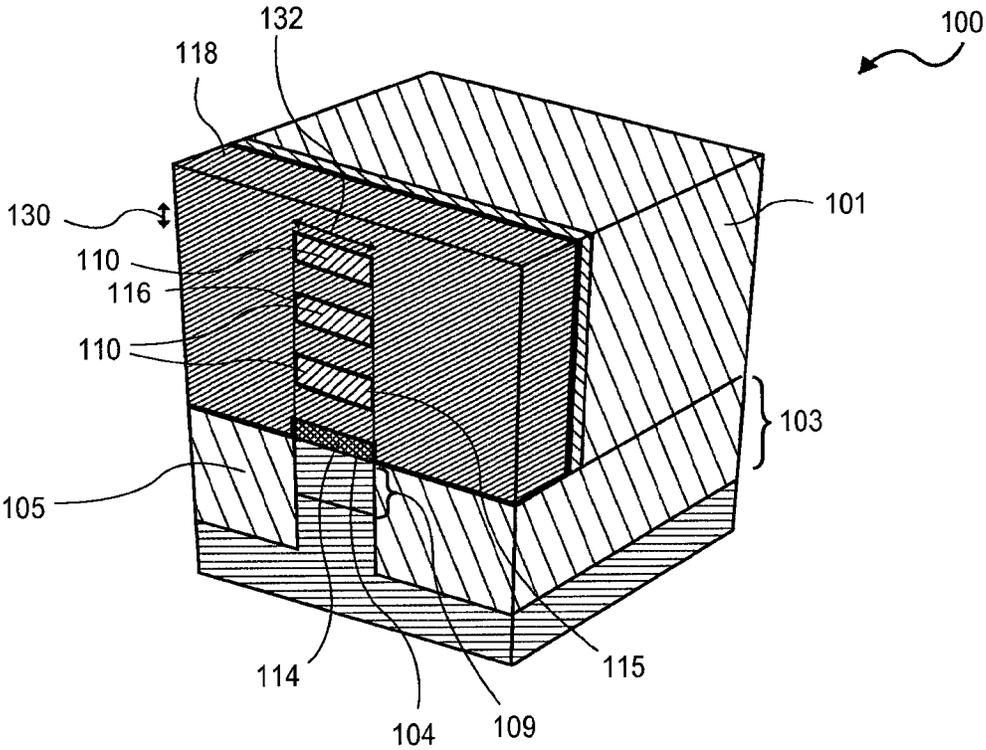


FIG. 1C

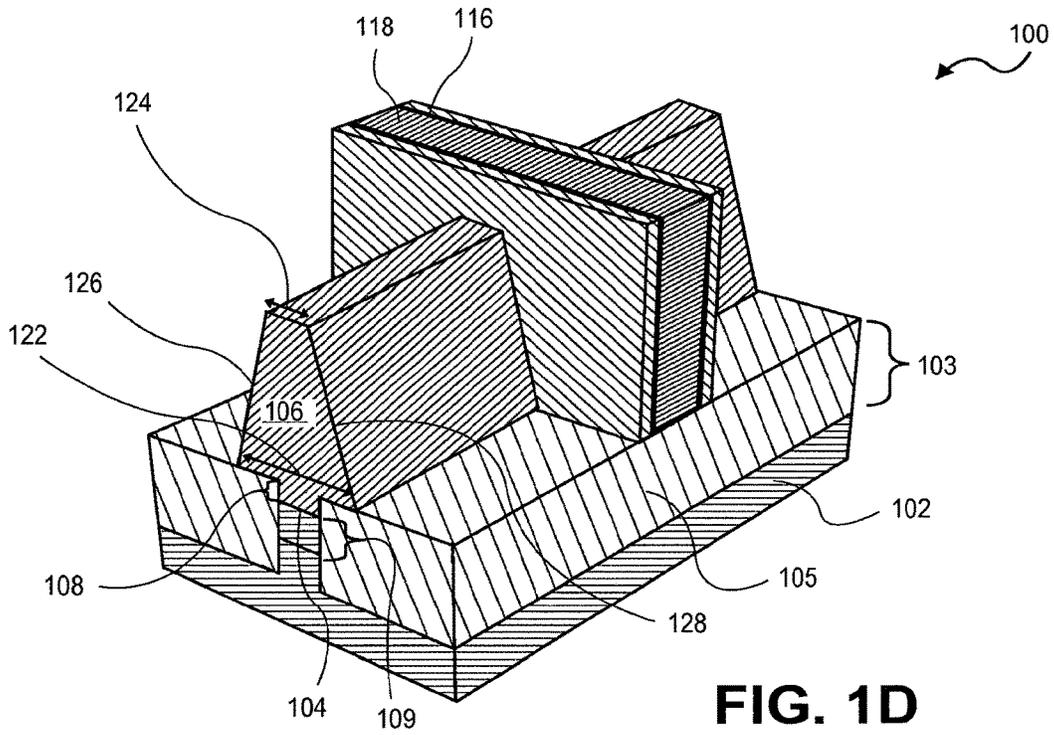


FIG. 1D

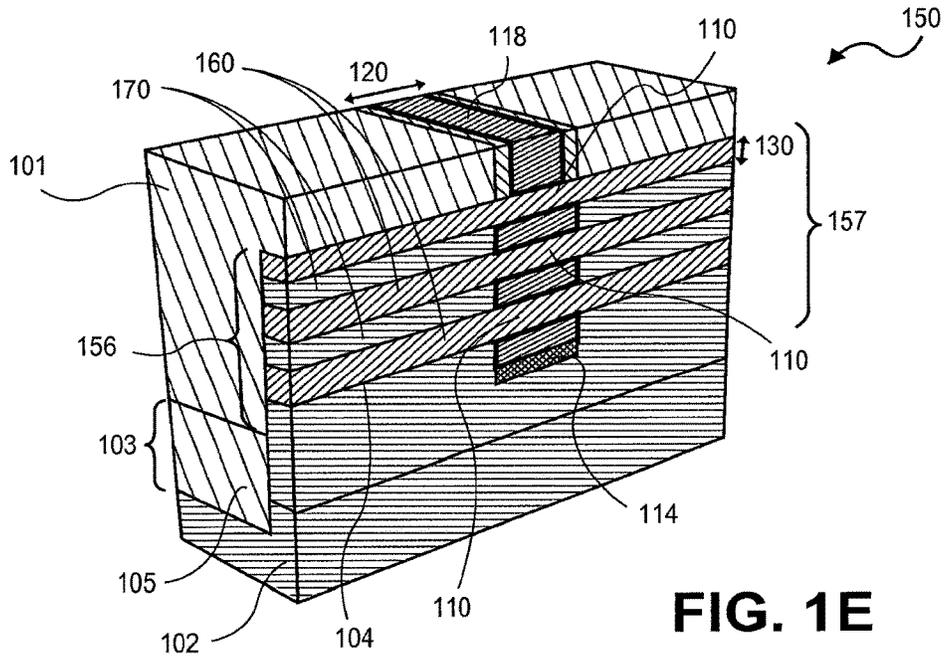
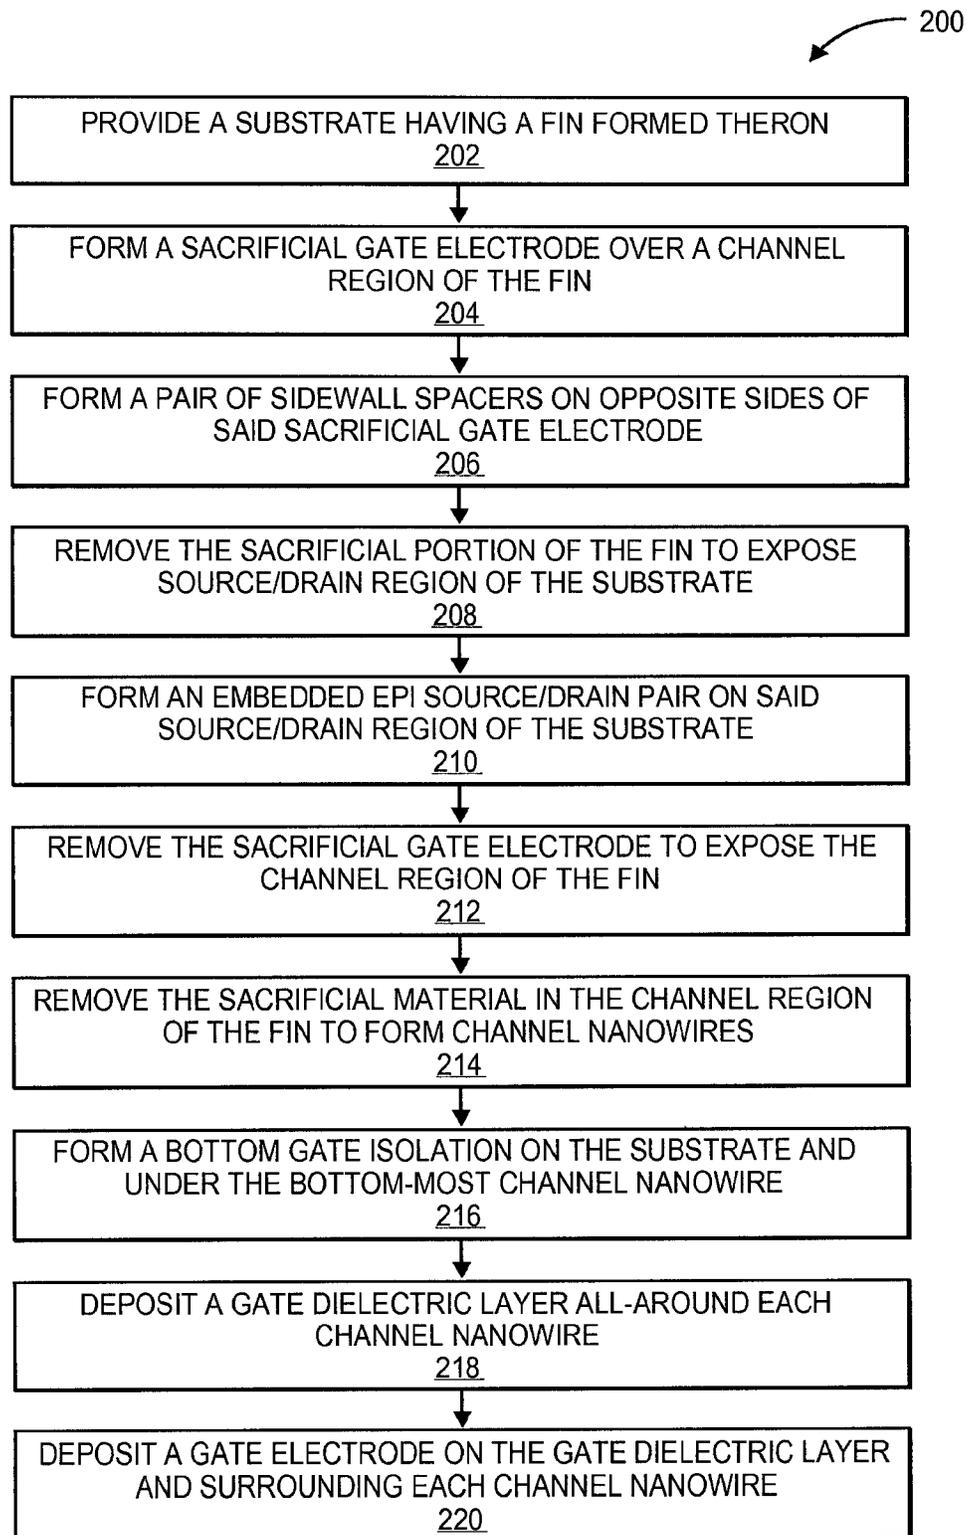


FIG. 1E

**FIG. 2**

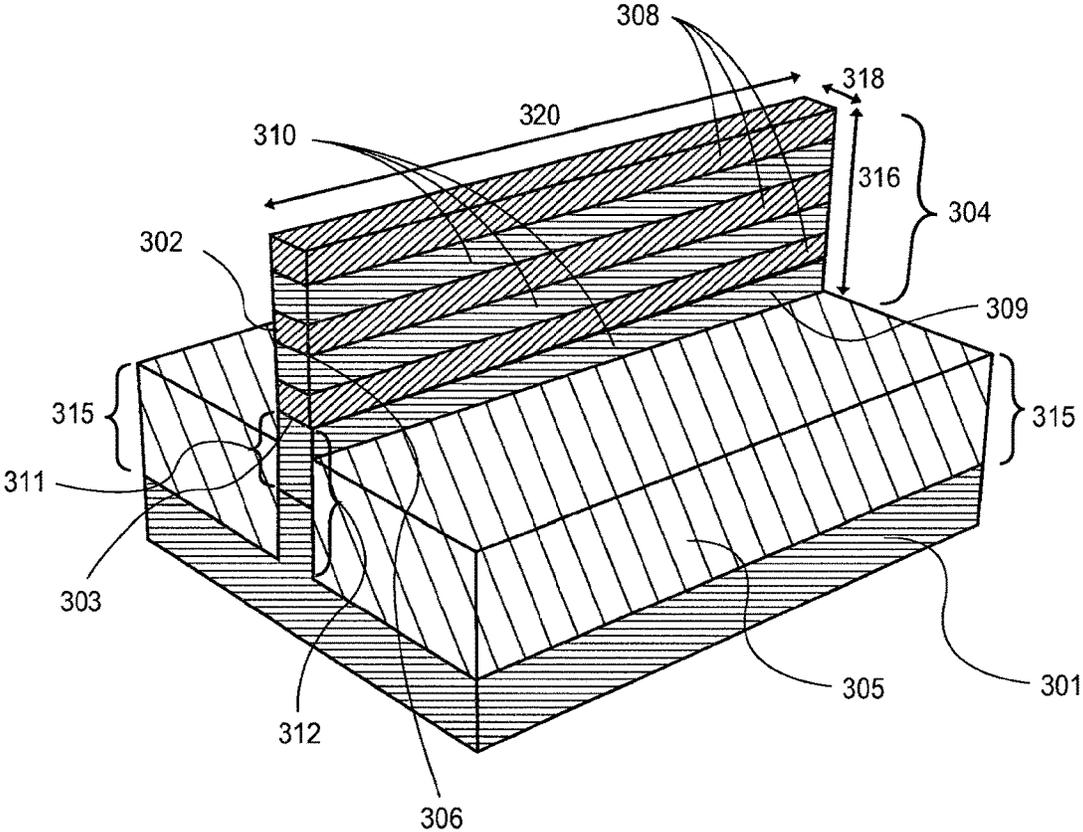


FIG. 3A

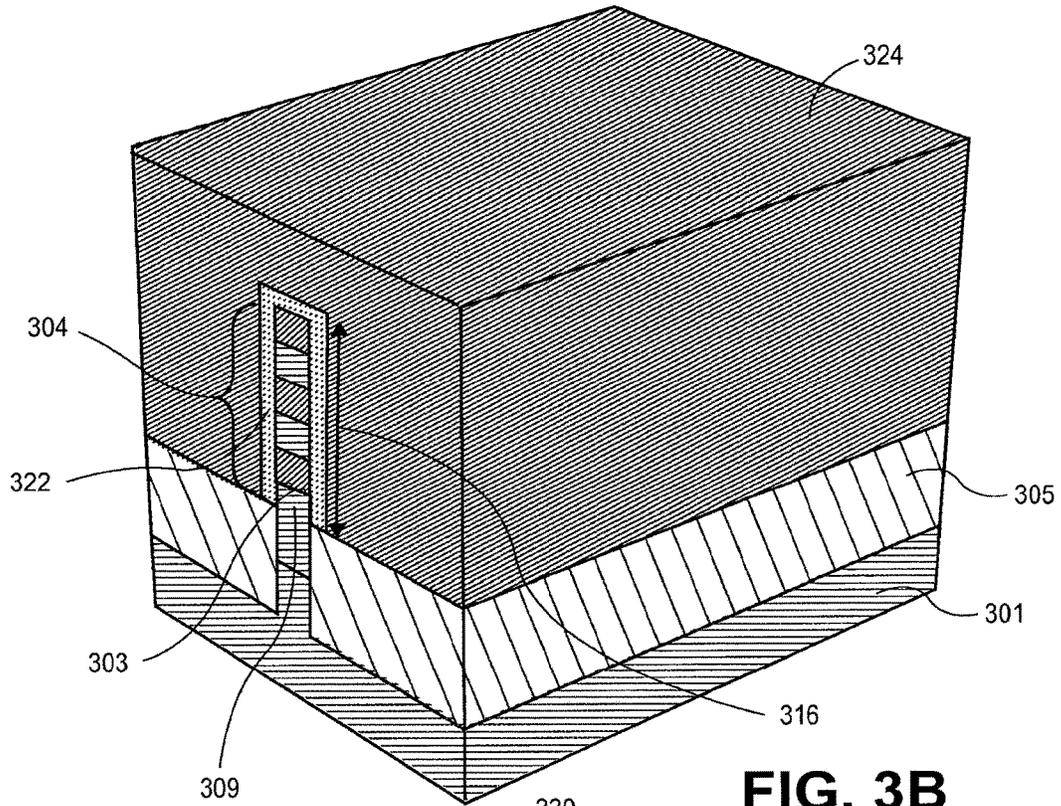


FIG. 3B

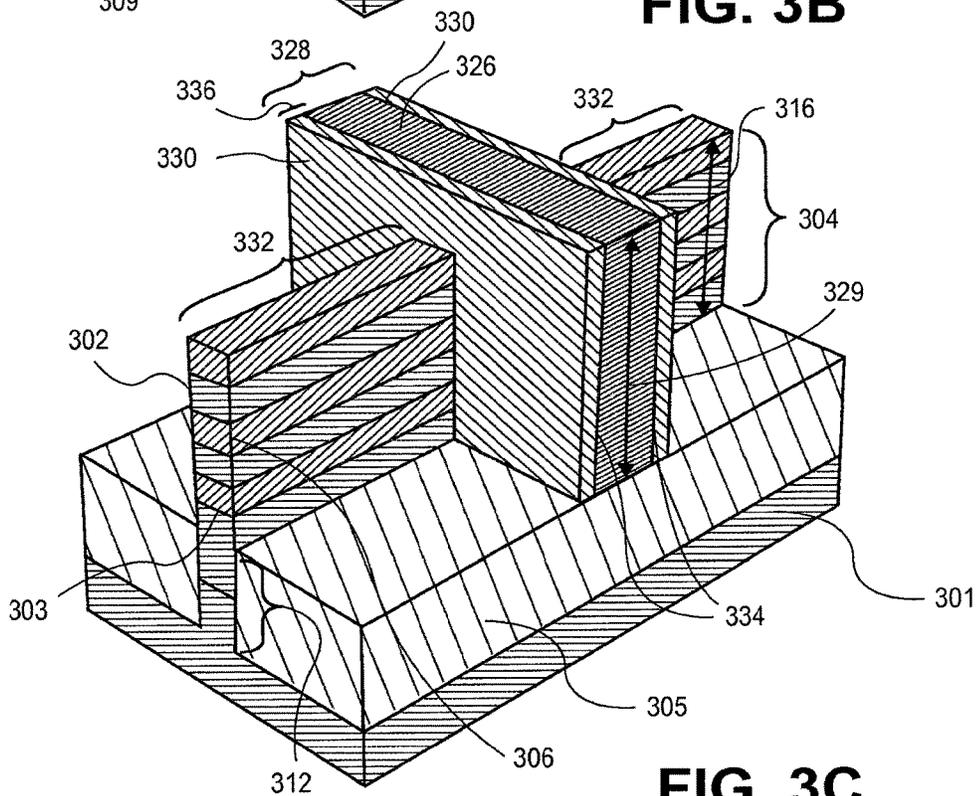
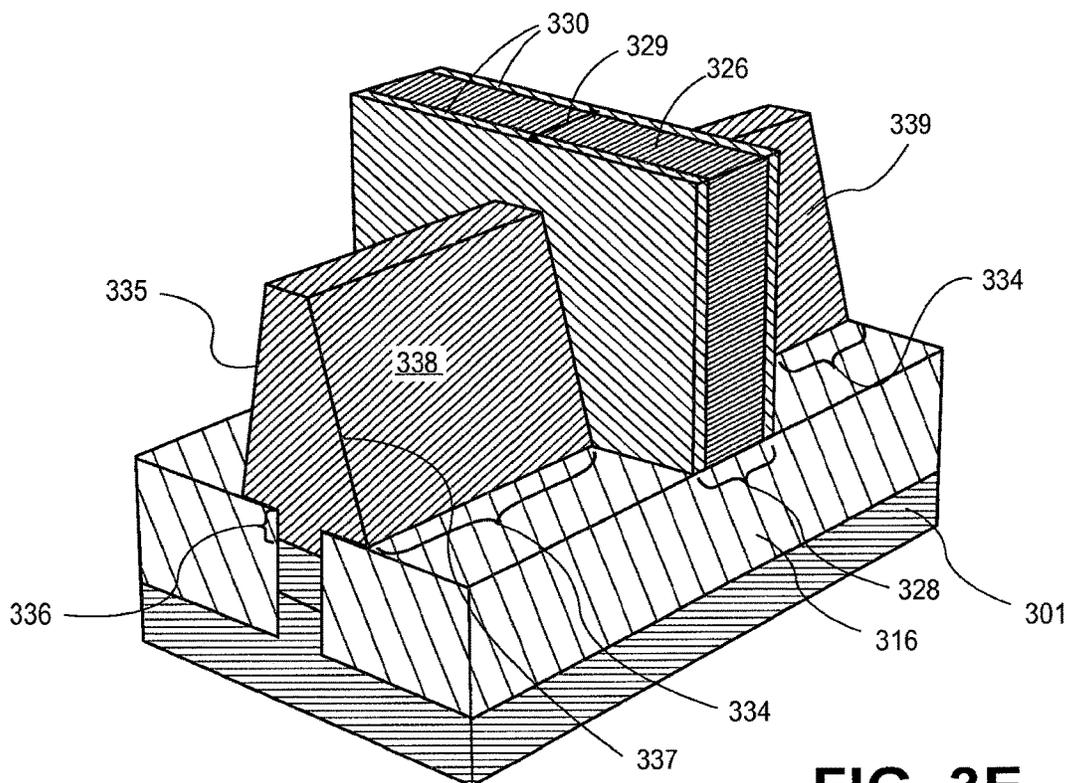
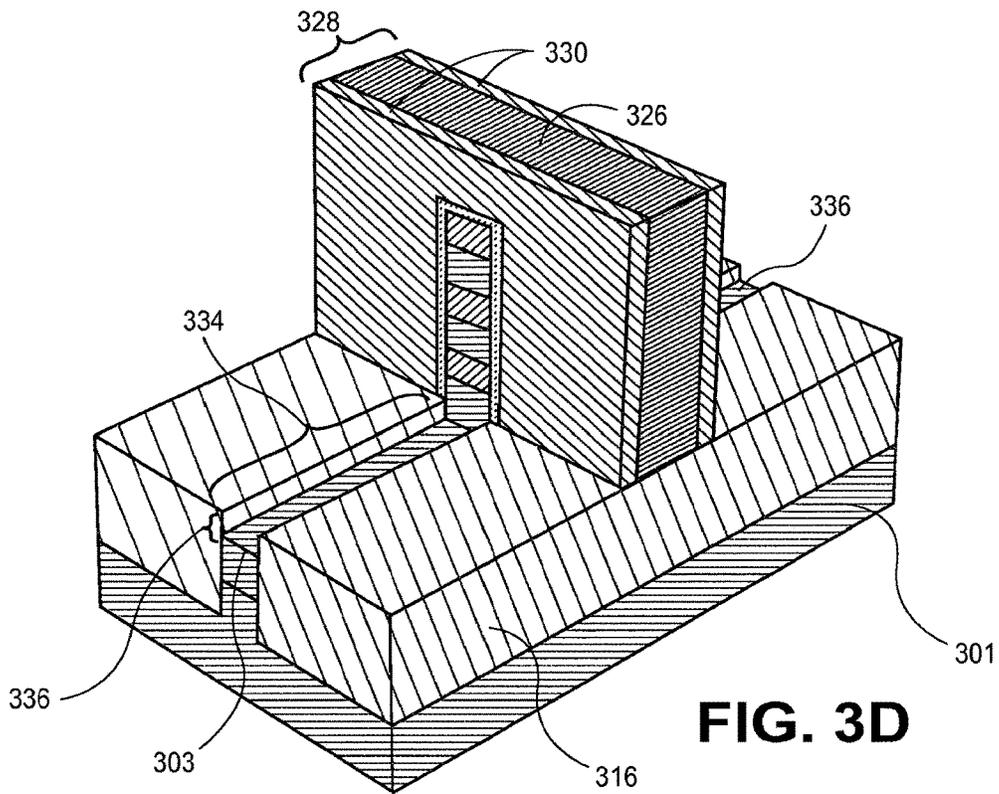
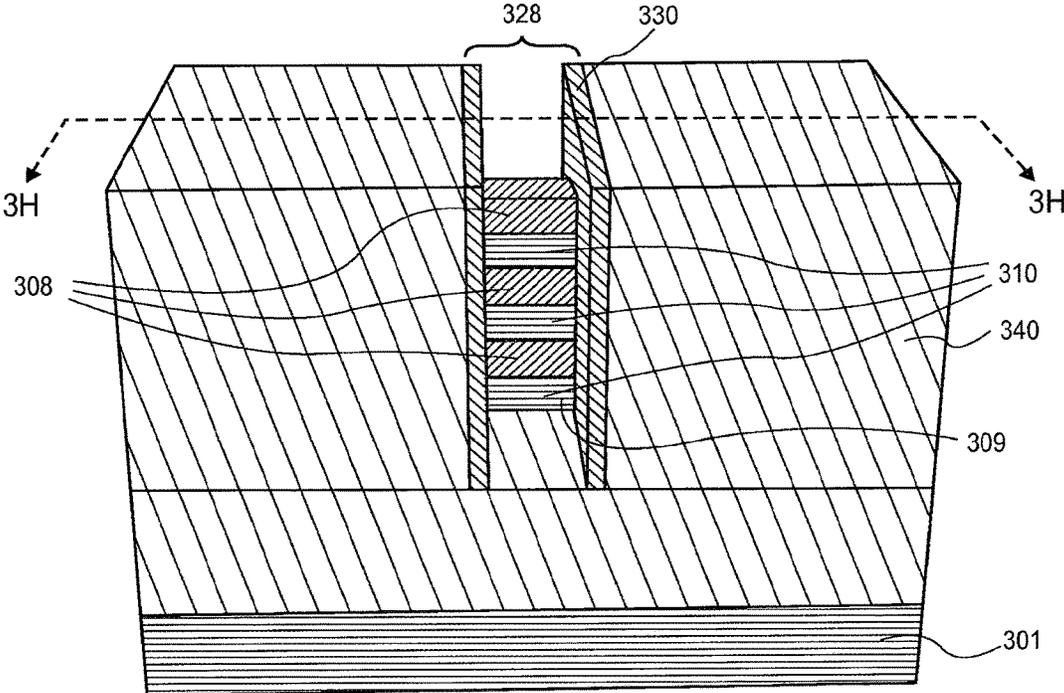
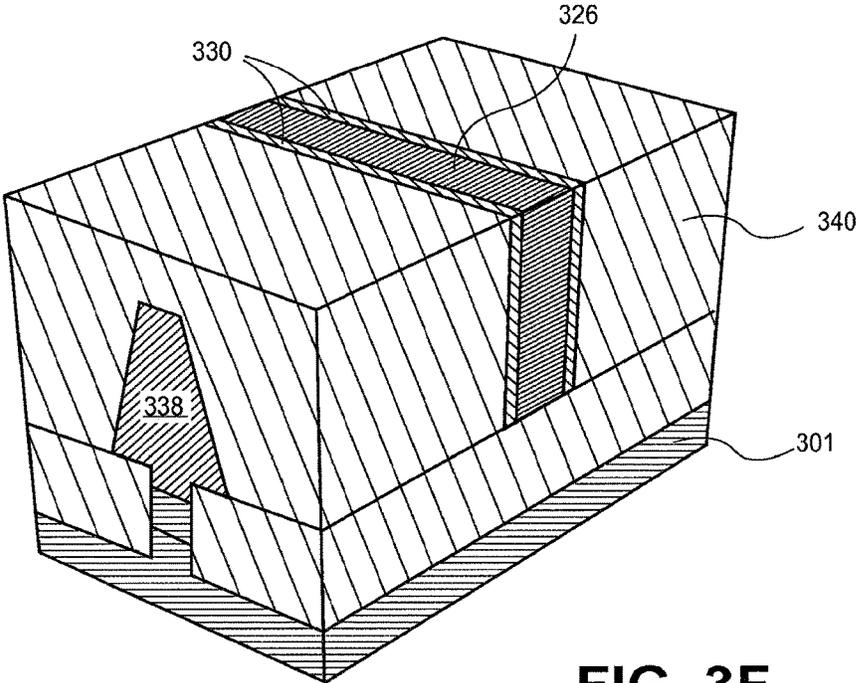


FIG. 3C





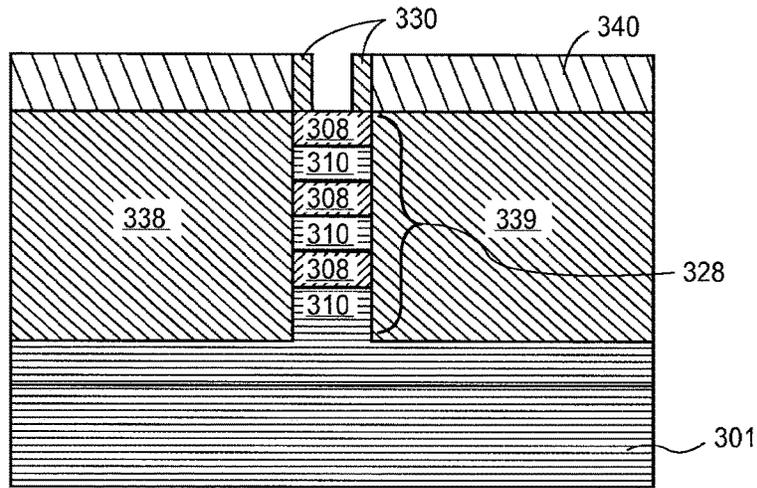


FIG. 3H

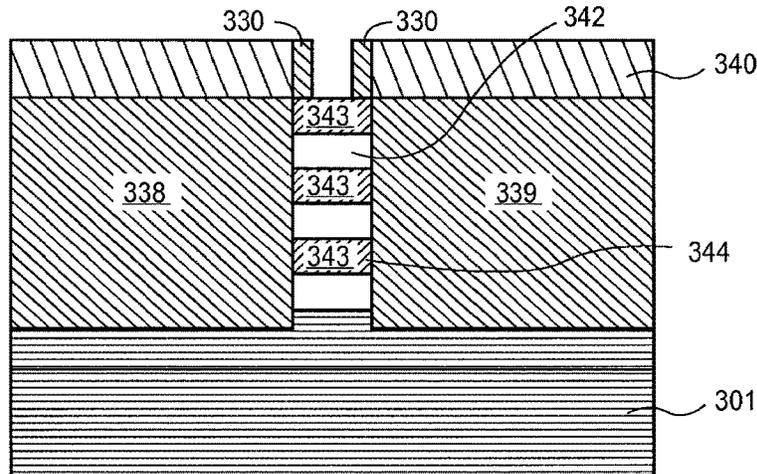


FIG. 3I

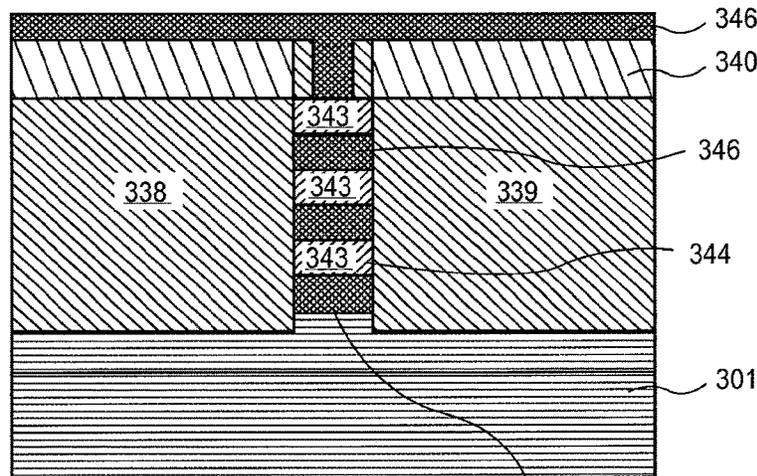


FIG. 3J

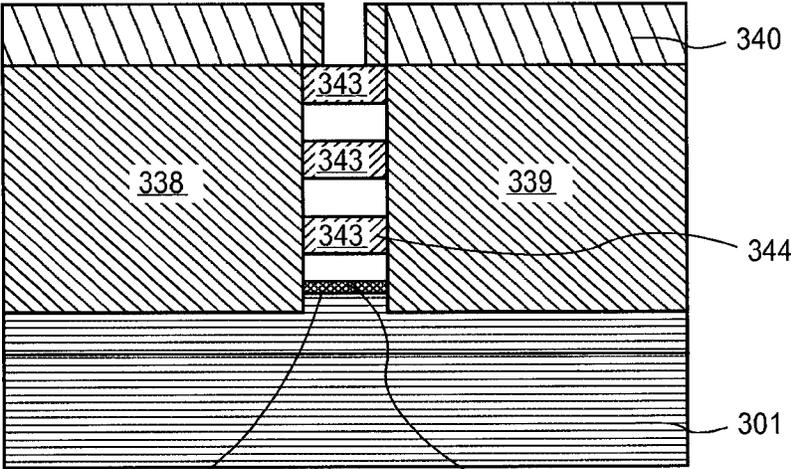


FIG. 3K

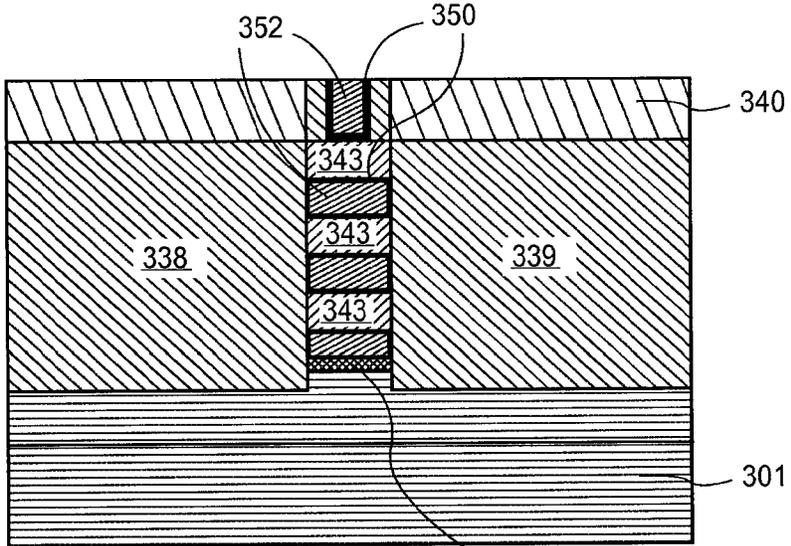


FIG. 3L

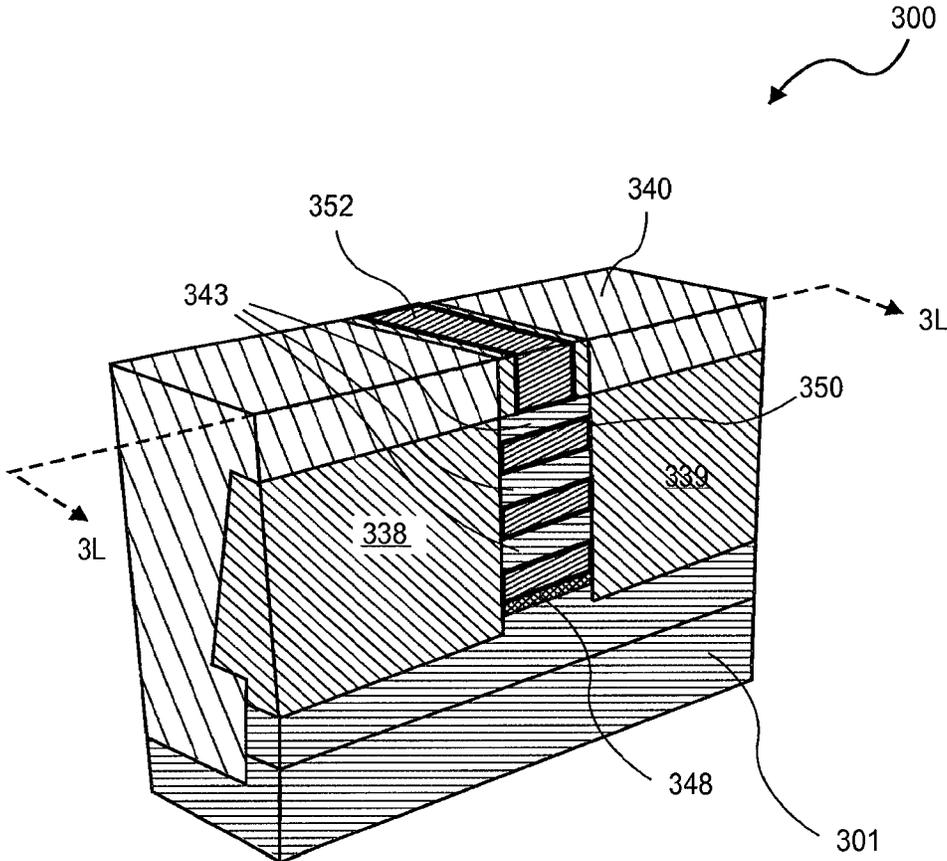


FIG. 3M

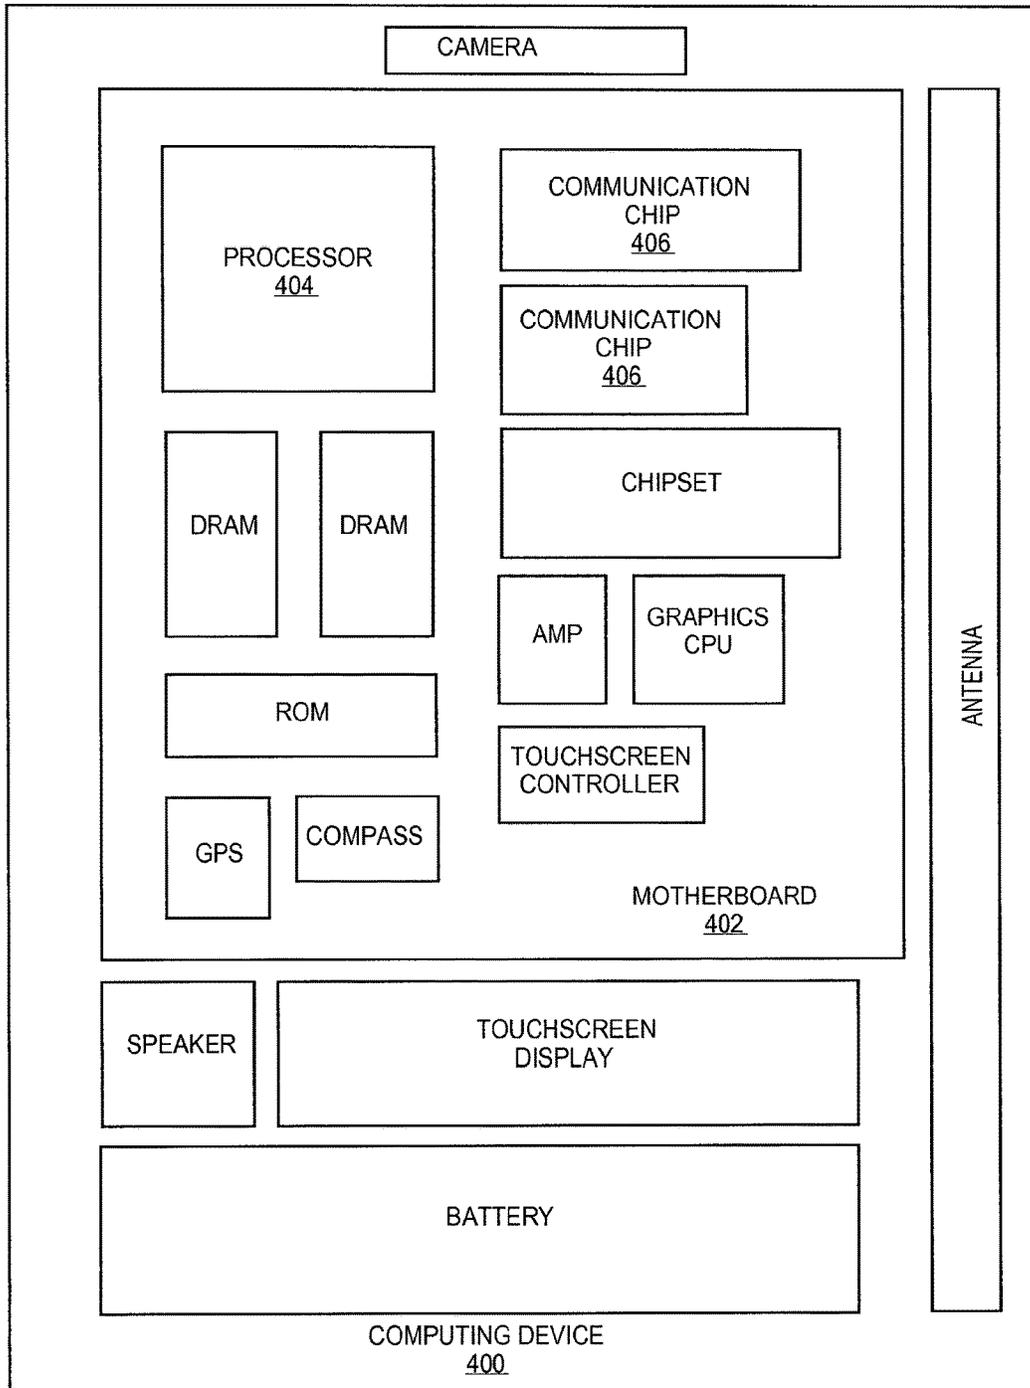


FIG. 4

NON-PLANAR GATE ALL-AROUND DEVICE AND METHOD OF FABRICATION THEREOF

Matter enclosed in heavy brackets [] appears in the original patent but forms no part of this reissue specification; matter printed in italics indicates the additions made by reissue; a claim printed with strikethrough indicates that the claim was canceled, disclaimed, or held invalid by a prior post-patent action or proceeding.

[CROSS-REFERENCE] *CROSS REFERENCE TO RELATED APPLICATIONS*

[This is a Continuation of application Ser. No. 14/582,131 filed Dec. 23, 2014, which is Continuation of application Ser. No. 13/997,118 filed Jun. 21, 2013 now U.S. Pat. No. 8,987,794 issued Mar. 24, 2015 which is U.S. National Phase application under 35 U.S.C. 371 of International Application No. PCT/US2011/067234 filed Dec. 23, 2011.] *This application is a reissue of U.S. patent application Ser. No. 14/946,744, filed on Nov. 19, 2015, now U.S. Pat. No. 10,418,487 issued on Sep. 17, 2019, which is a continuation of U.S. patent application Ser. No. 14/582,131, filed on Dec. 23, 2014, now U.S. Pat. No. 9,252,275 issued on Feb. 2, 2016, which is a continuation of U.S. patent application Ser. No. 13/997,118, filed on Jun. 21, 2013, now U.S. Pat. No. 8,987,794 issued on Mar. 24, 2015, which is a U.S. National Phase application under 35 U.S.C. § 371 of International Application No. PCT/US2011/067234, filed on Dec. 23, 2011, the entire contents of which are herein incorporated by reference.*

BACKGROUND

1) Field

Embodiments of this invention relate to the field of semiconductor devices and more particularly to a non-planar gate all-around device and method of fabrication.

2) Description of Related Art

As integrated device manufacturers continue to shrink the feature sizes of transistor devices to achieve greater circuit density and higher performance, there is a need to enhance transistor drive currents while reducing short-channel effects such as parasitic capacitance and off-state leakage for next-generation devices. One way of increasing transistor drive currents is to use higher carrier mobility semiconductor materials to form the channel. Higher carrier mobility in the channel supports higher transistor drive currents. Carrier mobility is a measure of the velocity at which carriers flow in a semiconductor material under an external unit electric field. Process induced stress (sometimes referred to as stress) on the semiconductor body is another way of increasing drive currents. Inducing stress on the semiconductor body enhances carrier mobility, thereby increasing the drive currents in transistor devices.

Non-planar transistors, such as the tri-gate transistor, are a recent development in semiconductor processing for controlling short channel effects. With tri-gate transistors, the gate is adjacent to three sides of the channel region. Because the gate structure surrounds the fin on three surfaces, the transistor essentially has three gates controlling the current through the fin or channel region. These three gates allow for fuller depletion in the fin and result in less short-channel effects due to steeper sub-threshold current swing (SS) and smaller drain induced barrier lowering (DIBL). Unfortunately, the fourth side, the bottom part of the channel is far

away from the gate electrode and thus is not under close gate control. As transistor dimensions are continually scaled down to sub 20-25 nm technology nodes, parasitic leakage paths between the source and drains become problematic for tri-gate transistors.

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present disclosure are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings, in which:

FIG. 1A to 1D illustrate to a non-planar gate all-around device having embedded epi source and drain regions in accordance with an embodiment of the present invention.

FIG. 1E is an illustration of a nonplanar gate all around device without embedded source and drain regions.

FIG. 2 is a flow chart representing steps in a method of forming a non-planar gate all-around device in accordance with an embodiment of the present invention.

FIG. 3A to 3M illustrate the three dimensional and two dimensional views representing steps in a method of forming a non-planar gate all-around device in accordance with an embodiment of the present invention.

FIG. 4 illustrates a computing device 400 in accordance with one implementation of the invention.

DETAILED DESCRIPTION

The present invention is a novel gate all-around transistor and a method of fabrication. In the following description, numerous details are set forth in order to provide a thorough understanding of the present invention. It will be apparent, however, to one skilled in the art, that the present invention may be practiced without these specific details. In other instances, well-known semiconductor processes and manufacturing techniques have not been described in detail to avoid obscuring the present invention. Reference throughout this specification to “an embodiment” means that a particular feature, structure, function, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention. Thus, the appearances of the phrase “in an embodiment” in various places throughout this specification are not necessarily referring to the same embodiment of the invention. Furthermore, the particular features, structures, functions, or characteristics may be combined in any suitable manner in one or more embodiments. For example, a first embodiment may be combined with a second embodiment anywhere the two embodiments are not mutually exclusive.

Embodiments of the present invention include a non-planar gate all-around transistor device having channel nanowires that are wrapped all around by a gate dielectric layer and a gate electrode. Having a gate electrode that completely surrounds the channel nanowires increases gate control and results in improved short channel effects due to parasitic leakage paths being completely cut-off. The channel nanowires are disposed between source and drain regions. In one or more embodiments of the present invention, the channel nanowires are composed of undoped germanium and are uniaxially lattice stressed. The undoped germanium provides higher carrier mobility than conventional silicon and the uniaxially lattice stress further enhances the carrier mobility in the channel nanowires, thereby achieving very high transistor device drive currents. In an embodiment of the present invention, the source and drain regions are formed by etching away portions of a fin adjacent to the channel nanowires, and then epitaxially

3

growing a semiconductor material from the substrate to form “embedded epi” source and drain regions. Embedded epi source and drain regions provide either an additional force or anchors to the channel nanowires that help to maintain or enhance, or both maintain and enhance, the uniaxial lattice stress in the channel nanowires. Additionally, in an embodiment of the present invention, the gate all around transistor includes a bottom gate isolation layer formed between the substrate and the bottom channel nanowire so that the gate electrode may be formed all around the bottom channel nanowire without capacitive coupling to the substrate. One or more embodiments of the present invention may include a non-planar gate all-around transistor device with one of embedded epi source and drain regions or a bottom gate isolation layer formed between a substrate and a bottom channel nanowire, or both.

FIGS. 1A to 1D illustrate a non-planar gate all-around device **100**, in accordance with an embodiment of the present invention. FIG. 1A is a three-dimensional overhead/side view of device **100** within dielectric layer **101**, FIG. 1B is a cross-sectional view taken through the embedded epi source **106** and drain **107**, and FIG. 1C is a cross-sectional view taken through the gate electrode **118**. FIG. 1D is a three-dimensional overhead/side view of device **100** without dielectric layer **101**. Device **100** includes a substrate **102** having a top surface **104**. Embedded epi source **106** and drain **107** regions are disposed on top surface **104** of substrate **102** and channel nanowires **110** are coupled between embedded epi source **106** and drain **107** regions. Embedded epi source **106** and drain **107** regions can be collectively referred to as a embedded epi source/drain pair. A gate dielectric layer **116** is formed on and all-around each channel nanowire **110**, except at the ends of channel nanowires **110** where channel nanowires **110** are coupled to embedded epi source **106** and drain **107** regions. A gate electrode **118** is formed on gate dielectric layer **116** and completely surrounds each channel nanowire **110**.

In an embodiment, top surface **104** of substrate **102**, embedded epi source **106** and drain **107** regions, and channel nanowires **110** each comprise a material having a lattice constant. The lattice constant of top surface **104** is different from the lattice constants of embedded epi source **106** and drain **107** regions and channel nanowires **110**. In a particular embodiment, the lattice constants of embedded epi source **106** and drain **107** regions and channel nanowires **110** are larger than the lattice constant of top surface **104**. In one such embodiment, top surface **104** of substrate **102** is silicon germanium, channel nanowires **110** are undoped germanium, and embedded epi source **106** and drain **107** regions are germanium. The lattice mismatch (e.g., the lattice constant mismatch) between embedded epi source **106** and drain **107** regions, channel nanowires **110**, and top surface **104** results in lattice stress in channel nanowires **110** and in embedded epi source **106** and drain **107** regions. In one embodiment, channel nanowires **110** and embedded epi source **106** and drain **107** regions are uniaxially lattice stressed in a direction parallel to the length **120** of channel nanowires **110** and are lattice relaxed in a direction perpendicular to the length **120** of channel nanowires **110**. The lattice constant mismatch between top surface **104** and embedded epi source **106** and drain **107** regions also results in embedded epi source **106** and drain **107** regions providing a force on channel nanowires **110**, in an embodiment. The force may help to maintain the uniaxial lattice stress in channel nanowires **110**.

In an embodiment, channel nanowires **110** may comprise a single crystalline material having a carrier mobility that is

4

greater than single crystalline bulk silicon. The higher carrier mobility allows device **100** to achieve higher drive currents and greater performance. In a particular embodiment, channel nanowires **110** are undoped germanium (Ge). The absence of dopants minimizes scattering of charge carriers and helps to maximize carrier mobility in channel nanowires **110**.

In an embodiment of the present invention, as illustrated in FIGS. 1A and 1B, embedded epi source **106** and drain **107** regions may be disposed in a source/drain trench **108** where the top surface **104** of substrate **102** is recessed beneath the top surface of shallow trench isolation layer **105**. Forming the embedded epi source **106** and drain **107** regions in source/drain trench **108** helps to confine the growth of the embedded epi source **106** and drain **107** regions. However, embedded source **106** and drain **107** regions need not necessarily be formed in a trench and may be on the top surface **104** of substrate **102** which is planar with or above isolation region **103**. Embedded epi source **106** and drain **107** regions may be <111>-faceted where the width **122** at the bottom is larger than the width **124** at the top of embedded epi source **106** and drain **107** regions. In such an embodiment, the plane corresponding to sidewalls **126** and **128** is the <111> lattice orientation of embedded epi source **106** and drain **107** regions.

In an embodiment, device **100** includes a bottom gate isolation **114** that is disposed on top surface **104** of substrate **102** and under the bottom-most channel nanowire **115**. Bottom gate isolation **114** serves as a capacitive isolation barrier to prevent parasitic coupling of top surface **104** of substrate **102** by gate electrode **118**. The effectiveness of bottom gate isolation **114** as a capacitive isolation barrier depends on the material from which it is formed and its thickness. In an embodiment, bottom gate isolation **114** is formed from any dielectric material (e.g., silicon oxide, silicon nitride, silicon oxynitride, low-k dielectric materials, etc.) that prevents parasitic coupling of top surface **104** of substrate **102** by gate electrode **118**. In a specific embodiment, bottom gate isolation **114** is composed of a silicon oxide layer. In an embodiment, the thickness of bottom gate isolation is sufficiently thick to isolate top surface **104** of substrate **102** from capacitive coupling by gate electrode **118**. In a particular embodiment, bottom gate isolation **114** is between about 100-300 Å. Bottom gate isolation **114** enables the bottom most channel nanowire **115** to be fully wrapped around by gate electrode **118**. If bottom gate isolation **114** is not present then bottom channel nanowire **115** would need to be controlled by a trigate or similar structure in order to prevent capacitive coupling between the gate electrode **118** and the top surface **104** of substrate **102** in order to prevent an undesired conductive channel from forming in the substrate when the device is turned “on”.

In an embodiment of the present invention, substrate **102**, may comprise one or more epitaxial single crystalline semiconductor layers (e.g., silicon, germanium, silicon germanium, gallium arsenide, indium phosphide, indium gallium arsenide, aluminum gallium arsenide, etc.) grown atop a distinct crystalline substrate (silicon, germanium, gallium arsenide, sapphire, etc.). In one such embodiment, the epitaxially grown semiconductor layers are one or more buffer layers **109** having lattice constants different from the distinct crystalline substrate. The buffer layers **109** may serve to grade the lattice constant from the distinct crystalline substrate to the top surface **104**. For example, substrate **102** may comprise epitaxially grown silicon germanium (SiGe) buffer layers **109** on a distinct crystalline silicon substrate. The germanium concentration of the SiGe buffer layers **109** may

increase from 30% germanium at the bottom-most buffer layer to 70% germanium at the top-most buffer layer, thereby gradually increasing the lattice constant.

Shallow trench isolation (STI) regions **103** may be disposed on substrate **102**, in an embodiment. STI regions **103** serve to reduce current leakage between devices **100** formed adjacent to one another. A STI layer **105** may be disposed in the STI regions **103**. STI layer **105** may comprise any well-known dielectric material, such as, but not limited to silicon oxide, silicon nitride, silicon oxynitride, a low-k dielectric, and any combination thereof.

As shown in FIG. 1B, channel nanowires **110** are formed above top surface **104** of substrate **102** and between embedded epi source **106** and drain **107** regions. Channel nanowires **110** may be formed of any well-known material such as, but not limited to Si, Ge, SiGe, GaAs, InSb, GaP, GaSb, InAlAs, InGaAs, GaSbP, GaAsSb, InP, and carbon nanotubes. Channel nanowires **110** can be formed of any well-known material which can be reversely altered from an insulating state to a conductive state by applying external electrical fields. Ideally, for higher device performance, channel nanowires **110** are formed from an undoped lattice-stressed single crystalline semiconductor material having a carrier mobility greater than single crystalline silicon, in an embodiment. As previously explained, the absence of dopants in channel nanowires **110** minimizes scattering of charge carriers and helps to maximize carrier mobility and thus increase drive current. Lattice stress in channel nanowires **110** also enhances carrier mobility and improves device performance. Typically, channel nanowires are compressive stressed for enhanced hole mobility in p-type transistor devices and are tensile stressed for enhanced electron mobility in n-type transistor devices. In an embodiment, channel nanowires **110** are uniaxially lattice stressed in a direction parallel to length **120** of channel nanowires **110**, but lattice relaxed in a direction perpendicular to the length **120** of channel nanowires **110**. In another embodiment, channel nanowires **110** may be a doped single crystalline semiconductor material. For example, channel nanowires **110** may be formed of doped single crystalline silicon. When channel nanowires **110** are doped, they are typically doped to a p-type conductivity when forming a NMOS transistor device and doped to a n-type conductivity when forming a PMOS transistor device.

As shown in FIG. 1B, channel nanowires **110** may run parallel to top surface **104** and form a vertical array of channel nanowires **110**. In an embodiment, the number of channel nanowires between embedded epi source **106** and drain **107** regions is between 3 to 6. A greater number of channel nanowires **110** allows for greater drive current through device **100**. Channel nanowires **110** have a thickness **130**, a width **132**, and a length **120**. In an embodiment of the present invention, thickness **130** is between about 5-30 nm, width **132** is between about 5-50 nm, and length **120** is between 10-100 nm. In an embodiment, channel nanowires **110** may be ribbon-shaped nanowires where the width **132** is greater than the thickness **130** of channel nanowires. In further embodiment, the cross-section of channel nanowires **110** may be circular or oval shaped rather than rectangular. The length **120** of channel nanowires essentially defines the gate length (L_g) of transistor device **100**. The effective gate "width" (W_g) of a channel nanowire **110** is the perimeter of that channel nanowire **110**. For example, for a channel nanowire having a rectangular cross-section, the effective gate "width" of the channel nanowire **110** is the sum of twice the width **132** and twice the thickness **130** of the channel nanowire **110**. The effective gate "width"

(W_g) of a transistor device **100** is the sum of the perimeters for the channel nanowires **110**.

As shown in FIG. 1B, embedded epi source **106** and drain **107** regions are formed on opposite ends of channel nanowires **110** and are coupled to channel nanowires **110**. Embedded epi source **106** and drain **107** regions may be formed of any well-known material having a lattice constant. Ideally, embedded epi source **106** and drain **107** regions are formed from an epitaxially grown single crystalline semiconductor such as, but not limited to Si, Ge, GeSn, SiGe, GaAs, InSb, GaP, GaSb, InAlAs, InGaAs, GaSbP, GaAsSb, GaN, GaP, and InP. In an embodiment embedded epi source **106** and drain **107** regions are formed from a single crystalline semiconductor material having a lattice constant different from top surface **104** of substrate **102**. As previously described, the lattice constant mismatch between embedded epi source **106** and drain **107** regions and top surface **104** of substrate **102** creates lattice stress in embedded epi source **106** and drain **107** regions, thereby improving electron mobility and transistor performance. In an embodiment, embedded epi source **106** and drain **107** regions are uniaxially lattice stressed in a direction parallel to length **120**, but lattice relaxed in a direction perpendicular to length **120**. The lattice constant mismatch between the embedded epi source **106** and drain **107** regions and top surface **104** of substrate **102** also causes embedded epi source **106** and drain **107** regions to exert a force on channel nanowires **110** which may help to maintain the lattice stress in channel nanowires **110**. In an embodiment the embedded epi source **106** and drain **107** regions are formed from the same single crystalline semiconductor material used to form the channel nanowires **110**.

In a particular embodiment, the lattice constant of embedded epi source **106** and drain **107** regions is larger than the lattice constant of top surface **104** of substrate **102**. In such an embodiment, embedded epi source **106** and drain **107** regions are compressive stressed and provide a compressive force on channel nanowires **110**. In a specific embodiment, embedded epi source **106** and drain **107** regions are epitaxial single crystalline germanium and top surface **104** of substrate **102** is epitaxial single crystalline silicon germanium. The germanium source **106** and drain **107** regions exert a compressive force on channel nanowire **110**. In an embodiment, the top surface **104** of the semiconductor substrate **102** may be formed of a semiconductor material (e.g., silicon germanium) having a first lattice constant and the channel nanowires **110** formed of a second semiconductor material (e.g., germanium) having a second lattice constant which is greater than the first lattice constant and the embedded epi source **106** and drain **107** regions may be formed of a third semiconductor material (e.g., gallium arsenide (GaAs)) having a third lattice constant which is greater than lattice constant of the channel nanowires **110** (second lattice constant) to further enhance the compressive stress in channel nanowires **110**.

In another embodiment, the lattice constant of embedded epi source **106** and drain **107** regions is smaller than the lattice constant of top surface **104** of substrate **102**. In such an embodiment, embedded epi source **106** and drain **107** regions are tensile stressed and provide a tensile force on channel nanowires **110**. In an embodiment the top surface **104** of semiconductor substrate **102** may be formed of a single crystalline semiconductor material having a first lattice constant and the channel nanowires **110** formed from a second semiconductor material having a second lattice constant which is less than the first lattice constant and the embedded source **106** and drain **107** regions may be formed

of a third semiconductor material having a third lattice constant which is less than the lattice constant of the channel nanowires **110** (second lattice constant) to further enhance the tensile stress in channel nanowires.

Typically, embedded epi source **106** and drain **107** regions are formed to an n-type conductivity type when forming a NMOS transistor device and are formed to a p-type conductivity when forming a PMOS transistor device. In an embodiment of the present invention, embedded epi source **106** and drain **107** regions have a doping concentration between $1E18$ atoms/cm³ to $1E21$ atoms/cm³. Embedded epi source **106** and drain **107** regions can be formed having a uniform doping concentration or can include sub-regions of different concentrations or dopant profiles. In an embodiment, when device **100** is formed as a symmetrical transistor, embedded epi source **106** and drain **107** regions have the same doping concentration and profile. In another embodiment, device **100** is formed as an asymmetrical transistor and the doping concentration profile of the embedded epi source **106** and drain **107** regions may vary in order to achieve any particular electrical characteristics as well known in the art.

The source **106** and drain **107** regions are said to be "embedded epi" source and drain regions because they are formed, as will be described in greater detail below, by first removing portions of the fin used to create the stressed channel nanowires **110** and then epitaxially growing the source and drain pair. For example, in an embodiment, portions of the fin used to create the stressed channel nanowires **110** are removed and then the source and drain pair is epitaxially grown from the top surface **104** of substrate **102**. The lattice of the epitaxially deposited source and drain pair continues from the lattice of the top surface **104** of the substrate. That is, the lattice of the underlying substrate dictates the lattice direction and growth of the overlying embedded epitaxy source **106** and drain **107** regions. The use of embedded epi source **106** and drain **107** regions improves device performance by providing an additional force to the channel nanowires and by providing anchors to the channel nanowires to help maintain the uniaxially stress in the channel nanowires **110** already present from earlier fabrication processes, such as fin patterning. The embedded epi source and drain regions are stressed and, thus, further stress the adjacent nanowire channels. The stress in the channel nanowires may be further enhanced by using a semiconductor material having a different lattice constant than the semiconductor material used to form the channel nanowires.

Additionally, although the semiconductor device **100** ideally includes embedded epi source **106** and drain **107** regions to enhance the strained in the channel nanowires **110** embodiments do not necessarily include embedded source and drain regions. In an embodiment of the present invention, as illustrated in FIG. 1E, a transistor **150** may include a source **156** and drain **157** region formed from a fin film stack used to create the uniaxially stressed channel nanowires **110**. For example, source **156** and drain **157** regions may be formed from alternating layers of semiconductor material **160** and sacrificial material **170** (e.g., germanium and silicon germanium respectively) and the substrate **102** used to create stressed channel nanowires **110**. In this case, source **156** and drain **157** regions are formed from a heterogeneous stack of single crystalline semiconductor films. The source **156** and drain **157** region may be doped to a desired conductivity type and level as is well known in the art. Additionally, if desired, raised source and drain regions may be formed by depositing additional epitaxial semiconductor

material (not shown) on the source **156** and drain **157** regions to increase the thickness of the source and drain regions and decrease current crowding and thereby reduce the contact resistance of the device. Transistor **150** includes gate isolation **114** to isolate gate **118** beneath the bottom most nanowire **115** from capacitively coupling to substrate **102**.

As shown in FIGS. 1B and 1C, gate dielectric layer **116** is formed on and all-around each channel nanowires **110**. Gate dielectric layer **116** may be any well-known gate dielectric layer, such as, but not limited to SiO₂, SiON, and SiN. In an embodiment, gate dielectric layer **116** is a high-k gate dielectric layer, such as a metal oxide dielectric (e.g., Ta₂O₅, TiO₂, HfO₂, HfSiO_x, ZrO₂ etc.). Gate dielectric layer **116** may also be other types of high-k dielectric layers, such as, but not limited to PZT and BST. The gate dielectric layer may also be any combination of the above dielectric materials. Gate dielectric layer **116** may be formed to a thickness between about 10-60 Å. In a specific embodiment, gate dielectric layer **116** is HfO₂ and is formed to a thickness of between about 1-6 nanometers.

Gate electrode **118** is formed on gate dielectric layer **116** and completely surrounds each channel nanowire **110**. Gate electrode **118** runs in a direction perpendicular to length **120** of channel nanowires **110**. Gate electrode **118** may be formed of any suitable gate electrode material. In an embodiment, gate electrode **118** may be a metal gate electrode such as, but not limited to Ti, TiN, TaN, W, Ru, TiAl and any combination thereof. In an embodiment where device **100** is a NMOS transistor device, gate electrode **118** may be formed from a material having a work function between 3.9-4.2 eV. In an embodiment where device **100** is a PMOS transistor device, gate electrode **118** may be formed from a material having a work function between 4.8 to 5.2 eV. In an embodiment where channel nanowires **110** in device **100** are undoped or very lightly doped, gate electrode **118** may be formed from a material having a mid-gap work function between 4.3-4.7 eV. In a specific embodiment, gate electrode **118** is TiAl.

Because gate electrode **118** and gate dielectric layer **116** completely surround each channel nanowires **110**, device **100** can be a transistor that operates in a fully depleted manner wherein when it is turned "ON", channel nanowires **110** fully deplete, thereby providing the advantageous electrical characteristics and performance of a fully depleted transistor device. When device **100** is turned "ON", a depletion region is formed in each channel nanowires **110** along with an inversion layer at the surface of each channel nanowire. The inversion layer has the same conductivity types as the embedded epi source **106** and drain **107** regions and forms a conductive channel between embedded epi source **106** and drain **107** regions to allow current to flow between them. The depletion region depletes free carriers from beneath the inversion layers. Each channel nanowire **110** is depleted of carriers except for the inversion layer, thus the transistor can be said to be a "fully depleted" transistor. Fully depleted transistors have improved electrical performance characteristics over non-fully depleted or partially depleted transistors. Operating a transistor in a fully depleted manner gives the transistor an ideal or very steep sub-threshold slope. A very steep sub-threshold slope results in improved short-channel effects such as improved drain induced barrier lowering (DIBL).

FIG. 2 is a flow chart **200** representing a method of fabricating a non-planar gate all-around device, in accordance with an embodiment of the present invention. FIGS. 3A to 3M illustrate three-dimensional and two dimensional

cross-sectional views representing the steps in a method of fabricating a non-planar gate all-around device, in accordance with an embodiment of the present invention. The method begins at step 202 in flow chart 200 by providing a substrate 301 having a fin 304 formed thereon. Substrate 301 is the material upon which the non-planar gate-all-around device is formed. Substrate 301 has a top surface 303 with a lattice constant. In an embodiment, substrate 301 includes a top single crystalline layer having a lattice constant. In one such embodiment, substrate 301 may comprise one or more buffer layers 311 grown between a distinct single crystalline substrate and the top single crystalline layer. The buffer layers 311 may serve to gradually change the lattice constant from that of the distinct crystalline substrate to that of the top single crystalline layer. The buffer layers 311 may be formed from epitaxially grown single crystalline semiconductor materials such as, but not limited to Si, Ge, GeSn, SiGe, GaAs, InSb, GaP, GaSb, InAlAs, InGaAs, GaSbP, GaAsSb, GaN, GaP, and InP. The distinct crystalline substrate on which the buffer layers 311 are formed may be any single crystalline material having a lattice constant (e.g., silicon, germanium, gallium arsenide, sapphire, etc.) In a particular embodiment, substrate 301 may comprise silicon germanium (SiGe) buffer layers epitaxially grown on a distinct single crystalline silicon substrate. The germanium concentration of the SiGe buffer layers may increase from 30% germanium for the bottom-most buffer layer to relaxed 70% germanium for the top-most buffer layer.

In an embodiment, fin 304 is formed having alternating layers of a semiconductor material 308 and a sacrificial material 310. The layers of semiconductor material 308 are subsequently formed into channel nanowires 343. The layers of sacrificial material 310 induce lattice stress on the layers of semiconductor material 308 by being lattice constant mismatched to the layers of semiconductor material 308. In an embodiment, the layers of semiconductor material 308 and the layers of sacrificial material 310 may be formed from any well-known material having a lattice constant. Ideally, the layers of semiconductor material 308 and the layers of sacrificial material 310 are formed from a single crystalline semiconductor material such as, but not limited to Si, Ge, SiGe, GaAs, InSb, GaP, GaSb, InAlAs, InGaAs, GaSbP, GaAsSb and InP. In an embodiment, the layers of semiconductor material 308 have a lattice constant different from the lattice constants of the layers of sacrificial material 310 and the top surface 303 of substrate 301. Fin 304 is lattice stressed as a result of the lattice mismatch between top surface 303, the layers of semiconductor material 308, and the layers of sacrificial material 310. In a particular embodiment, the lattice constant of the layers of semiconductor material 308 is larger than both the lattice constants of the layers of sacrificial material 310 and top surface 303. For example, the layers of semiconductor material 308 may be undoped germanium, the top surface 303 may be silicon germanium having 70% germanium concentration, and the layers of sacrificial material 310 may be silicon germanium having 70% germanium concentration. For such an embodiment, the lattice mismatch between the materials results in the layers of semiconductor material 308 being compressive lattice-stressed in fin 304. In another embodiment, the lattice constant of the layers of semiconductor material 308 is smaller than both the lattice constants of the layers of sacrificial material 310 and top surface 303. For example, the layers of semiconductor material 308 may be silicon, the top surface 303 may be silicon germanium, and the layers of sacrificial material 310 may be silicon germanium. For such an embodiment, the lattice constant between the materials

results in the layers of semiconductor material 308 being tensile lattice-stressed in fin 304. Since the sacrificial material layer 310 and semiconductor material layer 308 alternate with differing lattice constants the semiconductor material layers are biaxially stressed by the underlying sacrificial material layer 310.

Fin 304 may be formed by first blanket depositing alternating layers of semiconductor material 308 and sacrificial material 310 on top surface 303 of substrate 301 using conventional epitaxial chemical vapor deposition methods. Next, the blanket layers of semiconductor material 308 and sacrificial material 310 are patterned using conventional photolithography and etching methods to define fin 304. In an embodiment of the present invention, substrate 301 is also etched so that the bottom portion of the fin 304 includes a substrate portion 309 as illustrated in FIG. 3A. In this way, the substrate portion 309 of the fin acts as the bottom sacrificial material 310 of the fin 304. In an embodiment the substrate portion 309 of fin 304 is made thicker than the sacrificial material layers 310 in order to provide additional room between the substrate and the bottom most channel nanowire so that a bottom gate isolation film and a gate electrode/gate dielectric may be formed between the substrate and bottom channel nanowires. During patterning, substrate 301 may also be patterned to form a substrate region 312 continuous with fin 304 and STI (shallow trench isolation) regions 315, in an embodiment. STI regions 315 serve to reduce current leakage between non-planar gate all-around devices formed adjacent to one another. In an embodiment, at least part of the substrate region 312 continuous with fin 304 may comprise buffer layers 311 of substrate 301. In an embodiment, STI regions 315 are filled with an STI dielectric layer 305. STI dielectric layer 305 may be any well-known dielectric layer such as but not limited to silicon oxide, silicon nitride, silicon oxynitride, a low-k dielectric, and any combination thereof. STI dielectric layer 305 is formed by first blanket depositing a STI dielectric layer 305 on substrate 301 and over fin 304 using conventional chemical vapor deposition methods. STI dielectric layer 305 is initially deposited to a thickness greater than the combined thicknesses of fin 304 and substrate region 312. Next STI dielectric layer 305 is planarized using a conventional chemical mechanical planarization method. STI dielectric layer 305 is then recessed using a conventional etch method to exposed fin 304 as shown in FIG. 3A. In an embodiment STI dielectric is recessed below the top surface 303 of the substrate 301 so that the bottom portion of fin 304 is formed from substrate 301 as illustrated in FIG. 3A. In this way, fin 304 includes a substrate portion 309 which acts as the bottom sacrificial material 310 of fin 304. In an embodiment, the substrate portion 309 of fin 304 is thicker than the sacrificial material layers 310 above in order to provide additional space between the substrate and the bottom most channel nanowire so that a bottom, gate isolation film and a gate electrode/gate dielectric may be formed between the substrate and the bottom channel nanowire. Alternatively a distinct sacrificial layer may be formed between top surface 303 and bottom most semiconductor material layer 308.

Fin 304 has sidewalls 302 and 306, a fin height 316, a fin width 318, and a fin length 320. In the formation of fin 304, sidewalls 302 and 306 are unconstrained planes, which allows fin 304 to lattice-relax in the direction perpendicular to fin length 320. That is, the above described biaxially stressed layers are reduced to essentially uniaxially stressed layers upon fin formation. In an embodiment, fin 304 is uniaxially lattice stressed in a direction parallel to fin length

320 and lattice relaxed in a direction perpendicular to the fin length 320. In an embodiment, fin 304 is formed having a fin width 318 less than 30 nm and ideally less than 25 nm. In an embodiment, fin height 316 is less than the height where integration issues, such as fin toppling, fin profile distortion, and poor uniformity in fin critical dimensions, begin to occur. In a particular embodiment, fin height 316 is between 30-75 nm.

The thicknesses of the layers of semiconductor material 308 and the layers of sacrificial material 310 influence the electrical characteristics of the channel nanowires 343 and the integration and performance of device 100. In an embodiment, the layers of semiconductor material 308 are sufficiently thick to avoid forming channel nanowires 343 having excessive surface scattering and thus high channel resistance and low carrier mobility. The layers of semiconductor material 308 are also sufficiently thin to form channel nanowires 343 that allow device 100 to operate in a fully depleted manner. The thicknesses of the layers of sacrificial material 310 affect the subsequent spacing between channel nanowires 343 and thus the ability of gate dielectric layer 350 and gate electrode 352 to form all-around each channel nanowire 343. In an embodiment, layers of sacrificial material 310 are sufficiently thick such that the gate dielectric layer 350 may subsequently form all-around the channel nanowires 343 and the gate electrode 352 may form on the gate dielectric layer 350 to completely surround the channel nanowires 343. The thicknesses of the layers of semiconductor material 308 and the layers of sacrificial material 310 also affect fin height 316. In an embodiment, the layers of semiconductor material 308 and the layers of sacrificial material 310 are sufficiently thin to achieve a fin height 316 that is less than the height when integration issues begin to occur. In a particular embodiment, the layers of semiconductor material 308 are formed to a thickness between about 5-50 nm and the layers of sacrificial material 310 are formed to a thickness between about 5-30 nm.

The total number of alternating layers of semiconductor material 308 and sacrificial material 310 affect the fin height 316 and the drive current capacity of the device. The number of layers of semiconductor material 308 corresponds to the number of channel nanowires 343 subsequently formed. Larger numbers of channel nanowires 343 allow for greater drive current capacity of device 100. However, too many layers of semiconductor material 308 and sacrificial material 310 result in a fin height 316 that is not integratable. In an embodiment, the number of layers 308 and 310 is sufficiently low to achieve a fin height 316 that is integratable. In a particular embodiment, fin 304 has about 3-6 layers of semiconductor material 308 and about 3-6 layers of sacrificial material 310.

Referring to step 204 in flow chart 200 and corresponding FIGS. 3B and 3C, a sacrificial gate electrode 352 is formed over the channel region 328 of fin 304. The sacrificial gate electrode 352 defines the channel region of the transistor device. The sacrificial gate electrode 352 is formed by first blanket depositing a sacrificial gate dielectric layer 322 on fin 304. Sacrificial gate dielectric layer 322 deposits on the top and sidewalls 302, 306 of fin 304. Sacrificial gate dielectric layer 322 may be deposited to a thickness between about 10-50 Å. As shown in FIG. 3B, a sacrificial gate layer 324 is then blanket deposited on the sacrificial gate dielectric layer 322 and over fin 304. Sacrificial gate layer 324 is deposited to a thickness that exceeds fin thickness 316. Sacrificial gate layer 324 may be planarized using conventional chemical mechanical planarization methods. Next, as shown in FIG. 3C, sacrificial gate 326 is formed by pattern-

ing the sacrificial gate layer 324 using conventional photolithography and etching methods. Sacrificial gate electrode 326 is formed over the channel region 328 of fin 304 and has a thickness 329 that is greater than the fin height 316. Sacrificial gate electrode 326 subsequently serves to protect the channel region 328 of fin 304 during the removal of sacrificial portions 332 of fin 304.

During the patterning of the sacrificial gate electrode, the sacrificial gate dielectric layer 322 on sacrificial portions 332 of fin 304 are exposed on opposite sides of sacrificial gate electrode 352. Sacrificial gate dielectric layer 322 serves as an etch stop layer during the patterning and formation of sacrificial gate electrode 326, thereby preventing fin 304 from being damaged. In an embodiment, sacrificial gate dielectric layer 322 and sacrificial gate layer 324 are formed from materials have sufficiently different etch selectivity where sacrificial gate dielectric layer 322 may serve as an etch stop layer for etching sacrificial gate layer 324. In a particular embodiment, sacrificial gate dielectric layer 322 is a dielectric layer (e.g., silicon oxide, silicon nitride, and silicon oxynitride) and sacrificial gate layer 324 is formed from a semiconductor material (e.g., polycrystalline silicon). Sacrificial gate dielectric layer 322 and sacrificial gate layer 324 may be deposited using conventional chemical vapor deposition methods. Next, sacrificial gate dielectric layer 322 is removed from the top and sidewalls 302, 306 of the sacrificial portions 332 of fin 304 using a conventional wet etch process to expose the sacrificial portions 332 of fin 304. In the embodiment where sacrificial gate dielectric layer 322 is a silicon oxide layer, sacrificial gate dielectric layer 322 is removed using a dilute HF wet etch.

Referring to step 206 in flow chart 200 and corresponding FIG. 3C, a pair of sidewall spacers 330 are formed on opposite sidewalls 334 of sacrificial gate electrode 326. The pair of sidewall spacers 330 may be formed using conventional methods of forming selective spacers known in the art. In an embodiment, a conformal dielectric spacer layer, such as, but not limited to, silicon oxide, silicon nitride, silicon oxynitride and combinations thereof, is first blanket deposited on all structures, including fin 304 and sacrificial gate electrode 326. The dielectric spacer layer is deposited in a conformal manner so that it forms to substantially equal thicknesses on both vertical surfaces, such as the sidewalls 302, 306, 334, and horizontal surfaces, such as the top of the sacrificial gate electrode 326. The dielectric spacer layer may be deposited using conventional chemical vapor deposition methods such as low pressure chemical vapor deposition (LPCVD) and plasma enhanced chemical vapor deposition (PECVD). In an embodiment, the dielectric spacer layer is deposited to a thickness of between about 2-10 nanometers. Next, an unpatterned anisotropic etch is performed on the dielectric spacer layer using conventional anisotropic etch methods, such as reactive ion etching (RIE). During the anisotropic etching process, most of the dielectric spacer layer is removed from horizontal surfaces, leaving the dielectric spacer layer on the vertical surfaces such as the sidewalls 334 of sacrificial gate electrode 326 and the sidewalls 302, 306 of fin 304. Because the thickness 329 of sacrificial gate electrode 326 is greater than fin height 316, the thickness of the remaining dielectric spacer layer after the anisotropic etch is greater on the sidewalls 334 of sacrificial gate electrode 326 than on the sidewalls 302, 306 of fin 304. It is this thickness difference that allows the selective formation of sidewall spacers 330 on the sidewalls 334 of sacrificial gate electrode 326. Next, an unpatterned isotropic etch is performed to remove the remaining dielec-

tric spacer layer from the sidewalls **302**, **306** of fin **304**, leaving a pair of sidewall spacers **330** on opposite sidewalls **334** of sacrificial gate electrode **326**. In an embodiment, the isotropic etch is a wet etch process. In a specific embodiment, where the dielectric spacer layer is silicon nitride or silicon oxide, the isotropic etch employs a wet etchant solution comprising phosphoric acid (H₃PO₄) or a buffered oxide etch (BOE), respectively. In an alternate embodiment, the isotropic etch is a dry etch process. In one such embodiment, NF₃ gas is employed in a downstream plasma reactor to isotropically etch the dielectric spacer layers.

Referring to step **208** in flow chart **200** and corresponding FIG. **3D**, the sacrificial portions **332** of fin **304** are removed to expose the source/drain region **334** of substrate **301**. The sacrificial portion **332** of fin **304** may be removed using convention etching methods such as wet etching or plasma dry etching. In an embodiment where fin **304** comprises alternating layers of germanium **308** and silicon germanium **310**, a wet etchant such as ammonium hydroxide (NH₄OH) or tetramethylammonium hydroxide (TMAH) solution is used to selectively etch off the sacrificial portion **332** of fin **304**. The channel region **328** of fin **304** is protected from etching by the sacrificial gate **326** and the pair of sidewall spacers **330**. In an embodiment, top surface **303** of substrate **301** is recessed during the removal of the sacrificial portion **332** of fin **304** to form a source/drain trench **336**. The source/drain trench **336** serves to contain the subsequent growth of the embedded epi source **338** and drain **339** regions. In an embodiment, the source/drain trench **336** is formed to a depth of between 20 and 40 nm. Alternatively, the sacrificial portions **332** of fin **304** is removed so that the top surface **303** of substrate **301** is above or planar with STI dielectric layer **305**.

Referring to step **210** in flow chart **200** and corresponding FIG. **3E**, embedded epi source **338** and drain **339** regions are formed on the source/drain regions **334** of substrate **301**. In an embodiment, the embedded epi source **338** and drain **339** regions are formed using conventional epitaxial deposition methods such as low pressure chemical vapor deposition, vapor phase epitaxy, and molecular beam epitaxy. In an embodiment, the embedded epi source **338** and drain **339** regions form in the source/drain trench **336**. Embedded epi source **338** and drain **339** regions couple with the channel region **328** of fin **304** and rises above the top surface of the STI dielectric layer **305**. Embedded epi source **338** and drain **339** regions may be formed from any well-known material having a lattice constant. Ideally, embedded epi source **338** and drain **339** regions are formed from a single crystalline semiconductor material such as, but not limited to Si, Ge, SiGe, GeSn, GaAs, InSb, GaP, GaSb, InAlAs, InGaAs, GaSbP, GaAsSb, GaN, GaP, and InP. In an embodiment, embedded epi source **338** and drain **339** regions are formed from a single crystalline semiconductor material having a lattice constant different from top surface **303** of substrate **301**. In a particular embodiment, embedded epi source **338** and drain **339** regions have a lattice constant greater than the lattice constant of top surface **303** of substrate **301**.

In a specific embodiment, embedded epi source **338** and drain **339** regions are formed from germanium and top surface **303** of substrate **301** is silicon germanium. In an embodiment of the present invention, embedded epi source **338** and drain **339** are formed from the same semiconductor material (e.g., Ge) used to form the channel nanowires of the transistor. In an embodiment of the present invention, the embedded epi source **338** and drain **339** regions are formed from a material (e.g., GaAs) having a lattice constant greater than the semiconductor material (e.g., SiGe) of the top

surface **303** of substrate **301** and greater than the lattice constant of the semiconductor material (e.g., Ge) **308** used to form channel nanowires in order to further enhance the uniaxial compressive lattice stress in the channel nanowires.

In another specific embodiment, embedded epi source **338** and drain **339** regions are formed from silicon and top surface **303** of substrate **301** is silicon germanium. In an embodiment of the present invention, embedded epi source **338** and drain **339** are formed from the same semiconductor material (e.g., Si) used to form the channel nanowires of the transistor. In an embodiment of the present invention, the embedded epi source **338** and drain **339** regions are formed from a material (e.g., silicon carbide or carbon-doped silicon) having a lattice constant less than the semiconductor material (e.g., SiGe) of the top surface **303** of substrate **301** and less than the lattice constant of the semiconductor material (e.g., Si) **308** used to form channel nanowires in order to further enhance the uniaxial tensile lattice stress in the channel nanowires.

The lattice constant mismatch between the embedded epi source **338** and drain **339** regions and top surface **303** of substrate **301** creates lattice stress where embedded epi source **338** and drain **339** regions are uniaxially lattice stressed in a direction parallel to the length **320** of the fin **304**. The embedded epi source **338** and drain **339** regions are lattice relaxed in a direction perpendicular to the length **329** of the fin **304** because the planes corresponding to sidewalls **335** and **337** are unconstrained during the formation of the embedded epi source **338** and drain **339** regions. The lattice constant mismatch also causes embedded epi source **338** and drain **339** regions to exert a force on the channel region **328** of fin **304**. Because the layers of semiconductor material **308** in the channel region **328** of fin **304** will subsequently become the channel nanowires **343**, the embedded epi source **338** and drain **339** regions will subsequently exert a force on the channel nanowires **343** which may help to maintain the lattice stress in channel nanowires **343**. In an embodiment, the lattice constant of embedded epi source **338** and drain **339** regions is larger than top surface **303** of substrate **301**. In such an embodiment, embedded epi source **338** and drain **339** regions are compressive stressed and provides a compressive force on channel nanowires **343**. In another embodiment the lattice constant of embedded epi source **338** and drain **339** regions is smaller than top surface **303** of substrate **301**. In such an embodiment, embedded epi source **338** and drain **339** regions are tensile stressed and provides a tensile force on channel nanowires **343**.

Overall, in an embodiment, an initial uniaxial stress is formed along the channel regions of nanowire-forming layers during fin patterning of a stack of nanowire-forming layers and intervening sacrificial layers. Embedded epi source and drain regions are then formed by etching away outer portions of the fin and subsequently forming epitaxial source and drain regions in their place. In one such embodiment, the embedded epi source and drain regions are grown from a crystalline surface of a substrate below the fin. In the case that the removed outer portion are heterogeneous with alternating nanowire-forming layers and intervening sacrificial layers of differing composition, replacement with embedded source and drain regions through epitaxial growth substitutes the heterogeneous portions with regions homogeneous in composition. Thus, a new lattice mismatch is added on either side of the etched fin. The embedded epi source and drain regions, then, further enhance the uniaxial stress already present in the nanowire-forming layers. Furthermore, upon subsequent removal of the intervening sacrificial layers, the embedded epi source and drain regions act

to anchor the then formed discrete nanowires. Since, the embedded epi source and drain regions are epitaxially grown from the underlying substrate, the anchoring is effective for maintaining the initial uniaxial stress formed along the channel regions of nanowire-forming layers during fin patterning. As such, the embedded epi source and drain regions both maintain and enhance the uniaxial stress of the ultimately formed nanowire channel portions. It is noted that the above substitution of heterogeneous layers with a homogeneous layer may be performed by using the same material as the nanowire-forming layers. However, in another embodiment, to further enhance the uniaxial stress, a material different from any of the materials used in the heterogeneous stack of layers may be epitaxially grown to form the embedded epi source and drain regions. For example, in one embodiment, the epitaxial source and drain regions are formed from a material having a lattice constant greater than any of the materials in the heterogeneous fin. In that embodiment, a uniaxial compressive stress is further enhanced in the ultimately formed nanowire channel portions. In another embodiment, the epitaxial source and drain regions are formed from a material having a lattice constant less than any of the materials in the heterogeneous fin. In that embodiment, a uniaxial tensile stress is further enhanced in the ultimately formed nanowire channel portions.

In an embodiment, the top surface 303 of the source/drain regions 334 of substrate 301 is a single crystalline material having a <100>-orientation that serves as a seed layer for epitaxial growth of embedded epi source 338 and drain 339 regions. Embedded epi source 338 and drain 339 regions thus grow in a <100>-orientation. The <111> plane corresponding to sidewalls 335 and 337 may grow at a more favorable rate during the formation of embedded epi source 338 and drain 339 regions and result in the embedded epi source 338 and drain 339 regions being <111>-faceted.

It is to be appreciated that although it is desired to form embedded epi source 338 and drain 339 regions by etching away the sacrificial portion 332 of fin 304 and then growing epi to form source and drain regions, as shown in FIGS. 3D and 3E, in order to enhance the stressing of the channel nanowires, it is not necessary to do so. In an alternative embodiment, the sacrificial portions 332 of fin 304 are not etched away and are maintained to form the source and drain regions for the device, such as illustrated in FIG. 1E. The sacrificial portion 332 of fin 304 may be doped, at this time, by well known techniques, such as ion implantation to form source and drain regions of a desired conductivity type and concentration level. Additionally, an epitaxial semiconductor film may be grown on the top and sidewalls of the sacrificial portions 334 of fin 304 to form raised source and drain regions to decrease current crowding if desired.

Next, referring to FIG. 3F, an inter-layer dielectric (ILD) layer 340 is blanket deposited over all structures, including the raised source 338 and drain 339 regions, the sacrificial gate electrode 326, and the pair of sidewall spacers 334. The blanket ILD layer 340 may be deposited using a conventional chemical vapor deposition method (e.g., plasma enhanced chemical vapor deposition and low pressure chemical vapor deposition). In an embodiment, ILD layer 340 is formed from any well-known dielectric material such as, but not limited to undoped silicon oxide, doped silicon oxide (e.g., BPSG, PSG), silicon nitride, and silicon oxynitride. ILD layer 340 is then polished back using a conventional chemical mechanical planarization method to expose the top of the sacrificial gate electrode 326 and the top of the pair of sidewall spacers 334.

Referring to step 212 in flow chart 200 and corresponding FIGS. 3G and 3H, sacrificial gate electrode 326 is removed to expose the channel region 328 of fin 304. FIG. 3H is the two dimensional corresponding cross-sectional view of FIG. 3H. ILD layer 340 protects embedded epi source 338 and drain 339 regions during the removal of the sacrificial gate electrode 326. Sacrificial gate electrode 326 may be removed using a conventional etching method such a plasma dry etch or a wet etch. In an embodiment where sacrificial gate electrode 326 is polysilicon and ILD layer 340 is silicon oxide, a wet etchant such as a TMAH solution may be used to selectively remove the sacrificial gate electrode 326. The sacrificial gate dielectric layer 322 on the channel region 328 of fin 304 serves as an etch stop and protects the channel region 328 of fin 304 during the removal of sacrificial gate electrode 326. Next, sacrificial gate dielectric layer 322 is removed using a conventional etching method to expose the channel region 328 of fin 304 prior to step 214 in flow chart 200. In an embodiment where sacrificial gate dielectric layer 322 is silicon oxide, a dilute HF wet etch may be used to remove sacrificial gate dielectric layer 322.

Referring to step 214 in flow chart 200 and corresponding FIG. 3I, the layers of sacrificial material 310 are removed between the layers of semiconductor material 308 in the channel region 328 of fin 304 to form channel nanowires 343. The layers of sacrificial material 310 may be removed using any well-known etchant that is selective to the layers of semiconductor material 308 where the etchant etches the layers of sacrificial material 310 at a significantly higher rate than the layers of semiconductor material 308. In an embodiment, the etchant selectively etches the layers of semiconductor material 308 while not etching the layers of sacrificial material 310. In an embodiment where the layers of semiconductor material 308 are germanium and the layers of sacrificial material 310 are silicon germanium, the layers of sacrificial material 310 may be selectively removed using a wet etchant such as, but not limited to ammonium hydroxide (NH₄OH), tetramethylammonium hydroxide (TMAH), ethylenediamine pyrocatechol (EDP), or potassium hydroxide (KOH) solution. In an embodiment where the layers of semiconductor material 308 are silicon and the layers of sacrificial material 310 are silicon germanium, the layers of sacrificial material 310 may be selectively removed using a wet etchant such as, but not limited to aqueous carboxylic acid/nitric acid/HF solution and aqueous citric acid/nitric acid/HF solution. The removal of the layers of sacrificial material 310 leaves voids 342 between the layers of semiconductor material 308. The voids 342 between the layers of semiconductor material 308 have a thickness of between about 5-30 nm. The remaining layers of semiconductor material 310 form a vertical array of channel nanowires 343 that are coupled to embedded epi source 338 and drain 339 regions. The channel nanowires 343 formed have a thickness of between about 5-50 nm. The channel nanowires 343 run parallel to top surface 303 and are aligned with each other to form a single column of channel nanowires 343 with a bottom-most channel nanowire 344 at the very bottom of the column.

In an embodiment, as shown in FIG. 3I, all of the sacrificial material 310 between the embedded epi source and drain regions is removed, including the portions beneath sidewall spacers 330. Etching the portions beneath the spacers simplifies manufacturing because the removal of the sacrificial material 310 can be based on the selectivity of the etch with respect to the sacrificial material and embedded epi source and drain regions enabling an over etch to be used to remove the sacrificial material. Removal of the sacrificial

material **310** beneath the spacer **330**, however, may result in a slightly larger opening formed between spacer **330** above the top most channel nanowire **343**. This may result in the subsequently formed gate electrode having slightly larger gate length between the channel nanowires as compared to gate length above the top most channel nanowire. In an embodiment, a timed etch is utilized so that a portion of the sacrificial material **310** adjacent to the embedded epi source and drain regions remains beneath the spacers **330** after etching sacrificial material **310** to form channel nanowires **343**. In this way, the subsequently formed gate electrode may have the same gate length adjacent to all surfaces of the channel nanowires.

Referring to step **216** in flow chart **200** and corresponding FIGS. **3J** and **3K**, a bottom gate isolation **348** is formed on the top surface **303** of substrate **301** and under the bottom-most channel nanowire **344**. The bottom gate isolation **348** is formed by first blanket depositing a dielectric layer **346** around and over the channel nanowires **343** as shown in FIG. **3J**. The dielectric layer **346** completely fills the voids **342** between the channel nanowires **343**, including the region between the bottom-most channel nanowire **344** and the top surface **303** of substrate **301**. Dielectric layer **346** also forms on the top surface of the ILD layer **340**. In an embodiment, dielectric layer **346** is formed from any well-known dielectric material such as, but not limited to silicon oxide, silicon nitride, and silicon oxynitride. In a specific embodiment, dielectric layer **346** is formed from silicon oxide. Ideally, dielectric layer **346** is formed using a highly conformal deposition method such as low pressure chemical vapor deposition (LPCVD), atomic layer deposition (ALD), or spin-on-dielectric process to ensure that the voids **342** between the channel nanowires **343** are completely filled. Next, as shown in FIG. **3K**, the dielectric layer **346** is recessed from the top downward using a conventional isotropic dielectric etching method. In a particular embodiment where the dielectric layer **346** is silicon oxide, a timed HF wet etch method is used to recess dielectric layer **346**. During the recess of dielectric layer **346**, the majority of the dielectric layer **346** is removed, leaving behind a thin layer on top surface **303** of substrate **301** and under the bottom-most channel nanowire **344** that forms the bottom gate isolation **348**. The thickness of the bottom gate isolation **348** depends on the length of time that the dielectric layer **346** is recessed. In an embodiment, the recess is performed for a sufficiently long time to achieve a bottom gate isolation thickness that is sufficiently thick to isolate the top surface **303** of substrate **301** from capacitive coupling by gate electrode **352**. In an embodiment, the recess is performed for a sufficiently long time to achieve a bottom gate isolation thickness that is sufficiently thin such that the void between the bottom-most channel nanowire **344** and the bottom gate isolation **348** is large enough for the gate dielectric layer **350** to be formed all-around the bottom-most channel nanowire and for the gate electrode **352** to form around the bottom-most channel nanowire **344**. In an embodiment, the thickness of the bottom gate isolation **348** formed is sufficiently thick to isolate the top surface **303** of substrate **301** from capacitive coupling by gate electrode **352** and sufficiently thin for gate dielectric layer **350** and gate electrode **352** to surround the bottom-most channel nanowire **344**. In a particular embodiment, the thickness of bottom gate isolation **348** is between about 100-300 Å.

Referring to steps **218** and **220** in flow chart **200** and corresponding FIGS. **3L** and **3M**, a gate dielectric layer **350** is formed around each channel nanowire **343** and a gate electrode **352** is formed on the gate dielectric layer **350** and

surrounds each channel nanowire **343**. FIG. **3M** is the corresponding three dimensional cross-sectional view of FIG. **3L**. Gate dielectric layer **350** may be formed from any well-known gate dielectric material as previously described. The gate dielectric layer **350** is formed using a highly conformal deposition process such as atomic layer deposition (ALD) in order to ensure the formation of a gate dielectric layer having a uniform thickness around each channel nanowire **343**. In a particular embodiment, the gate dielectric layer is HfO₂ and is deposited to a thickness between 1-6 nanometers. The gate dielectric layer **350** is blanket deposited and also forms on the top surface of ILD layer **340**. Next, a gate electrode material is blanket deposited on the gate dielectric layer **350** to form gate electrode **352**. Gate electrode **352** may be formed from any well-known gate electrode material as previously described. The gate electrode material is deposited using a conformal deposition process such as atomic layer deposition (ALD) to ensure that gate electrode **352** is formed on the gate dielectric layer **350** and around and between each channel nanowire **343**. The blanket gate electrode material and gate dielectric layer **350** deposited on the top of ILD layer **340** are then chemically mechanically planarized until the top surface of the ILD layer **340** is revealed as shown in FIGS. **3L** and **3M**. The resultant device **300** formed using the method described in flowchart **200** is a non-planar gate all-around device, in accordance with an embodiment of the present invention.

FIG. **4** illustrates a computing device **400** in accordance with one implementation of the invention. The computing device **400** houses a board **402**. The board **402** may include a number of components, including but not limited to a processor **404** and at least one communication chip **406**. The processor **404** is physically and electrically coupled to the board **402**. In some implementations the at least one communication chip **406** is also physically and electrically coupled to the board **402**. In further implementations, the communication chip **406** is part of the processor **404**.

Depending on its applications, computing device **400** may include other components that may or may not be physically and electrically coupled to the board **402**. These other components include, but are not limited to, volatile memory (e.g., DRAM), non-volatile memory (e.g., ROM), flash memory, a graphics processor, a digital signal processor, a crypto processor, a chipset, an antenna, a display, a touchscreen display, a touchscreen controller, a battery, an audio codec, a video codec, a power amplifier, a global positioning system (GPS) device, a compass, an accelerometer, a gyroscope, a speaker, a camera, and a mass storage device (such as hard disk drive, compact disk (CD), digital versatile disk (DVD), and so forth).

The communication chip **406** enables wireless communications for the transfer of data to and from the computing device **400**. The term “wireless” and its derivatives may be used to describe circuits, devices, systems, methods, techniques, communications channels, etc., that may communicate data through the use of modulated electromagnetic radiation through a non-solid medium. The term does not imply that the associated devices do not contain any wires, although in some embodiments they might not. The communication chip **406** may implement any of a number of wireless standards or protocols, including but not limited to Wi-Fi (IEEE 802.11 family), WiMAX (IEEE 802.16 family), IEEE 802.20, long term evolution (LTE), Ev-DO, HSPA+, HSDPA+, HSUPA+, EDGE, GSM, GPRS, CDMA, TDMA, DECT, Bluetooth, derivatives thereof, as well as any other wireless protocols that are designated as 3G, 4G, 5G, and beyond. The computing device **400** may include a

19

plurality of communication chips **406**. For instance, a first communication chip **406** may be dedicated to shorter range wireless communications such as Wi-Fi and Bluetooth and a second communication chip **406** may be dedicated to longer range wireless communications such as GPS, EDGE, GPRS, CDMA, WiMAX, LTE, Ev-DO, and others.

The processor **404** of the computing device **400** includes an integrated circuit die packaged within the processor **404**. In some implementations of the invention, the integrated circuit die of the processor includes one or more devices, such as non-planar gate all-around transistor devices, that are formed in accordance with implementations of the invention. The term “processor” may refer to any device or portion of a device that processes electronic data from registers and/or memory to transform that electronic data into other electronic data that may be stored in registers and/or memory.

The communication chip **406** also includes an integrated circuit die packaged within the communication chip **406**. In accordance with another implementation of the invention, the integrated circuit die of the communication chip includes one or more devices, such as non-planar gate all-around transistor devices, that are formed in accordance with implementations of the invention.

In further implementations, another component housed within the computing device **400** may contain an integrated circuit die that includes one or more devices, such as non-planar gate all-around transistor devices, that are formed in accordance with implementations of the invention.

In various implementations, the computing device **400** may be a laptop, a netbook, a notebook, an ultrabook, a smartphone, a tablet, a personal digital assistant (PDA), an ultra mobile PC, a mobile phone, a desktop computer, a server, a printer, a scanner, a monitor, a set-top box, an entertainment control unit, a digital camera, a portable music player, or a digital video recorder. In further implementations, the computing device **400** may be any other electronic device that processes data.

Thus, one or more embodiments of the present invention may include a non-planar gate all-around transistor device with one of embedded epi source and drain regions or a bottom gate isolation layer formed between a substrate and a bottom channel nanowire, or both.

What is claimed is:

1. A semiconductor device comprising:

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

a source region above the substrate the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant, wherein the source region and the drain region provide a uniaxial stress to the nanowire;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer,

20

wherein the second material is the same as the third material.

2. The device of claim 1, wherein the second lattice constant is larger than the first lattice constant.

3. The device of claim 1, wherein the second material is the same as the third material.]

4. [The device of claim 1.] *A semiconductor device comprising:*

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

a source region above the substrate the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant, wherein the source region and the drain region provide a uniaxial stress to the nanowire;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer,

wherein the source region and the drain region both have side walls that are angled.

5. [The device of claim 1.] *A semiconductor device comprising:*

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

a source region above the substrate the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant, wherein the source region and the drain region provide a uniaxial stress to the nanowire;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer,

wherein the source region has a first width at a first position above the substrate, the source region has a second width at a second position above the substrate; the second position being a different distance from the substrate than the first position; and the first width is greater than the second width.

6. The device of claim 5, wherein the first width of the source is greater than a maximum width of the first nanowire.

7. [The device of claim 1, further comprising] *A semiconductor device comprising:*

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

21

a source region above the substrate the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant, wherein the source region and the drain region provide a uniaxial stress to the nanowire;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer;

an isolation region over a first portion of the substrate; wherein a second portion of the substrate extends up past a bottom surface of the isolation region.

8. The device of claim 7, wherein the second portion of the substrate does not extend up to a top surface of the isolation region.

9. The device of claim 7, wherein at least portions of the nanowire are directly above the second portion of the substrate, but are not in direct contact with the second portion of the substrate.

10. [The device of claim 1.] A semiconductor device comprising:

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

a source region above the substrate the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant, wherein the source region and the drain region provide a uniaxial stress to the nanowire;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer;

wherein the drain region has a side wall, the side wall of the drain region is a <111> facet.

11. A semiconductor device, comprising:

a substrate having a top surface with a first lattice constant;

embedded epi source and drain regions disposed on the top surface of the substrates said embedded epi source and drain regions having a second lattice constant that is different from the first lattice constant;

a channel nanowire having a third lattice constant that is different from the first lattice constant, wherein the third lattice constant is the same as the second lattice constant, the channel nanowire coupled to the embedded epi source and drain regions, wherein the embed-

22

ded epi source and drain regions provide a uniaxial stress to the channel nanowire;

a gate dielectric layer disposed on and all-around one axis of the channel nanowire, wherein the gate dielectric layer is directly on the channel nanowire having the third lattice constant; and

a gate electrode disposed on the gate dielectric layer and surrounding the one axis of the channel nanowire.

12. The semiconductor device of claim 11, wherein said epi source and drain regions are [111]-faceted.

13. The semiconductor device of claim 11, further comprising a bottom gate isolation disposed on the top surface of the substrate and under the channel nanowire wherein said bottom gate isolation has a thickness between about 100-300 Angstroms.

14. A semiconductor device, comprising:

a semiconductor substrate comprising a first material, the first material having a first lattice constant;

a source region above the substrate, the source region comprising a second material, the second material having a second lattice constant different than the first lattice constant;

a drain region above the substrate, the drain region comprising the second material, wherein the drain region has a side, the side wall of the drain region is a <111> facet;

a nanowire, the nanowire being coupled to the source region and being coupled to the drain region, the nanowire comprising a third material, the third material having a third lattice constant substantially the same as the second lattice constant;

a gate dielectric layer around at least a portion of the nanowire, wherein the gate dielectric layer is directly on the third material of the nanowire; and

a gate electrode around at least a portion of the nanowire and, the gate electrode being separated from the nanowire by at least the gate dielectric layer.

15. A semiconductor device comprising:

a substrate having a top surface with a first lattice constant;

embedded epi source and drain regions disposed on the top surface of the substrate;

said embedded epi source and drain regions having a second lattice constant that is different from the first lattice constant; wherein said embedded epi source and drain regions are [111]-faceted;

a channel nanowire having a third lattice constant that is different from the first lattice constant, wherein the third lattice constant is the same as the second lattice constant, the channel nanowire coupled to the embedded epi source and drain regions;

a gate dielectric layer disposed on and all-around one axis of the channel nanowire, wherein the gate dielectric layer is directly on the channel nanowire having the third lattice constant; and

a gate electrode disposed on the gate dielectric layer and surrounding the one axis of the channel nanowire.

16. A semiconductor device comprising:

a substrate having a top surface with a first lattice constant;

[embedded epi] source and drain regions disposed on the top surface of the substrate, said [embedded epi] source and drain regions having a second lattice constant that is different from the first lattice constant;

a channel nanowire comprising a material having a third lattice constant that is different from the first lattice constant, wherein the third lattice constant is the same

- as the second lattice constant, the channel nanowire coupled to the [embedded epi] source and drain regions;
- a gate dielectric layer disposed on [and all-around one axis of] the channel nanowire, wherein the gate dielectric layer is directly on *the material of* the channel nanowire having the third lattice constant; 5
- a gate electrode disposed on the gate dielectric layer and surrounding [the one axis] *at least a portion* of the channel nanowire; and 10
- a bottom gate isolation disposed on the top surface of the substrate and under the channel nanowire wherein said bottom gate isolation has a thickness between [about] 100-300 Angstroms. 15

* * * * *

15