

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 November 2010 (11.11.2010)

PCT

(10) International Publication Number
WO 2010/128305 A8

(51) International Patent Classification:
B60C 17/04 (2006.01) **B60C 17/06** (2006.01)

(21) International Application Number:
PCT/GB2010/000919

(22) International Filing Date:
7 May 2010 (07.05.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0907888.2 7 May 2009 (07.05.2009) GB

(71) Applicant (for all designated States except US): **RUN FLAT SYSTEMS LIMITED** [GB/GB]; Central House, 124 High Street, Hampton Hill, Middlesex TW12 1NS (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **LUST Richard** [GB/ES]; Apartado de Correos 74, Tobarra, E-02500 Albacete (ES).

(74) Agents: **BENNETT, Adrian** et al.; A.A. Thornton & Co., 235 High Holborn, London WC1V 7LE (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(48) Date of publication of this corrected version:

1 December 2011

(15) Information about Correction:
see Notice of 1 December 2011

(54) Title: A RUNFLAT DEVICE AND A METHOD FOR FITTING THE SAME

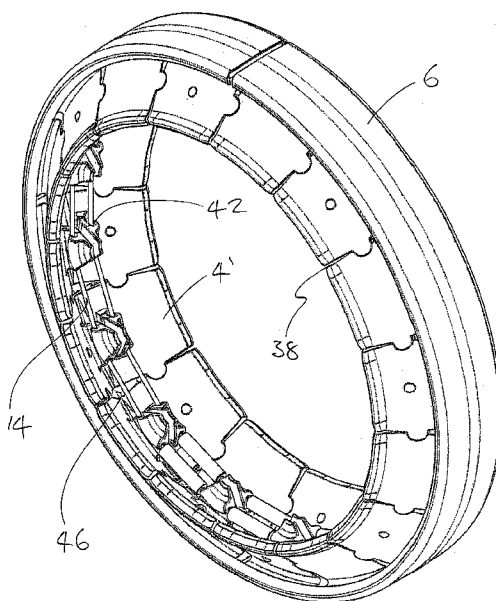


Fig. 5

(57) Abstract: The present invention relates to a runflat device (2), particularly, but not exclusively, a combined runflat and double sided beadlock that can be fitted to any size and type of wheel (1) regardless of the shape and depth of the wheel well (10). The runflat device (2) can be fitted using standard tools and tightened through manipulation of a valve assembly (52).