

(12) **DEMANDE DE BREVET CANADIEN**
CANADIAN PATENT APPLICATION

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2017/02/03
(87) Date publication PCT/PCT Publication Date: 2017/08/10
(85) Entrée phase nationale/National Entry: 2018/06/26
(86) N° demande PCT/PCT Application No.: US 2017/016587
(87) N° publication PCT/PCT Publication No.: 2017/136778
(30) Priorités/Priorities: 2016/02/05 (US62/292,142);
2017/02/01 (US15/422,354)

(51) Cl.Int./Int.Cl. *A61F 2/24* (2006.01),
A61B 17/00 (2006.01), *A61B 17/34* (2006.01)

(71) Demandeur/Applicant:
EDWARDS LIFESCIENCES CORPORATION, US

(72) **Inventeurs/Inventors:**
 ARMER, DUSTIN P., US;
 FRANKLIN, MICHAEL D., US;
 DELGADO, SERGIO, US;
 ABBOTT, EASON MICHAEL, US;
 JOSHI, ABHIJEET, US;
 SIRIMANNE, DINESH L., US: ...

(74) **Agent:** NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.

(54) Titre : DISPOSITIFS ET SYSTEMES PERMETTANT D'ANCRER UNE VALVULE CARDIAQUE

(54) Title: DEVICES AND SYSTEMS FOR DOCKING A HEART VALVE

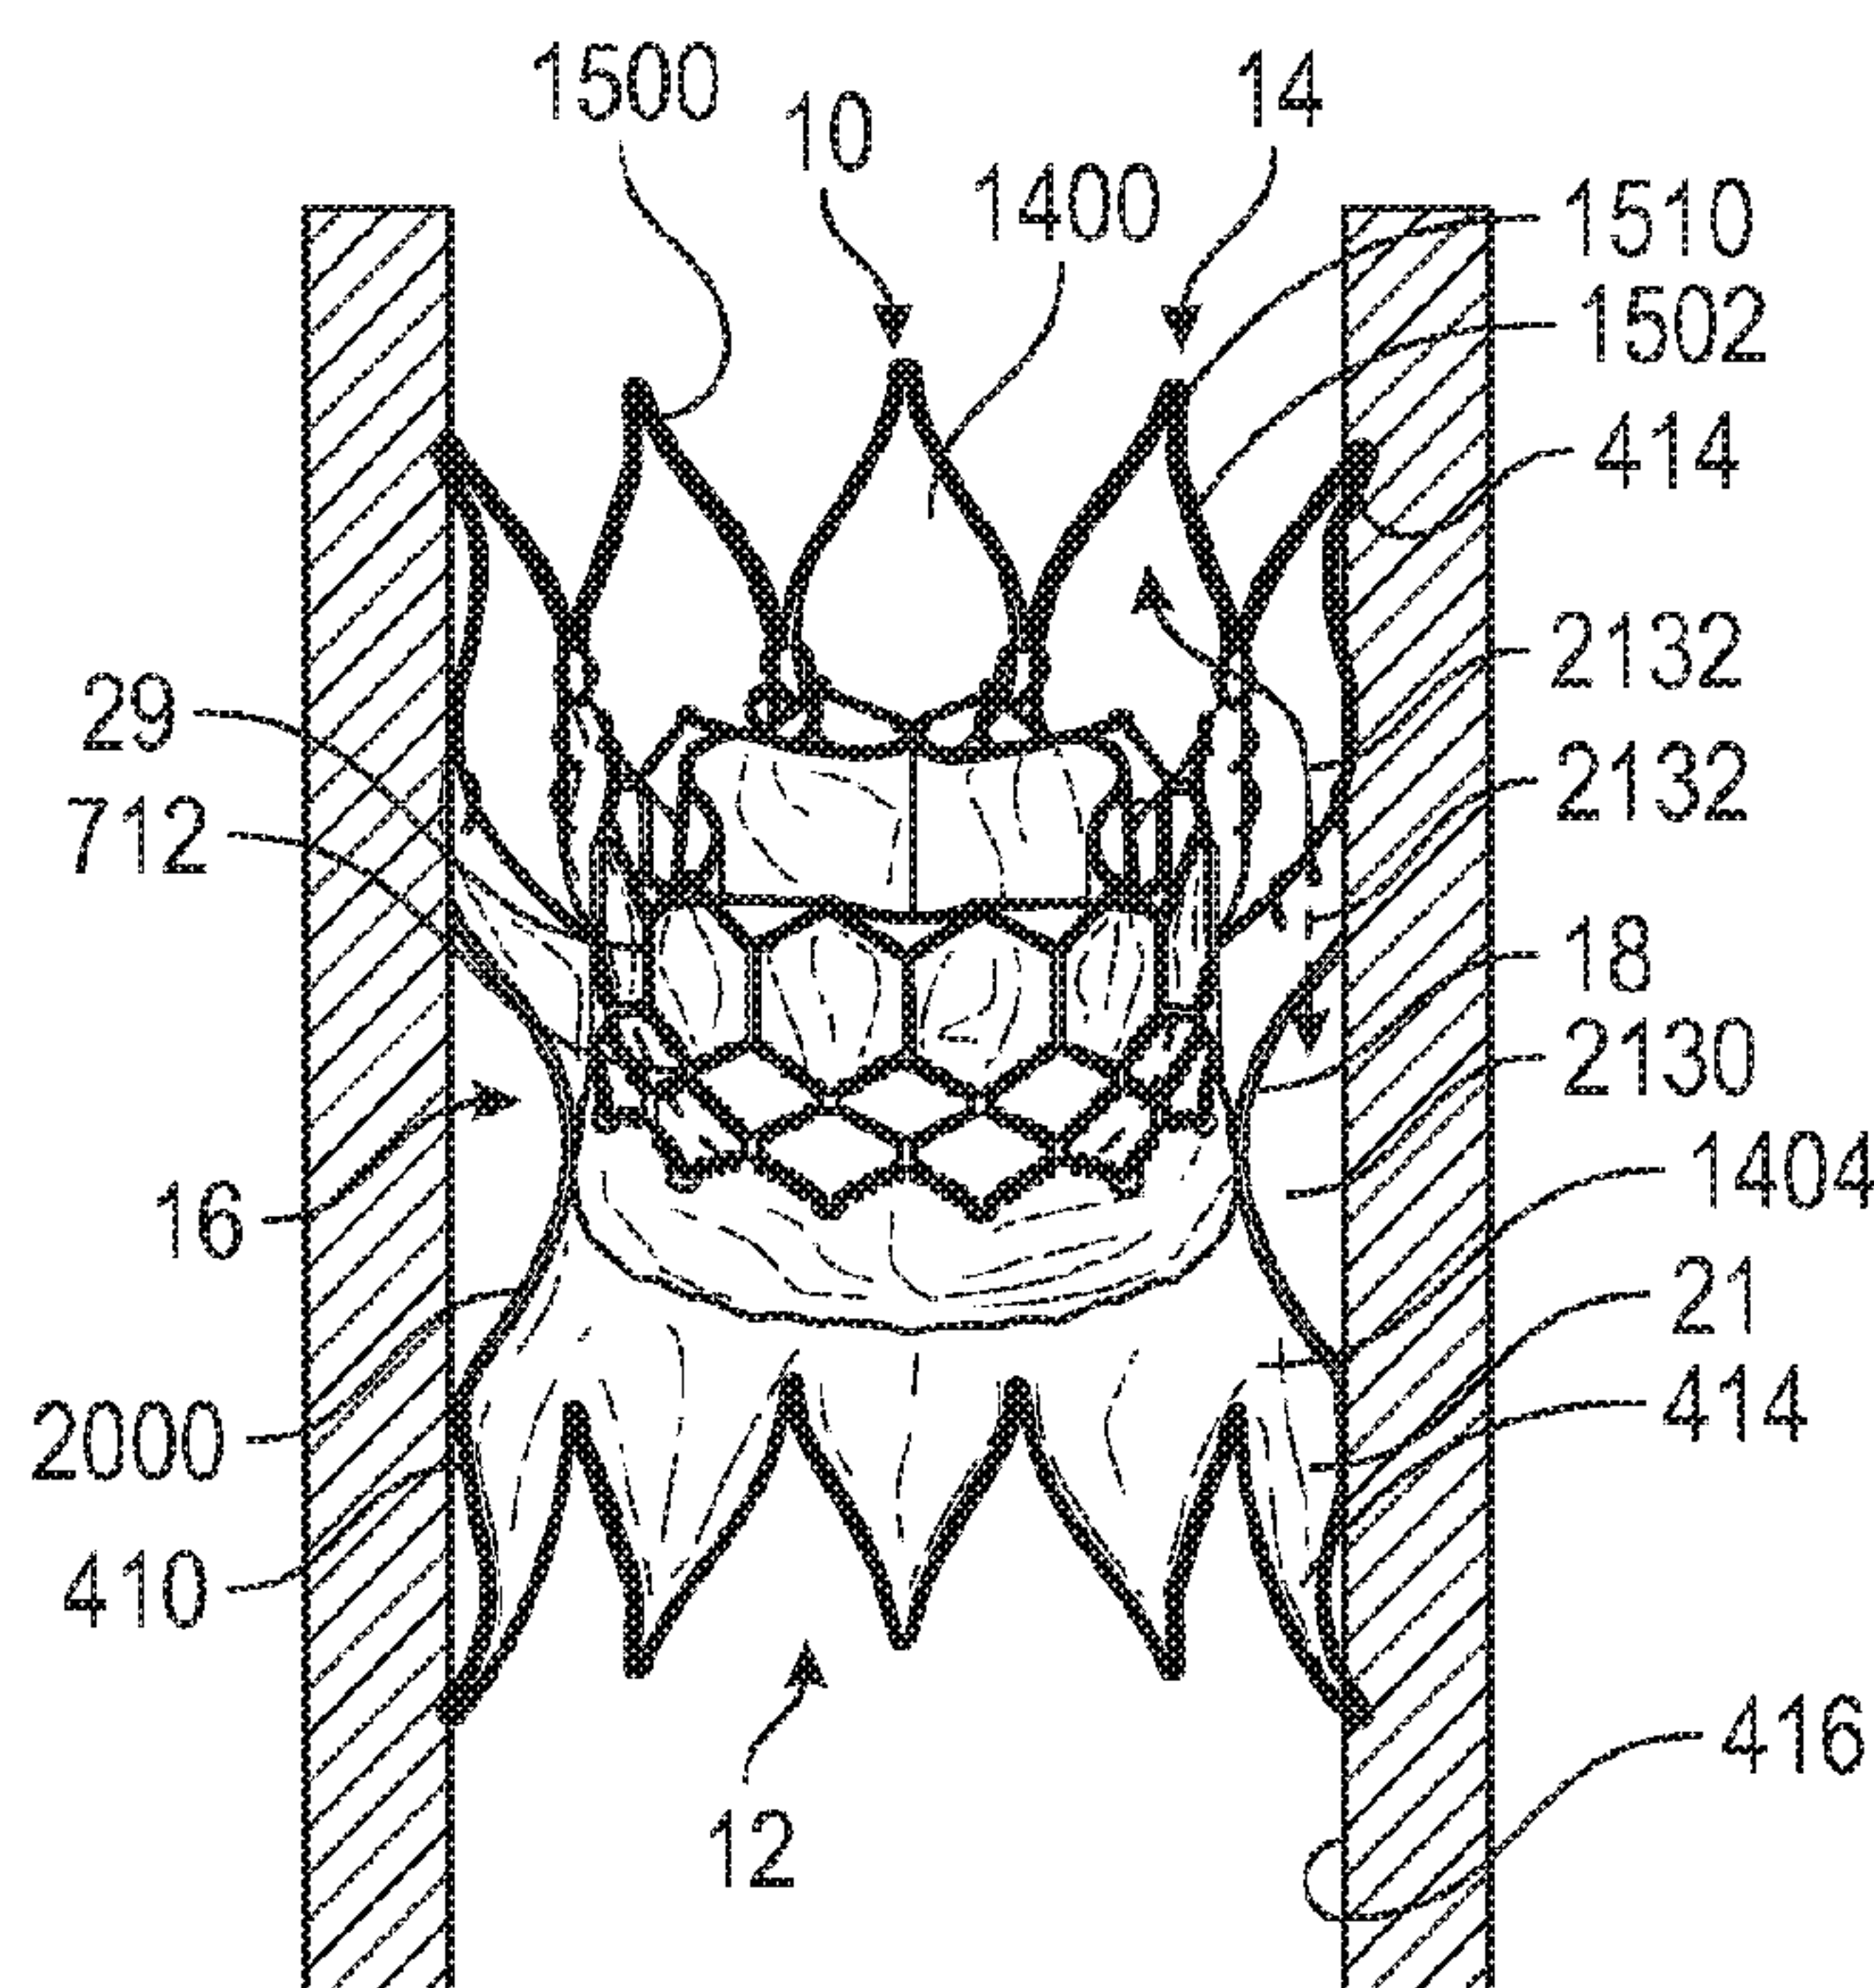


FIG. 22

(57) **Abrégé/Abstract:**

Expandable docking stations for docking an expandable valve can include a valve seat, one or more sealing portions, and one or more retaining portions. The valve seat can be unexpandable or substantially unexpandable beyond a deployed size. The one or more sealing portions are connected to the valve seat and extend radially outward of the valve seat. The one or more sealing portions are constructed to expand outward of the valve seat and provide a seal over a range of sizes. The one or more retaining portions are connected to the one or more sealing portions. The one or more retaining portions are configured to retain the docking station at a deployed position.

(72) **Inventeurs(suite)/Inventors(continued)**: JOSEPH, RUSSELL T., US; NGUYEN, TRAM NGOC, US; NGUYEN, SON V., US; NGO, HIEN TRAN, US; TRAN, VIVIAN, US; BOWMAN, CHARLES L., US; ROWE, STANTON J., US

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



WIPO | PCT



(10) International Publication Number
WO 2017/136778 A9

(43) International Publication Date
10 August 2017 (10.08.2017)

(51) International Patent Classification:

A61F 2/24 (2006.01) *A61B 17/00* (2006.01)
A61B 17/34 (2006.01)

(21) International Application Number:

PCT/US2017/016587

(22) International Filing Date:

3 February 2017 (03.02.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

62/292,142 5 February 2016 (05.02.2016) US
15/422,354 1 February 2017 (01.02.2017) US

(71) Applicant: **EDWARDS LIFESCIENCES CORPORATION** [US/US]; One Edwards Way, Irvine, CA 92614 (US).

(72) Inventors: **ARMER, Dustin, P.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **FRANKLIN, Michael, D.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **DELGADO, Sergio**; Edwards Lifesciences, One Ed-

wards Way, Legal Department, Irvine, CA 92614 (US). **ABBOTT, Eason, Michael**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **JOSHI, Abhijeet**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **SIRIM-ANNE, Dinesh, L.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **JOSEPH, Russell, T.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **NGUYEN, Tram, Ngoc**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **NGUYEN, Son, V.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **NGO, Hien, Tran**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **TRAN, Vivian**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **BOWMAN, Charles, L.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US). **ROWE, Stanton, J.**; Edwards Lifesciences, One Edwards Way, Legal Department, Irvine, CA 92614 (US).

(74) Agents: **RICHARDSON, Thomas, C.** et al.; Edwards Lifesciences, One Edwards Way, Irvine, CA 92614 (US).

[Continued on next page]

(54) Title: DEVICES AND SYSTEMS FOR DOCKING A HEART VALVE

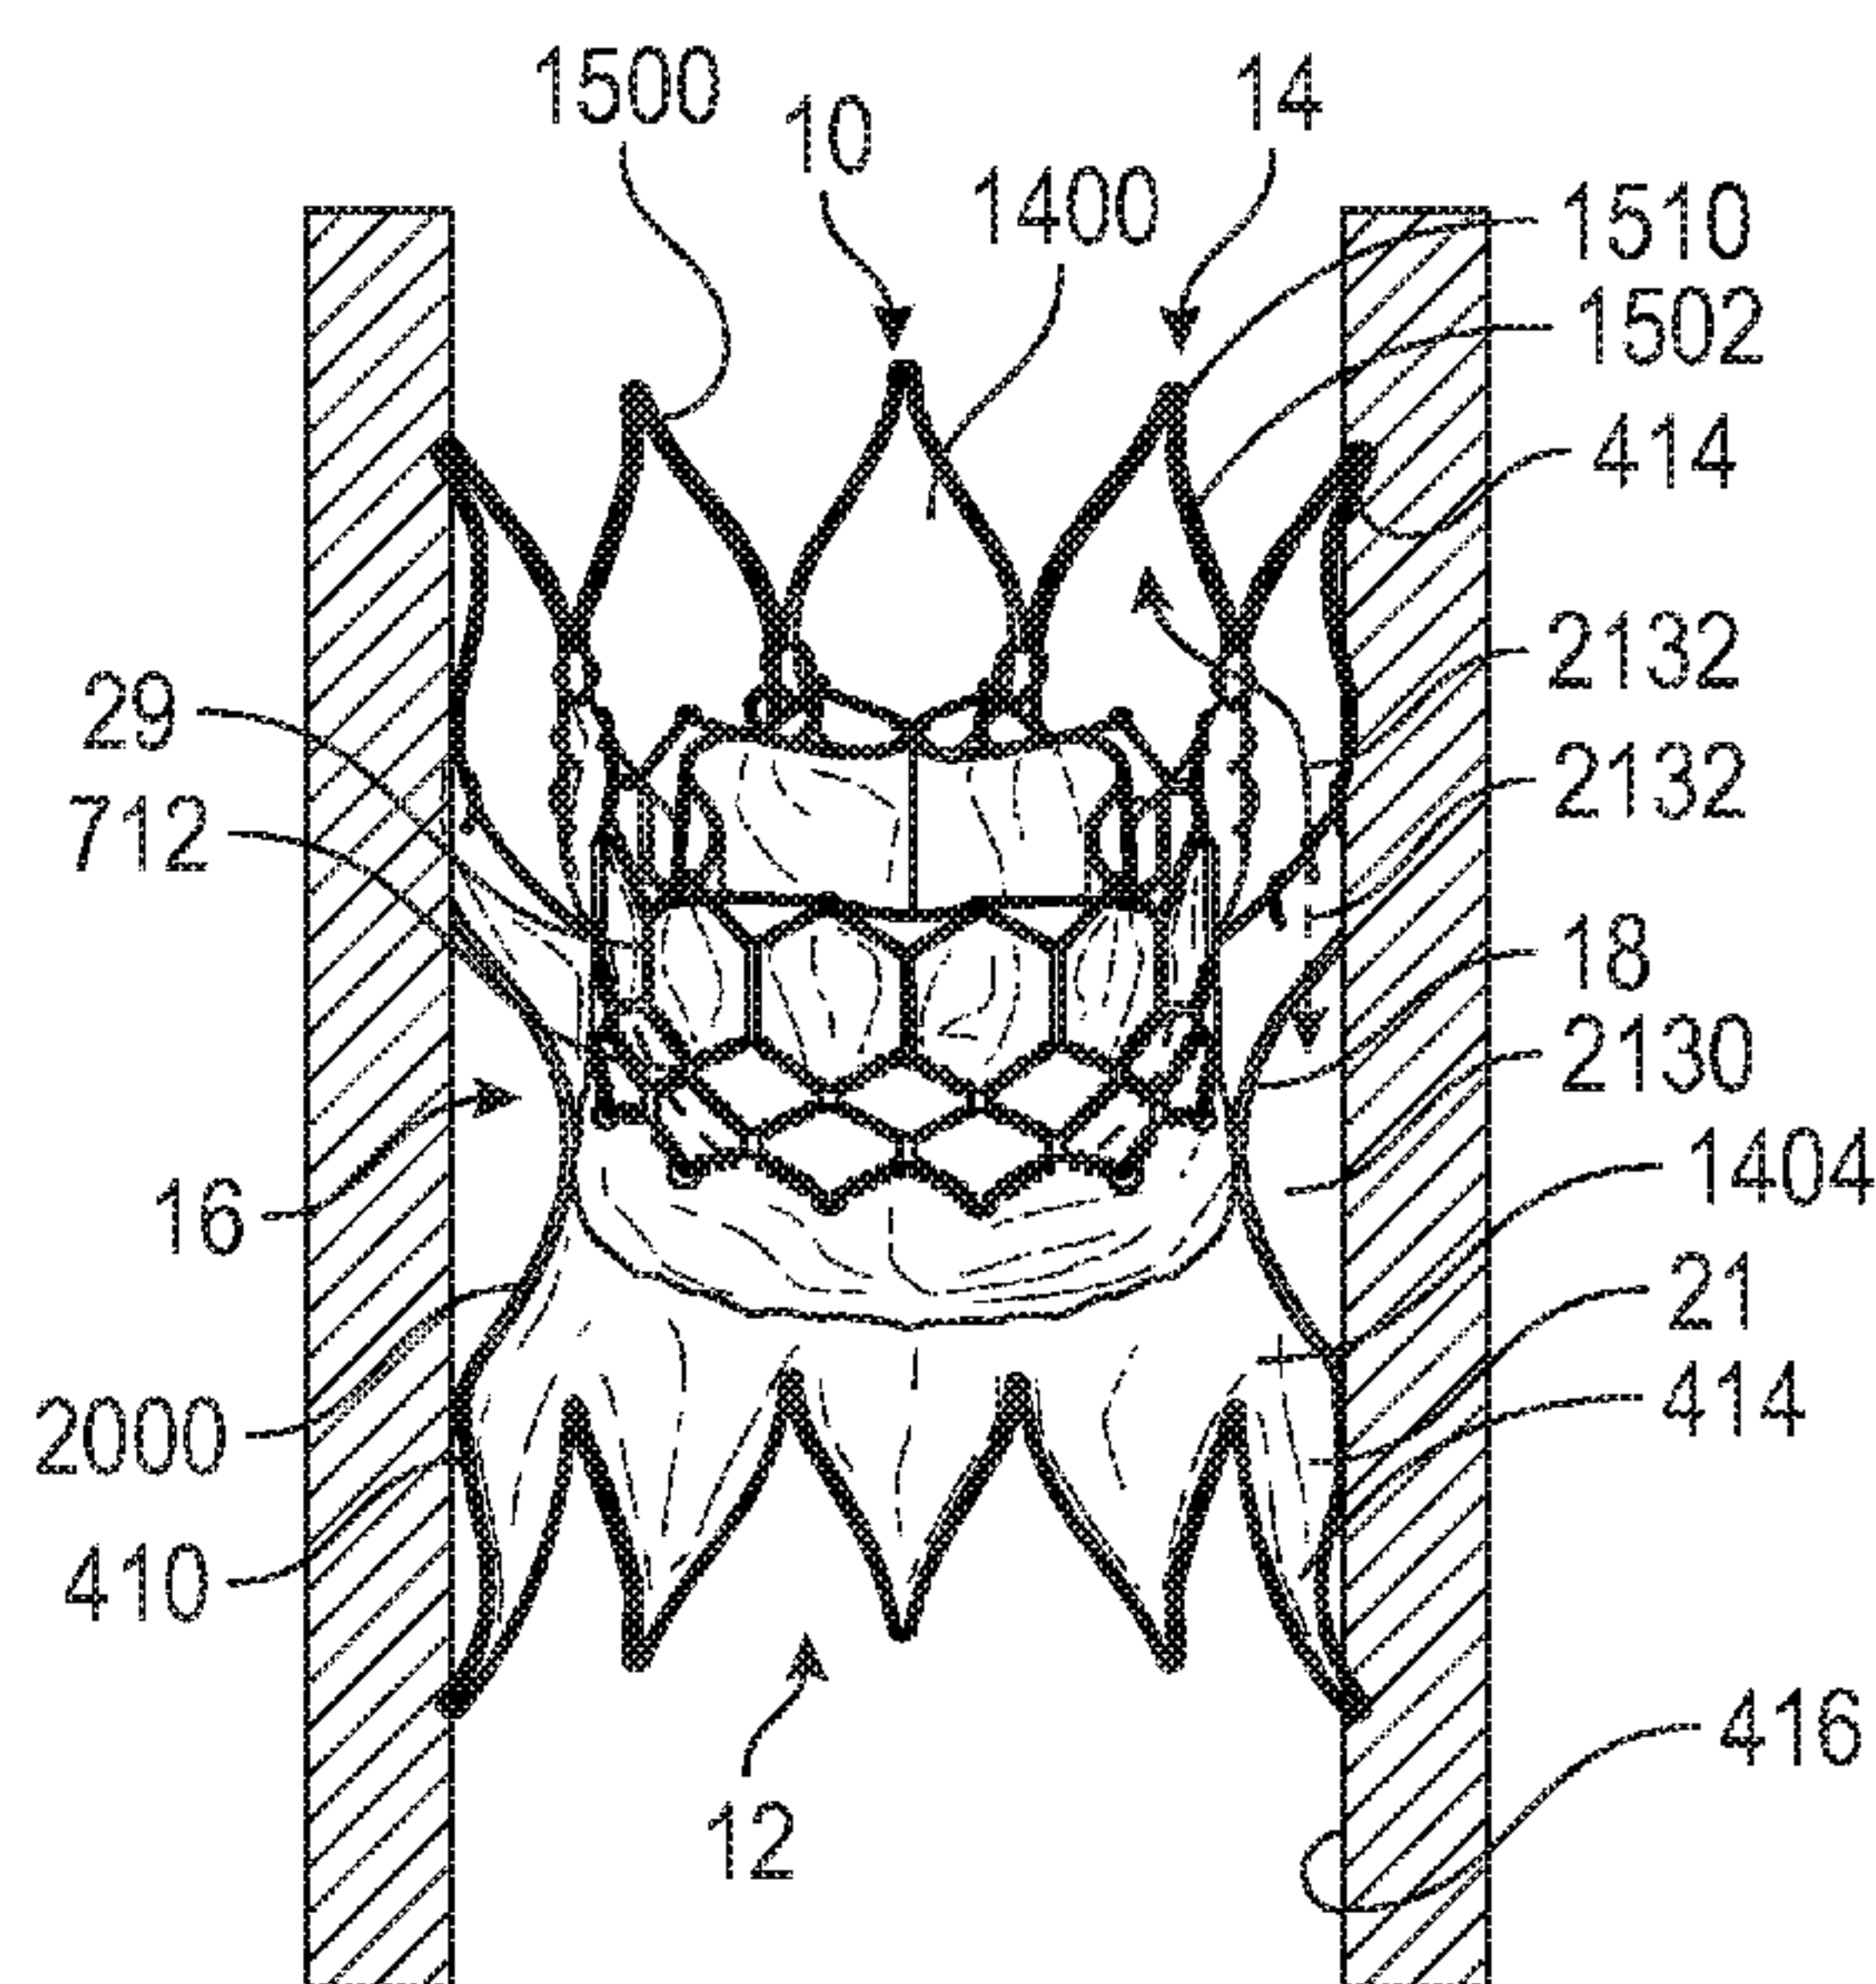


FIG. 22

(57) Abstract: Expandable docking stations for docking an expandable valve can include a valve seat, one or more sealing portions, and one or more retaining portions. The valve seat can be unexpandable or substantially unexpandable beyond a deployed size. The one or more sealing portions are connected to the valve seat and extend radially outward of the valve seat. The one or more sealing portions are constructed to expand outward of the valve seat and provide a seal over a range of sizes. The one or more retaining portions are connected to the one or more sealing portions. The one or more retaining portions are configured to retain the docking station at a deployed position.

WO 2017/136778 A9

- (81) **Designated States** *(unless otherwise indicated, for every kind of national protection available):* AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** *(unless otherwise indicated, for every kind of regional protection available):* ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,

TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

(48) Date of publication of this corrected version:
28 September 2017

(15) Information about Correction:
see Notice of 28 September 2017

- 1 -

DEVICES AND SYSTEMS FOR DOCKING A HEART VALVE

FIELD OF THE INVENTION

[0001] The present invention relates to heart valves and, in particular, docking stations/stents, delivery systems, and methods for use in implanting a heart valve, e.g., a transcatheter heart valve (“THV”).

BACKGROUND OF THE INVENTION

[0002] Prosthetic heart valves can be used to treat cardiac valvular disorders. The native heart valves (the aortic, pulmonary, tricuspid and mitral valves) serve critical functions in assuring the forward flow of an adequate supply of blood through the cardiovascular system. These heart valves can be rendered less effective by congenital, inflammatory, or infectious conditions. Such conditions can eventually lead to serious cardiovascular compromise or death. For many years the definitive treatment for such disorders was the surgical repair or replacement of the valve during open heart surgery.

[0003] A transcatheter technique can also be used for introducing and implanting a prosthetic heart valve using a flexible catheter in a manner that is less invasive than open heart surgery. In this technique, a prosthetic valve can be mounted in a crimped state on the end portion of a flexible catheter and advanced through a blood vessel of the patient until the valve reaches the implantation site. The valve at the catheter tip can then be expanded to its functional size at the site of the defective native valve, such as by inflating a balloon on which the valve is mounted. Alternatively, the valve can have a resilient, self-expanding stent or frame that expands the valve to its functional size when it is advanced from a delivery sheath at the distal end of the catheter.

- 2 -

[0004] Transcatheter heart valves (THVs) may be appropriately sized to be placed inside most native aortic valves. However, with larger native valves, blood vessels, and grafts, aortic transcatheter valves might be too small to secure into the larger implantation or deployment site. In this case, the transcatheter valve may not be large enough to sufficiently expand inside the native valve or other implantation or deployment site to be secured in place.

[0005] Replacing the pulmonary valve, which is sometimes referred to as the pulmonic valve, presents significant challenges. The geometry of the pulmonary artery can vary greatly from patient to patient. Typically, the pulmonary artery outflow tract after corrective surgery is too wide for effective placement of a prosthetic heart valve.

SUMMARY

[0006] This summary is meant to provide examples and is not intended to be limiting of the scope of the invention in any way. For example, any feature included in an example of this summary is not required by the claims, unless the claims explicitly recite the feature. The description discloses exemplary embodiments of expandable docking stations for an expandable valve, catheters for the expandable docking stations, and handles for the catheters. The docking stations, catheters, and handles can be constructed in a variety of ways.

[0007] In one embodiment, for example, a docking station can include a valve seat, one or more sealing portions, and one or more retaining portions. In one embodiment, the valve seat can be substantially unexpandable beyond a deployed size, i.e., the diameter of the valve seat may only be able to increase a maximum of 0–4 mm. The one or more sealing portions can be connected to the valve seat and extend radially outward of the valve seat.

- 3 -

The one or more sealing portions can be constructed to expand and extend outward of the valve seat and provide a seal over a range of sizes (e.g., over a range of sizes of expansion and/or over a range of sizes within the circulatory system or vasculature, for example, it may be able to provide a seal when expanding in different blood vessels or locations of a variety of shapes and sizes). The one or more retaining portions can be connected to the one or more sealing portions. The one or more retaining portions can be configured to retain the docking station at a deployed position. The expandable docking station can expand and provide a seal over a range from 27mm to 38mm. The expandable docking station can expand radially outwardly to varying degrees along its length L. The valve seat and the one or more sealing portions can act as an isolator that reduces or prevents radial outward forces of an expandable valve in the valve seat from being transferred to the one or more sealing portions or the one or more retaining portions. The docking station can be configured such that pressure of blood enhances the retention by the retaining portions. The one or more retaining portions can be configured such that force applied by at least one of the one or more retaining portions at the deployed position is in proportion to the pressure of blood acting on the docking station. The one or more retaining portions can be configured such that force applied by at least one of the one or more retaining portions is greater when the heart is in a diastolic phase than when the heart is in the systolic phase. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. The sealing portion can comprise a portion of a metal frame covered with a fabric, polymer, and/or other material. The sealing portion can comprise an open cell foam. A portion of the docking station can be permeable to blood and a portion of the docking station can be impermeable to blood. A

- 4 -

portion of the docking station that is impermeable to blood can extend from at least the valve seat to at least the sealing portion. The docking station can be adjustable in length. The docking station can include a first half that a second half of the docking station can adjustably extend into to adjust the length. The one or more retaining portions can extend radially outward of the one or more sealing portions when the docking station is in an unconstrained state. Other features described elsewhere in this disclosure may also be included.

[0008] In one exemplary embodiment, a system can include an expandable docking station and an expandable valve. The expandable docking station can include a valve seat, one or more sealing portions, and one or more retaining portions. The valve seat can expand to a deployed size. The one or more sealing portions can be connected to the valve seat and can be constructed to expand and extend radially outward of the valve seat and provide a seal over a range of sizes of expansion. The one or more retaining portions can be connected to the one or more sealing portions. The one or more retaining portions can be configured to retain the docking station at a deployed position. The expandable valve can include an expandable frame and a valve element. The expandable frame can be expanded to engage the valve seat of the docking station. The valve element can be connected to the expandable frame. The expandable docking station and expandable valve can be configured such that, when implanted in a portion of a circulatory system, a radial outward force applied by the sealing portions to the portion of the circulatory system, when sealing portions are within the range of sizes, is less than $\frac{1}{2}$ (and can be less than $\frac{1}{3}$, less than $\frac{1}{4}$, less than $\frac{1}{8}$, or less than $\frac{1}{10}$) of a radial outward force applied by the expandable frame to the valve seat. The expandable docking station can be configured

- 5 -

such that, when implanted in the portion of the circulatory system, the diameter of the valve seat is not increased more than 3mm (or not more than 1mm, 2mm, or 4mm) by the radial outward force applied by the expandable frame to the valve seat. The range of sizes of the sealing portions can be from 27mm to 38mm. The expandable docking station can be configured to expand radially outwardly to varying degrees along its length L when implanted in the portion of the circulatory system.

[0009] The expandable docking station can be configured such that, when implanted in the portion of the circulatory system, pressure of blood on the expandable docking station enhances retention by the retaining portions. The expandable docking station can be configured such that force applied by the retaining portions, when implanted in the portion of the circulatory system, is in proportion to the pressure of blood acting on the assembly. The expandable docking station can be configured such that force applied by the retaining portions, when implanted in the portion of the circulatory system, is greater when the heart is in a diastolic phase than when the heart is in the systolic phase. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. The sealing portion can comprise a portion of a metal frame covered with a fabric. The sealing portion can comprise an open cell foam. A portion of the docking station can be permeable to blood and a portion of the docking station can be impermeable to blood. A portion of the docking station that is impermeable to blood can extend from at least the valve seat to at least the sealing portion. The docking station can have an overall length that is adjustable. The docking station can include a first half (i.e., portion) and a second half (i.e., portion) of the docking station can adjustably extend into to adjust the overall length. In other words, the length of the docking station can be adjusted by moving the

- 6 -

second half/portion relative to the first half/portion, and the first half/portion may be moved independently from the second half/portion (e.g., one half/portion may remain in place while the other half/portion moves). If one of the first or second halves/portions extends inside the other half/portion and overlaps to adjust the length, the first half/portion and second half/portion may be adjusted to change the amount/length of overlap between the two. The one or more retaining portions can extend radially outward of the one or more sealing portion when the docking station is in an unconstrained state. Other features described elsewhere in this disclosure may also be included.

[0010] In one exemplary embodiment, a method can include expanding a docking station and expanding a valve in the docking station. The docking station can be expanded such that a valve seat of the docking station expands to a valve seat deployed size and a sealing portion expands to a sealing size that is within a range of sealing sizes. A frame of an expandable valve can be expanded to engage the valve seat of the docking station. A radial outward force applied by the sealing portions over the range of sealing sizes can be less than $\frac{1}{2}$ (and can be less than $\frac{1}{3}$, less than $\frac{1}{4}$, less than $\frac{1}{8}$, or less than $\frac{1}{10}$) of a radial outward force applied by the expandable frame to the valve seat after expanding the frame. The valve seat of the docking station can be configured such that a diameter of the valve seat is not increased more than 2mm (or not more than 1mm, 3mm, or 4mm) by the radial outward force applied by the expandable frame to the valve seat. The range of sealing sizes of the docking station can be from 27mm to 38mm. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. Other features/steps described elsewhere in this disclosure may also be included.

- 7 -

[0011] In one exemplary embodiment a system can include an expandable docking station and an expandable valve. The expandable docking station can include a valve seat, one or more sealing portions, and one or more retaining portions. The valve seat can expand to a deployed size. The one or more sealing portions can be connected to the valve seat and can extend radially outward of the valve seat. The one or more sealing portions can be constructed to expand outward of the valve seat and provide a seal over a range of sizes. The one or more retaining portions can be connected to the one or more sealing portions. The one or more retaining portions can be configured to retain the docking station at a deployed position. The expandable valve can comprise an expandable frame and a valve element. The expandable frame can expand to engage the valve seat of the docking station. The valve element can be connected to the expandable frame. A pressure of blood acting on the valve and docking station can enhance retention by the retaining portions at the deployed position.

[0012] The valve seat can be configured such that the valve seat is not substantially expanded radially outwardly by a radially outward force of the expandable valve. The range of sizes of the sealing portions can be from 27mm to 38mm. The docking station can be configured to expand radially outwardly to varying degrees along its length L. Force applied by the retaining portions can be in proportion to the pressure of blood acting on the assembly. Force applied by the retaining portions can be greater when the heart is in a diastolic phase than when the heart is in the systolic phase. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. The sealing portion can comprise a portion of a metal frame covered with a fabric. The sealing portion can comprise an open cell foam or other material. A portion of the

- 8 -

docking station can be permeable to blood and a portion of the docking station can be impermeable to blood. A portion of the docking station that is impermeable to blood can extend from at least the valve seat to at least the sealing portion. The docking station can be adjustable in length. The docking station can include a first half (i.e., portion) that a second half (i.e., portion) of the docking station can adjustably extend into to adjust the overall length. In other words, the length of the docking station can be adjusted by moving the second half/portion relative to the first half/portion, and the first half/portion may be moved independently from the second half/portion (e.g., one half/portion may remain in place while the other half/portion moves). If one of the first or second halves/portions extends inside the other half/portion and overlaps to adjust the length, the first half/portion and second half/portion may be adjusted to change the amount/length of overlap between the two. The one or more retaining portions can extend radially outward of the one or more sealing portion when the docking station is in an unconstrained state. Other features described elsewhere in this disclosure may also be included.

[0013] In one exemplary embodiment, a method can include expanding a docking station and expanding a valve in the docking station. The docking station can be expanded such that a valve seat of the docking station expands to a valve seat deployed size and a sealing portion expands to a sealing size that is within a range of sealing sizes. A frame of an expandable valve can be expanded to engage the valve seat of the docking station. A pressure of blood acting on the valve and docking station can enhance retention by the retaining portions at the deployed position. The valve seat of the docking station can be configured such that a diameter of the valve seat is not increased more than 2mm (or not more than 1mm, 3mm, or 4mm) by the radial outward force applied by the expandable

- 9 -

frame to the valve seat. The range of sealing sizes of the docking station can be from 27mm to 38mm. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. Other features/steps described elsewhere in this disclosure may also be included.

[0014] In one embodiment, for example, a docking station can include a valve seat, and one or more sealing portions. The valve seat can be expanded to a deployed size. The one or more sealing portions can be connected to the valve seat and extend radially outward of the valve seat. The one or more sealing portions can be constructed to expand outward of the valve seat and provide a seal over a range of sizes. A length of the docking station can be adjustable. The docking station can include a first half (i.e., portion) that a second half (i.e., portion) of the docking station can adjustably extend into to adjust the overall length. In other words, the length of the docking station can be adjusted by moving the second half/portion relative to the first half/portion, and the first half/portion may be moved independently from the second half/portion (e.g., one half/portion may remain in place while the other half/portion moves). If one of the first or second halves/portions extends inside the other half/portion and overlaps to adjust the length, the first half/portion and second half/portion may be adjusted to change the amount/length of overlap between the two.

[0015] The valve seat can be constructed such that the valve seat is not substantially expandable radially outwardly by a radially outward force of an expandable valve. A range of sizes of the sealing portion can be from 27mm to 38mm. The docking station can be configured to expand radially outwardly to varying degrees along its length L. The valve seat and the one or more sealing portions can act as an isolator that substantially

- 10 -

prevents radial outward forces of an expandable valve from being transferred to the one or more sealing portions. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. The sealing portion can comprise a portion of a metal frame covered with a fabric. The sealing portion can comprises an open cell foam. A portion of the docking station can be permeable to blood and a portion of the docking station can be impermeable to blood. Other features described elsewhere in this disclosure may also be included.

[0016] In one exemplary embodiment, a system can include an expandable docking station and an expandable valve. The expandable docking station can include a valve seat, and one or more sealing portions. The valve seat can expand to a deployed size. The one or more sealing portions can be connected to the valve seat and can extend radially outward of the valve seat. The one or more sealing portions can be constructed to expand outward of the valve seat and provide a seal over a range of sizes. A length of the docking station can be adjustable, e.g., adjustable in the same or similar ways to those discussed elsewhere herein. The expandable valve can comprise an expandable frame and a valve element. The expandable frame can expand to engage the valve seat of the docking station. The valve element can be connected to the expandable frame. A second half of the docking station may extend into a first half of the docking station to make the length of the docking station adjustable. The valve seat may be configured such that the valve seat is not substantially expanded radially outwardly by a radially outward force of the expandable valve. The docking station can be configured to expand radially outwardly to varying degrees along its length L. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. The sealing portion can

- 11 -

comprise a portion of a metal frame covered with a fabric. The sealing portion can comprise an open cell foam. A portion of the docking station can be permeable to blood and a portion of the docking station can be impermeable to blood. Other features described elsewhere in this disclosure may also be included.

[0017] In one exemplary embodiment, a method can include expanding a multiple piece docking station and expanding a valve in the docking station. A first docking station half or portion can be expanded. A portion/section of a second docking station half or portion can be positioned in the first docking station half, e.g., such that a desired length overlaps. The second docking station half can be expanded in the first docking station half to set a length of the docking station. The docking station can have valve seat and a sealing portion. A frame of an expandable valve can be expanded to engage the valve seat of the docking station. The valve seat can be configured such that the valve seat is not substantially expanded radially outwardly by a radially outward force of an expandable valve. A predetermined size of the sealing portion of the docking station can be from 27mm to 38mm. The valve seat can be formed by a suture, ring, band, structural arrangement, material, foam, and in other ways. Other features/steps described elsewhere in this disclosure may also be included.

[0018] In one exemplary embodiment, a delivery catheter can include an outer tube and an inner tube. The outer tube can have a distal opening. The inner tube can be disposed in the outer tube such that a gap is formed between the inner tube and the outer tube. The inner tube can have an opening at a proximal end and can have one or more side openings. The delivery catheter can be configured such that injecting flushing liquid into the proximal end of the inner tube flushes the flushing liquid through the inner tube with at

- 12 -

least some of the flushing liquid exiting the inner tube through the one or more side openings to fill the gap and flush air out the distal opening of the outer tube. The inner tube can have a distal opening and the delivery catheter can be configured such that the filling of the inner tube with the flushing liquid at the proximal end flushes the air out of the distal opening of the inner tube. The inner tube can be filled with the flushing liquid at an opening for a guide wire at the proximal end of the inner tube. The delivery catheter can be configured such that the air in the inner tube can be flushed out through the distal opening of the inner tube and through an opening in a nosecone that can be connected to the inner tube. Other features described elsewhere in this disclosure may also be included.

[0019] In one exemplary embodiment, a method can flush air from a delivery catheter. The delivery catheter can include an outer tube having a distal opening, an inner tube that has a proximal opening at a proximal end of the inner tube and one or more side openings, and a gap formed in between the inner tube and the outer tube. Flushing liquid can be injected into the proximal end of the inner tube, such that the flushing liquid flows through the inner tube and at least some of the flushing liquid exits the inner tube through the one or more side openings to fill the gap and flush air out the distal opening of the outer tube. The inner tube can be filled with the flushing liquid through the proximal opening, and the proximal opening can also be used for passing a guide wire through the delivery catheter. The delivery catheter can be inserted into a blood vessel after the air has been flushed out. Other features/steps described elsewhere in this disclosure may also be included.

[0020] In one exemplary embodiment, a catheter and docking station a sleeve, a docking station retainer, and a docking station. The docking station retainer can be disposed in the sleeve. The docking station retainer can include one or more retainer recesses. The

- 13 -

docking station can be disposed in the sleeve. The docking station can include one or more extensions releasably attached to the docking station retainer. Each extension of the one or more extensions can include a head disposed in at least one of the one or more retainer recesses. Each extension of the one or more docking extensions can be configured to contact the docking station retainer at only two points. The head can be triangular and two heads may be included. The one or more retainer recesses can be a rectangular recess in the docking station retainer. Sides of the head can extend away from one another at an angle of between 60 degrees and 120 degrees. The sleeve can engage the one or more extensions to retain the one or more heads in the retainer recess when the sleeve is positioned over the one or more extensions. The one or more extensions can spring radially outward relative to the docking station retainer when unconstrained by the sleeve to release the one or more extensions from the docking station retainer. The one or more extensions can be tilted in the one or more recesses. Other features described elsewhere in this disclosure may also be included.

[0021] In one exemplary embodiment, a method of using a docking station can include placing a head of a docking station extension in a recess of a docking station retainer such that the docking station extension contacts the docking station retainer at only two points. The docking station and the docking station retainer can be placed in a sleeve. The sleeve can engage the docking station extension to retain the head of the docking station extension in the recess. The head can be triangular. The recess can be a rectangular recess in the docking station retainer. Sides of the head can extend away from one another at an angle of between 60 degrees and 120 degrees. The retainer and the docking station can be removed from the sleeve such that the head of the docking station extension springs

- 14 -

radially outward relative to the docking station retainer to release the docking station extension from the docking station retainer. The extension can be tilted in the recess. Other features/steps described elsewhere in this disclosure may also be included.

[0022] In one exemplary embodiment, an assembly for deploying a docking station includes a handle and a catheter. The handle can include a housing, a drive member, and a driven member. The drive member can be rotatably coupled to the housing. The driven member can be coupled to the drive member and the housing, such that rotation of the drive member moves the driven member linearly in the housing. The catheter can include an outer sleeve and an inner sleeve. The outer sleeve can be fixedly connected to the driven member. The inner sleeve can be disposed in the outer sleeve and can be fixedly connected to the housing. Rotation of the drive member can move the outer sleeve relative to the inner sleeve. The drive member can comprise a wheel having a gear portion. The drive member can comprise an internally threaded member. The driven member can comprise a gear rack. The driven member can comprise an externally threaded member. A ratchet mechanism can be moveable from an engaged position to a disengaged position, such that when the ratchet is in the engaged position the drive member is able to be rotated in only one direction. A luer port may be fixed to the inner sleeve. A luer port and the inner sleeve can be configured to accept a guide wire that extends through the inner shaft. Other features described elsewhere in this disclosure may also be included.

[0023] In one exemplary embodiment, a method of deploying a docking station can include rotating a drive member relative to a housing to linearly move a driven member in the housing. An inner sleeve can be fixed to the housing and an outer sleeve can be fixed

- 15 -

to the driven member. Rotation of the drive member moves the outer sleeve relative to the inner sleeve. The drive member can linearly move the driven member by engagement of gear teeth. The drive member can linearly move the driven member by engagement of threads. The drive member can be configured for rotation in only one direction. The first and second sleeves can be moved over a guide wire.

[0024] Various features as described elsewhere in this disclosure may be included in the examples summarized here and various methods and steps for using the examples and features may be used, including as described elsewhere herein.

[0025] Further understanding of the nature and advantages of the disclosed inventions can be obtained from the following description and claims, particularly when considered in conjunction with the accompanying drawings in which like parts bear like reference numerals.

[0026] BRIEF DESCRIPTION OF THE DRAWINGS

[0027] To further clarify various aspects of embodiments of the present disclosure, a more particular description of the certain embodiments will be made by reference to various aspects of the appended drawings. It is appreciated that these drawings depict only typical embodiments of the present disclosure and are therefore not to be considered limiting of the scope of the disclosure. Moreover, while the figures may be drawn to scale for some embodiments, the figures are not necessarily drawn to scale for all embodiments. Embodiments of the present disclosure will be described and explained with additional specificity and detail through the use of the accompanying drawings.

[0028] Figure 1A is a cutaway view of the human heart in a diastolic phase;

- 16 -

[0029] Figure 1 is a cutaway view of the human heart in a systolic phase;

[0030] Figures 2A-2E are sectional views of pulmonary arteries illustrating that pulmonary arteries may have a variety of different shapes and sizes;

[0031] Figures 3A-3D are perspective views of pulmonary arteries illustrating that pulmonary arteries may have a variety of different shapes and sizes;

[0032] Figure 4A is a schematic illustration of a compressed docking station being positioned in a circulatory system;

[0033] Figure 4B is a schematic illustration of the docking station of Figure 4A expanded to set the position of the docking station in the circulatory system;

[0034] Figure 4C is a schematic illustration of an expandable transcatheter heart valve being positioned in the docking station illustrated by Figure 4B;

[0035] Figure 4D is a schematic illustration of the transcatheter heart valve of Figure 4C expanded to set the position of the heart valve in the docking station;

[0036] Figure 4E illustrates the docking station and transcatheter heart valve deployed in an irregularly shaped portion of the circulatory system;

[0037] Figure 4F illustrates the docking station and transcatheter heart valve deployed in a pulmonary artery;

[0038] Figure 5A is a schematic illustration of a compressed docking station being positioned in a circulatory system;

[0039] Figure 5B is a schematic illustration of the docking station of Figure 5A expanded to set the position of the docking station in the circulatory system;

- 17 -

[0040] Figure 5C is a schematic illustration of an expandable transcatheter heart valve being positioned in the docking station illustrated by Figure 5B;

[0041] Figure 5D is a schematic illustration of the transcatheter heart valve of Figure 5C expanded to set the position of the heart valve in the docking station;

[0042] Figure 5E illustrates the docking station and transcatheter heart valve deployed in an irregularly shaped portion of the circulatory system;

[0043] Figure 5F illustrates the docking station and transcatheter heart valve deployed in a pulmonary artery;

[0044] Figure 6A is a cutaway view of the human heart in a systolic phase with a docking station and deployed in a pulmonary artery;

[0045] Figure 6B is a cutaway view of the human heart in a systolic phase with a docking station and transcatheter heart valve deployed in a pulmonary artery;

[0046] Figure 7A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 6B when the heart is in the systolic phase;

[0047] Figure 7B is a view taken in the direction indicated by lines 7B-7B in Figure 7A;

[0048] Figure 7C is a graph showing a relationship between a docking station diameter and a radial outward force applied by the docking station;

[0049] Figure 8 is a cutaway view of the human heart in a diastolic phase with a docking station and transcatheter heart valve deployed in a pulmonary artery;

[0050] Figure 9A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 8 when the heart is in the diastolic phase;

- 18 -

[0051] Figure 9B is a view taken in the direction indicated by lines 9B-9B in Figure 9A;

[0052] Figure 10A illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0053] Figure 10B illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0054] Figure 10C illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0055] Figure 10D illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0056] Figure 11A illustrates an exemplary embodiment of a telescoping docking station;

[0057] Figure 11B illustrates an exemplary embodiment of a telescoping docking station;

[0058] Figure 11C illustrates an exemplary embodiment of a telescoping docking station;

[0059] Figure 11D illustrates an exemplary embodiment of telescoping docking station;

[0060] Figure 12A illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0061] Figure 12B illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0062] Figure 12C illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

[0063] Figure 12D illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;

- 19 -

- [0064] Figure 13A illustrates an exemplary embodiment of a telescoping docking station;
- [0065] Figure 13B illustrates an exemplary embodiment of a telescoping docking station;
- [0066] Figure 13C illustrates an exemplary embodiment of a telescoping docking station;
- [0067] Figure 13D illustrates an exemplary embodiment of a telescoping docking station;
- [0068] Figure 14A illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0069] Figure 14B illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0070] Figure 14C illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0071] Figure 14D illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0072] Figure 14E illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0073] Figure 14F illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0074] Figure 14G illustrates an exemplary embodiment of a docking station with a transcatheter heart valve disposed inside the docking station;
- [0075] Figure 15A is a side view of an exemplary embodiment of a frame of a docking station;
- [0076] Figure 15B illustrates a side profile of the frame of illustrated by Figure 15A;

- 20 -

[0077] Figure 16 illustrates the docking station frame of Figure 15A in a compressed state;

[0078] Figure 17A is a perspective view of the docking station frame of Figure 15A;

[0079] Figure 17B is a perspective view of the docking station frame of Figure 15A;

[0080] Figure 18 is a perspective view of an exemplary embodiment of a docking station having a plurality of covered cells and a plurality of open cells;

[0081] Figure 19 is a perspective view of the docking station illustrated by Figure 18 with a portion cut away to illustrate a transcatheter heart valve expanded into place in the docking station;

[0082] Figure 20 illustrates a side profile of the docking station illustrated by Figure 18 when implanted in a vessel of the circulatory system;

[0083] Figure 21 illustrates a perspective view of the of the docking station illustrated by Figure 18 when installed in a vessel of the circulatory system;

[0084] Figure 22 illustrates a perspective view of the of the docking station and valve illustrated by Figure 19 when implanted in a vessel of the circulatory system;

[0085] Figures 23A and 23B illustrate a side profiles of the docking station illustrated by Figure 18 when implanted in different size vessels of the circulatory system;

[0086] Figures 24 and 25 illustrate side profiles of the docking station illustrated by Figure 18 when implanted different sized vessels of the circulatory system with a schematically illustrated transcatheter heart valve having the same size installed or deployed in each docking station;

- 21 -

[0087] Figure 26A is a sectional view illustrating a side profile of an exemplary embodiment of a docking station placed in a pulmonary artery;

[0088] Figure 26B is a sectional view illustrating a side profile of an exemplary embodiment of a docking station placed in a pulmonary artery and a schematically illustrated valve placed in the docking station;

[0089] Figure 26C is a sectional view illustrating an exemplary embodiment of a docking station placed in a pulmonary artery and a valve placed in the docking station;

[0090] Figure 27 is a side view of an exemplary embodiment of a docking station;

[0091] Figure 28 is a side view of an exemplary embodiment of a telescoping docking station;

[0092] Figure 29 is a side view of the docking station of Figure 28 where two parts of the docking station have been telescoped together;

[0093] Figure 30 is a sectional view illustrating a docking station placed in a pulmonary artery;

[0094] Figure 31A is a sectional view illustrating a side profile of an exemplary embodiment of a docking station placed in a pulmonary artery;

[0095] Figure 31B is a sectional view illustrating a side profile of an exemplary embodiment of a docking station placed in a pulmonary artery and a valve placed in the docking station;

[0096] Figure 32A is a cutaway view of the human heart in a systolic phase with a docking station and deployed in a pulmonary artery;

- 22 -

[0097] Figure 32B is a cutaway view of the human heart in a systolic phase with a docking station and transcatheter heart valve deployed in a pulmonary artery;

[0098] Figure 33A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 32B when the heart is in the systolic phase;

[0099] Figure 33B is a view taken in the direction indicated by lines 33B-33B in Figure 33A;

[00100] Figure 34 is a cutaway view of the human heart, docking station, and transcatheter heart valve deployed in the pulmonary artery illustrated by Figure 32B when the heart is in the diastolic phase;

[00101] Figure 35A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 34 when the heart is in the diastolic phase;

[00102] Figure 35B is a view taken in the direction indicated by lines 35B-35B in Figure 35A;

[00103] Figure 36A is a cutaway view of the human heart in a systolic phase with a docking station being deployed in a pulmonary artery;

[00104] Figure 36B is a cutaway view of the human heart in a systolic phase with a docking station deployed in a pulmonary artery;

[00105] Figure 36C is a cutaway view of the human heart in a systolic phase with a docking station and transcatheter heart valve deployed in a pulmonary artery;

[00106] Figure 37A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 36C when the heart is in the systolic phase;

- 23 -

[00107] Figure 37B is a view taken in the direction indicated by lines 37B-37B in Figure 37A;

[00108] Figure 38 is a cutaway view of the human heart, docking station, and transcatheter heart valve deployed in the pulmonary artery illustrated by Figure 36C when the heart is in the diastolic phase;

[00109] Figure 39A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 38 when the heart is in the diastolic phase;

[00110] Figure 39B is a view taken in the direction indicated by lines 39B-39B in Figure 39A;

[00111] Figure 40A is a cutaway view of the human heart in a systolic phase with a docking station being deployed in a pulmonary artery;

[00112] Figure 40B is a cutaway view of the human heart in a systolic phase with a docking station deployed in the pulmonary artery;

[00113] Figure 40C is a cutaway view of the human heart in a systolic phase with the docking station and a transcatheter heart valve deployed in the pulmonary artery;

[00114] Figure 41A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 40C when the heart is in the systolic phase;

[00115] Figure 41B is a view taken in the direction indicated by lines 41B-41B in Figure 41A;

- 24 -

[00116] Figure 42 is a cutaway view of the human heart, docking station, and transcatheter heart valve deployed in the pulmonary artery illustrated by Figure 40C when the heart is in the diastolic phase;

[00117] Figure 43A is an enlarged schematic illustration of the docking station and transcatheter heart valve of Figure 42 when the heart is in the diastolic phase;

[00118] Figure 43B is a view taken in the direction indicated by lines 43B-43B in Figure 43A;

[00119] Figures 44-47, and 48A-48C illustrate examples of valve types that may be deployed in a docking station, e.g., one of the docking stations described or depicted herein;

[00120] Figure 49A is a sectional view of an exemplary embodiment of a catheter;

[00121] Figure 49B is a sectional view of an exemplary embodiment of a catheter with a docking station crimped and loaded in the catheter;

[00122] Figures 50A-50D illustrate deployment of a docking station from a catheter;

[00123] Figure 51 is a side view of an exemplary embodiment of a nosecone of a catheter;

[00124] Figure 52 is a view taken as indicated by lines 52-52 in Figure 51;

[00125] Figure 53 is a sectional view of an exemplary embodiment of a distal portion of a catheter;

[00126] Figure 54 is a side view of an exemplary embodiment of a nosecone of a catheter;

[00127] Figure 55 is a sectional view of an exemplary embodiment of a distal portion of a catheter;

- 25 -

[00128] Figure 56 is a perspective view of a holder for retaining a docking station in a catheter;

[00129] Figure 57 is a perspective view of a holder for retaining a docking station in a catheter;

[00130] Figures 57A and 57B illustrate side views of extensions of a docking station disposed in the holder;

[00131] Figure 58 is a sectional view of an exemplary embodiment of a handle for a docking station catheter;

[00132] Figure 59 is an exploded perspective view of parts of the handle of Figure 58;

[00133] Figure 60 is an exploded sectional view of parts of the handle of Figure 58;

[00134] Figure 61 is an exploded perspective sectional view of parts of the handle of Figure 58;

[00135] Figure 62 is a view of an exemplary embodiment of a handle for a docking station catheter with a side cover removed;

[00136] Figure 63 is an enlarged portion of Figure 62 illustrating a flushing system of a catheter;

[00137] Figures 64A and 64B are views of the handle illustrated by Figure 62 with an opposite side cover removed to illustrate extension and retraction of an outer sleeve of a docking station catheter;

[00138] Figure 65 is an exploded view of the handle of Figure 62;

- 26 -

[00139] Figure 66 is a perspective view of the handle illustrated by Figure 62 with the opposite side cover removed

[00140] Figure 67 is a side view of the handle illustrated by Figure 62;

[00141] Figure 68 is a side view of an indexing wheel of the handle illustrated by Figure 62 in a ratcheting state;

[00142] Figure 69 is a perspective view of the indexing wheel of Figure 68 in the ratcheting state;

[00143] Figure 70 is an enlarged portion of Figure 69;

[00144] Figure 71 is a partial sectional view of the indexing wheel illustrated by Figure 68 disposed in a handle housing;

[00145] Figure 72 is a view that is similar to Figure 71 in a disengaged state; and

[00146] Figure 73 is a side view of an indexing wheel of the handle illustrated by Figure 62 in the disengaged state.

[00147] DETAILED DESCRIPTION

[00148] The following description refers to the accompanying drawings, which illustrate specific embodiments of the invention. Other embodiments having different structures and operation do not depart from the scope of the present invention. Exemplary embodiments of the present disclosure are directed to devices and methods for providing a docking station or landing zone for a transcatheter heart valve (“THV”), e.g., THV 29. In some exemplary embodiments, docking stations for THVs are illustrated as being used within the pulmonary artery, although the docking stations (e.g., docking station 10) may be used

- 27 -

in other areas of the anatomy, heart, or vasculature, such as the superior vena cava or the inferior vena cava. The docking stations described herein can be configured to compensate for the deployed THV being smaller than the space (e.g., anatomy/vasculature/etc.) in which it is to be placed.

[00149] It should be noted that various embodiments of docking stations and systems for delivery and implant are disclosed herein, and any combination of these options may be made unless specifically excluded. For example, any of the docking stations devices disclosed, may be used with any type of valve, and/or any delivery system, even if a specific combination is not explicitly described. Likewise, the different constructions of docking stations and valves may be mixed and matched, such as by combining any docking station type/feature, valve type/feature, tissue cover, etc., even if not explicitly disclosed. In short, individual components of the disclosed systems may be combined unless mutually exclusive or otherwise physically impossible.

[00150] For the sake of uniformity, in these Figures and others in the application the docking stations are depicted such that the pulmonary bifurcation end is up, while the ventricular end is down. These directions may also be referred to as "distal" as a synonym for up or the pulmonary bifurcation end, and "proximal" as a synonym for down or the ventricular end, which are terms relative to the physician's perspective.

[00151] Figures 1A and 1B are cutaway views of the human heart H in diastolic and systolic phases, respectively. The right ventricle RV and left ventricle LV are separated from the right atrium RA and left atrium LA, respectively, by the tricuspid valve TV and mitral valve MV; i.e., the atrioventricular valves. Additionally, the aortic valve AV separates the left ventricle LV from the ascending aorta (not identified) and the pulmonary

- 28 -

valve PV separates the right ventricle from the pulmonary artery PA. Each of these valves has flexible leaflets extending inward across the respective orifices that come together or "coapt" in the flowstream to form the one-way, fluid-occluding surfaces. The docking stations and valves of the present application are described primarily with respect to the pulmonary valve. Therefore, anatomical structures of the right atrium RA and right ventricle RV will be explained in greater detail. It should be understood that the devices described herein may also be used in other areas, e.g., in the inferior vena cava and/or the superior vena cava as treatment for a regurgitant or otherwise defective tri-cuspid valve, in the aorta (e.g., an enlarged aorta) as treatment for a defective aortic valve, in other areas of the heart or vasculature, in grafts, etc.

[00152] The right atrium RA receives deoxygenated blood from the venous system through the superior vena cava SVC and the inferior vena cava IVC, the former entering the right atrium from above, and the latter from below. The coronary sinus CS is a collection of veins joined together to form a large vessel that collects deoxygenated blood from the heart muscle (myocardium), and delivers it to the right atrium RA. During the diastolic phase, or diastole, seen in Figure 1A, the venous blood that collects in the right atrium RA enters the tricuspid valve TV by expansion of the right ventricle RV. In the systolic phase, or systole, seen in Figure 1B, the right ventricle RV contracts to force the venous blood through the pulmonary valve PV and pulmonary artery into the lungs. In one exemplary embodiment, the devices described by the present application are used to replace or supplement the function of a defective pulmonary valve. During systole, the leaflets of the tricuspid valve TV close to prevent the venous blood from regurgitating back into the right atrium RA.

- 29 -

[00153] Referring to Figures 2A-2E and 3A-3D, the shown, non-exhaustive examples illustrate that the pulmonary artery can have a wide variety of different shapes and sizes. For example, as shown in the sectional views of Figures 2A-2E and the perspective views of Figures 3A-3D, the length L, diameter, D, and curvature or contour may vary greatly between pulmonary arteries of different patients. Further, the diameter D may vary significantly along the length L of an individual pulmonary artery. These differences can be even more significant in pulmonary arteries that suffer from certain conditions and/or have been compromised by previous surgery. For example, the treatment of Tetralogy of Fallot (TOF) or Transposition of the Great Arteries (TGA) often results in larger and more irregularly shaped pulmonary arteries.

[00154] Tetralogy of Fallot (TOF) is a cardiac anomaly that refers to a combination of four related heart defects that commonly occur together. The four defects are ventricular septal defect (VSD), overriding aorta (the aortic valve is enlarged and appears to arise from both the left and right ventricles instead of the left ventricle as in normal hearts), pulmonary stenosis (narrowing of the pulmonary valve and outflow tract or area below the valve that creates an obstruction of blood flow from the right ventricle to the pulmonary artery), and right ventricular hypertrophy (thickening of the muscular walls of the right ventricle, which occurs because the right ventricle is pumping at high pressure).

[00155] Transposition of the Great Arteries (TGA) refers to an anomaly where the aorta and the pulmonary artery are "transposed" from their normal position so that the aorta arises from the right ventricle and the pulmonary artery from the left ventricle.

[00156] Surgical treatment for some conditions involves a longitudinal incision along the pulmonary artery, up to and along one of the pulmonary branches. This incision can

- 30 -

eliminate or significantly impair the function of the pulmonary valve. A trans-annular patch is used to cover the incision after the surgery. The trans-annular patch reduces stenotic or constrained conditions of the pulmonary artery PA, associated with other surgeries. However, the impairment or elimination of the pulmonary valve PV can create significant regurgitation and, prior to the present invention, often required later open heart surgery to replace the pulmonary valve. The trans-annular patch technique can result in pulmonary arteries having a wide degree of variation in size and shape (See Figures 3A-3D)

[00157] Referring to Figures 4A-4F, in one exemplary embodiment an expandable docking station 10 includes one or more sealing portions 410, a valve seat 18, and one or more retaining portions 414. The sealing portion(s) 410 provide a seal between the docking station 10 and an interior surface 416 of the circulatory system. The valve seat 18 provides a supporting surface for implanting or deploying a valve 29 in the docking station 10 after the docking station 10 is implanted in the circulatory system. The retaining portions 414 help retain the docking station 10 and the valve 29 at the implantation position or deployment site in the circulatory system. Expandable docking station 10 and valve 29 as described in the various embodiments herein are also representative of a variety of docking stations and/or valves that might be known or developed, e.g., a variety of different types of valves could be substituted for and/or used as valve 29 in the various docking stations.

[00158] Figures 4A-4D schematically illustrate an exemplary deployment of the docking station 10 and valve 29 in the circulatory system. Referring to Figure 4A, the docking station 10 is in a compressed form/configuration and is introduced to a deployment site in

- 31 -

the circulatory system. For example, the docking station 10, may be positioned at a deployment site in a pulmonary artery by a catheter (e.g., catheter 3600 as shown in Figures 50A–50D). Referring to Figure 4B, the docking station 10 is expanded in the circulatory system such that the sealing portion(s) 410 and the retaining portions 414 engage the inside surface 416 of a portion of the circulatory system. Referring to Figure 4C, after the docking station 10 is deployed, the valve 29 is in a compressed form and is introduced into the valve seat 18 of the docking station 10. Referring to Figure 4D, the valve 29 is expanded in the docking station, such that the valve 29 engages the valve seat 18. In the examples depicted herein, the docking station 10 is longer than the valve. However, in other embodiments the docking station 10 can be the same length or shorter than the length of the valve 29. Similarly, the valve seat 18 can be longer, shorter, or the same length as the length of the valve 29.

[00159] Referring to Figure 4D, the valve 29 has expanded such that the seat 18 of the docking station supports the valve. The valve 29 only needs to expand against the narrow seat 18, rather than against the wider space within the portion of the circulatory system that the docking station 10 occupies. The docking station 10 allows the valve 29 to operate within the expansion diameter range for which it is designed.

[00160] Figure 4E illustrates that the inner surface 416 of the circulatory system, such as the inner surface of a blood vessel or anatomy of the heart can vary in cross-section size and/or shape along its length. In an exemplary embodiment, the docking station 10 is configured to expand radially outwardly to varying degrees along its length L to conform to shape of the inner surface 416. In one exemplary embodiment, the docking station 10 is configured such that the sealing portion(s) 410 and/or the retaining portion(s) engage the

- 32 -

inner surface 416, even though the shape of the blood vessel or anatomy of the heart vary significantly along the length L of the docking station. The docking station can be made from a very resilient or compliant material to accommodate large variations in the anatomy. For example, the docking station can be made from a highly flexible metal, metal alloy, polymer, or an open cell foam. Examples of a metals and metal alloys that can be used include, but are not limited to, nitinol, elgiloy, and stainless steel, but other metals and highly resilient or compliant non-metal materials can be used. For example, the docking station 10 can have a frame or portion of a frame (e.g., a self-expanding frame, retaining portion(s), sealing portion(s), valve seat, etc.) made of these materials, e.g., from shape memory materials, such as nitinol. These materials allow the frame to be compressed to a small size, and then when the compression force is released, the frame will self-expand back to its pre-compressed diameter.

[00161] An example of an open cell foam that can be used to form the docking station or a portion of the docking station is a bio-compatible foam, such as a polyurethane foam (e.g., as may be obtained from Biomerix, Rockville, MD). Docking stations described herein can be self expanding and/or expandable with an inflatable device to cause the docking station to engage an inner surface 416 having a variable shape.

[00162] Figure 4F illustrates the docking station 10 and a valve 29 implanted in a pulmonary artery PA. As mentioned with respect to Figures 2A-2E and 3A-3D, the shape of the pulmonary artery may vary significantly along its length. In one exemplary embodiment, the docking station 10 is configured to conform to the varying shape of the pulmonary artery PA in the same manner as described with respect to Figure 4E.

- 33 -

[00163] Referring to Figures 5A-5F, in one exemplary embodiment an expandable docking station 10 is made from an expandable foam material, such as an open cell biocompatible foam. The outer surface 510 of the foam material can serve as the sealing portion 410. In this example, a valve seat 18 can be provided on the inner surface 512 of the foam material as illustrated, or the inner surface 512 can serve as the valve seat. In the example illustrated by Figures 5A-5F, the retaining portions 414 are omitted, though retaining portions can be used. In one embodiment, foam material can be used together with an expandable frame (e.g., of metal, shape memory material, etc.). The foam material can cover or extend the full length of the frame or only a portion of the length of the frame.

[00164] Figures 5A-5D schematically illustrate deployment of the foam docking station 10 and valve 29 in the circulatory system. Referring to Figure 5A, the docking station 10 is in a compressed form and is introduced to a deployment site in the circulatory system. For example, the docking station 10, may be positioned at a deployment site in a pulmonary artery by a catheter (e.g., catheter 3600 shown in Figures 50A-50D). Referring to Figure 5B, the docking station 10 is expanded in the circulatory system such that the sealing portion 410 engage the inside surface 416 of the circulatory system. Referring to Figure 5C, after the docking station 10 is deployed, the valve 29 is in a compressed form and is introduced into the valve seat 18 or inner surface 512 of the docking station 10. Referring to Figure 5D, the valve 29 is expanded in the docking station, such that the valve 29 engages the valve seat 18 or inner surface 512 (e.g., where inner surface 512 acts as the valve seat).

[00165] Figure 5E illustrates that the inner surface 416 of the circulatory system, such as the inner surface of a blood vessel or anatomy of the heart may vary in cross-section along

- 34 -

its length. In an exemplary embodiment, the foam docking station 10 is configured to expand radially outwardly to varying degrees along its length L to conform to shape of the inner surface 416.

[00166] Figure 5F illustrates the foam docking station 10 and a valve 29 implanted in a pulmonary artery PA. As mentioned with respect to Figures 2A-2E and 3A-3D, the shape of the pulmonary artery may vary significantly along its length. In one exemplary embodiment, the docking station 10 is configured to conform to the varying shape of the pulmonary artery PA in the same or a similar manner as described with respect to Figure 4E.

[00167] Referring to Figure 6A, a docking station, e.g., a docking station as described with respect to Figures 4A-4D, is deployed in the pulmonary artery PA of a heart H. Figure 6B illustrates a valve 29 deployed in the docking station 10 illustrated by Figure 6A. In Figures 6A and 6B, the heart is in the systolic phase. Figure 7A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 6B. When the heart is in the systolic phase, the valve 29 opens. Blood flows from the right ventricle RV and through the pulmonary artery PA, docking station 10, and valve 29 as indicated by arrows 602. Figure 7B illustrates space 608 that represents the valve 29 being open when the heart is in the systolic phase. Figure 7B does not show the interface between the docking station 10 and the pulmonary artery to simplify the drawing. The cross-hatching in Figure 7B illustrates blood flow through the open valve. In an exemplary embodiment, blood is prevented from flowing between the pulmonary artery PA and the docking station 10 by the sealing portion(s) 410 and blood is prevented from flowing between the docking station 10 and the valve 29 by seating of the valve 29 in the

- 35 -

seat 18 of the docking station 10. In this example, blood is substantially only flowing or only able to flow through the valve 29 when the heart is in the systolic phase.

[00168] Figure 8 illustrates the valve 29, docking station 10 and heart H illustrated by Figure 6B, when the heart is in the diastolic phase. Referring to Figures 9A and 9B, when the heart is in the diastolic phase, the valve 29 closes. Figure 9A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 8. Blood flow in the pulmonary artery PA above the valve 29 (i.e. in the pulmonary branch 760) is blocked by the valve 29 being closed and blocking blood flow as indicated by arrow 900. The solid area 912 in Figure 9B represents the valve 29 being closed when the heart is in the diastolic phase.

[00169] In one exemplary embodiment, the docking station 10 acts as an isolator that prevents or substantially prevents radial outward forces of the valve 29 from being transferred to the inner surface 416 of the circulatory system. In one embodiment, the docking station 10 includes a valve seat 18 (which is not expanded radially outwardly or is not substantially expanded radially outward by the radially outward force of the THV or valve 29, i.e., the diameter of the valve seat is not increased or is increased by less than 4 mm by the force of the THV), and anchoring/retaining portions 414 and sealing portions 410, which impart only relatively small radially outward forces 720, 722 on the inner surface 416 of the circulatory system (as compared to the radially outward force applied to the valve seat 18 by the valve 29).

[00170] When no docking station is used, stents and frames of THVs are held in place in the circulatory system by a relatively high radial outward force 710 of the stent or frame 712 of the THV acting directly on the inside surface 416 of the circulatory system. If a

- 36 -

docking station is used, as in the example illustrated by Figure 7A, the stent or frame 712 of the valve 29 expands radially outward or is expanded radially outward to impart the high force 710 on the valve seat 18 of the docking station 10. This high radially outward force 710 secures the valve 29 to the valve seat 18 of the docking station 10. However, since the valve seat 18 is not expanded or is not substantially expanded by the force 710, the force 710 is isolated from the circulatory system, rather than being used to secure the docking station in the circulatory system.

[00171] In an exemplary embodiment, the radially outward force 722 of the sealing portions 410 to the inside surface 416 is substantially smaller than the radially outward force 710 applied by the valve 29 to the valve seat 18. For example, the radially outward sealing force 722 can be less than $\frac{1}{2}$ the radially outward force 710 applied by the valve, less than $\frac{1}{3}$ the radially outward force 710 applied by the valve, less than $\frac{1}{4}$ the radially outward force 710 applied by the valve, less than $\frac{1}{8}$, or even less than $\frac{1}{10}$ the radially outward force 710 applied by the valve. In one exemplary embodiment, the radially outward force 722 of the sealing portions 410 is selected to provide a seal between the inner surface 416 and the sealing portion 410, but is not sufficient by itself to retain the position of the valve 29 and docking station 10 in the circulatory system.

[00172] In an exemplary embodiment, the radially outward force 720 of the anchoring/retaining portions 414 to the inside surface 416 is substantially smaller than the radially outward force 710 applied by the valve 29 to the valve seat 18. For example, the radially outward sealing force 720 can be less than $\frac{1}{2}$ the radially outward force 710 applied by the valve, less than $\frac{1}{3}$ the radially outward force 710 applied by the valve, less

- 37 -

than 1/4 the radially outward force 710 applied by the valve, less than 1/8, or even less than 1/10 the radially outward force 710 applied by the valve.

[00173] In one exemplary embodiment, the radially outward force 720 of the retaining portions 414 is not sufficient by itself to retain the position of the valve 29 and docking station 10 in the circulatory system. Rather, the pressure of the blood 608 is used to enhance the retention of the retaining portions 414 to the inside surface 416. Referring again to Figure 6A, when the heart is in the systolic phase, the valve 29 is open and blood flows through the valve as indicated by arrows 602. Since the valve 29 is open and blood flows through the valve 29, the pressure P applied to the docking station 10 and valve 29 by the blood is low as indicated by the small P and arrow in Figure 7A. Even though small, the pressure P forces the docking station and its upper retaining portions 414 against the surface 416 generally in the direction indicated by arrow F. This blood flow assisted force F applied by the retaining portions F to the surface 416 prevents the docking station 10 and valve 29 from moving in the direction 602 of blood flow in the systolic phase of the heart H.

[00174] Referring to Figure 9A, when the heart is in the diastolic phase, the valve 29 is closed and blood flow is blocked as indicated by arrow 900. Since the valve 29 is closed and the valve 29 and docking station 10 block the flow of blood, the pressure P applied to the docking station 10 and valve 29 by the blood is high as indicated by the large arrow P in Figure 9A. This large pressure P forces the lower retaining portions 414 against the surface 416 generally in the direction indicated by the large arrows F. This blood flow assisted force F applied by the retaining portions F to the surface 416 prevents the docking station 10 and valve 29 from moving in the direction indicated by arrow 900.

- 38 -

[00175] Since the force applied by the upper and lower retaining portions 414 is determined by amount of pressure applied to the valve 29 and docking station 10 by the blood, the force applied to the surface 416 is automatically proportioned. That is, the upper retaining portions are less forcefully pressed against the surface 416 when the heart is in the systolic phase than the lower retaining portions are pressed against the surface 416 when the heart is in the diastolic phase. This is because the pressure against the open valve 29 and docking station 10 in the systolic phase is less than the pressure against the closed valve and docking station in the diastolic phase.

[00176] The valve seat 18 and sealing portion 410 can take a wide variety of different forms. For example, the valve seat 18 can be any structure that is not expanded radially outwardly or is not substantially expanded radially outward by the radially outward force of the THV (i.e., the diameter of the valve seat in the deployed position/configuration may not expand or may expand less than 4mm, e.g., the diameter may only expand 1–4 mm larger when the valve is deployed in the valve seat). For example, the valve seat 18 can comprise a suture or a metal ring that resists or limits expansion. However, in one embodiment, the valve seat 18 (or any valve seat described herein) can be expandable over a larger range, for example, the diameter may expand between 5mm and 30mm larger when a valve is deployed in the valve seat. In one embodiment, the diameter might expand from 5mm or 6mm in diameter to 20mm–29mm, 24mm, 26mm, 29mm, etc. in diameter, or expand from and to different diameters within that range. Even if more expandable, the valve seat can still be restricted in expansion, e.g., restricted to avoid expansion of the valve seat beyond an expanded diameter of a valve to be placed in the valve seat or to avoid expansion beyond a diameter that will securely hold the valve in the valve seat via

- 39 -

the forces created therebetween. The valve seat 18 can be part of or define a portion of the body of the docking station 10, or the valve seat 18 can be a separate component that is attached to the body of the docking station. The valve seat 18 can be longer, shorter, or the same length as the valve. The valve seat 18 can be significantly shorter than the valve 29 when the valve seat 18 is defined by a suture or a metal ring. A valve seat 18 formed by a suture or metal ring can form a narrow circumferential seal line between the valve 29 and the docking station.

[00177] The sealing portion(s) 410 of various embodiments can take a wide variety of different forms. For example, the sealing portion(s) 410 can be any structure that provides a seal(s) between the docking station 10 and the surface 416 of the circulatory system. For example, the sealing portion(s) 410 can comprise a fabric, a foam, biocompatible tissue, a combination of these, etc. The sealing portion(s) 410 can be part of or define a portion of the body of the docking station 10, and/or the sealing portion(s) 410 can be a separate component that is attached to the body of the docking station. The docking station 10 may include a single sealing portion 410 or two, or more than two sealing portions.

[00178] As mentioned above, in one exemplary embodiment the sealing portion(s) 410 is configured to apply a low radially outward force to the surface 416. The low radially outward force can be provided in a wide variety of different ways. For example, sealing portion may be made from a very compressible or compliant material. Referring to Figure 7C, in one exemplary embodiment, the docking station 10 body is made from an elastic or superelastic metal. One such metal is nitinol. When the body of a docking station 10 is made from a lattice of metal struts, the body can have the characteristics of a spring. Referring to Figure 7C, like a spring, when the body of the docking station is

- 40 -

unconstrained and allowed to relax to its largest diameter the body of the docking station applies little or no radially outward force. As the body of the docking station 10 is compressed, like a spring, the radially outward force applied by the docking station increases. As is illustrated by Figure 7C, in one exemplary embodiment the relationship of the radially outward force of the docking station body to the expanded diameter of the docking station is non-linear, although, in one exemplary embodiment, the relationship could also be linear. In the example illustrated by Figure 7C, the curve 750 illustrates the relationship between the radially outward force exerted by the docking station 10 and the compressed diameter of the docking station. In the region 752, the curve 750 has a low slope. In this region 752 the radially outward force is low and changes only a small amount. In one exemplary embodiment, the region 752 corresponds to a diameter between 25mm and 40 mm, such as between 27mm and 38mm. The radially outward force is small in the region 752, but is not zero. In the region 754, the curve 750 has a higher slope. In this region 754 the radially outward force increases significantly as the docking station is compressed. In one exemplary embodiment, the body of the stent is constructed to be in the low slope region 752. This allows the sealing portions 710 to apply only a small radially outward force to the inner surface 416 of the circulatory system over a wide range of diameters.

[00179] The retaining portions 414 can take a wide variety of different forms. For example, the retaining portion(s) 414 may be any structure that sets the position of the docking station 10 in the circulatory system. For example, the retaining portion(s) 414 may press against or into the inside surface 416 or extend around anatomical structure of the circulatory system to set the position of the docking station 10. The retaining portion(s)

- 41 -

414 may be part of or define a portion of the body of the docking station 10 or the retaining portion(s) 414 may be a separate component that is attached to the body of the docking station. The docking station 10 may include a single retaining portion 414 or two, or more than two retaining portions.

[00180] Figures 10A-10C illustrate that the docking station 10 can have any combination of one or more than one different types of valve seats 18 and sealing portions 410. In the example illustrated by Figure 10A, the valve seat 18 is a separate component that is attached to the body of the docking station 10 and the sealing portion is integrally formed with the body of the docking station. In the example illustrated by Figure 10B, the valve seat 18 is a separate component that is attached to the body of the docking station 10 and the sealing portion 410 is a separate component that is attached to the body of the docking station. In the example illustrated by Figure 10C, the valve seat 18 is integrally formed with the body of the docking station 10 and the sealing portion is integrally formed with the body of the docking station. In the example illustrated by Figure 10D, the valve seat 18 is integrally formed with the body of the docking station 10 and the sealing portion is a separate component that is attached to the body of the docking station 10.

[00181] As mentioned above, the length of the pulmonary artery PA and other anatomical structures of the circulatory system may vary greatly from patient to patient. Referring to Figures 11A-11D, in one exemplary embodiment the length of the docking station 10 is adjustable as indicated by arrow 1100. This adjustability 1100 refers to the ability of the implanted/expanded length of the docking station to be adjusted, rather than the inherent change in length that occurs when a stent expands from a compressed state to an expanded state. The length may be adjusted in a wide variety of different ways. In the example

- 42 -

illustrated by Figures 11A-11D, the docking station 10 includes a first half 1102 and a second half 1104. The use of the word “half” as used herein with respect to two part docking stations is synonymous with “portion” and does not require the first and second half or first and second portion to be equal in size, i.e., the first half could be larger/longer than the second half and vice versa. In one embodiment, the second half 1104 can be inserted or “telescoped” into the first half 1102. The amount of insertion or “telescoping” sets the length of the docking station 10. Any of the docking stations 10 shown and described in this patent application can be adjustable in length by making the docking stations from two parts that are telescoped together or are otherwise adjustable relative to each other. In one embodiment, a length of a single-piece docking station can be collapsible and expandable. In one embodiment, a docking station may be formed of a material that can change shape to adjust the length. In one embodiment, more than two portions (e.g., 3, 4, or more portions) can be combined in similar ways and include one or more similar features as first half 1102 and second half 1104.

[00182] In one exemplary embodiment, the length of the docking station 10 can be adjusted in the pulmonary artery PA by first deploying the first half 1102 of the docking station 10 in the pulmonary artery. For example, the first half 1102 may be positioned and expanded as desired, e.g., such that a distal end 1106 of the first half is aligned with or extends somewhat past the branch of the pulmonary artery. After the first half 1102 is expanded in the pulmonary artery, the compressed second half 1104 can be positioned with a distal end 1110 disposed in the proximal end 1108 of the first half 1102. In one embodiment, the position of the second half 1104 is selected such that the sealing portion 410 and retaining portion 414 will make contact with the pulmonary artery and set the position of the

- 43 -

docking station 10 in the pulmonary artery. Once properly positioned, the second half 1104 is expanded. In one embodiment, the distal end of 1110 of the second half 1104 frictionally engages the proximal end 1108 of the first half to secure the two halves 1102, 1104 together. In one embodiment, a lock(s), locking mechanism, suture(s), interlacing, link(s) and/or other attachment device/mechanism may be used to help secure the halves/portions together.

[00183] In the examples illustrated by Figures 11A-11D, the seat 18 and the sealing portion 410 are included on the second half 1104 of the docking station 10. However, in other embodiments the seat 18 and/or the sealing portion 410 can be included on the first half 1102. Figures 11A-11C illustrate that the halves 1102, 1104 of the docking station 10 can have any combination of different types of valve seats 18 and sealing portions 410. In the example illustrated by Figure 11A, the valve seat 18 is a separate component that is attached to the body of the docking station half 1104 and the sealing portion is integrally formed with the body of the docking station half 1104. In the example illustrated by Figure 11B, the valve seat 18 is a separate component that is attached to the body of the docking station half 1104 and the sealing portion 410 is a separate component that is attached to the body of the docking station half 1104. In the example illustrated by Figure 11C, the valve seat 18 is integrally formed with the body of the docking station half 1104 and the sealing portion is integrally formed with the body of the docking station half 1104. In the example illustrated by Figure 11D, the valve seat 18 is integrally formed with the body of the docking station half 1104 and the sealing portion 410 is a separate component that is attached to the body of the docking station half 1104.

- 44 -

[00184] Figures 12A-12D illustrate exemplary embodiments of docking stations 10 with two sealing portions 410. The docking station 10 can have any combination of one or more than one different types of valve seats 18 and sealing portions 410. In the example illustrated by Figure 12A, the valve seat 18 is a separate component that is attached to the body of the docking station 10 and the sealing portions 410 is integrally formed with the body of the docking station. In the example illustrated by Figure 12B, the valve seat 18 is a separate component that is attached to the body of the docking station 10 and the sealing portions 410 are separate components that are attached to the body of the docking station. In the example illustrated by Figure 12C, the valve seat 18 is integrally formed with the body of the docking station 10 and the sealing portions are integrally formed with the body of the docking station. In the example illustrated by Figure 12D, the valve seat 18 is integrally formed with the body of the docking station 10 and the sealing portions are separate components that are attached to the body of the docking station 10.

[00185] Figures 13A-13D illustrate that the docking stations illustrated by Figures 12A-12D can be two-piece telescoping docking stations. The pieces 1102, 1104 of the docking station 10 can have any combination of one or more than one different types of valve seats 18 and sealing portions 410 on either or both of the two pieces. In the example illustrated by Figure 13A, the first half 1102 includes an integral sealing portion 410. The second half 1104 includes a valve seat 18 that is a separate component that is attached to the body of the docking station 10 and the sealing portions 410 is integrally formed with the body of the docking station. In the example illustrated by Figure 13B, the first half 1102 includes a sealing portion 410 that is separate from the body of the first half 102. The valve seat 18 is a separate component that is attached to the body of the docking station 10

- 45 -

and the sealing portion 410 is a separate components that is attached to the body of the docking station. In the example illustrated by Figure 13C, the first half 1102 includes an integral sealing portion 410. The valve seat 18 is integrally formed with the body of the second half 1104 of the docking station 10 and the sealing portion 410 is integrally formed with the body of the second half 1104. In the example illustrated by Figure 12D, the first half 1102 includes a sealing portion 410 that is separate from the body of the first half 102. The valve seat 18 is integrally formed with the body of the second half 1104 of the docking station 10 and the sealing portion 410 is a separate components that is attached to the body of the second half 1104.

[00186] Referring to Figures 14A-14G, in one exemplary embodiment the docking station 10 can include a permeable portion 1400 that blood can flow through as indicated by arrows 1402 and an impermeable portion 1404 that blood cannot flow through. In one exemplary embodiment, the impermeable portion 1404 extends from at least the sealing portion 410 to the valve seat 18 to prevent blood from flowing around the valve 29. In one exemplary embodiment, the permeable portion 1400 allows blood to freely flow through it, so that portions of the docking station that do not seal against the inside surface 416 of the circulatory system or seal against the valve 29 do not block the flow of blood. For example, the docking station 10 may extend into the branch of the pulmonary artery and the portion 1400 of the docking station 10 that extends into the pulmonary artery freely allows blood to flow through the docking station 10. In one exemplary embodiment, the permeable portion 1400 allows blood to freely flow through it, so that areas 1420 between the docking station and the circulatory system are flushed with blood as the heart beats, thereby preventing blood stasis in the areas 1420.

- 46 -

[00187] The impermeable portion 1404 can take a wide variety of different forms. The impermeable portion 1404 may be any structure or material that prevents blood to flow through the impermeable portion 1404. For example, the body of the docking station 10 can be formed from wires or a lattice, such as a nitinol wire or lattice, and cells of body are covered by an impermeable material (See Figure 18). A wide variety of different materials may be used as the impermeable material. For example, the impermeable material may be a blood-impermeable cloth, such as a PET cloth or biocompatible covering material such as a fabric that is treated with a coating that is impermeable to blood, polyester, or a processed biological material, such as pericardium.

[00188] Figures 14A-14G illustrate that a wide variety of docking station configurations can be provided with a permeable portion 1402. The sealing portion 410 may be integrally formed with the body of the docking station as illustrated by Figures 14B, 14D, and 14F or separate as illustrated by Figures 14C, 14E and 14G. In Figures 14F and 14G the docking station 10 includes portions 1410. These portions 1410 are similar to the sealing portions 410, but a seal is not formed with the inner surface 416 of the circulatory system, because the portion 1410 is part of the permeable portion 1402. The valve seat 18 may be separately formed from the body of the docking station as illustrated by Figures 14A-14C or integrally formed with the body of the docking station 10 as illustrated by Figures 14D-14G.

[00189] Figures 15A, 15B, 16, 17A, and 17B illustrate an exemplary embodiment of a frame 1500 or body of a docking station 10. The frame 1500 or body can take a wide variety of different forms and Figures 15A, 15B, 16, 17A, and 17B illustrate just one of the many possible configurations. In the example illustrated by Figures 15A, 15B, 16,

- 47 -

17A, 17B, and 18, the docking station 10 has a relatively wider proximal inflow end 12 and distal outflow end 14, and a relatively narrower portion 16 that forms the seat 18 in between the ends 12, 14. In the example illustrated by Figures 15A, 15B, 17A, and 17B, the frame 1500 of the docking station 10 is preferably a wide stent comprised of a plurality of metal struts 1502 that form cells 1504. In the example of Figures 15A, 15B, 17A, and 17B, the frame 1500 has a generally hourglass-shape that has a narrow portion 16, which forms the valve seat 18 when covered by an impermeable material, in between the proximal and distal ends 12, 14. As described below, the valve 18 expands in the narrow portion 16, which forms the valve seat 18.

[00190] Figures 15A, 15B, 17A, and 17B illustrate the frame 1500 in its unconstrained, expanded condition. In this exemplary embodiment, the retaining portions 414 comprise ends 1510 of the metal struts 1502 at the proximal and distal ends 12, 14. The sealing portion 410 is between the retaining portions 414 and the waist 16. In the unconstrained condition, the retaining portions 414 extend generally radially outward and are radially outward of the sealing portion 410. Figure 16 illustrates the frame 16 in the compressed state for delivery and expansion by a catheter. The docking station can be made from a very resilient or compliant material to accommodate large variations in the anatomy. For example, the docking station can be made from a highly flexible metal, metal alloy, polymer, or an open cell foam. An example of a highly resilient metal is nitinol, but other metals and highly resilient or compliant non-metal materials can be used. The docking station 10 may be self expanding, manually expandable (e.g., expandable via balloon), or mechanically expandable. A self-expanding docking station 10 may be made of a shape memory material such as, for example, nitinol.

- 48 -

[00191] Figure 18 illustrates the frame 1500 with impermeable material 21 attached to the frame 1500 to form the docking station 10. Referring to Figure 18, in one exemplary embodiment a band 20 extends about the waist or narrow portion 16, or is integral to the waist to form an unexpandable or substantially unexpandable valve seat 18. The band 20 stiffens the waist and, once the docking station is deployed and expanded, makes the waist/valve seat relatively unexpandable in its deployed configuration. In the example illustrated by Figure 19, the valve 29 is secured by expansion of its collapsible frame into the narrow portion 16, which forms the valve seat 18, of the docking station 10. As is explained above, the unexpandable or substantially unexpandable valve seat 18 prevents the radially outward force of the valve 29 from being transferred to the inside surface 416 of the circulatory system. However in another exemplary embodiment, the waist/valve seat of the deployed docking station may optionally expand slightly in an elastic fashion when the valve is deployed against it. This optional elastic expansion of the waist 18 may put pressure on the valve 29 to help hold the valve 29 in place within the docking station.

[00192] The band can take a wide variety of different forms and can be made from a wide variety of different materials. The band 20 can be made of PET, one or more sutures, fabric, metal, polymer, a biocompatible tape, or other relatively unexpandable materials known in the art that are sufficient to maintain the shape of the valve seat 18 and hold the valve 29 in place. The band can extend about the exterior of the stent, or can be an integral part of it, such as when fabric or another material is interwoven into or through cells of the stent. The band 20 may be narrow, such as the suture band in Figure 18, or may be wider. The band can be a variety of widths, lengths, and thicknesses. In one non-limiting example, the valve seat 18 is between 27-28 mm wide, although the diameter of

- 49 -

the valve seat should be within the operating range of the particular valve 29 that will be secured within the valve seat 18, and can be different than the foregoing example. The valve 29, when docked within the docking station, can optionally expand around either side of the valve seat slightly. This aspect, sometimes referred to as a “dogbone” (e.g., because of the shape it forms around the valve seat or band), can also help hold the valve in place.

[00193] Figures 20 and 21 illustrate the docking station 10 of Figure 18 implanted in the circulatory system, such as in the pulmonary artery. The sealing portions 410 provide a seal between the docking station 10 and an interior surface 416 of the circulatory system. In the example of Figures 20 and 21, the sealing portion 410 is formed by providing an impermeable material 21 (See Figure 21) over the frame 1500 or a portion thereof. In particular, the sealing portion 410 can comprise the lower, rounded, radially outward extending portion 2000 of the frame 1500. In an exemplary embodiment, the impermeable material 21 extends from at least the portion 2000 of the frame 1500 to the valve seat 18. This makes the docking station impermeable from the sealing portion 410 to the valve seat 18. As such, all blood flowing in the inflow direction 12 toward the outflow direction 14 is directed to the valve seat 18 (and valve 29 once installed or deployed in the valve seat).

[00194] In a preferred embodiment of a docking station 10, the inflow portion has walls that are impermeable to blood, but the outflow portion walls are relatively open. In one approach, the inflow end portion 12, the mid-section 16, and a portion of the outflow end portion 14 are covered with a blood-impermeable fabric 21, which may be sewn onto the stent or otherwise attached by a method known in the art. The impermeability of the

- 50 -

inflow portion of the stent helps to funnel blood into the docking station 10 and ultimately flow through the valve that is to be expanded and secured within the docking station 10.

[00195] From another perspective, this embodiment of a docking station is designed to seal at the proximal inflow section 2000 to create a conduit for blood flow. The distal outflow section, however, is generally left open, thereby allowing the docking station 10 to be placed higher in the pulmonary artery without restricting blood flow. For example, the permeable portion 1400 may extend into the branch of the pulmonary artery and not impede or not significantly impede the flow of blood past the branch. In one embodiment, blood-impermeable cloth, such as a PET cloth for example, or other material covers the proximal inflow section, but the covering does not cover any or at least a portion of the distal outflow section 14. As one non-limiting example, when the docking station 10 is placed in the pulmonary artery, which is a large vessel, the significant volume of blood flowing through the artery is funneled into the valve 29 by the cloth covering 21. The cloth 21 is fluid impermeable so that blood cannot pass through. Again, a variety of other biocompatible covering materials may be used such as, for example, foam or a fabric that is treated with a coating that is impermeable to blood, polyester, or a processed biological material, such as pericardium.

[00196] In the example illustrated by Figure 21, more of the docking station frame 1500 is provided with the impermeable material 21, forming a relatively large impermeable portion 1404. In the example illustrated by Figure 21, the impermeable portion 1404 extends from the inflow end 12 and stops one row of cells 1504 before the outflow end. As such, the most distal row of cells 1504 form a permeable portion 1400. However, more rows of cells 1504 can be uncovered by the impermeable material to form a larger

- 51 -

permeable portion. The permeable portion 1400 allows blood to flow into and out of the area 2130 as indicated by arrows 2132. With respect to the inflow end 12, it should be noted that since the cells 1504 are generally diamond shaped, blood is able to flow between the docking station 10 and the surface 416, until the sealing portion 410 is reached. That is, blood can flow into and out of the areas 2100 in one exemplary embodiment.

[00197] The valve seat 18 can provide a supporting surface for implanting or deploying a valve 29 in the docking station 10. The retaining portions 414 can retain the docking station 10 at the implantation position or deployment site in the circulatory system. The illustrated retaining portions have an outwardly curving flare that helps secure the docking station 10 within the artery. “Outwardly” as used herein means extending away from the central longitudinal axis of the docking station. As can be seen in Figure 20, when the docking station 10 is compressed by the inside surface 416, the retaining portions 414 engage the surface 416 at an angle α (normal to the surface to the tangent of the midpoint of the surface of the retaining portion 414) that can be between 30 and 60 degrees, such as about 45 degrees, rather than extending substantially radially outward (i.e. α is 0 to 20 degrees or about 10 degrees) as in the uncompressed condition (See Figure 15B). This inward bending of the retaining portions 414 as indicated by arrow 2020 acts to retain the docking station 10 in the circulatory system. The retaining portions 14 are at the wider inflow end portion 12 and outflow end portion 14 and press against the inner surface 416. The flared retaining portions 414 engage into the surrounding anatomy in the circulatory system, such as the pulmonic space. In one exemplary embodiment, the flares serve as a stop, which locks the device in place. When an axial force is applied to the docking station

- 52 -

10, the flared retaining portions 414 are pushed by the force into the surrounding tissue to resist migration of the stent as described in more detail below. In a specific embodiment, the docking station generally has an hourglass shape, with wider distal and proximal end portions that have the flared retaining portion and a narrow, banded waist in between the ends, into which the valve is expanded.

[00198] Figure 22 illustrates the docking station 10 deployed in the circulatory system and a valve 29 deployed in the docking station 10. After the docking station 10 is deployed, the valve 29 is in a compressed form and is introduced into the valve seat 18 of the docking station 10. The valve 29 is expanded in the docking station, such that the valve 29 engages the valve seat 18. In the example illustrated by Figure 22, the docking station 10 is longer than the valve. However, in one embodiment, the docking station 10 may be the same length or shorter than the length of the valve 10.

[00199] The valve 29 may be delivered to the site of the docking station via conventional means, such as by balloon or mechanical expansion or by self-expansion. When the valve 29 is expanded, it nests in the valve seat of the docking station 10. In one embodiment, the banded waist is slightly elastic and exerts an elastic force against the valve 29, to help hold the THV in place.

[00200] Figures 23A and 23B illustrate that the docking station 10 can be used to adapt a variety of different sizes of circulatory system anatomies for implantation of a valve 29 having a consistent size. In the example of Figures 23A and 23B, the same size docking station 10 is deployed in two different sized vessels 2300, 2302, such as two differently sized pulmonary arteries PA. In the example, the vessel 2300 illustrated by Figure 23A has a larger effective diameter than the vessel 2302 illustrated by Figure 23B. (Note that

- 53 -

in this patent application the size of the anatomy of the circulatory system is referred to by the term “diameter” or “effective diameter.” The anatomy of the circulatory system is often not circular. The terms “diameter” and “effective diameter” herein refers to the diameter of a circle or disc that could be deformed to fit within the non-circular anatomy.) In the example illustrated by Figures 23A and 23B, the sealing portion 410 and the retaining portions 414 conform to contact each vessel 2300, 2302. However, the valve seat 18 remains the same size, even though the sealing portion 410 and the retaining portions 414 are compressed. In this manner, the docking station 10 adapts a wide variety of different anatomical sizes for implantation of a standard or single sized valve. For example, the docking station may conform to vessel diameters of 25mm and 40 mm, such as 27mm and 38mm and provide a constant or substantially constant diameter valve seat of 24mm to 30mm, such as 27mm to 28mm. However, the valve seat 10 can be adapted for applications where the vessel diameter is larger or smaller than 25mm to 40 mm and provide valve seats that are larger or smaller than 24mm to 30mm.

[00201] Referring to Figures 23A and 23B, a band 20 maintains a constant or substantially constant diameter of the valve seat 18, even as the proximal and distal ends of the docking station expand to respective diameters necessary to engage with the inside surface 416. The diameter of the pulmonary artery PA can vary considerably from patient to patient, but the valve seat 18 in the deployed configuration consistently has a diameter that is within an acceptable range for the valve 29.

[00202] Figures 24 and 25 illustrate side profiles of the docking station 10 illustrated by Figure 18 when implanted in different sized vessels 2300, 2302 of the circulatory system with a schematically illustrated transcatheter heart valve 29 having the same size installed

- 54 -

or deployed in each docking station 10. In this example, the docking station 10 both accommodates vessels 2300, 2302 having a variety of different sizes and acts as an isolator that prevents or substantially prevents radial outward forces of the valve 29 from being transferred to the vessels. The valve seat 18 is not expanded radially outwardly or is not substantially expanded radially outward by the radially outward force of the valve 29 and the anchoring/retaining portions 414 and the sealing portions 410 impart only relatively small radially outward force on the vessels 2300, 2302 (as compared to the radially outward force applied to the valve seat 18 by the valve 29), even when the docking station is deployed in a vessel 2302 having a smaller diameter.

[00203] In the example illustrated by Figures 24 and 25, the stent or frame 712 of the valve 29 expands radially outward or is expanded radially outward to impart the high force 710 on the valve seat 18 of the docking station 10. This high radially outward force 710 secures the valve 29 to the valve seat 18 of the docking station 10. However, since the valve seat 18 is not expanded or is not substantially expanded by the force 710, the force 710 is isolated from the circulatory system, rather than being used to secure the docking station in the circulatory system.

[00204] In an exemplary embodiment, the radially outward force 722 of the sealing portions 410 to both the larger vessel 2300 and the smaller vessel is substantially smaller than the radially outward force 710 applied by the valve 29 to the valve seat 18. For example, for the smallest vessel to be adapted by the docking station 10 for valve implantation, the radially outward sealing force 722 can be less than $\frac{1}{2}$ the radially outward force 710 applied by the valve, less than $\frac{1}{3}$ the radially outward force 710 applied by the valve, less than $\frac{1}{4}$ the radially outward force 710 applied by the valve, less

- 55 -

than $1/8$, or even less than $1/10$ the radially outward force 710 applied by the valve. In one exemplary embodiment, the radially outward force 722 of the sealing portions 410 is selected to provide a seal between the inner surface 416 and the sealing portion 410, but is not sufficient by itself to retain the position of the valve 29 and docking station 10 in the circulatory system. In one embodiment, the radially outward force 722 is sufficient to retain the position of the valve 29 and docking station 10 in the circulatory system.

[00205] In an exemplary embodiment, the docking station 10 illustrated by Figure 18 also includes anchoring/retaining portions 414 that apply radially outward forces 720 that are substantially smaller than the radially outward force 710 applied by the valve 29 to the valve seat 18. For example, for the smallest vessel to be adapted by the docking station 10 for valve implantation, the radially outward sealing force 720 can be less than $1/2$ the radially outward force 710 applied by the valve, less than $1/3$ the radially outward force 710 applied by the valve, less than $1/4$ the radially outward force 710 applied by the valve, less than $1/8$, or even less than $1/10$ the radially outward force 710 applied by the valve. In one embodiment, the radially outward force 720 of the anchoring/retaining portions 414 is not sufficient by itself to retain the position of the valve 29 and docking station 10 in the circulatory system. In one embodiment, the radially outward force 720 is sufficient to retain the position of the valve 29 and docking station 10 in the circulatory system.

[00206] In one exemplary embodiment, the docking station 10 frame 1500 is made from an elastic or superelastic material or metal. One such metal is nitinol. When the frame 1500 of the docking station 10 is made from a lattice of metal struts, the body can have the characteristics of a spring. Referring to Figure 7C, like a spring, when the frame 1500 of the docking station 10 illustrated by Figures 24 and 25 is unconstrained and allowed to

- 56 -

relax to its largest diameter the frame of the docking station applies little or no radially outward force. As the frame 1500 of the docking station 10 is compressed, like a spring, the radially outward force applied by the docking station increases. As is illustrated by Figure 7C, in one exemplary embodiment the relationship of the radially outward force of the docking station frame 1500 to the expanded diameter of the docking station is non-linear, though it can also be linear. In the example illustrated by Figure 7C, the curve 750 illustrates the relationship between the radially outward force exerted by the docking station 10 and the compressed diameter of the docking station. In the region 752, the curve 750 has a low slope. In this region 752 the radially outward force is low and changes only a small amount. In one exemplary embodiment, the region 752 corresponds to a diameter between 25mm and 40 mm, such as between 27mm and 38mm. The radially outward force is small in the region 752, but is not zero. In the region 754, the curve 750 has a higher slope. In this region 754 the radially outward force increases significantly as the docking station is compressed. In one exemplary embodiment, the body of the stent is constructed to be in the low slope region 752 for both a largest vessel 2300 (Figure 24) accommodated by the docking station 10 and a smallest vessel 2302 (Figure 25). This allows the sealing portions 710 to apply only a small radially outward force to the inner surface 416 of the circulatory system over a wide range of diameters.

[00207] Figures 26A-26C illustrate the docking station 10 of Figure 18 implanted in a pulmonary artery. Figure 26A illustrates the profile of the docking station 10 implanted in the pulmonary artery PA. Figure 26B illustrates the profile of the docking station 10 implanted in the pulmonary artery PA with a schematically illustrated valve 29 installed or deployed in the docking station 10. Figure 26C illustrates the docking station 10 and

- 57 -

valve 29 as depicted in Figure 22 implanted in the pulmonary artery PA. As mentioned with respect to Figures 2A-2E and 3A-3D, the shape of the pulmonary artery may vary significantly along its length. In one exemplary embodiment, the docking station 10 is configured to conform to the varying shape of the pulmonary artery PA. The docking station 10 is illustrated as being positioned below the pulmonary artery bifurcation or branch. However, often the docking station 10 will be positioned such that the end 14 extends into the pulmonary artery bifurcation 210. When it is contemplated that the docking station 10 will extend into the pulmonary artery bifurcation, the docking station 10 can have a blood permeable portion 1400 (e.g., as shown in Figure 21).

[00208] Figure 27 illustrates another exemplary embodiment of a docking station 10. The docking station 10 includes a frame 2700 and an external sealing portion 410. The frame 2700 or body can take a wide variety of different forms and Figure 27 illustrates just one of the many possible configurations. In the example illustrated by Figure 27 the docking station 10 has a relatively wider proximal inflow end 12 and distal outflow end 14, and an elongated relatively narrower portion 2716. The seat 18 and sealing portion 410 can be provided anywhere along the length of the elongated relatively narrow portion 2716. In the example illustrated by Figure 27, the frame 2700 of the docking station 10 is preferably a stent comprised of a plurality of metal struts 1502 that form cells 1504. The frame 2700 or portion(s) of the frame can optionally be covered by an impermeable material 21 (e.g., as shown in Figure 18).

[00209] Figure 27 illustrates the frame 2700 and sealing portion 410 in their unconstrained, expanded condition/configuration or deployed configuration. In this exemplary embodiment, the retaining portions 414 comprise ends 1510 of the metal struts 1502 at the

- 58 -

proximal and distal ends 12, 14. The sealing portion 410 can be a separate component that is disposed around the frame 2700 between the retaining portions 414. In the unconstrained condition, the retaining portions 414 extend generally radially outward and may be radially outward of the sealing portion 410.

[00210] The docking station 10 illustrated by Figure 27 may be made from a very resilient or compliant material to accommodate large variations in the anatomy. For example, the docking station may be made from a highly flexible metal (e.g., the frame in the Figure 27 example) and cloth and/or an open cell foam (e.g., the sealing portion in the Figure 27 example). An example of a highly resilient metal is nitinol, but other metals and highly resilient or compliant non-metal materials can be used. An example of an open cell foam that can be used is a biocompatible foam, such as a polyurethane foam (e.g., as may be obtained from Biomerix, Rockville, MD). In one embodiment, a foam forming the sealing portion may also form a valve seat on its inner surface.

[00211] Still referring to Figure 27, the frame 2700 and/or the separate sealing portion 410 may include an optional a band 20 to form an unexpandable or substantially unexpandable valve seat 18. In another exemplary embodiment, the frame 2700 may be configured to be substantially unexpandable in the area of the valve seat 18 without the use of a band 20. The optional band 20 stiffens the frame 2700 and/or sealing portion and makes the valve seat relatively unexpandable.

[00212] The optional band 20 can take a wide variety of different forms, can be made from a wide variety of different materials, and can be the same as or similar to bands discussed elsewhere in this disclosure. The band 20 can be made of PET, one or more sutures, fabric, metal, polymer, a biocompatible tape, or other relatively unexpandable materials

- 59 -

known in the art that are sufficient to maintain the shape of the valve seat 18 and hold the valve 29 in place. The band can extend about the exterior of the stent, or can be an integral part of it, such as when fabric or another material is interwoven into or through cells of the stent. The band 20 can be narrow, such as the suture band in Figure 18, or can be wider as illustrate by the dashed line in Figure 27. In one non-limiting example, the valve seat 18 is between 27-28 mm in diameter, although the diameter of the valve seat should be within the operating range of the particular valve 29 that will be secured within the valve seat 18, and may be different than the foregoing example.

[00213] Figures 28 and 29 illustrate a modified version of the docking station 10 illustrated by Figure 27 that is expandable in length. As mentioned above, the length of the pulmonary artery PA and other anatomical structures of the circulatory system may vary greatly from patient to patient. Referring to Figure 29, in one exemplary embodiment the length of the docking station 10 is adjustable as indicated by arrow 1100. The length may be adjusted in a wide variety of different ways, e.g., it can be adjustable in any of the ways described elsewhere in this disclosure. In the example illustrated by Figures 28 and 29, the docking station 10 includes a first half 1102 and a second half 1104. The second half 1104 can be inserted or “telescoped” into the first half 1102. The amount of insertion or “telescoping” sets the length of the docking station 10.

[00214] In one exemplary embodiment, the length of the docking station 10 is adjusted in the pulmonary artery PA by first deploying the first half 1102 of the docking station 10 in the pulmonary artery. For example, the first half 1102 may be positioned and expanded such that a distal end 1106 of the first half is aligned with or extends somewhat past the branch of the pulmonary artery. After the first half 1102 is expanded in the pulmonary

- 60 -

artery, the compressed second half 1104 is positioned with a distal end 1110 disposed in the proximal end 1108 of the first half 1102. The position of the second half 1104 is selected such that the sealing portion 410 and retaining portion 414 will make contact with the pulmonary artery and set the position of the docking station 10 in the pulmonary artery. Once properly positioned, the second half 1104 is expanded. The distal end of 1110 of the second half 1104 frictionally engages the proximal end 1108 of the first half to secure the two halves 1102, 1104 together. In one embodiment, a lock(s), locking mechanism, suture(s), interlacing, link(s) and/or other attachment device/mechanism may (also or alternatively) be used to secure the two halves together.

[00215] In the examples illustrated by Figures 28 and 29, the seat 18 and the sealing portion 410 are included on the first half 1102 of the docking station 10. However, in other embodiments the seat 18 and/or the sealing portion(s) 410 can be included on the second half 1104 or in different locations on the first half and/or the second half.

[00216] Figures 30 and 31A illustrate the docking station 10 of Figure 27 of Figures 28 and 29 implanted in the circulatory system, such as in the pulmonary artery PA. The sealing portion 410 provides a seal between the docking station 10 and an interior surface 416 of the pulmonary artery PA. In the example of Figures 30 and 31A, the sealing portion 410 is an expanding material, such as an expandable open cell foam over the frame 2700. In an exemplary embodiment, the sealing portion 410 coincides or at least overlaps with the valve seat 18. When the sealing portion 410 does not overlap with the valve seat 18, an impermeable material 21 may be provided over a portion of the frame (e.g., from the sealing portion 410 to the valve seat 18 to make the docking station impermeable from the sealing portion 410 to the valve seal 18). Whether the sealing portion 410 overlaps with

- 61 -

the valve seat 10 or an impermeable material is provided from the sealing portion 410 to the valve seat 18, all blood flowing in the inflow direction 12 toward the outflow direction 14 is directed to the valve seat 18 (and valve 29 once installed or deployed in the valve seat).

[00217] In one exemplary embodiment of a docking station 10, at least the outflow portion 14 of the frame 2700 is relatively open. Referring to Figure 31A, this allows the docking station 10 to be placed higher in the pulmonary artery without restricting blood flow. For example, the open cells 1504 may extend into the branch or bifurcation of the pulmonary artery and not impede or not significantly impede the flow of blood past the branch. The open cells 1504 allow blood to flow through the frame 1500 as indicated by arrows 3132 in Figure 31A.

[00218] In the example illustrated by Figures 30 and 31A, the docking station 10 is retained in the pulmonary artery PA by expanding one or more of the retaining portions 414 radially outward into an area 210, 212 of the pulmonary artery PA where the inside surface 416 also extends outward. For example, the retaining portions 414 may be configured to extend radially outward into the pulmonary bifurcation 210 and/or the opening 212 of the pulmonary artery to the right ventricle RV. In one exemplary embodiment, the docking station 10 can be an adjustable docking station. For example, docking station 10 can be a telescoping docking station as illustrated by Figure 28 and the first portion 1102 is deployed such that the retaining portions 414 extend radially outward into the pulmonary bifurcation 210). The second portion 1104 can then be positioned in the first portion 1102 such that its retaining portions 414 coincide with the opening of the pulmonary artery or another outwardly extending area of the pulmonary artery. Once in

- 62 -

position, the second portion 1104 can be expanded to secure the second section 1104 to the first section 1102 and to secure the second section to the pulmonary artery at the opening 212 or other outwardly extending area.

[00219] Referring to Figure 31B, the valve seat 18 provides a supporting surface for installing or deploying a valve 29 in the docking station 10. The valve may be installed or deployed in the valve seat using the steps disclosed here or elsewhere in this disclosure. The anchoring/retaining portions 414 retain the docking station 10 at the implantation or deployed site/position in the circulatory system. After the docking station 10 is deployed, the valve 29 is in a compressed form and can be introduced into the valve seat 18 of the docking station 10. The valve 29 can be expanded in the docking station, such that the valve 29 engages the valve seat 18. The valve 29 can be delivered to the site of the docking station via conventional means, such as by balloon or mechanical expansion or by self-expansion. When the valve 29 is expanded, it nests in the valve seat of the docking station 10.

[00220] Referring to Figure 32A, the docking station illustrated by Figure 18 is deployed in the pulmonary artery PA of a heart H. Figure 32B illustrates a generically illustrated valve 29 deployed in the docking station 10 illustrated by Figure 32A. In Figures 32A and 32B, the heart is in the systolic phase. Figure 33A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 32B. When the heart is in the systolic phase, the valve 29 opens. Blood flows from the right ventricle RV and through the pulmonary artery PA, docking station 10, and valve 29 as indicated by arrows 3202. Figure 33B illustrates space 3208 that represents the valve 29 being open when the heart is in the systolic phase. Figure 33B does not show the interface between the docking station

- 63 -

10 and the pulmonary artery to simplify the drawing. The cross-hatching in Figure 33B illustrates blood flow through the open valve. In an exemplary embodiment, blood is prevented from flowing between the pulmonary artery PA and the docking station 10 by the seal 410 and blood is prevented from flowing between the docking station 10 and the valve 29 by seating of the valve 29 in the seat 18 of the docking station 10. In this example, blood is substantially only or only able to flow through the valve 29 when the heart is in the systolic phase.

[00221] Figure 34 illustrates the valve 29, docking station 10 and heart H illustrated by Figure 32B, when the heart is in the diastolic phase. Referring to Figures 34, when the heart is in the diastolic phase, the valve 29 closes. Figure 35A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 34. Blood flow in the pulmonary artery PA above the valve 29 (i.e. in the pulmonary branch 210) is blocked by the valve 29 being closed and blocking blood flow as indicated by arrow 3400. The solid area 3512 in Figure 35B represents the valve 29 being closed when the heart is in the diastolic phase.

[00222] Referring to Figure 33A, the radially outward force 720 of the anchoring/retaining portions 414 to the inside surface 416 is substantially smaller than the radially outward force 710 applied by the valve 29 to the valve seat 18. For example, the radially outward sealing force 720 can be less than $\frac{1}{2}$ the radially outward force 710 applied by the valve, less than $\frac{1}{3}$ the radially outward force 710 applied by the valve, less than $\frac{1}{4}$ the radially outward force 710 applied by the valve, less than $\frac{1}{8}$, or even less than $\frac{1}{10}$ the radially outward force 710 applied by the valve.

- 64 -

[00223] Referring to Figures 33A and 35A, in one exemplary embodiment the radially outward force 720 of the retaining portions 414 is not sufficient by itself to retain the position of the valve 29 and docking station 10 in the circulatory system. Rather, the pressure of the blood 3208 is used to enhance the retention of the retaining portions 414 to the inside surface 416. Referring again to Figure 33A, when the heart is in the systolic phase, the valve 29 is open and blood flows through the valve as indicated by arrows 3202. Since the valve 29 is open and blood flows through the valve 29, the pressure P applied to the docking station 10 and valve 29 by the blood is low as indicated by the small P and arrow in Figure 33A. Even though small, the pressure P forces the docking station and its upper retaining portions 414 against the surface 416 generally in the direction indicated by arrow F (the small F represents a relatively low force). This blood flow assisted force F applied by the retaining portions F to the surface 416 prevents the docking station 10 and valve 29 from moving in the direction 3302 of blood flow in the systolic phase of the heart H.

[00224] Referring to Figure 35A, when the heart is in the diastolic phase, the valve 29 is closed and blood flow is blocked as indicated by arrow 3400. Since the valve 29 is closed and the valve 29 and docking station 10 block the flow of blood, the pressure P applied to the docking station 10 and valve 29 by the blood is high as indicated by the large arrow P in Figure 35A. This large pressure P forces the lower retaining portions 414 against the surface 416 generally in the direction indicated by the large arrows F (the large F represents a relatively larger force). This blood flow assisted force F applied by the retaining portions F to the surface 416 prevents the docking station 10 and valve 29 from moving in the direction indicated by arrow 3400.

- 65 -

[00225] Referring to Figures 33A and 35A, since the force applied by the upper and lower retaining portions 414 is determined by amount of pressure applied to the valve 29 and docking station 10 by the blood, the force applied to the surface 416 is automatically proportioned. That is, the upper retaining portions are less forcefully pressed against the surface 416 when the heart is in the systolic phase than the lower retaining portions are pressed against the surface 416 when the heart is in the diastolic phase. This is because the pressure against the open valve 29 and docking station 10 in the systolic phase is less than the pressure against the closed valve and docking station in the diastolic phase.

[00226] Methods of treating a patient (e.g., methods of treating heart valve dysfunction/regurgitation/etc.) may include a variety of steps, including steps associated with introducing and deploying a docking station in a desired location/treatment area and introducing and deploying a valve in the docking station. For example, Figure 36A illustrates the docking station illustrated by Figure 18 being deployed by a catheter 3600. The docking station 10 can be positioned and deployed in a wide variety of different ways. Access can be gained through the femoral vein or access can be percutaneous. Generally, any vascular path that leads to the pulmonary artery may be used. In one exemplary embodiment, a guidewire followed by a catheter 3600 is advanced to the pulmonary artery PA by way of the femoral vein, inferior vena cava, tricuspid valve and right ventricular RV. The docking station 10 can be placed in the right ventricular outflow tract/pulmonary artery PA to create an artificial conduit and landing zone for a valve (e.g., a transcatheter heart valve) 29.

[00227] Referring to Figure 36B, the docking station illustrated by Figure 18 is deployed in the pulmonary artery (PA) of a heart H. Figure 36C illustrates a valve 29 deployed in the

- 66 -

docking station 10 illustrated by Figure 32A. In the example illustrated by Figures 36C, 37A, 38, 39A, and 39B, the valve 29 is depicted as a SAPIEN 3 THV provided by Edwards Lifesciences; however, a variety of other valves may also be used. In Figures 36A-36C, the heart is in the systolic phase. Figure 37A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 36C. When the heart is in the systolic phase, the valve (e.g., Sapien 3 valve) is open. Blood flows from the right ventricular RV and through the pulmonary artery PA, docking station 10, and valve as indicated by arrows 3202. Figure 37B illustrates space 3208 that represents the valve being open when the heart is in the systolic phase. Figure 37B does not show the interface between the docking station 10 and the pulmonary artery to simplify the drawing. The cross-hatching in Figure 37B illustrates blood flow through the valve. In an exemplary embodiment, blood is prevented from flowing between the pulmonary artery PA and the docking station 10 by the seal 410 and blood is prevented from flowing between the docking station 10 and the valve by seating of the valve in the seat 18 of the docking station 10. In this example, blood is substantially only or only able to flow through the valve when the heart is in the systolic phase.

[00228] Figure 38 illustrates the valve 29, docking station 10 and heart H illustrated by Figure 36C, when the heart is in the diastolic phase. Referring to Figures 38, when the heart is in the diastolic phase, the valve 29 closes. Figure 39A is an enlarged representation of the docking station 10 and valve (e.g., Sapien 3 valve) in the pulmonary artery 29 of Figure 38. Blood flow in the pulmonary artery PA above the valve 29 (i.e. in the pulmonary branch 210) is blocked by the valve 29 being closed and blocking blood

- 67 -

flow as indicated by arrow 3400. The solid area 3512 in Figure 39B represents the valve 29 being closed when the heart is in the diastolic phase.

[00229] Referring to Figure 39A, the radially outward force 720 of the anchoring/retaining portions 414 to the inside surface 416 is substantially smaller than the radially outward force 710 applied by the valve (e.g., Sapien 3 valve) to the valve seat 18. For example, the radially outward sealing force 720 can be less than $\frac{1}{2}$ the radially outward force 710 applied by the valve, less than $\frac{1}{3}$ the radially outward force 710 applied by the valve, less than $\frac{1}{4}$ the radially outward force 710 applied by the valve, less than $\frac{1}{8}$, or even less than $\frac{1}{10}$ the radially outward force 710 applied by the valve. The 29mm size Sapien 3 valve typically applies radially outward force 710 of about 42 Newtons. In one embodiment, the radially outward force of deployed docking stations described herein or one or more portions of a deployed docking stations can be between about 4 to 16 Newtons, though other forces are also possible.

[00230] Figure 40A illustrates the docking station illustrated by Figures 27 or 28 being deployed by a catheter 3600. Referring to Figure 40B, the docking station illustrated by Figure 27 or 28 is deployed in the pulmonary artery PA of a heart H. Figure 40C illustrates a valve 29 deployed in the docking station 10 illustrated by Figure 40A. In the example illustrated by Figures 36C, 37A, 38, 39A, and 39B, the valve 29 is a SAPIEN 3 THV provided by Edwards Lifesciences, though a variety of different valves may be used. In Figures 40A-40C, the heart is in the systolic phase. Figure 41A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 40C. When the heart is in the systolic phase, blood flows from the right ventricular RV and through the pulmonary artery PA, docking station 10, and valve 29 as indicated by arrows

- 68 -

3202. Figure 41B illustrates space 3208 that represents the valve 29 being open when the heart is in the systolic phase. Figure 41B does not show the interface between the docking station 10 and the pulmonary artery to simplify the drawing. The cross-hatching in Figure 41B illustrates blood flow through the valve 29. In an exemplary embodiment, blood is prevented from flowing between the pulmonary artery PA and the docking station 10 by the seal 410 and blood is prevented from flowing between the docking station 10 and the valve 29 by seating of the valve in the seat 18 of the docking station 10. In this example, blood is substantially only or only able to flow through the valve when the heart is in the systolic phase.

[00231] Figure 42 illustrates the valve 29, docking station 10 and heart H illustrated by Figure 40C, when the heart is in the diastolic phase. Referring to Figure 42, when the heart is in the diastolic phase, the valve 29 closes. Figure 43A is an enlarged representation of the docking station 10 and valve 29 in the pulmonary artery 29 of Figure 42. Blood flow in the pulmonary artery PA above the valve 29 (i.e. in the pulmonary branch 210) is blocked by the valve 29 being closed and blocking blood flow as indicated by arrow 3400. The solid area 3512 in Figure 43B represents the valve 29 being closed when the heart is in the diastolic phase.

[00232] Referring to Figure 43A, the docking station 10 is retained in the pulmonary artery PA by expanding one or more of the retaining/anchoring portions 414 radially outward into an area 210, 212 of the pulmonary artery PA where the inside surface 416 also extends outward. For example, the retaining portions 414 may be configured to extend radially outward into the pulmonary bifurcation 210 and/or the opening 212 of the pulmonary artery to the right ventricle RV. In one exemplary embodiment, the docking

- 69 -

station 10 can be an adjustable and/or multiple component docking station. For example, docking station 10 can be a telescoping docking station as illustrated by Figure 28 and the first portion 1102 can be deployed such that the retaining portions 414 extend radially outward into the pulmonary bifurcation 210 and the second portion 1104 can be positioned in the first portion 1102 such that its retaining portions 414 coincide with the opening 212 of the pulmonary artery. The extension of the retaining portions 414 into the areas 210, 212 set the position of the docking station 10 in the pulmonary artery PA and help prevent the pressure P shown in Figure 43A from moving the docking station.

[00233] The valve 29 used with the docking station 10 can take a wide variety of different forms. In one exemplary embodiment, the valve 29 is configured to be implanted via a catheter in the heart H. For example, the valve 29 may be expandable and collapsible to facilitate transcatheter application in a heart. However, in other embodiments, the valve 29 may be configured for surgical application. Similarly, the docking stations described herein may be placed using transcatheter application/placement or surgical application/placement.

[00234] Figures 44-48 illustrate a few examples of the many valves or valve configurations that can be used. Any valve type may be used and some valves that are traditionally applied surgically may be modified for transcatheter implantation. Figure 44 illustrates an expandable valve 29 for transcatheter implantation that is shown and described in US Patent No. 8,002,825, which is incorporated herein by reference in its entirety. An example of a tri-leaflet valve is shown and described in Published Patent Cooperation Treaty Application No. WO 2000/42950, which is incorporated herein by reference in its entirety. Another example of a tri-leaflet valve is shown and described in US Patent No.

- 70 -

5,928,281, which is incorporated herein by reference in its entirety. Another example of a tri-leaflet valve is shown and described in US Patent No. 6,558,418, which is incorporated herein by reference in its entirety. Figures 45-47 illustrate an exemplary embodiment of an expandable tri-leaflet valve 29, such as the Edwards SAPIEN Transcatheter Heart Valve. Referring to Figure 45, in one exemplary embodiment the valve 29 comprises a frame 712 that contains a tri-leaflet valve 4500 (See Figure 46) compressed inside the frame 712. Figure 46 illustrates the frame 712 expanded and the valve 29 in an open condition. Figure 47 illustrates the frame 712 expanded and the valve 29 in a closed condition. Figures 48A, 48B, and 48C illustrate an example of an expandable valve 29 that is shown and described in US Patent No. 6,540,782, which is incorporated herein by reference in its entirety. An example of a valve is shown and described in US Patent No. 3,365,728, which is incorporated herein by reference in its entirety. Another example of a valve is shown and described in US Patent No. 3,824,629, which is incorporated herein by reference in its entirety. Another example of a valve is shown and described in US Patent No. 5,814,099, which is incorporated herein by reference in its entirety. Any of these or other valves may be used as valve 29 in the various embodiments disclosed herein.

[00235] Figures 49A, 49B and 50A-50D illustrate a distal portion of an exemplary embodiment of a catheter 3600 for delivering and deploying the docking station 10. The catheter 3600 can take a wide variety of different forms. In the illustrated example, the catheter 3600 includes an outer tube/sleeve 4910, an inner tube/sleeve 4912, a docking station connector 4914 that is connected to the inner tube 4912, and an elongated nosecone 28 that is connected to the docking station connector 4914 by a connecting tube 4916.

- 71 -

[00236] The docking station 10 can be disposed in the outer tube/sleeve 4910 (See Figure 49B). Elongated legs 5000 can connect the docking station 10 to the docking station connector 4914 (See Figure 49B). The elongated legs 5000 can be retaining portions that are longer than the remainder of the retaining portions 414. The catheter 3600 can be routed over a guidewire 5002 to position the docking station 10 at the delivery site.

[00237] Referring to Figures 50A-50D, the outer tube 4910 is progressively retracted with respect to inner tube 4912, the docking station connector 4914, and the elongated nosecone 28 to deploy the docking station 10. In Figure 50A, the docking station 10 begins to expand from the outer tube 4910. In Figure 50B, a distal end 14 of the docking station 10 expands from the outer tube 4910. In Figure 50C, the docking station 10 is expanded out of the outer tube, except the elongated legs 5000 remain retained by the docking station connector 4914 in the outer tube 4910. In Figure 50D, docking station connector 4914 extends from the outer tube 4910 to release the legs 5000, thereby fully deploying the docking station. During deployment of a docking station in the circulatory system, similar steps may be used and the docking station may be deployed in a similar way.

[00238] Figures 51 and 54 illustrate exemplary embodiments of the nosecone 28. In one exemplary embodiment, the nosecone 28 is an elongated flexible tip or distal end 5110 on a catheter used to assist feeding the catheter 3600 into the heart. In the illustrated examples, nosecone 28 is a long, gradually-tapering cone, with the narrow, distal end of the cone being relatively flexible. In one non-limiting embodiment, a nosecone has a length of 1.5 inches, with an inner lumen 5200 of the nosecone 28 having an inner diameter of 0.04 inches to accommodate the guidewire 5002. In one embodiment, as the

- 72 -

diameter of the nosecone 100 increases from the narrow distal end to the wider proximal end, the cone becomes gradually more stiff. This may be due to the increase in thickness and/or the nosecone may be constructed from different materials having different durometers. Optionally, the stiffness of the nose cone at the point it connects with the outer tube 4910 may be approximately the same as the stiffness of the outer tube 4910, in order to prevent a sudden change in stiffness. In the examples illustrated by Figures 51 and 54, the elongated distal ends 5110 of the nosecone 28 are the same. In one embodiment, the taper of the nosecone 28 extends the full length or only a portion of the length of the nosecone 28 from end to end. To form the taper an outer diameter of the nosecone 28 can increase in a distal to proximal direction. The taper can take a variety of shapes and the outer surface of the taper can be at a variety of angles with respect to a longitudinal axis of the nosecone 28.

[00239] In one exemplary embodiment, a longer distal end 5110 of the nosecone 28 assists in navigating around a bend or curve in the patient's vasculature. Because of the increased length of the nosecone 28 more of the tip gets around the bend, and creates a "follow-the-leader" effect with the remainder of the nose cone.

[00240] In the example illustrated by Figure 51, the base or proximal end 5112 of the nosecone 28 has a proximal angled portion 5308 adjacent to a shelf 5310. The proximal angled portion does not catch on the docking station 10 that has been implanted in the heart, when the delivery catheter is retrieved. Thus, the proximal base portion 5112 allows for easier removal of the delivery system. Referring to Figure 53, as the angled portion 5308 (or "ramp") of the base portion 5112 is retracted into the outer tube 4910, the ramp 5308 enters the delivery catheter first, followed by the shelf 5310. When the nose cone 28

- 73 -

engages with the outer sleeve/tube 4910, the inner diameter of the outer sleeve rides up the ramp 5308, and then rests on the shelf 5310 (which can be flat or substantially flat, e.g., 180° or $180^\circ \pm 5^\circ$ with respect to a longitudinal axis of the nosecone 28). The inner diameter of the outer sleeve/tube 4910 can be slightly less than the diameter of the shelf 5310, to ensure a snug fit.

[00241] In one non-limiting example, the shelf 5310 of the nosecone 28 fits snugly into a lumen or outer lumen of the catheter assembly 3600 which, in one non-limiting example, can have a diameter of approximately 0.2 inches or between 0.1 inches and 0.4 inches. In one embodiment, the outer diameter of the largest portion of the nosecone 28 can be 0.27 inches or between 0.2 inches and 0.4 inches, with a diameter at the distal tip of the nosecone of 0.069 inches or between 0.03 inches and 0.1 inches. Again, these dimensions are for illustrative purposes only. For example, the outer diameter or largest outer diameter of the nosecone 28 can be larger than the outer diameter of the outer tube 4910 (e.g., slightly larger as illustrated), the outer diameter of the nosecone 28 can be the same as the outer diameter of the outer tube 4910, or the outer diameter of the nosecone 28 can be smaller (e.g., slightly smaller) than the outer diameter of the outer tube 4910.

[00242] In the example illustrated by Figure 54, the entire base or proximal end/portion 5112 of the nosecone 28 is angled. The continuously angled proximal end 5112 does not catch on the docking station 10 that has been implanted in the heart, when the delivery catheter is retrieved. Thus, the base portion 5112 allows for easier removal of the delivery system. Referring to Figure 55, the outer tube 4910 may include a chamfer 5500 to accept and mate with the continuously angled proximal end 5112.

- 74 -

[00243] In one non-limiting example, the continuously angled proximal end 5112 of the nosecone 28 fits snugly into the outer tube/sleeve 4910 (which can optionally be chamfered) of the catheter assembly 3600. The outer diameter or largest outer diameter of the nosecone 28 can be larger (e.g., slightly larger) than the outer diameter of the outer tube 4910, the outer diameter of the nosecone 28 can be the same as the outer diameter of the outer tube 4910 as illustrated, or the outer diameter of the nosecone 28 can be smaller (e.g., slightly smaller) than the outer diameter of the outer tube 4910.

[00244] The docking station 10 can be coupled to the catheter assembly, or a docking station connector 4914 of the catheter assembly, in a wide variety of different ways. For example, the docking station 10 could be coupled with the catheter assembly with a lock(s), locking mechanism, suture(s) (e.g., one or more sutures releasably attached, tied, or woven through one or more portion of the docking station), interlocking device(s), a combination of these, or other attachment mechanisms. Some of these coupling or attachment mechanisms may be configured to allow for the docking station to be retracted back into the catheter assembly without causing the docking station to catch on edges of the catheter assembly, e.g., by constraining the proximal end of the docking station to a smaller profile or collapsed configuration, to allow for adjustment, removal, replacement, etc. of the docking station. Figures 56, 57, 57A, and 57B illustrate one non-limiting example of how docking station 10 may be coupled to the docking station connector 4914. As is illustrated by Figures 50A-50D, when the docking station 10 is pushed out of the outer tube, it self-expands in one exemplary embodiment. One approach to controlling expansion of the docking station 10 is to anchor at least one end, such as the proximal end 12, of the stent to the docking station connector 4914. This approach allows a distal end

- 75 -

14 of the stent to expand first, without the proximal end expanding (See Figure 50B). Then when the stent is moved relatively forward with respect to the outer tube 4910, the proximal end 12 disengages from the docking station connector 4914, and the proximal end 12 of the docking station is permitted to expand (See Figure 50D).

[00245] One way of accomplishing this approach is to include one or more extensions 5000 on at least the proximal end of the stent 12. In the illustrated examples, two extensions are included. However, any number of extensions 5000, such as two, three, four, etc. can be included. The extensions 5000 can take a wide variety of different forms. The extensions 5000 can engage with the docking station connector 4914 within the outer tube 4910. In one exemplary embodiment, the docking station connector 4914 may engage an inner face 5600 of the extensions 5000. In one exemplary embodiment, other than possible engagement of an inner face 5600 (See Figure 57A) of the extensions 5000 with the docking station connector 4914, the extensions 5000 and docking station connector 4914 are configured to limit the retaining engagement therebetween to two points when the distal portion of the catheter assembly and/or docking station are in a straight or substantially straight configuration, but these could similarly be configured to limit the retaining engagement another number of points, e.g., three to six points. In one exemplary embodiment, the inner face 5600 of the extensions 5000 do not contact with the docking station connector 4914 when the distal portion of the catheter assembly and/or the docking station is in a straight or substantially straight configuration, due to the radially outward biasing force of the compressed extensions. In this embodiment, the inner face 5600 of the extensions 5000 could contact the docking station connector 4914 due to bending of the catheter assembly 3600 and/or the docking station. The extensions 5000 may include

- 76 -

heads 5636 with sides 5640 that extend away from a straight portion 5638 at an angle β (See Figure 57A), such as between 30 and 60 degrees. Such heads 5636 may be generally triangular as illustrated or the angularly extending sides 5640 may be connected together by another shape, such as a rounded shape, a rectangular shape, pyramidal shape, or another shape. That is, the heads 5636 may function in the same manner as the illustrated triangular head, without being triangular.

[00246] The delivery catheter 3600 constantly bends and curves as it moved through the vasculature of the patient's body. A head 5636 that transitions directly from an straight portion 5638 of the extension 5000 to a T-shape, curved T-shaped, circular or spherical shape will generally have more than two point retaining contact with its holder (other than possible engagement of an inner face 5600 (See Figure 17A) of the extension 5000 with the docking station connector 4914). Referring to Figures 57A and 57B, a head 5636 with sides 5640 that extend away from one another at an angle β , such as a triangular head, results in the head 5636 only touching the docking station connector 4914 at two points 5702, 5704. In the example illustrated by Figure 57A, the two points are corners formed by a T-shaped recess 5710. As shown in Figure 57B, the extension 5000 can tilt as the catheter 3600 and docking station 10 moves through the body during delivery. In one exemplary embodiment, this tilting can also result in only two point contact between the extension 5000 and the docking station connector 4914 as illustrated by Figure 57B (other than possible engagement of an inner face 5600 (See Figure 17A) of the extension 5000 with the docking station connector 4914). As such, the extension 5000 can tilt during delivery, increasing the flexibility of the catheter 3600 in the area of the docking station

- 77 -

10, while the two point contact prevents binding between the extension 5000 and the connector 4914.

[00247] Referring to Figures 56, 57, 57A, and 57B, the heads 5636 fit into the T-shaped recesses 5710 in a holder to holds the proximal end 12 of the docking station while the distal end self-expands within the body. The docking station connector 4914 remains in the delivery catheter until moved relatively out of the catheter (i.e. by retracting the outer tube/sleeve 4910 or by advancing the connector 4914, See Figure 50D). Referring to Figure 56, the outer tube/sleeve 4910 of the catheter 3600 can be closely disposed over the connector 4914, such that the heads 5636 are captured in the recesses 5710, between the outer tube/sleeve 4910 and the body of the connector 4914. This capturing in the recesses 5710 holds the end of the docking station 10 as the docking station expands. In this manner, delivery of the docking station 10 is controlled.

[00248] Referring back to Figure 50D, at the end of the expansion of the docking station 10 – when the distal end of the stent has already expanded - the connector 4914 is moved relatively out of the outer sleeve. The heads 5636 are then free to move radially outward and disengage with the respective recesses 5710 (see Figure 56).

[00249] In one embodiment, all of the extensions 5000 are the same length. As the connector is moved relatively out of the outer tube/sleeve 4910, the recesses 5710 are simultaneously relatively moved out of the outer sleeve 4910. Since the extensions 5000 are all the same length, the recesses 5710 with the heads 5636 will all emerge from the delivery outer sleeve 4910 at the same time. Consequently, the heads 5636 of the docking station will move radially outward and release all at once.

- 78 -

[00250] In an alternative embodiment, the docking station 10 is provided with extensions 5000 having heads 5636, but at least some of the extensions 5000 are longer than others. That way, as the connector 4914 is gradually moved relatively out of the outer sleeve 4910, the shortest extensions 5000 are released first from their respective recess(es) 5710. Then, as the connector 4914 is moved relatively further out of the outer sleeve 4910, the longer of the extensions 5000 are released from the respective recess(es) 5710. As is described above, in one exemplary embodiment the docking station 10 can be deployed with a catheter/catheter assembly 3600. The catheter/catheter assembly 3600 is advanced in the circulatory system to a delivery site or treatment area. Once at the delivery site, the docking station 10 is deployed by moving an outer sleeve or tube 4910 relative to an inner sleeve or tube 4912 and attached connector 4914 and docking station 10 (See Figures 50A-50D). The outer sleeve 4910 can be moved relative to the inner sleeve 4912 in a wide variety of different ways. Figures 58-61 and 62-73 illustrate examples of tools or handles 5800, 6200 that can be used for moving a catheter 3600 in the circulatory system and relatively moving an outer sleeve 4910 relative to an inner sleeve 4912 of the catheter 3600, e.g., to deploy/place a docking station.

[00251] In the example illustrated by Figures 58-61, the handle 5800 includes a housing 5810, a drive member 5812, and a driven shaft 5814. In the illustrated example, rotation of the drive member 5812 as indicated by arrow 5816 relative to the housing 5810 moves the driven shaft 5814 linearly as indicated by arrow 5818. Referring to Figure 60, the inner sleeve 4912 is fixedly connected to the housing 5810 as indicated by arrow 6000 and the outer sleeve 4910 is fixedly connected to the driven shaft 5814 as indicted by arrow 6002. As such, rotating the drive member 5812 in a first direction retracts the outer sleeve

- 79 -

4910 relative to the inner sleeve 4912 and rotating the drive member 5812 in the opposite direction advances the outer sleeve 4910 relative to the inner sleeve 4912.

[00252] In the example illustrated by Figures 58-61, the housing 5810 includes an annular recess 5820. The drive member 5812 includes an annular projection 5822. The annular projection 5822 fits within the annular recess to rotatably couple the drive member 5812 to the housing 5810. The drive member 5812 includes an engagement portion 5830 that extends from the housing to allow a user to rotate the drive member 5812 relative to the housing 5810.

[00253] In the example illustrated by Figures 58-61, the housing 5810 includes a linear recess 5840 or groove (See Figure 59). The driven shaft 5814 includes a linear projection 5842. The linear projection 5842 fits within the linear recess 5840 to slideably couple the driven shaft 5814 to the housing 5810.

[00254] In the example illustrated by Figures 58-61, the drive member 5812 includes internal threads 5850. The driven shaft 5814 includes an externally threaded portion 5852. The externally threaded portion 5852 mates with the internal threads 5850 to operationally couple the drive member 5812 to the driven shaft 5814. That is, when the drive member 5812 is rotated relative to the housing 5810 as indicated by arrow 5816, the driven shaft 5814 is prevented from rotating due to the linear projection 5842 that fits within the linear recess 5840. As such, rotation of the drive member 5812 in the housing 5810 causes the driven shaft 5814 to linearly slide 5818 along the linear recess 5840 due to the engagement of the externally threaded portion 5852 mates with the internal threads 5850. Since the outer shaft/tube 4910 is connected to the driven shaft 5814 and the inner shaft/tube 4912 is

- 80 -

connected to the housing 5810, the outer shaft/tube 4910 is advanced and retracted relative to the inner shaft/tube 4912 by rotation of the drive member 5812.

[00255] In the example illustrated by Figures 58-61, the outer shaft/tube 4910 is fixedly connected in a recess 5850 in the driven shaft 5814 and an optional seal 5852 is provided between the outer shaft/tube 4910 and the inner shaft/tube 4912 and/or between the outer shaft/tube 4910 and the driven shaft 5814. A luer port 5862 is fixedly connected to the housing 5810, e.g., a proximal end of the housing 5810 as shown. The inner shaft/tube 4912 is fixedly connected in a recess 5860 in the luer port 5862. The luer port 5862 is configured to accept a guide wire 5002 (See Figure 49) that extends through the inner shaft/tube 4912.

[00256] In the example illustrated by Figure 62-67, the handle 6200 includes a housing 6210, a drive wheel 6212, and a driven member 6214. In the illustrated example, rotation of the drive wheel 6212 as indicated by arrow 6216 relative to the housing 6210 moves the driven member 6214 linearly as indicated by arrow 6218 (compare the position of the driven member 6214 in Figures 64A and 64B). Referring to Figure 62, the inner sleeve/tube 4912 is fixedly connected to the housing 6210 and the outer sleeve/tube 4910 is fixedly connected to the driven member 6214. As such, rotating the drive wheel 6212 in a first direction retracts the outer sleeve 4910 relative to the inner sleeve 4910 and rotating the drive wheel 6212 in the opposite direction advances the outer sleeve/tube 4910 relative to the inner sleeve/tube 4912. Although, in the various embodiments shown in Figures 58-73, the inner sleeve/tube 4912 is shown and described as being connected unmovably relative to the handle or a proximal end of the handle while the outer sleeve/tube 4910 is movable relative to the handle or a proximal end of the handle, in one embodiment using

- 81 -

similar concepts, the inner sleeve/tube 4912 could be moveable relative to the handle or a proximal end of the handle while the outer sleeve/tube 4910 is connected unmovably relative to the handle or a proximal end of the handle, or both the inner sleeve/tube 4912 and outer sleeve/tube 4910 may be configured to be movable relative to each other and relative to the handle or proximal end of the handle.

[00257] In the example illustrated by Figures 62-67, the housing rotatably accepts an axle 6822 of the drive wheel 6212 to rotatably couple the drive wheel to the housing 6210. The drive wheel 6212 includes an engagement portion 6230 that extends from the housing 6210 to allow a user to rotate the drive wheel 6212 relative to the housing 6210.

[00258] In the example illustrated by Figures 62-67, the housing 6210 includes a linear projection 6240 (See Figure 66). The driven member 6214 includes a linear groove 6242 (See Figures 62, 66) that the projection 6240 fits within to slideably couple the driven member 6214 to the housing 6210.

[00259] In the example illustrated by Figures 62-67, the drive member 6212 includes a pinion gear 6250. The driven member 6214 includes a gear rack portion 6252. The pinion gear 6250 meshes with the gear rack portion 6252 to operationally couple the drive wheel 6212 to the driven member 6214. That is, when the drive wheel 6212 is rotated relative to the housing 6210 as indicated by arrow 6216, the driven member 6214 slides relative to the housing 6210 due to the linear projection 6240 that fits within the linear recess 6242. As such, rotation of the drive member 6212 relative to the the housing 6210 causes the pinion gear 6250 to drive the gear rack portion 6252 to cause the driven member 6214 to linearly slide 6218 relative to the housing 6210. Since the outer shaft/tube 4910 is connected to the driven member 6214 and the inner shaft/tube 4912 is connected to the

- 82 -

housing 5810, the outer shaft/tube 4910 is advanced and retracted relative to the inner shaft/tube 4912 by rotation of the drive wheel 6212.

[00260] In the example illustrated by Figures 62-67, the outer shaft/tube 4910 is fixedly connected in a support portion 6250 that extends from the gear rack portion 6252 of the driven member 6214 and an optional seal (not shown) is provided between the outer shaft/tube 4910 and the inner shaft/tube 4912 and/or between the outer shaft/tube 4910 and the driven member 6214. A luer port 5862 is fixedly connected to the housing 6210, e.g., at a proximal end of the housing 6210. The inner shaft/tube 4912 is fixedly connected in a recess 5860 in the luer port 5862. The luer port 5862 is configured to accept a guide wire 5002 (See Figure 49) that extends through the inner shaft/tube 4912.

[00261] Referring to Figure 63, in one exemplary embodiment, the catheter 3600 may be flushed by applying a fluid to the inner tube 4912, such as to the inner tube via the luer port 5862. As is described above, the delivery catheter 3600 includes an outer lumen formed within an outer tube/sleeve 4910 and an inner lumen formed within an inner tube/sleeve 4912, and the inner lumen and inner tube 4912 are longitudinally co-axial with the outer lumen and outer tube 4910. An annular lumen/gap/space 6348 is between the inner tube 4912 and outer tube 4910 that may result from, for example, the need to provide space for a crimped stent to travel through the catheter 3600. This gap/space 6348 can initially be filled with air, which can be subsequently expelled and replaced with a liquid, e.g., a saline solution. Flushing in this way can be done with the various handle embodiments shown in Figures 58-73.

[00262] In one exemplary embodiment, a fluid such as saline or another suitable fluid, flows from the luer port 5862 and through the inner lumen of inner tube 4912 as indicated

- 83 -

by arrow 6360. In this embodiment, the inner tube 4912 is provided with one or more flushing apertures 6354. The fluid flows through the inside of the inner tube 4912, out the apertures 6354 as indicated by arrows 6370 and into the gap/space 6348.

[00263] As the gap/space 6348 fills with fluid, air is pushed out of the delivery catheter through the distal end of the outer tube 4910. In one exemplary embodiment, the nosecone 28 is disengaged from the distal end of the outer tube 4910 to allow the air to flow out of the outer tube and out of the catheter 3600. Fluid also flows through the inner lumen of the inner tube 4912 to push air out of the inner lumen. In one exemplary embodiment, the air is forced out of the inner lumen through the opening 6390 in the end of the nosecone 28 (See Figures 49A and 49B). This flushing procedure is performed before the delivery catheter 3600 is introduced into the body. The device and method of this approach saves space as compared to, for example, providing a side port on the outer tube 4910 for introducing a flushing fluid into the delivery catheter assembly or gap/space 6348.

[00264] Referring to Figures 68-73, in one exemplary embodiment, the handle 6200 illustrated by Figures 62-67 can be provided with a ratchet mechanism 6800. The ratchet mechanism 6800 can take a wide variety of different forms and can be used with the handle 6200 in a variety of different ways. In one exemplary embodiment, the ratchet mechanism 6800 is used during a “recapture” of the docking station 10 to pull it back into the delivery catheter 3600. The force required to recapture the docking station can be significant. As such, the ratchet mechanism 6800 can be configured such that, when the ratchet mechanism is engaged (Figures 68-71), the drive wheel 6212 can only be rotated in the direction that draws the docking station 10 back into the outer tube/sleeve 4910. That

- 84 -

is, the spring force of the docking station 10 is prevented from pulling the docking station back out of the outer tube by the ratchet mechanism 6800. The operator can recapture the docking station 10 sequentially, without the docking station slipping back if the operator lets go of the drive wheel 6212, for instance.

[00265] Referring to Figures 68-71, one exemplary ratchet system uses projections 6810 with stop surfaces 6812 on one side of the projections and ramp surfaces 6814 on the other side of the projections. Figures 68-71 illustrate an engaged condition where a ratchet arm 6892 is positioned to engage with the projections 6810 to permit the wheel drive wheel 6212 to rotate in one direction, and to prevent the drive wheel from turning in the opposite direction. For example, the ratchet arm 6892 may be configured to ride over the ramped surfaces 6814 to allow movement of the drive wheel 6212 in the retracting direction 6850. For example, the ratchet arm 6892 may flex to ride over the inclined ramped surfaces 6814. The stop surfaces 6812 are configured to engage the ratchet arm 6892 and prevent rotation of the drive wheel in the advancing direction 6852. For example, the stop surfaces 6812 may be substantially orthogonal to a side surface 6870 of the drive wheel 6212 to prevent the ratchet arm from moving over the projection 6810.

[00266] Figures 72 and 73 illustrate the ratchet mechanism 6800 with the ratchet arm 6892 moved out of engagement with the projections 6810. This allows the drive wheel 6212 to be turned in either direction. For example, the ratchet mechanism 6800 may be placed in the disengaged condition to allow the drive wheel 6212 to be turned in either direction as the docking station 10 is being deployed.

[00267] In ratchet systems, it is common to place the ratchet teeth on the outer perimeter of the wheel. By putting the teeth on the face of the wheel, the radial diameter of the wheel

- 85 -

can be reduced, saving space. It also allows the outer perimeter of the wheel to be used as a grip for the thumb rather than, for example, having a second wheel for gripping that is in engagement with a first wheel. The wheel itself is also allowed to be thinner. The wheel may be made of any suitable material, such as polycarbonate.

[00268] Referring to Figure 71, in one embodiment the ratchet arm 6892 can be bent so that a portion of the arm can rest on a stabilizing bar 194 extending from a housing wall or otherwise located within the housing, to prevent the arm 6892 from twisting as force from movement of the wheel is applied to the arm.

[00269] The foregoing primarily describes embodiments of docking stations that are self-expanding. But the docking stations and/or delivery devices shown and described herein can be modified for delivery of balloon-expandable and/or mechanically-expandable docking devices, within the scope of the present disclosure. That is to say, delivering balloon-expandable and/or mechanically-expandable docking stations to an implantation location can be performed percutaneously using modified versions of the delivery devices of the present disclosure. In general terms, this includes providing a transcatheter assembly that can include a delivery sheath and/or additional sheaths as described above. In the case of balloon-expandable docking stations, the devices generally further include a delivery catheter, a balloon catheter, and/or a guide wire. A delivery catheter used in a balloon-expandable type of delivery device can define a lumen within which the balloon catheter is received. The balloon catheter, in turn, defines a lumen within which the guide wire is slideably disposed. Further, the balloon catheter includes a balloon that is fluidly connected to an inflation source. With the docking station mounted on the balloon, the transcatheter assembly is delivered through a percutaneous opening in the patient via the

- 86 -

delivery device. Once the docking station is properly positioned, the balloon catheter is operated to inflate the balloon, thus transitioning the docking station to an expanded arrangement.

[00270] In view of the many possible embodiments to which the principles of the disclosed invention may be applied, it should be recognized that the illustrated embodiments are only preferred examples of the invention and should not be taken as limiting the scope of the invention. All combinations or subcombinations of features of the foregoing exemplary embodiments are contemplated by this application. The scope of the invention is defined by the following claims. We therefore claim as our invention all that comes within the scope and spirit of these claims.

- 87 -

Claims

1. An expandable docking station for an expandable valve comprising:

a valve seat that is substantially unexpandable beyond a deployed size;

one or more sealing portions connected to the valve seat that are constructed to expand radially outward of the valve seat and provide a seal over a range of sizes; and

one or more retaining portions connected to the one or more sealing portions that are configured to retain the docking station at a deployed position.
2. The expandable docking station of claim 1 wherein the valve seat is not expanded radially outwardly by a radially outward force of an expandable valve.
3. The expandable docking station of any of claims 1-2 wherein the range of sizes comprises 27mm to 38mm.
4. The expandable docking station of any of claims 1-3 wherein the docking station is configured to expand radially outwardly to varying degrees along its length L.
5. The expandable docking station of any of claims 1-4 wherein the valve seat and the one or more sealing portions act as an isolator that reduces or prevents radial outward forces of an expandable valve in the valve seat from being transferred to the one or more sealing portions or the one or more retaining portions.
6. The expandable docking station of any of claims 1-5 wherein the docking station is configured such that pressure of blood enhances the retention by the retaining portions.
7. The expandable docking station of any of claims 1-6 wherein the one or more retaining portions are configured such that force applied by at least one of the one or more

- 88 -

retaining portions at the deployed position is in proportion to the pressure of blood acting on the docking station.

8. The expandable docking station of any of claims 1-7 wherein the one or more retaining portions are configured such that force applied by at least one of the one or more retaining portions is greater when the heart is in a diastolic phase than when the heart is in the systolic phase.

9. The expandable docking station of any of claims 1-8 wherein the valve seat is formed by a suture.

10. The expandable docking station of any of claims 1-9 wherein the sealing portion comprises a portion of a metal frame covered with a fabric.

11. The expandable docking station of any of claims 1-10 wherein the sealing portion comprises an open cell foam.

12. The expandable docking station of any of claims 1-11 wherein a portion of the docking station is permeable to blood and a portion of the docking station is impermeable to blood.

13. The expandable docking station of claim 11 or 12 wherein the portion of the docking station that is impermeable to blood extends from at least the valve seat to at least the sealing portion.

14. The expandable docking station of any of claims 1-13 wherein the docking station is adjustable in length.

- 89 -

15. The expandable docking station of claim 14 wherein the docking station includes a first half that a second half of the docking station can adjustably extend into to adjust the length.

16. The expandable docking station of any of claims 1-15 wherein the one or more retaining portions extend radially outward of the one or more sealing portions when the docking station is in an unconstrained state.

17. A system comprising:

an expandable docking station that includes:

a valve seat that expands to a deployed size;

one or more sealing portions connected to the valve seat that are constructed to expand radially outward of the valve seat and provide a seal over a range of sizes of expansion; and

one or more retaining portions connected to the one or more sealing portions that are configured to retain the docking station at a deployed position;

an expandable valve that comprises:

an expandable frame that is expandable to engage the valve seat of the docking station;

a valve element connected to the expandable frame;

wherein the expandable docking station and expandable valve are configured such that, when implanted in a portion of a circulatory system, a radial outward force applied by the sealing portions to the portion of the circulatory system when within the range of sizes

- 90 -

is less than $\frac{1}{2}$ of a radial outward force applied by the expandable frame to the valve seat.

18. The system of claim 17 wherein the expandable docking station is configured such that, when implanted in the portion of the circulatory system, the diameter of the valve seat is not increased more than 3mm by the radial outward force applied by the expandable frame to the valve seat.

19. The system of any of claims 17-18 wherein the range of sizes comprises 27mm to 38mm.

20. The system of any of claims 17-19 wherein the expandable docking station is configured to expand radially outwardly to varying degrees along its length L when implanted in the portion of the circulatory system.

21. The system of any of claims 17-20 wherein the expandable docking station is configured such that, when implanted in the portion of the circulatory system, pressure of blood on the expandable docking station enhances retention by the retaining portions.

22. The system of any of claims 17-21 wherein the expandable docking station is configured such that force applied by the retaining portions, when implanted in the portion of the circulatory system, is in proportion to the pressure of blood acting on the system.

23. The system of any of claims 17-22 wherein the expandable docking station is configured such that force applied by the retaining portions, when implanted in the portion of the circulatory system, is greater when the heart is in a diastolic phase than when the heart is in the systolic phase.

24. The system of any of claims 17-23 wherein the valve seat is formed by a suture.

- 91 -

25. The system of any of claims 17-24 wherein the sealing portion comprises a portion of a metal frame covered with a fabric.
26. The system of any of claims 17-25 wherein the sealing portion comprises an open cell foam.
27. The system of any of claims 17-26 wherein a portion of the docking station is permeable to blood and a portion of the docking station is impermeable to blood.
28. The system of claim 27 wherein the portion of the docking station that is impermeable to blood extends from at least the valve seat to at least the sealing portion.
29. The system of any of claims 17-28 wherein the docking station has an overall length that is adjustable.
30. The system of claim 29 wherein the docking station includes a first half that a second half of the docking station can adjustably extend into to adjust the overall length.
31. The system of any of claims 17-30 wherein the one or more retaining portions extend radially outward of the one or more sealing portion when the docking station is in an unconstrained state.
32. A method of implanting an expandable valve in a docking station comprising:
- expanding a docking station such that a valve seat of the docking station expands to a valve seat deployed size and a sealing portion expands to a sealing size that is within a range of sealing sizes;
- expanding a frame of an expandable valve to engage the valve seat of the docking station; and

- 92 -

wherein a radial outward force applied by the sealing portions over the range of sealing sizes is less than $\frac{1}{2}$ of a radial outward force applied by the expandable frame to the valve seat after expanding the frame.

33. The method of claim 32 wherein a diameter of the valve seat is not increased more than 2mm by the radial outward force applied by the expandable frame to the valve seat.

34. The method of any of claims 32-33 wherein the range of sealing sizes comprises 27mm to 38mm.

35. The method of any of claims 32-34 wherein the valve seat is formed by a suture.

36. A system comprising:

an expandable docking station that includes:

a valve seat that expands to a deployed size;

one or more sealing portions connected to the valve seat that are constructed to expand radially outward of the valve seat and provide a seal over a range of sizes of expansion; and

one or more retaining portions connected to the one or more sealing portions that are configured to retain the docking station at a deployed position;

an expandable valve that comprises:

an expandable frame that is expandable to engage the valve seat of the docking station;

a valve element connected to the expandable frame;

- 93 -

wherein a pressure of blood acting on the valve and docking station enhances retention by the retaining portions at the deployed position.

37. The system of claim 36 wherein the valve seat is not substantially expanded radially outwardly by a radially outward force of the expandable valve.

38. The system of any of claims 36-37 wherein the range of sizes comprises 27mm to 38mm.

39. The system of any of claims 36-38 wherein the docking station is configured to expand radially outwardly to varying degrees along its length L.

40. The system of any of claims 36-39 wherein force applied by the retaining portions is in proportion to the pressure of blood acting on the system.

41. The system of any of claims 36-40 wherein force applied by the retaining portions is greater when the heart is in a diastolic phase than when the heart is in the systolic phase.

42. The system of any of claims 36-41 wherein the valve seat is formed by a suture.

43. The system of any of claims 36-42 wherein the sealing portion comprises a portion of a metal frame covered with a fabric.

44. The system of any of claims 36-43 wherein the sealing portion comprises an open cell foam.

45. The system of any of claims 36-44 wherein a portion of the docking station is permeable to blood and a portion of the docking station is impermeable to blood.

46. The system of claim 45 wherein a the portion that is impermeable to blood extends from at least the valve seat to at least the sealing portion.

- 94 -

47. The system of any of claims 36-46 wherein the docking station is adjustable in length.

48. The system of claim 47 wherein the docking station includes a first half that a second half extends into.

49. The system of any of claims 36-48 wherein the one or more retaining portions extend radially outward of the one or more sealing portion when the docking station is in an unconstrained state.

50. A method of installing an expandable valve in a docking station comprising:

expanding a docking station such that a valve seat of the docking station expands to a valve seat deployed size and a sealing portion expands to a sealing size in a predetermined range of sizes;

expanding a frame of an expandable valve to engage the valve seat of the docking station; and

wherein a pressure of blood acting on the valve and docking station enhances retention by the retaining portions at the deployed position.

51. The method of claim 50 wherein the valve seat is not substantially expanded radially outwardly by a radially outward force of an expandable valve.

52. The method of any of claims 50-51 wherein the predetermined range of sizes comprises 27mm to 38mm.

53. The method of any of claims 50-52 wherein the valve seat is formed by a suture.

54. An expandable docking station for an expandable valve comprising:

- 95 -

a valve seat that is expandable to a deployed size;

one or more sealing portions connected to the valve seat that extend radially outward of the valve seat, wherein the one or more sealing portions are constructed to expand outward of the valve seat and provide a seal over a range of sizes; and

wherein a length of the docking station is adjustable.

55. The expandable docking station of claim 54 wherein the docking station includes a first half that a second half extends into.

56. The expandable docking station of any of claims 54-55 wherein the valve seat is not substantially expanded radially outwardly by a radially outward force of an expandable valve.

57. The expandable docking station of any of claims 54-56 wherein the range of sizes comprises 27mm to 38mm.

58. The expandable docking station of any of claims 54-57 wherein the docking station is configured to expand radially outwardly to varying degrees along its length L.

59. The expandable docking station of any of claims 54-58 wherein the valve seat and the one or more sealing portions act as an isolator that substantially prevents radial outward forces of an expandable valve from being transferred to the one or more sealing portions.

60. The expandable docking station of any of claims 54-59 wherein the valve seat is formed by a suture.

- 96 -

61. The expandable docking station of any of claims 54-60 wherein the sealing portion comprises a portion of a metal frame covered with a fabric.

62. The expandable docking station of any of claims 54-61 wherein the sealing portion comprises an open cell foam.

63. The expandable docking station of any of claims 54-62 wherein a portion of the docking station is permeable to blood and a portion of the docking station is impermeable to blood.

64. A system comprising:

an expandable docking station that includes:

a valve seat that expands to a deployed size;

one or more sealing portions connected to the valve seat that are constructed to expand radially outward of the valve seat and provide a seal over a range of sizes of expansion; and

wherein a length of the docking station is adjustable;

an expandable valve that comprises:

an expandable frame that is expandable to engage the valve seat of the docking station;

a valve element connected to the expandable frame.

65. A system as is claim 64 wherein the docking station includes a first half that a second half extends into.

- 97 -

66. The system of any of claims 64-65 wherein the valve seat is not substantially expanded radially outwardly by a radially outward force of the expandable valve.
67. The system of any of claims 64-66 wherein the range of sizes comprises 27mm to 38mm.
68. The system of any of claims 64-67 wherein the docking station is configured to expand radially outwardly to varying degrees along its length L.
69. The system of any of claims 64-68 wherein the valve seat is formed by a suture.
70. The system of any of claims 64-69 wherein the sealing portion comprises a portion of a metal frame covered with a fabric.
71. The system of any of claims 64-70 wherein the sealing portion comprises an open cell foam.
72. The system of any of claims 64-71 wherein a portion of the docking station is permeable to blood and a portion of the docking station is impermeable to blood.
73. A method of installing an expandable valve in a docking station comprising:
- expanding a first docking station half;
 - positioning a portion of a second docking station half in the first docking station half;
 - expanding the second docking station half in the first docking station half to set a length of the docking station;
 - wherein the docking station has a valve seat and a sealing portion;

- 98 -

expanding a frame of an expandable valve to engage the valve seat of the docking station.

74. The method of claim 73 wherein the valve seat is not substantially expanded radially outwardly by a radially outward force of an expandable valve.

75. The method of any of claims 73-74 wherein a sealing portion has a predetermined range of sizes that comprises 27mm to 38mm.

76. The method of any of claims 73-75 wherein the valve seat is formed by a suture.

77. A delivery catheter comprising:

an outer tube having a distal opening, and

an inner tube disposed in the outer tube such that a gap is formed between the inner tube and the outer tube, wherein the inner tube has an opening at a proximal end and one or more side openings, and

wherein the delivery catheter is configured such that injecting flushing liquid into the proximal end of the inner tube flushes the flushing liquid through the inner tube with at least some of the flushing liquid exiting the inner tube through the one or more side openings to fill the gap and flush air out the distal opening of the outer tube.

78. A delivery catheter as in claim 77 wherein the inner tube has a distal opening and the delivery catheter is configured such that the filling of the inner tube with the flushing liquid at the proximal end flushes the air out of the distal opening of the inner tube.

79. A delivery catheter as in claim 78 wherein the inner tube is fillable with the flushing liquid at an opening for a guide wire at the proximal end of the inner tube.

- 99 -

80. A delivery catheter as in claim 78 wherein the delivery catheter is configured such that the air in the inner tube can be flushed out through the distal opening of the inner tube and through an opening in a nosecone that is connected to the inner tube.

81. A delivery catheter as in claim 79 wherein the delivery catheter is configured such that the air in the inner tube can be flushed out through the distal opening of the inner tube and through an opening in a nosecone that is connected to the inner tube.

82. A method of flushing air from a delivery catheter comprising an outer tube having a distal opening, an inner tube that has a proximal opening at a proximal end of the inner tube and one or more side openings, and a gap formed in between the inner tube and the outer tube, the method comprising:

injecting flushing liquid into the proximal end of the inner tube, such that the flushing liquid flows through the inner tube and at least some of the flushing liquid exits the inner tube through the one or more side openings to fill the gap and flush air out the distal opening of the outer tube.

83. The method of claim 82 wherein the inner tube has a distal opening and the method further comprises filling the inner tube with the flushing through the proximal opening, wherein the proximal opening can also be used for passing a guide wire through the delivery catheter.

84. The method of claim 83 wherein air in the inner tube is flushed out through the distal opening of the inner tube and through an opening in a nosecone that is connected to the inner tube.

85. The method of any of claims 82-84 further comprising the step of inserting the delivery catheter into a blood vessel after the air has been flushed out.

86. A catheter and docking station system comprising:

a sleeve:

- 100 -

a docking station retainer disposed in the sleeve, wherein the docking station retainer includes one or more retainer recesses;

a docking station disposed in the sleeve, wherein the docking station includes one or more extensions releasably attached to the docking station retainer, wherein each extension of the one or more extensions includes a head disposed in at least one of the one or more retainer recesses;

wherein each extension of the one or more docking extensions contacts the docking station retainer at only two points.

87. The system of claim 86 wherein the head is triangular.

88. The system of any of claims 86-87 wherein the one or more extensions consist of two extensions.

89. The system of any of claims 86-88 wherein the one or more retainer recesses comprise a rectangular recess in the docking station retainer.

90. The system of any of claims 86-89 wherein sides of the head extend away from one another at an angle of between 60 degrees and 120 degrees.

91. The system of any of claims 86-90 wherein the sleeve engages the one or more extensions to retain the one or more heads in the retainer recess when the sleeve is positioned over the one or more extensions.

92. The system of claim 91 wherein the one or more extensions spring radially outward relative to the docking station retainer when unconstrained by the sleeve to release the one or more extensions from the docking station retainer.

- 101 -

93. The system of any of claims 86-92 wherein the one or more extensions are tiltable in the one or more recesses.

94. A method of using a docking station comprising:

placing a head of a docking station extension in a recess of a docking station retainer, wherein the docking station extension contacts the docking station retainer at only two points;

placing the docking station and the docking station retainer in a sleeve, wherein the sleeve engages the docking station extension to retain the head of the docking station extension in the recess.

95. The method of claim 94 wherein the head is triangular.

96. The method of any of claims 94-95 wherein the recess comprises a rectangular recess in the docking station retainer.

97. The method of any of claims 94-96 wherein sides of the head extend away from one another at an angle of between 60 degrees and 120 degrees.

98. The method of any of claims 94-97 further comprising removing the retainer and the docking station from the sleeve such that the head of the docking station extension springs radially outward relative to the docking station retainer to release the docking station extension from the docking station retainer.

99. The method of any of claims 94-98 further comprising tilting the extension in the recess.

- 102 -

100. An system for deploying a docking station comprising:

a handle that includes:

a housing:

a drive member rotatably coupled to the housing; and

a driven member coupled to the drive member and the housing, such that rotation of the drive member moves the driven member linearly in the housing;

a catheter that includes:

an outer sleeve fixedly connected to the driven member; and

an inner sleeve disposed in the outer sleeve and fixedly connected to the housing;

wherein rotation of the drive member moves the outer sleeve relative to the inner sleeve.

101. The system of claim 100 wherein the drive member comprises a wheel having a gear portion.

102. The system of any of claims 100-101 wherein the drive member comprises an internally threaded member.

103. The system of any of claims 100-102 wherein the driven member comprises a gear rack.

104. The system of any of claims 100-103 wherein the driven member comprises an externally threaded member.

- 103 -

105. The system of any of claims 100-104 further comprising a ratchet mechanism that is moveable from an engaged position to a disengaged position, wherein when the ratchet is in the engaged position the drive member is able to be rotated in only one direction.

106. The system of any of claims 100-105 further comprising a luer port fixed to the inner sleeve, wherein the luer port and the inner sleeve are configured to accept a guide wire that extends through the inner shaft.

107. A method of deploying a docking station comprising:

rotating a drive member relative to a housing to linearly move a driven member in the housing;

wherein an inner sleeve is fixed to the housing and an outer sleeve is fixed to the driven member such that the rotation of the drive member moves the outer sleeve relative to the inner sleeve.

108. The method of claim 107 wherein the drive member linearly moves the driven member by engagement of gear teeth.

109. The method of any of claims 107-108 wherein the drive member linearly moves the driven member by engagement of threads.

110. The method of any of claims 107 further comprising only allowing the drive member to be rotated in one direction.

111. The method of any of claims 107 further comprising moving the first and second sleeves over a guide wire.

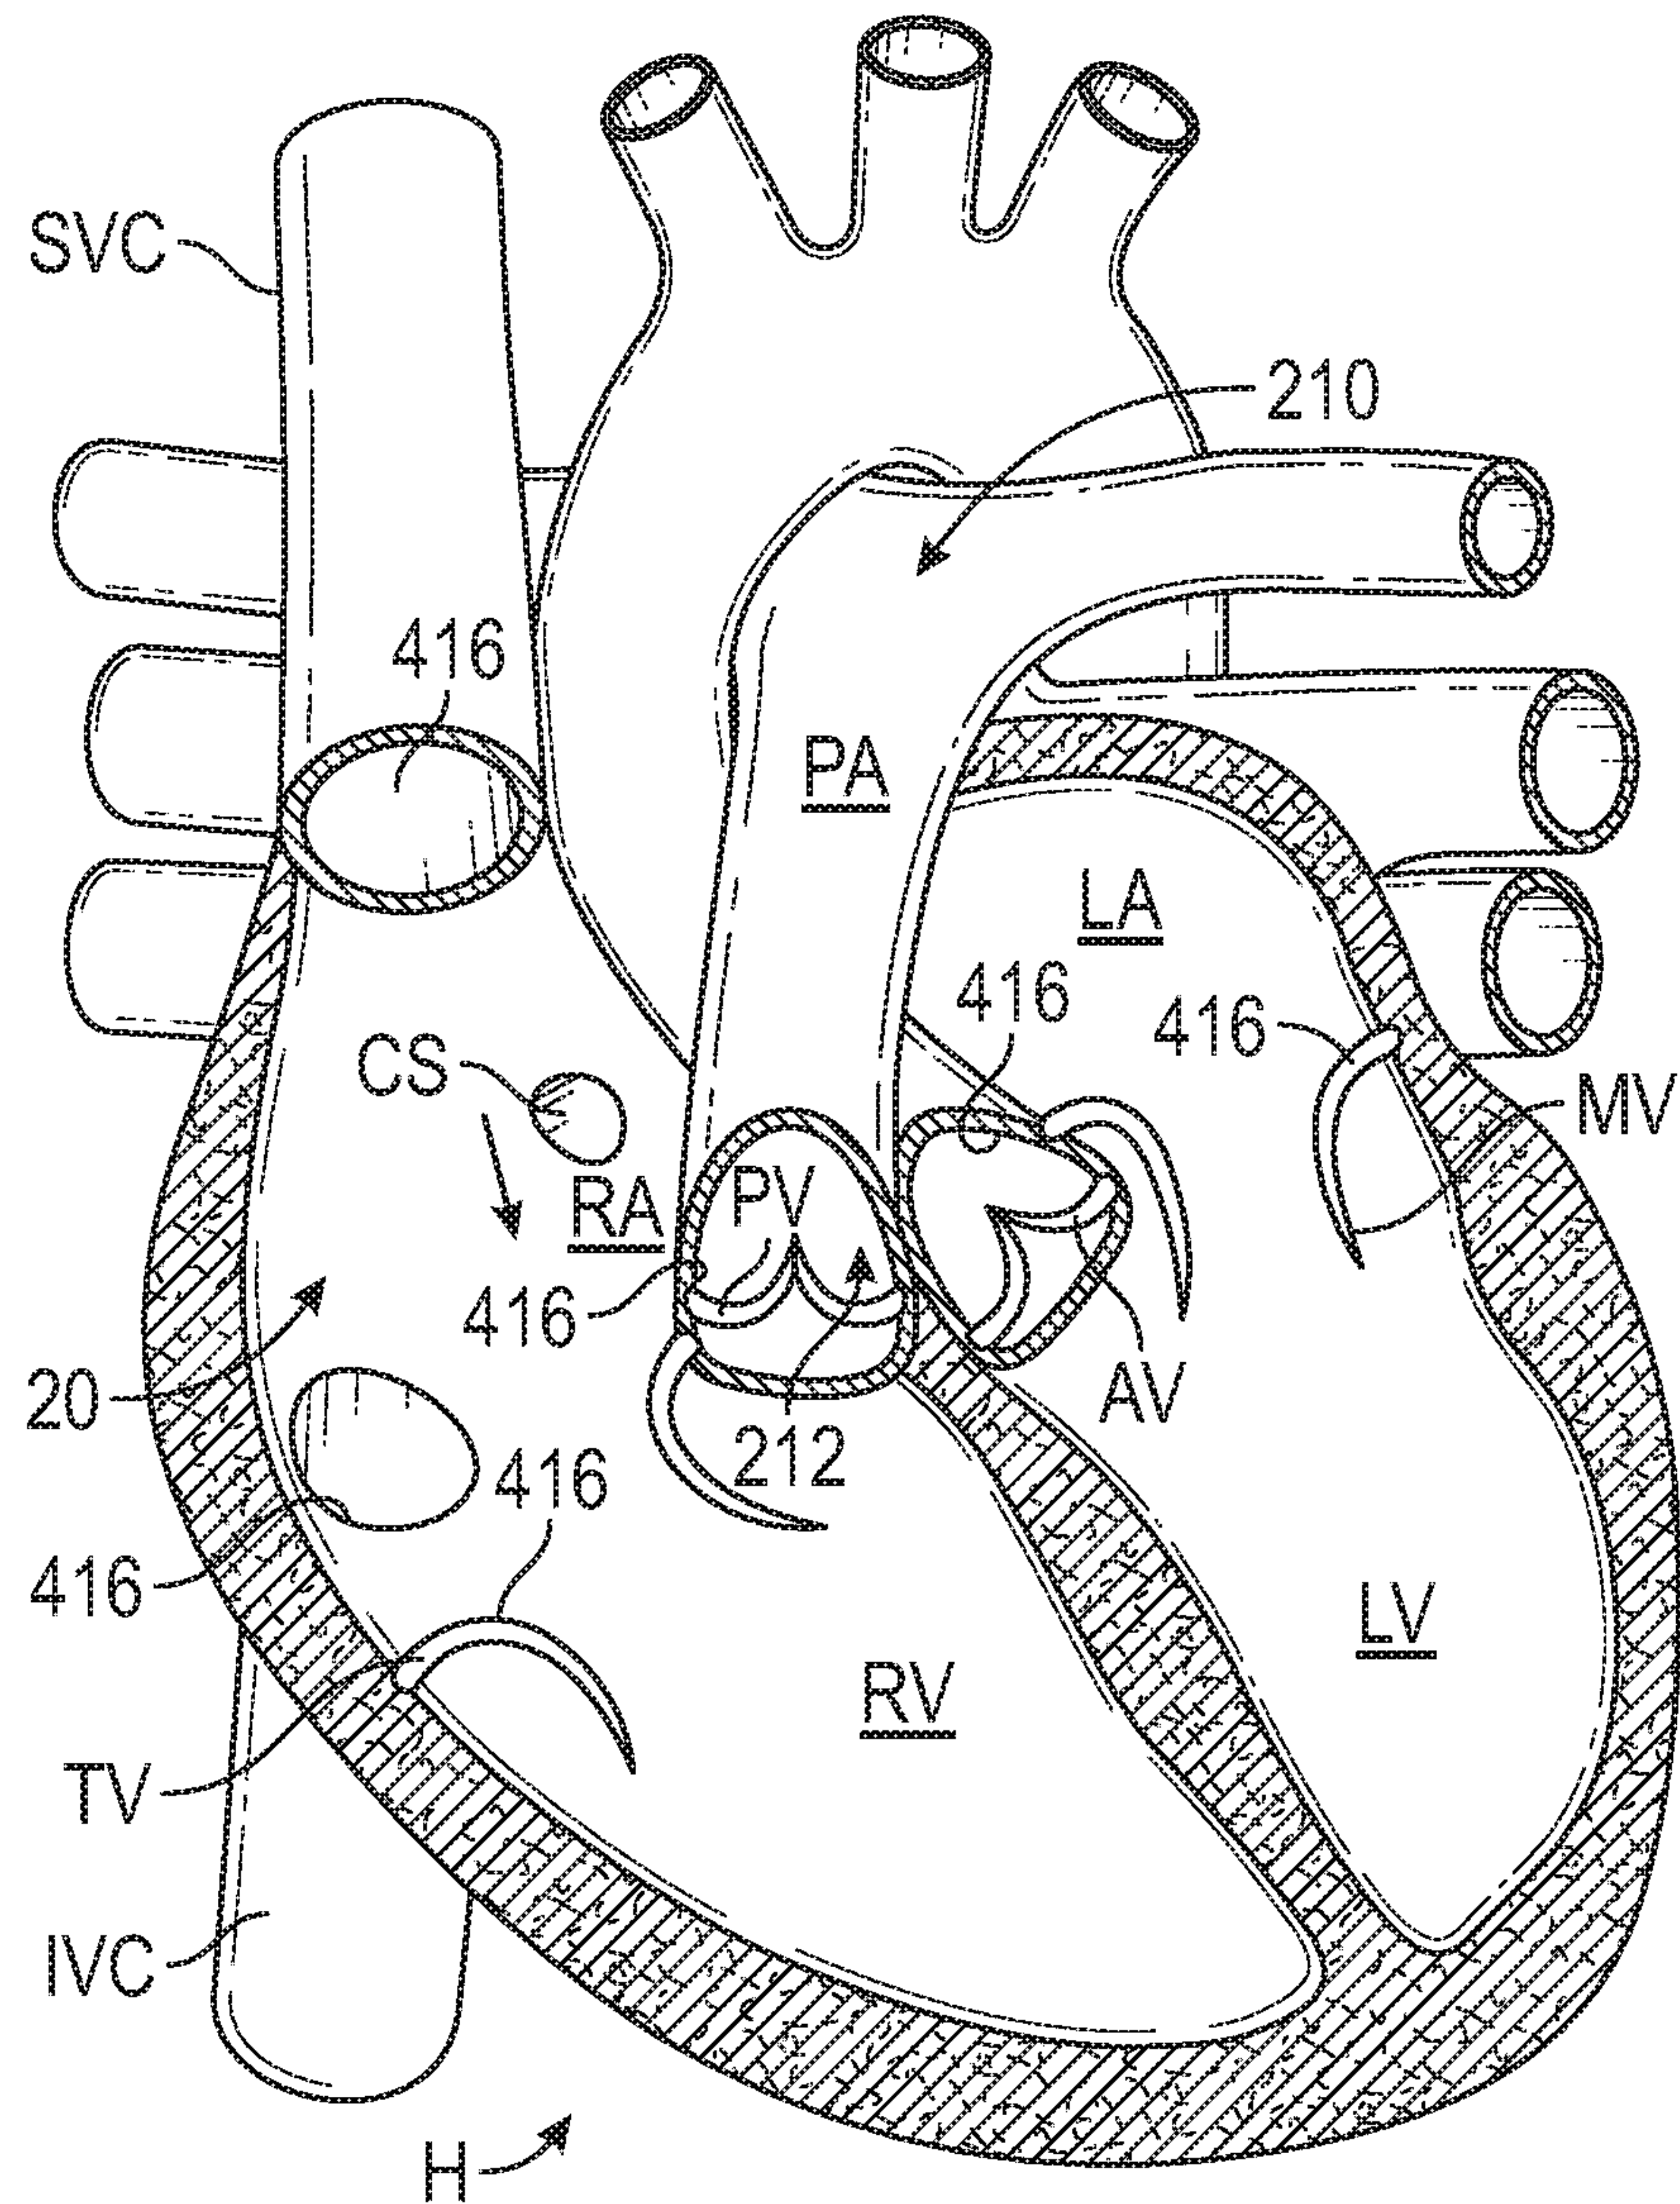


FIG. 1A

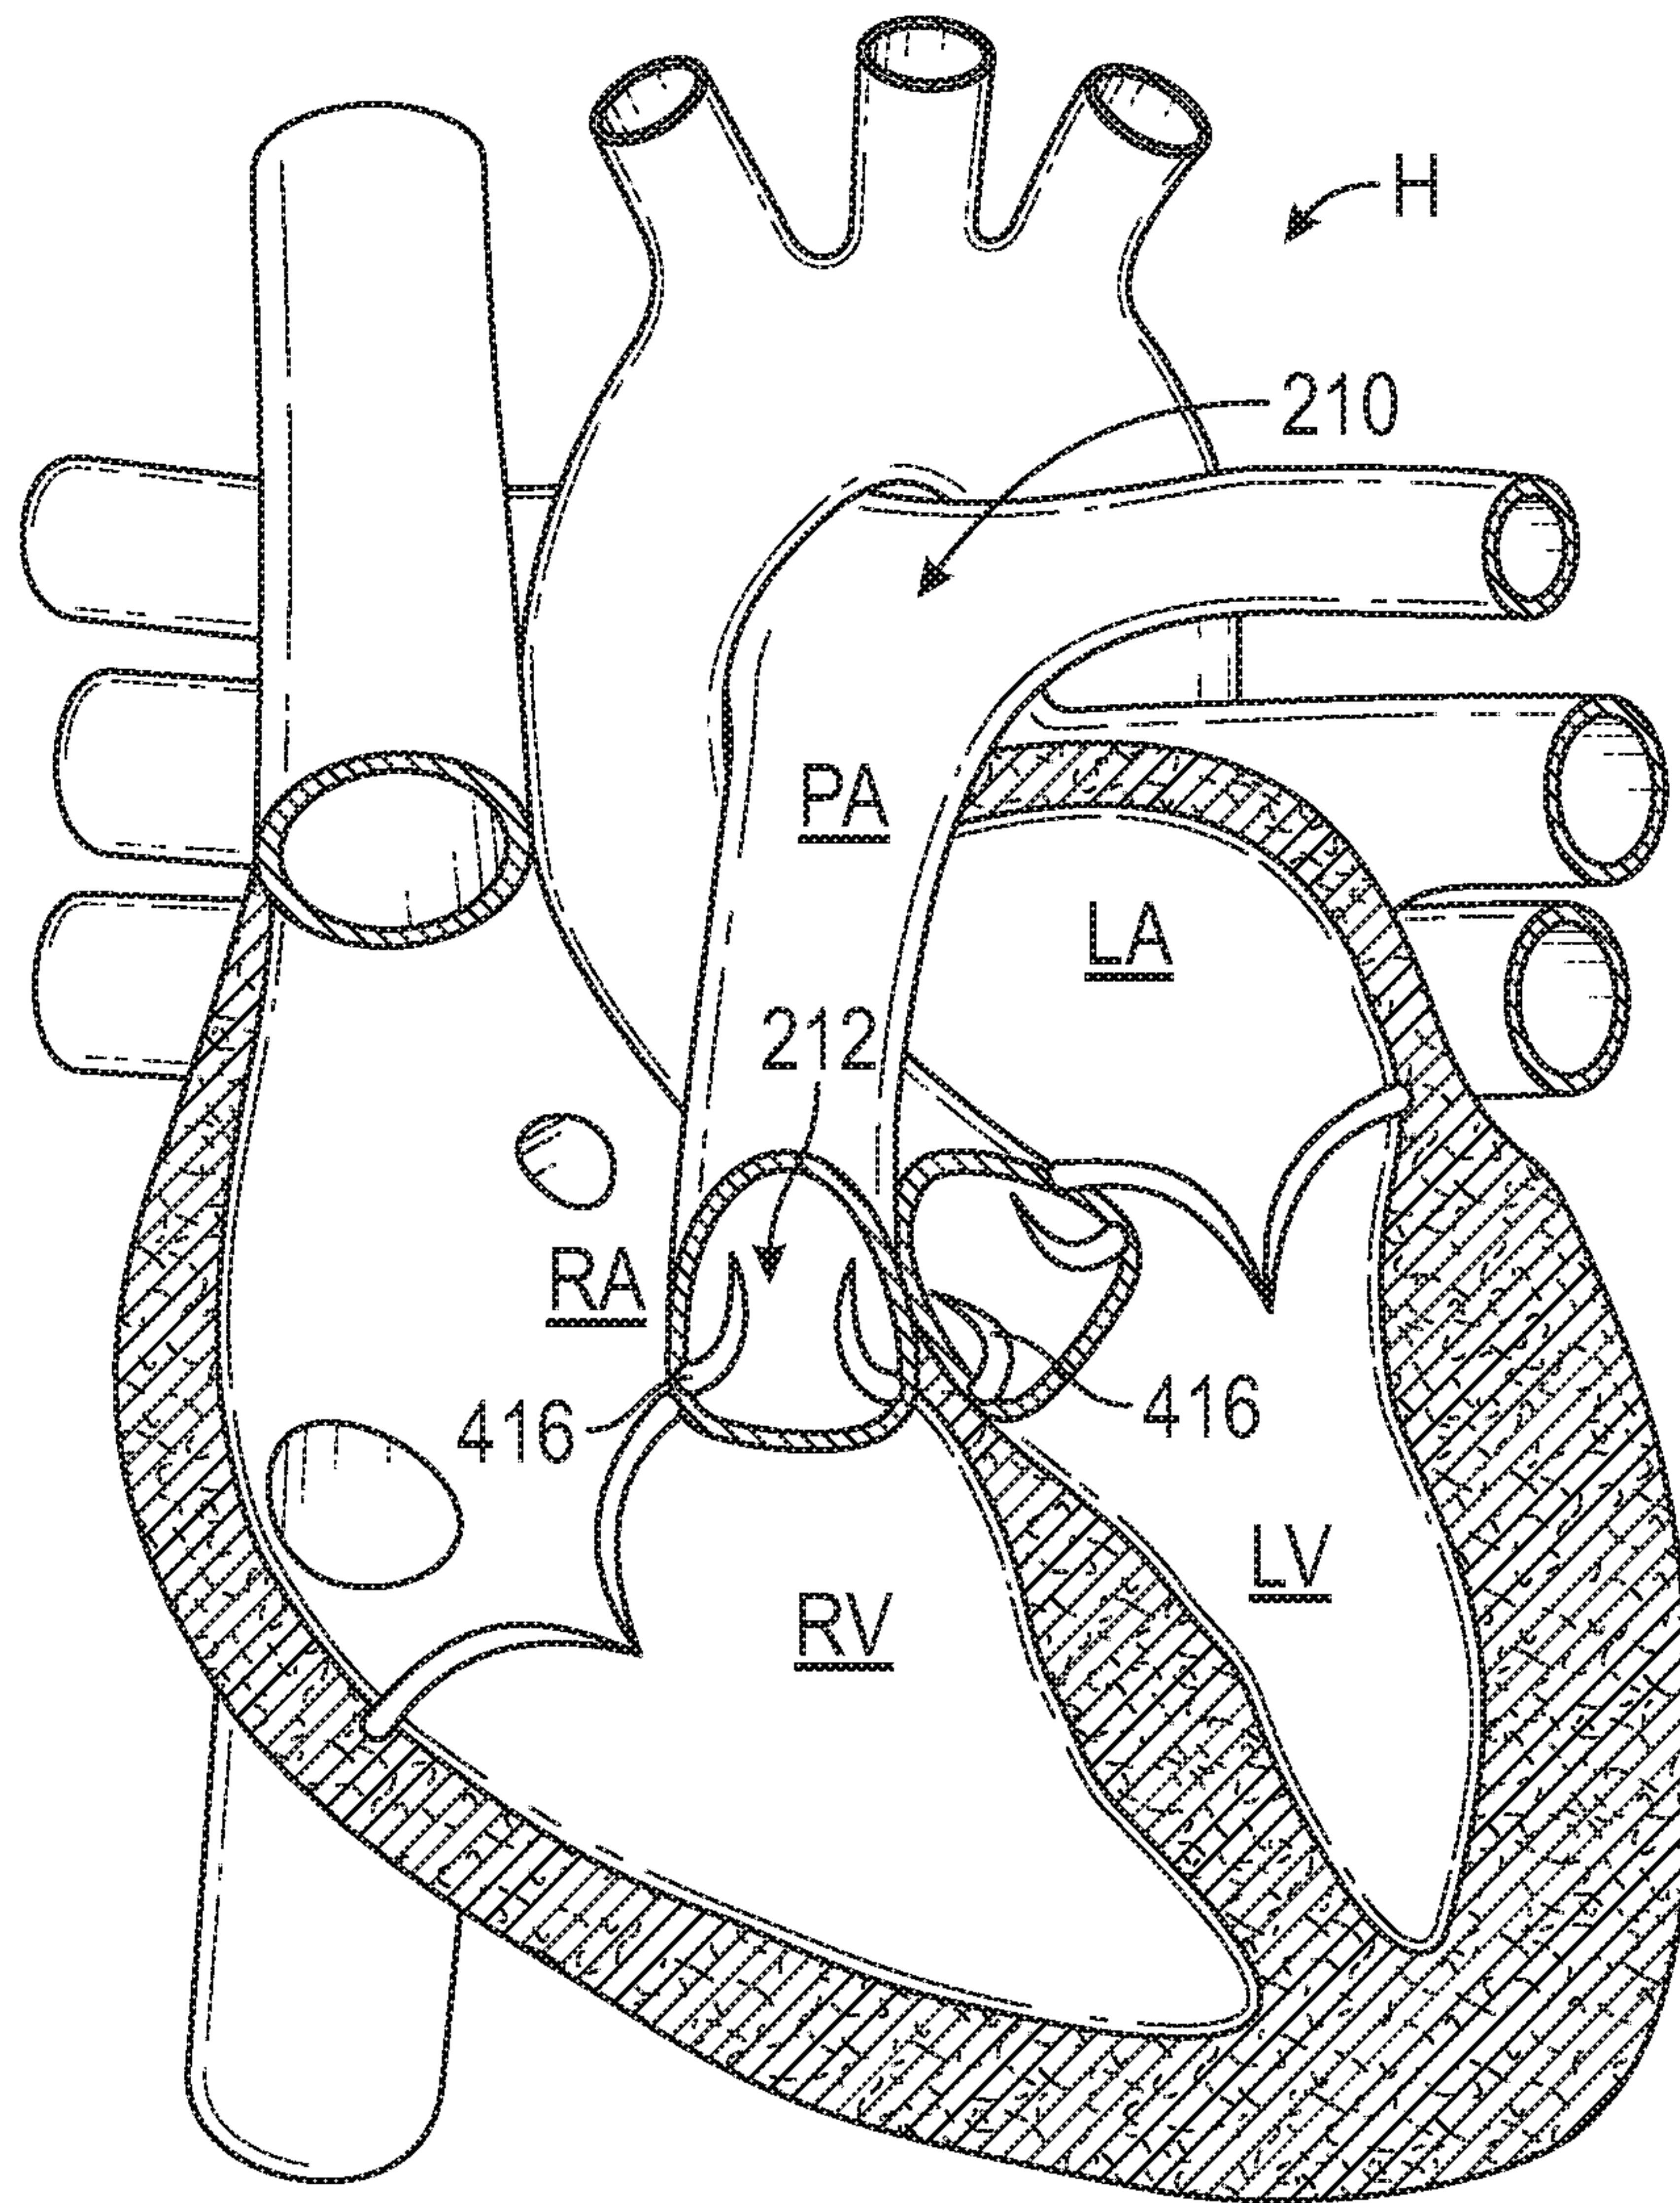


FIG. 1B

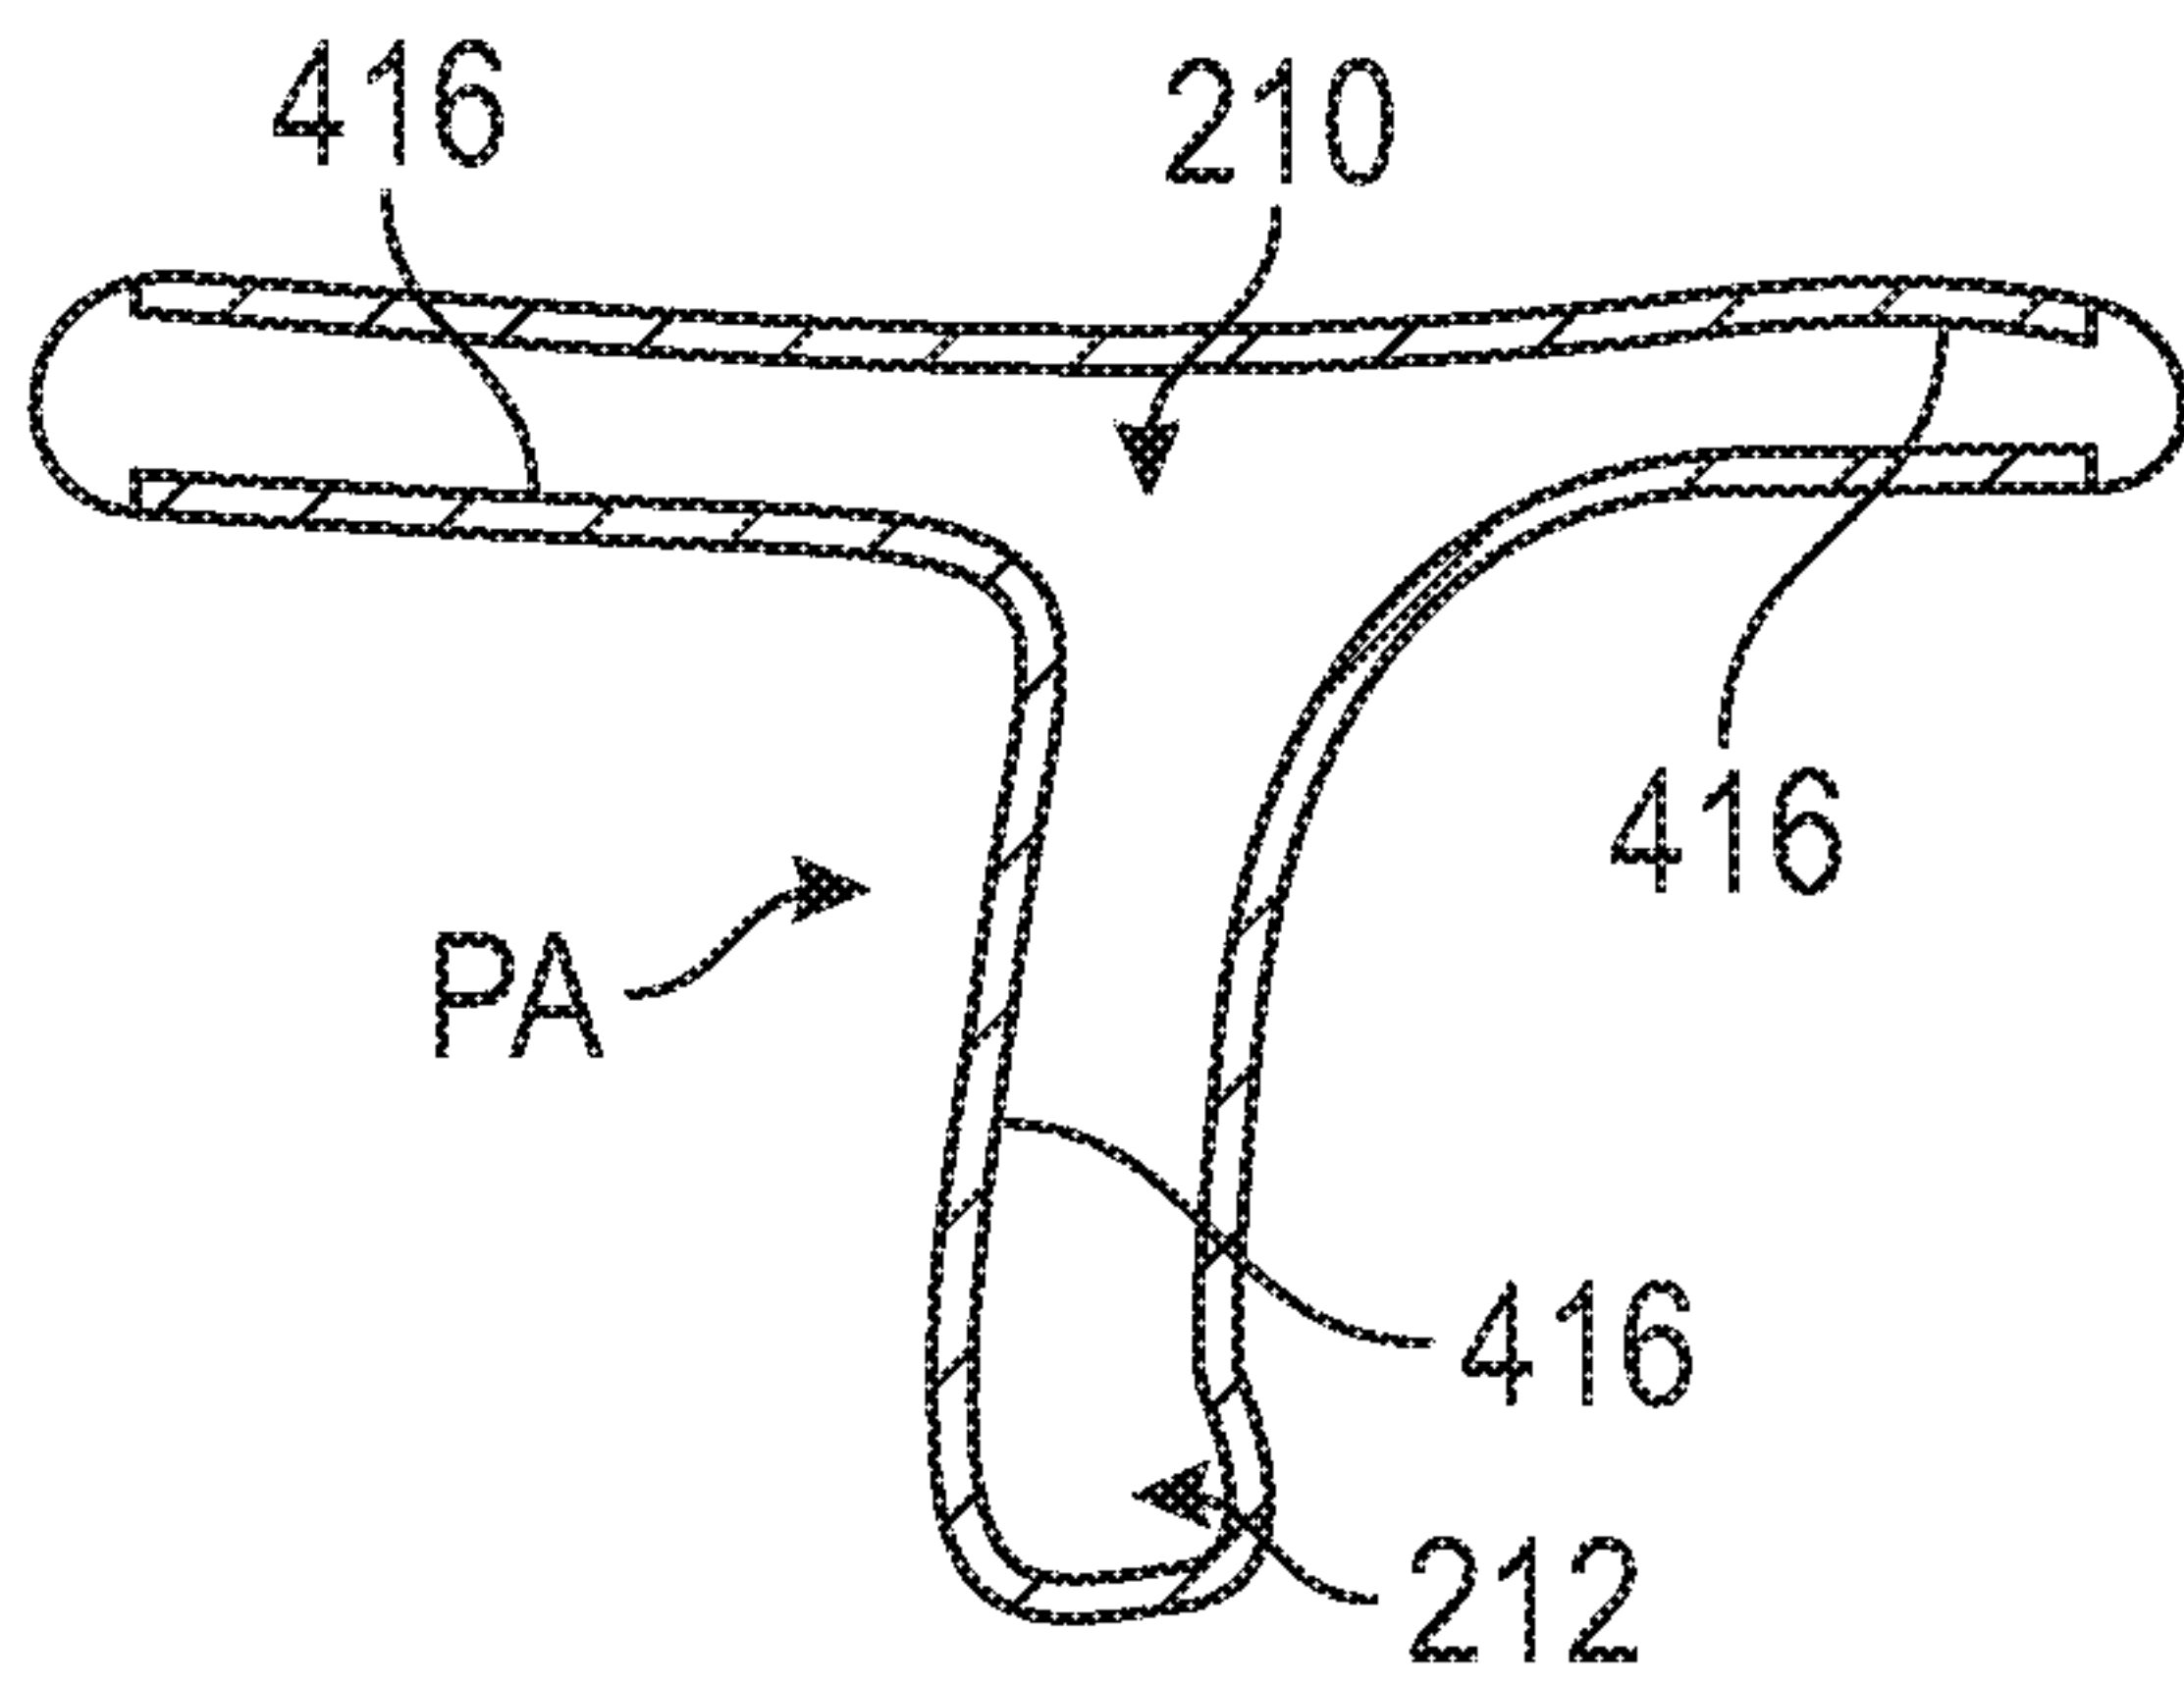


FIG. 2A

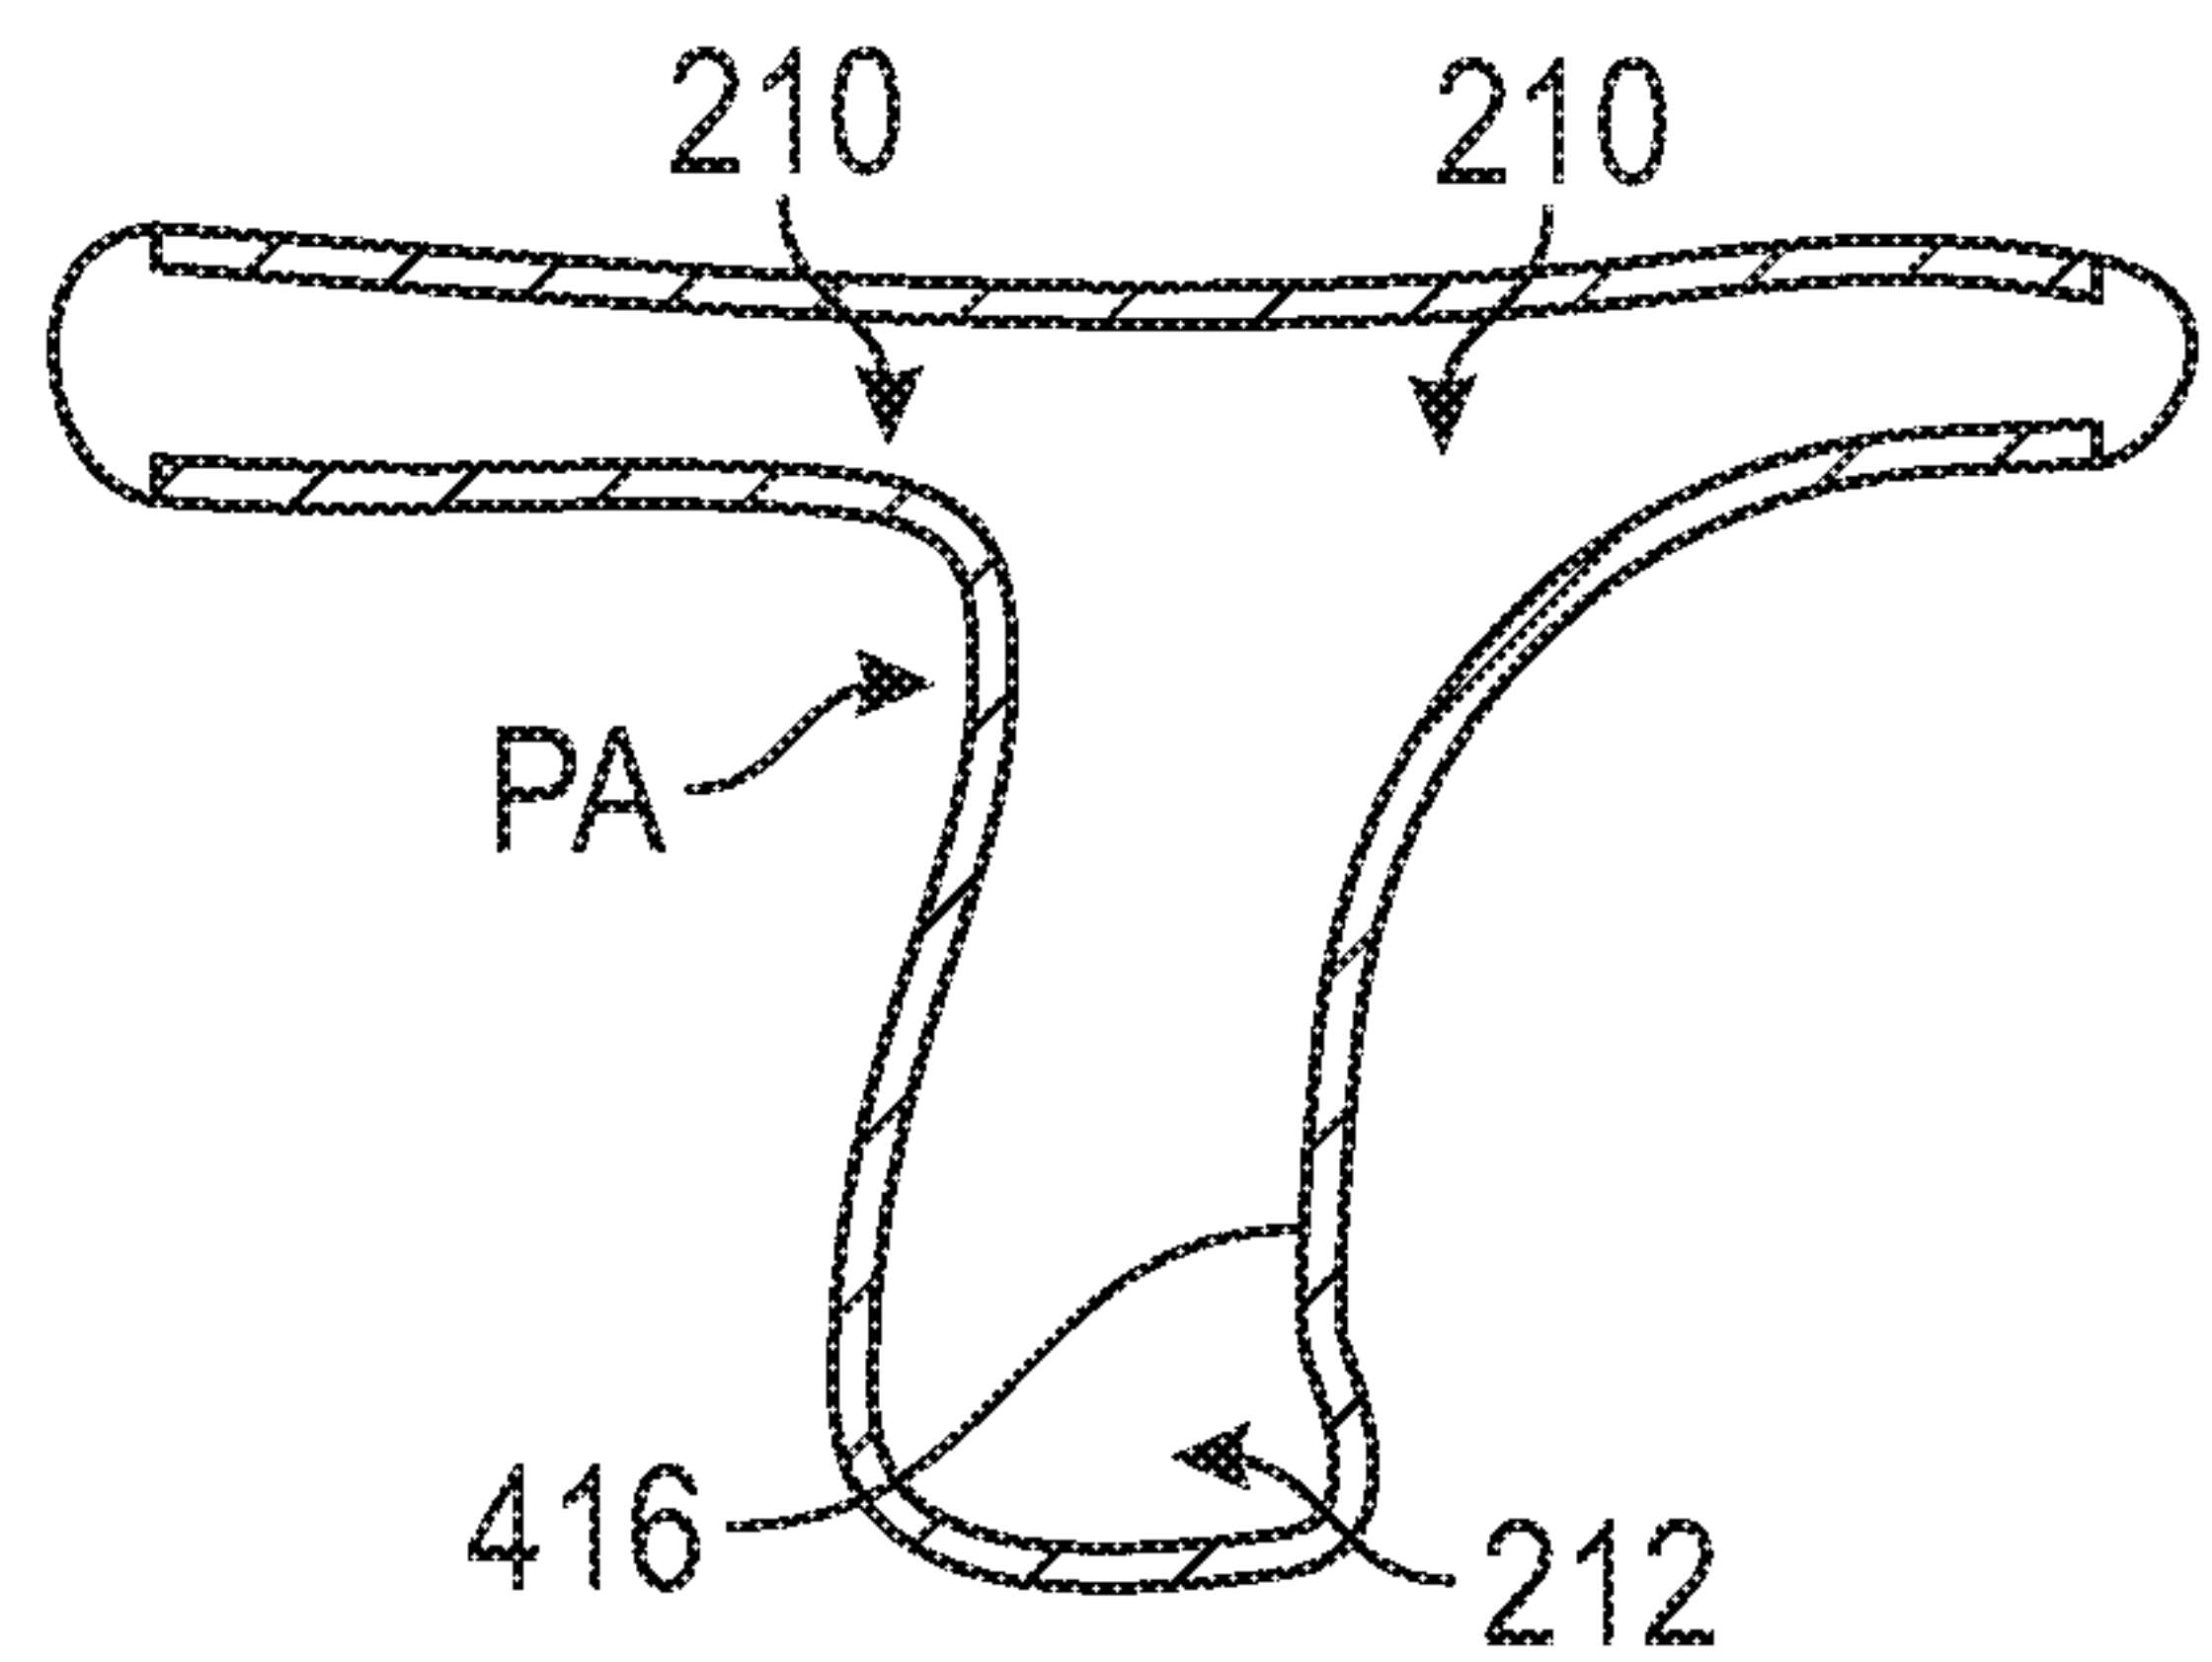


FIG. 2B

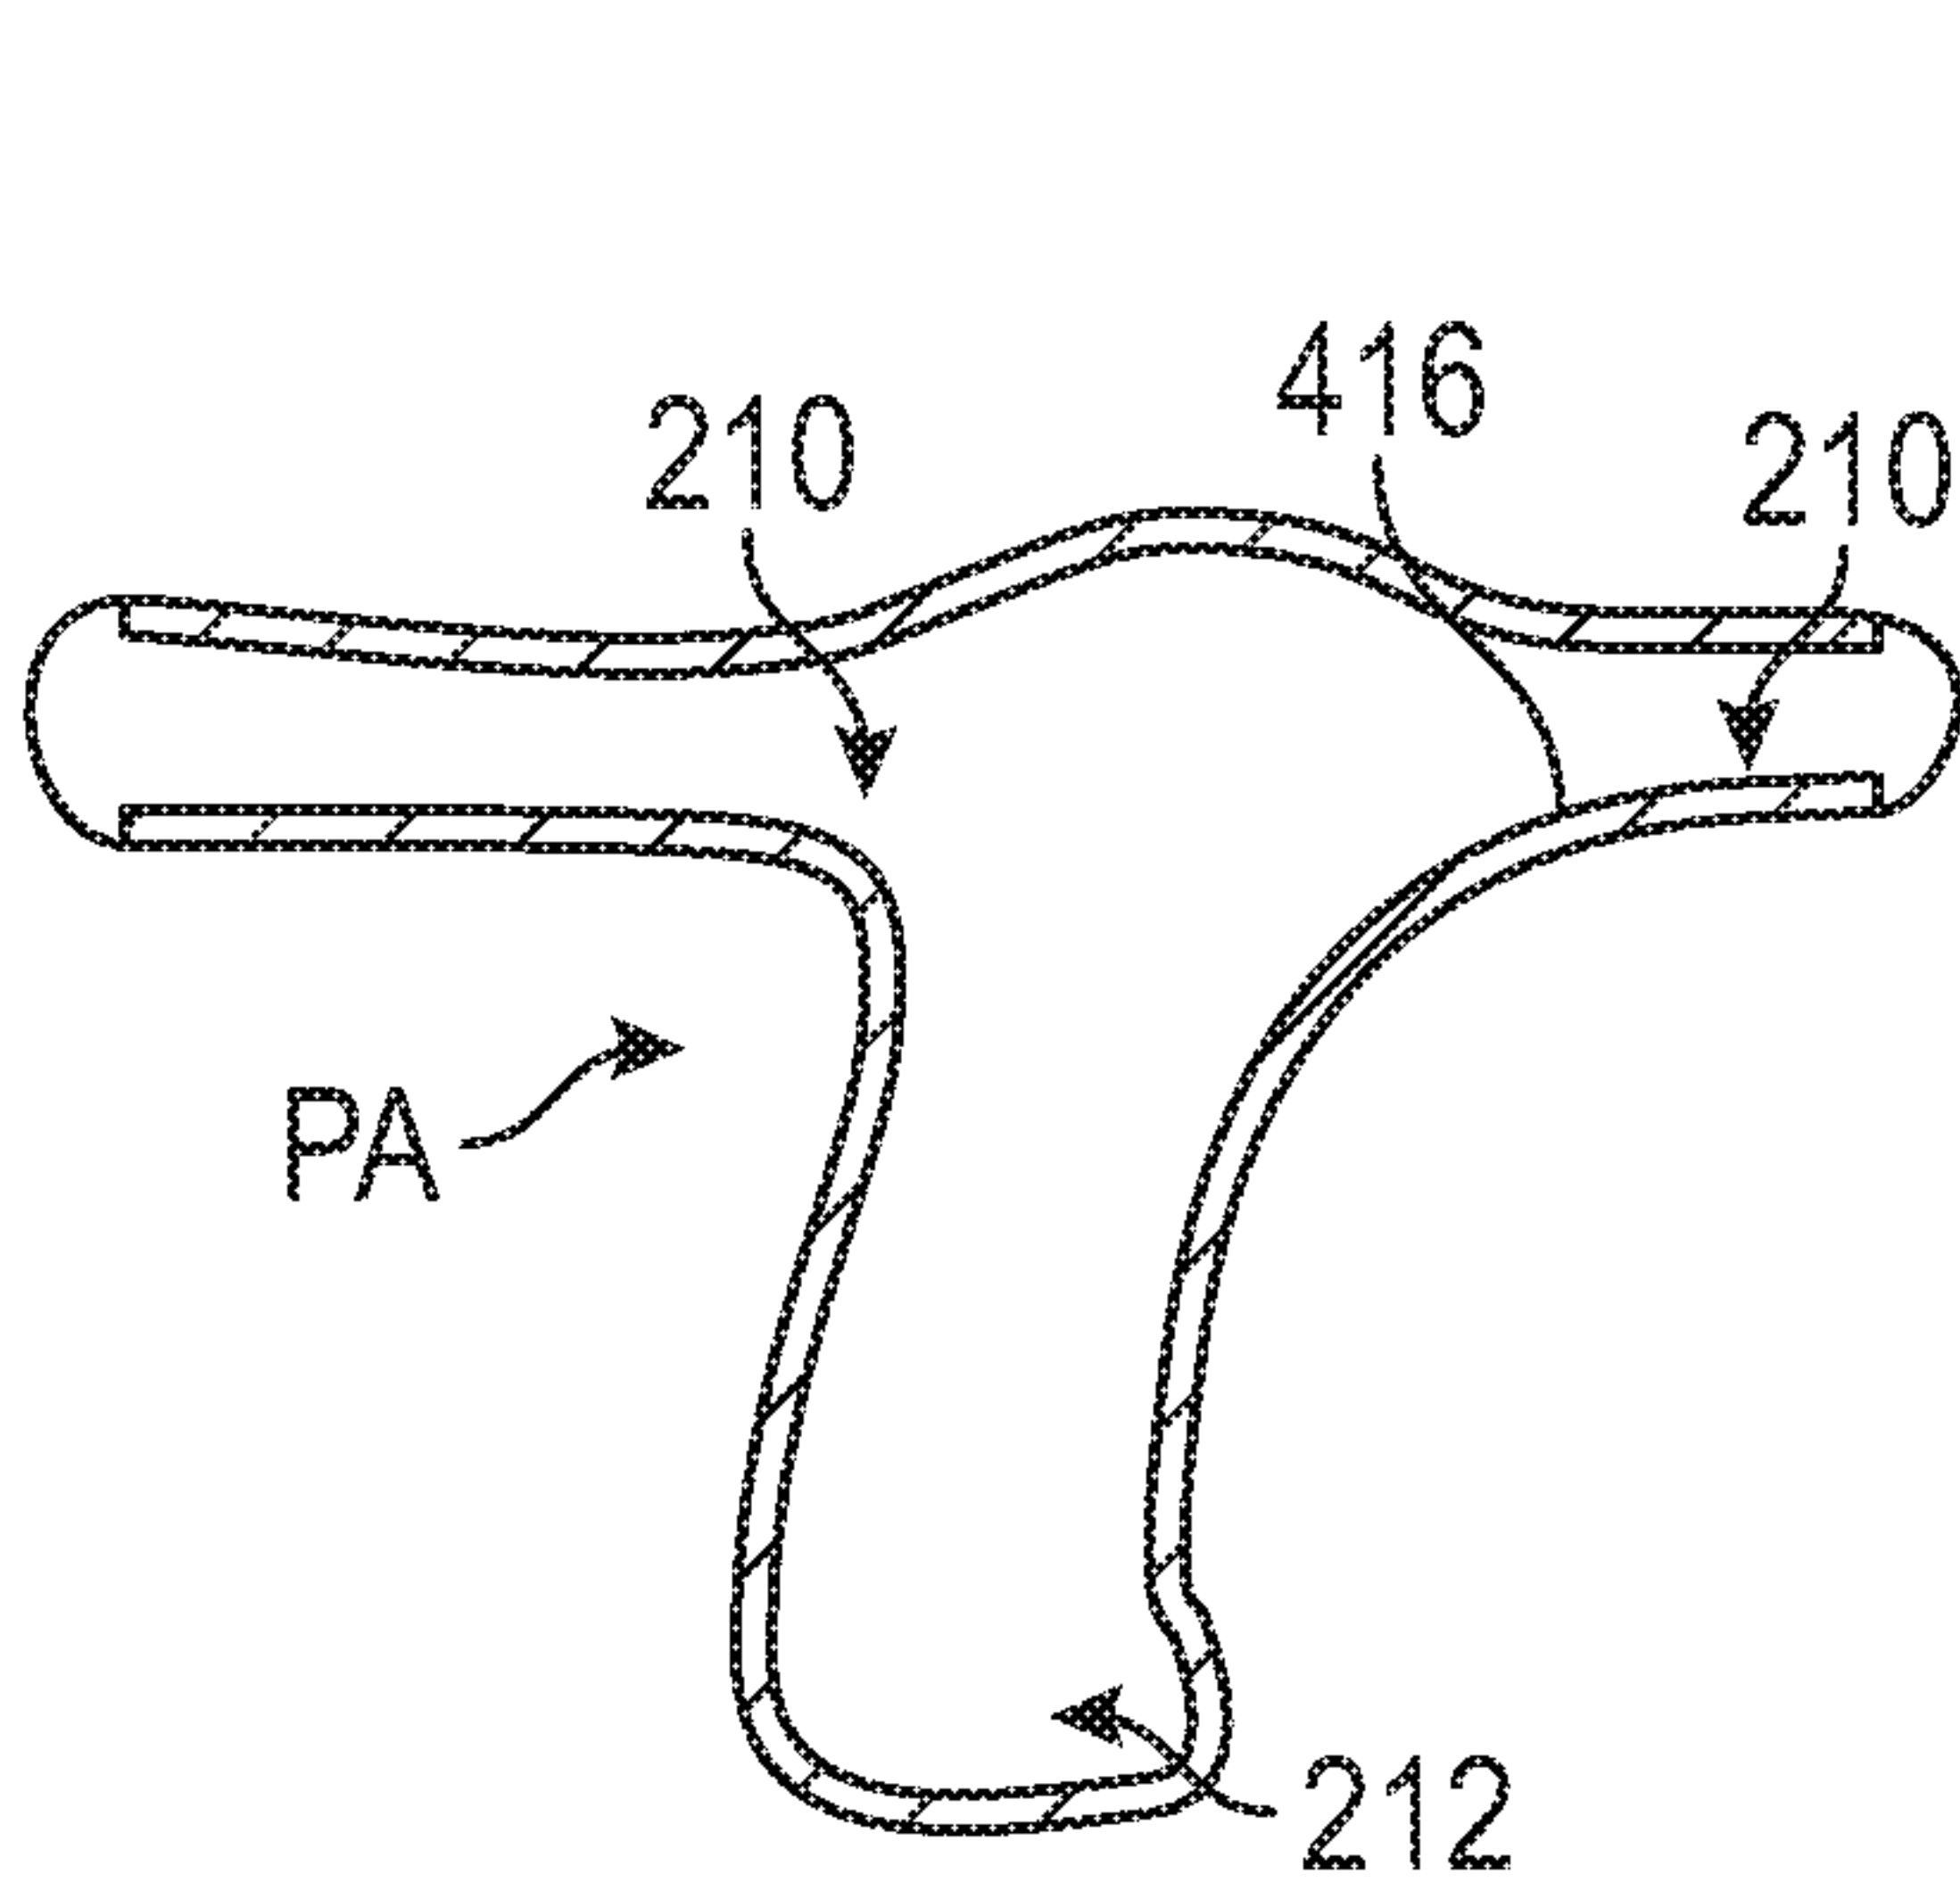


FIG. 2C

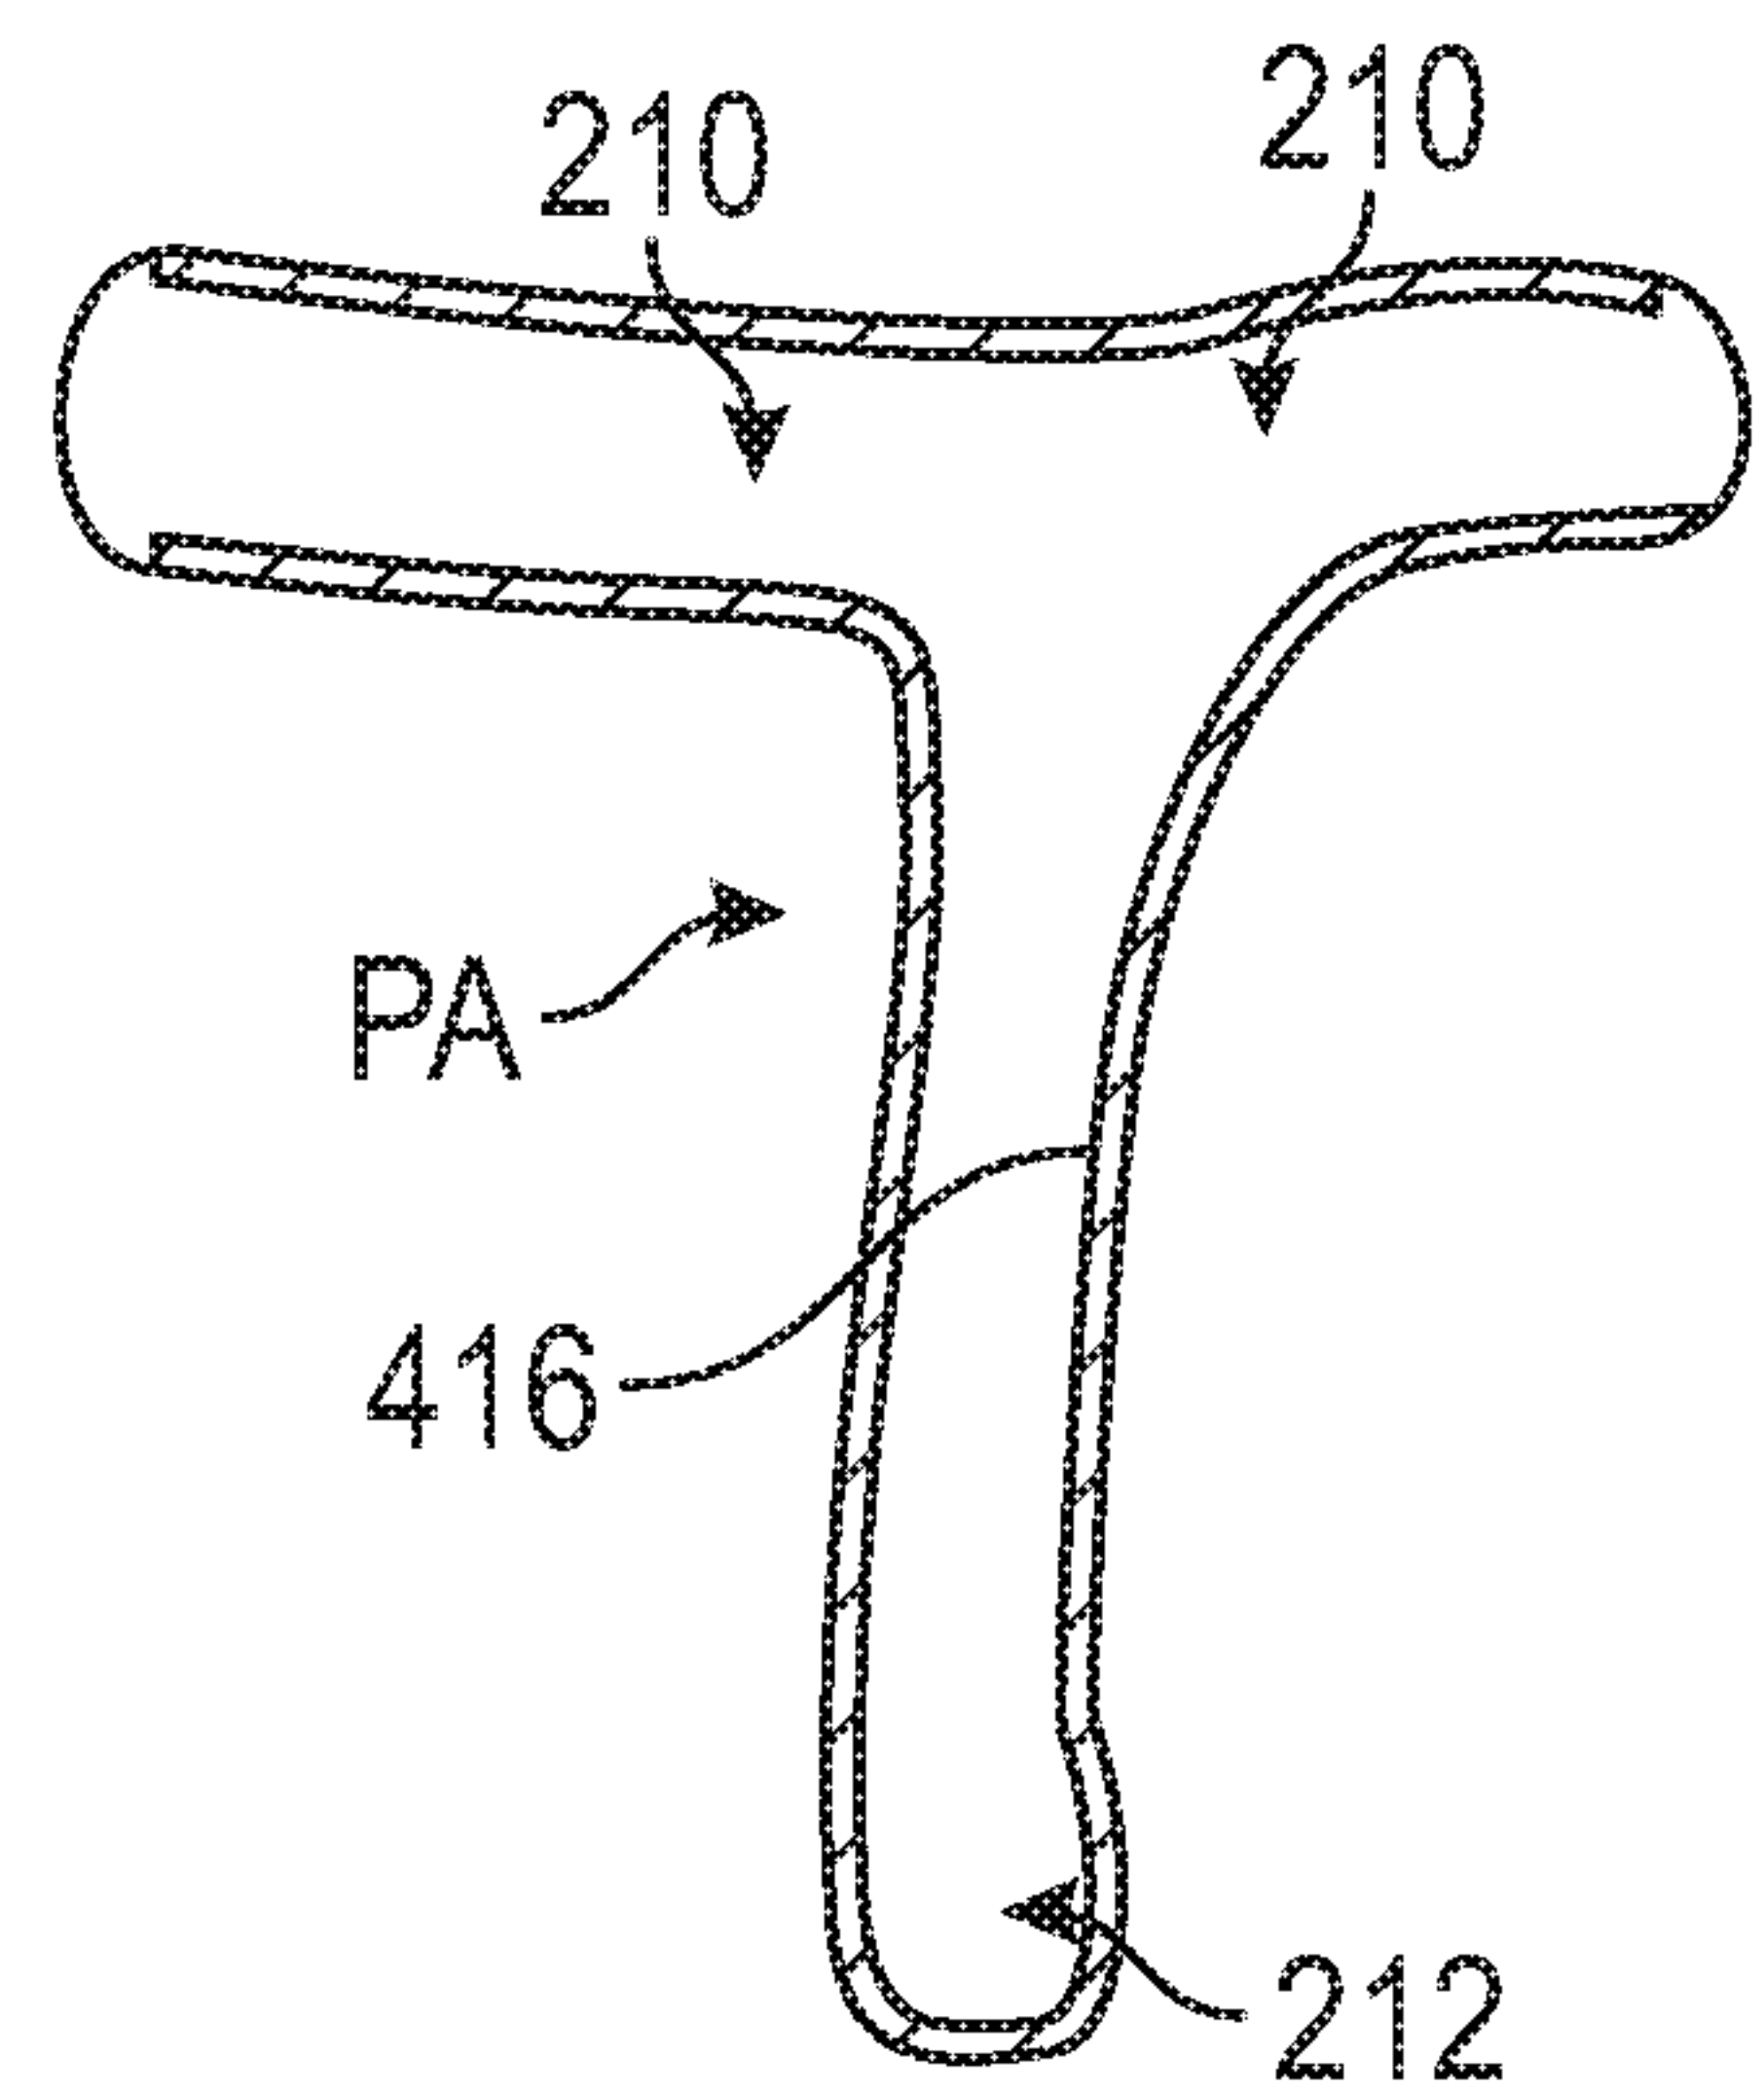


FIG. 2D

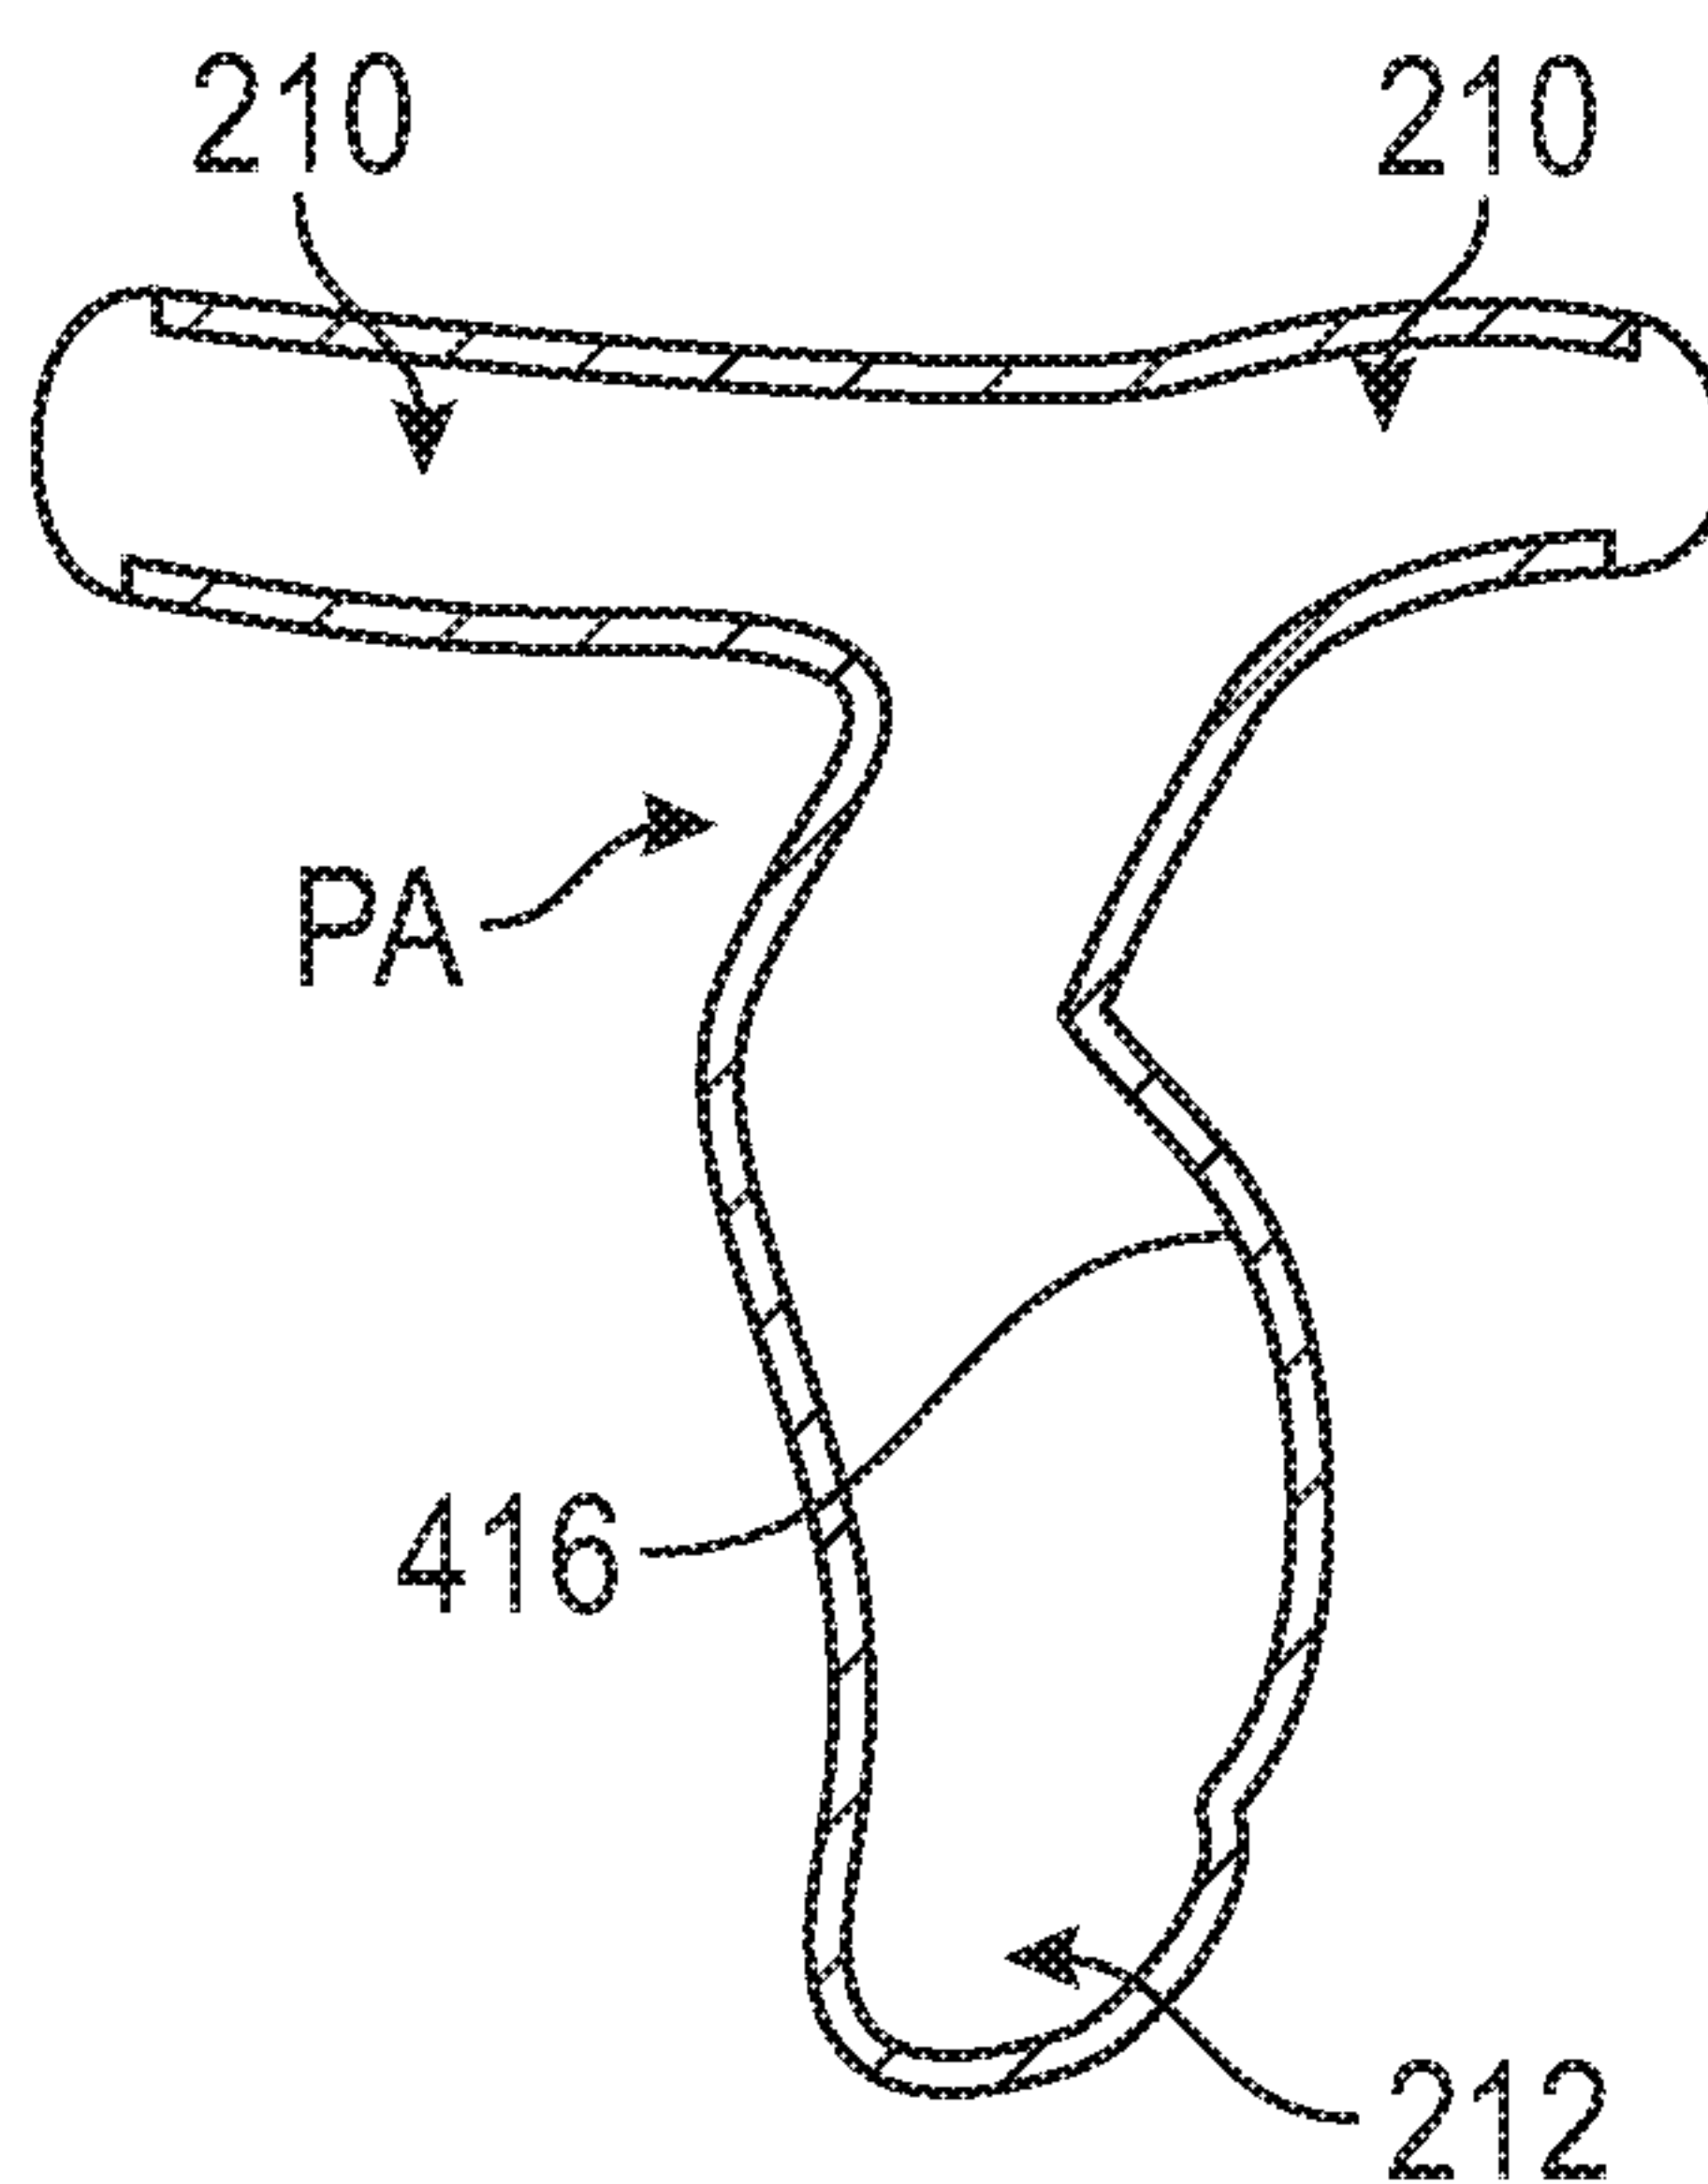


FIG. 2E

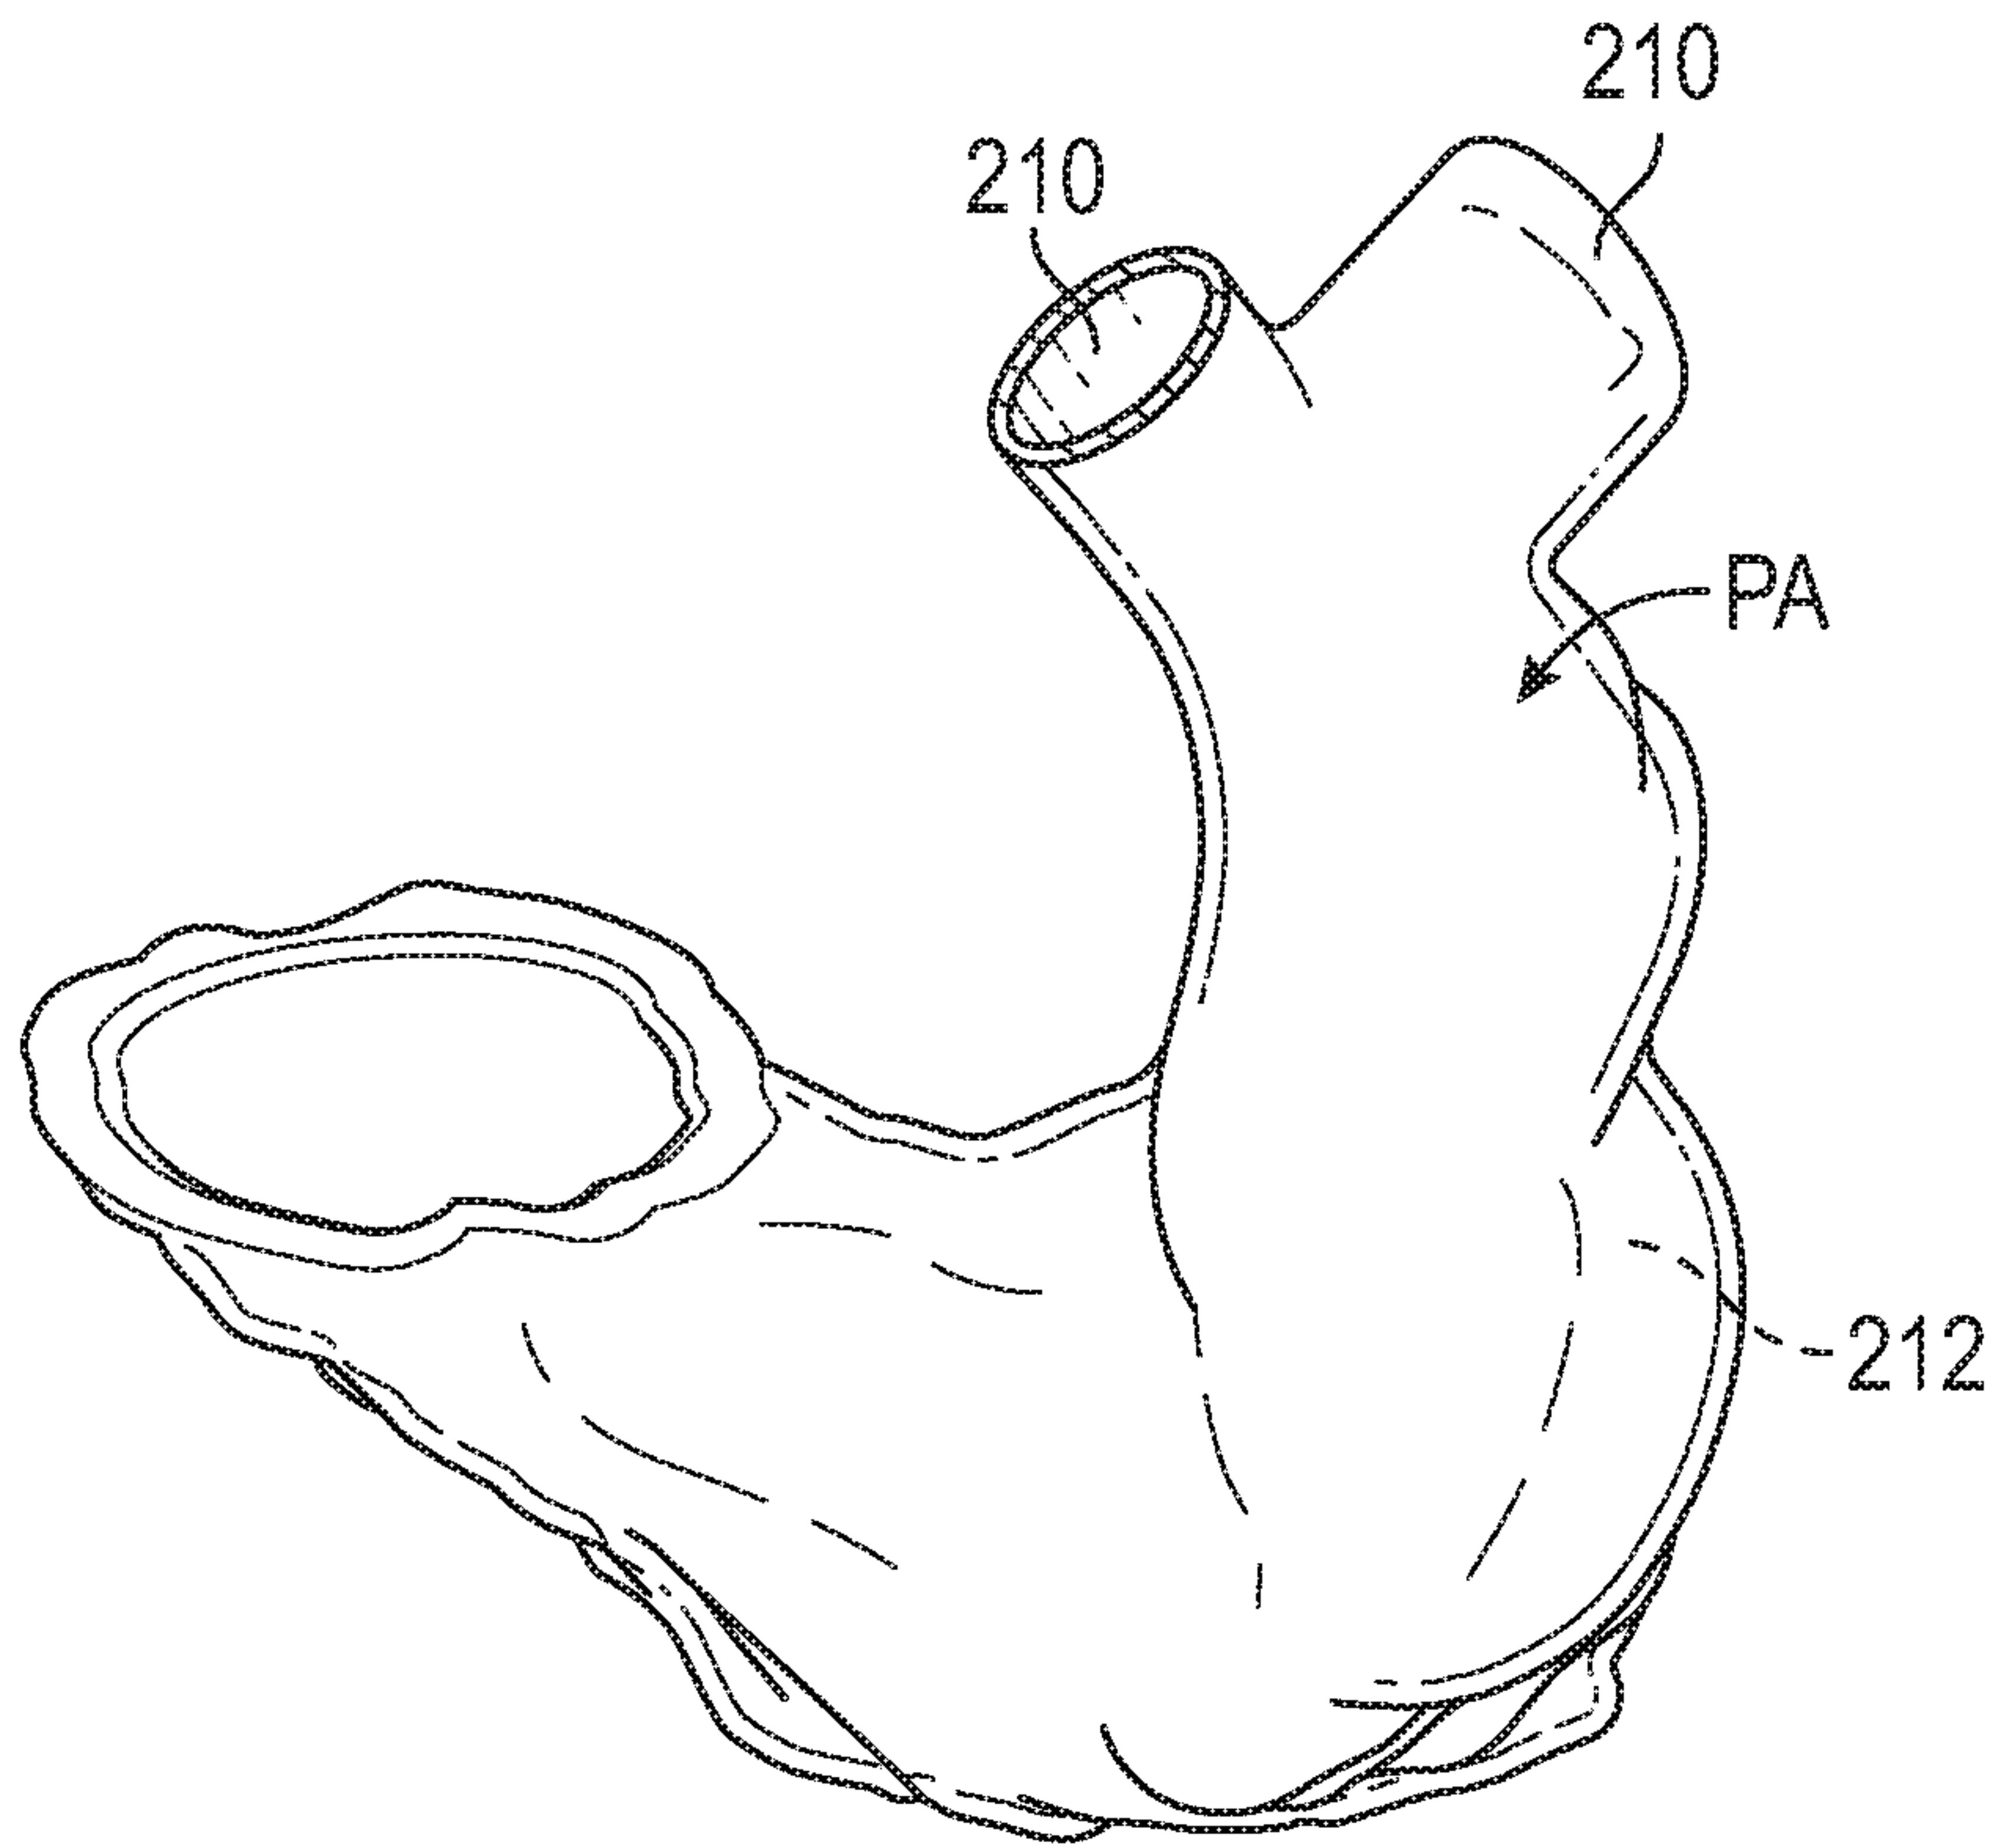


FIG. 3A

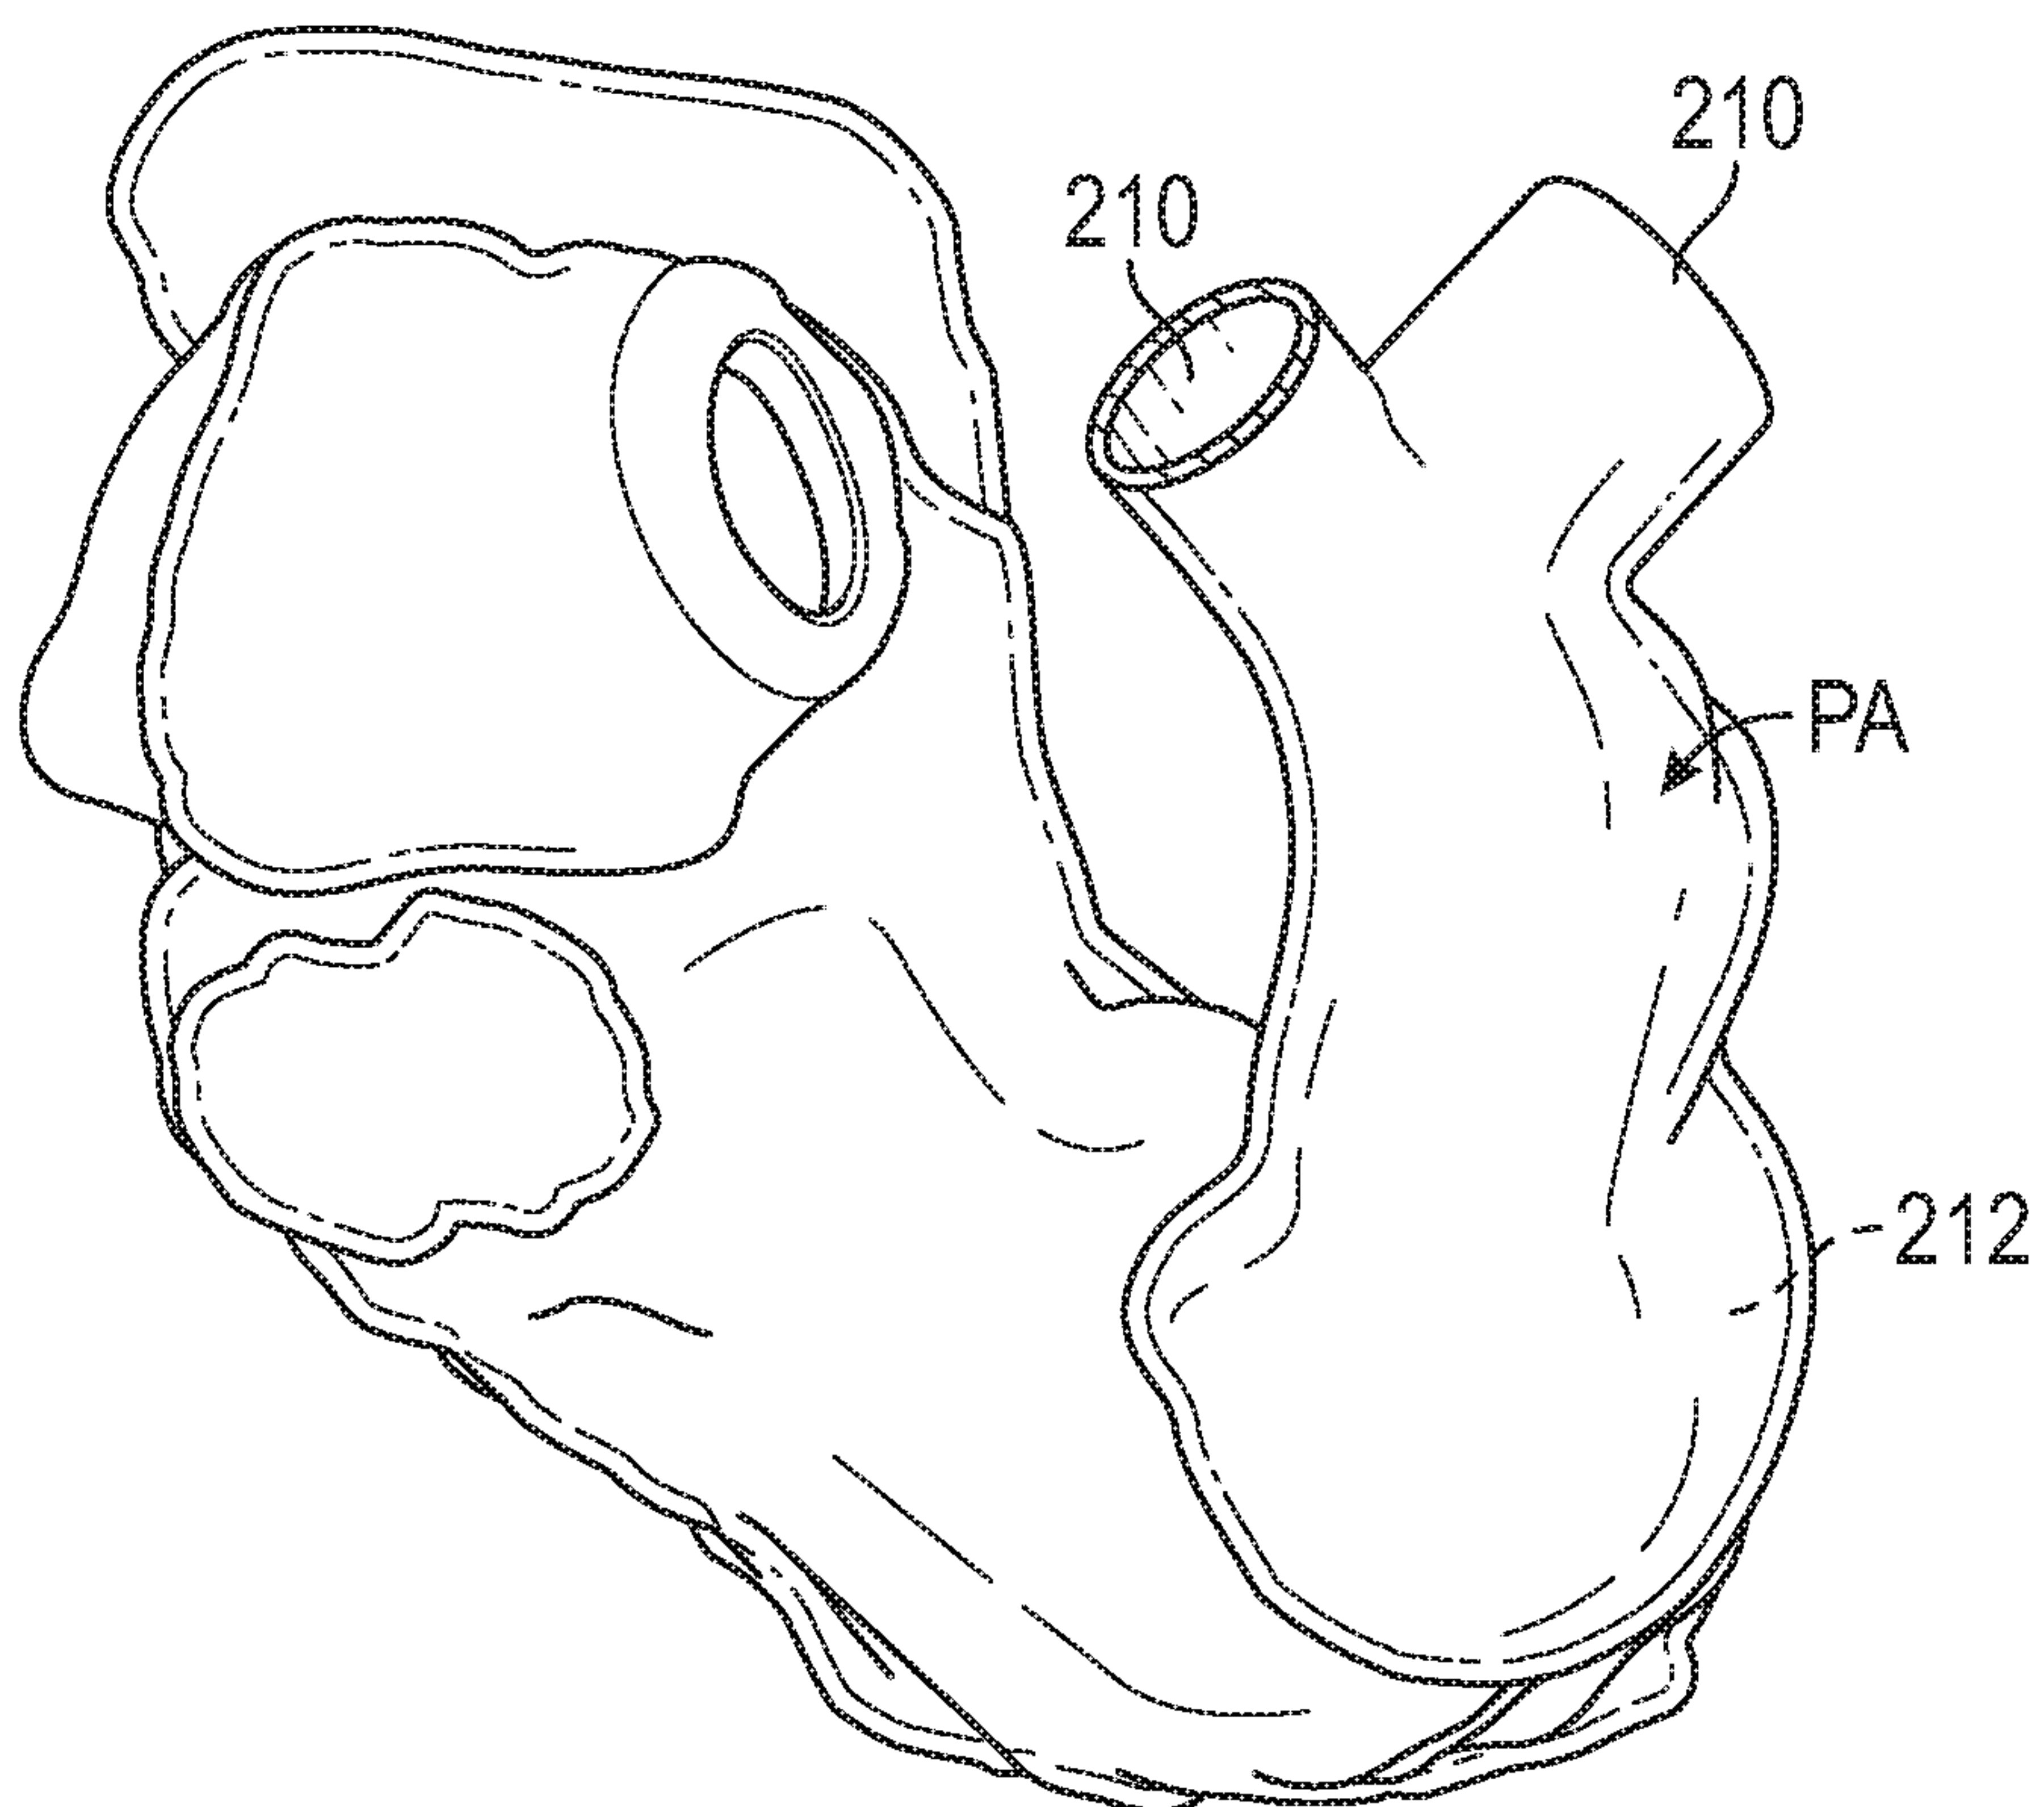


FIG. 3B

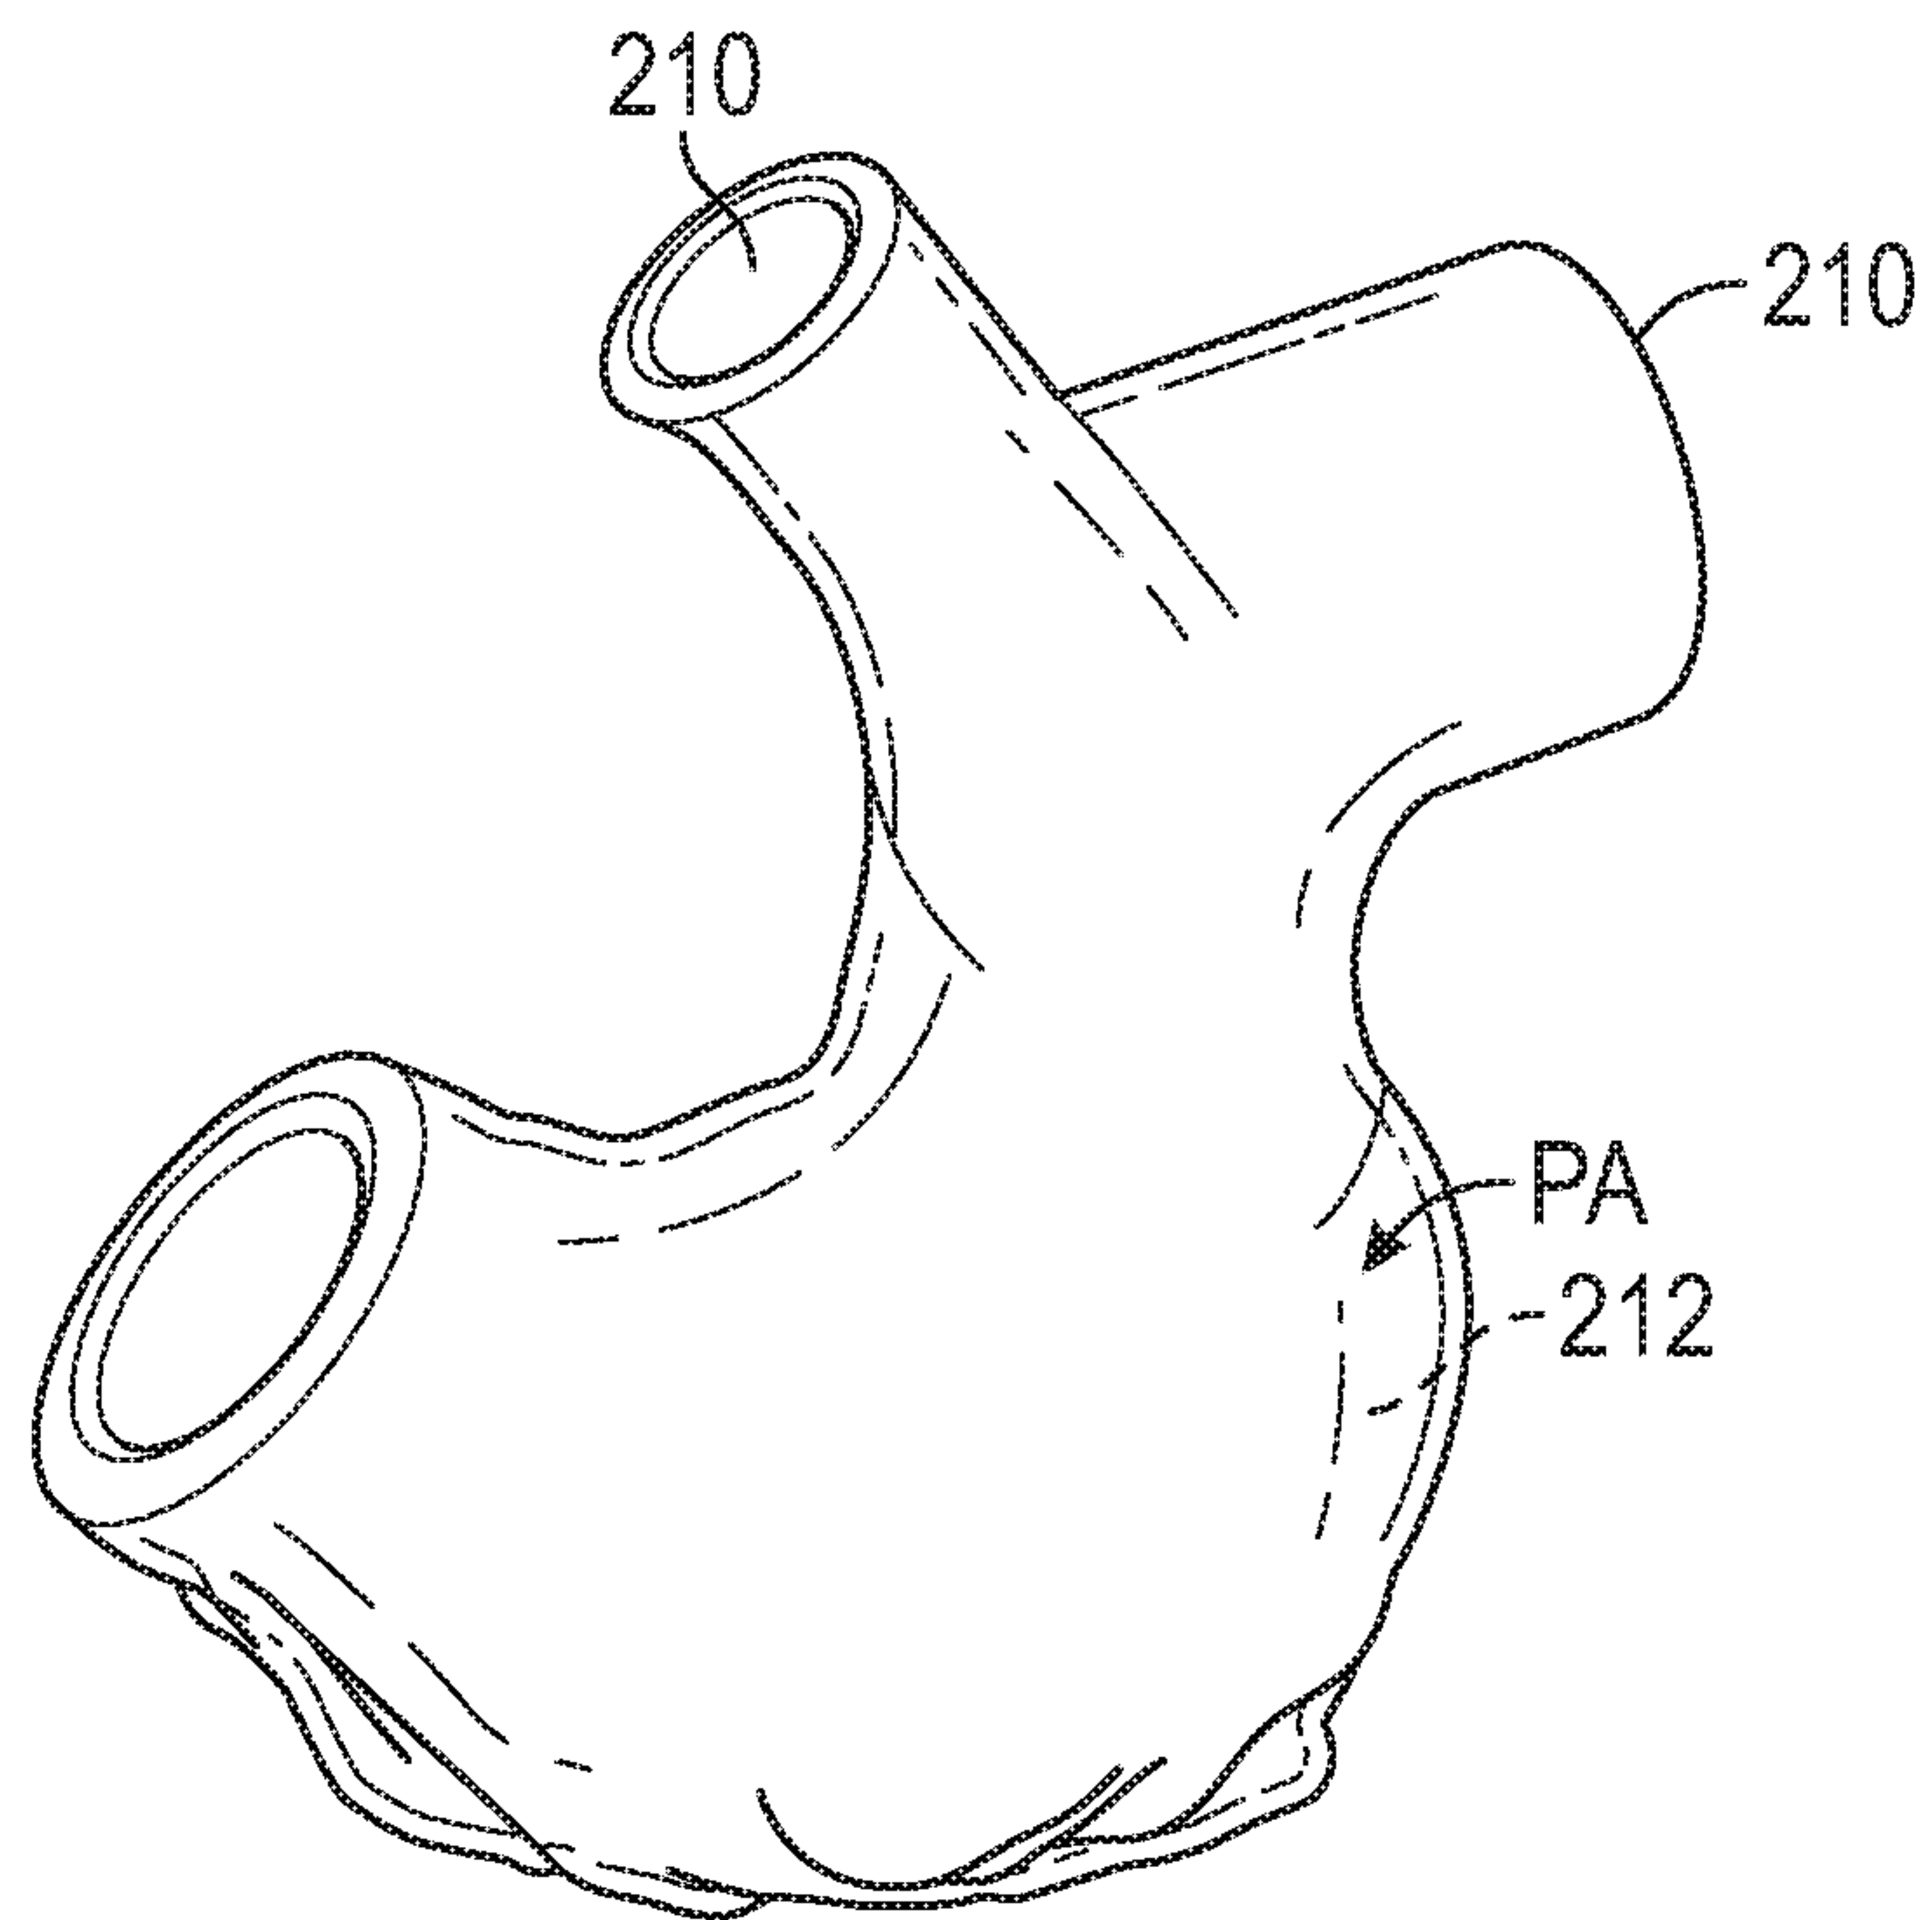


FIG. 3C

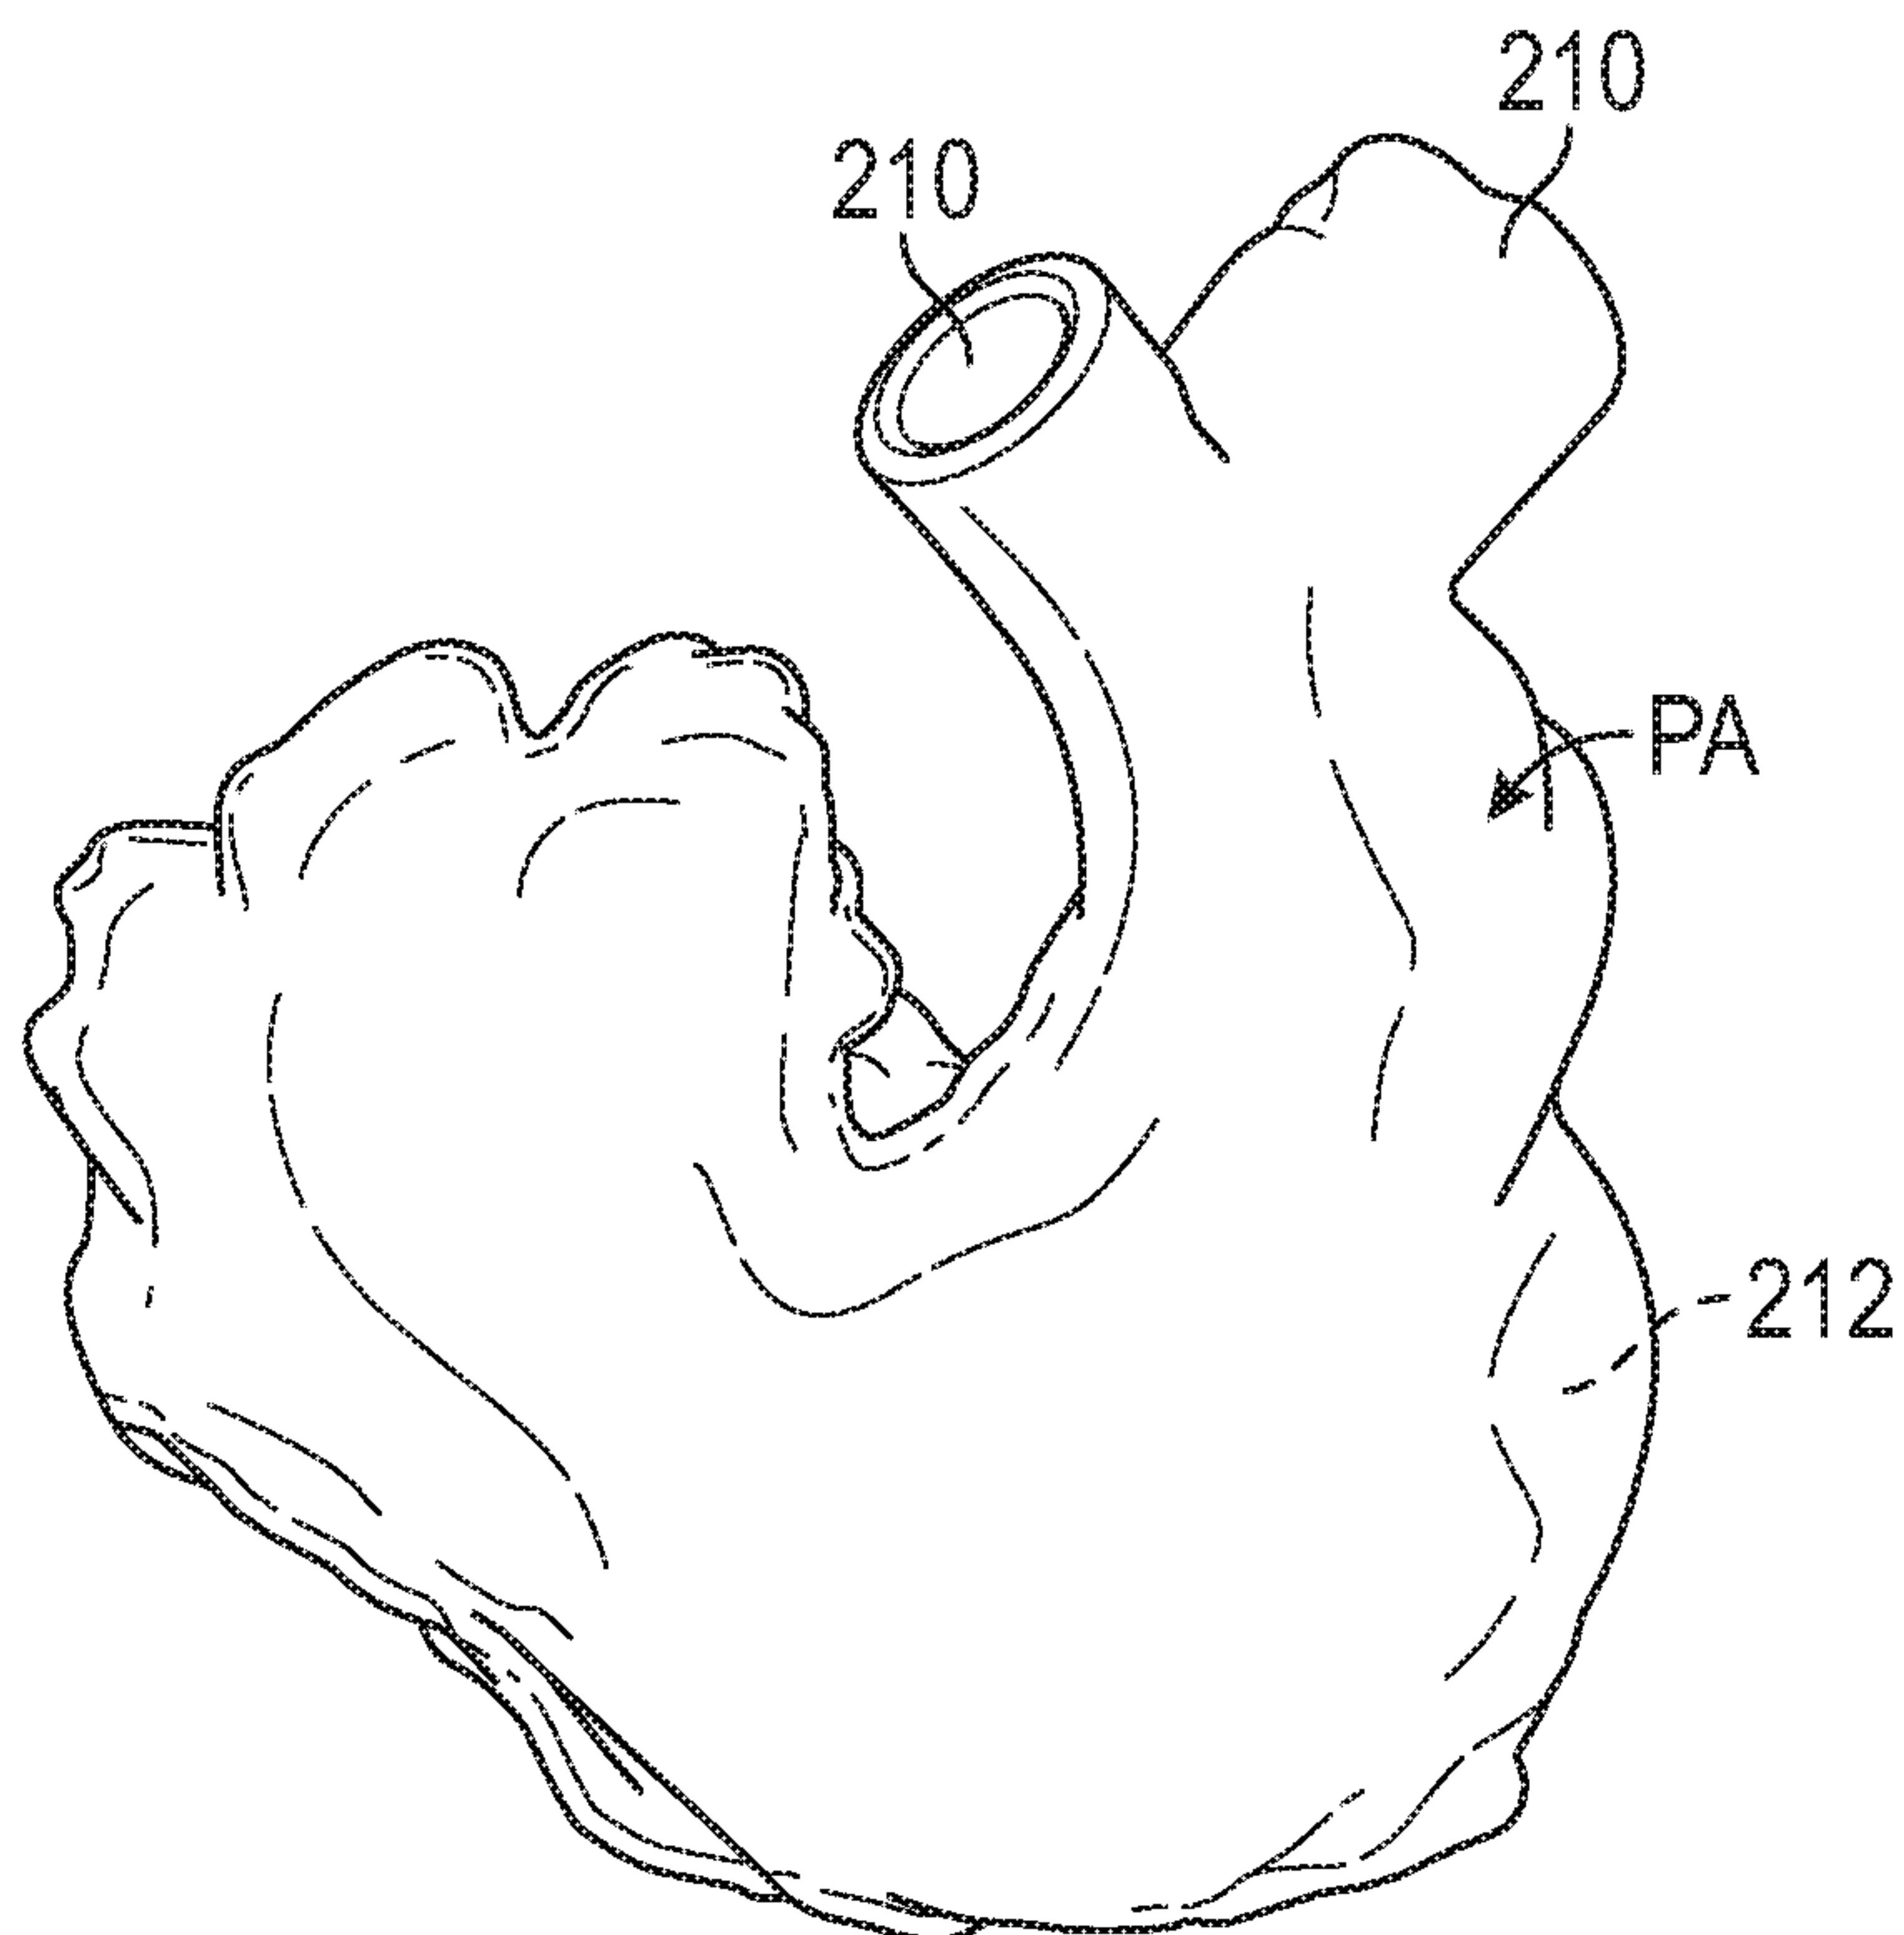


FIG. 3D

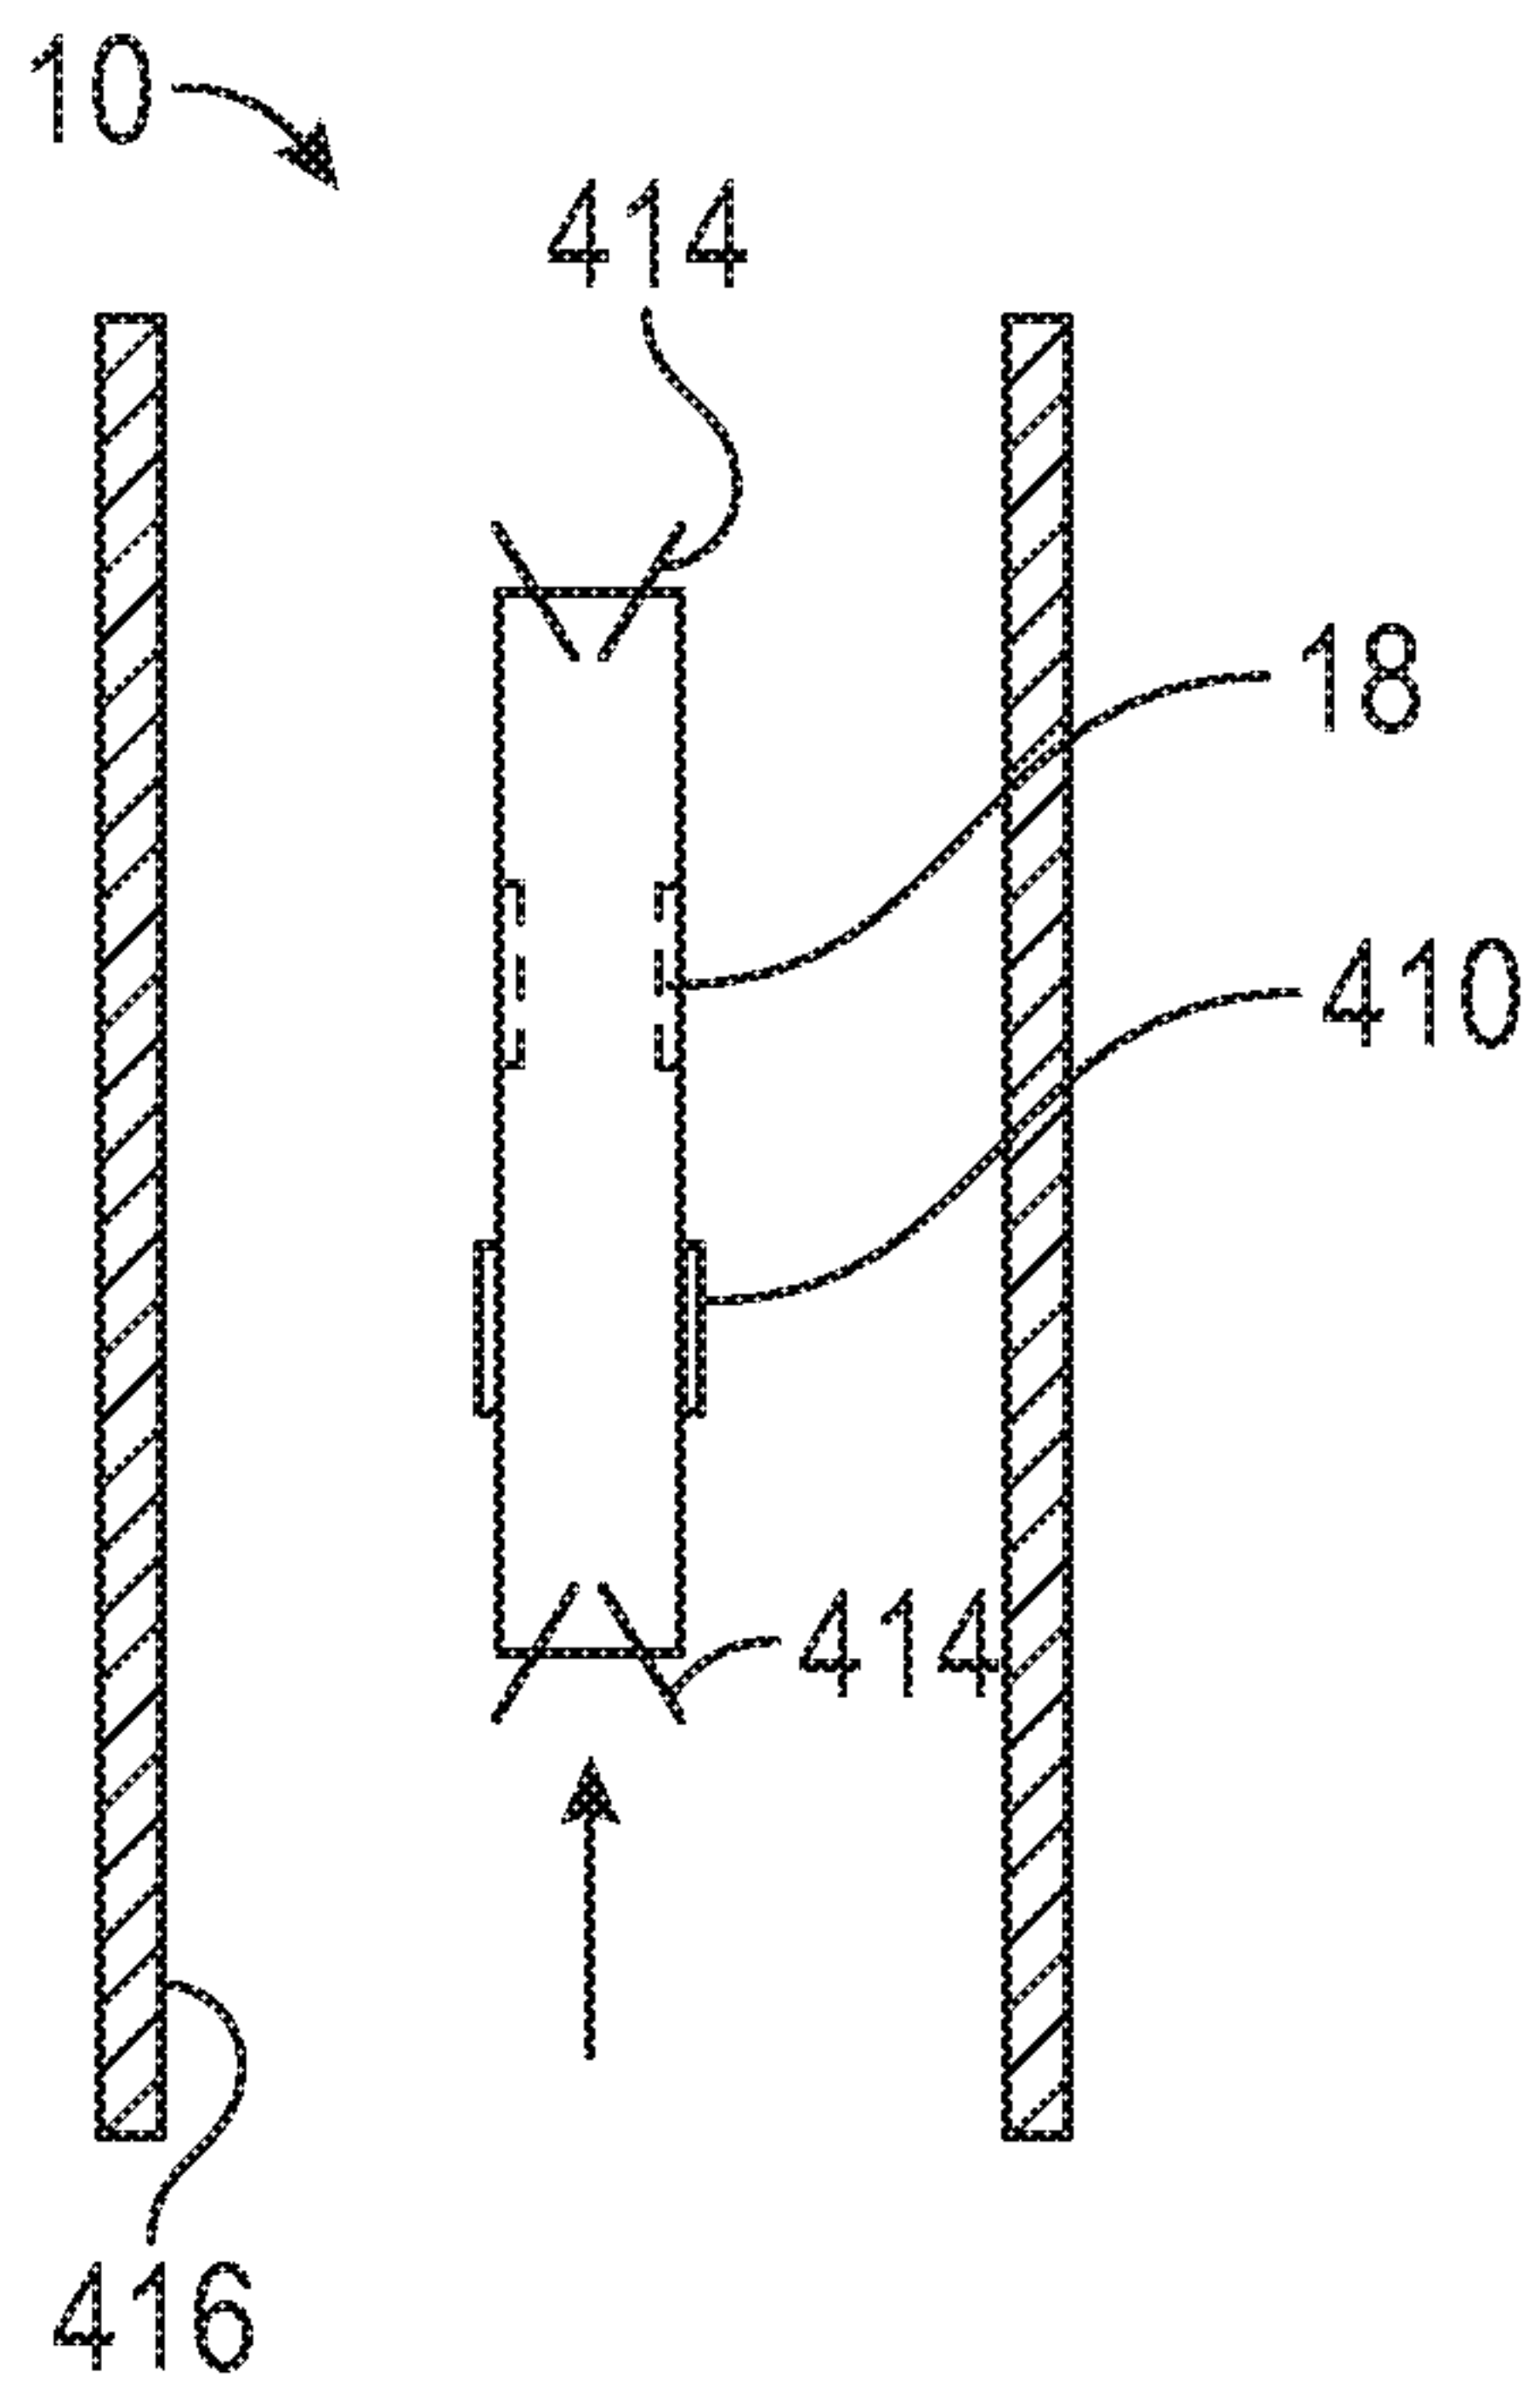


FIG. 4A

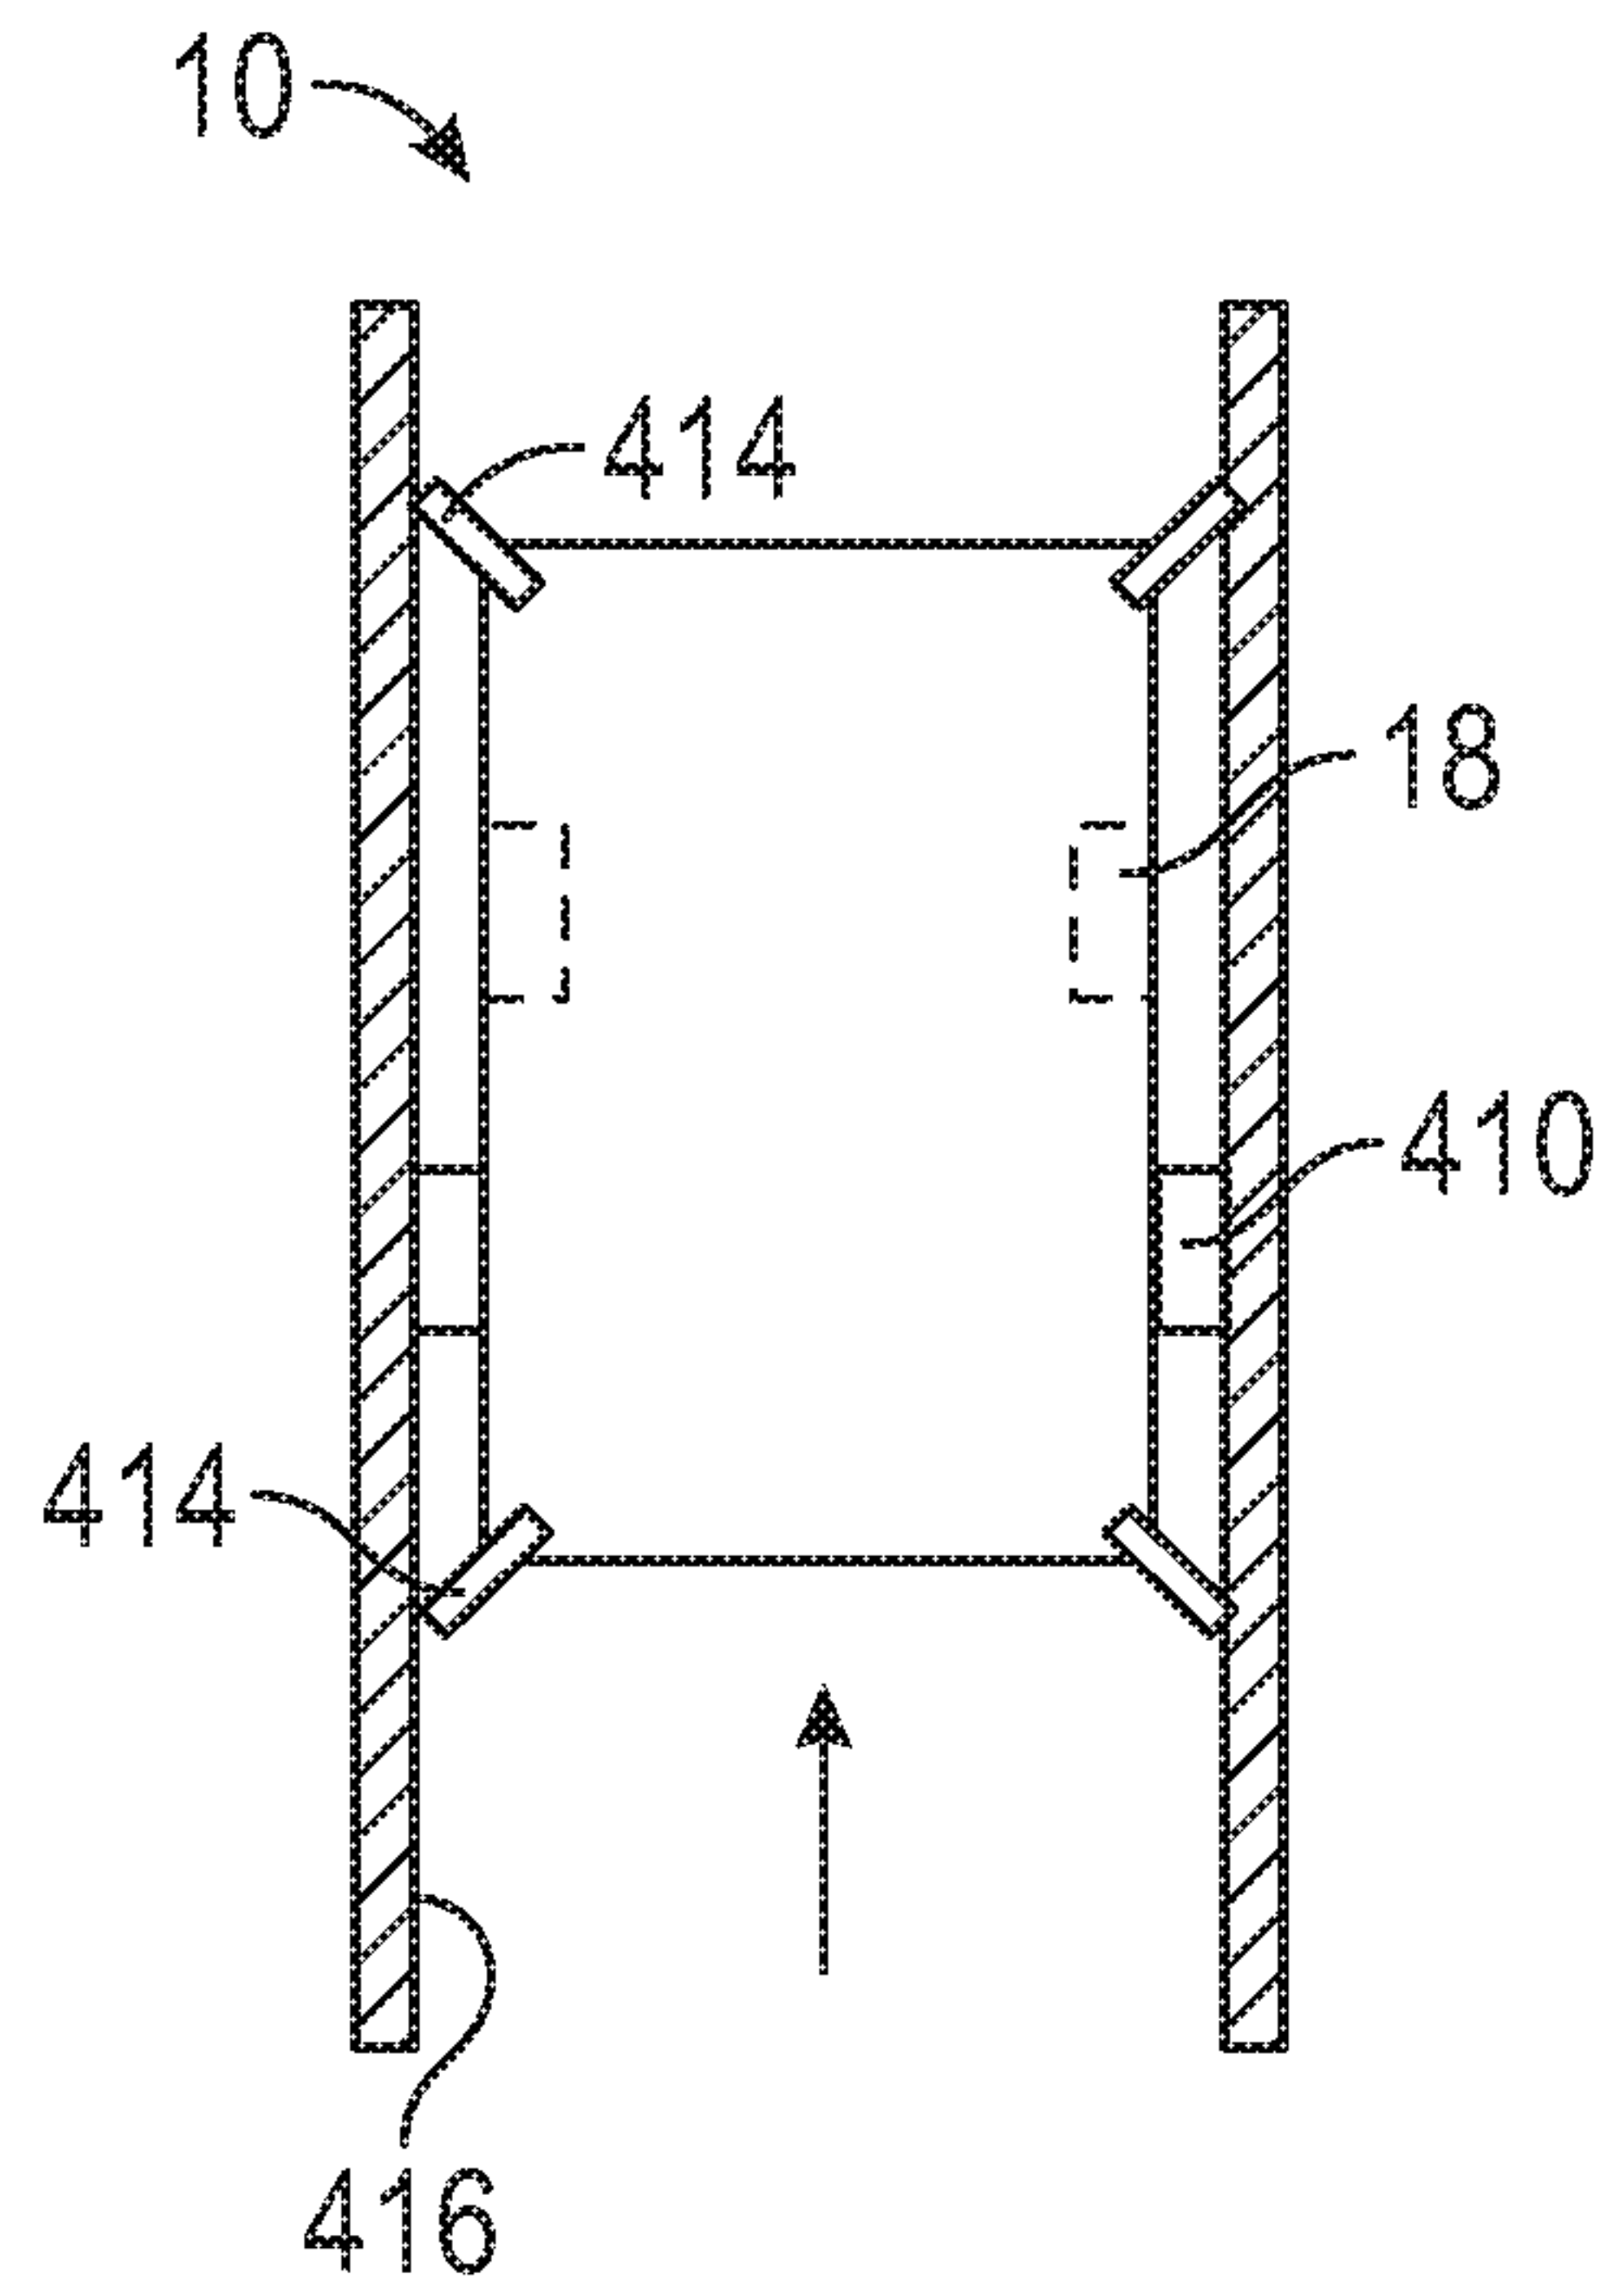


FIG. 4B

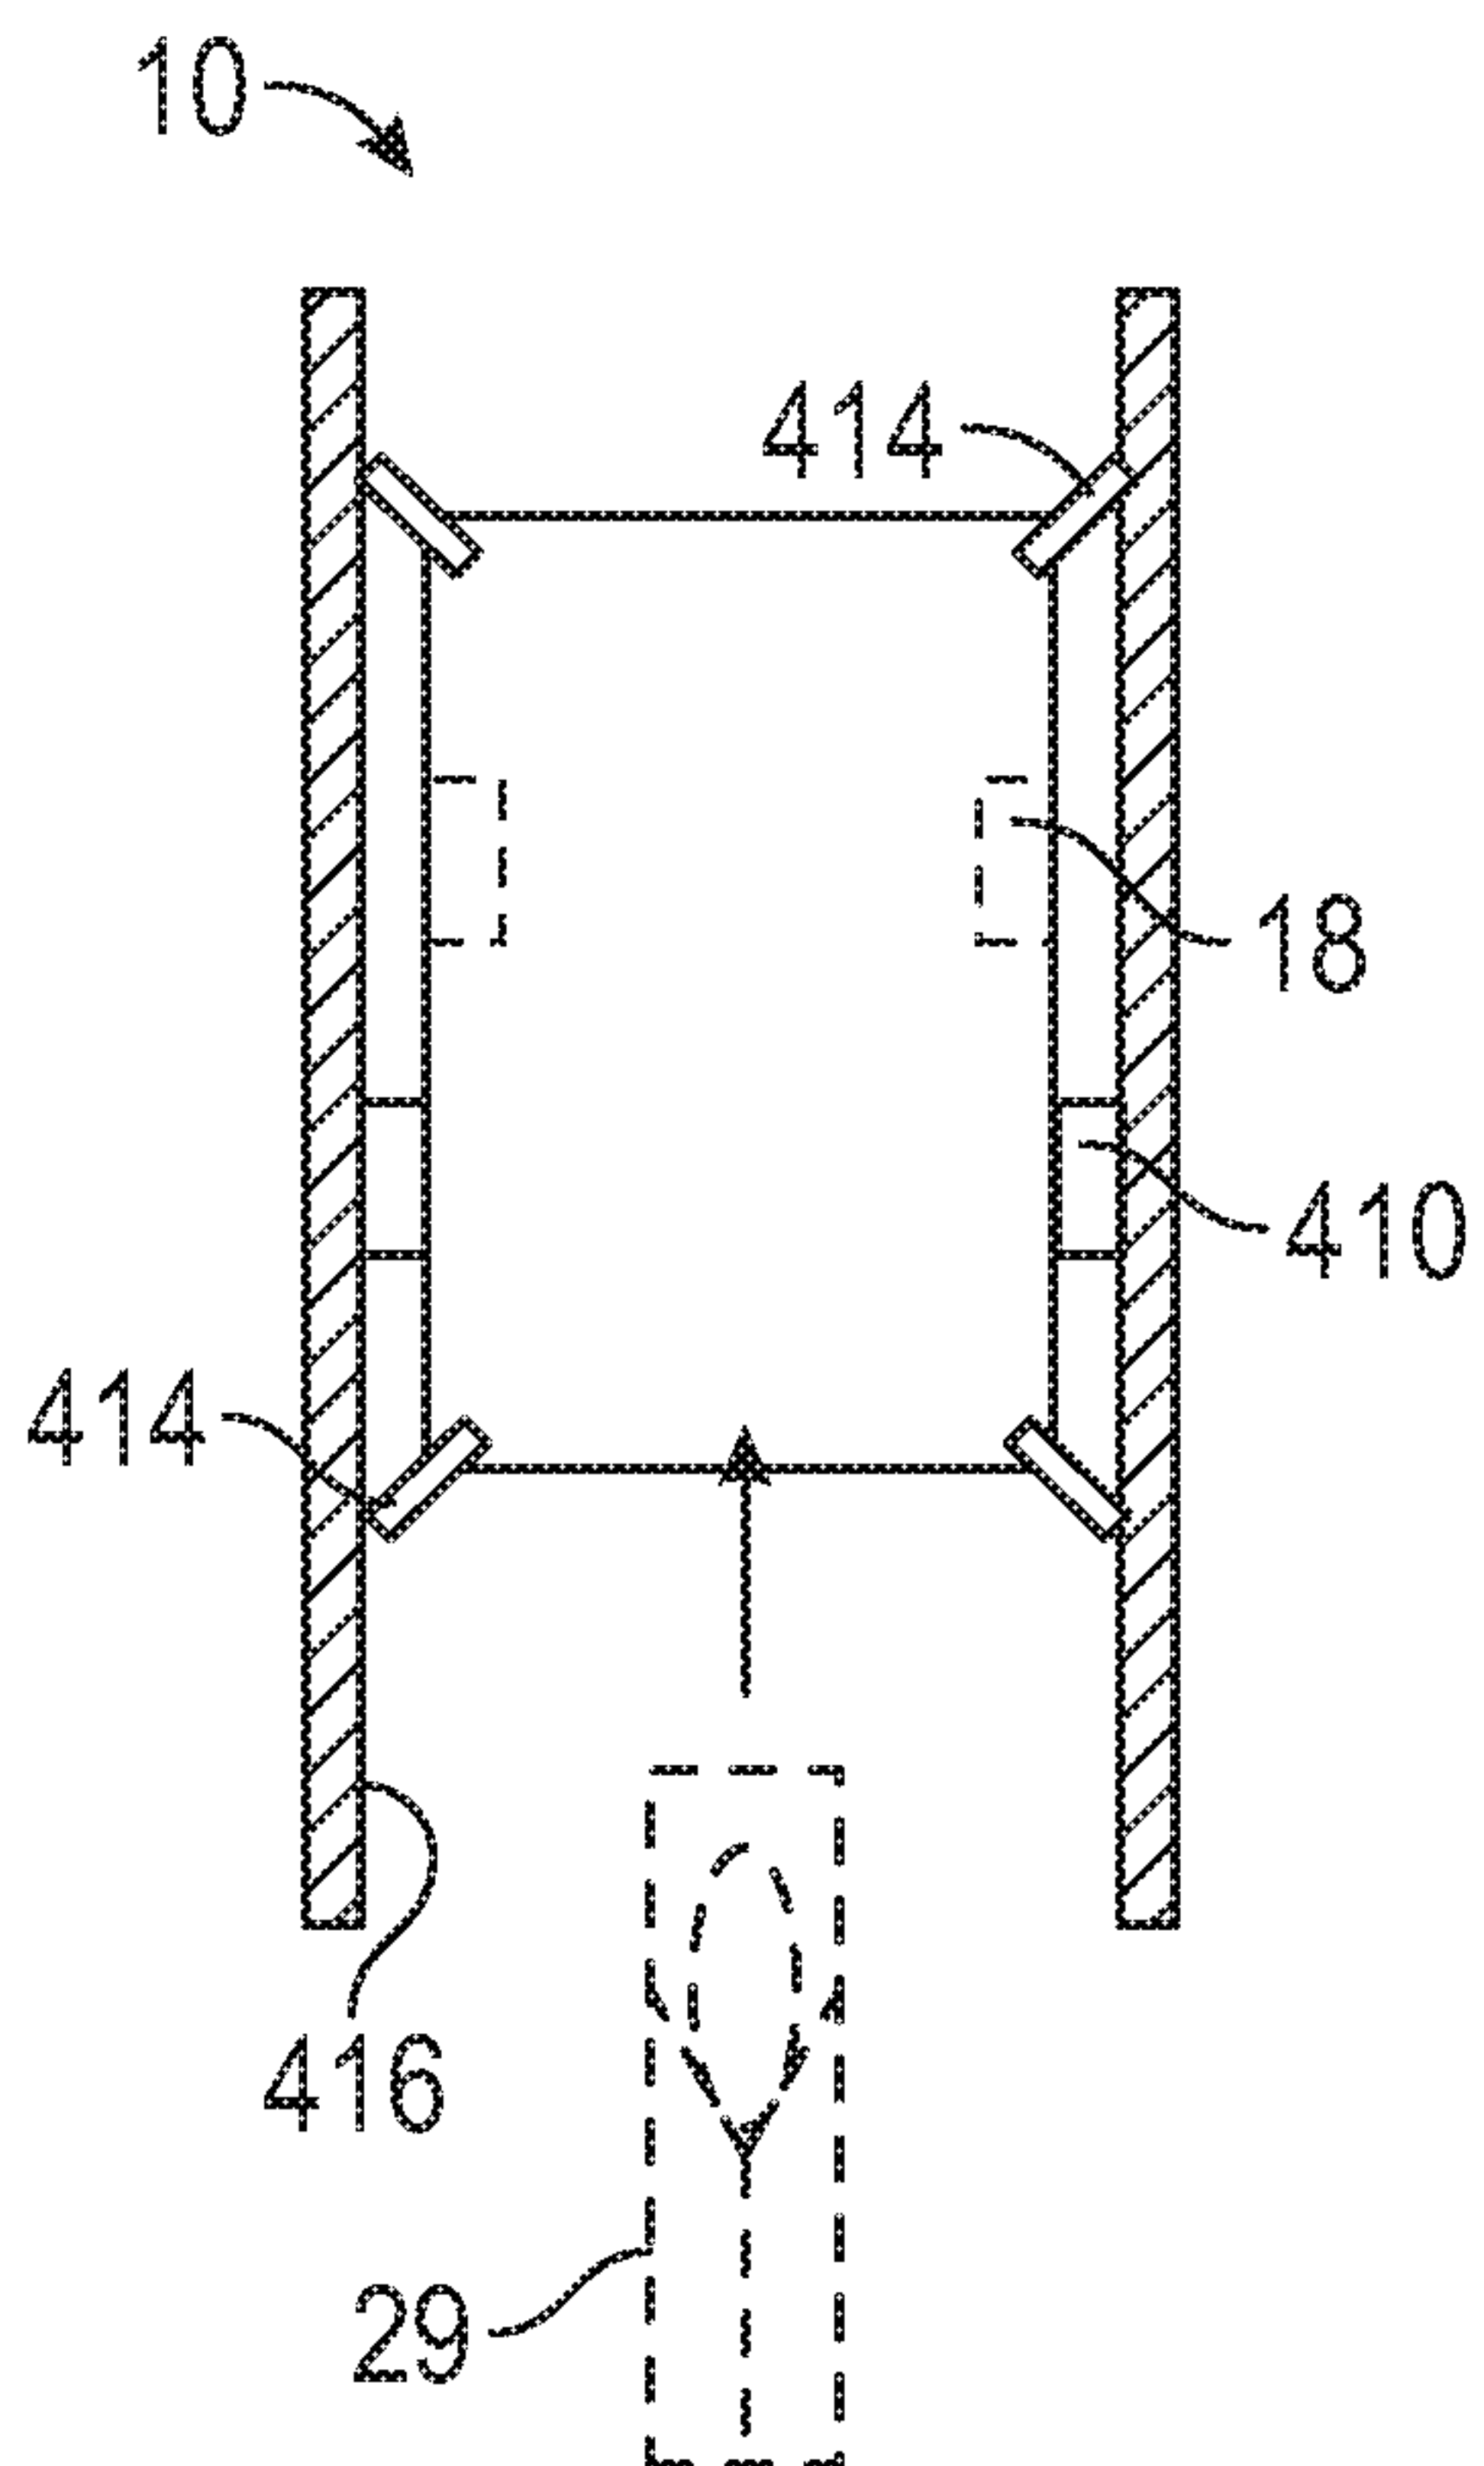


FIG. 4C

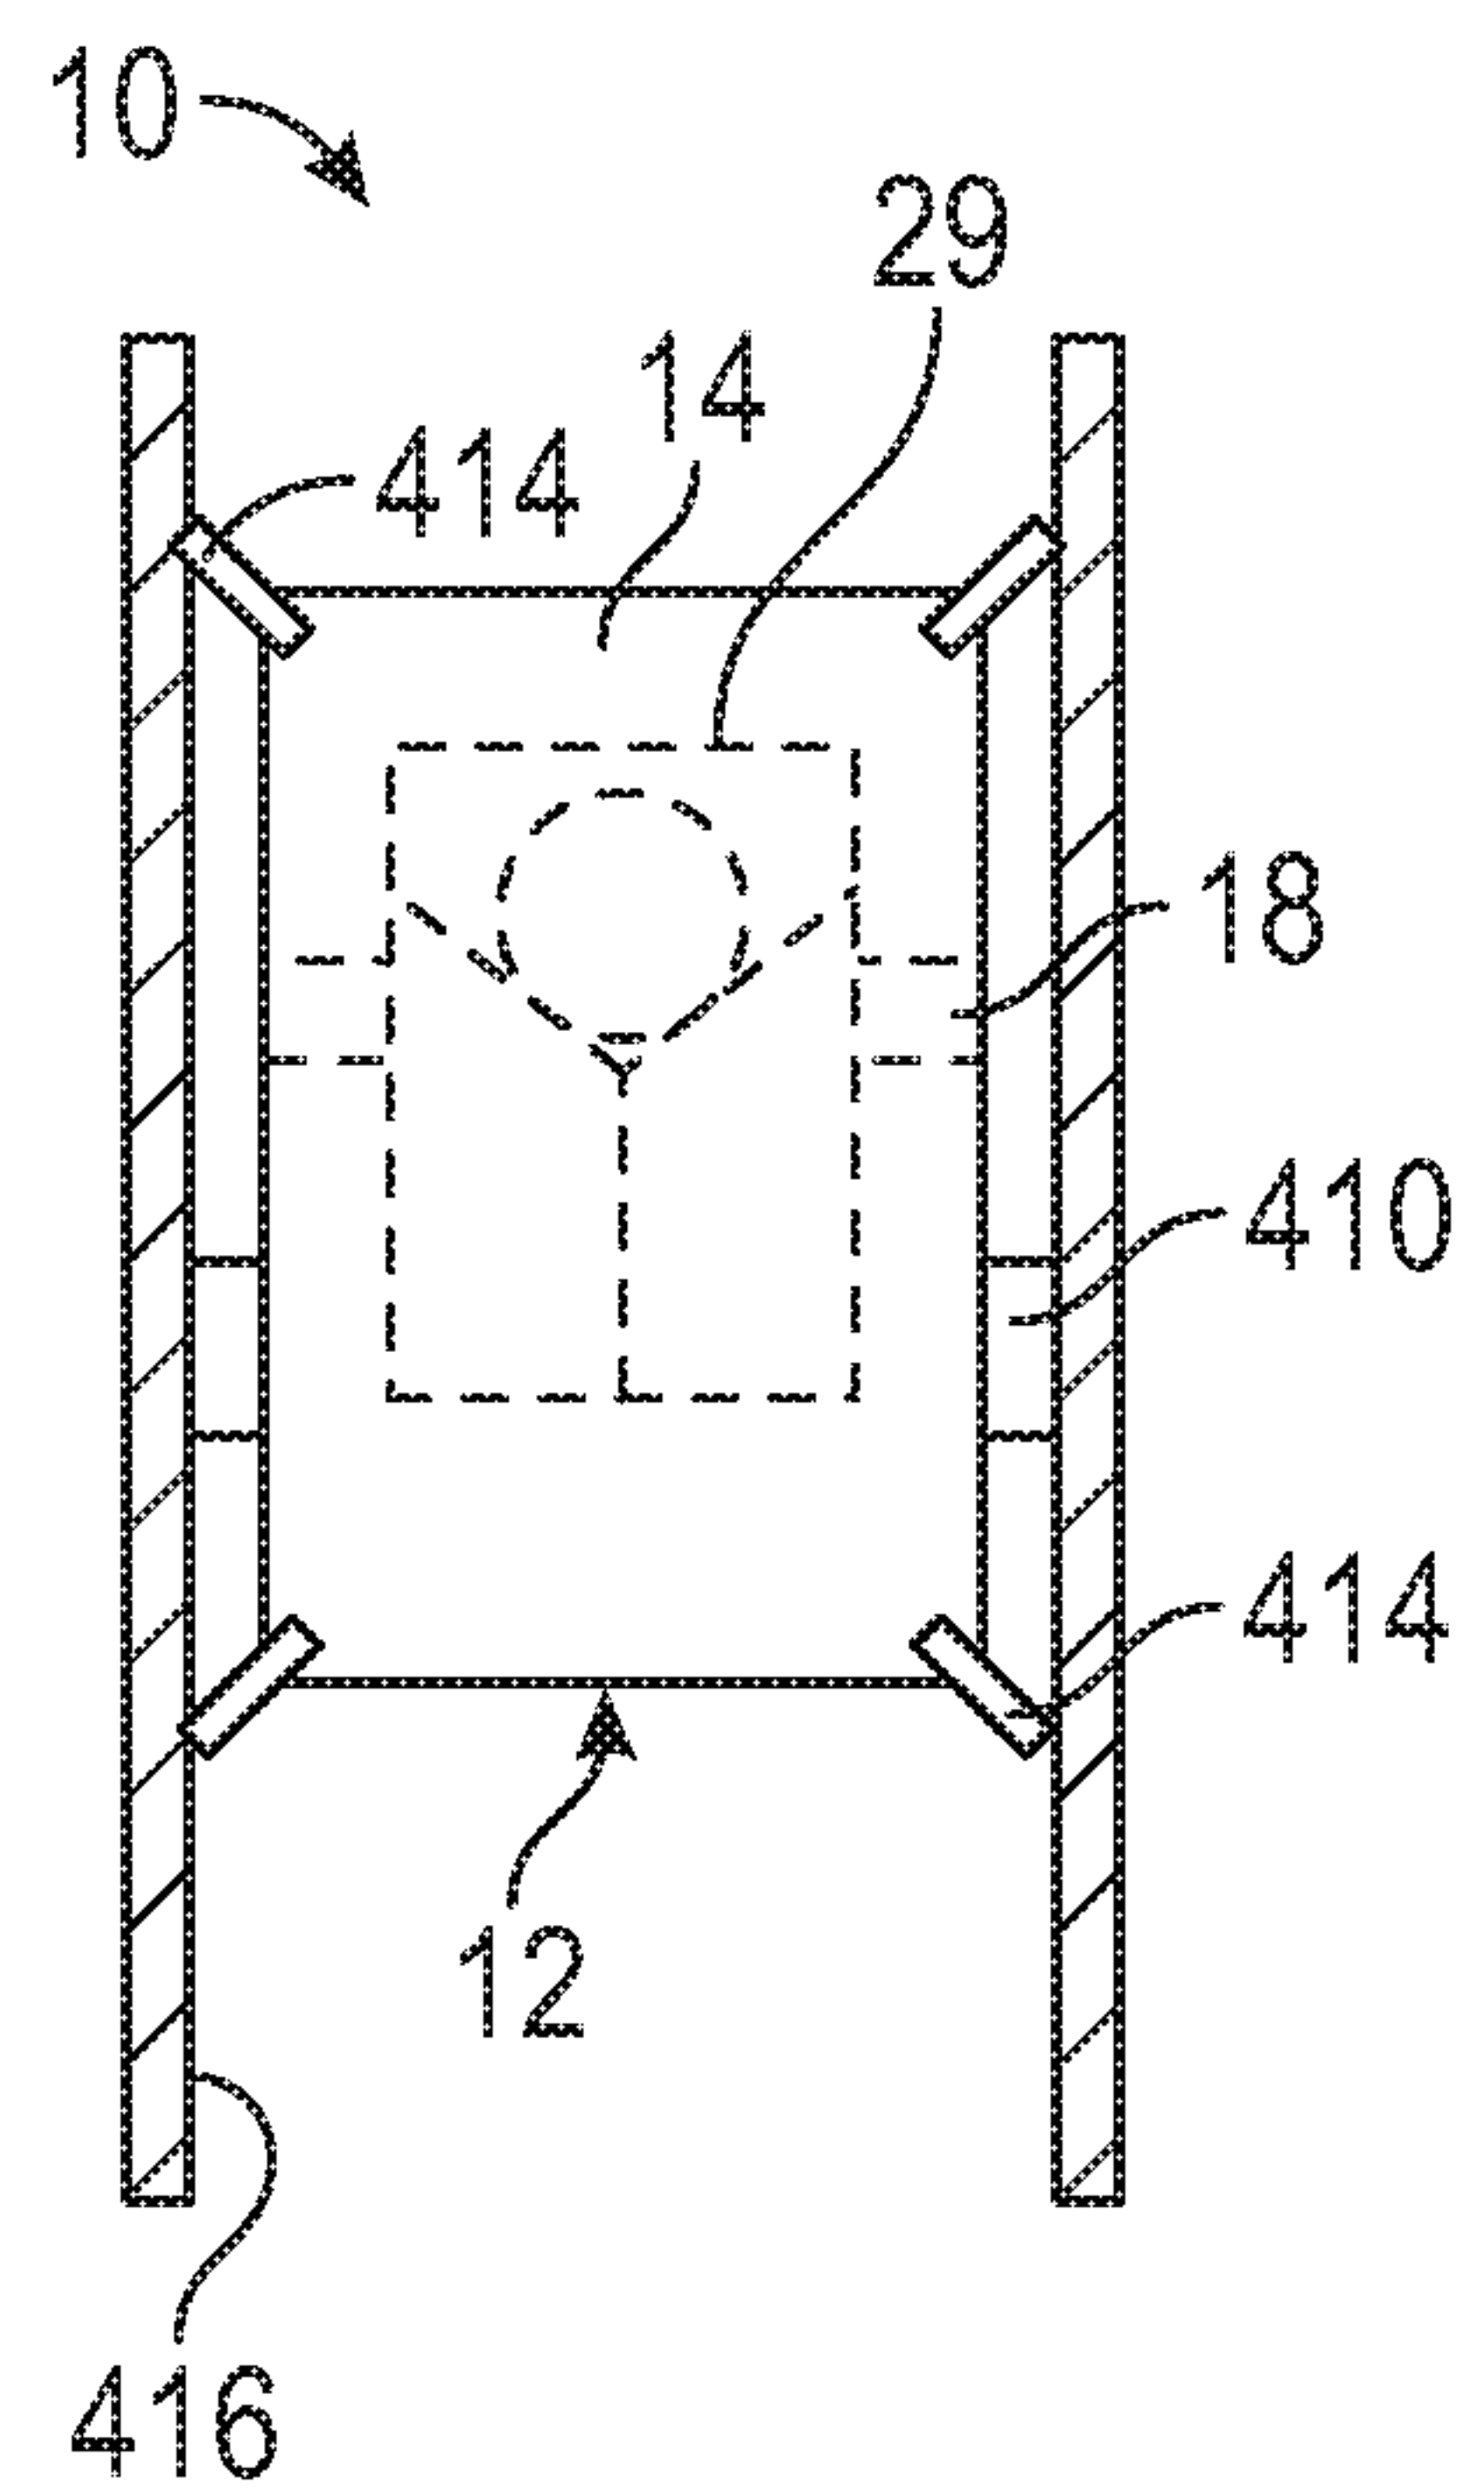


FIG. 4D

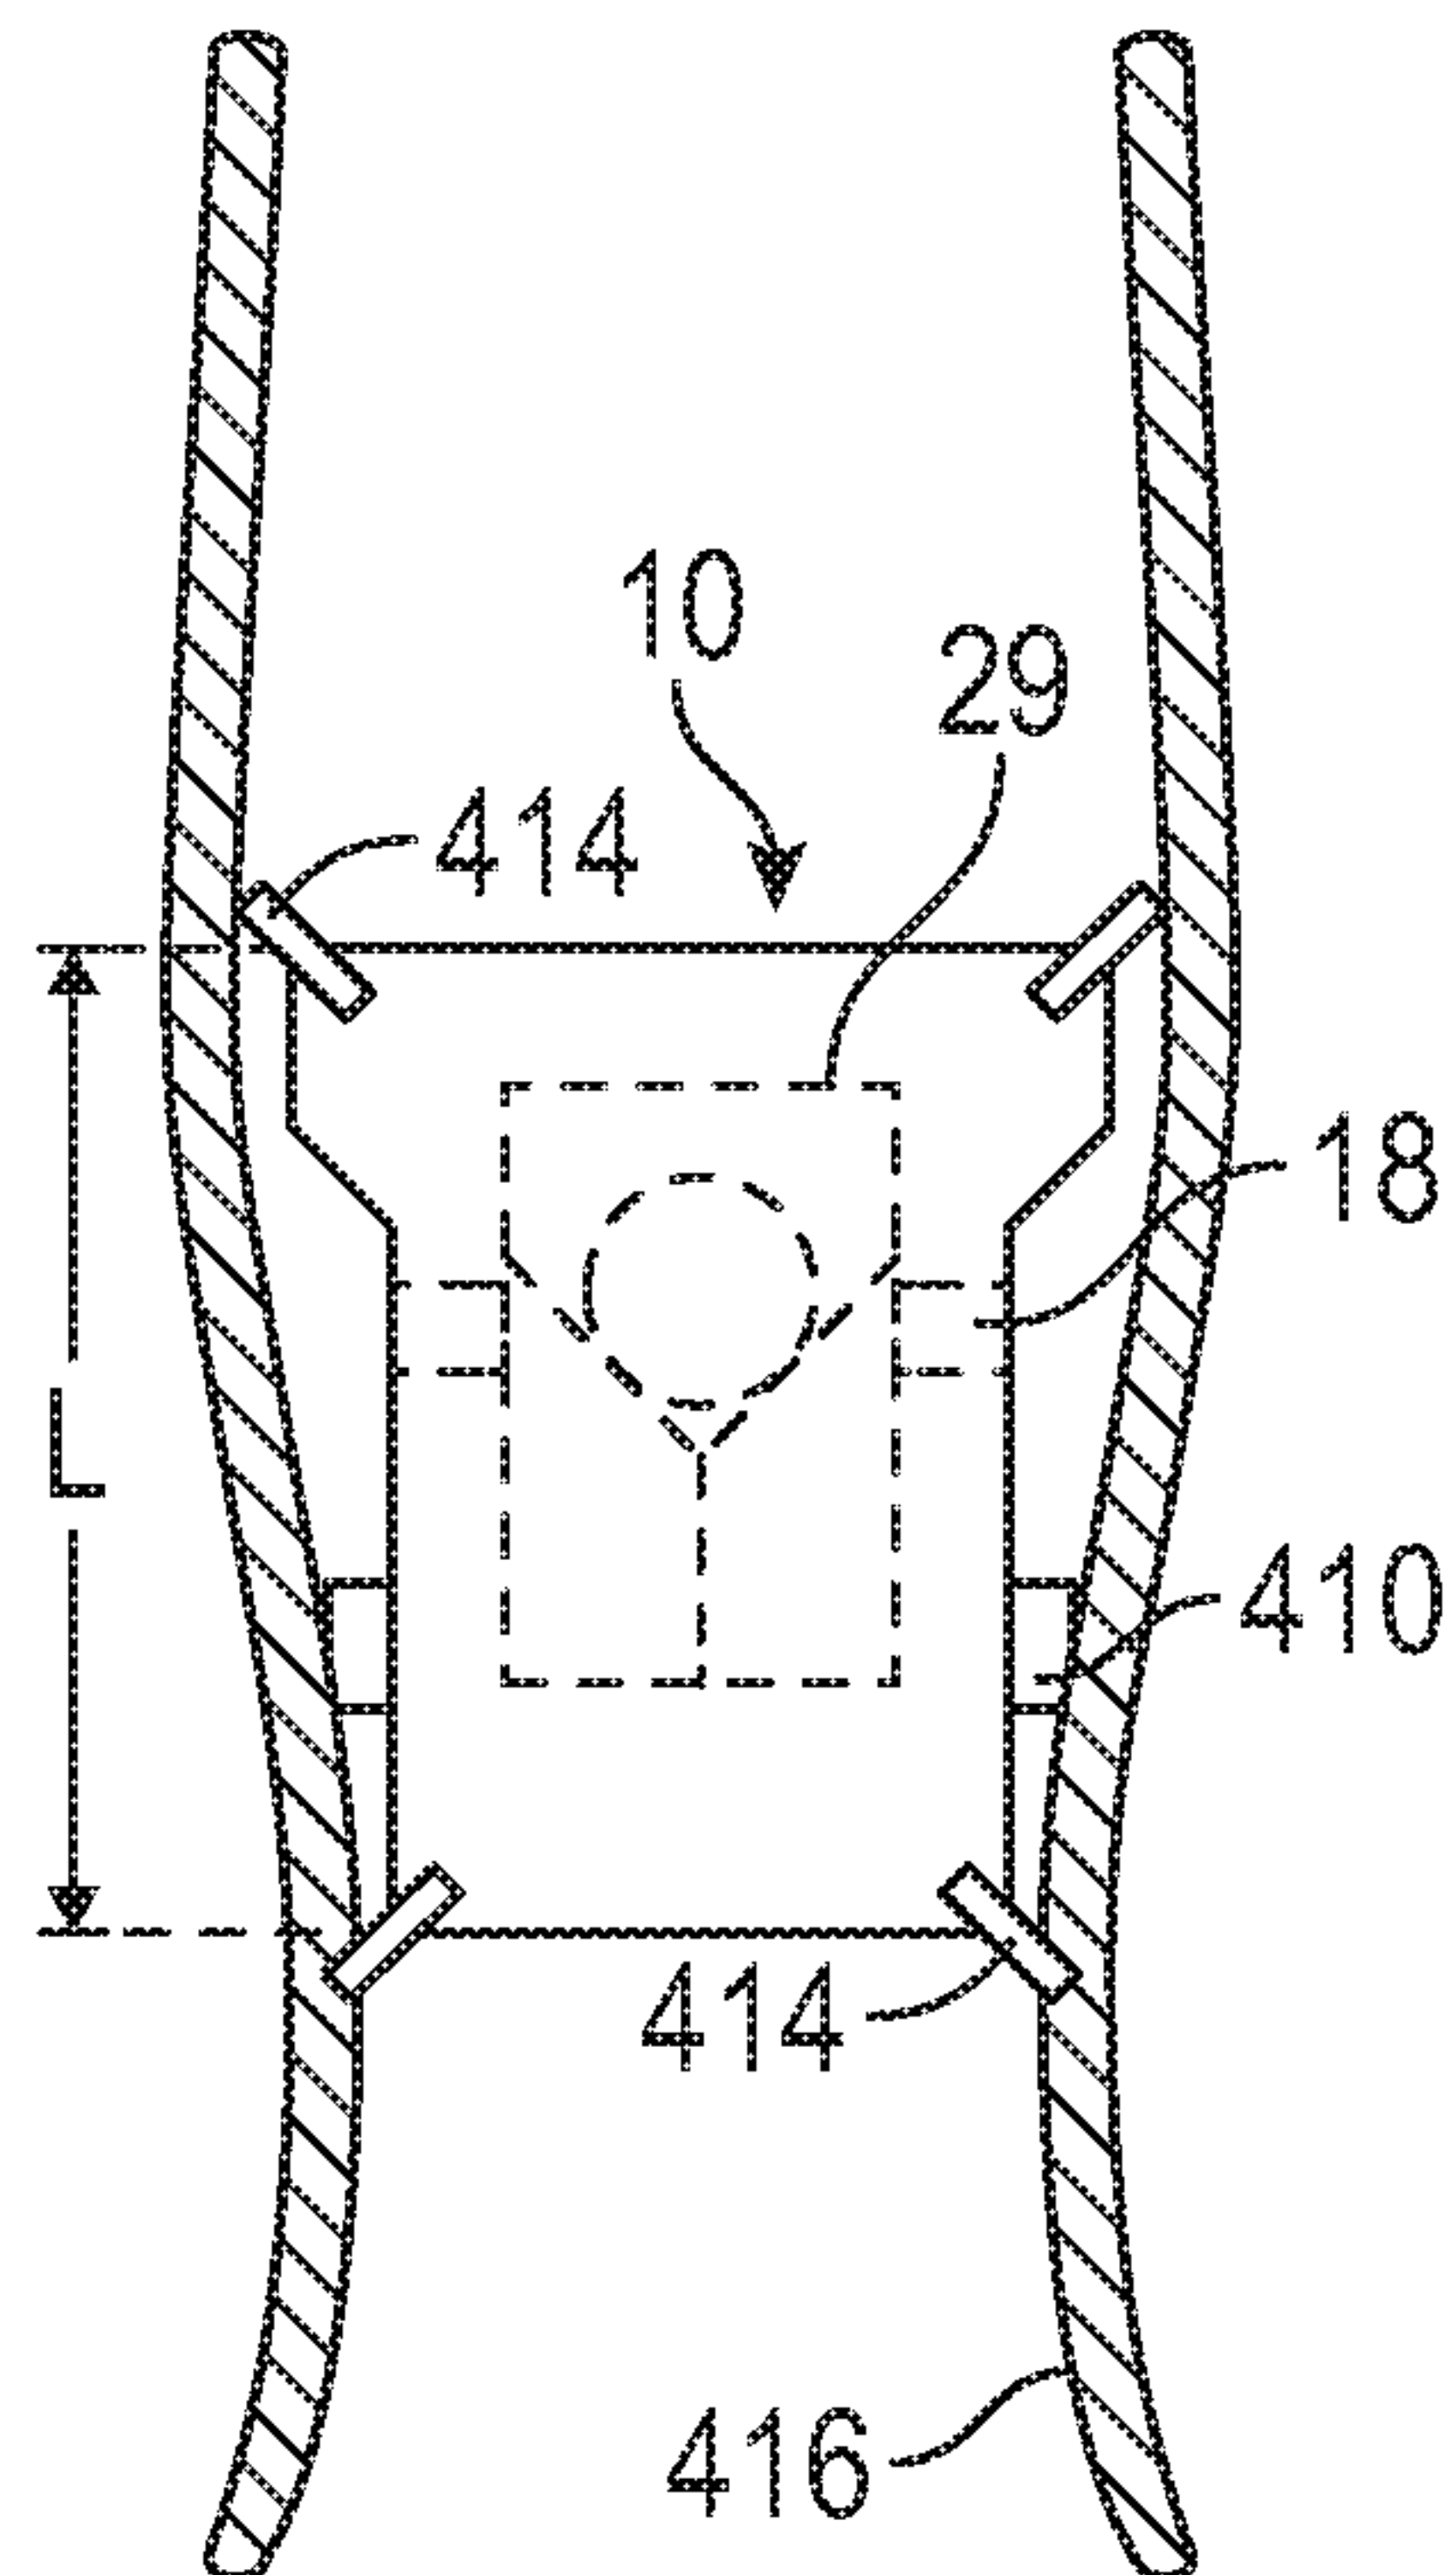


FIG. 4E

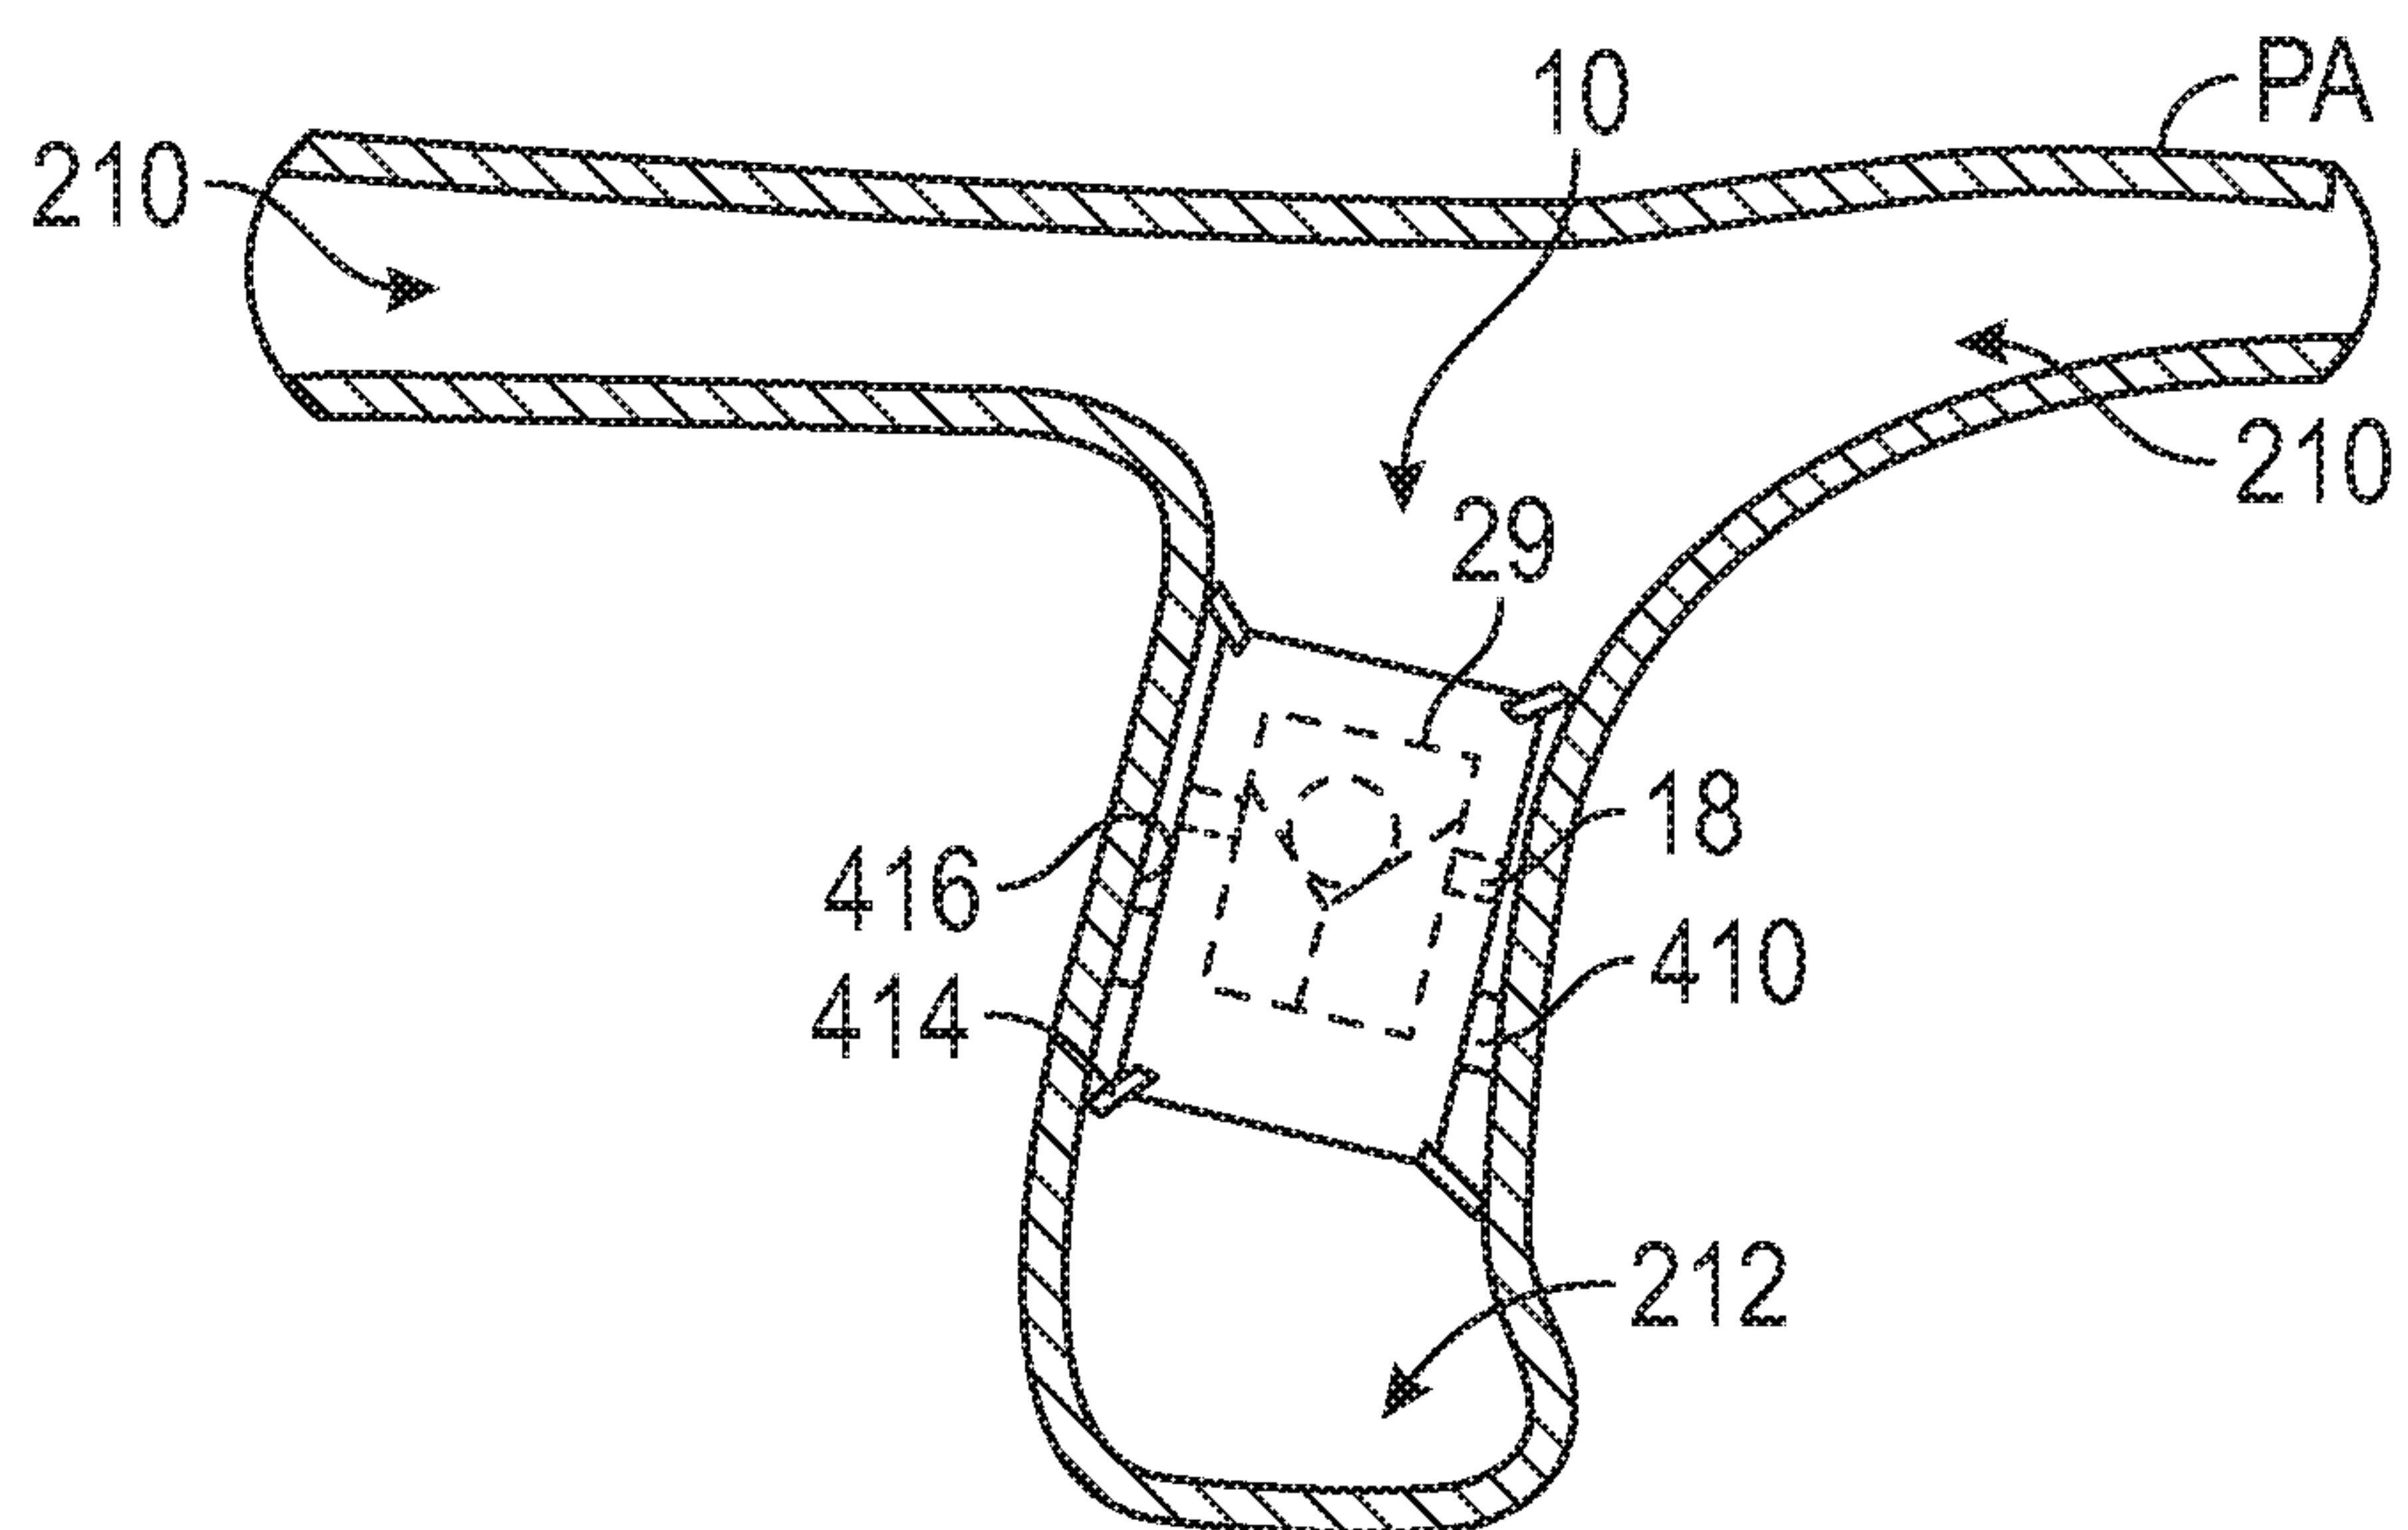
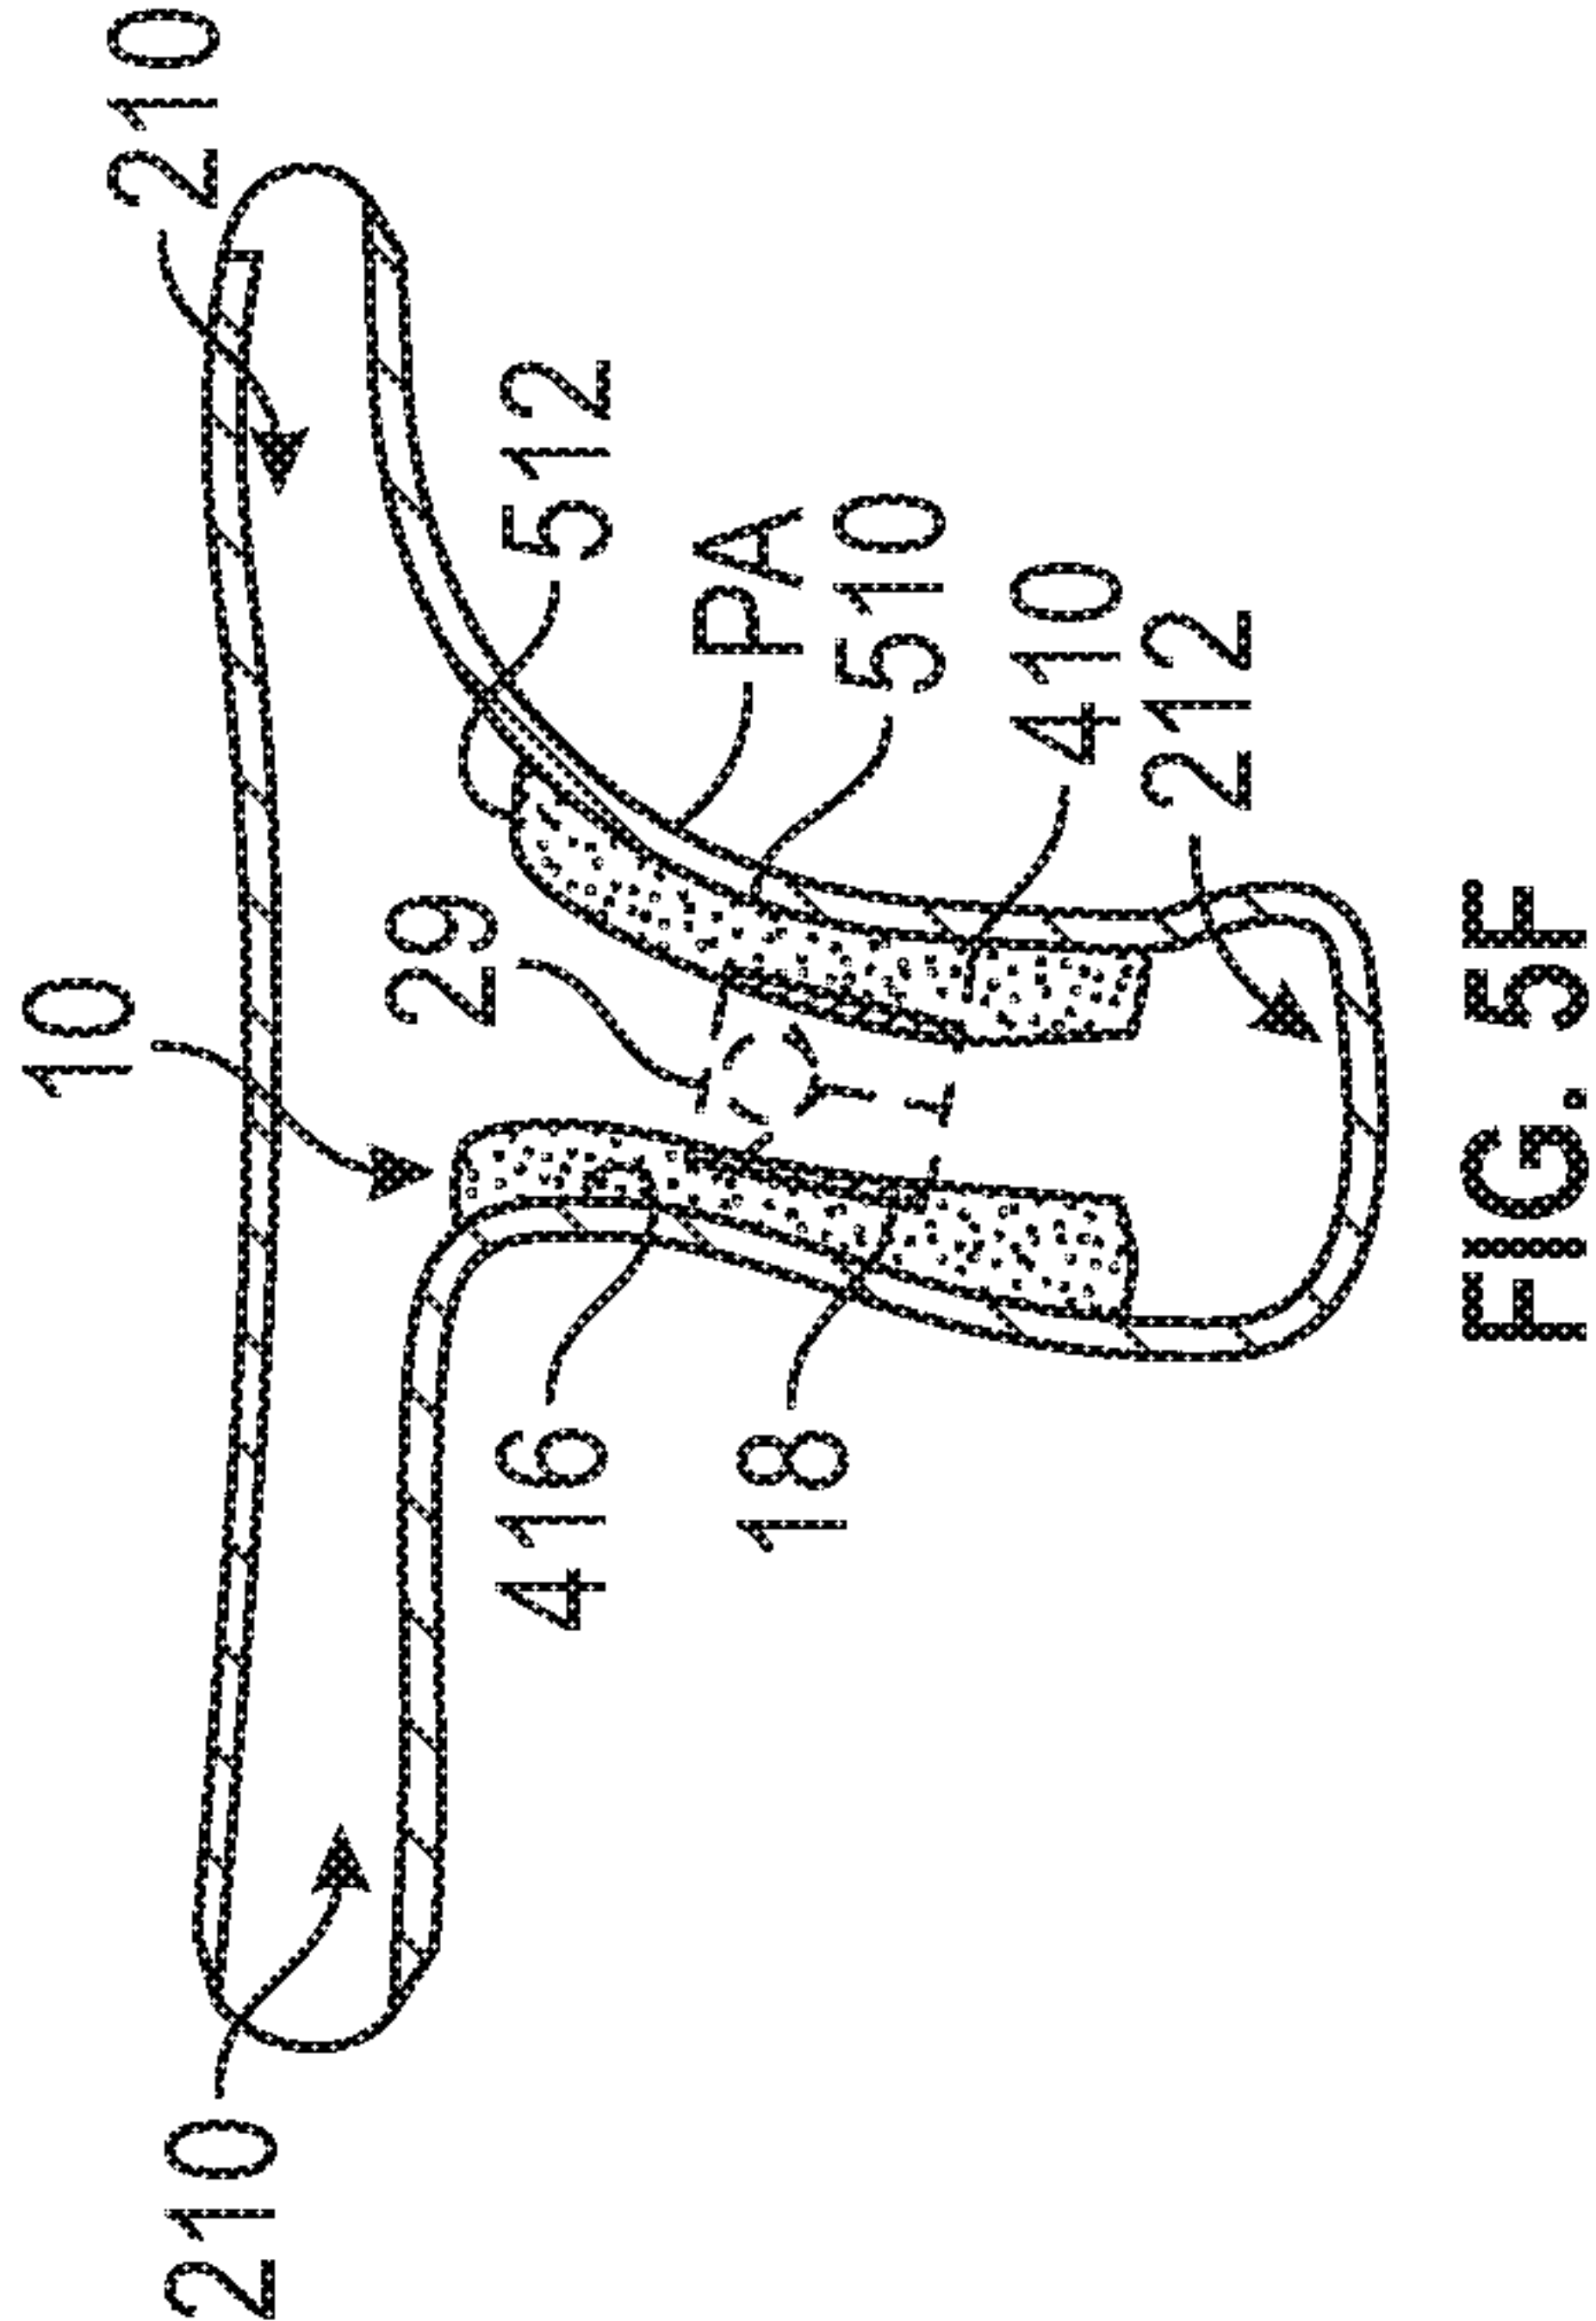
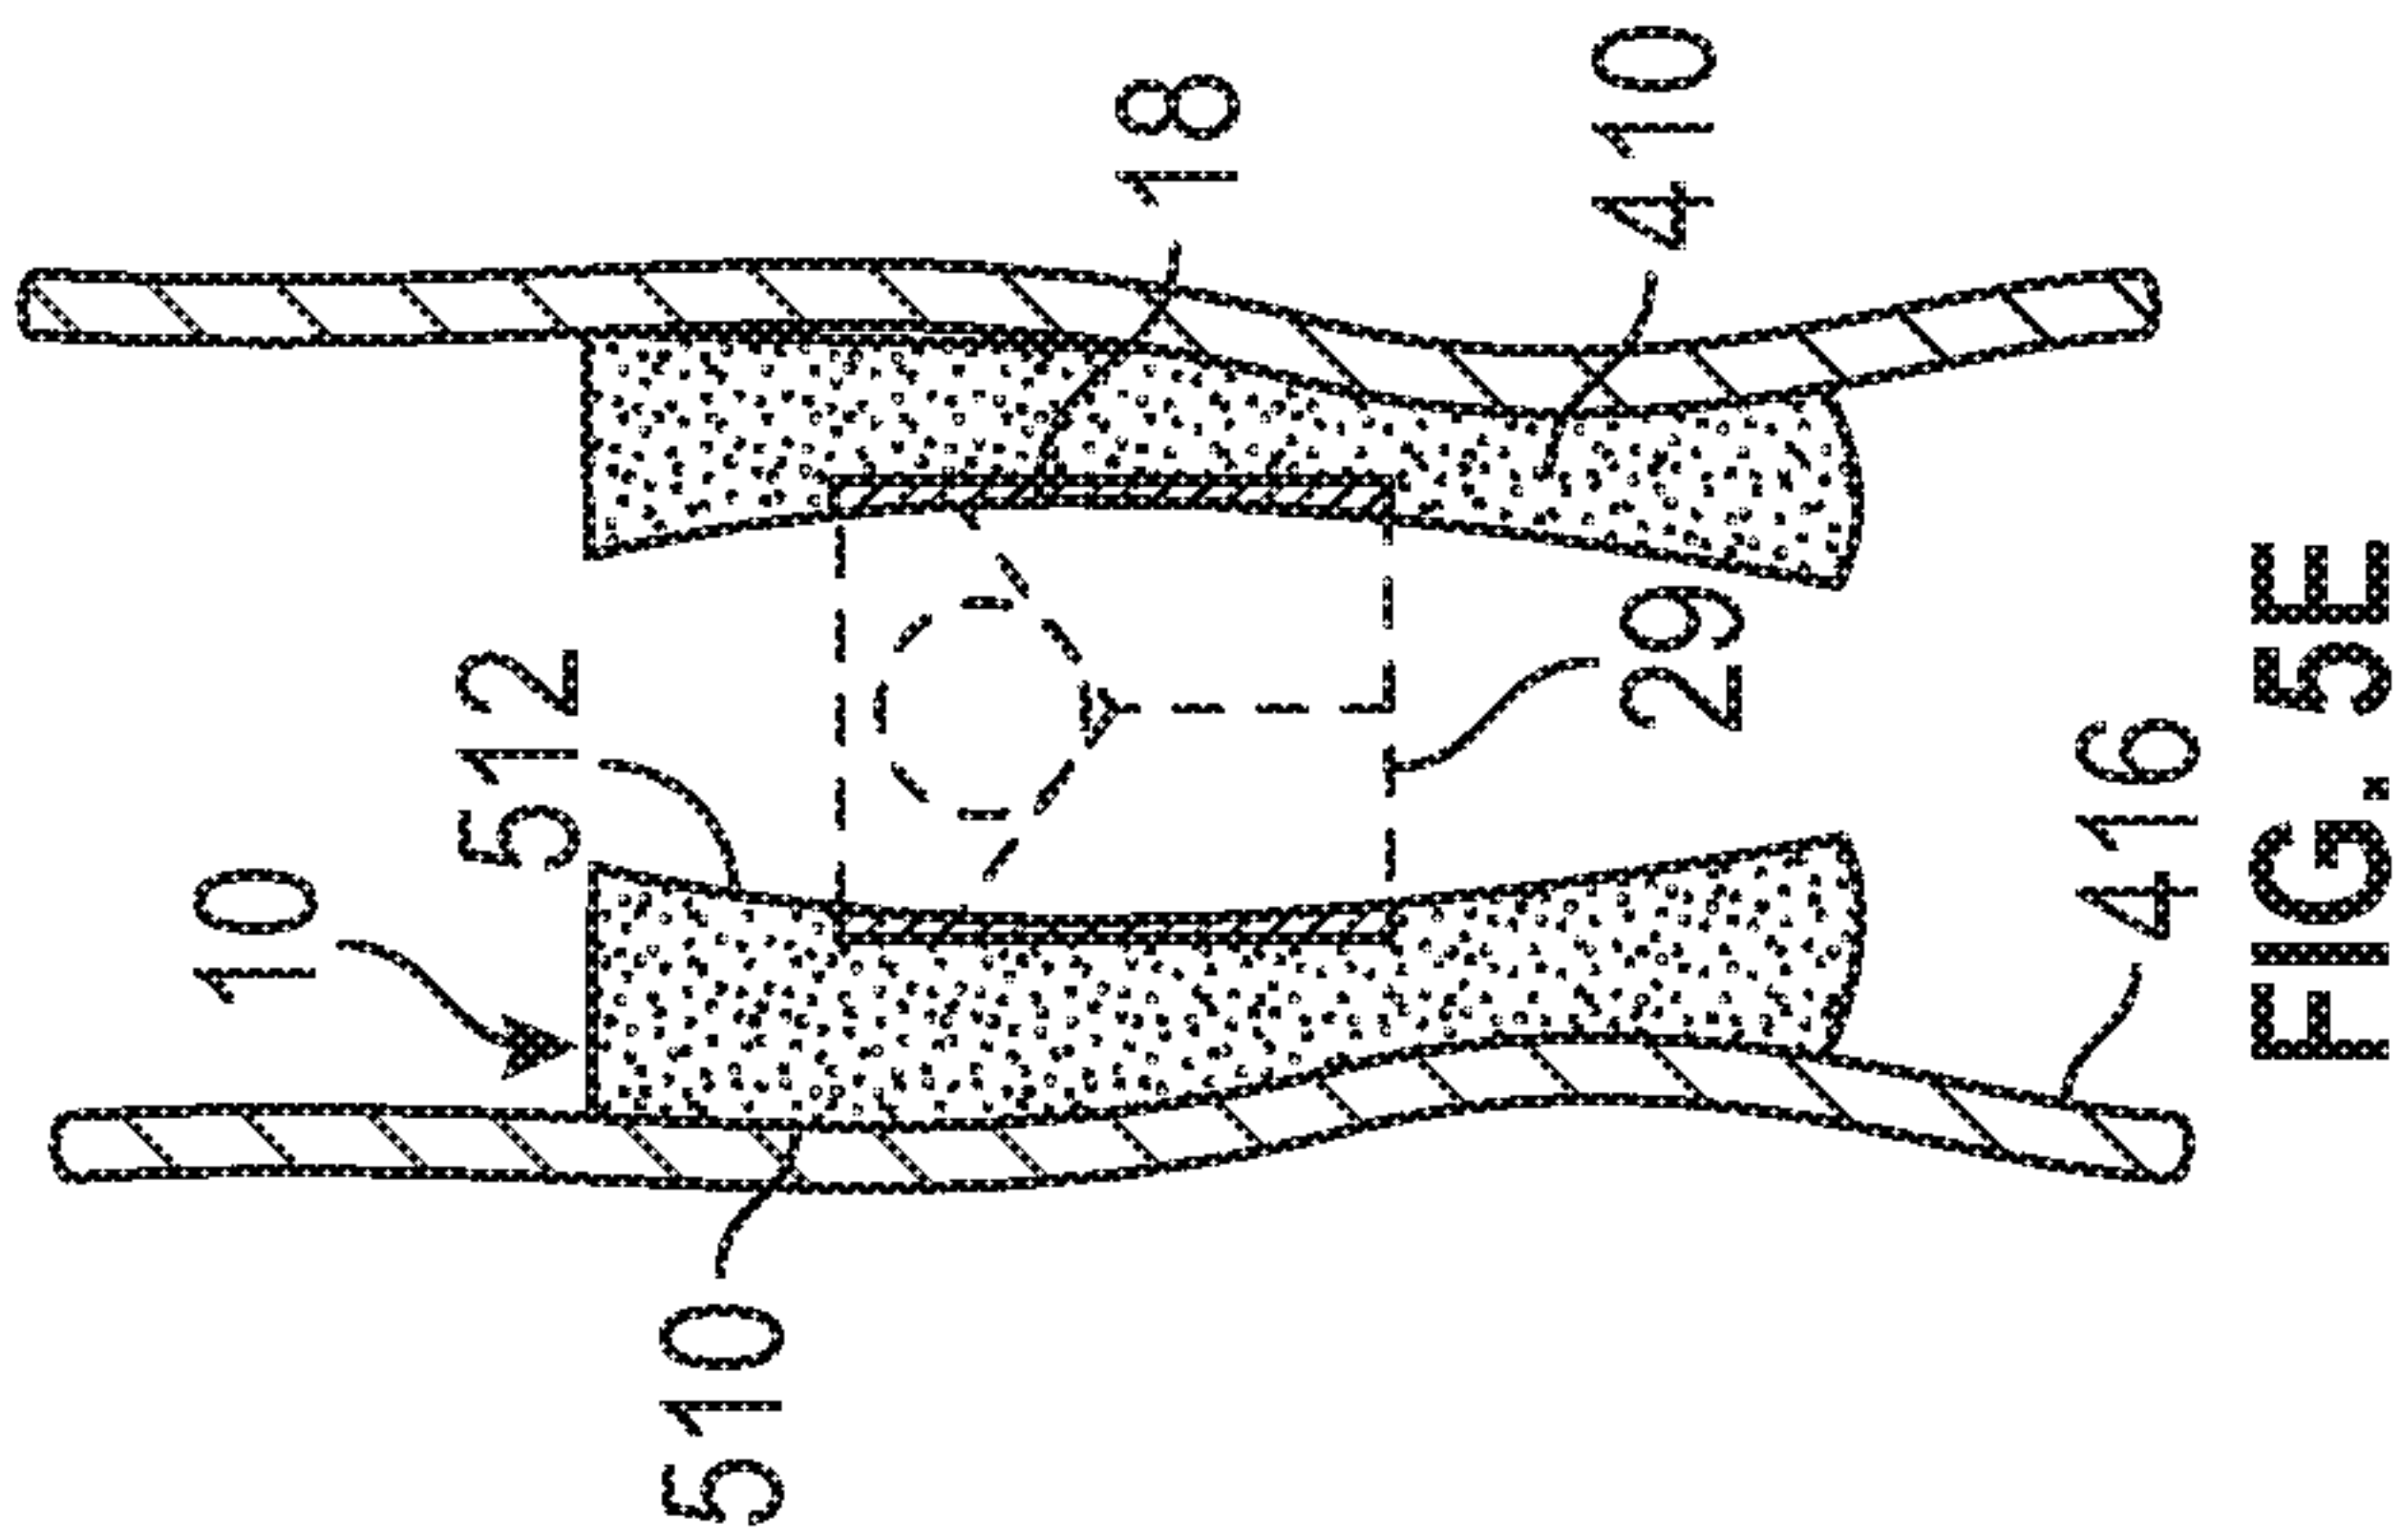
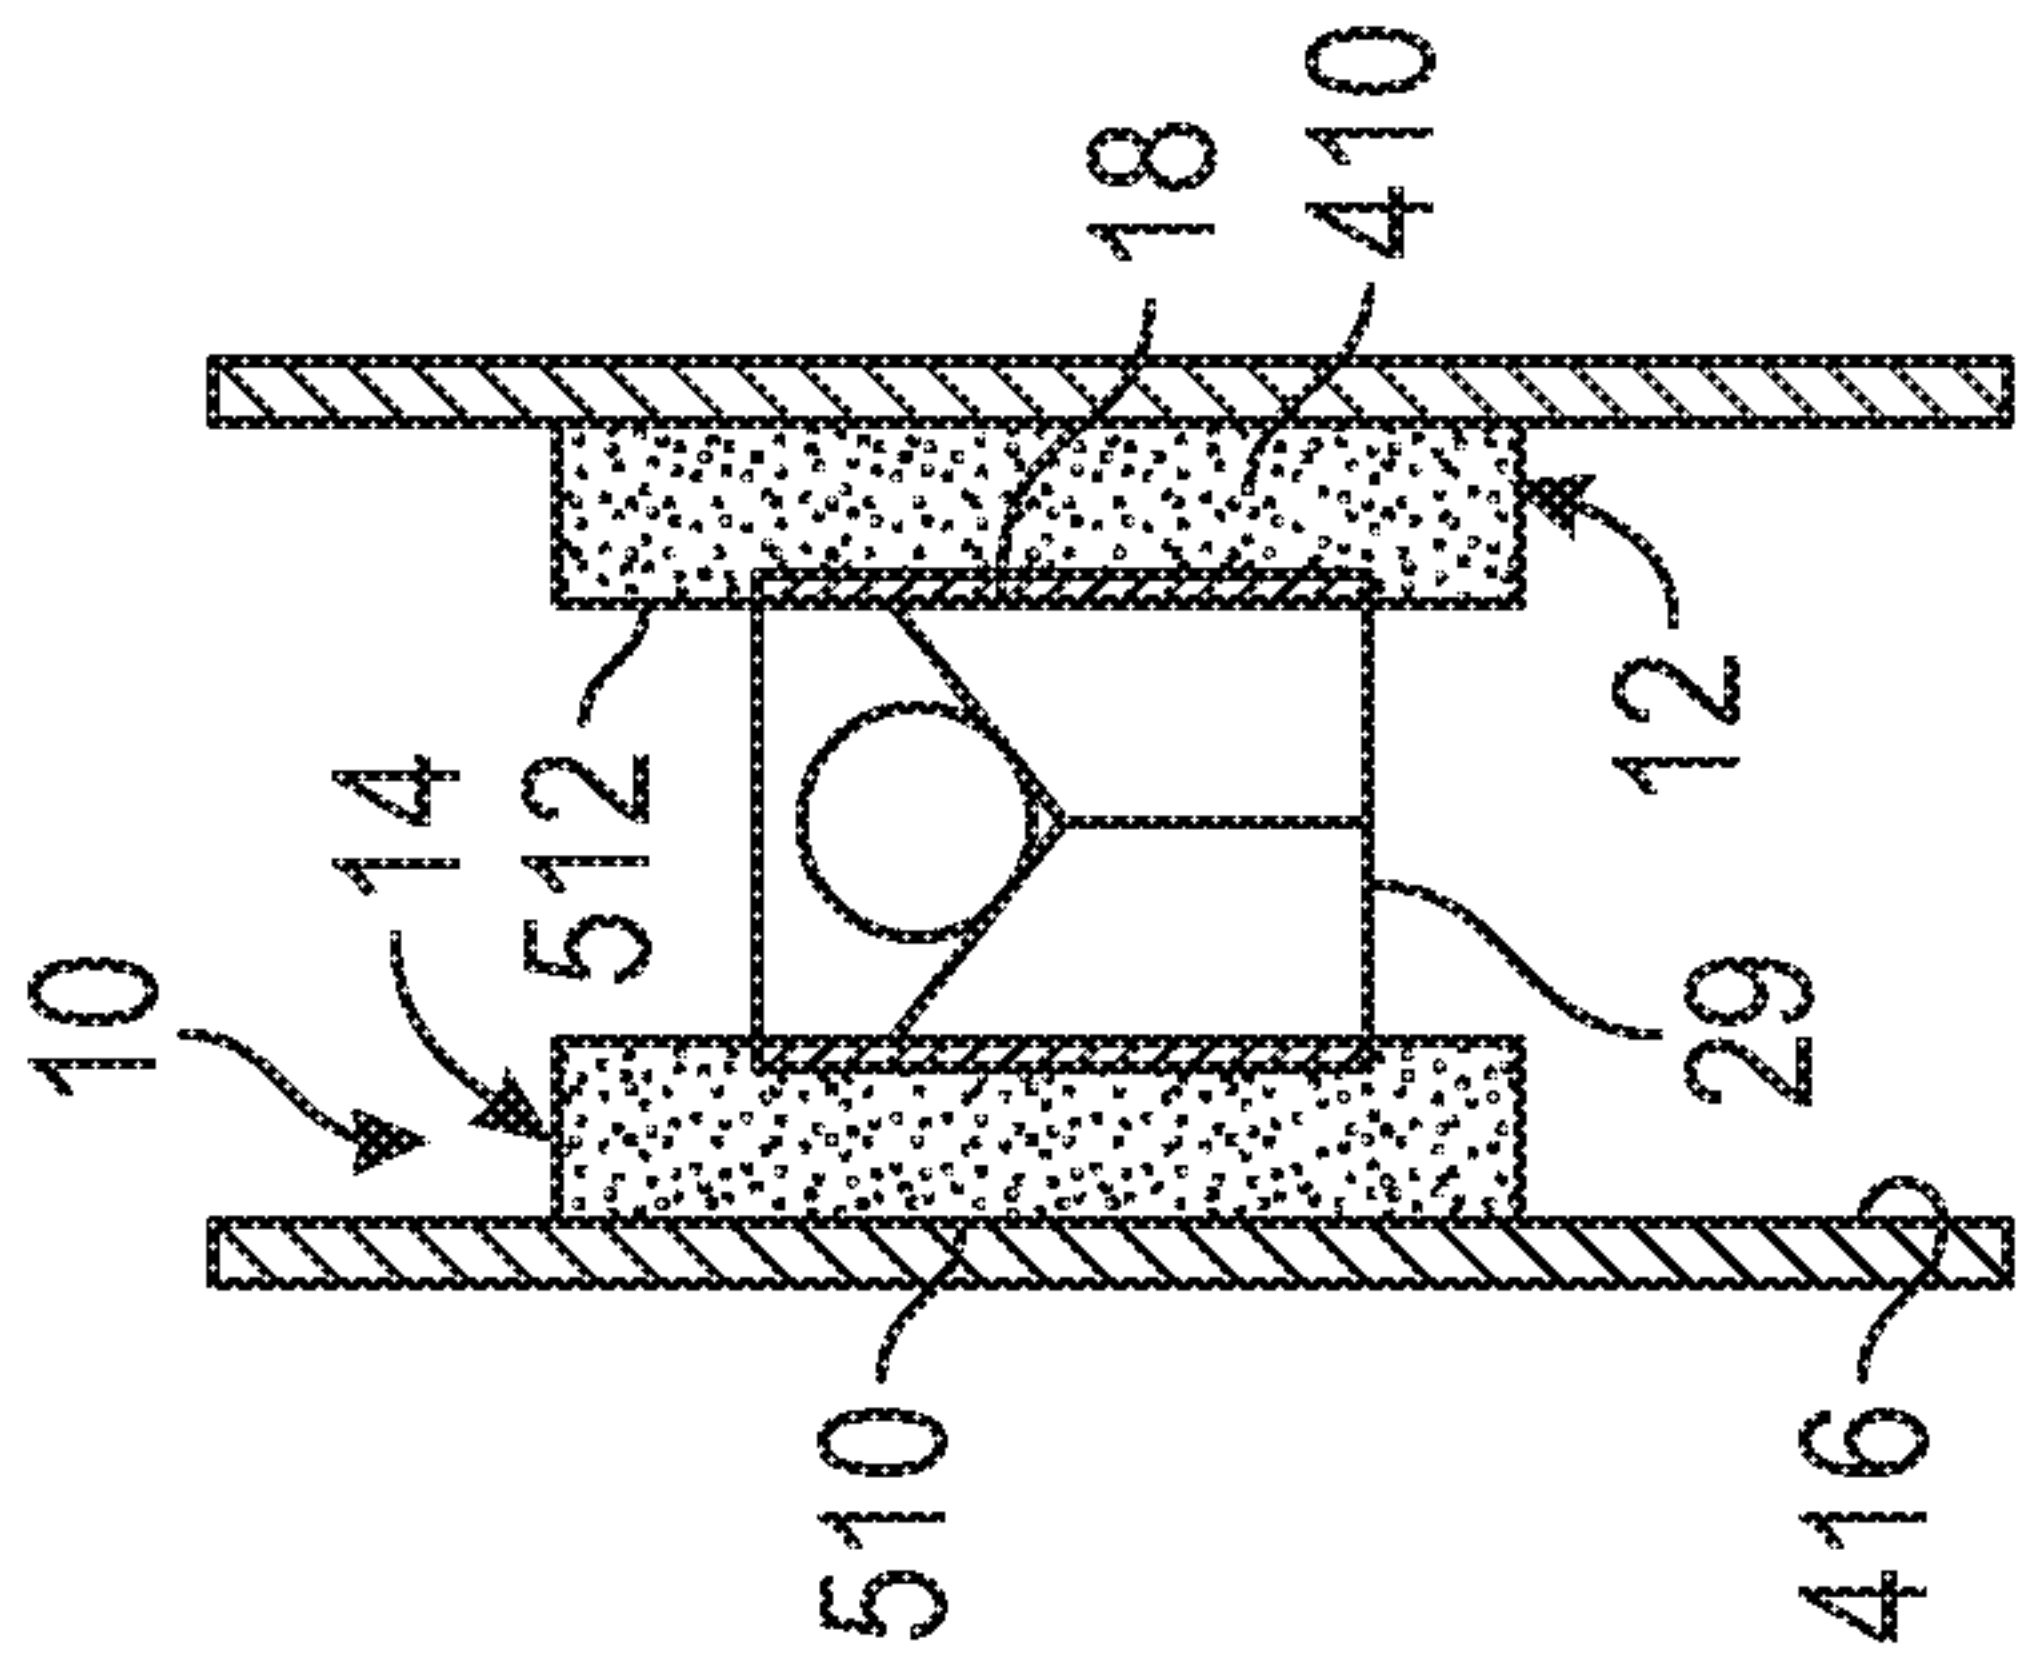
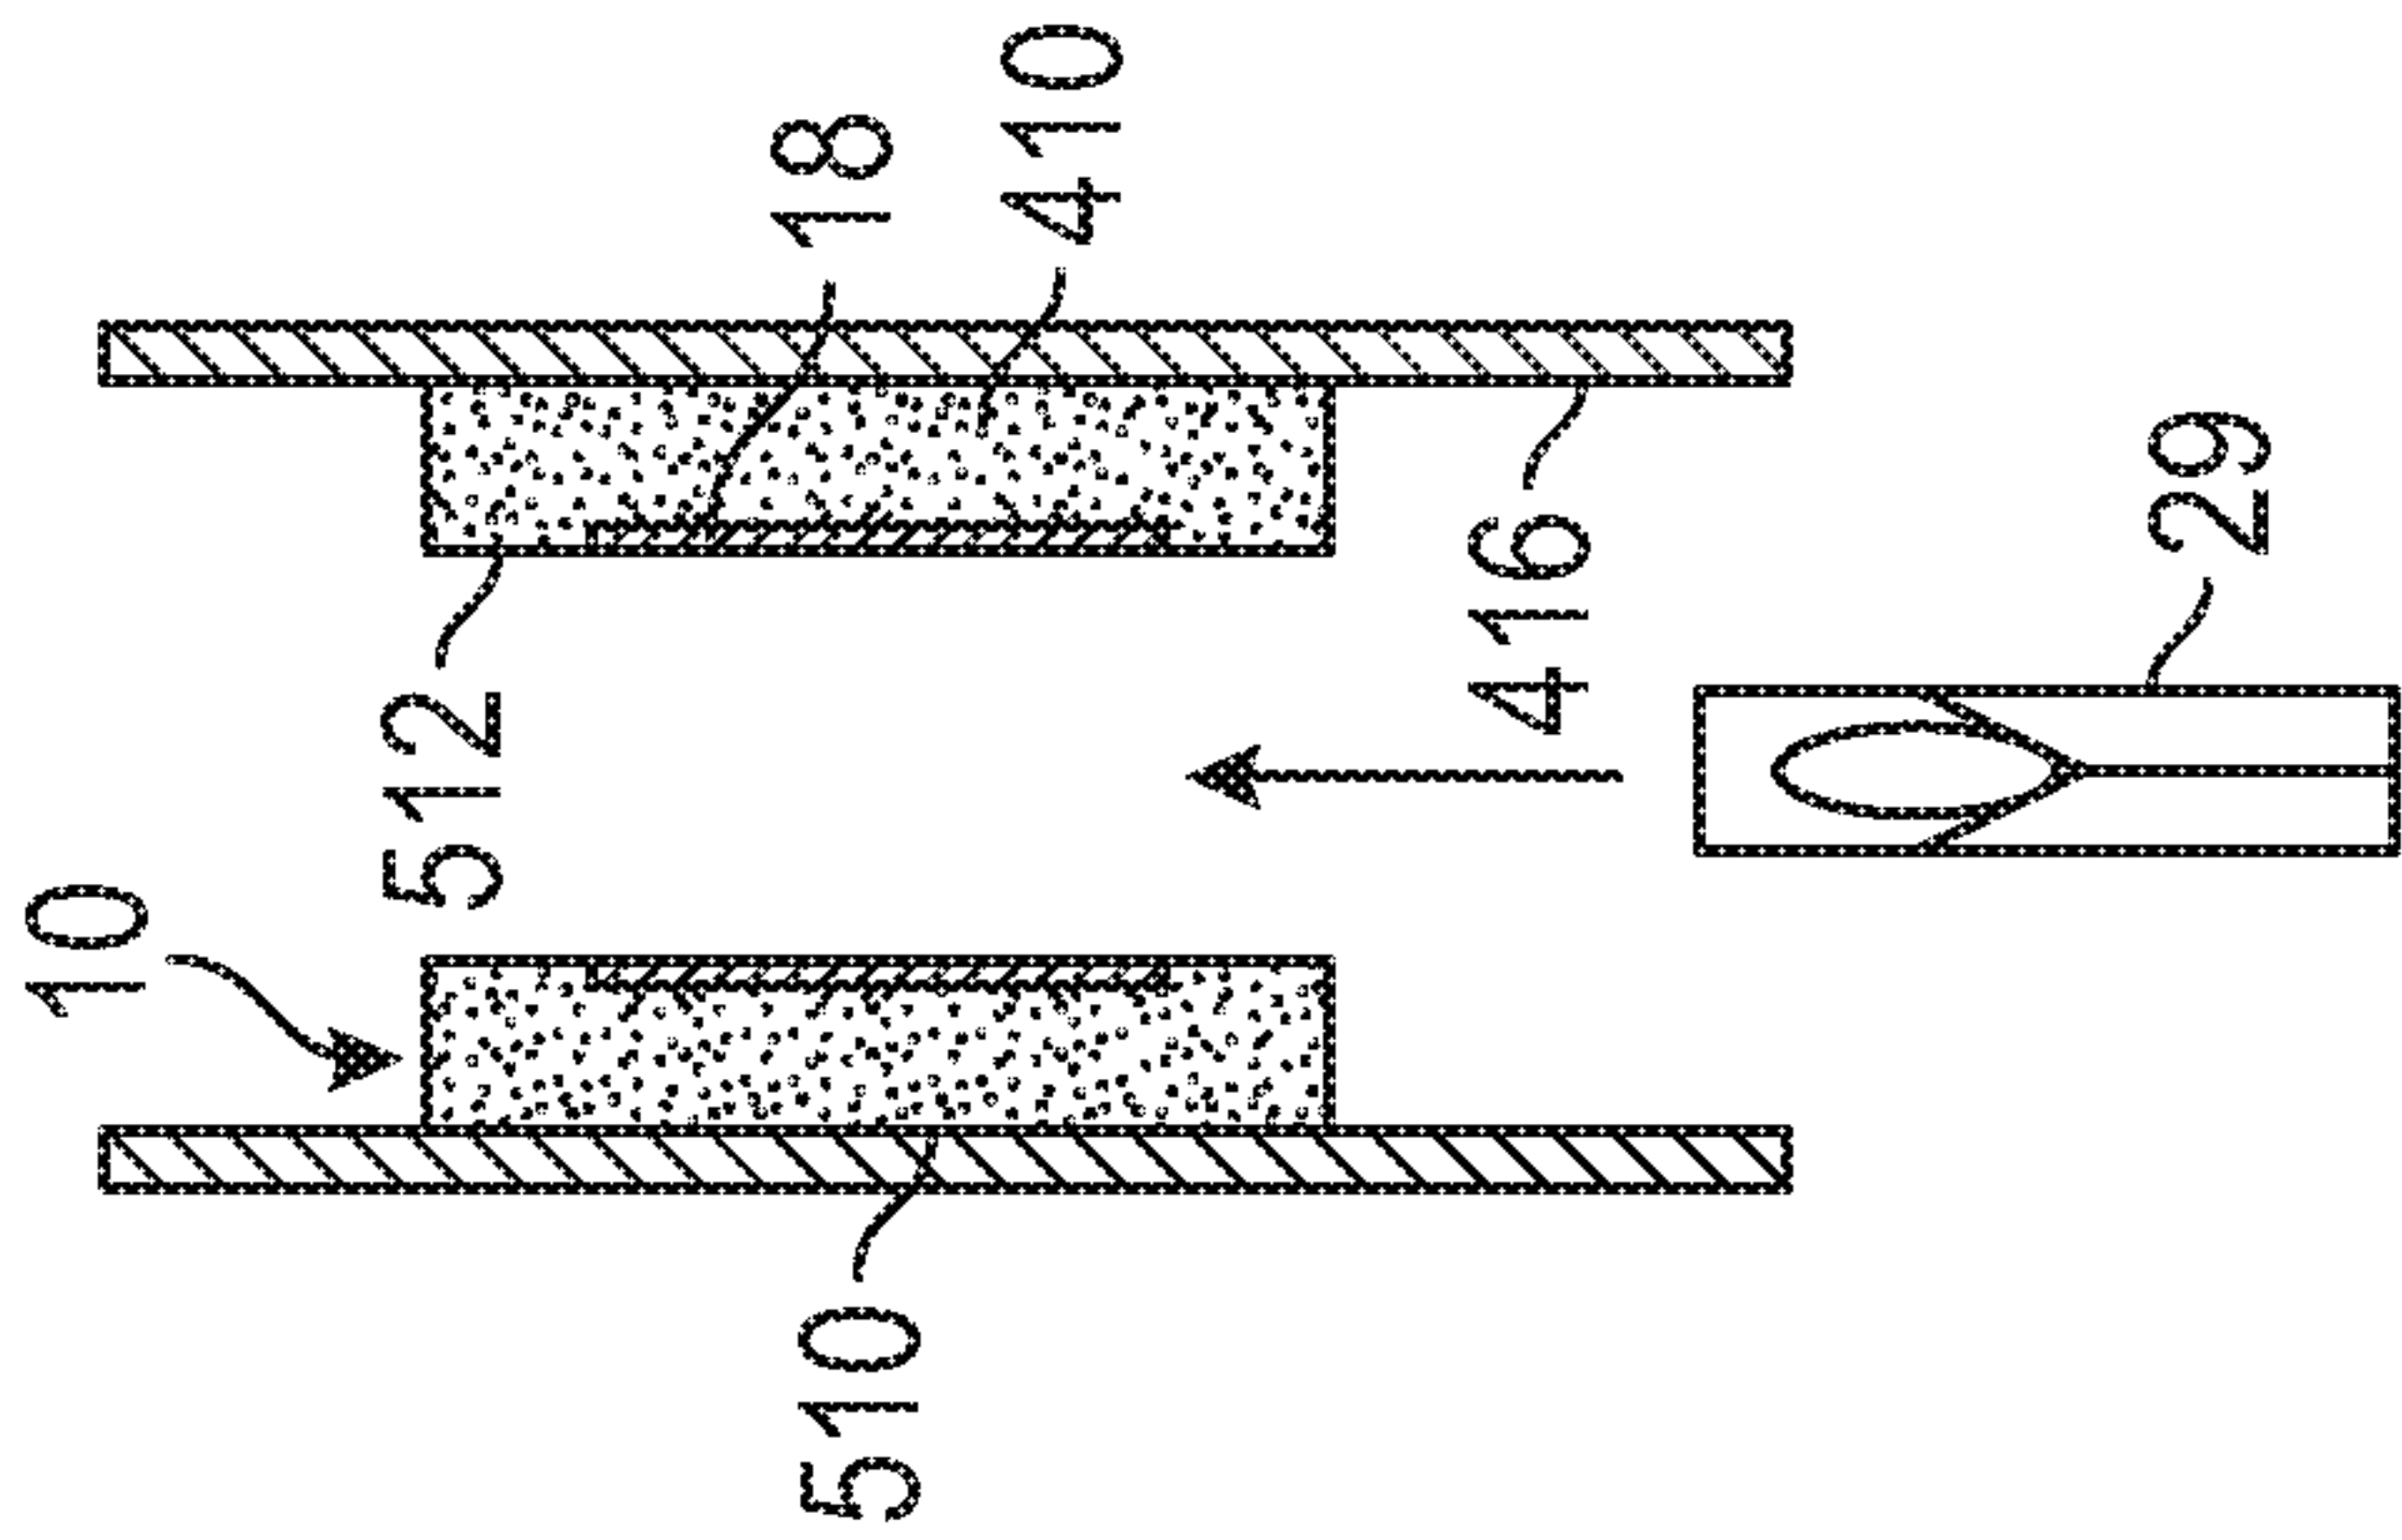
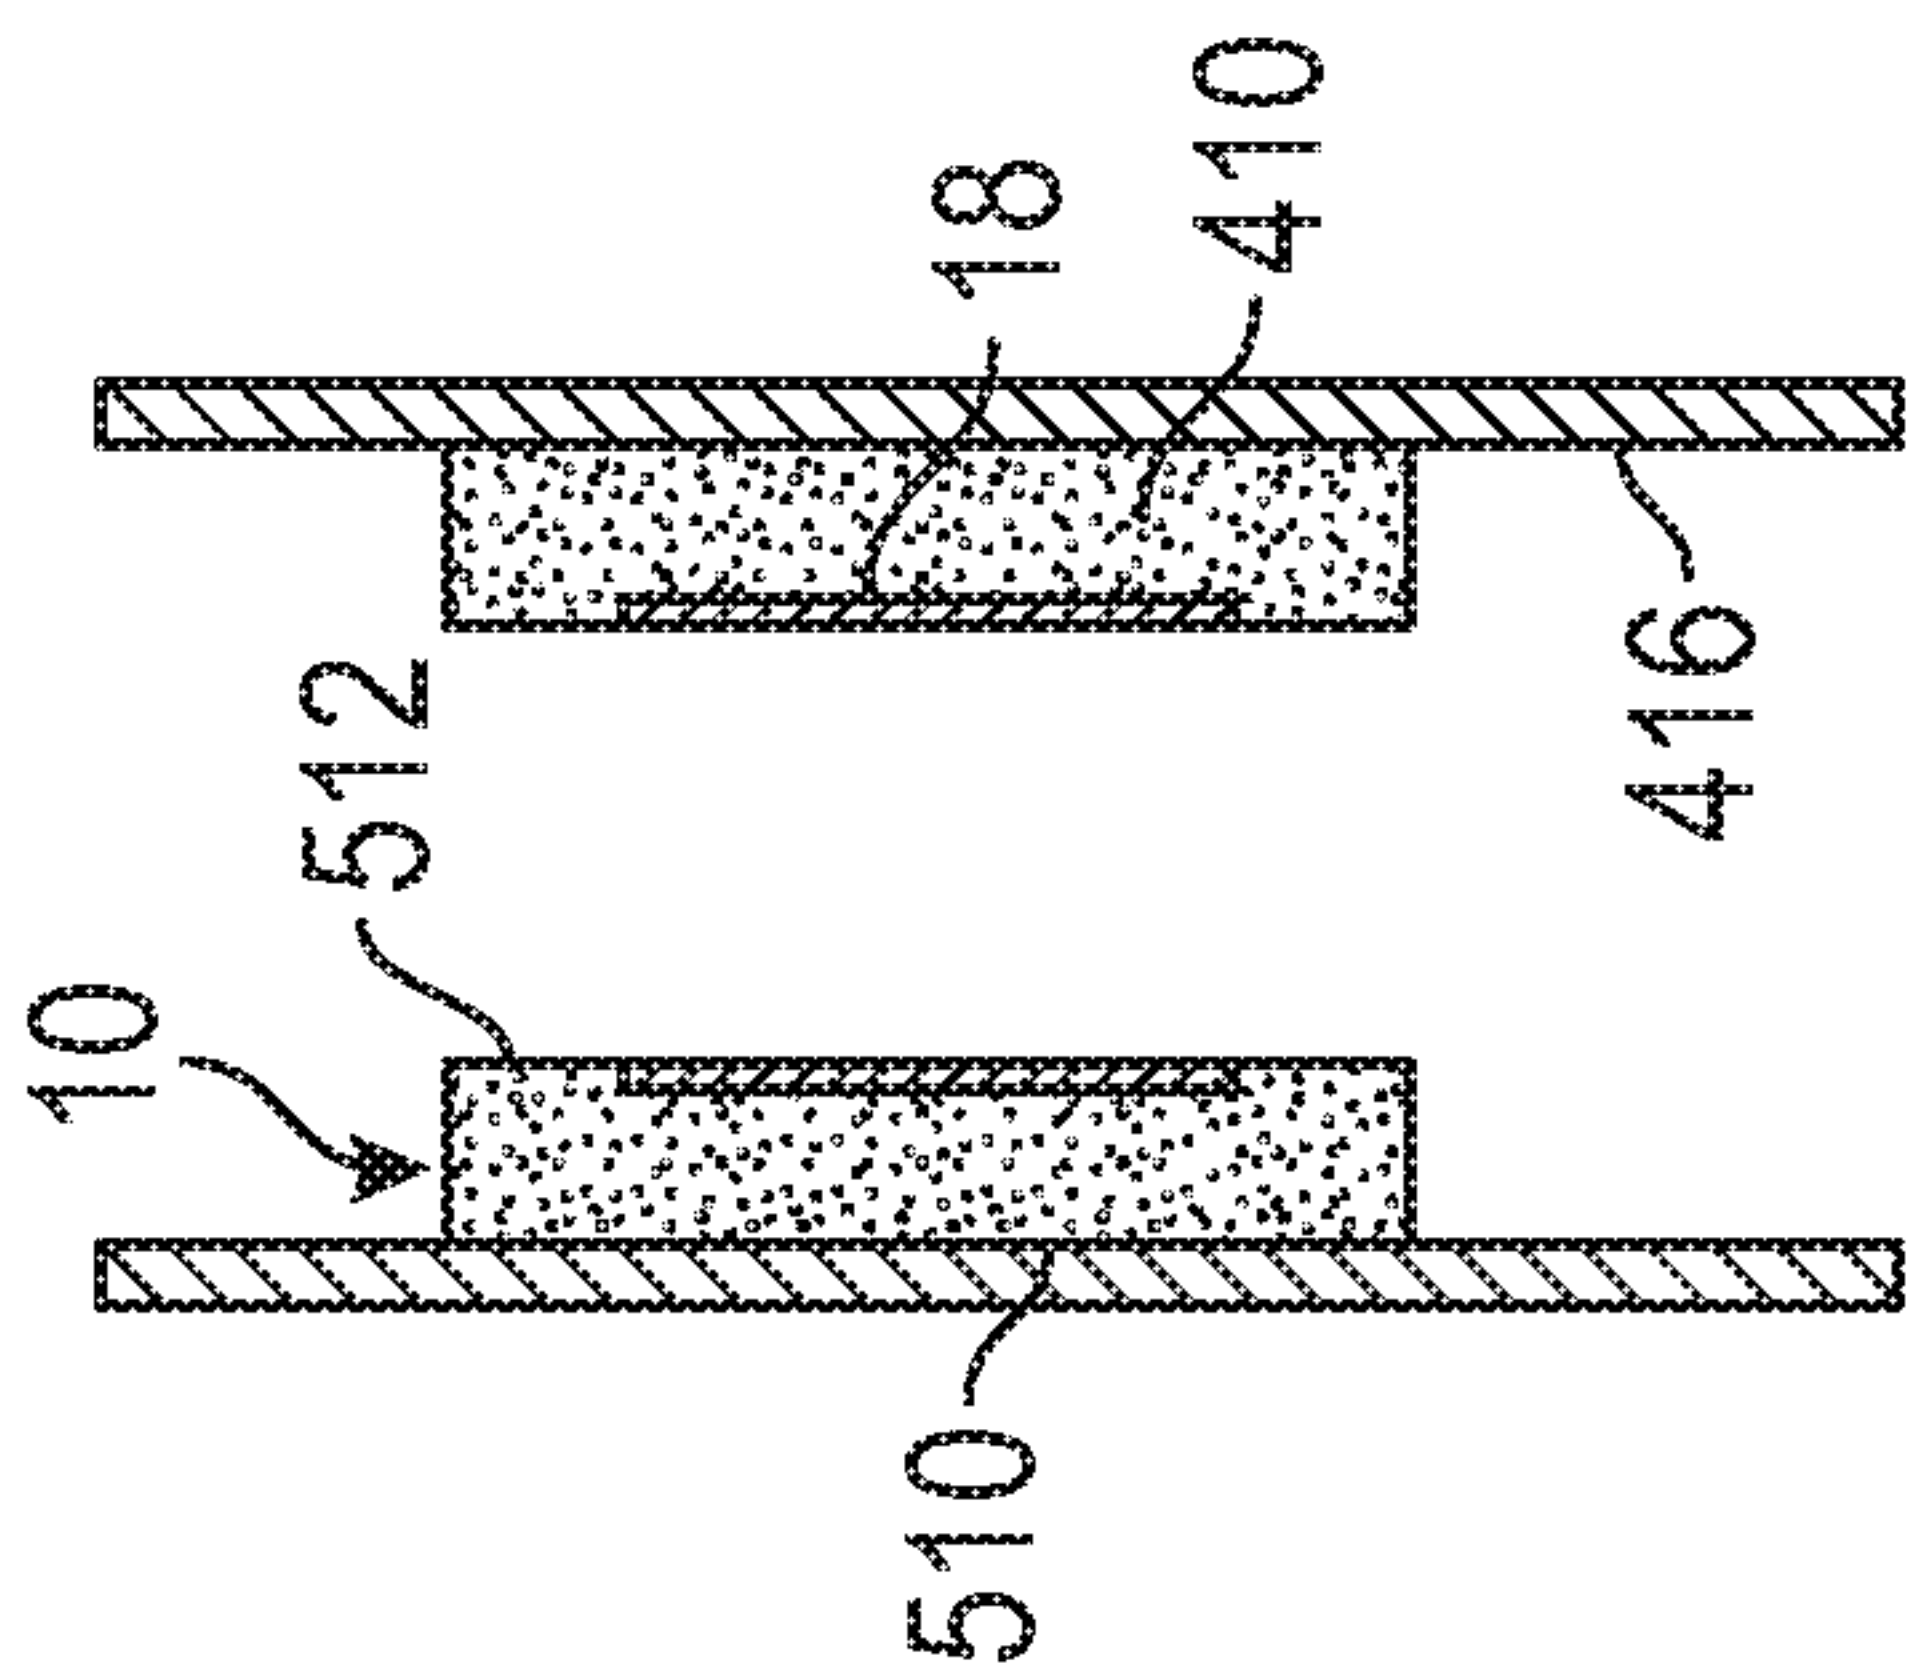
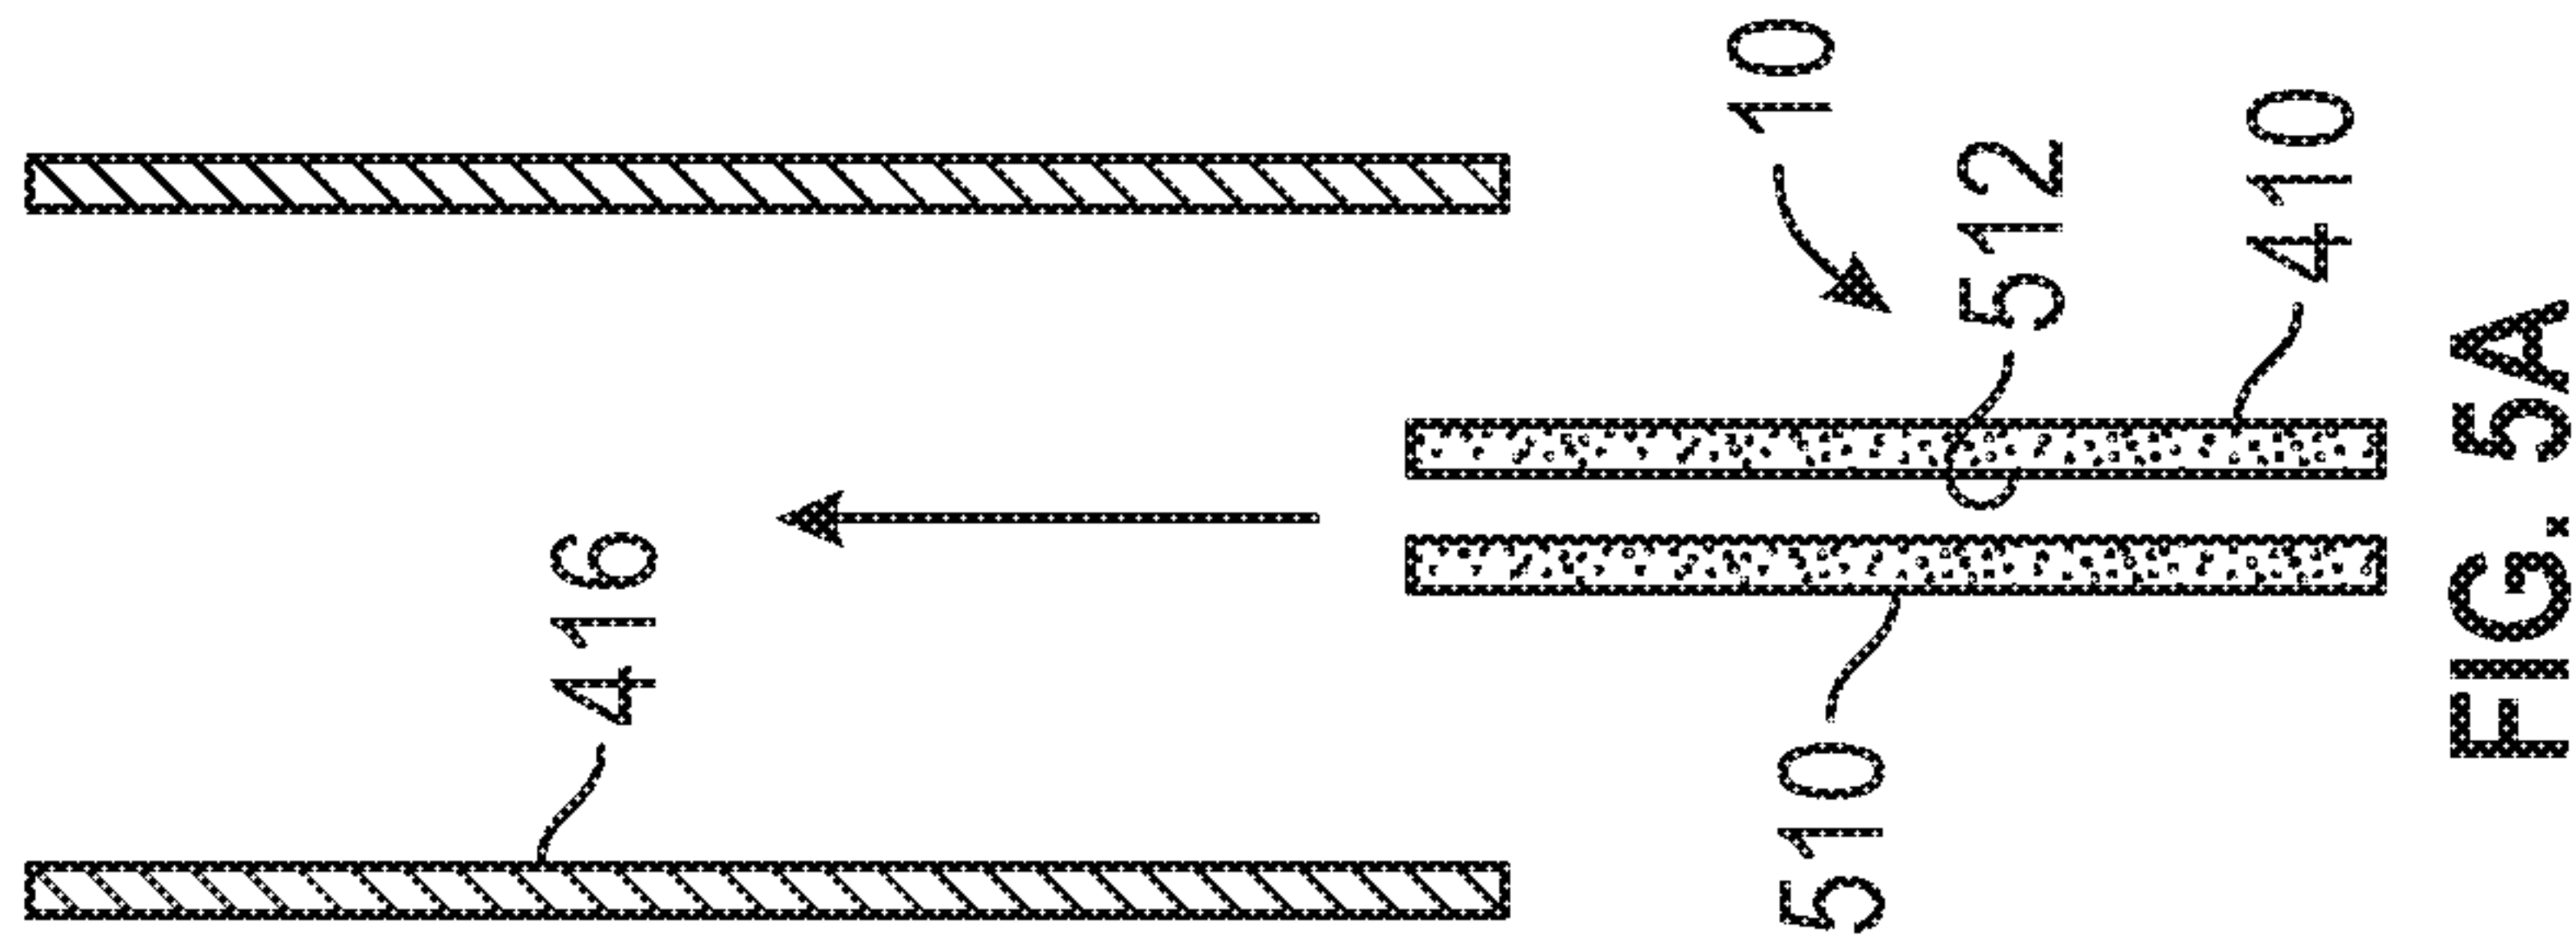


FIG. 4F



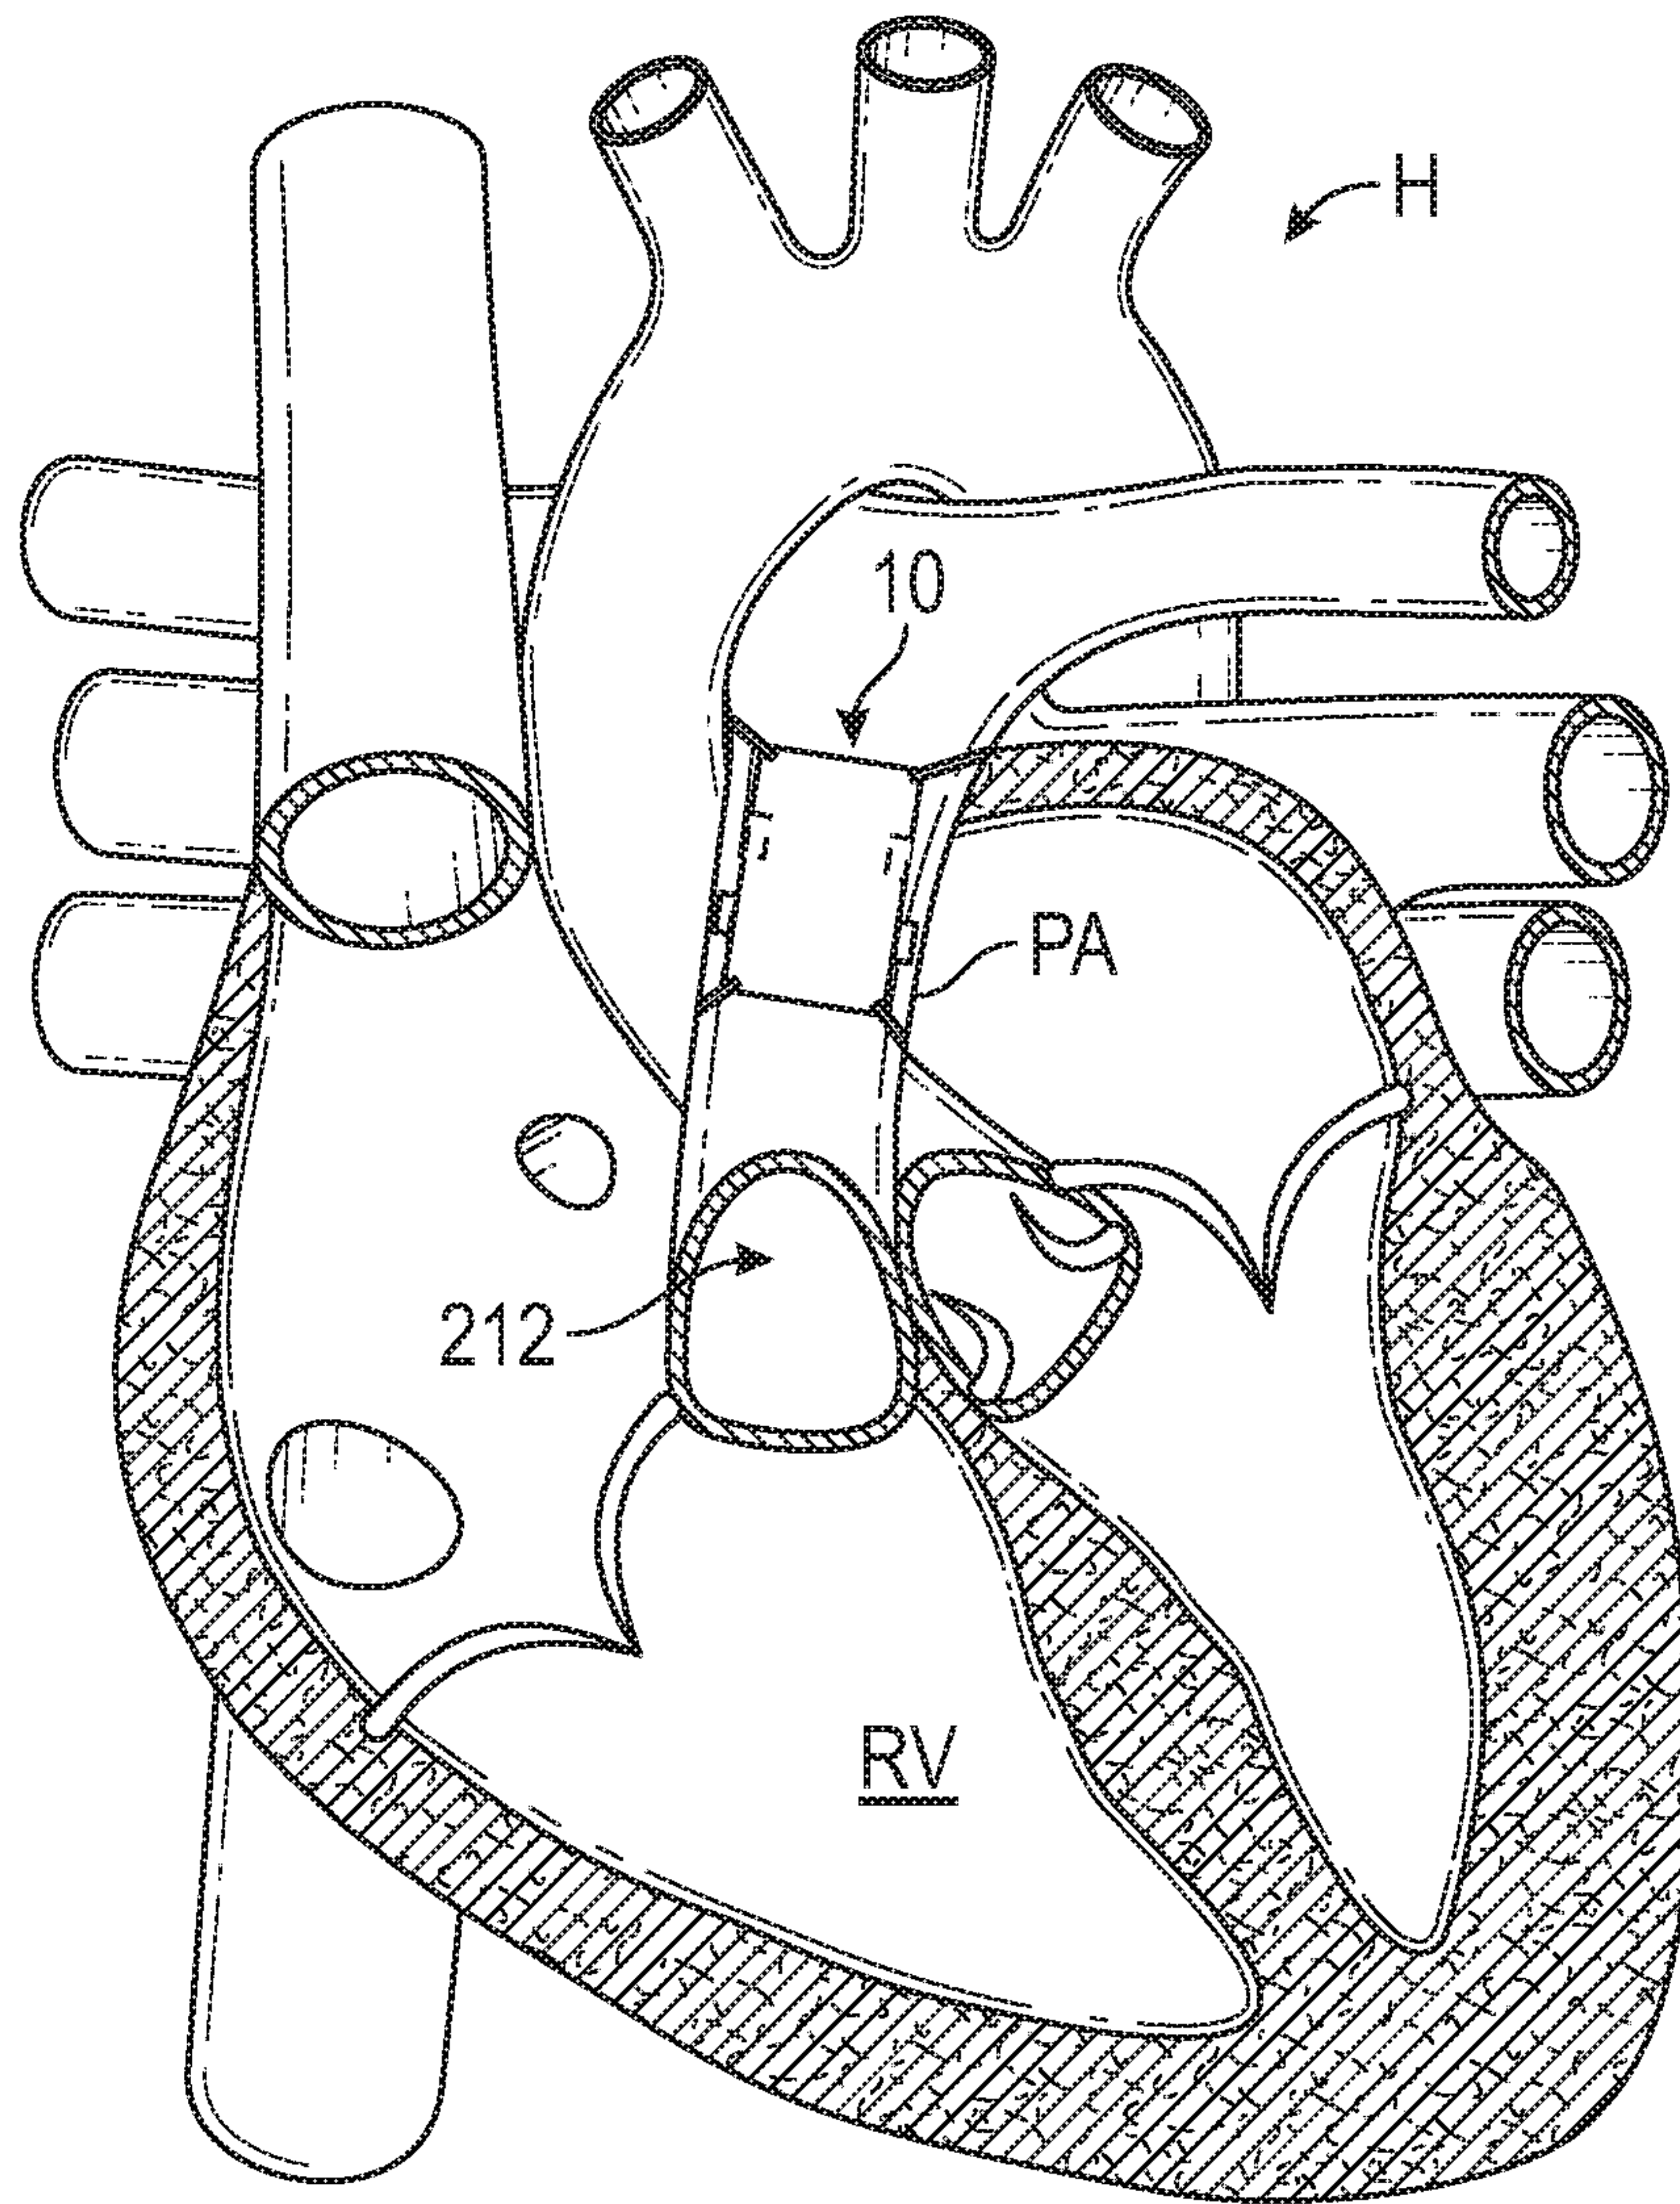


FIG. 6A

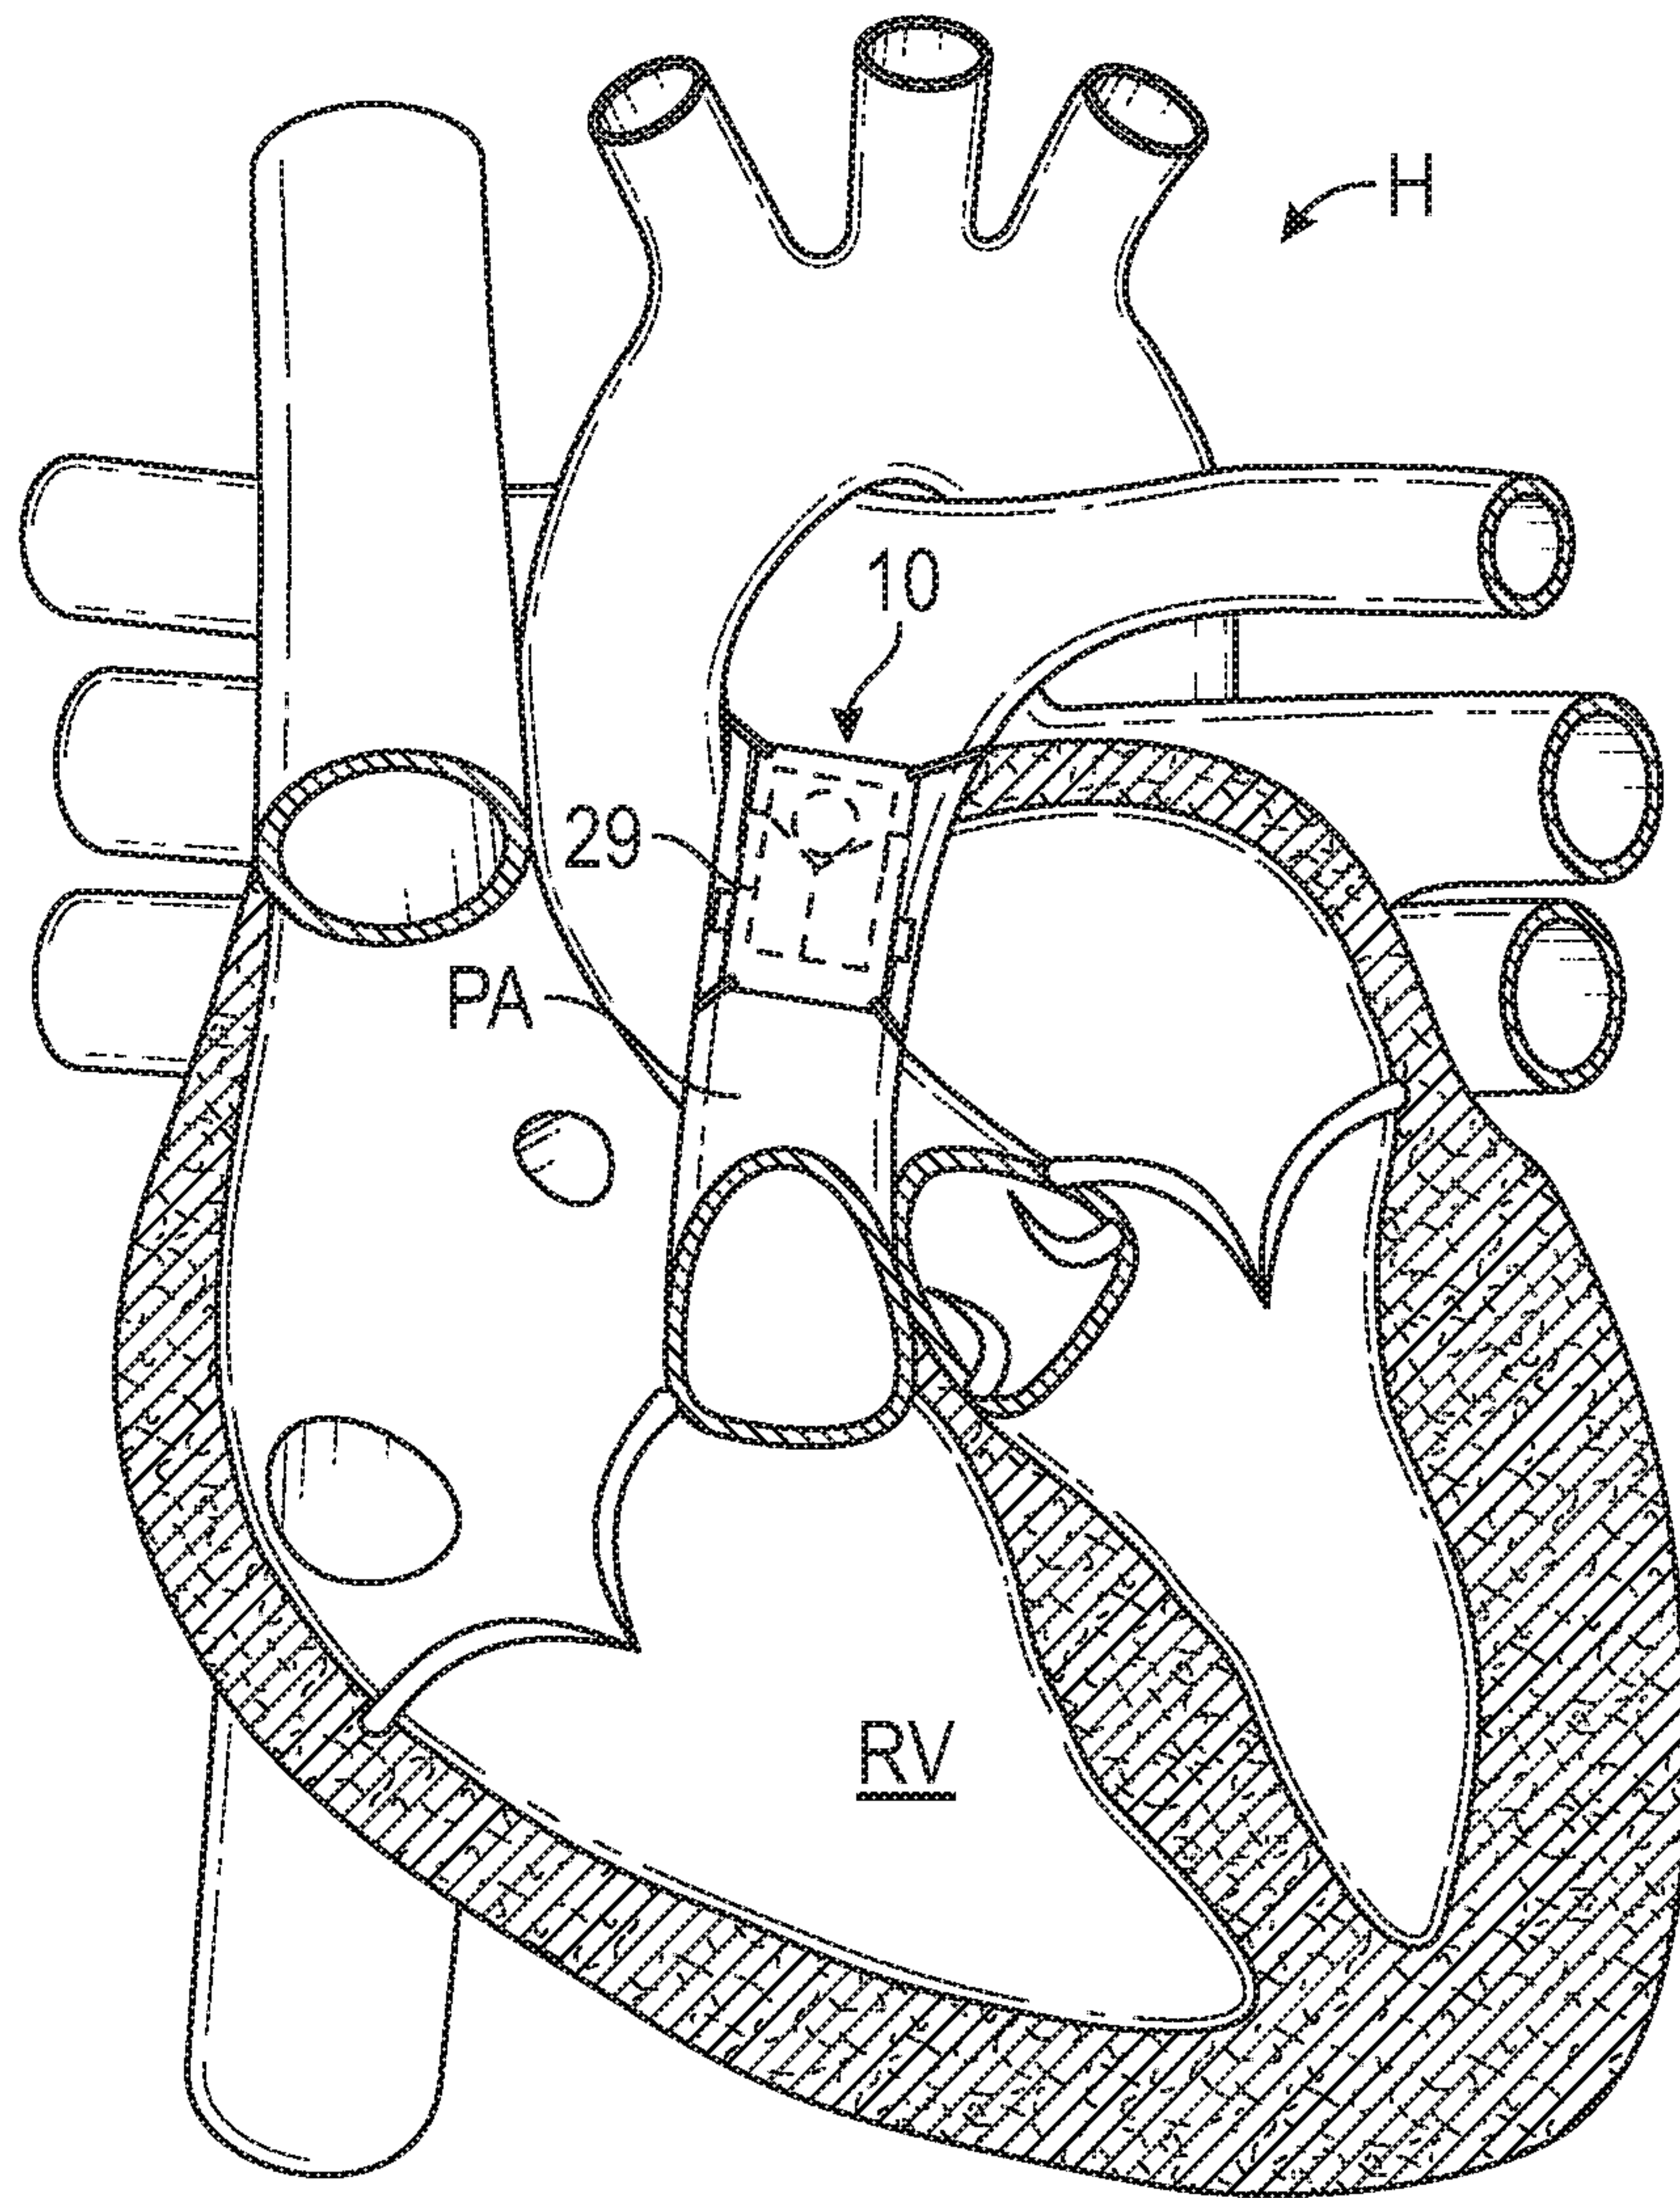


FIG. 6B

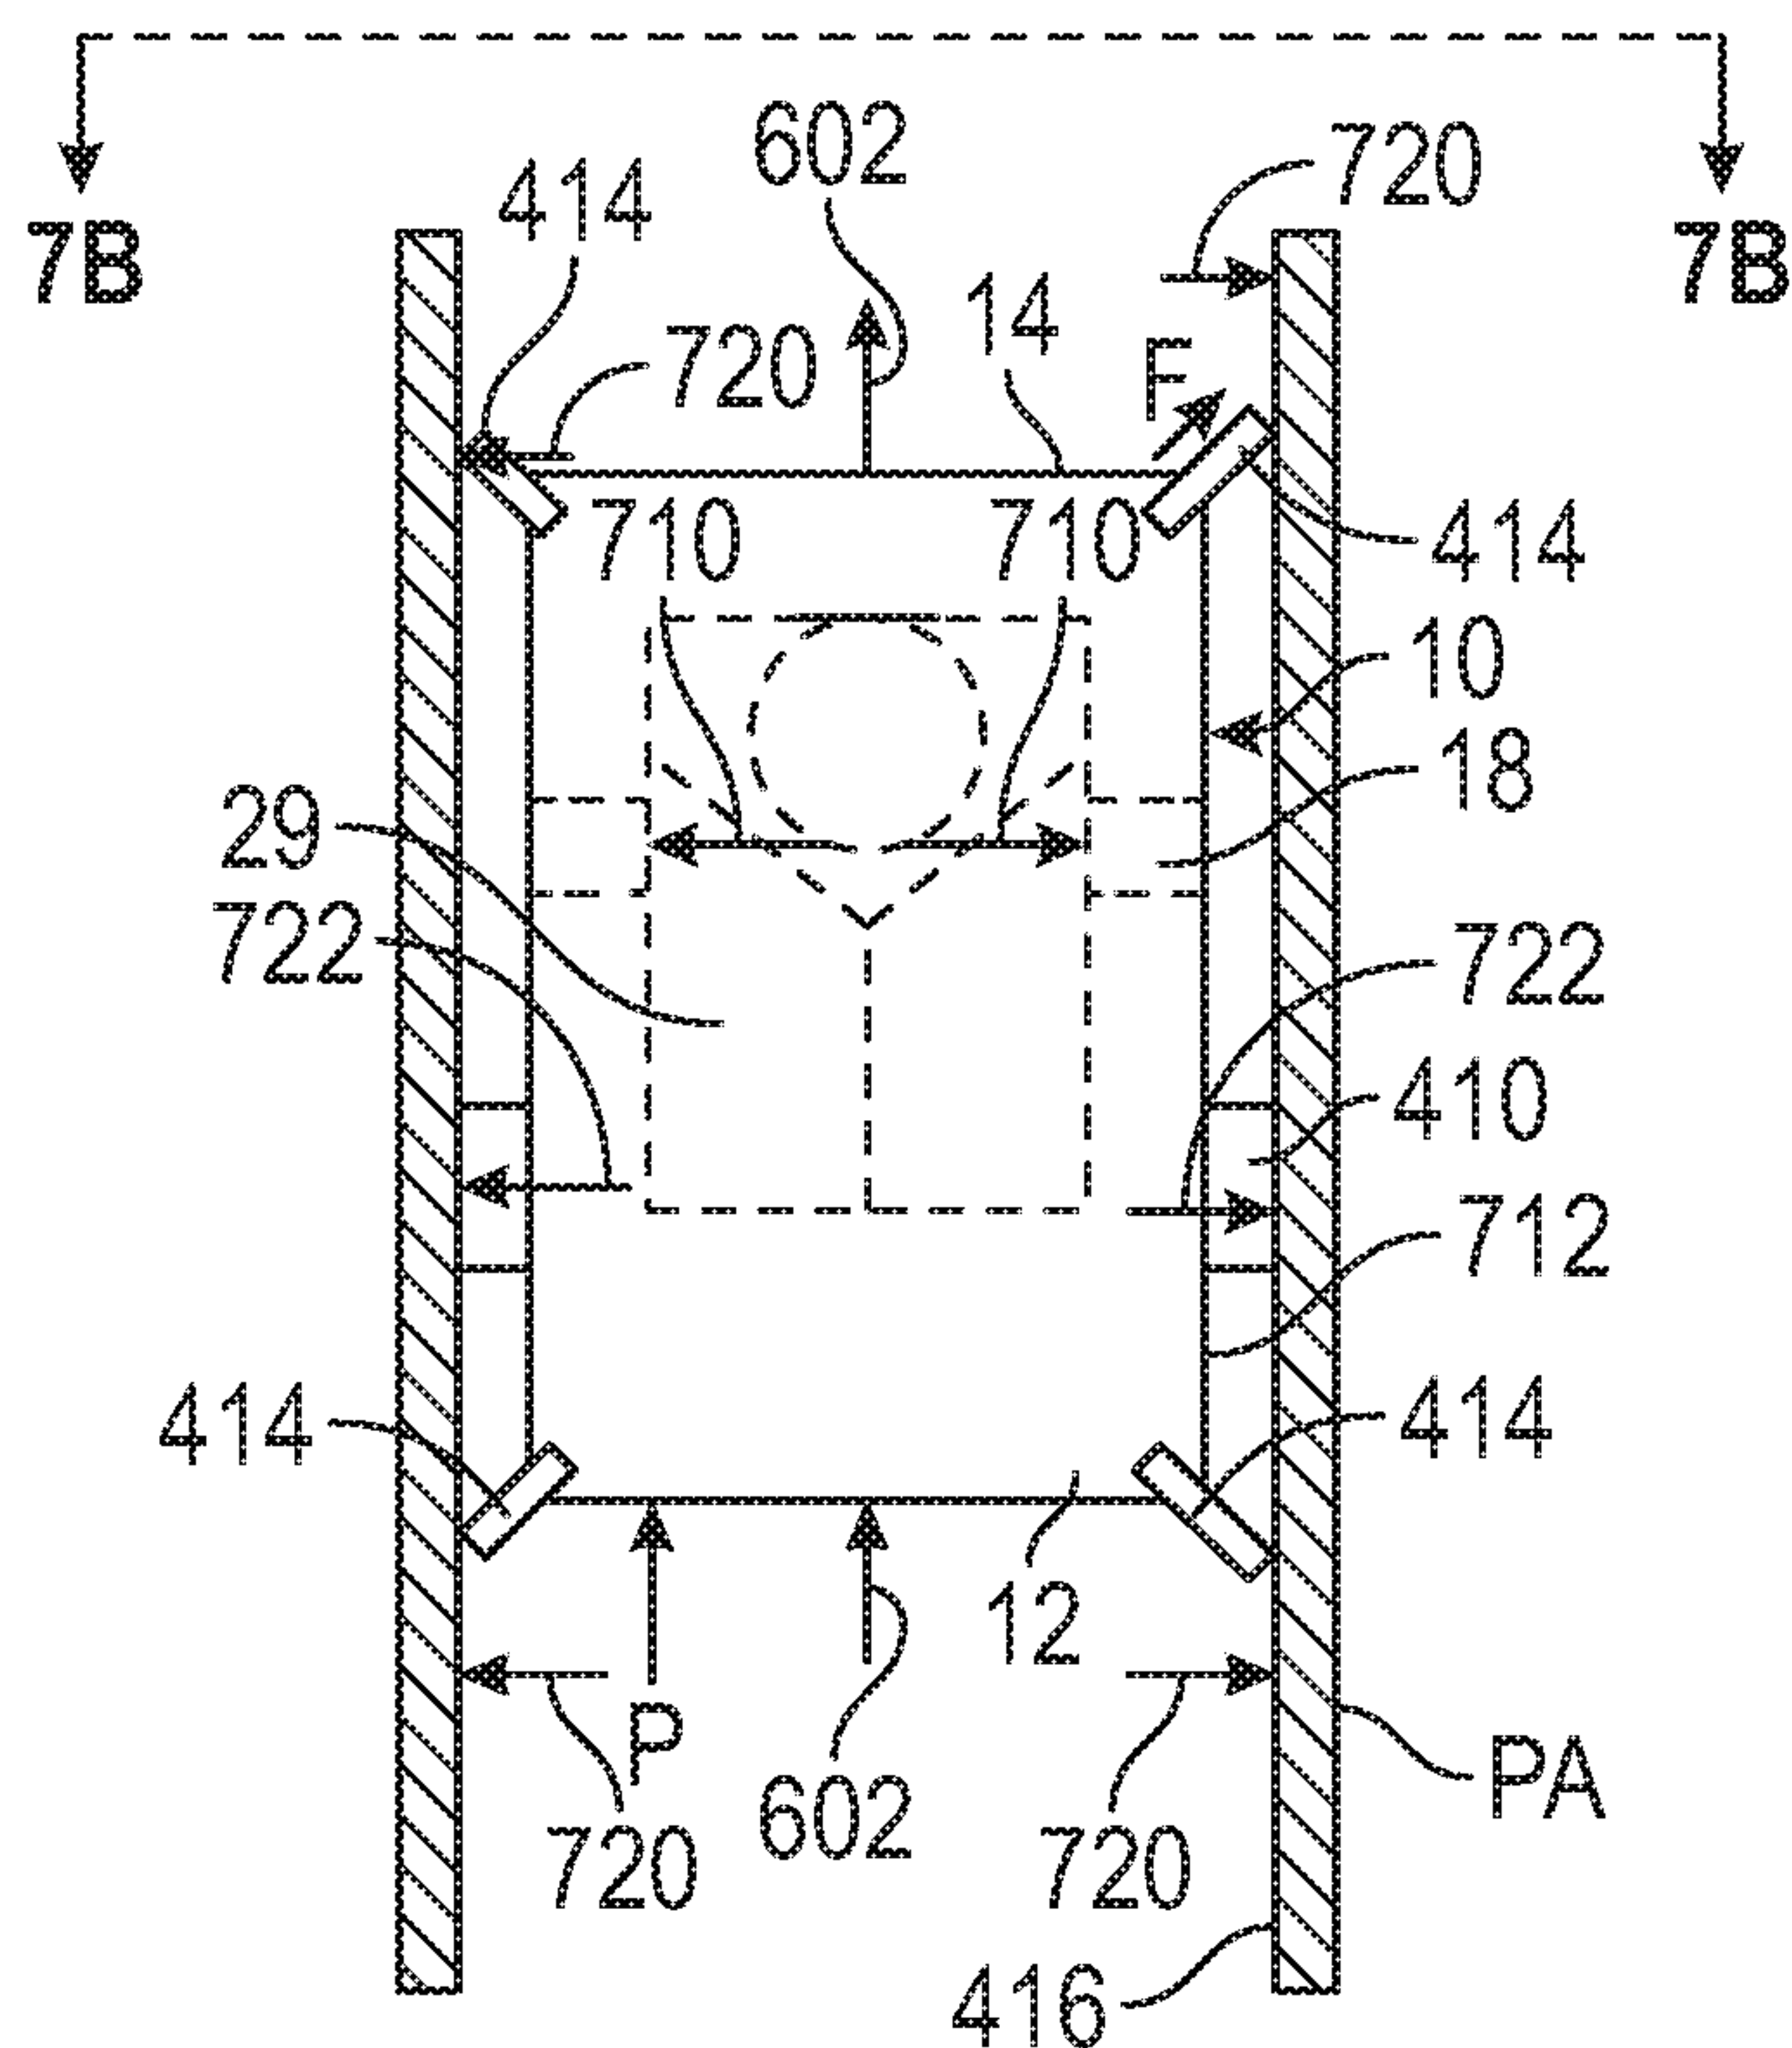


FIG. 7A

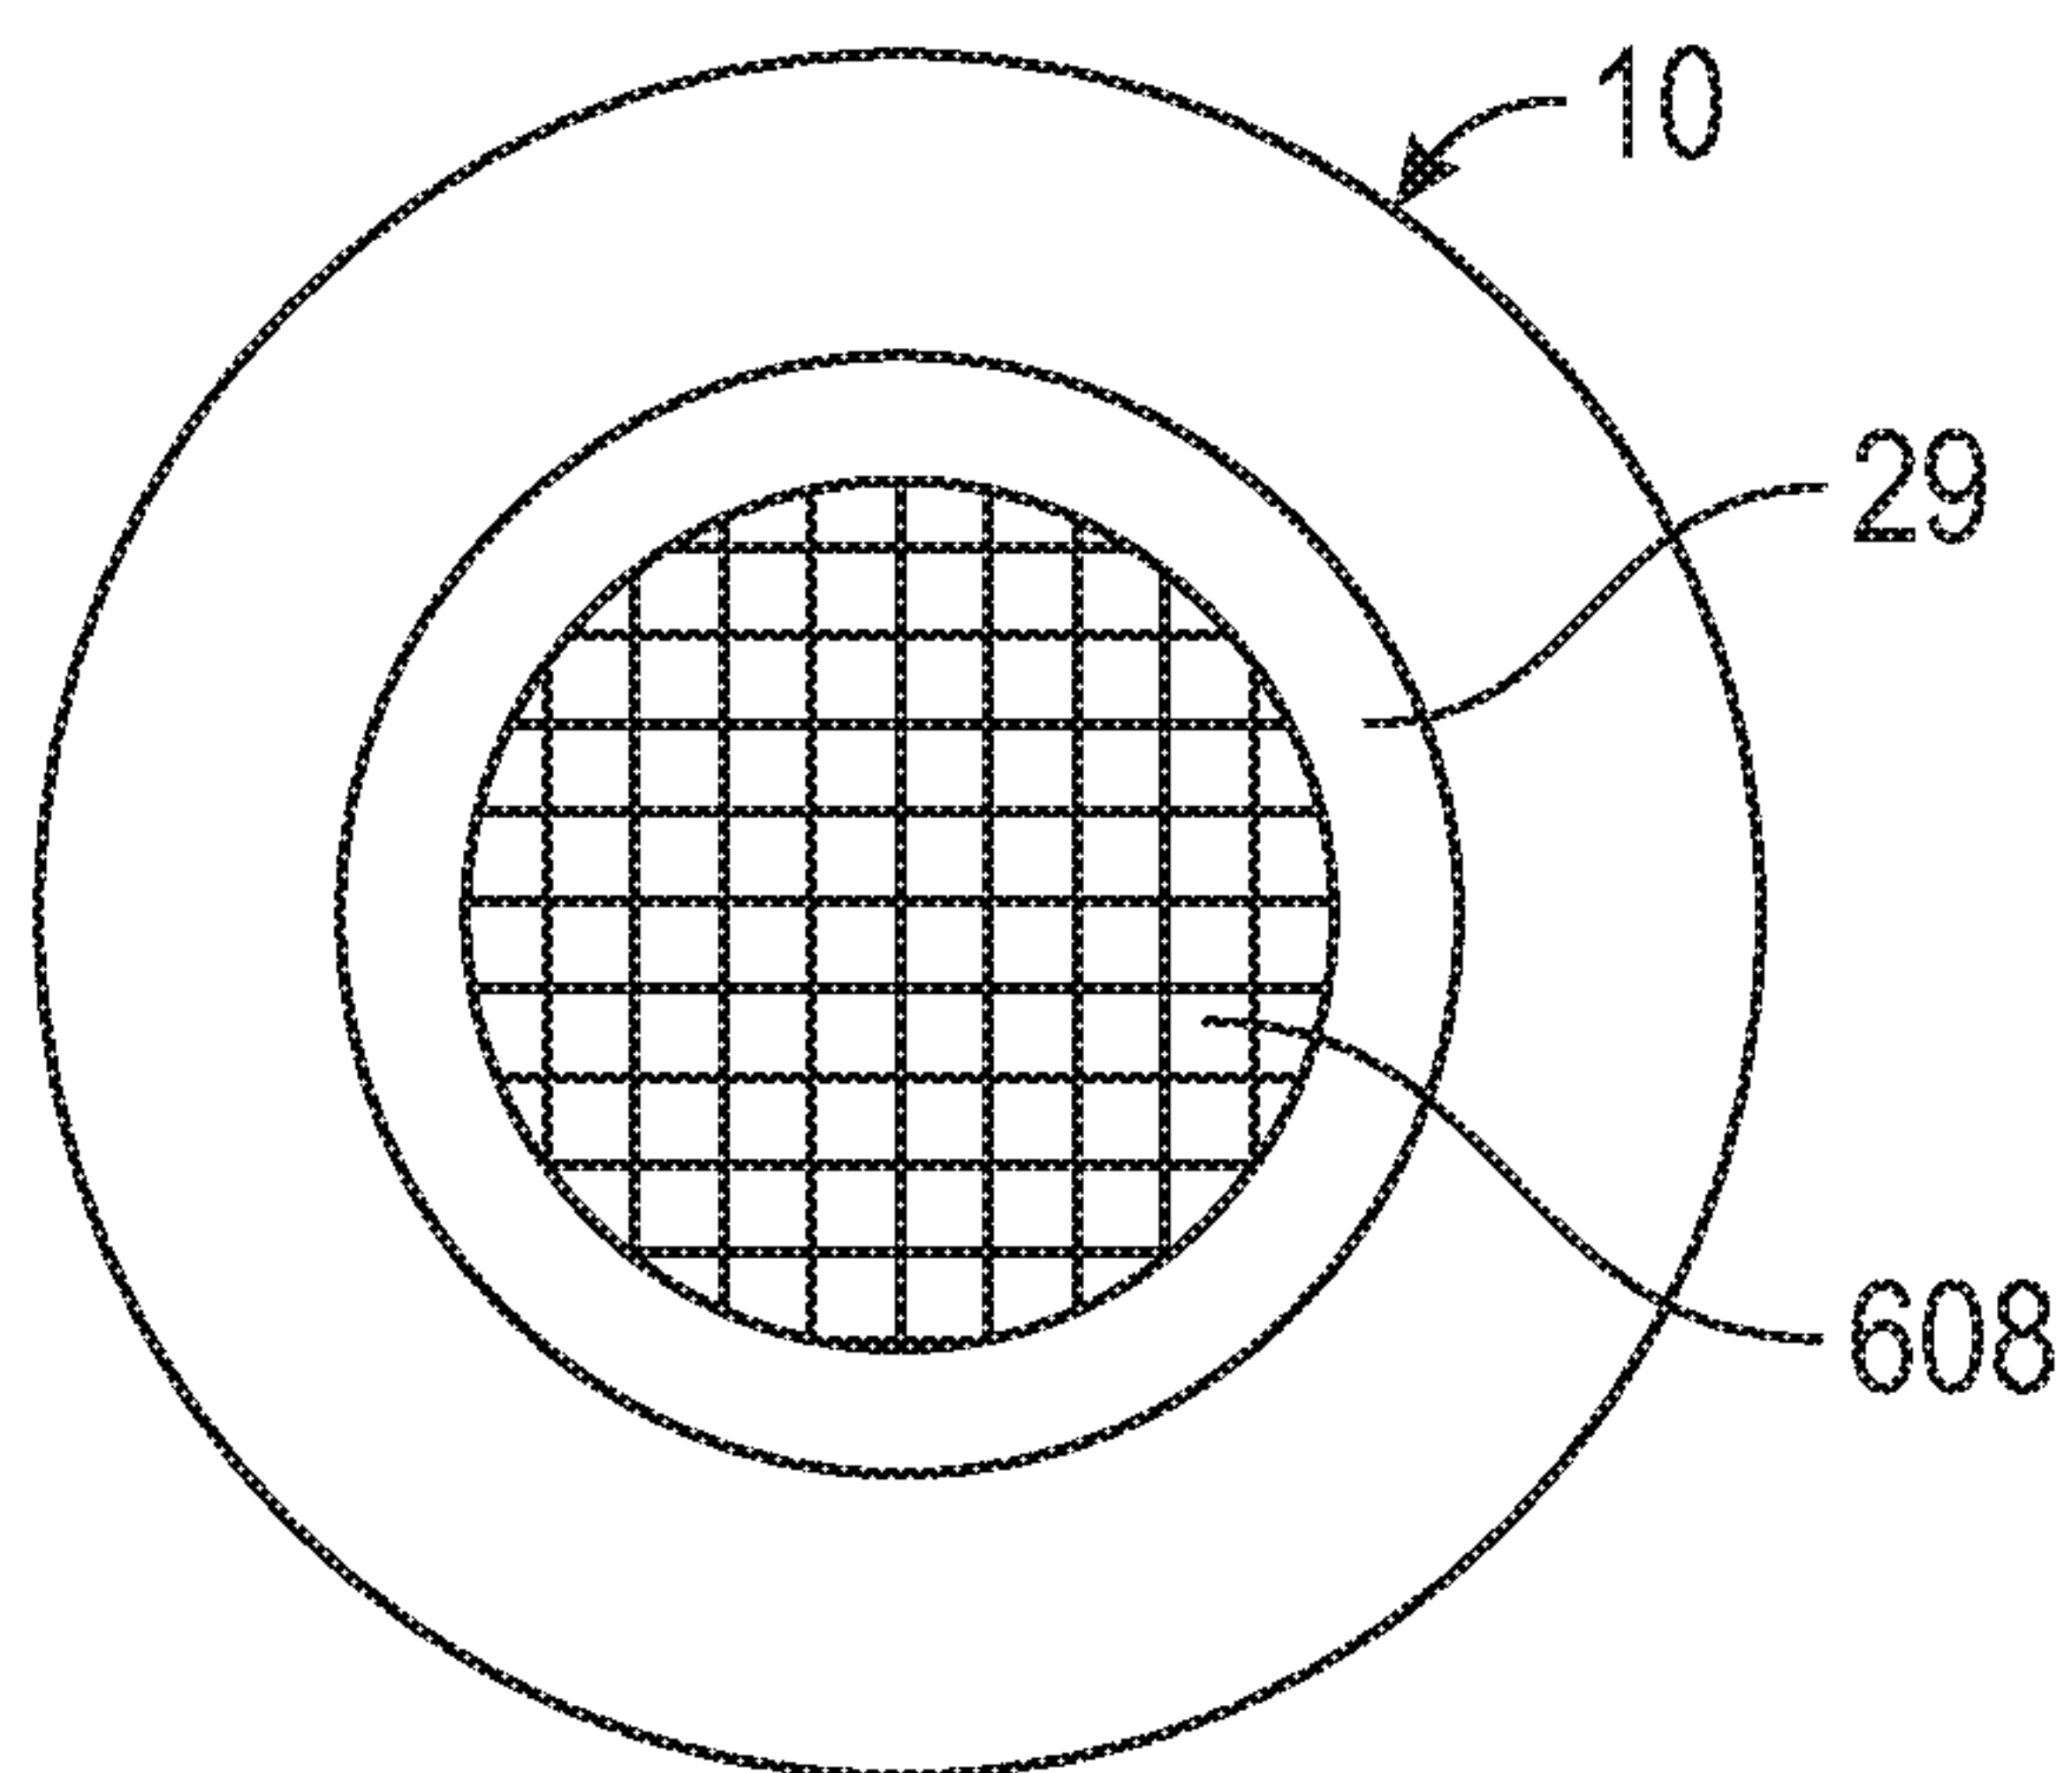


FIG. 7B

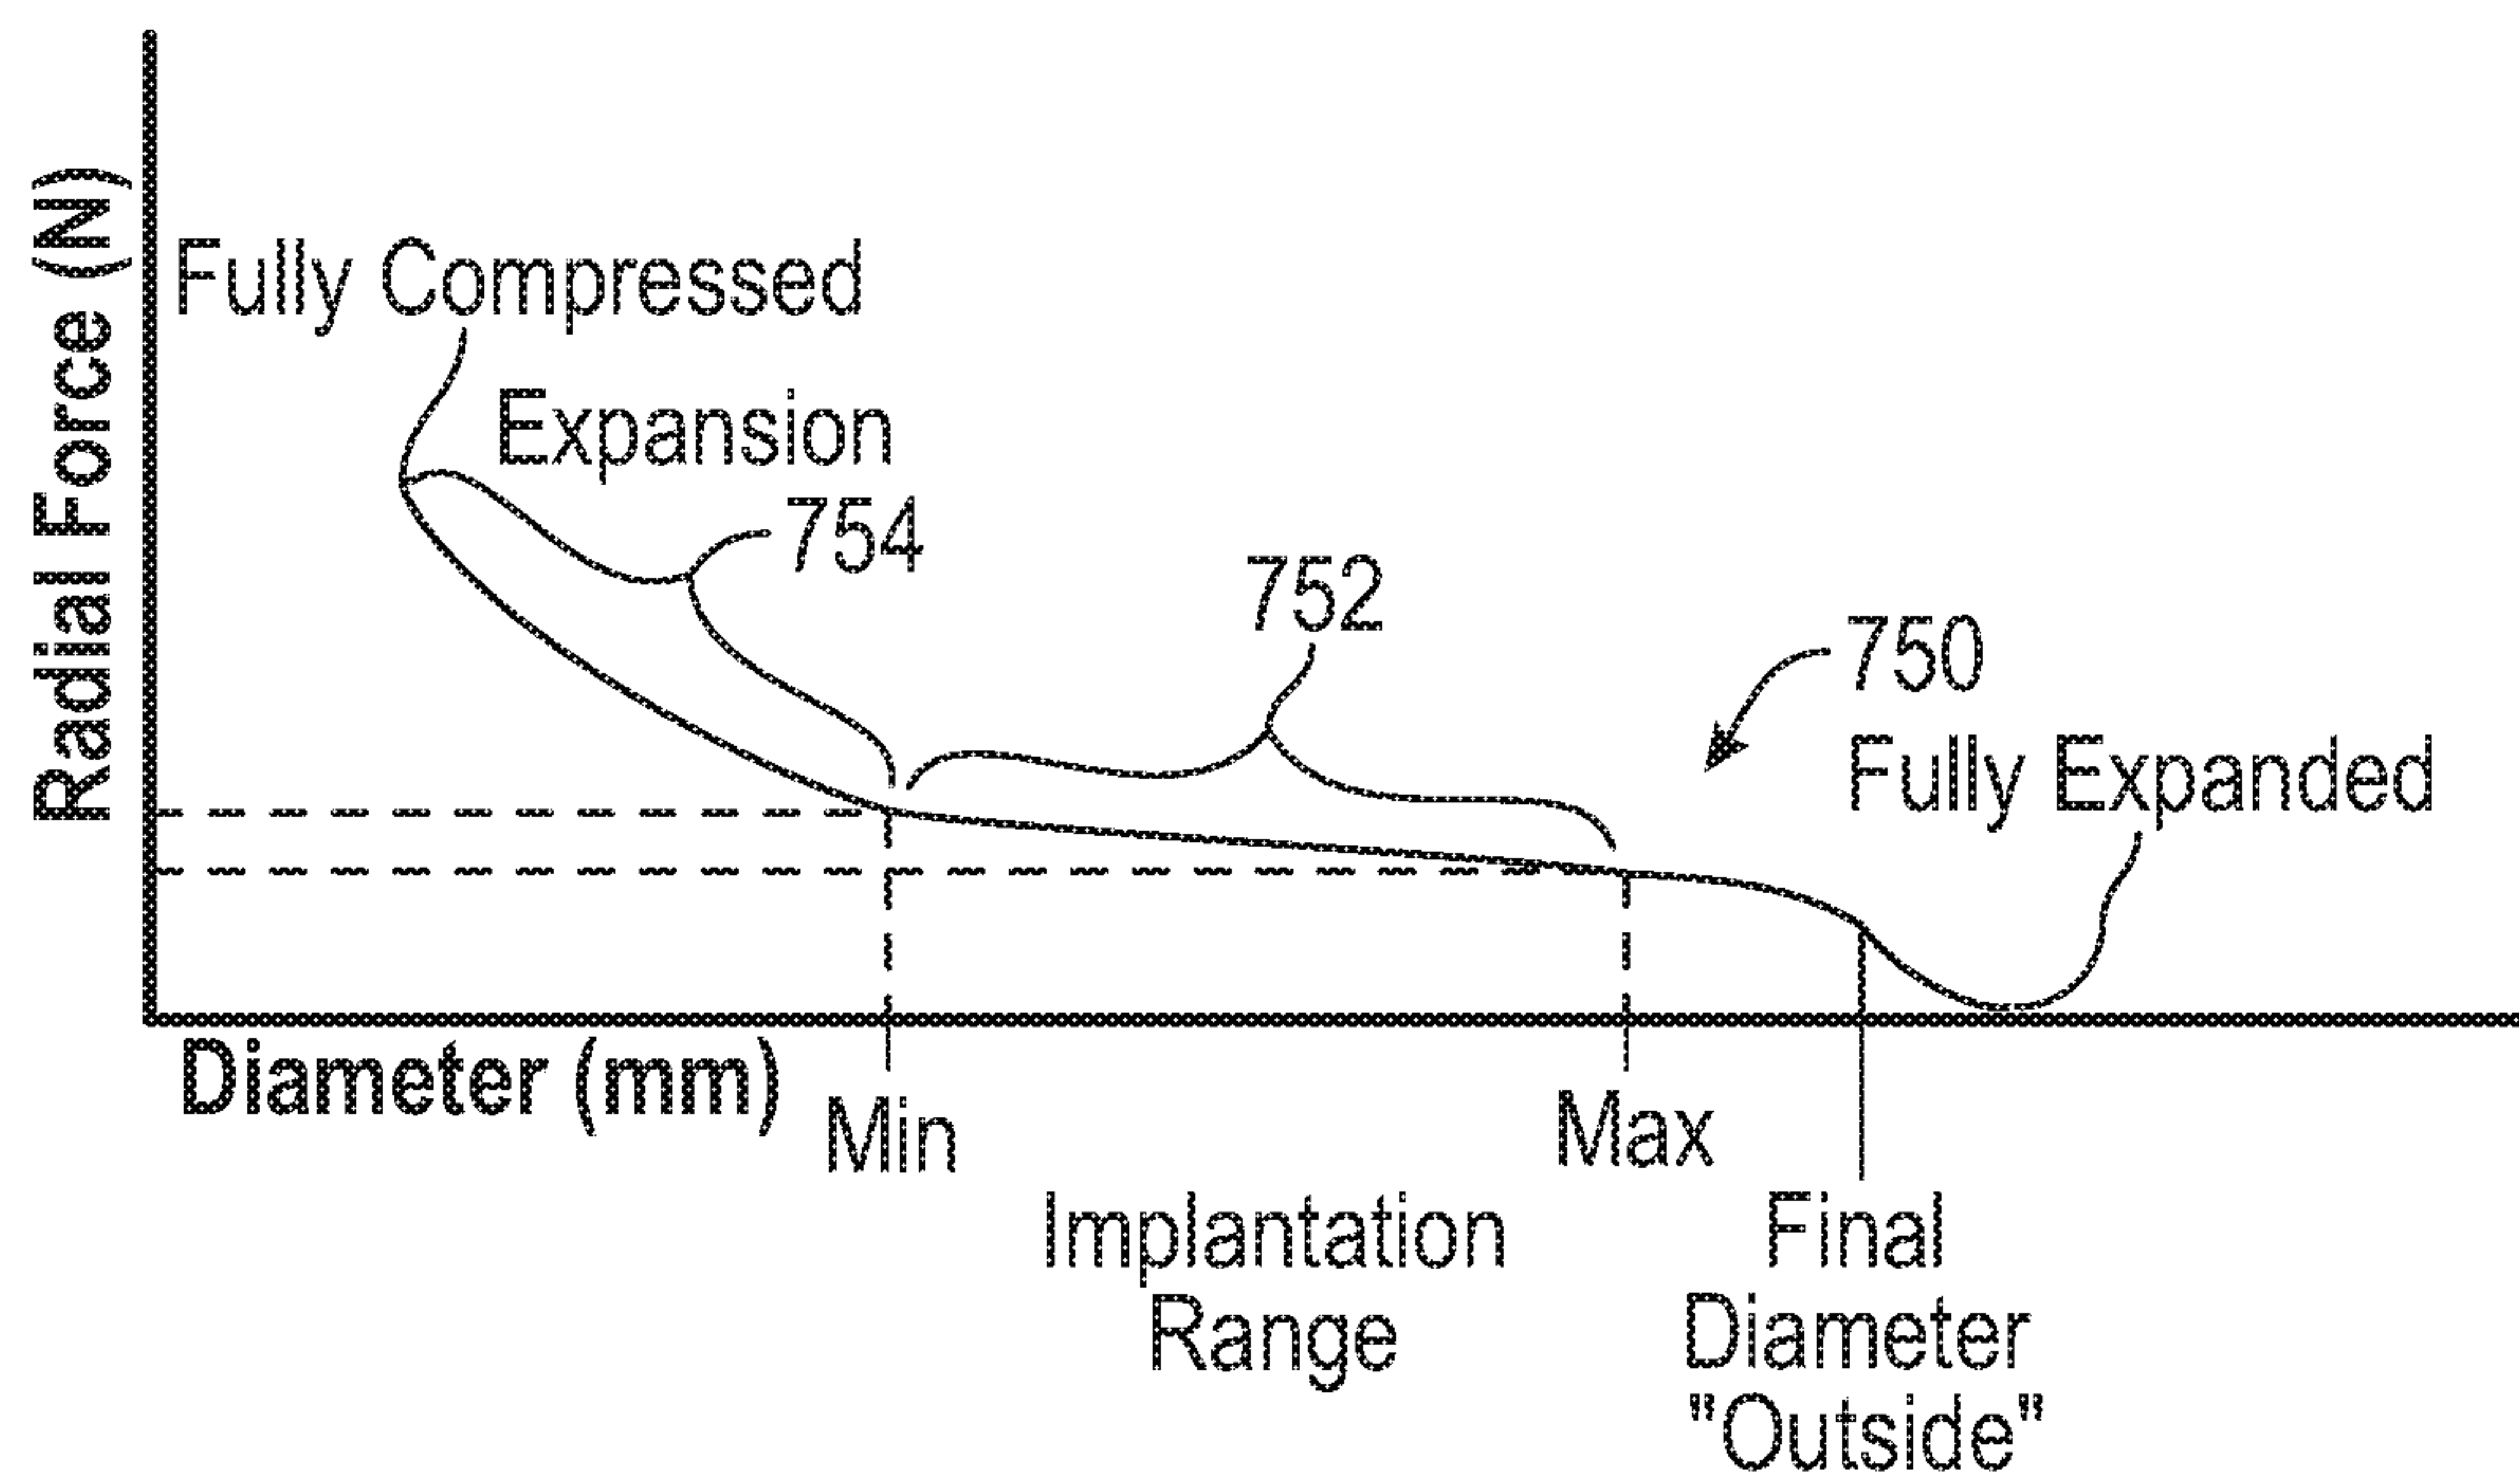


FIG. 7C

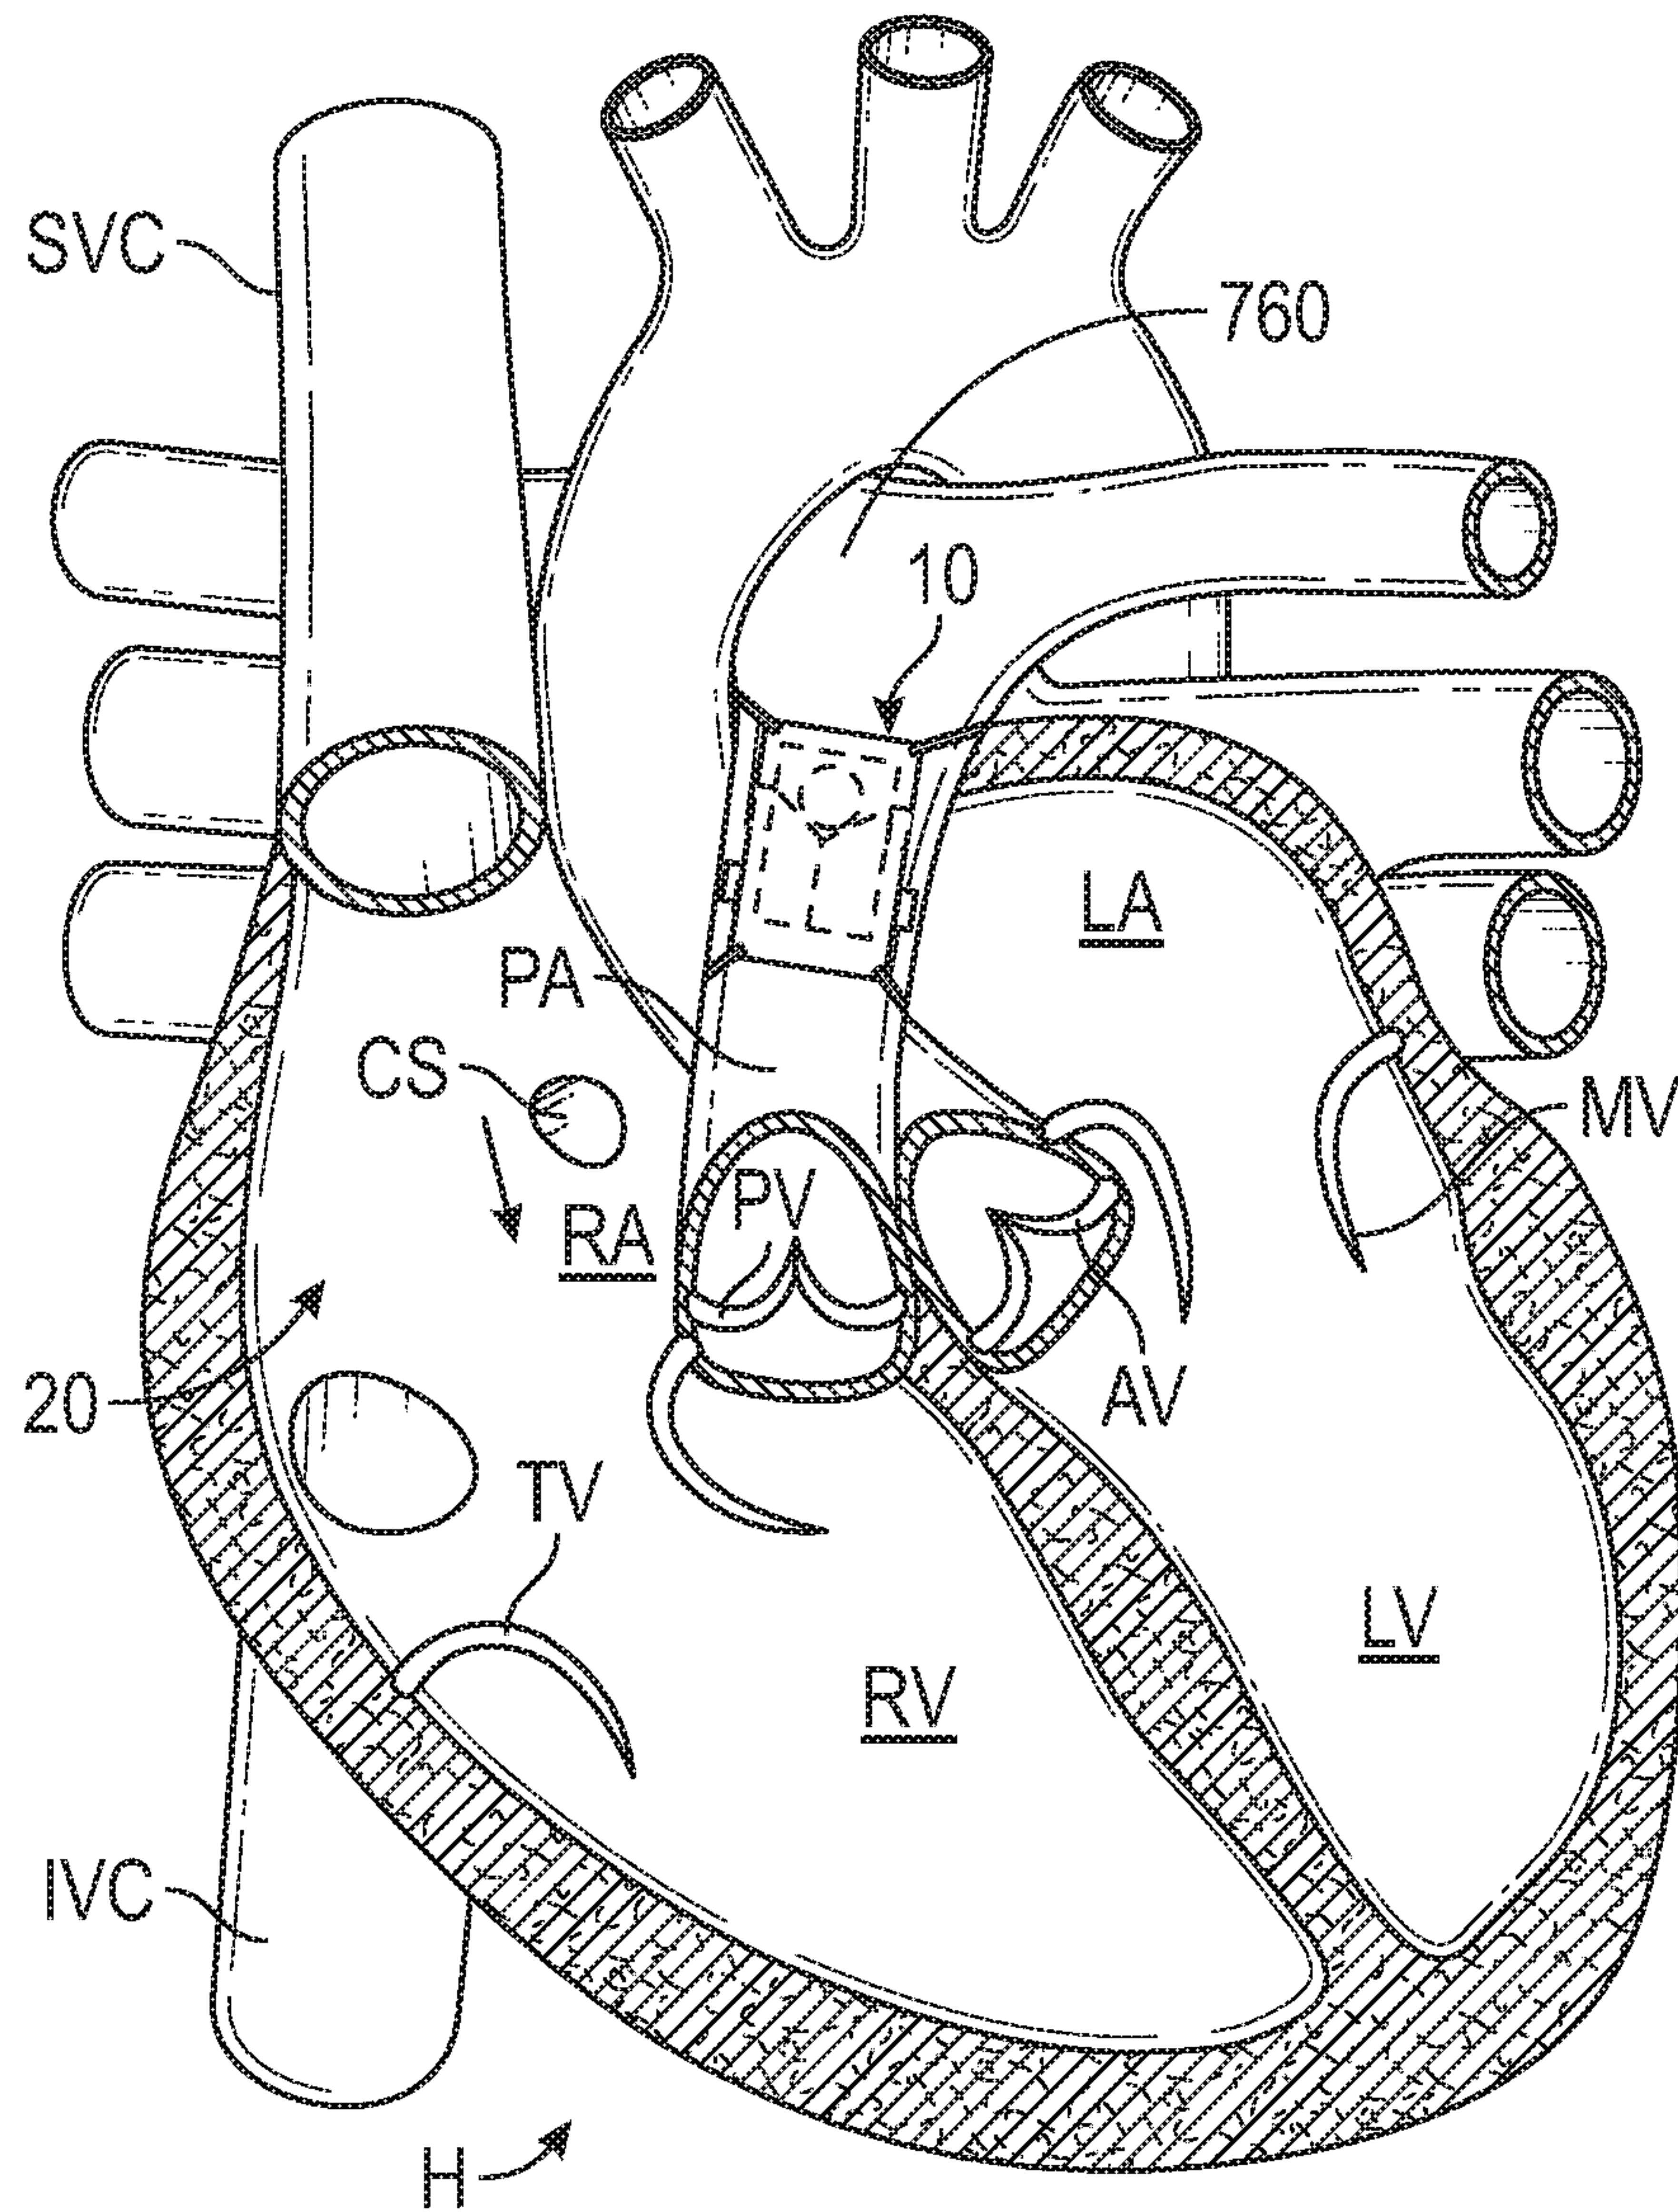


FIG. 8

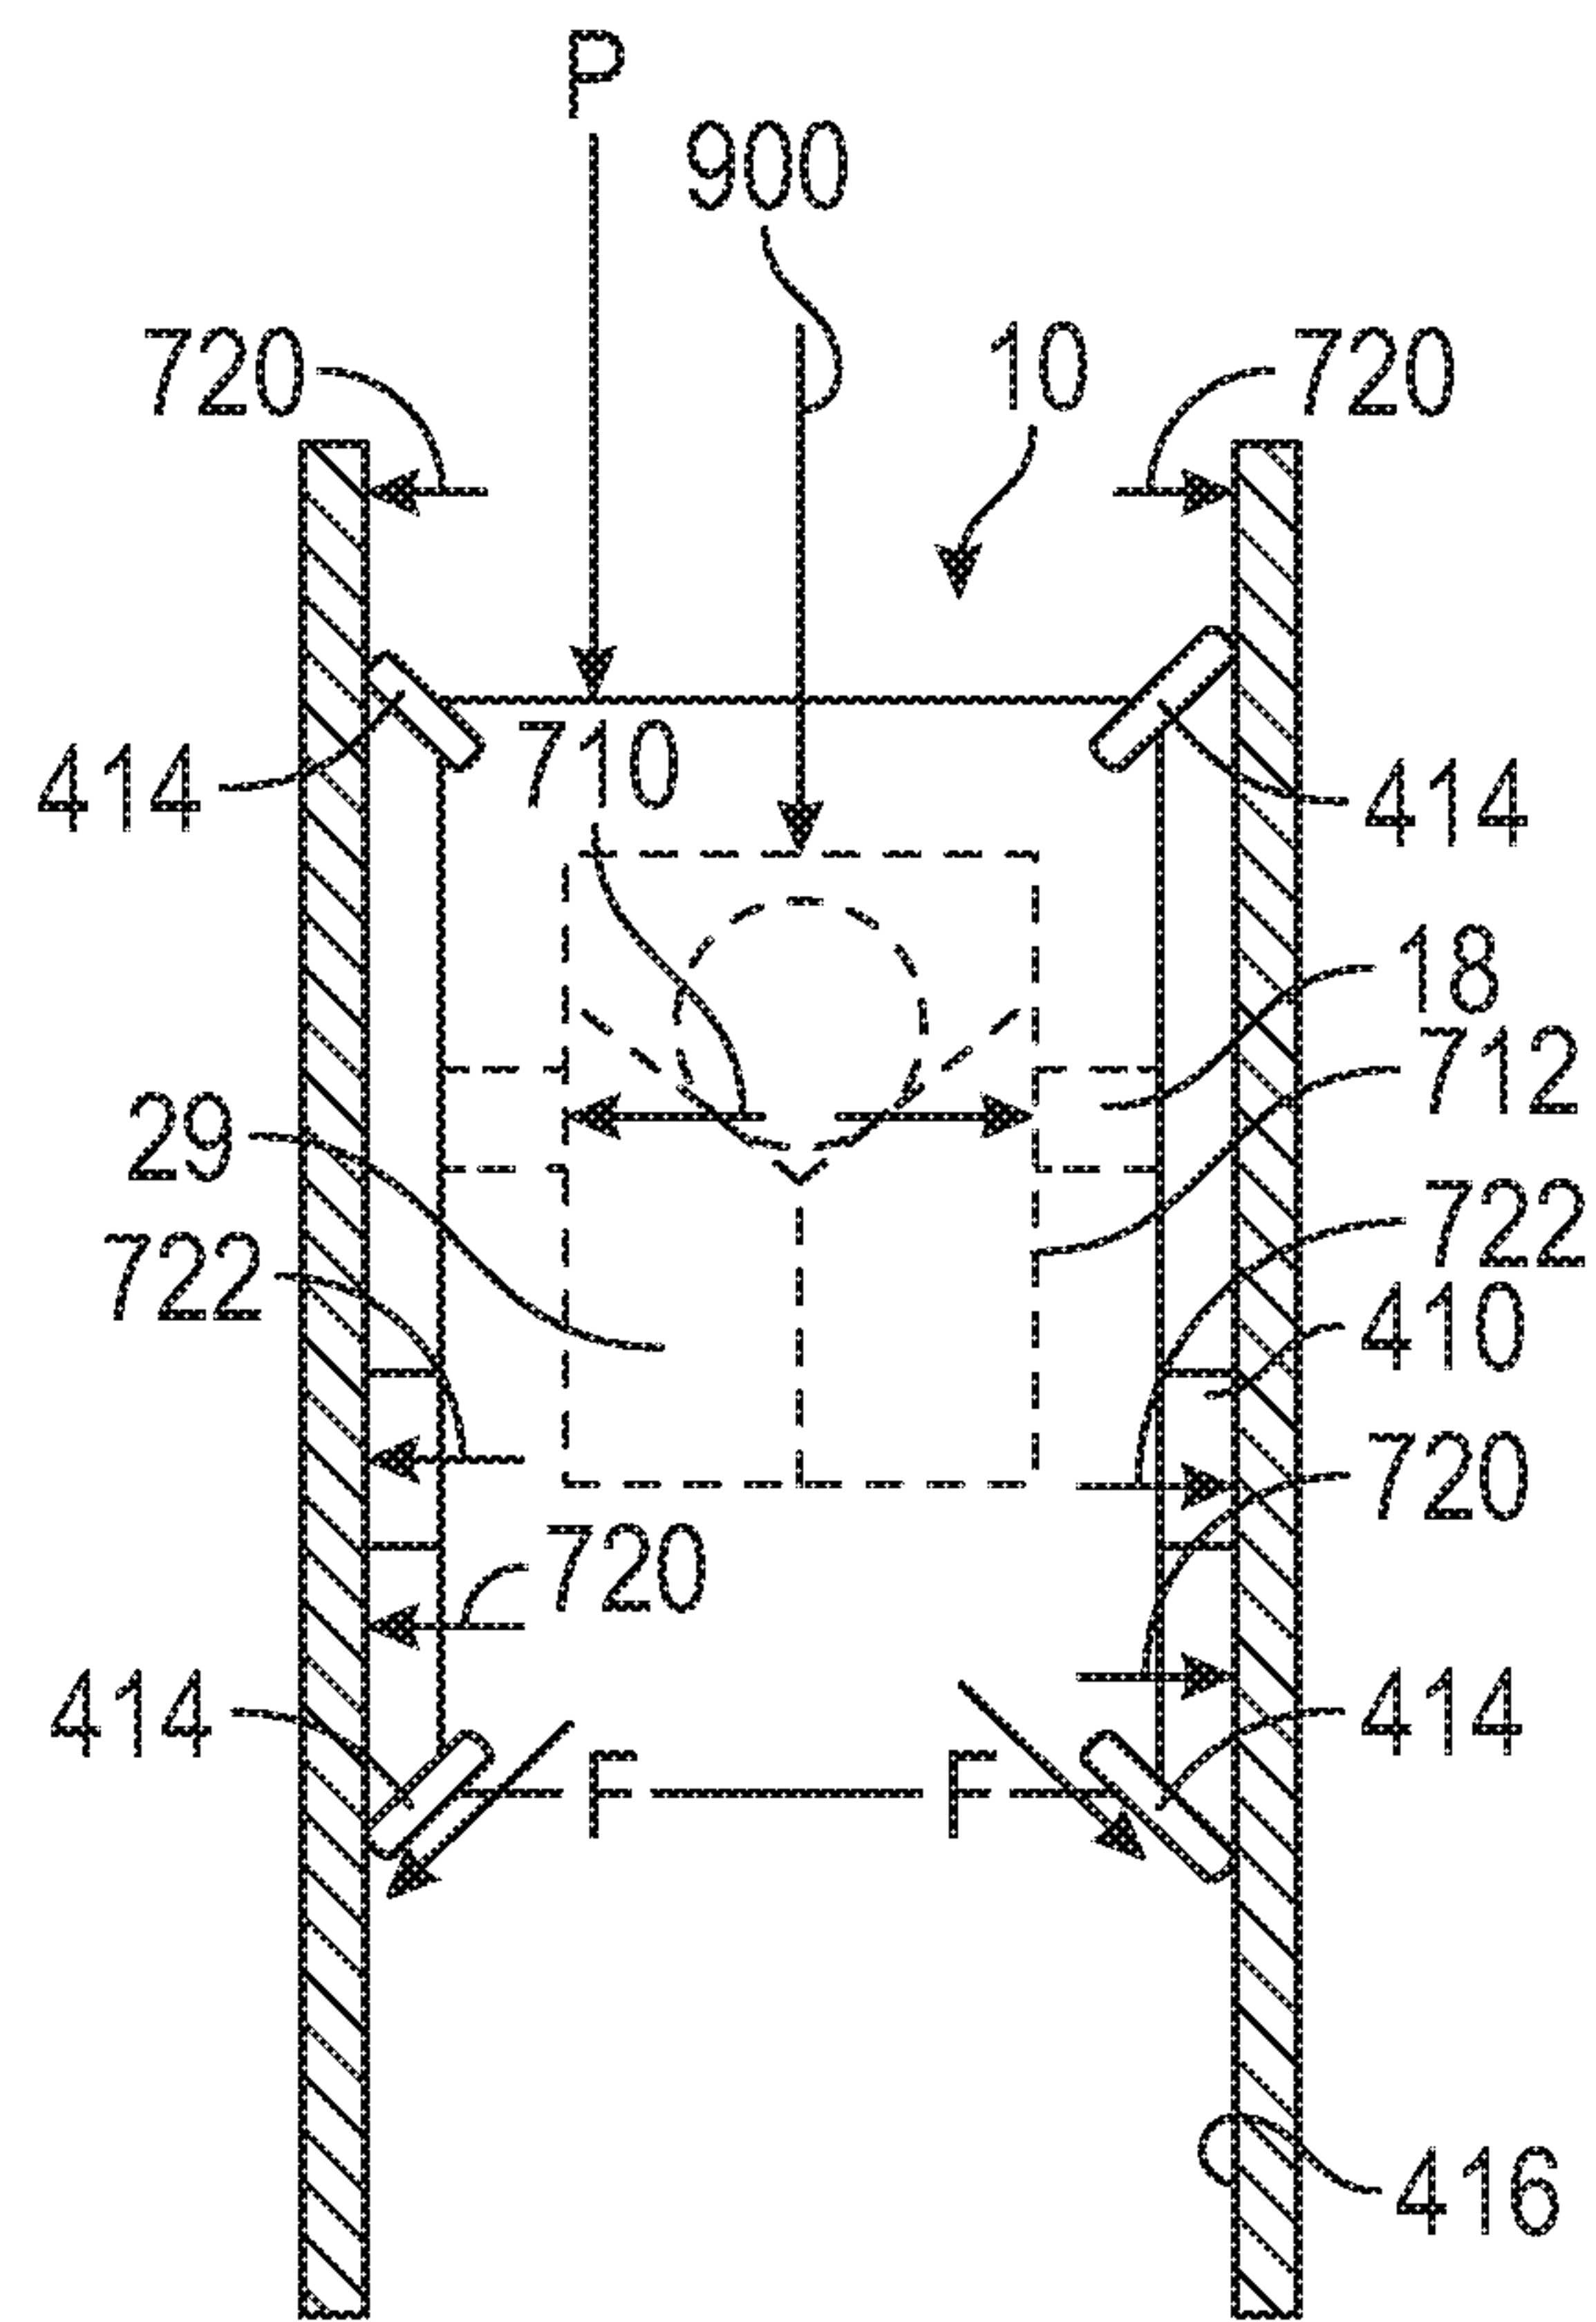


FIG. 9A

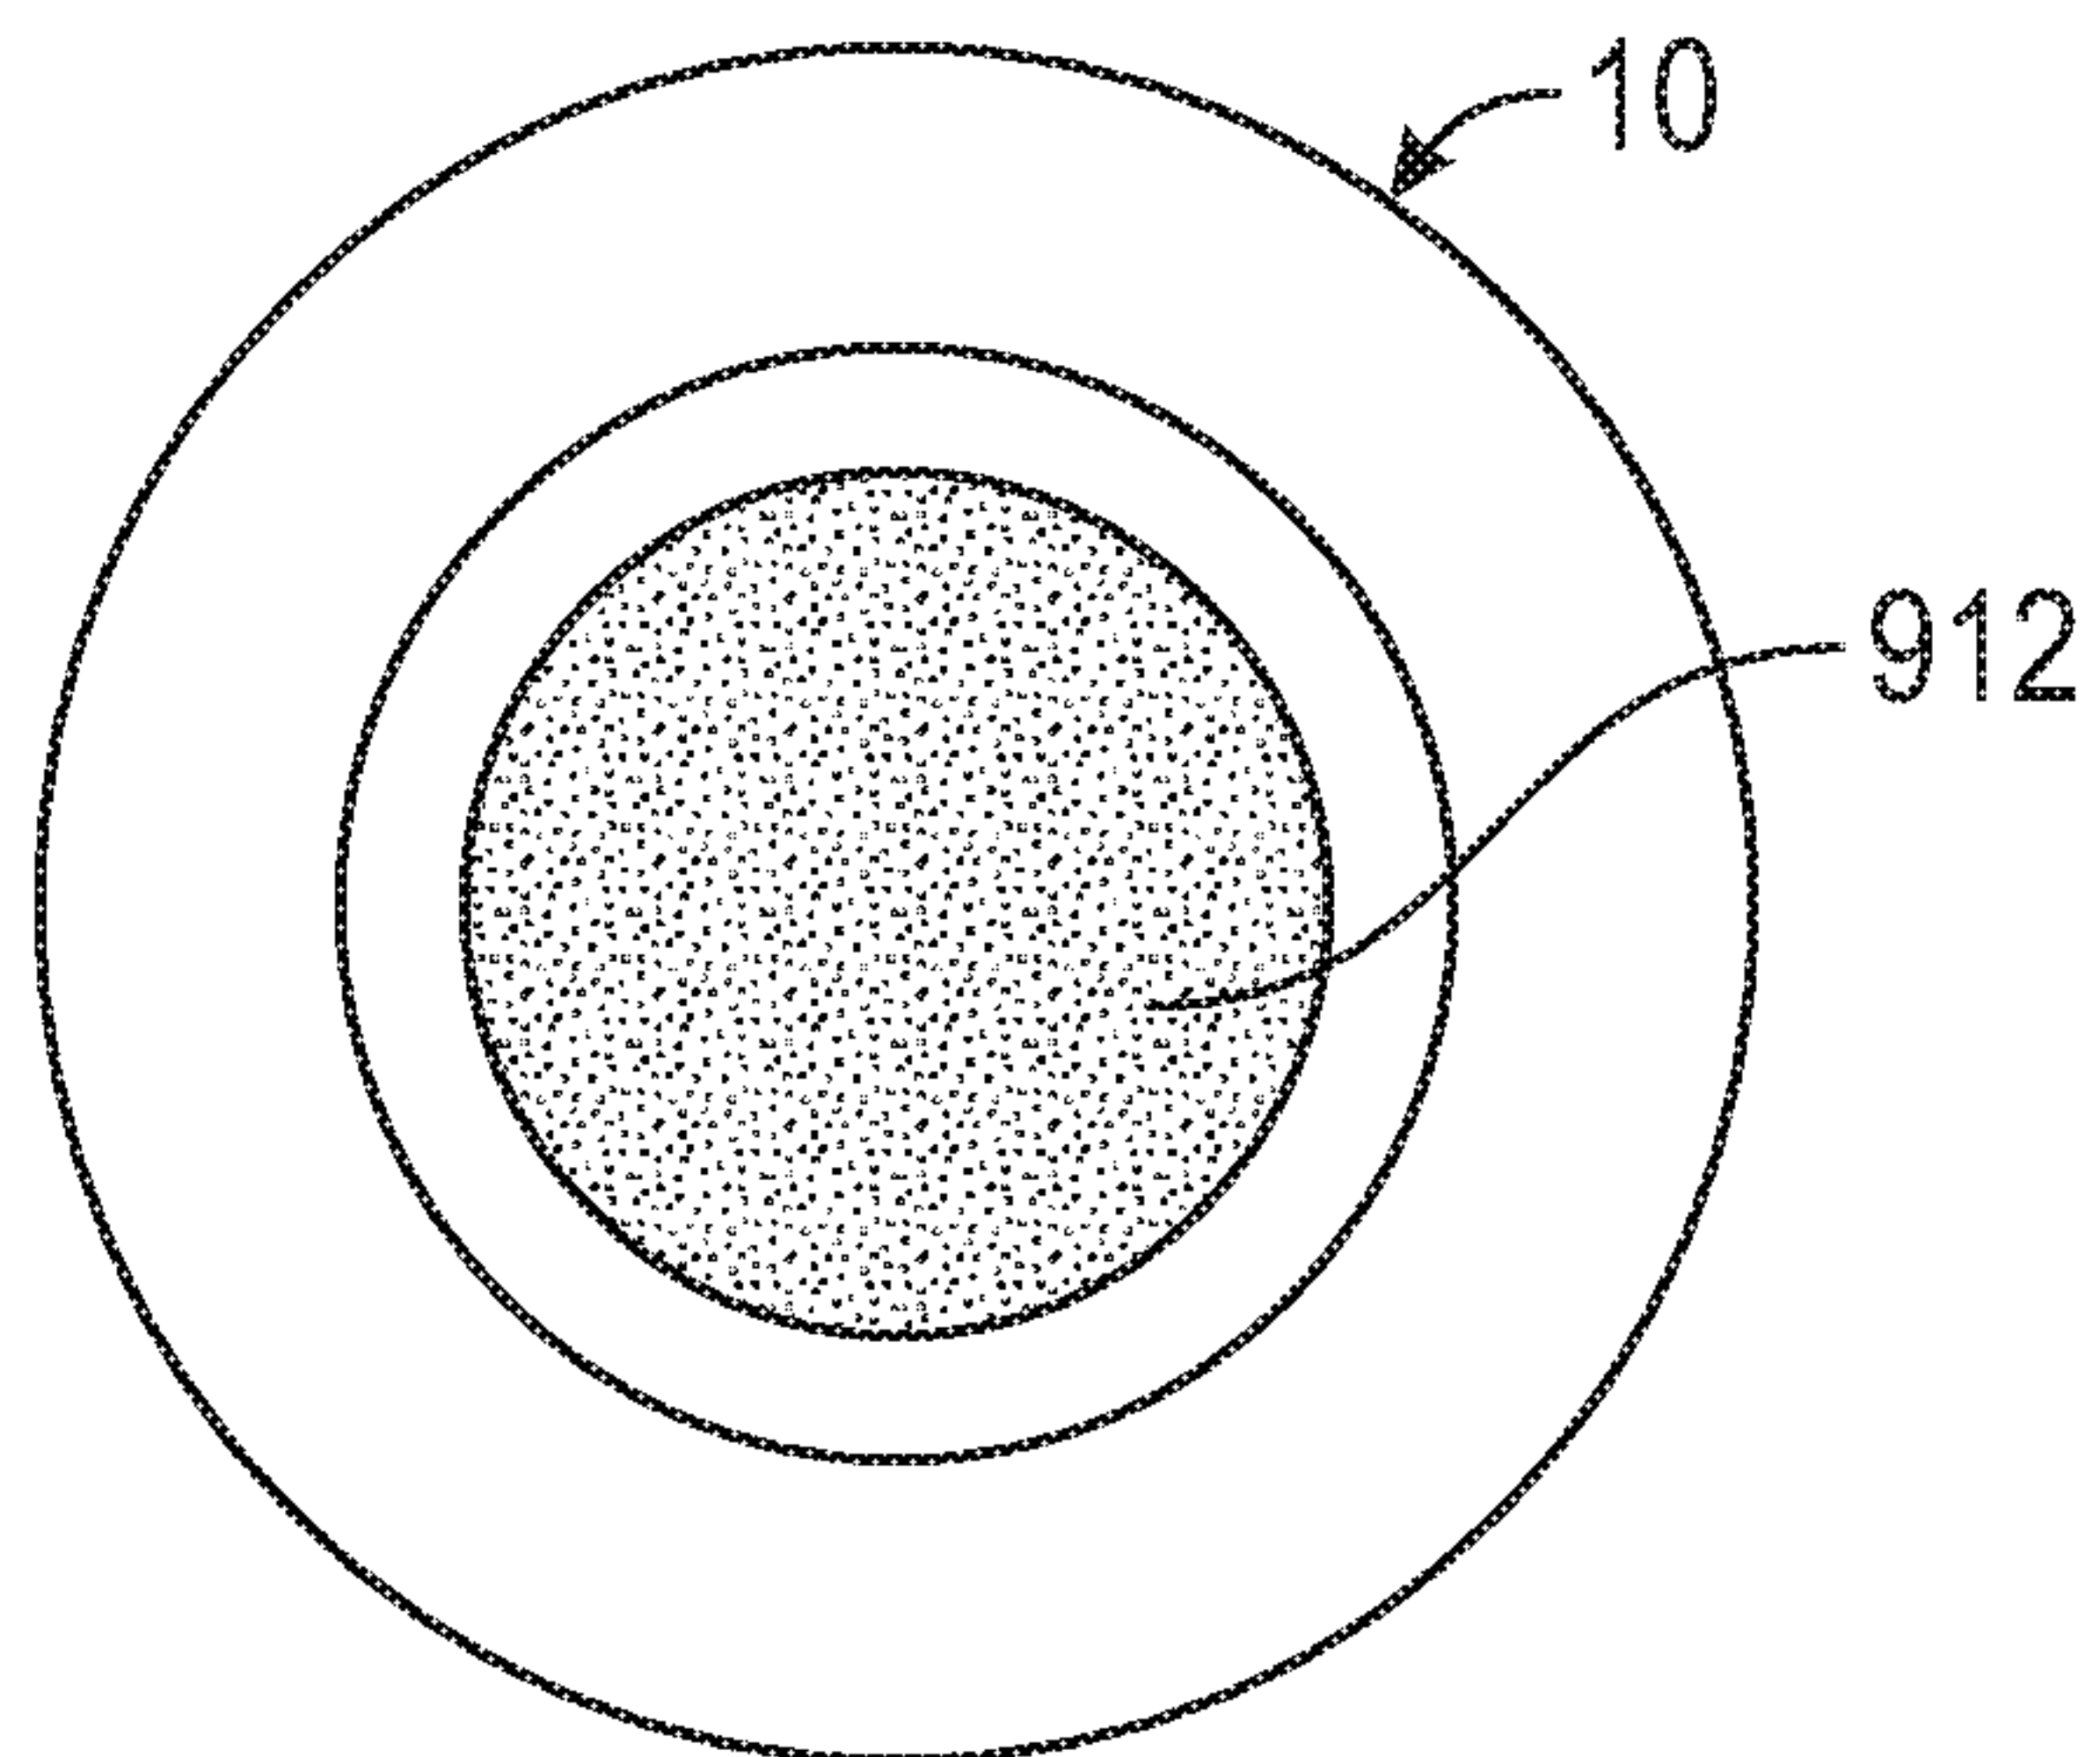


FIG. 9B

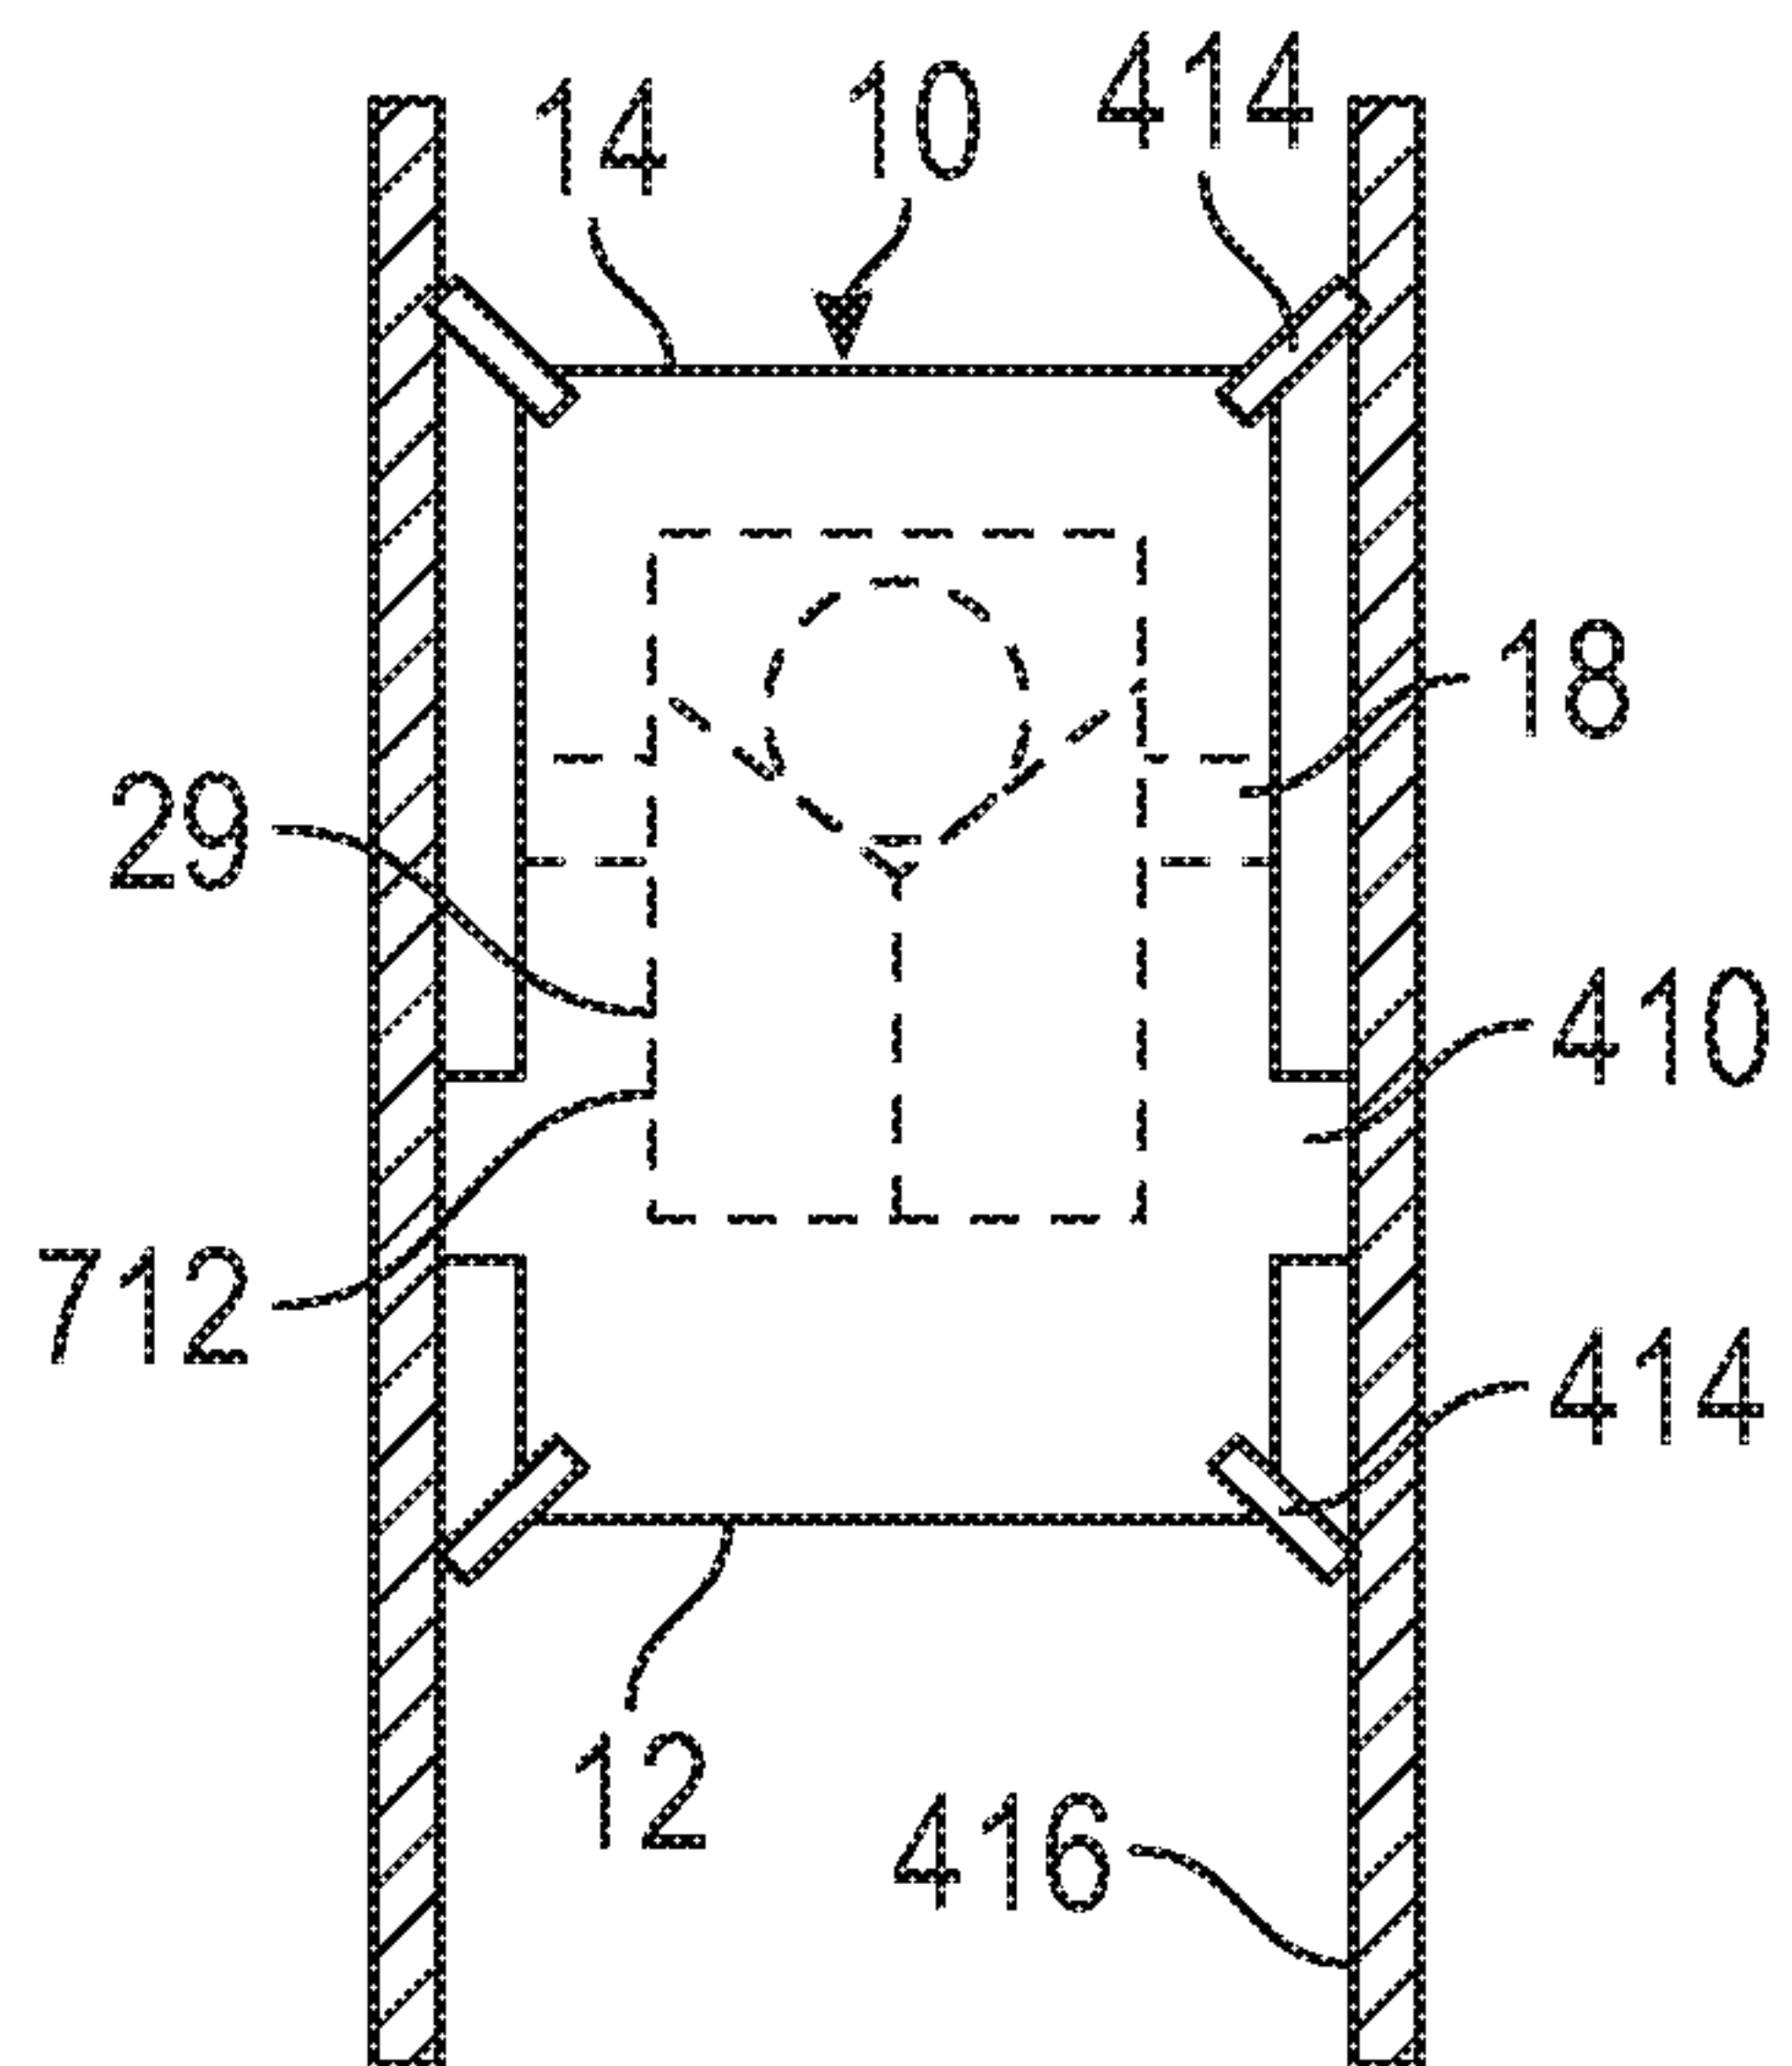


FIG. 10A

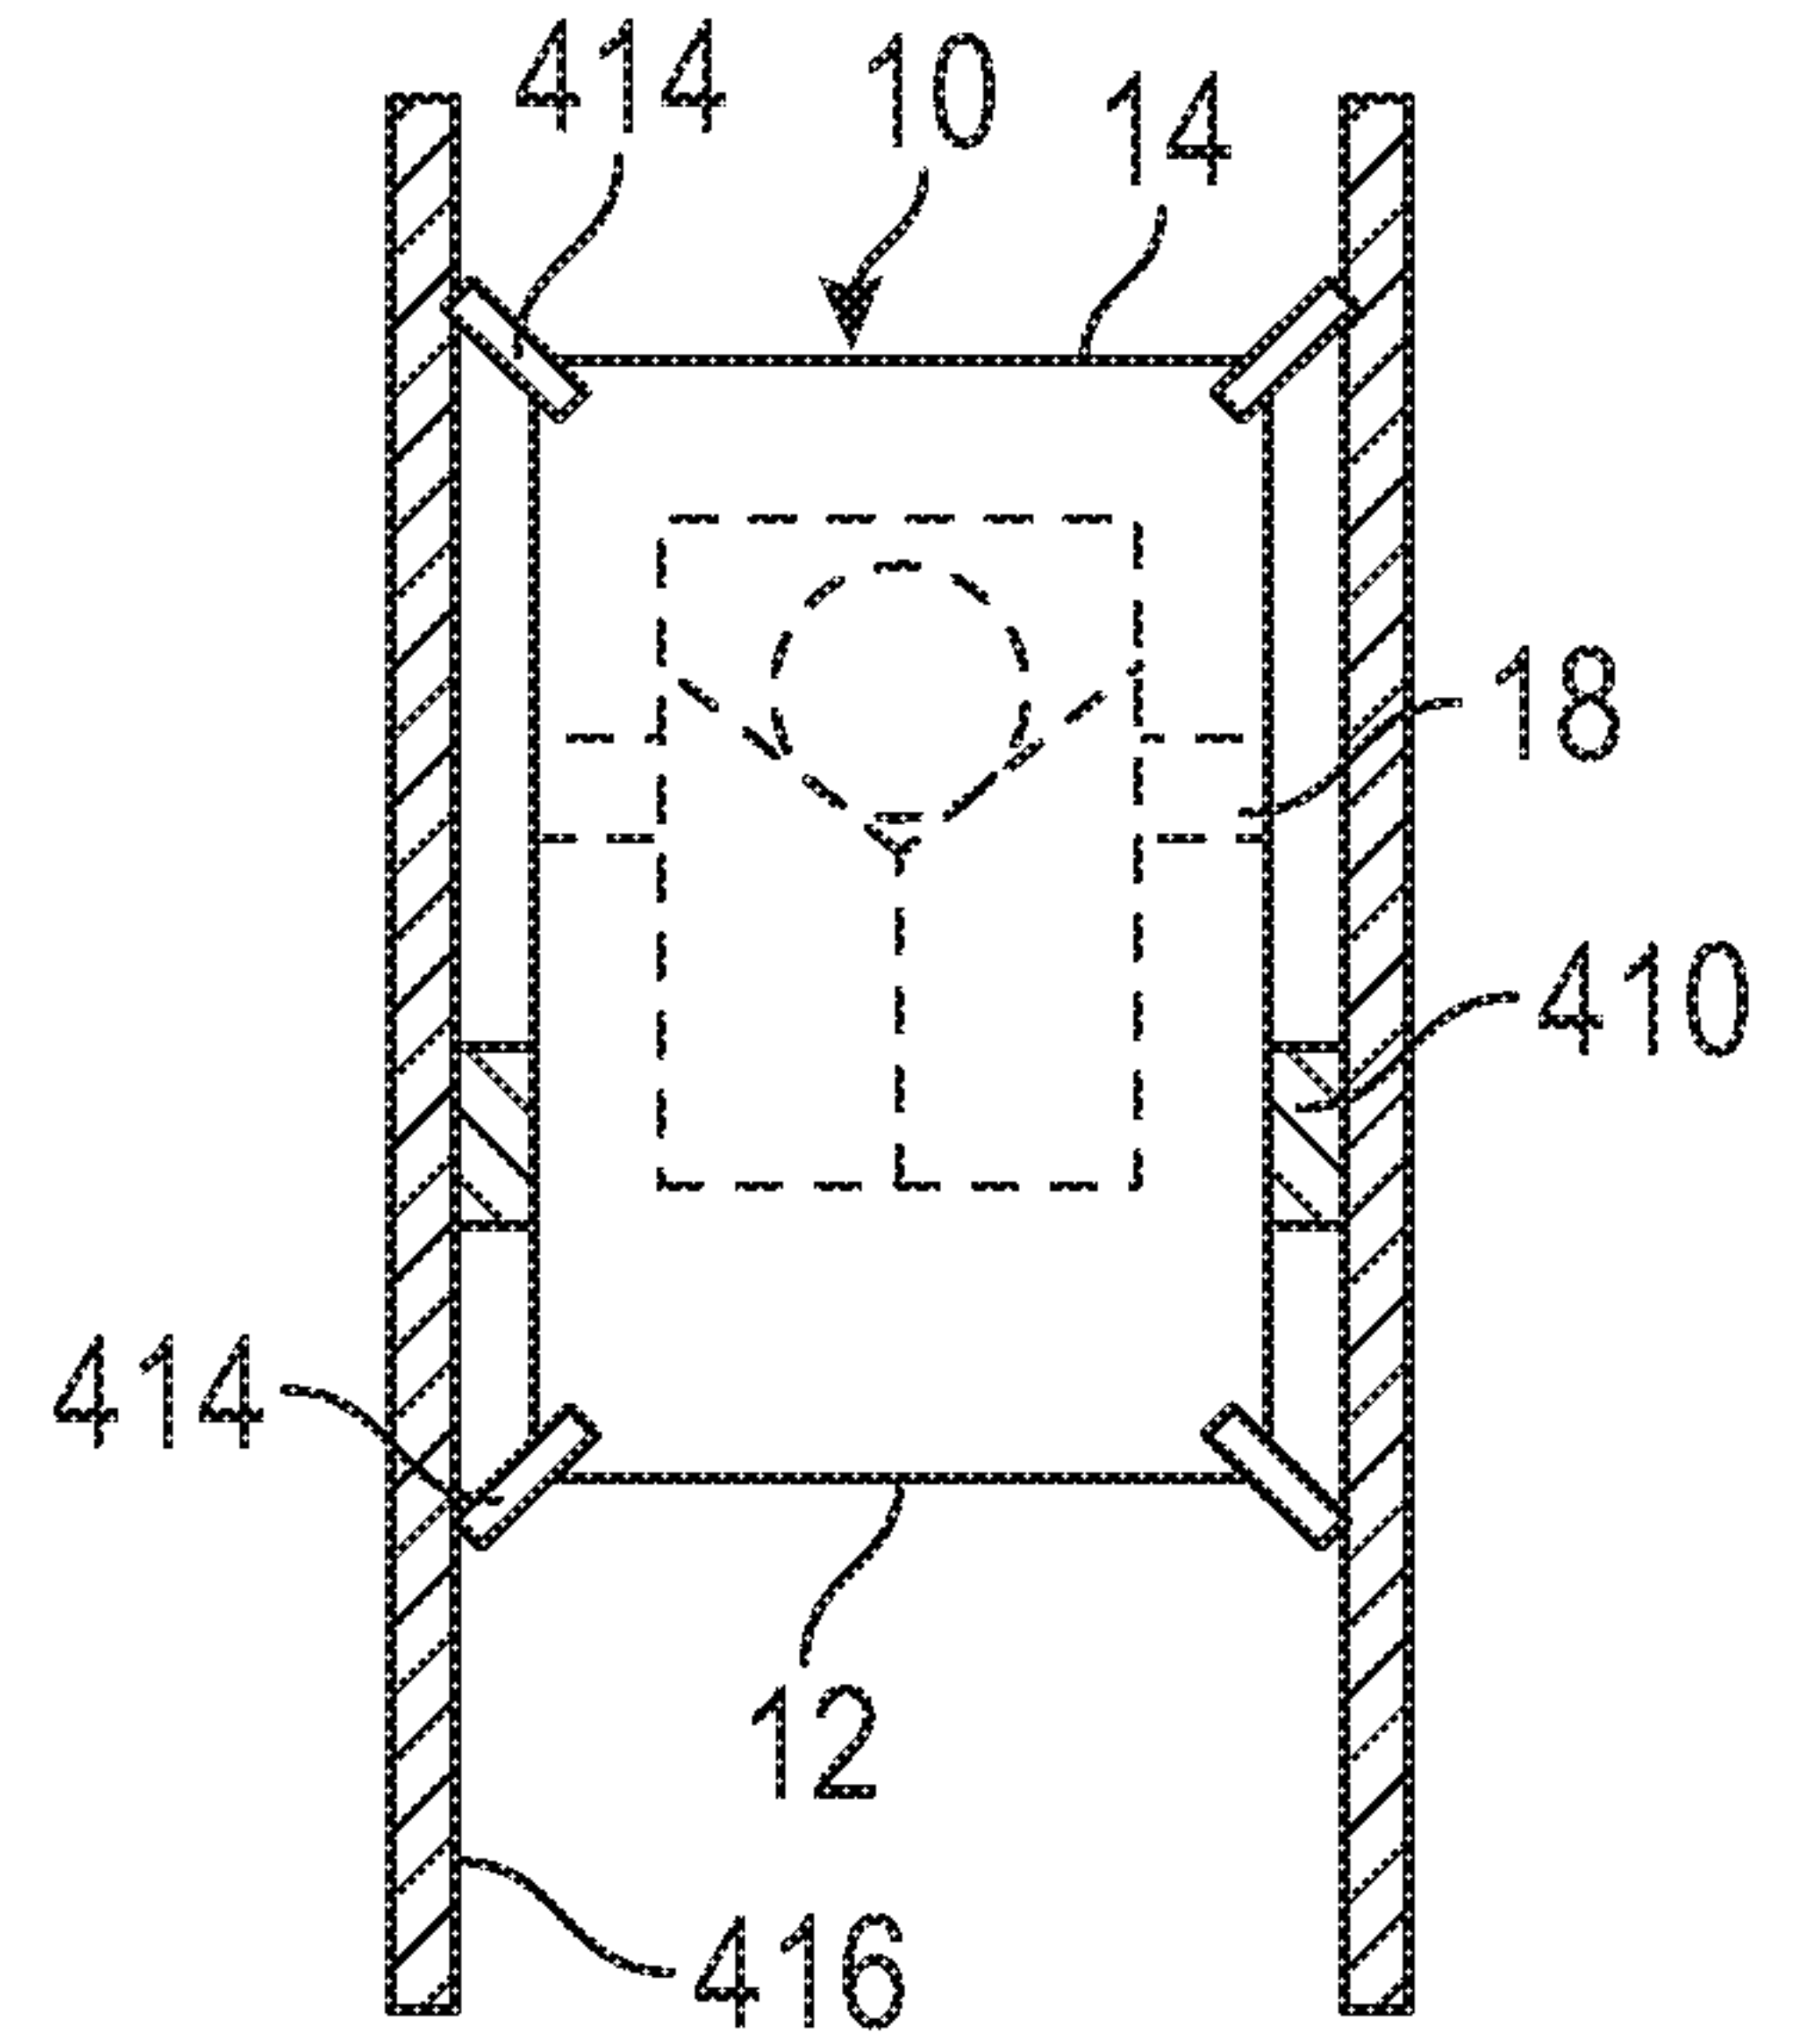


FIG. 10B

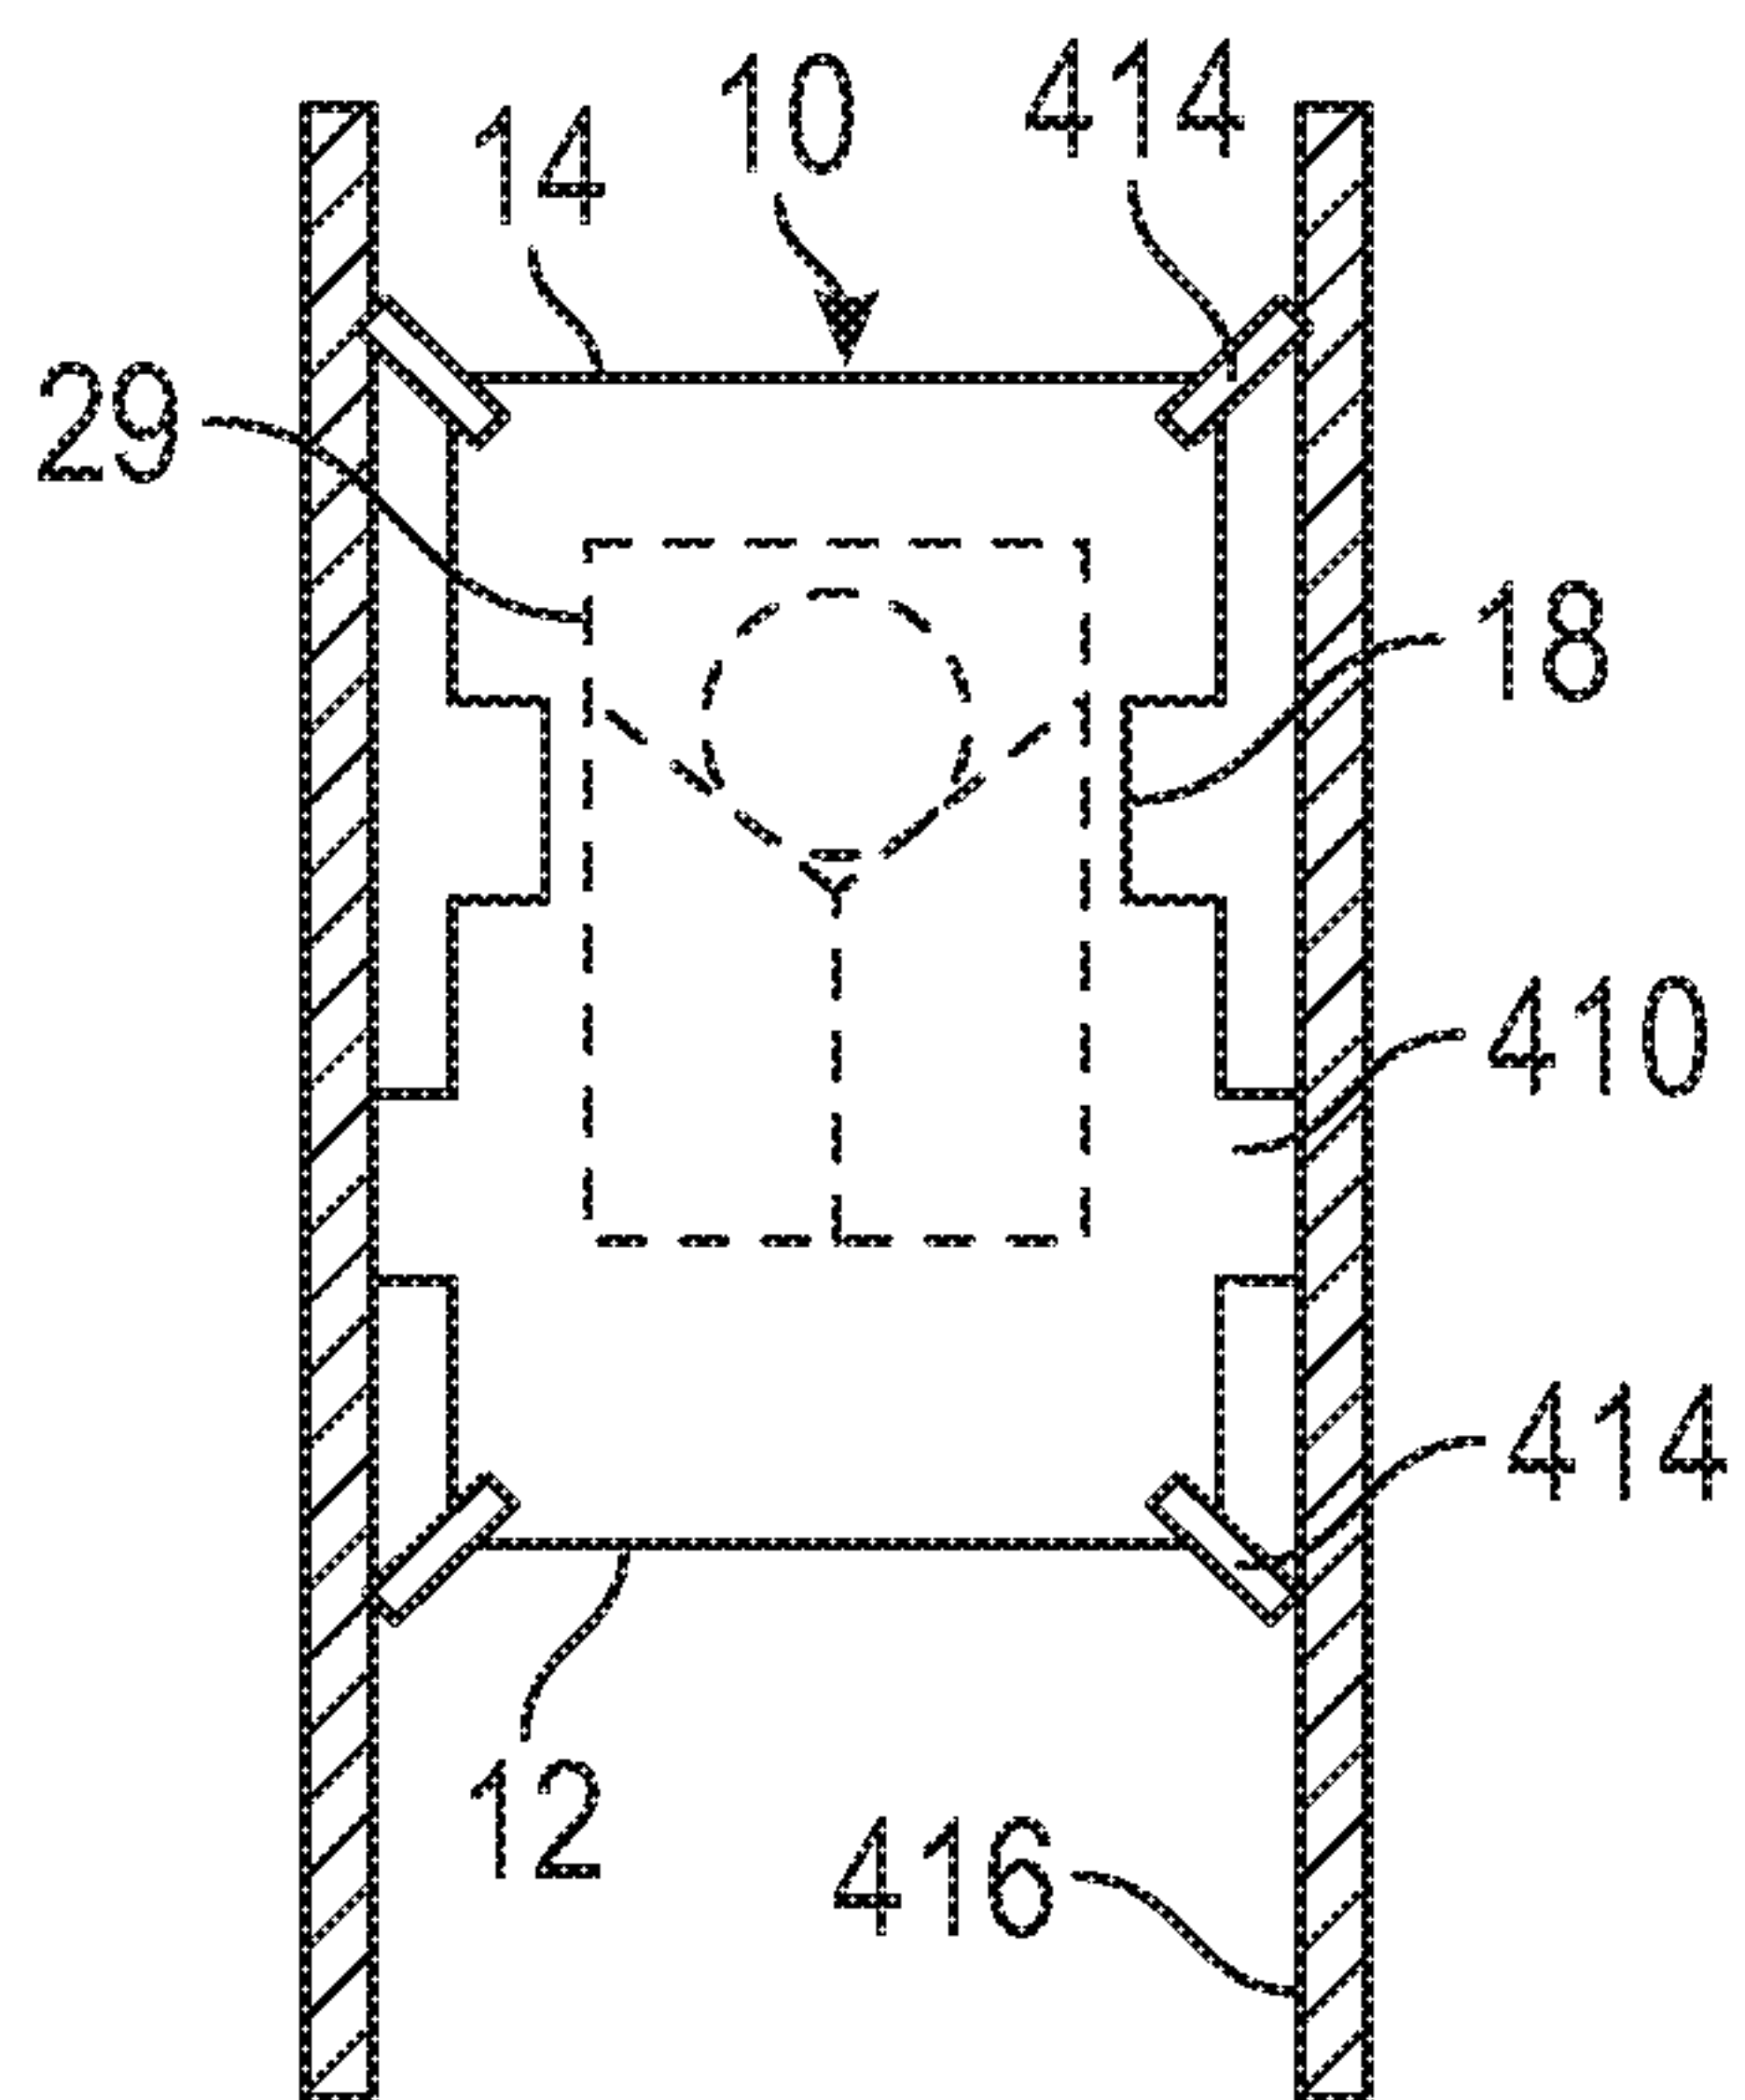


FIG. 10C

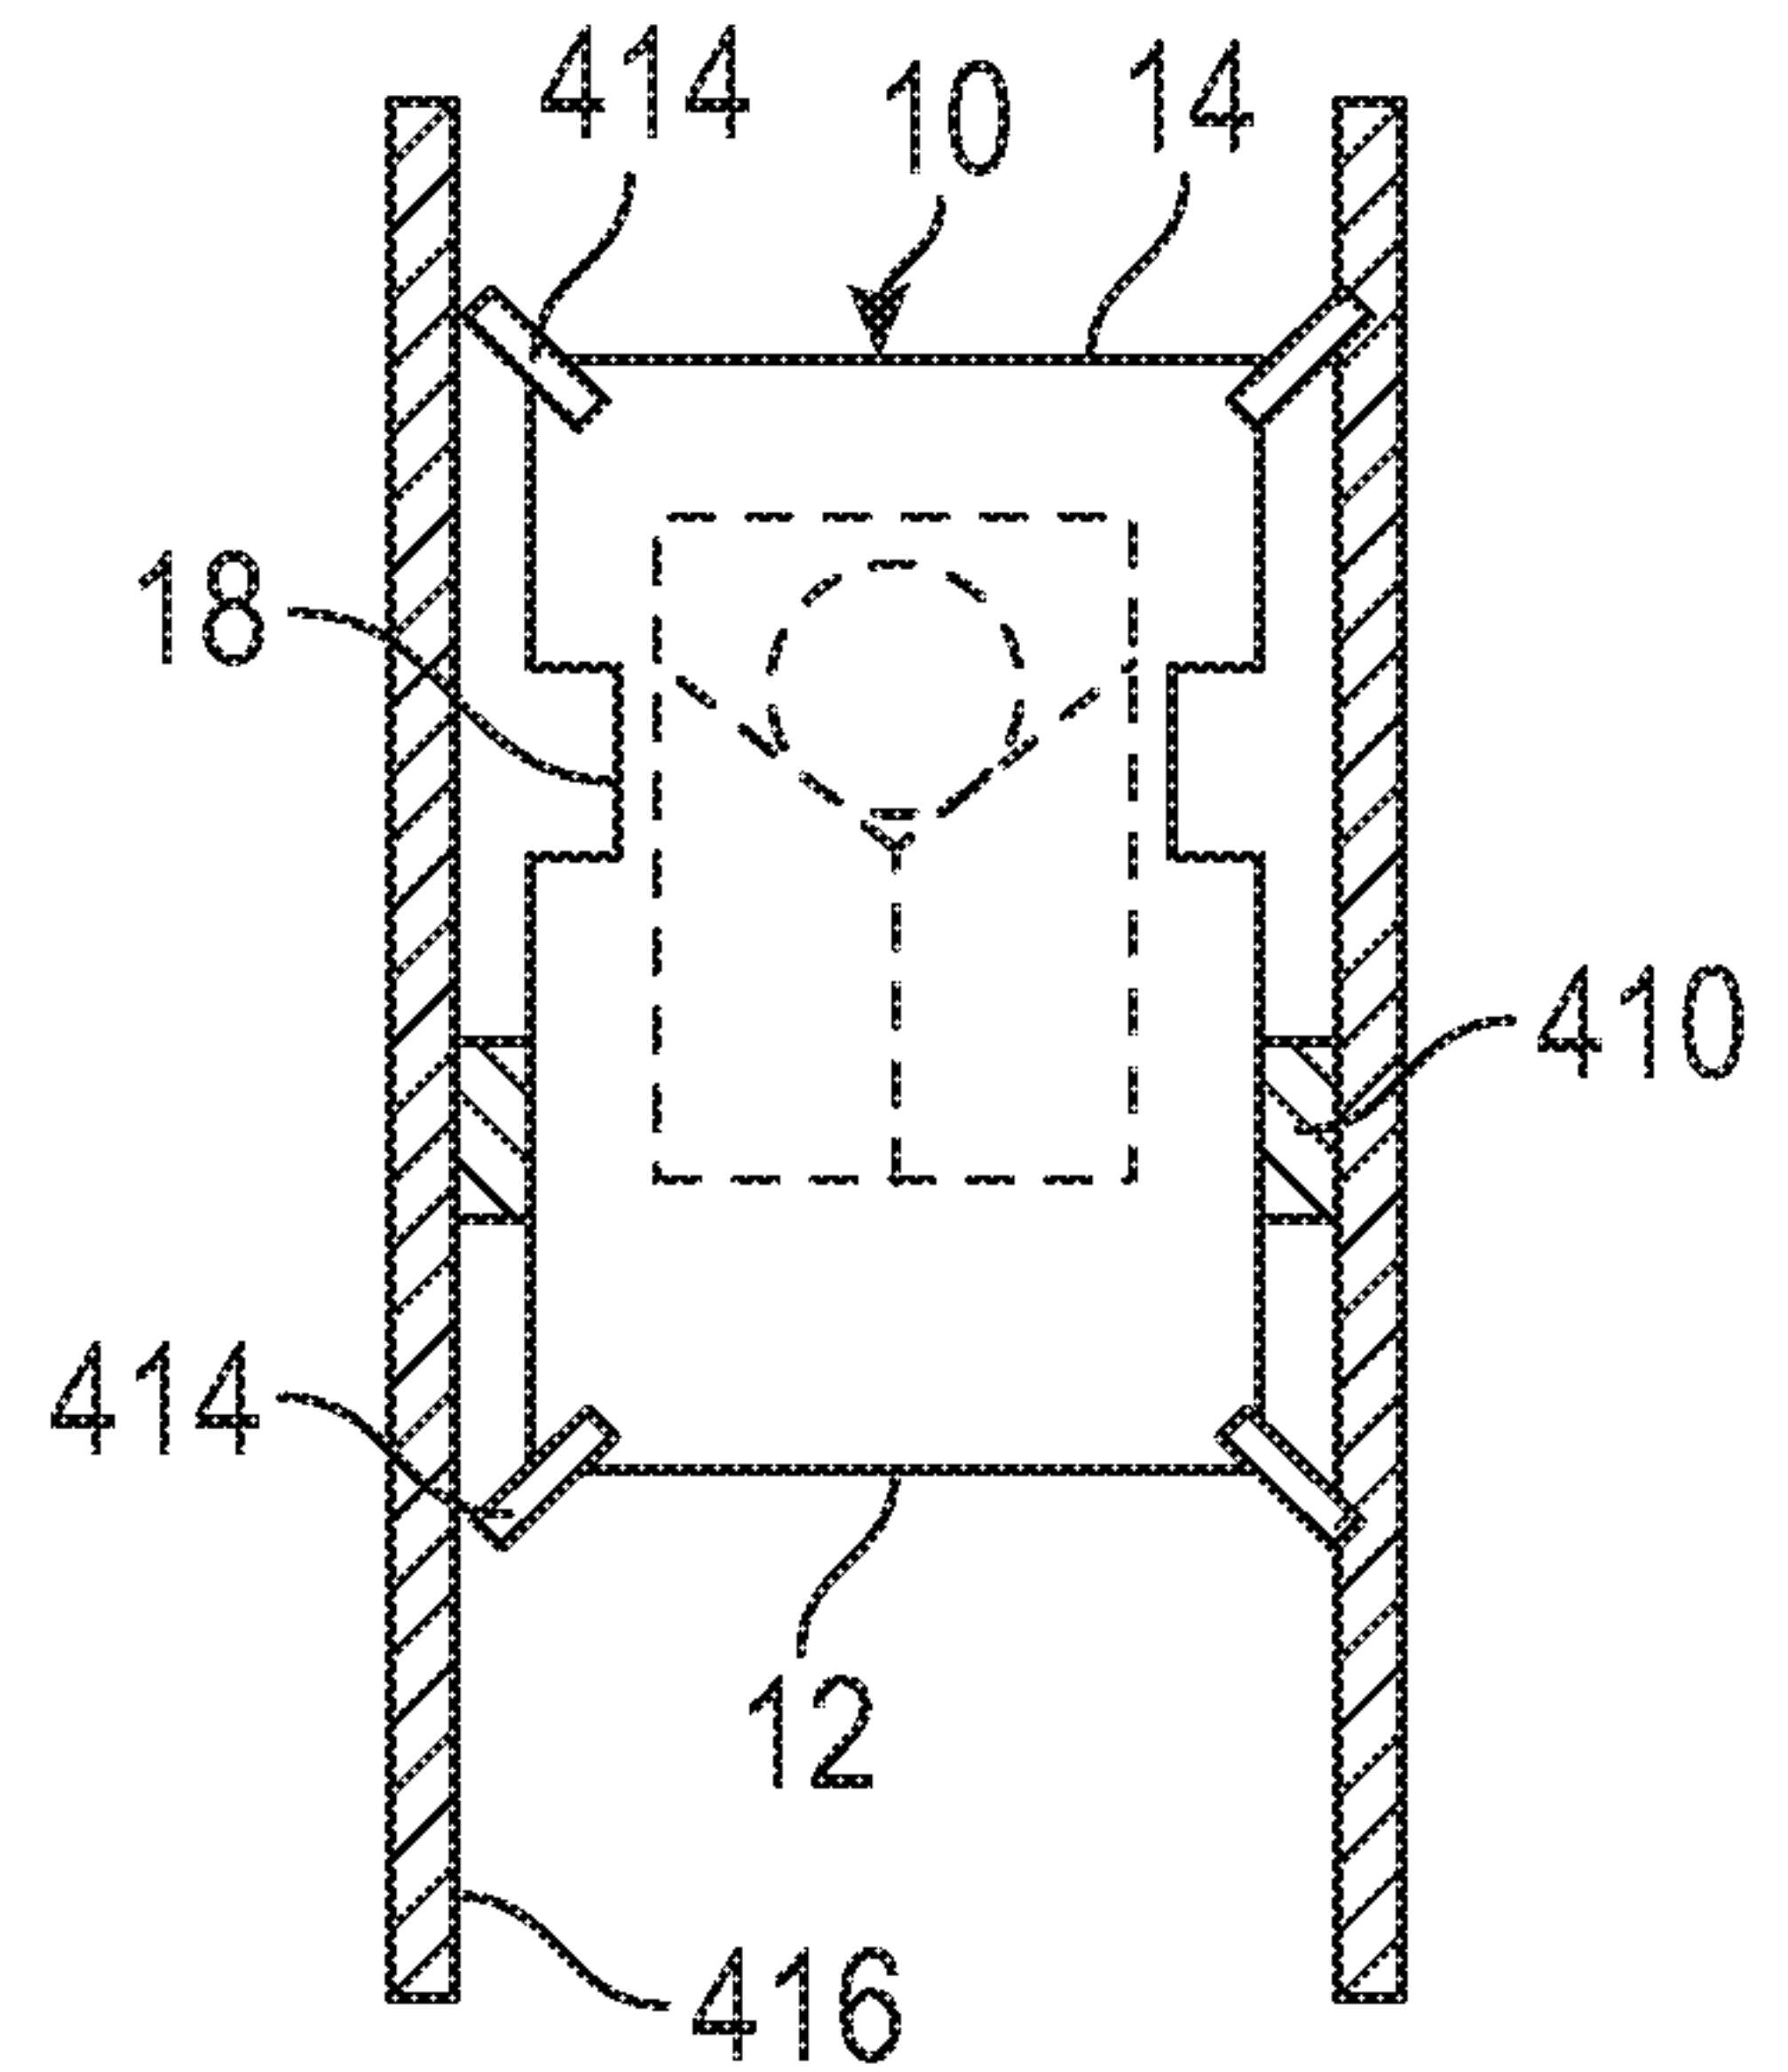


FIG. 10D

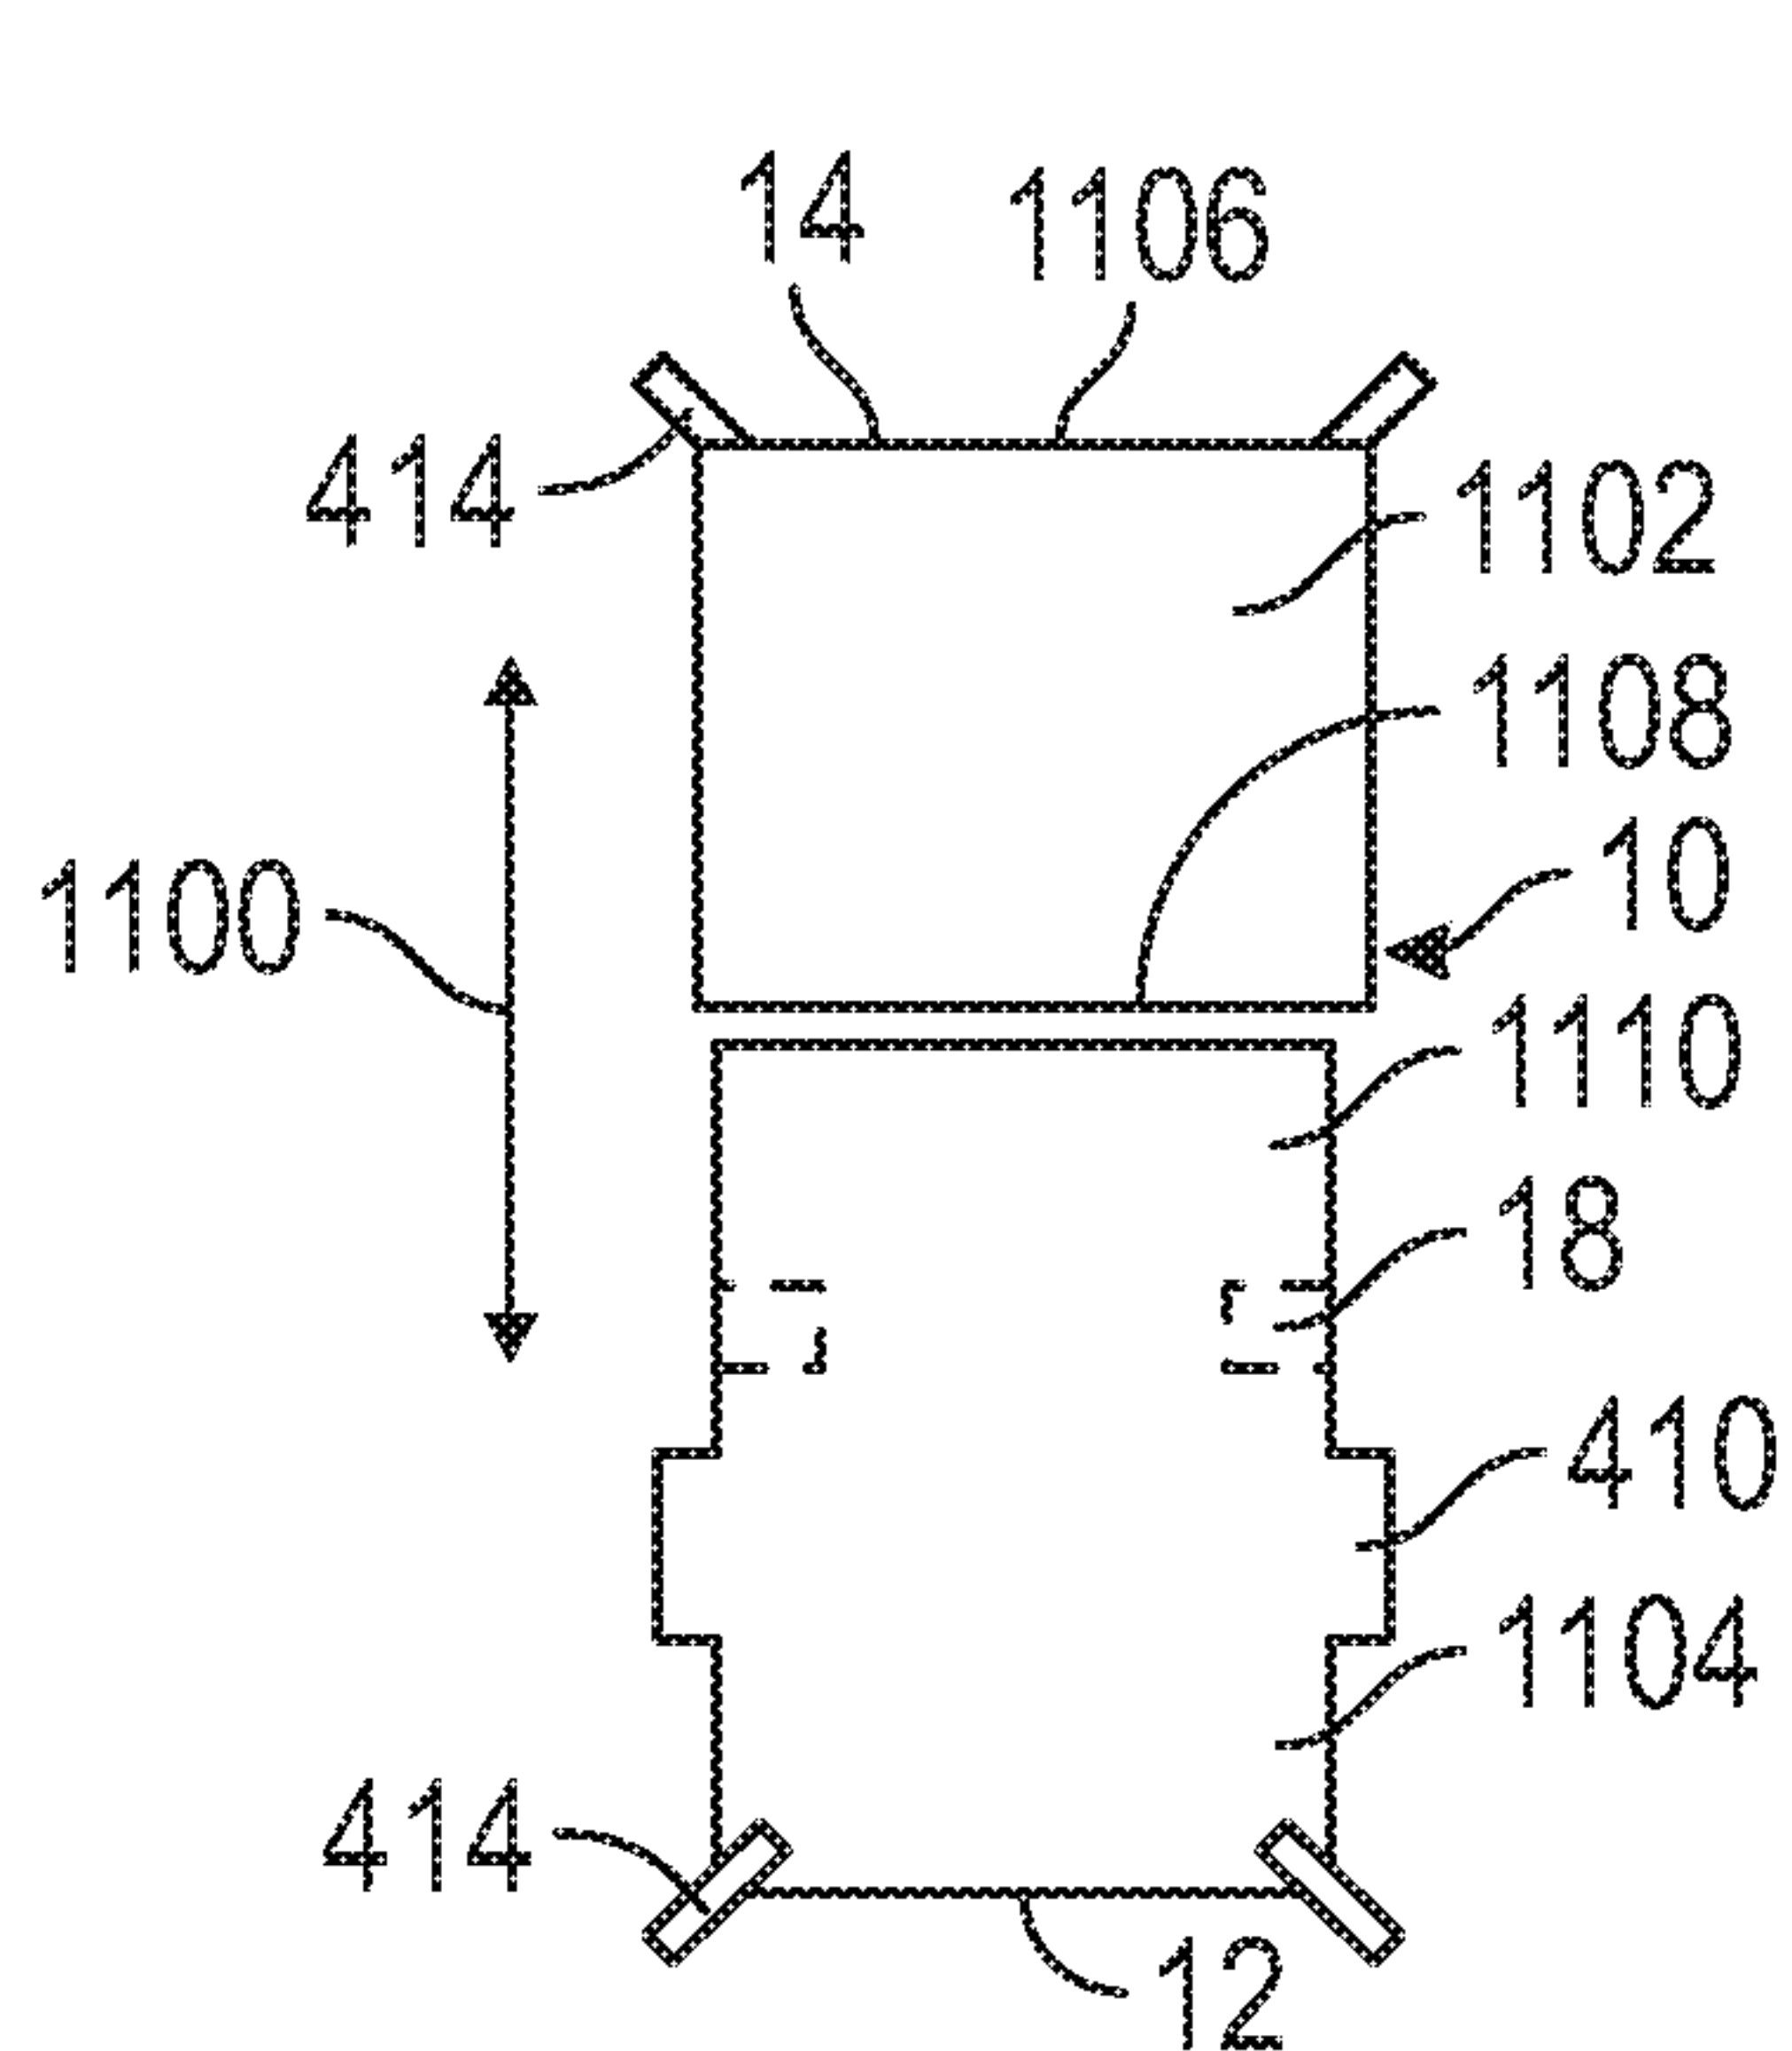


FIG. 11A

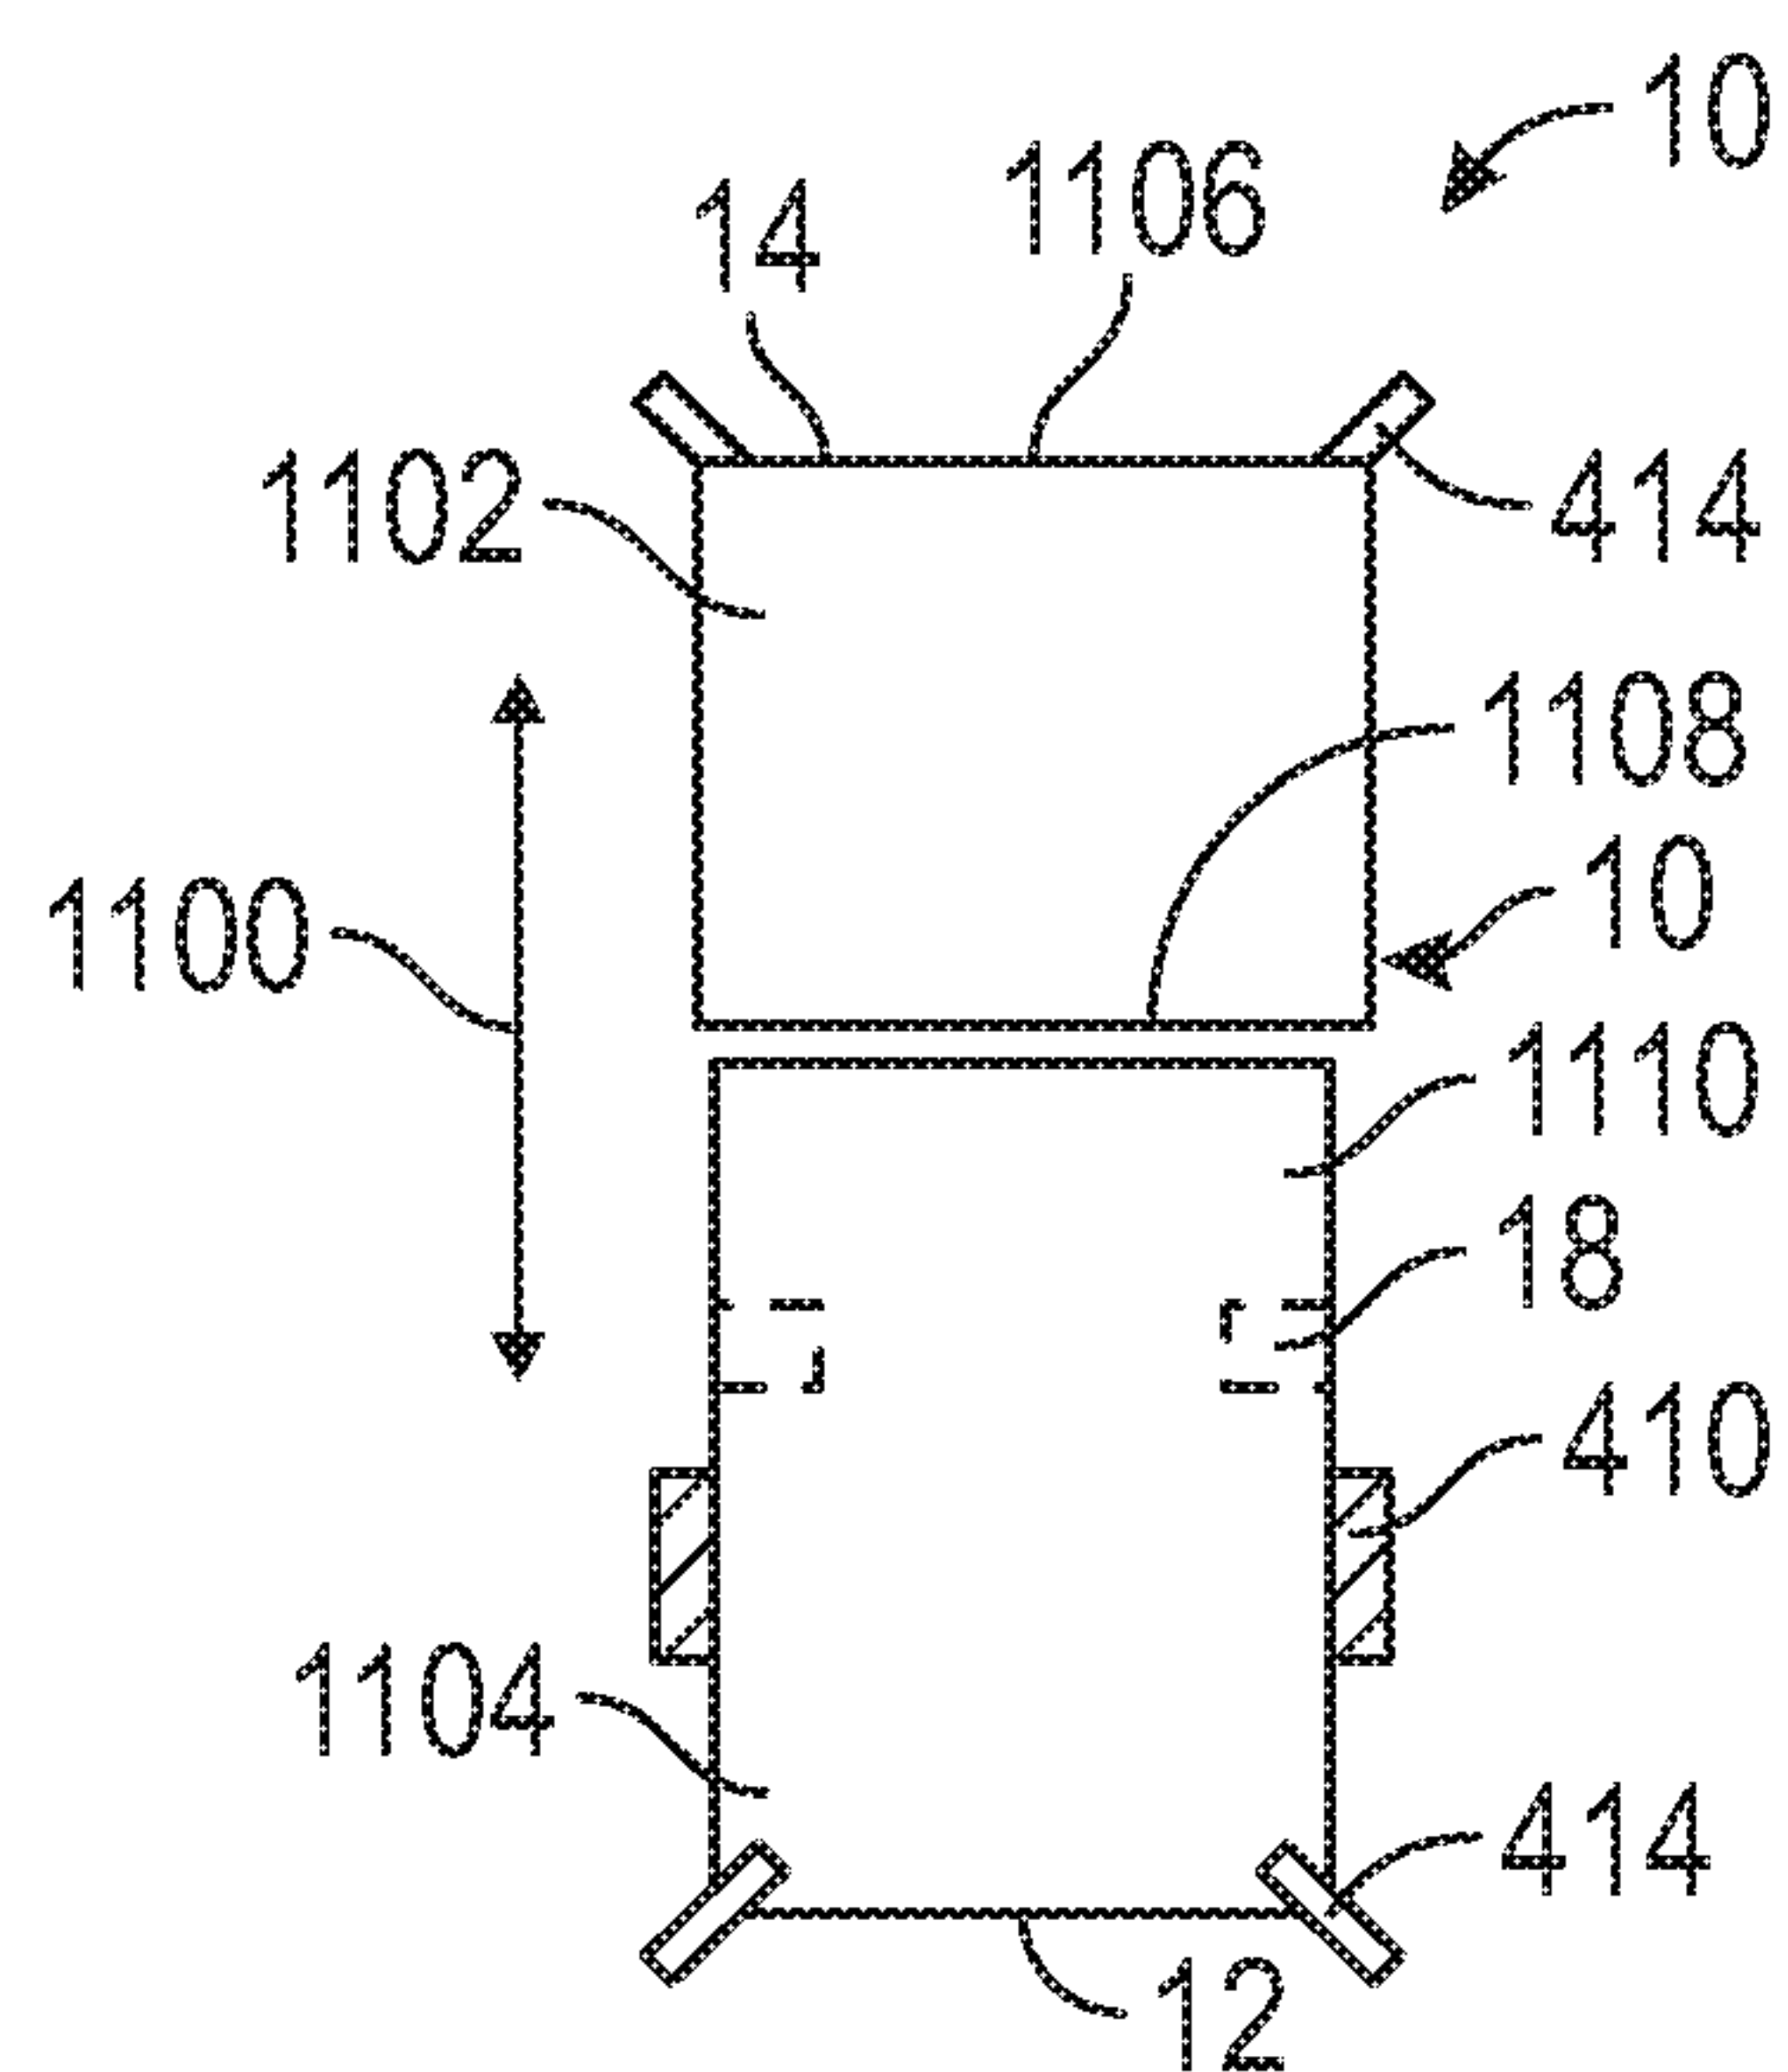


FIG. 11B

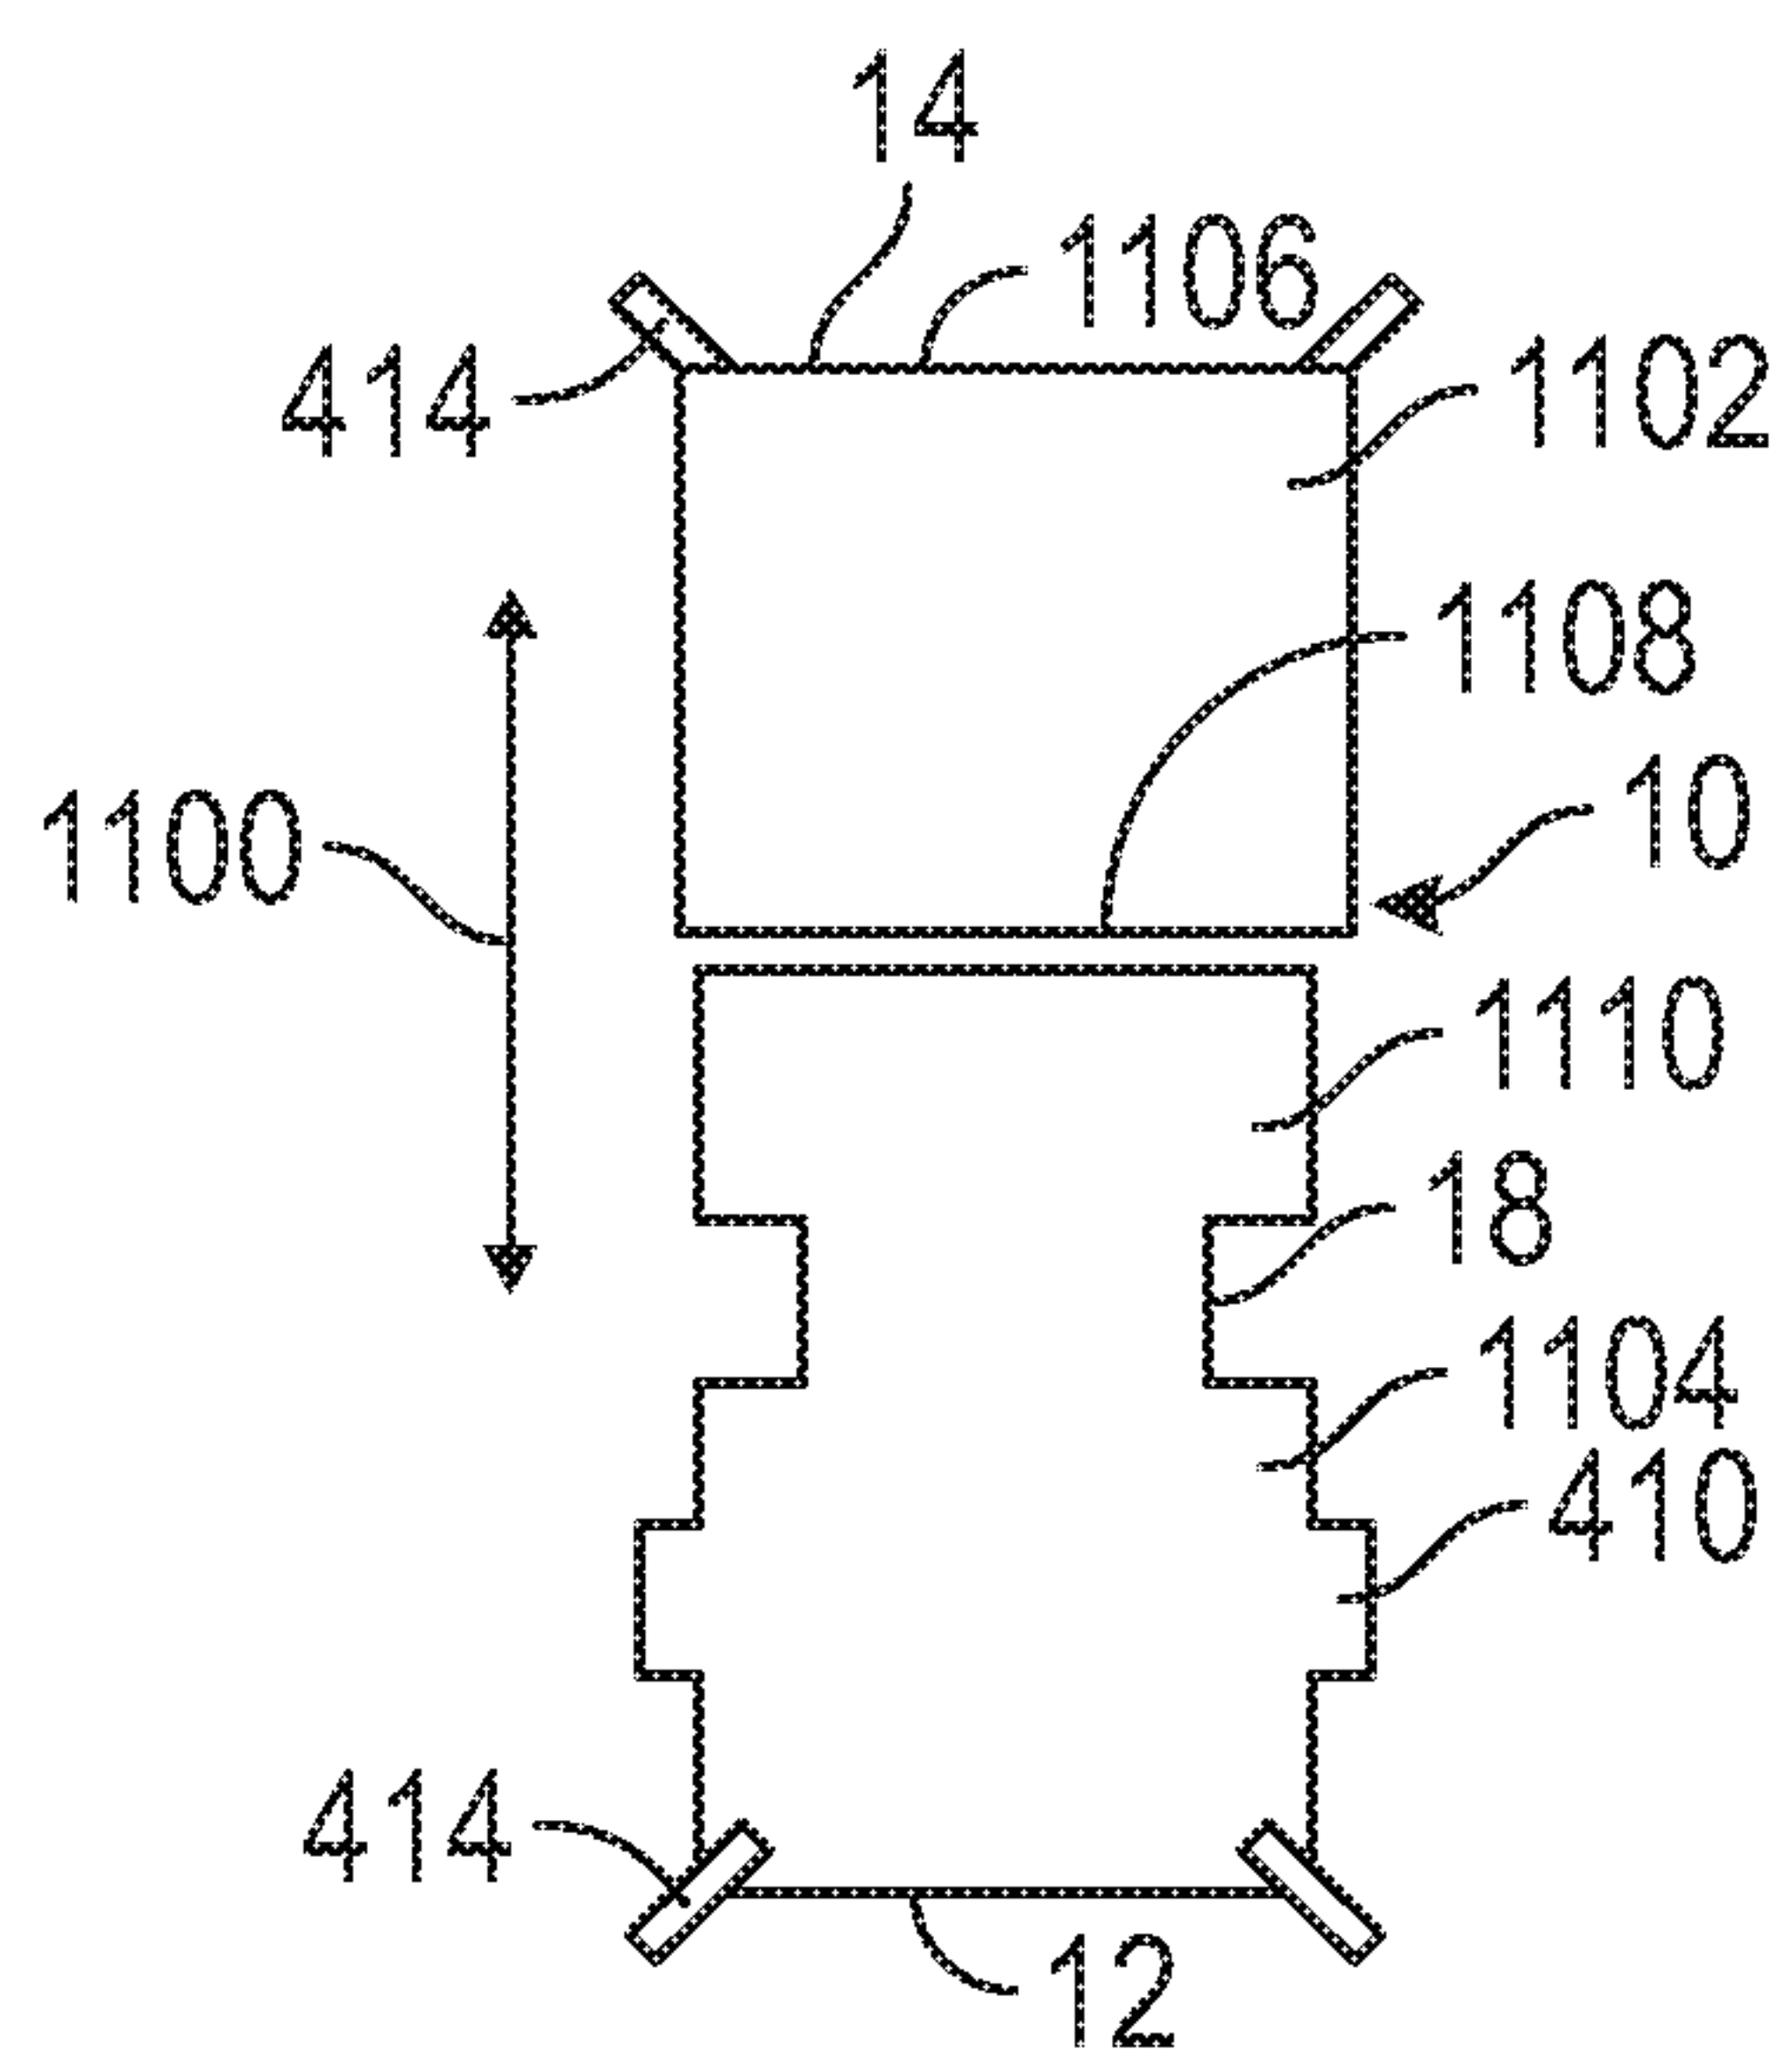


FIG. 11C

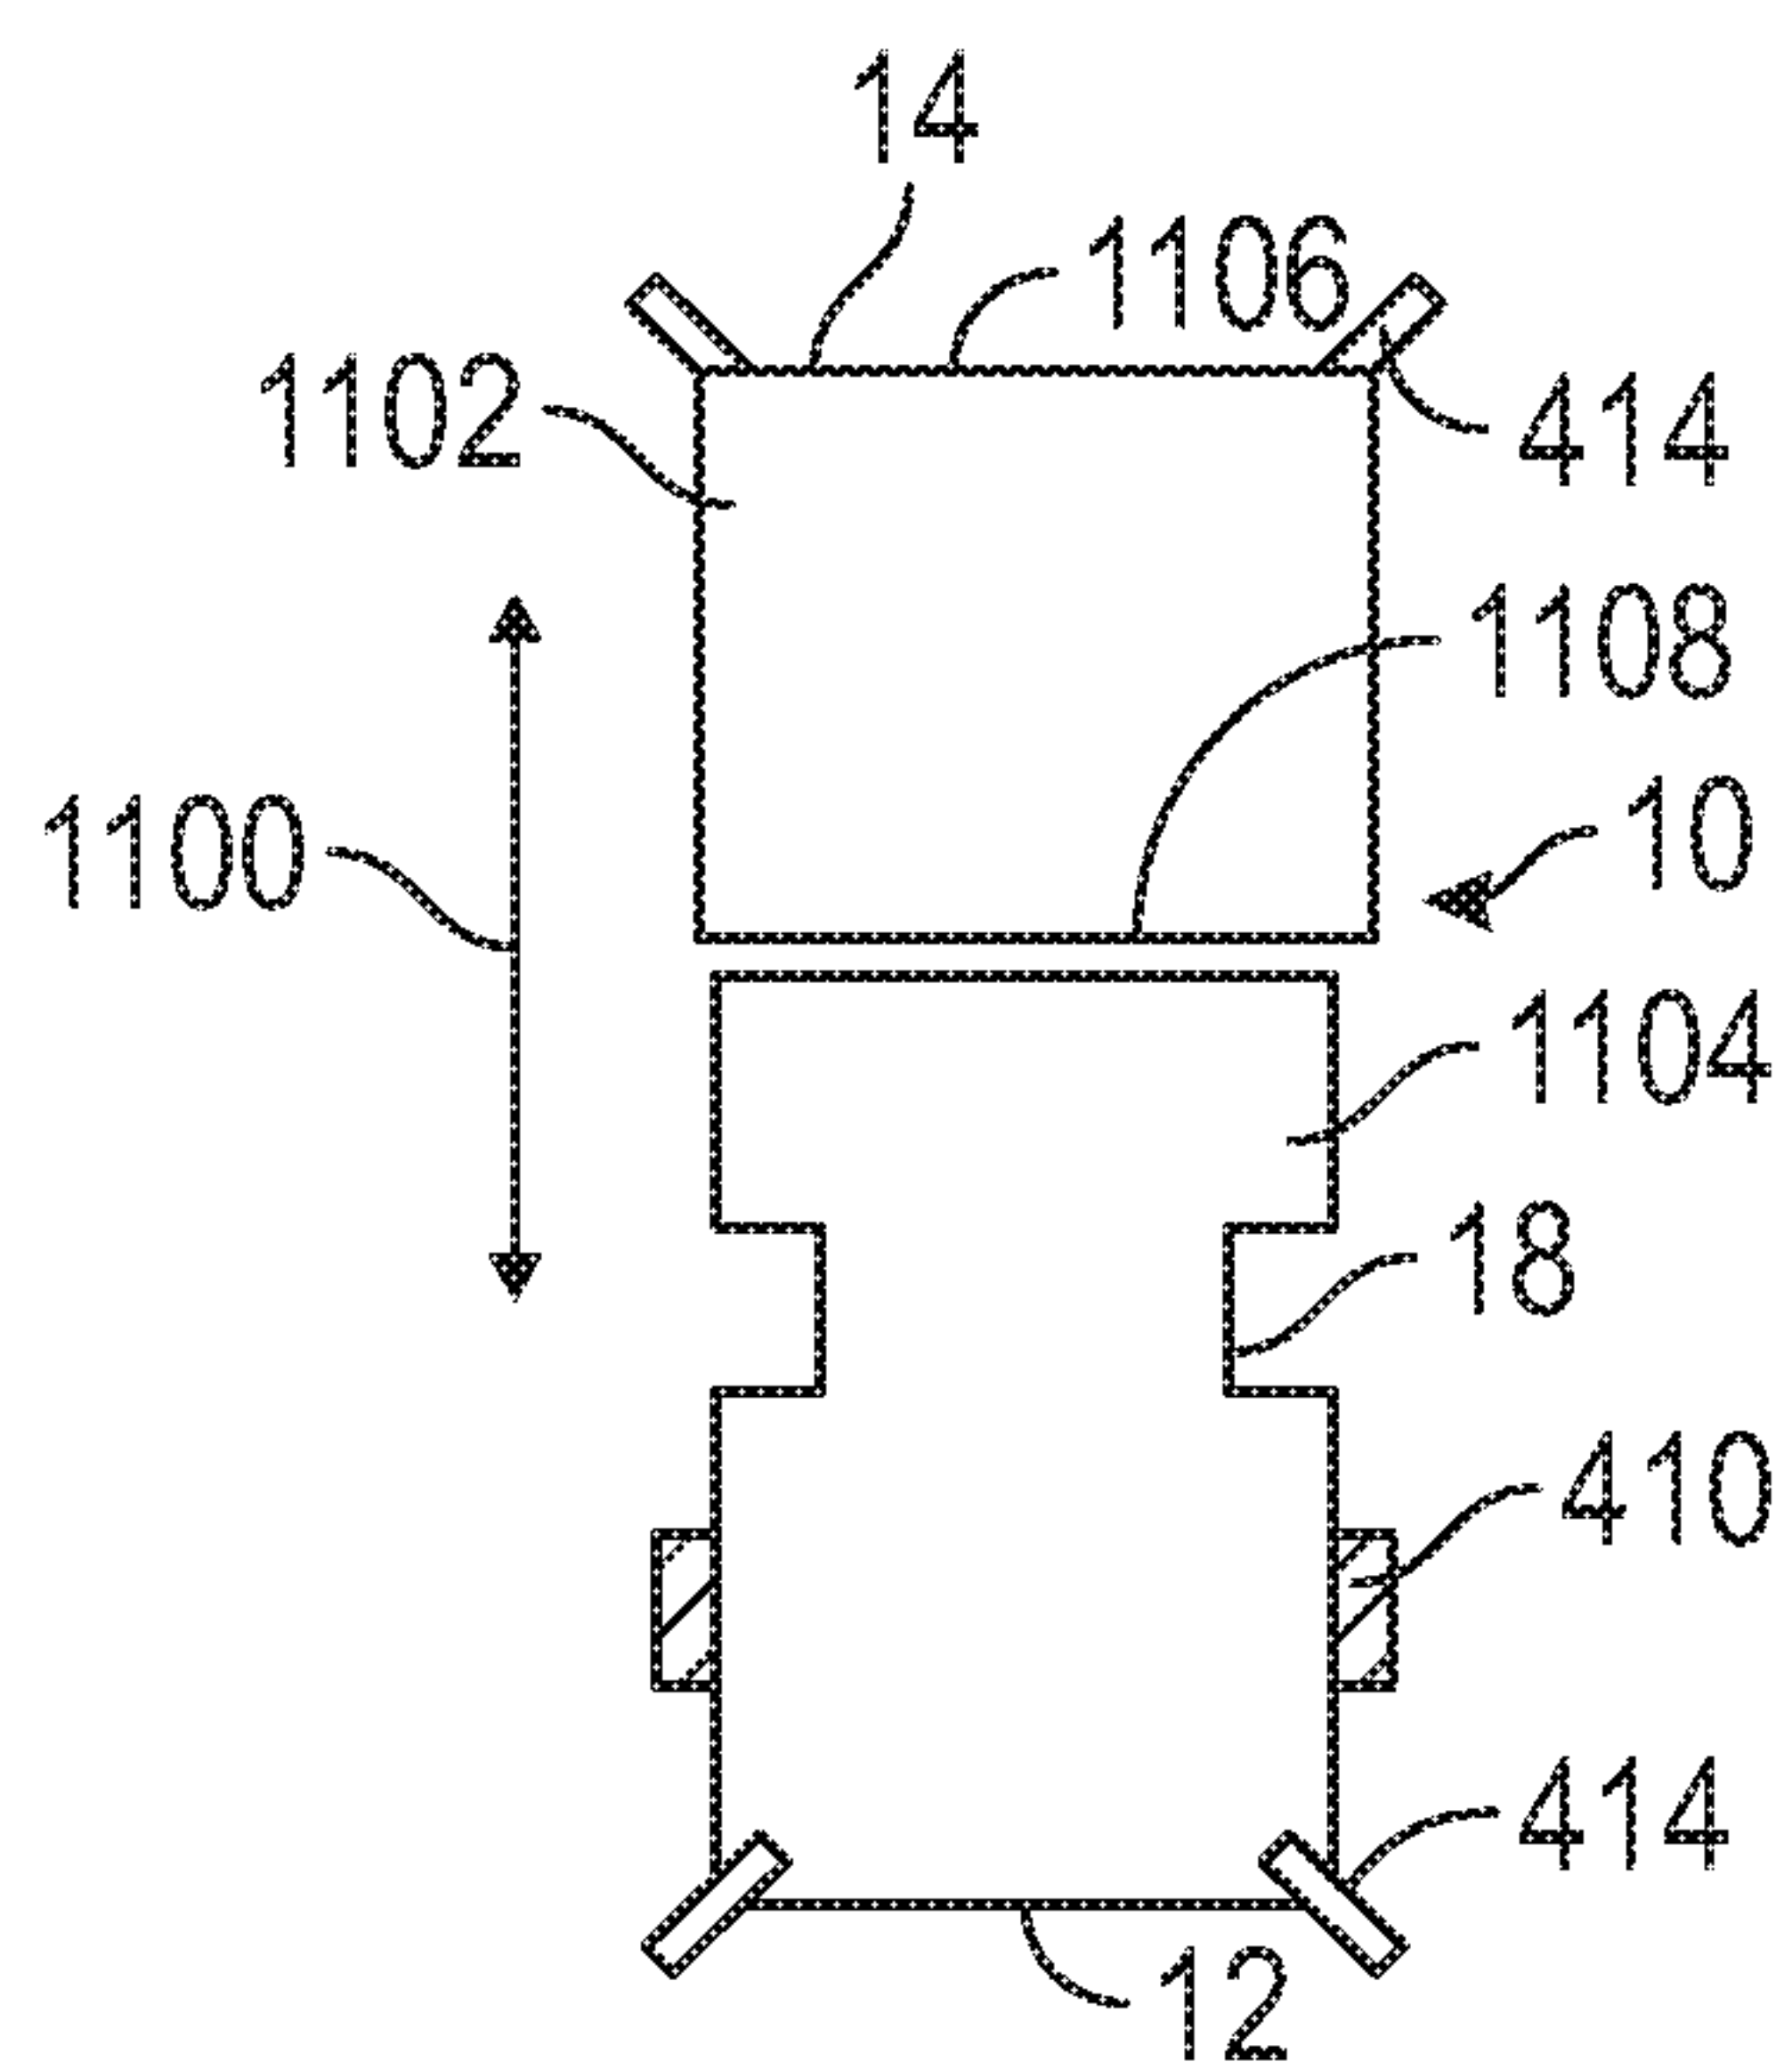


FIG. 11D

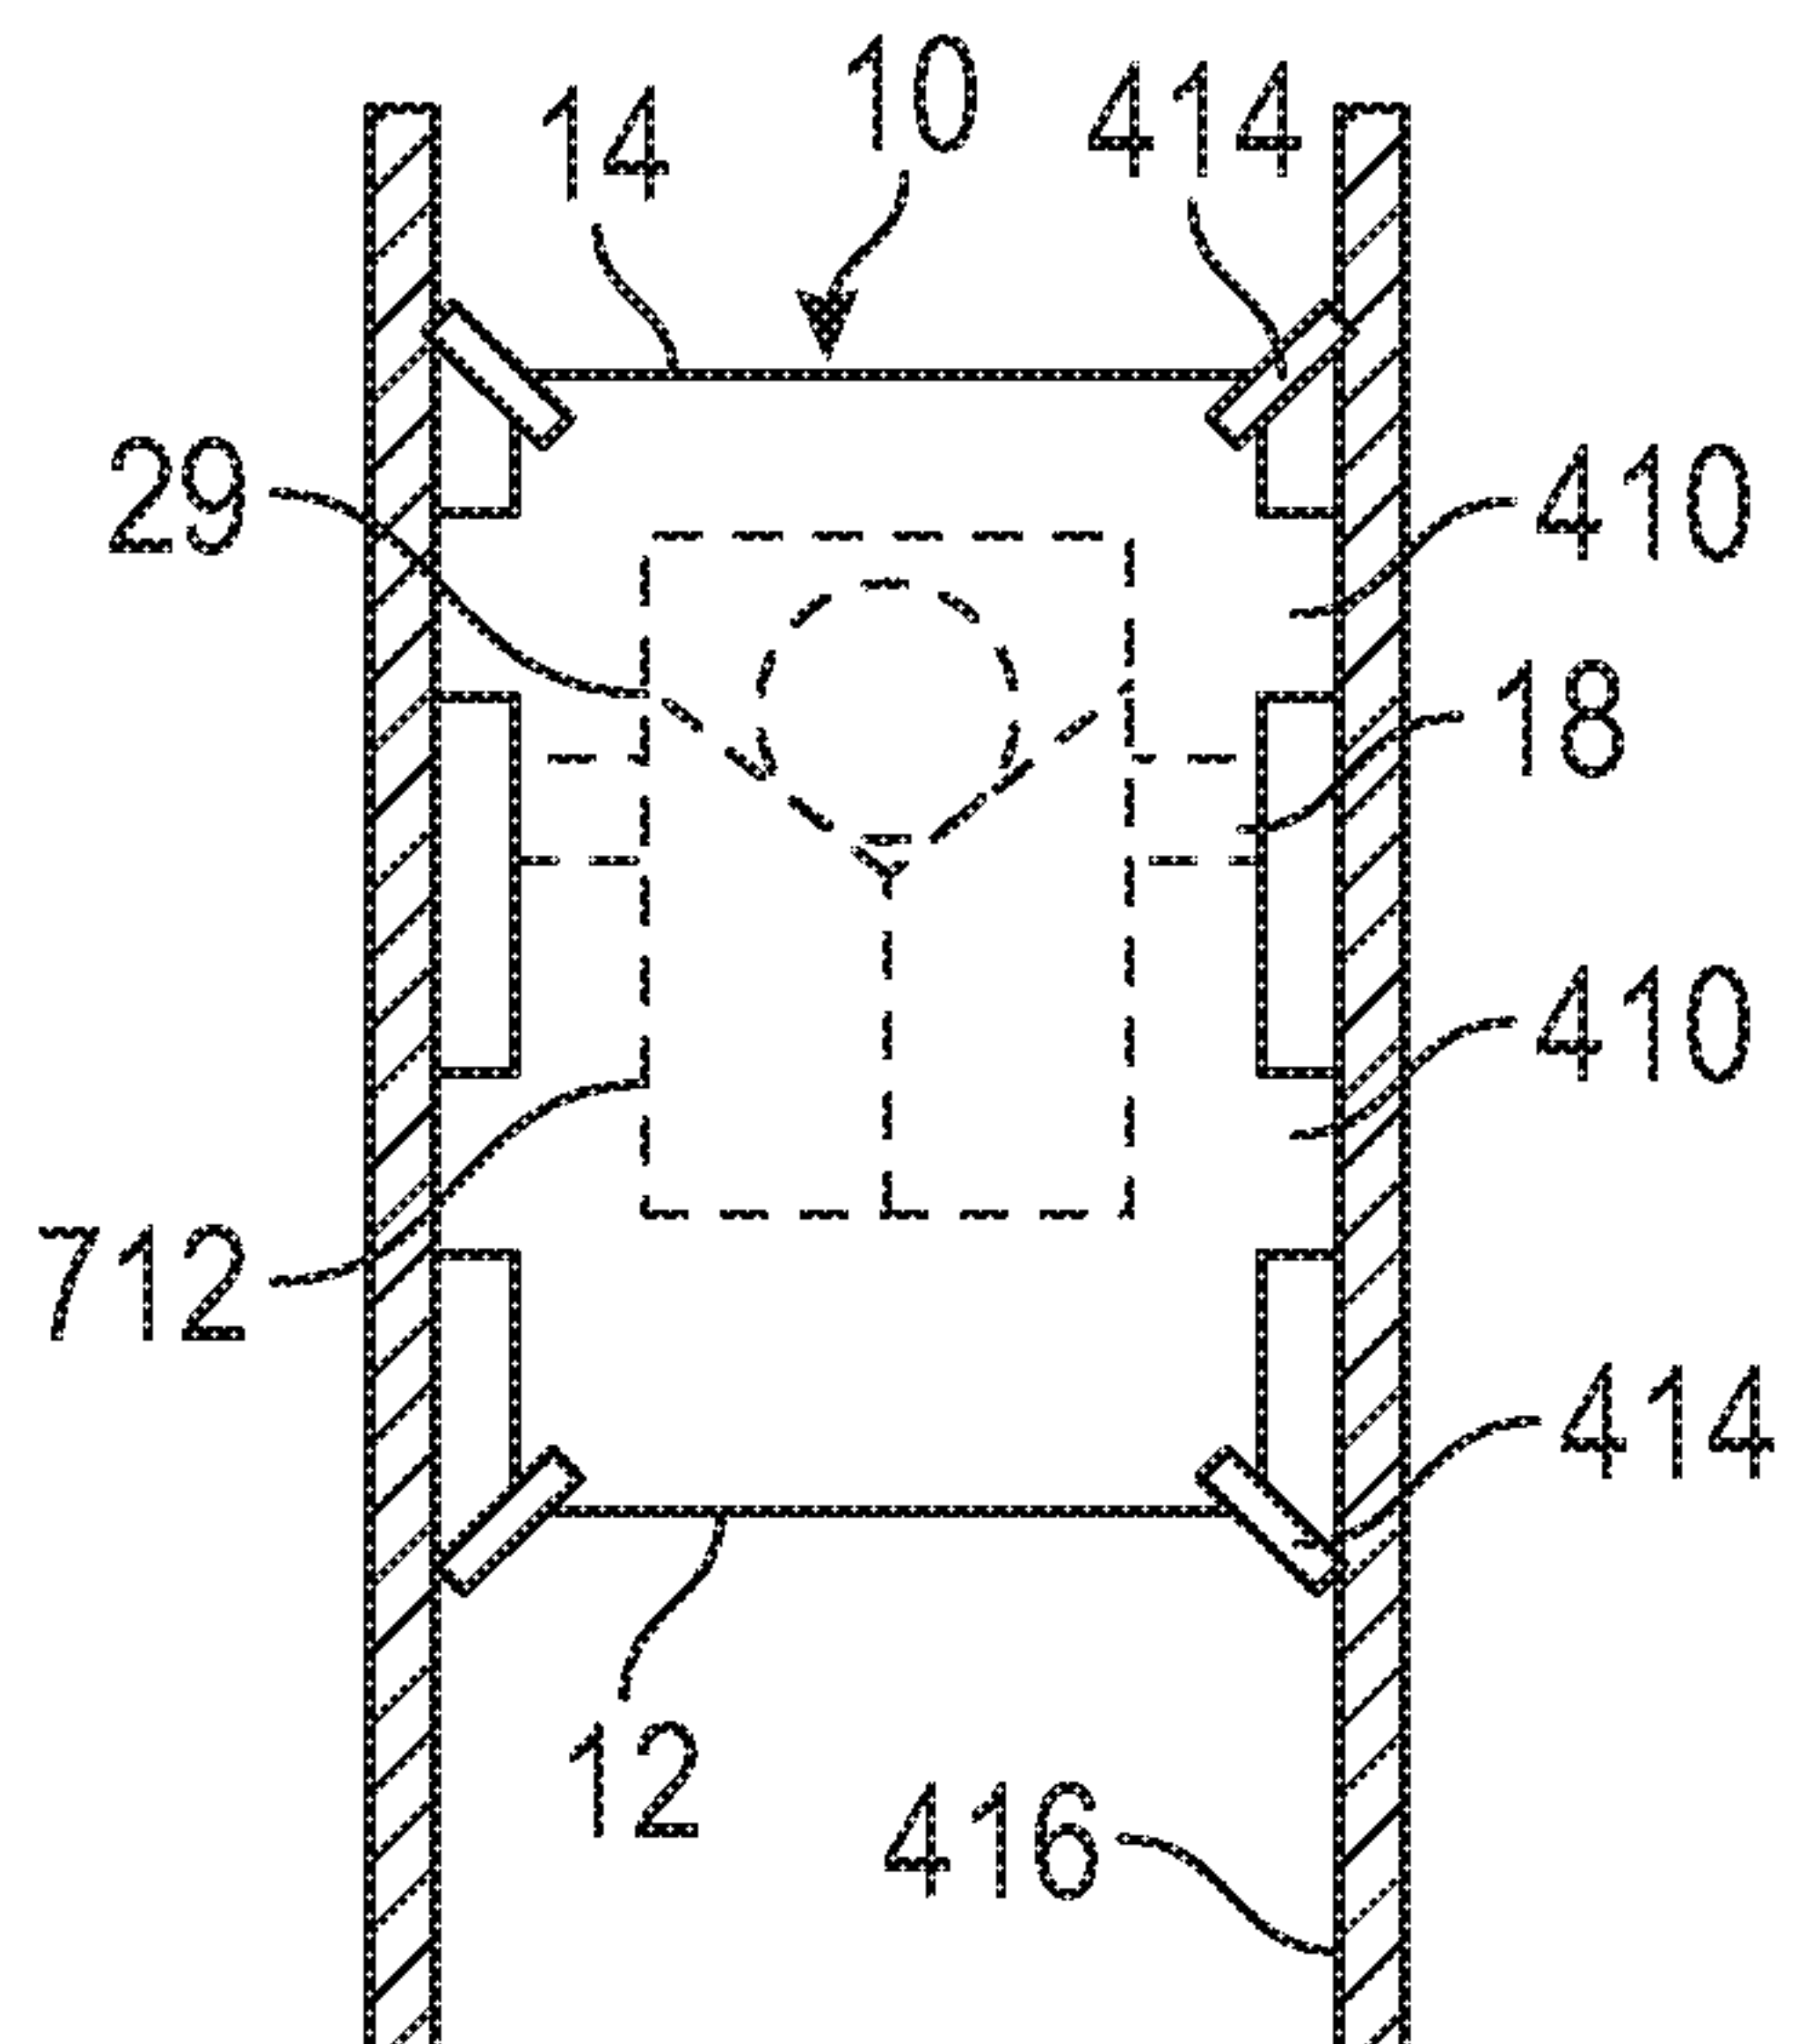


FIG. 12A

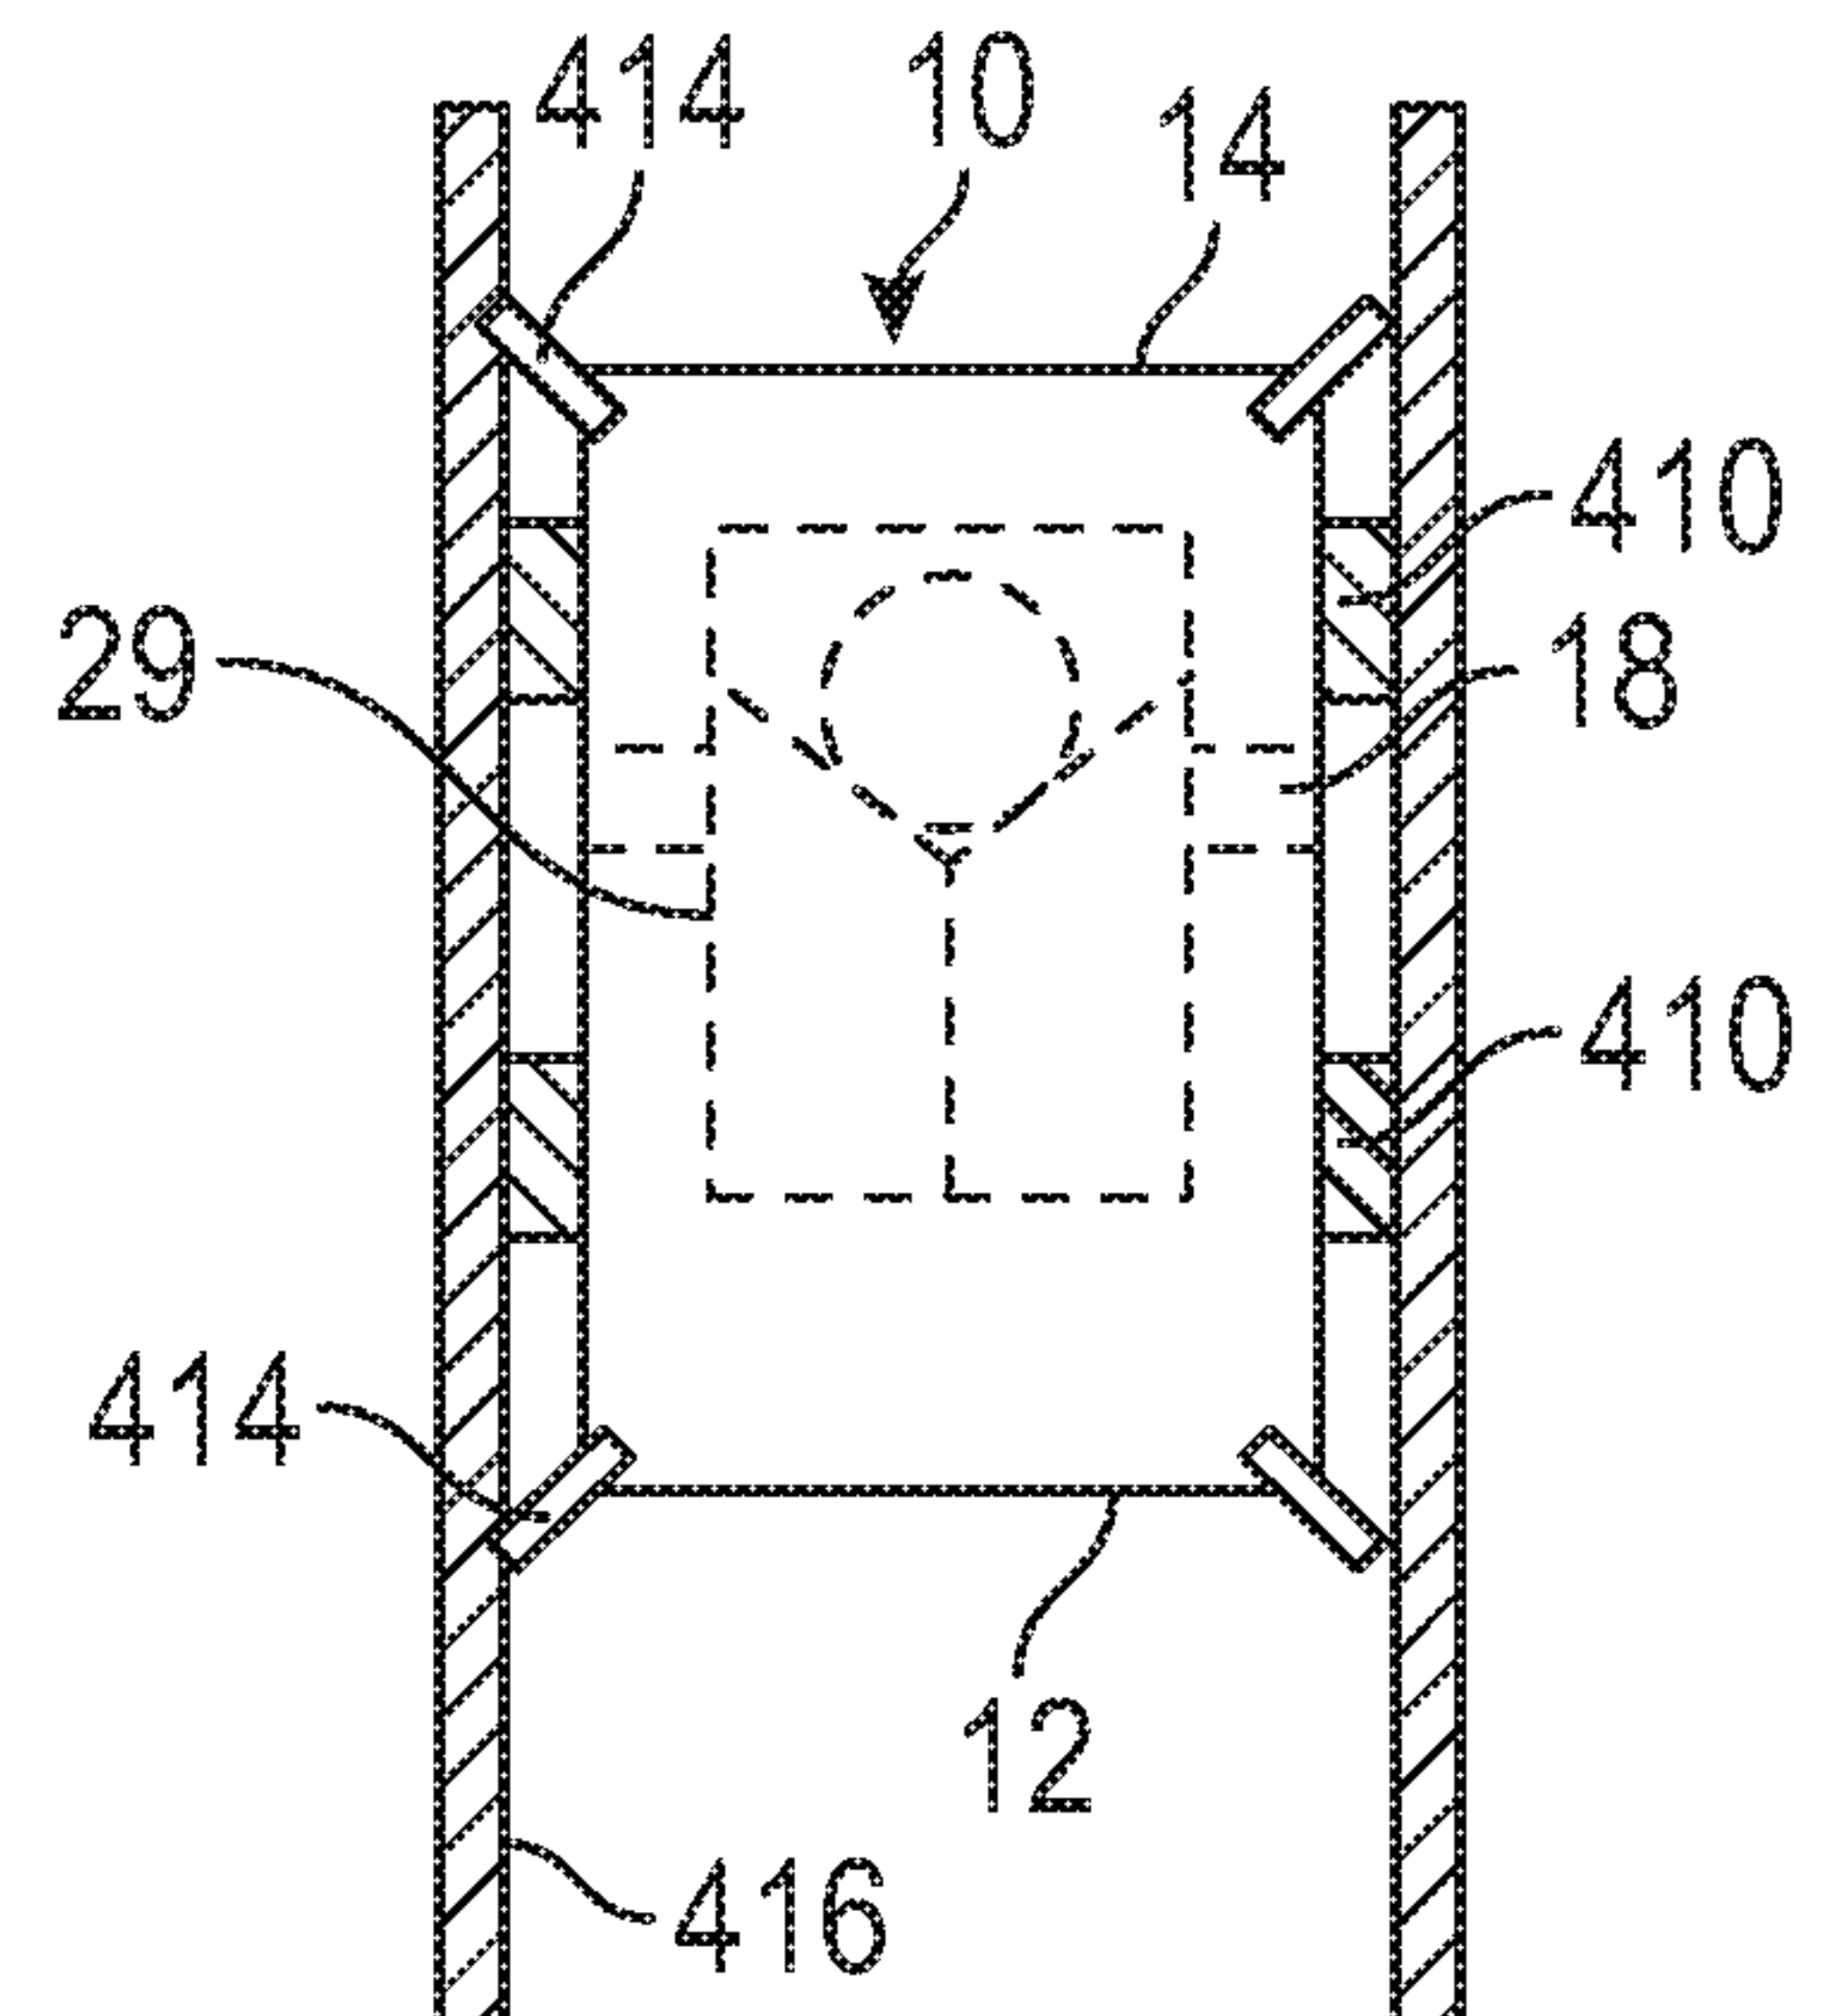


FIG. 12B

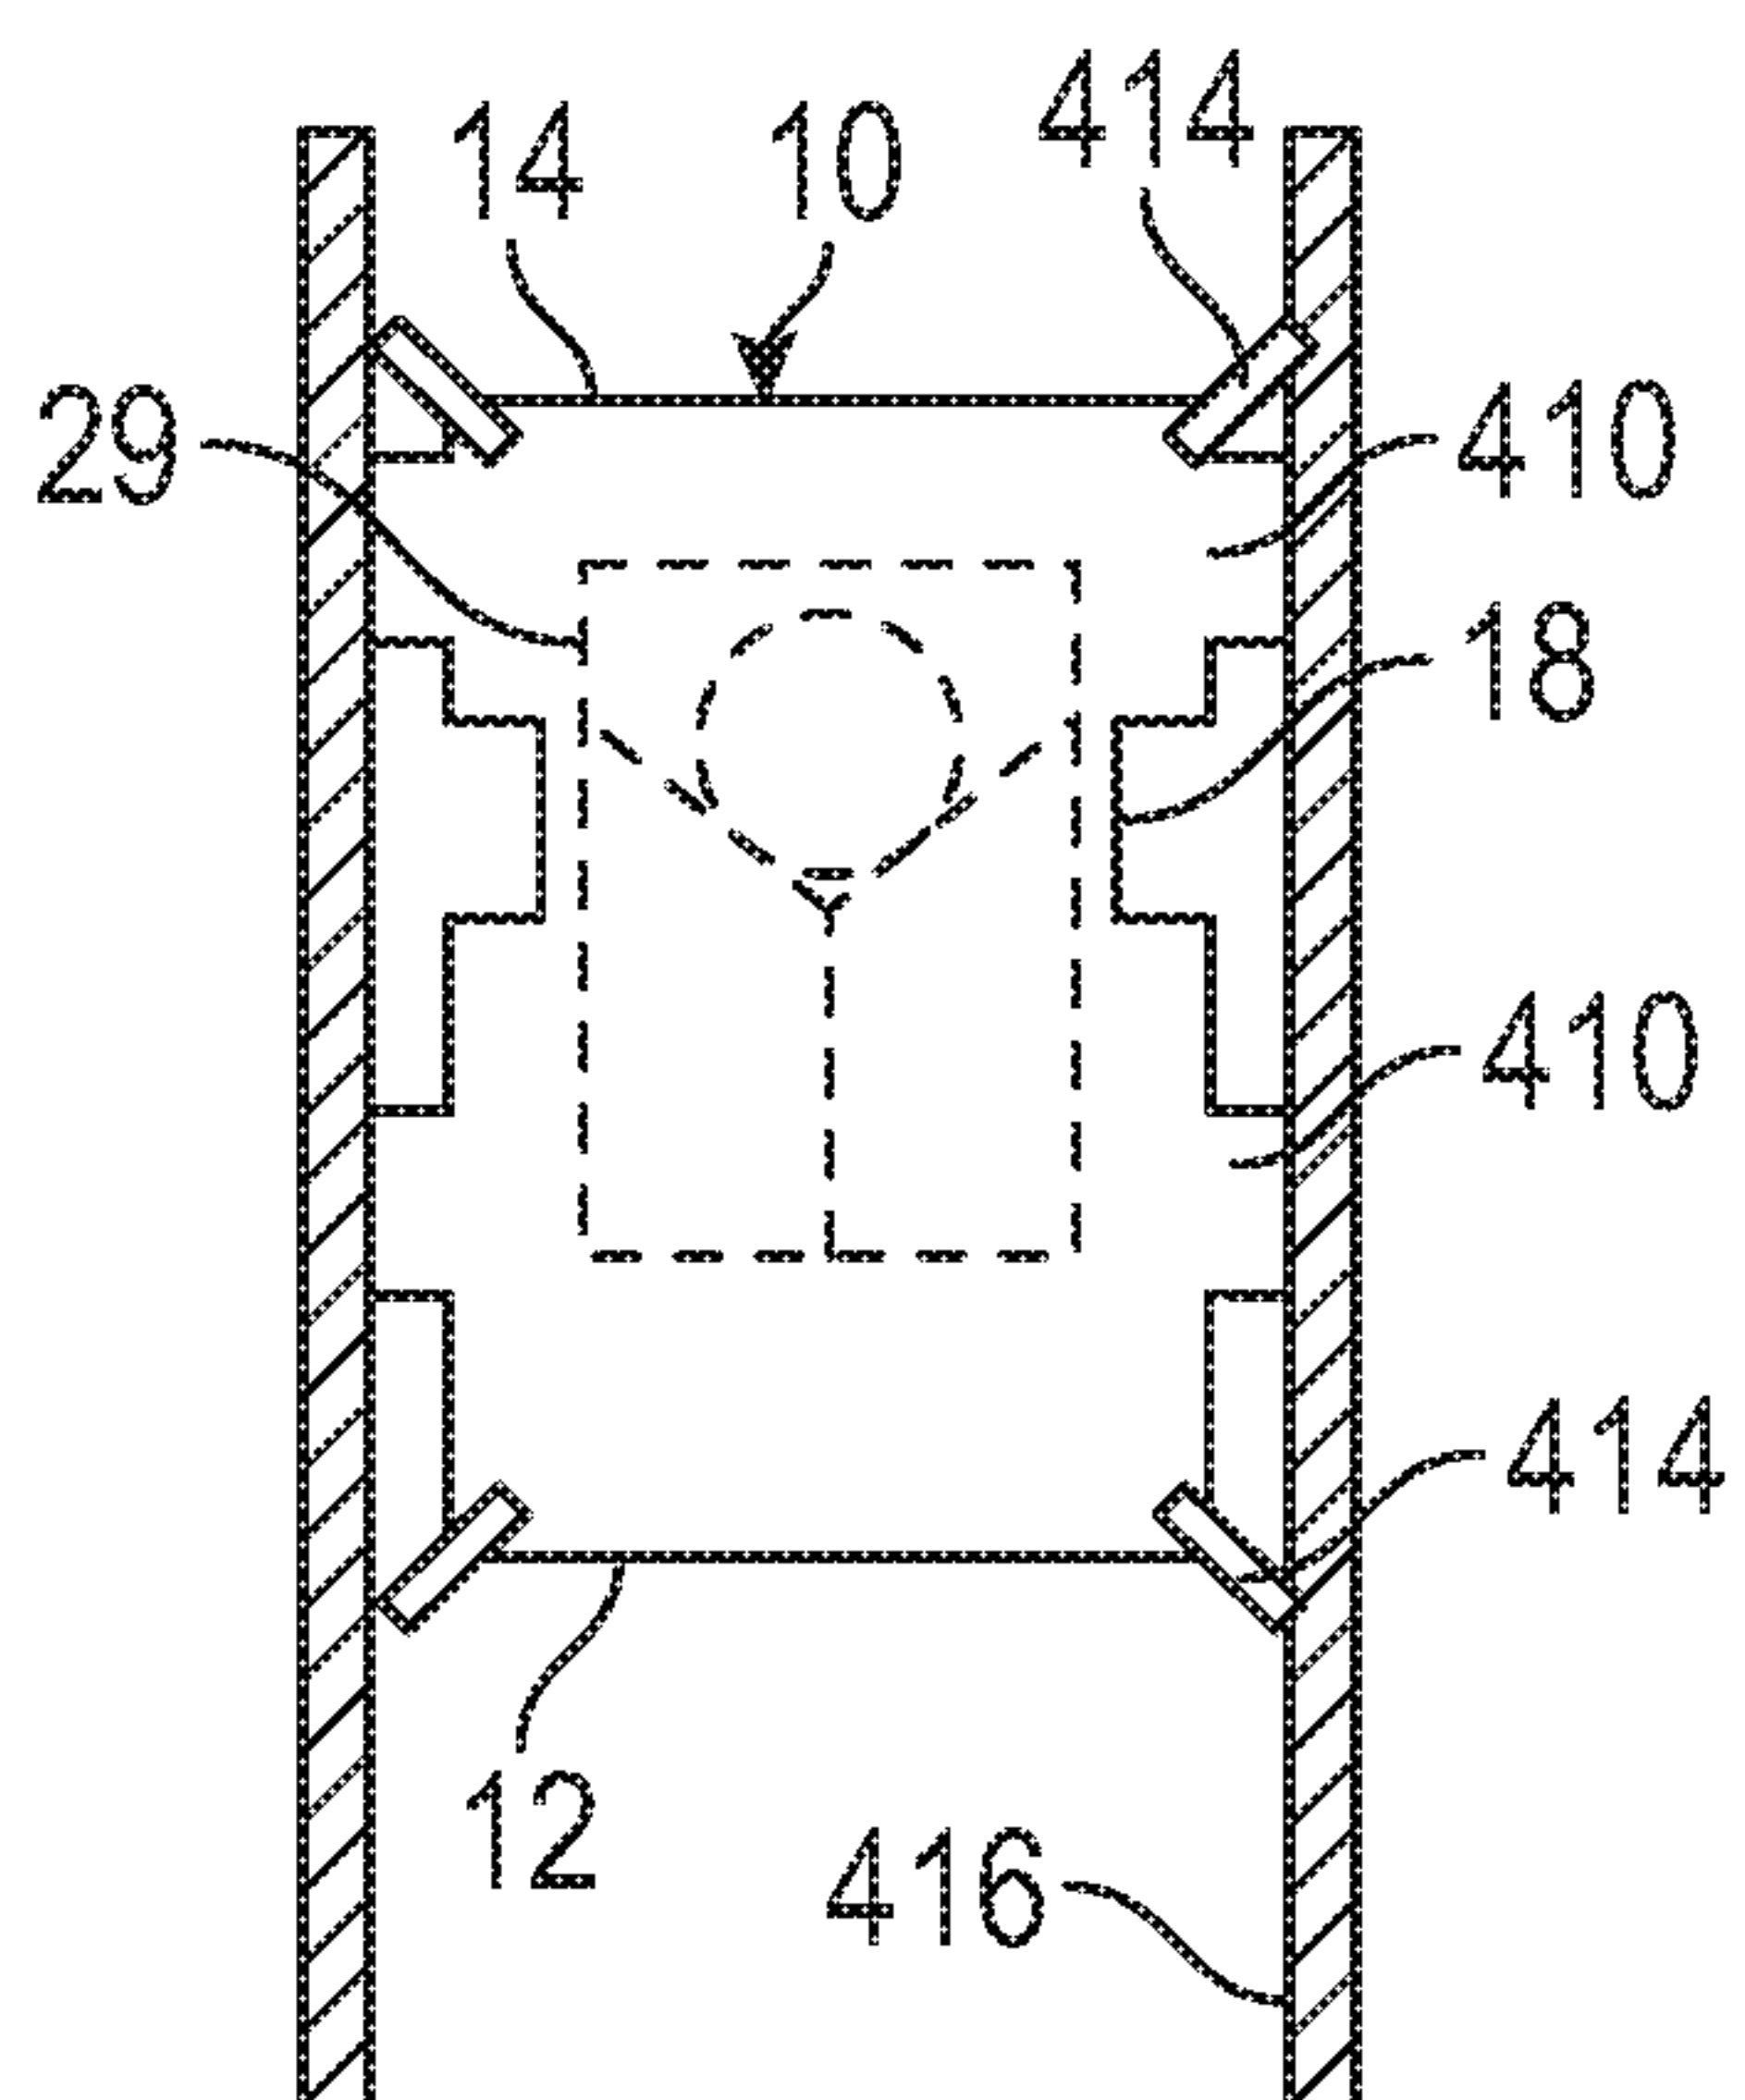


FIG. 12C

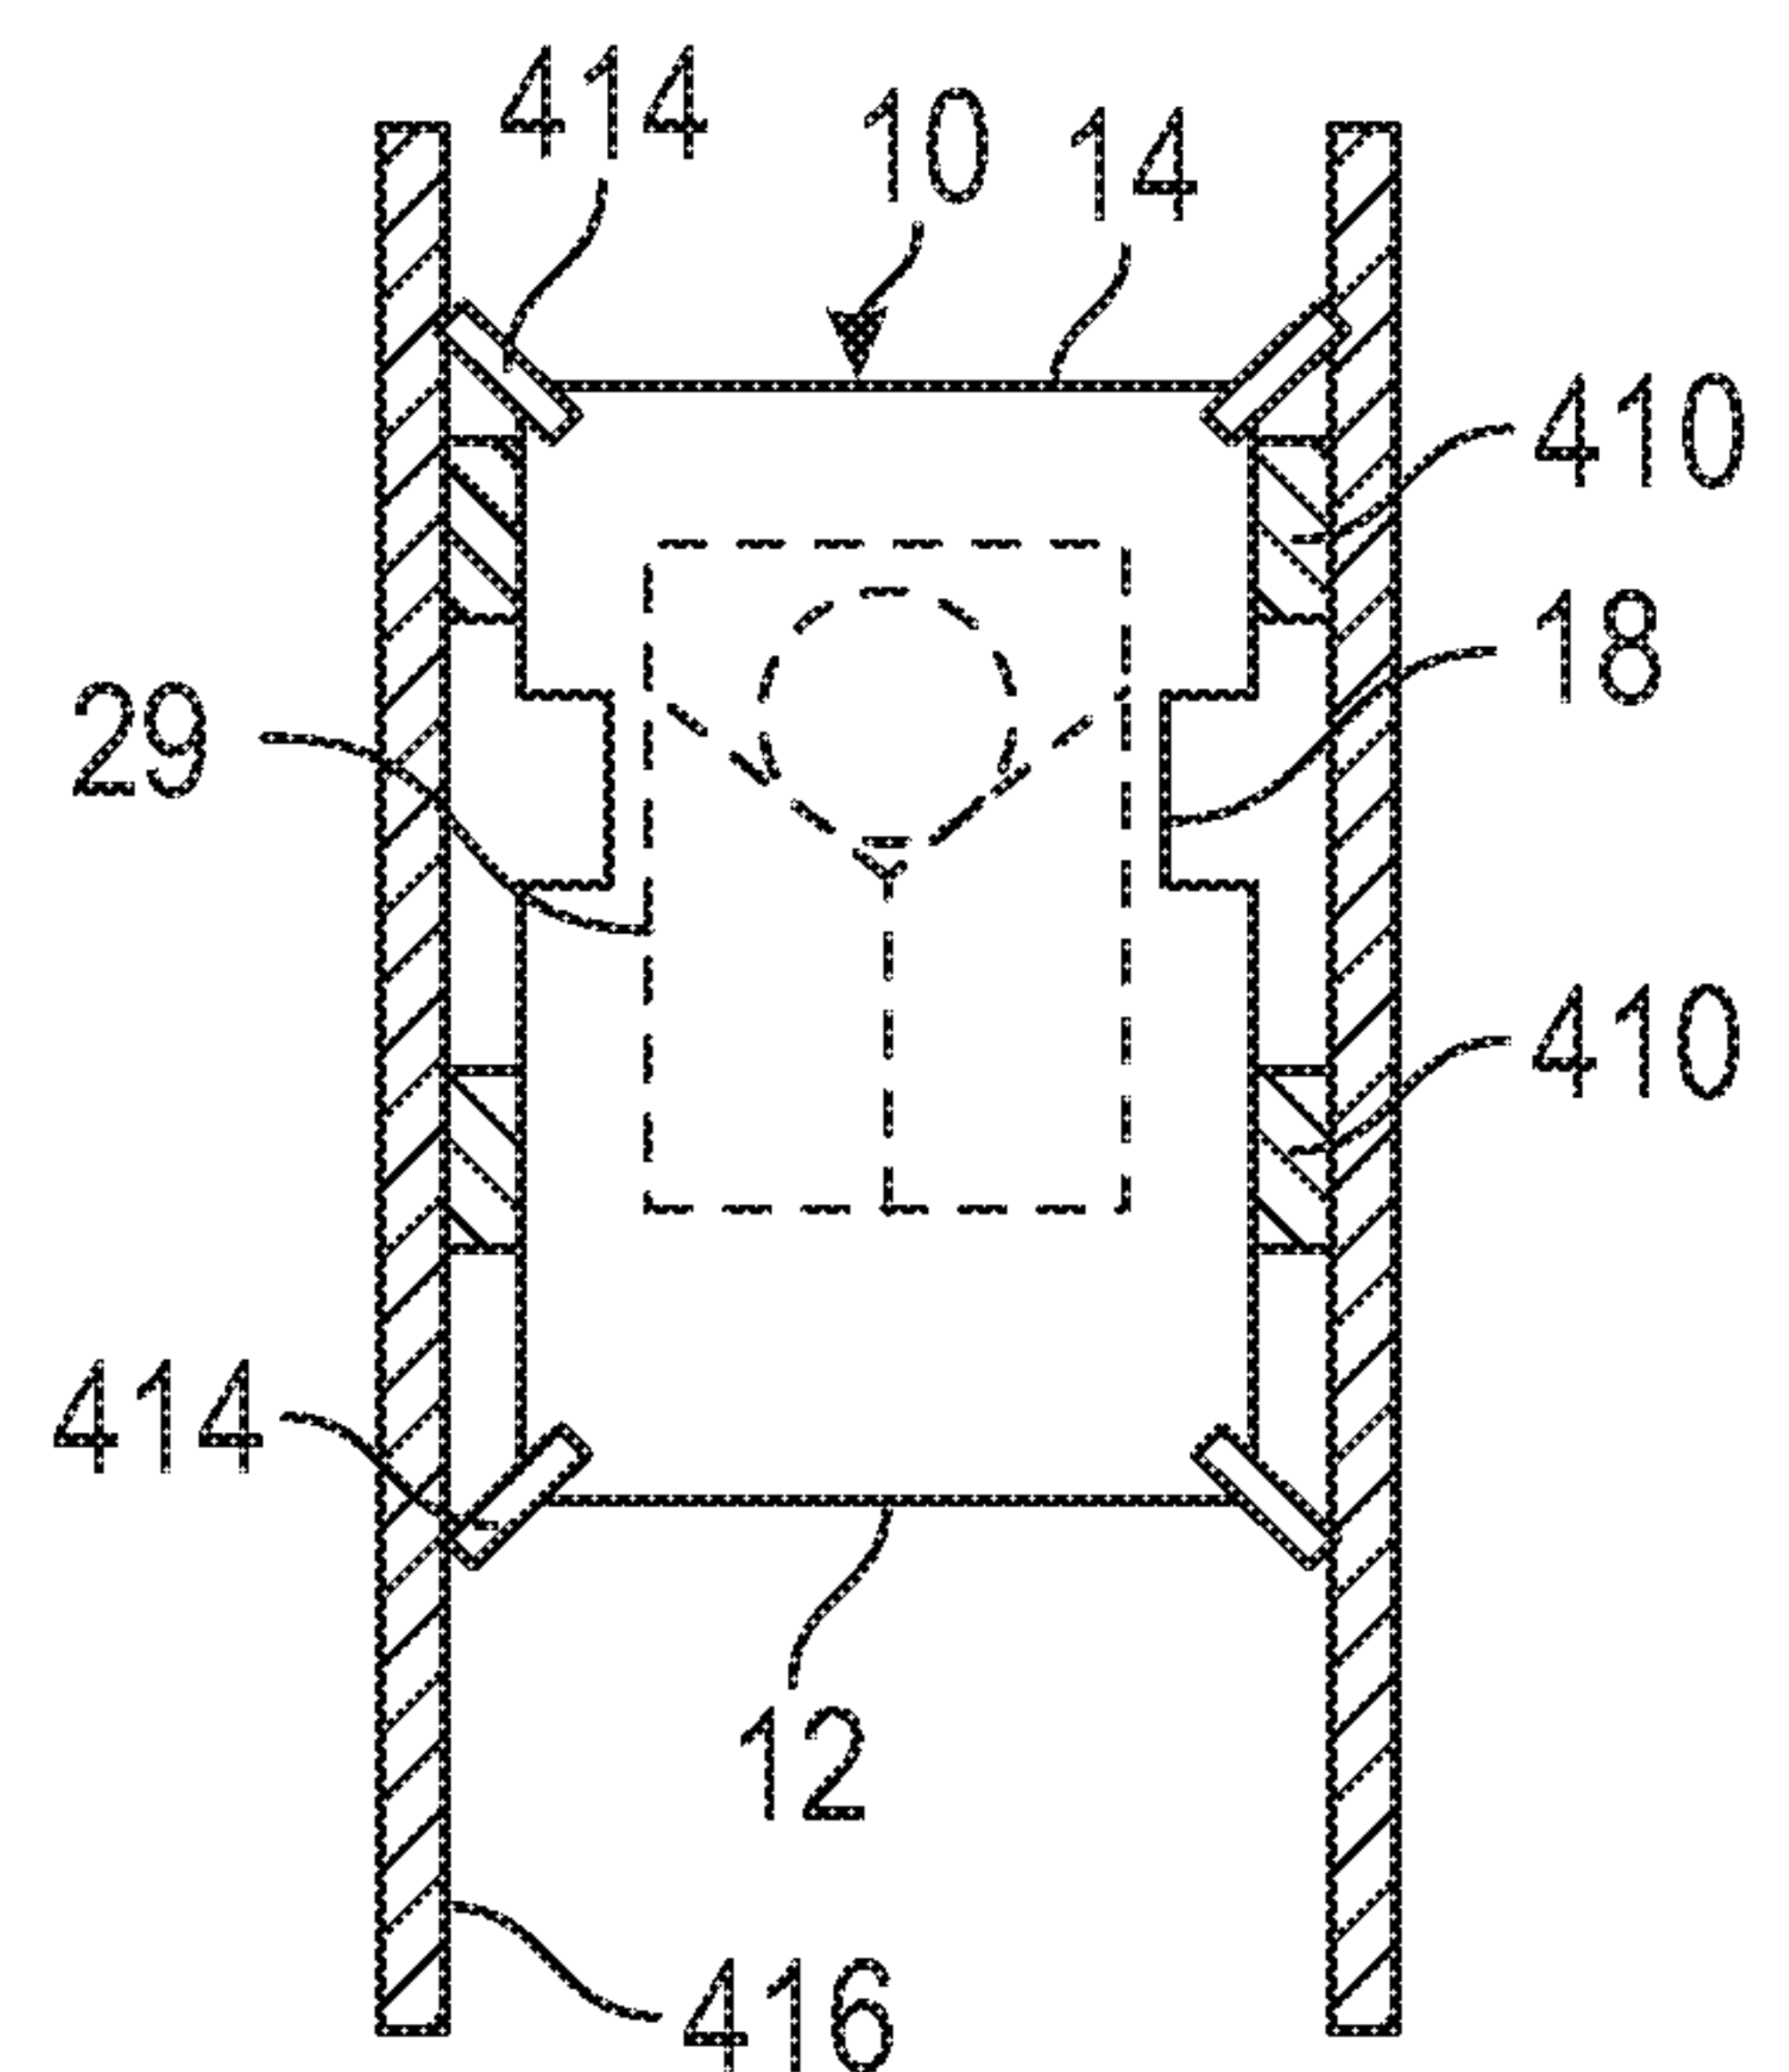


FIG. 12D

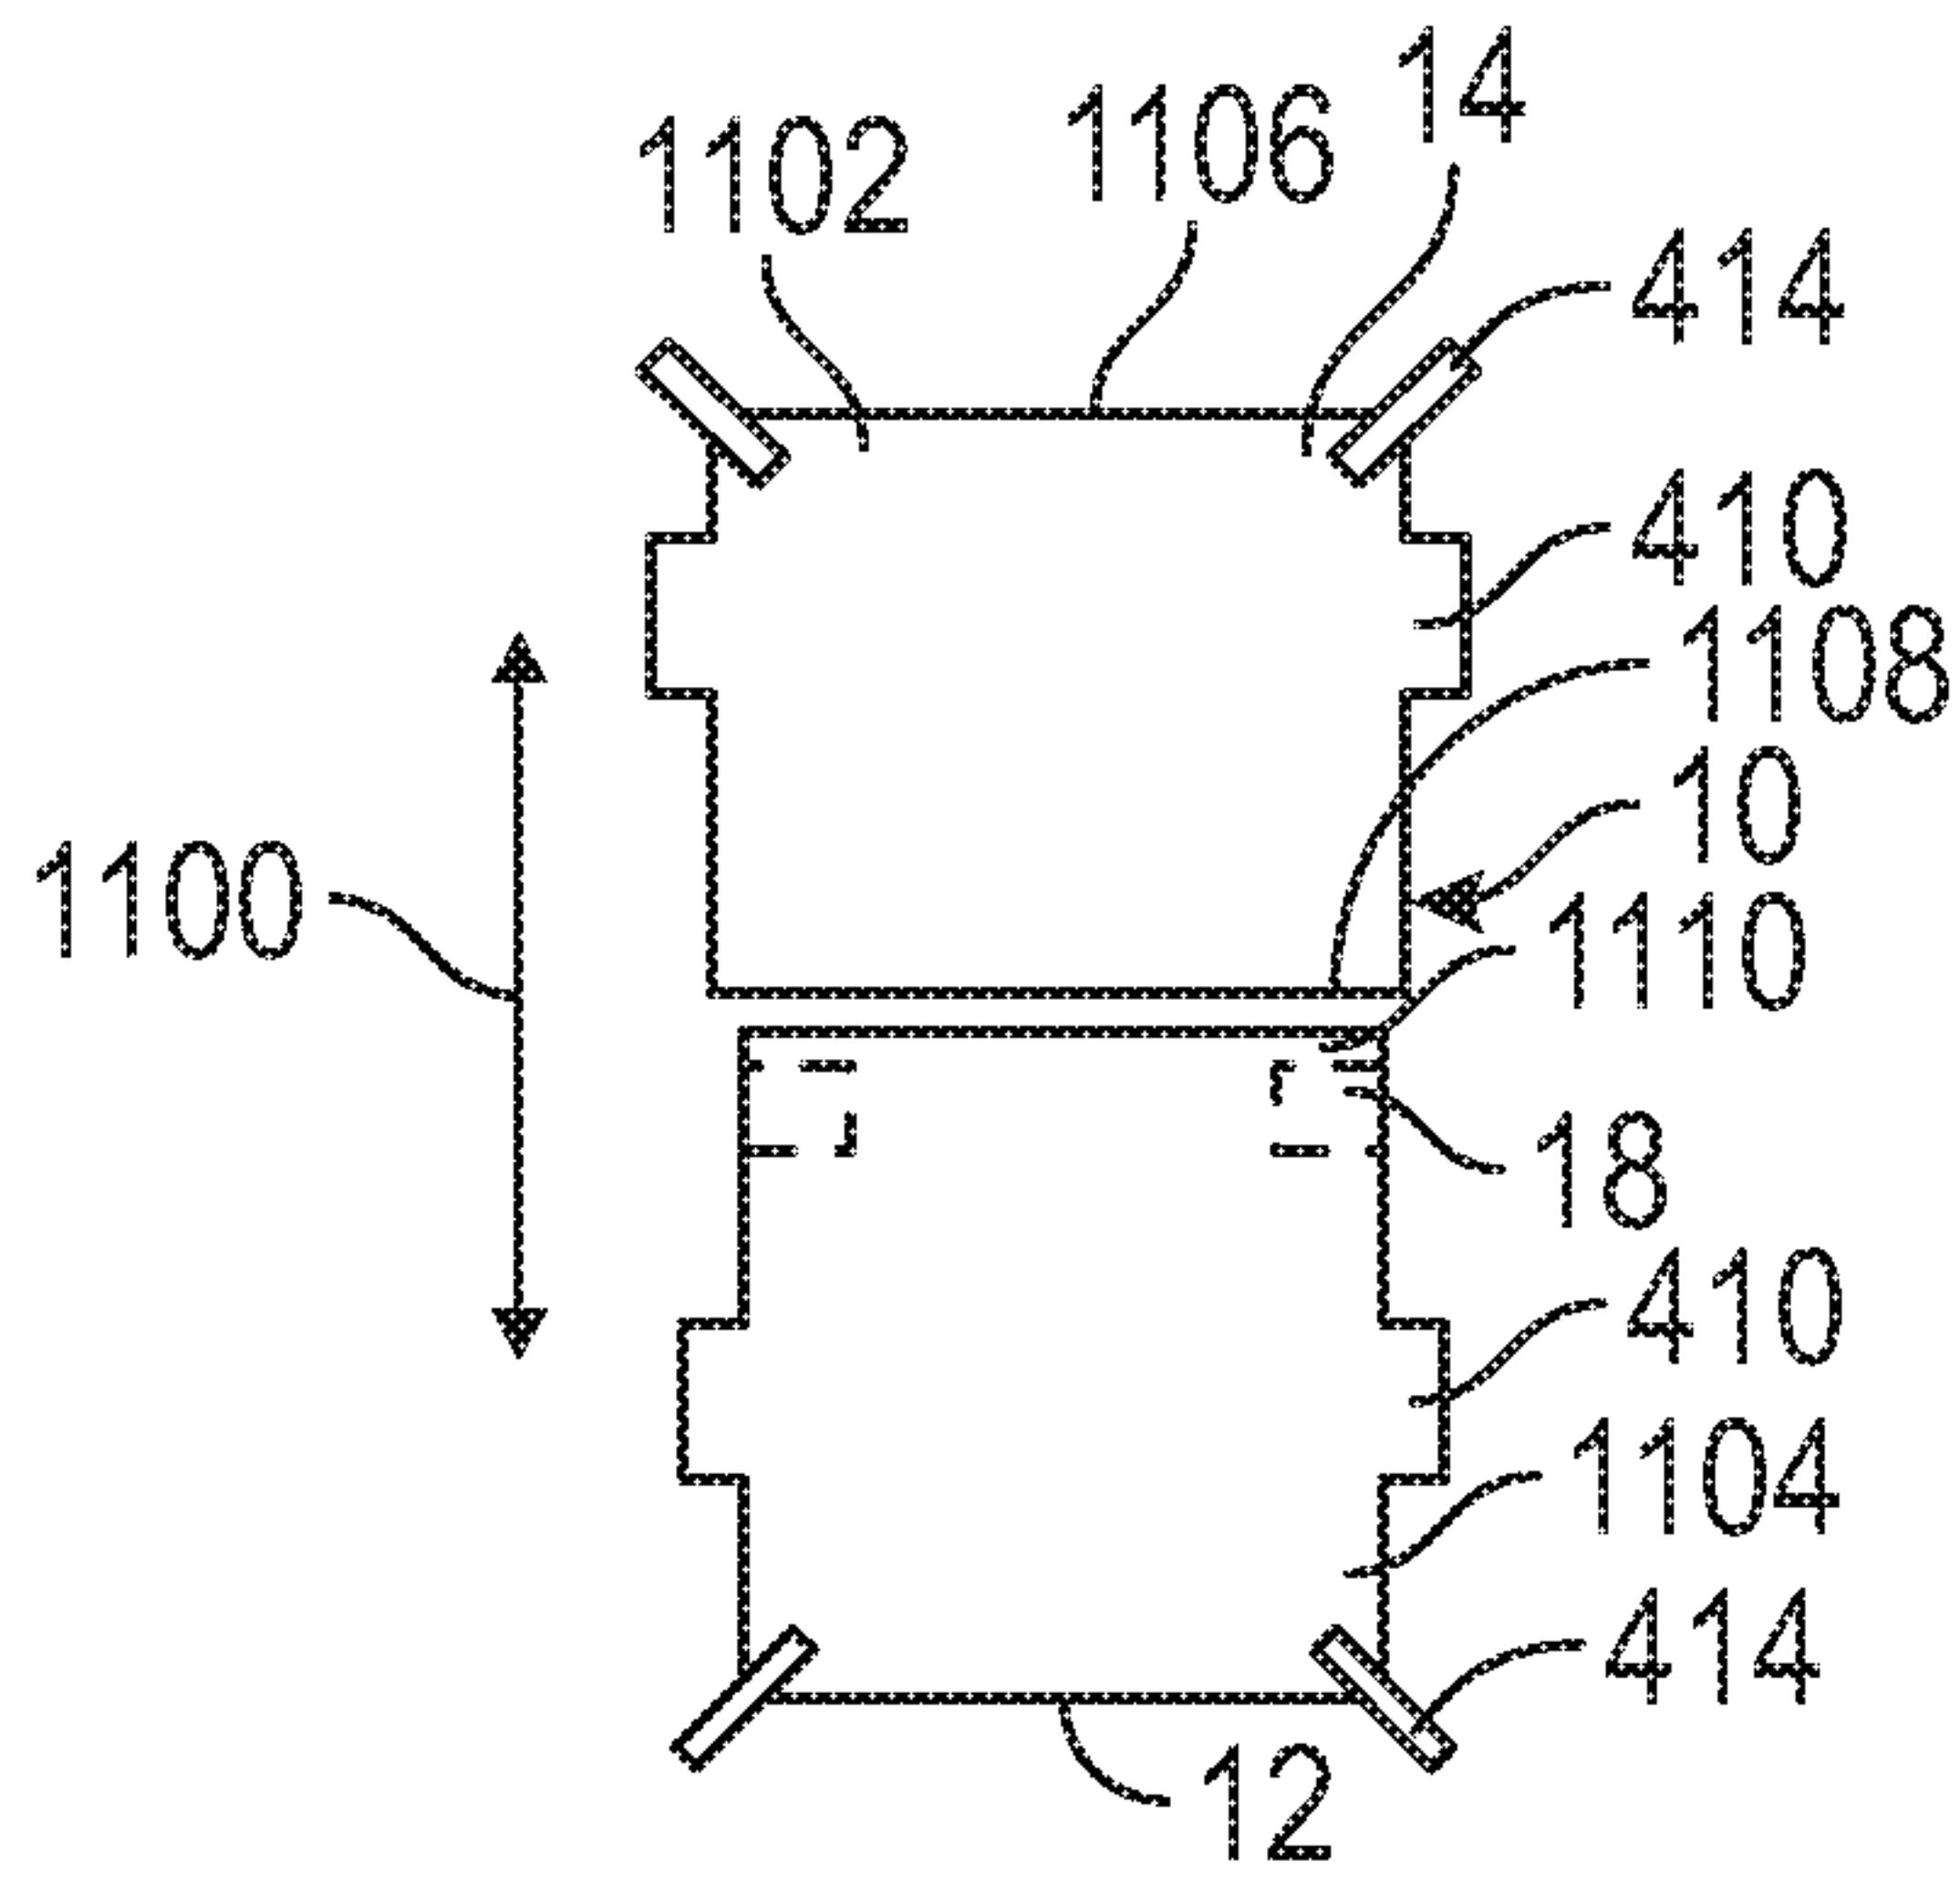


FIG. 13A

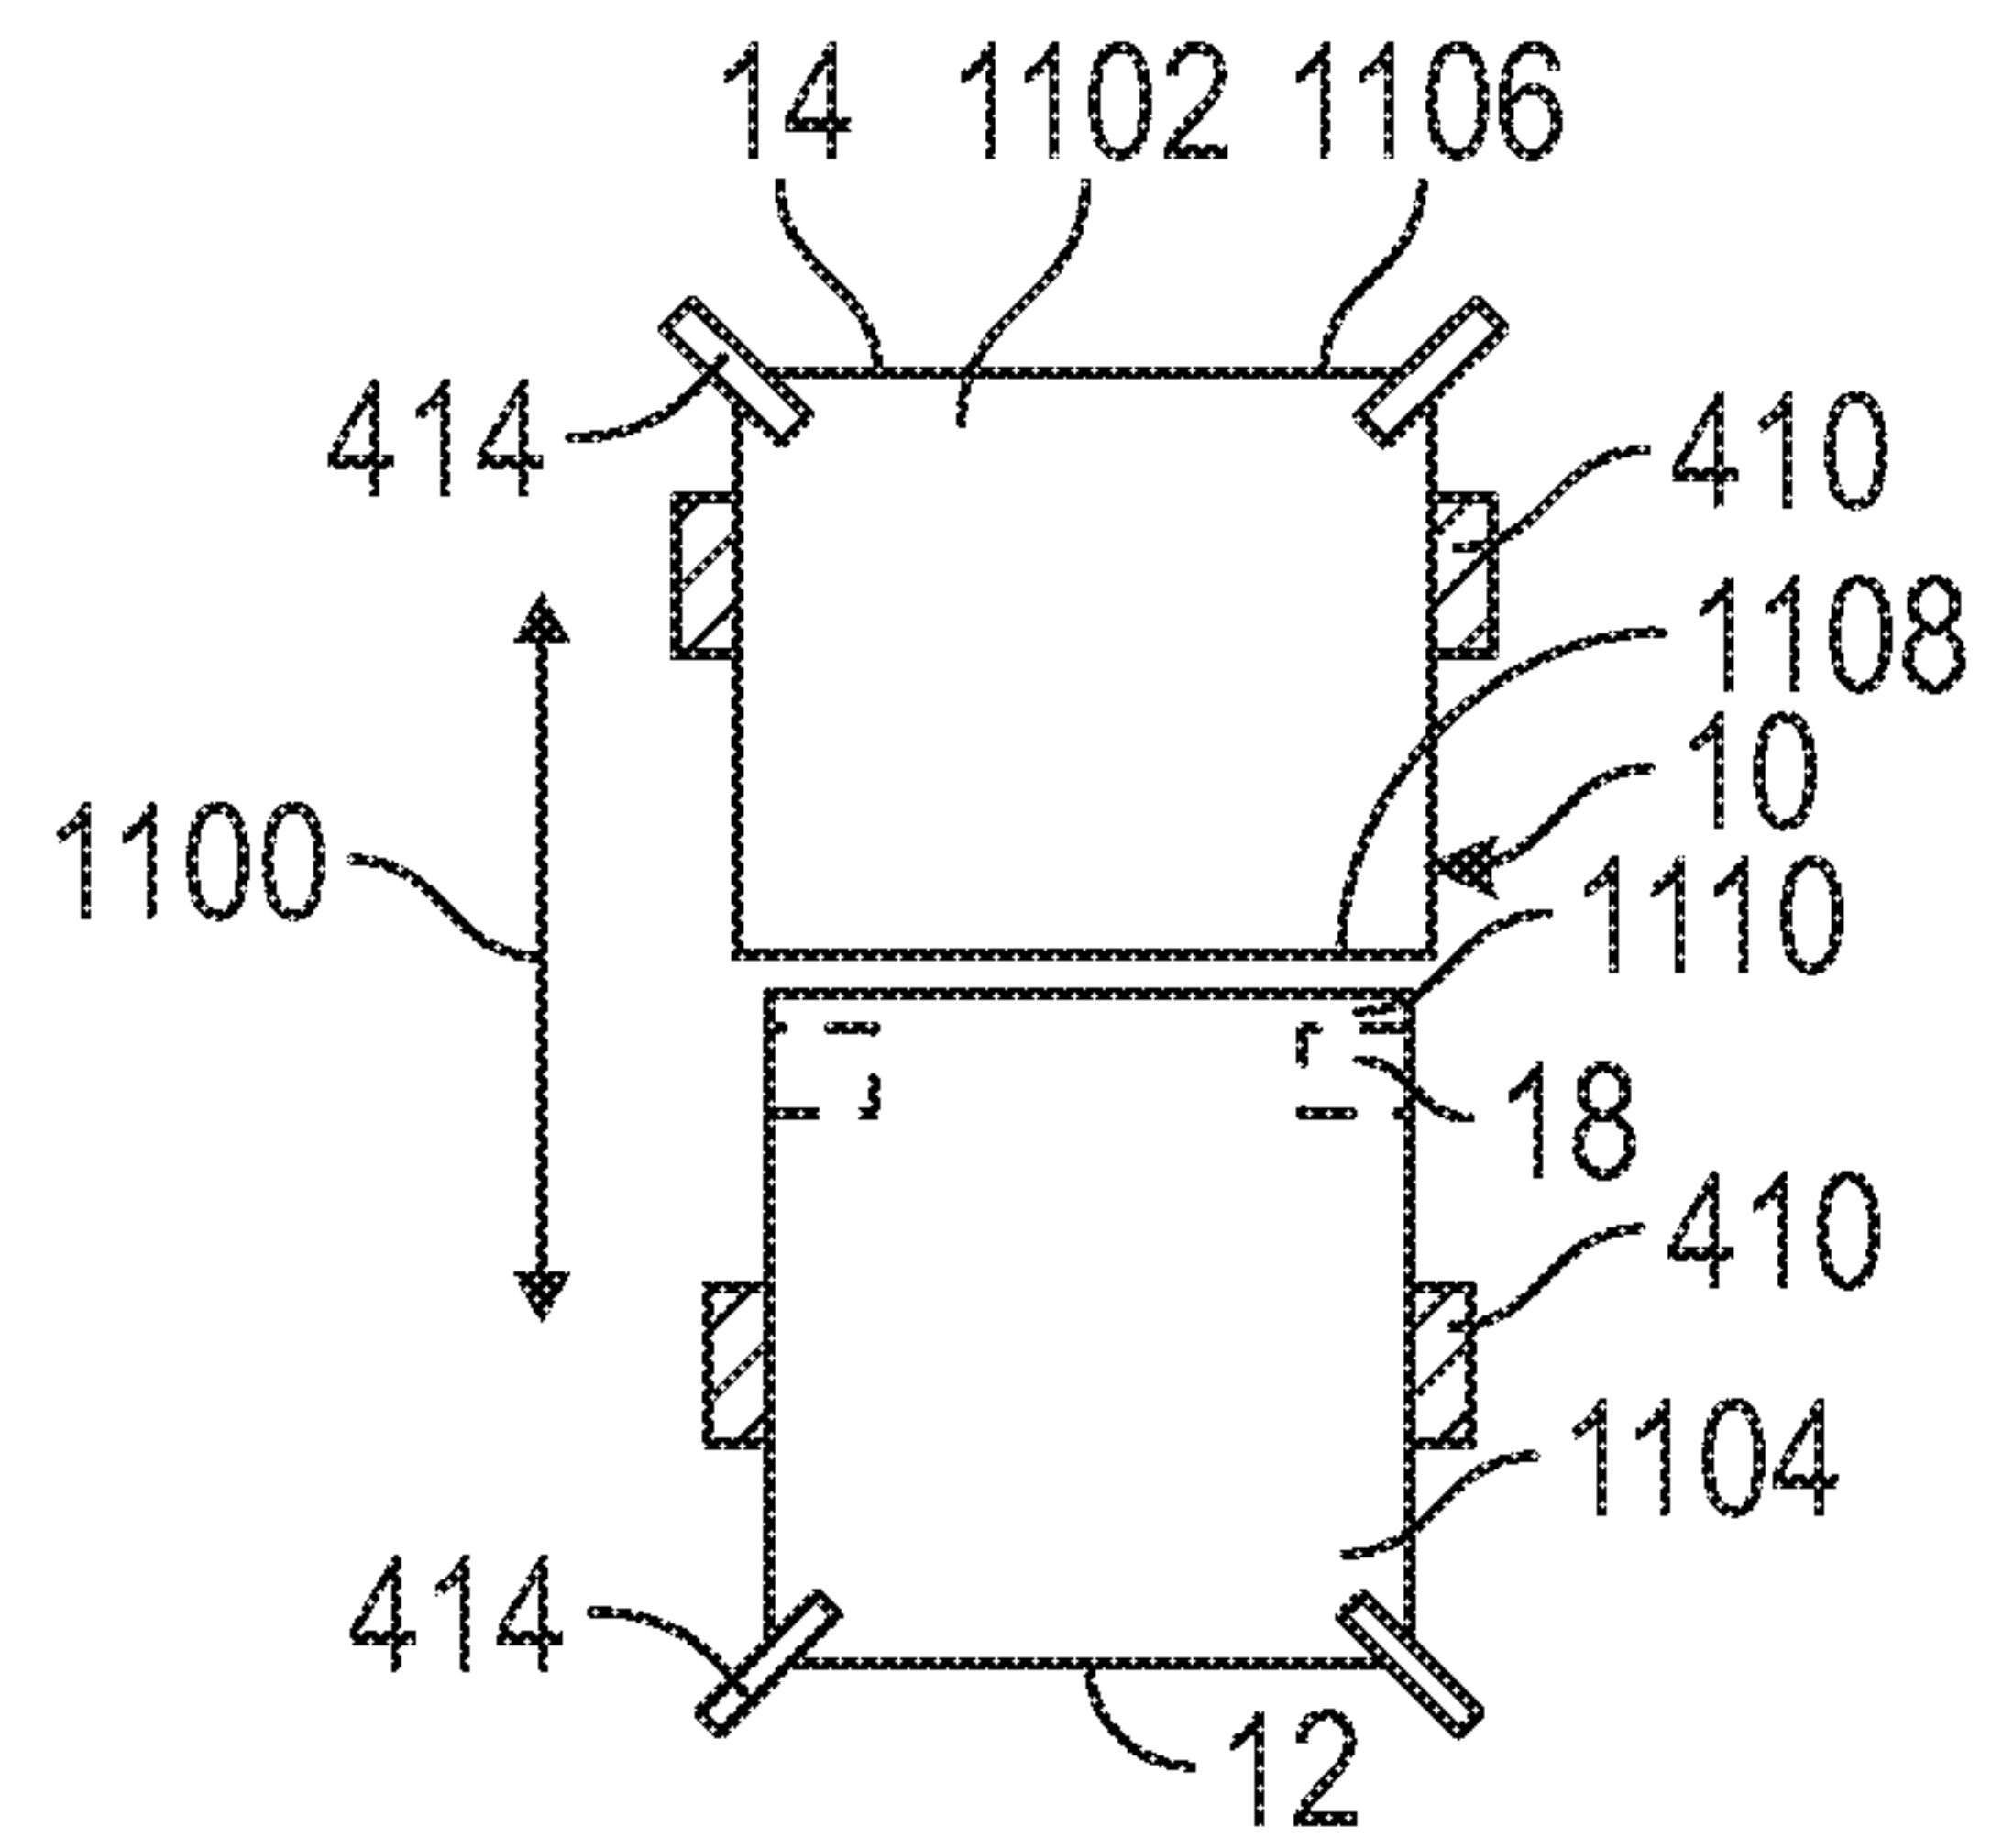


FIG. 13B

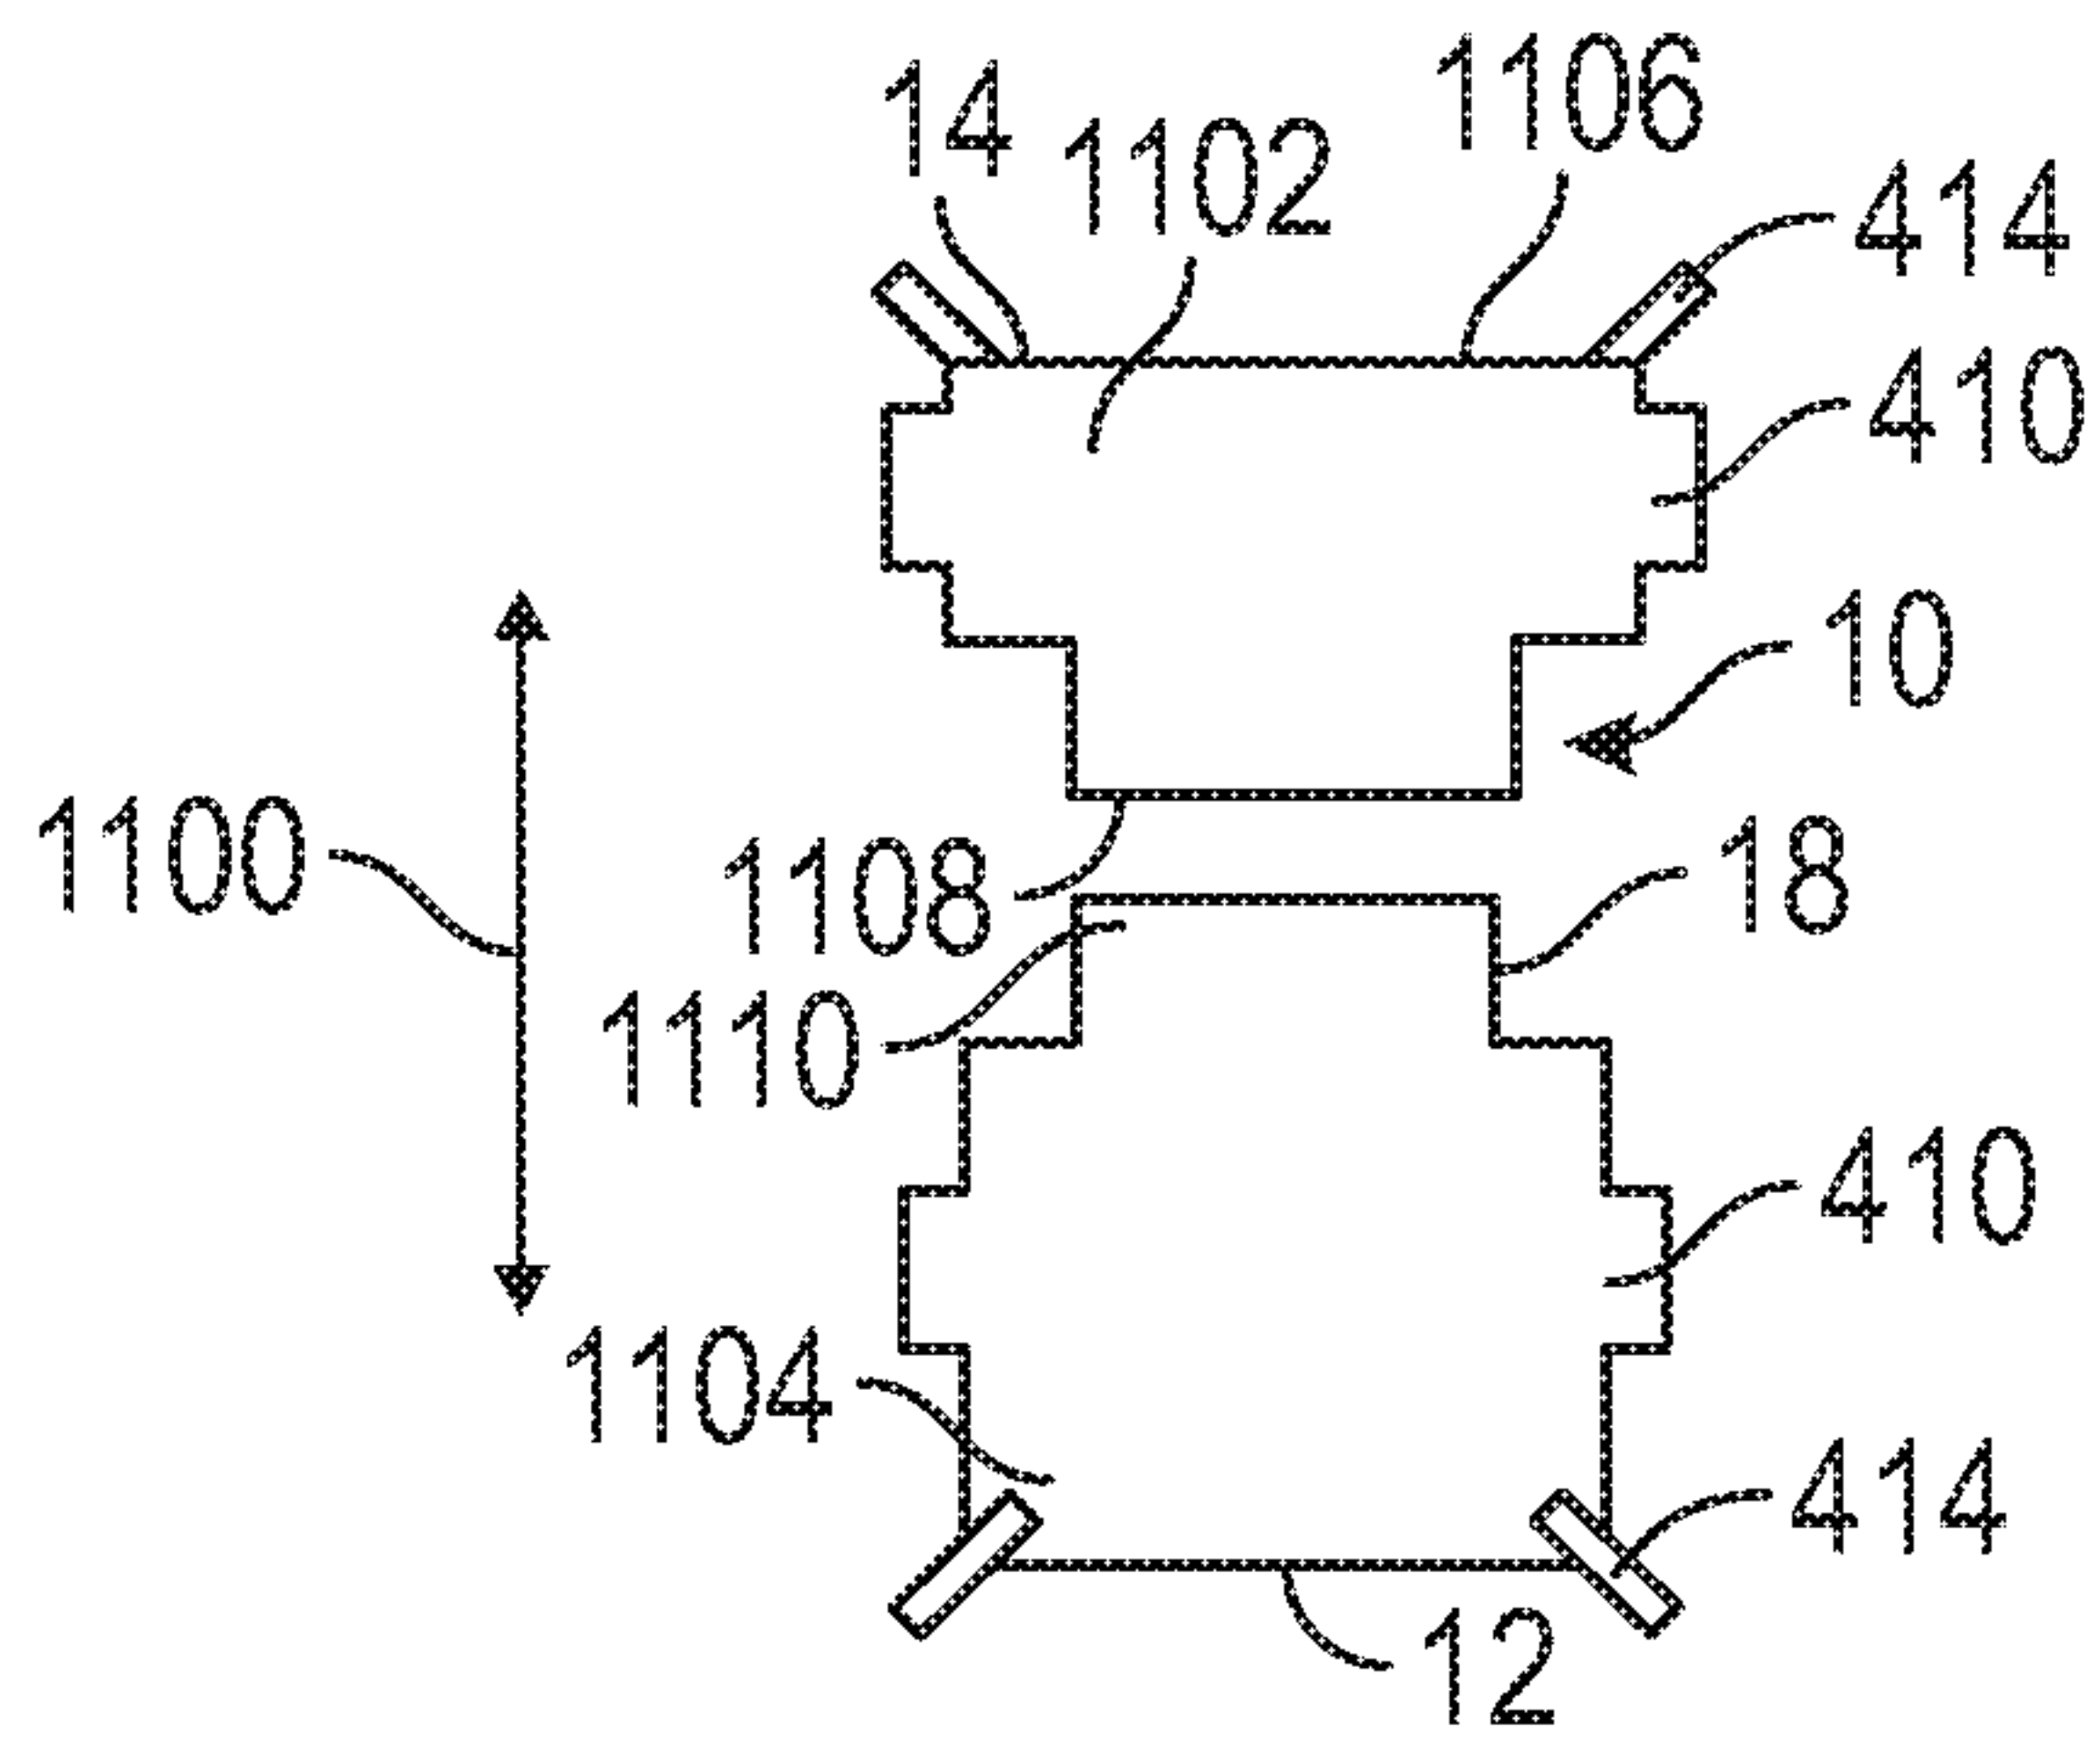


FIG. 13C

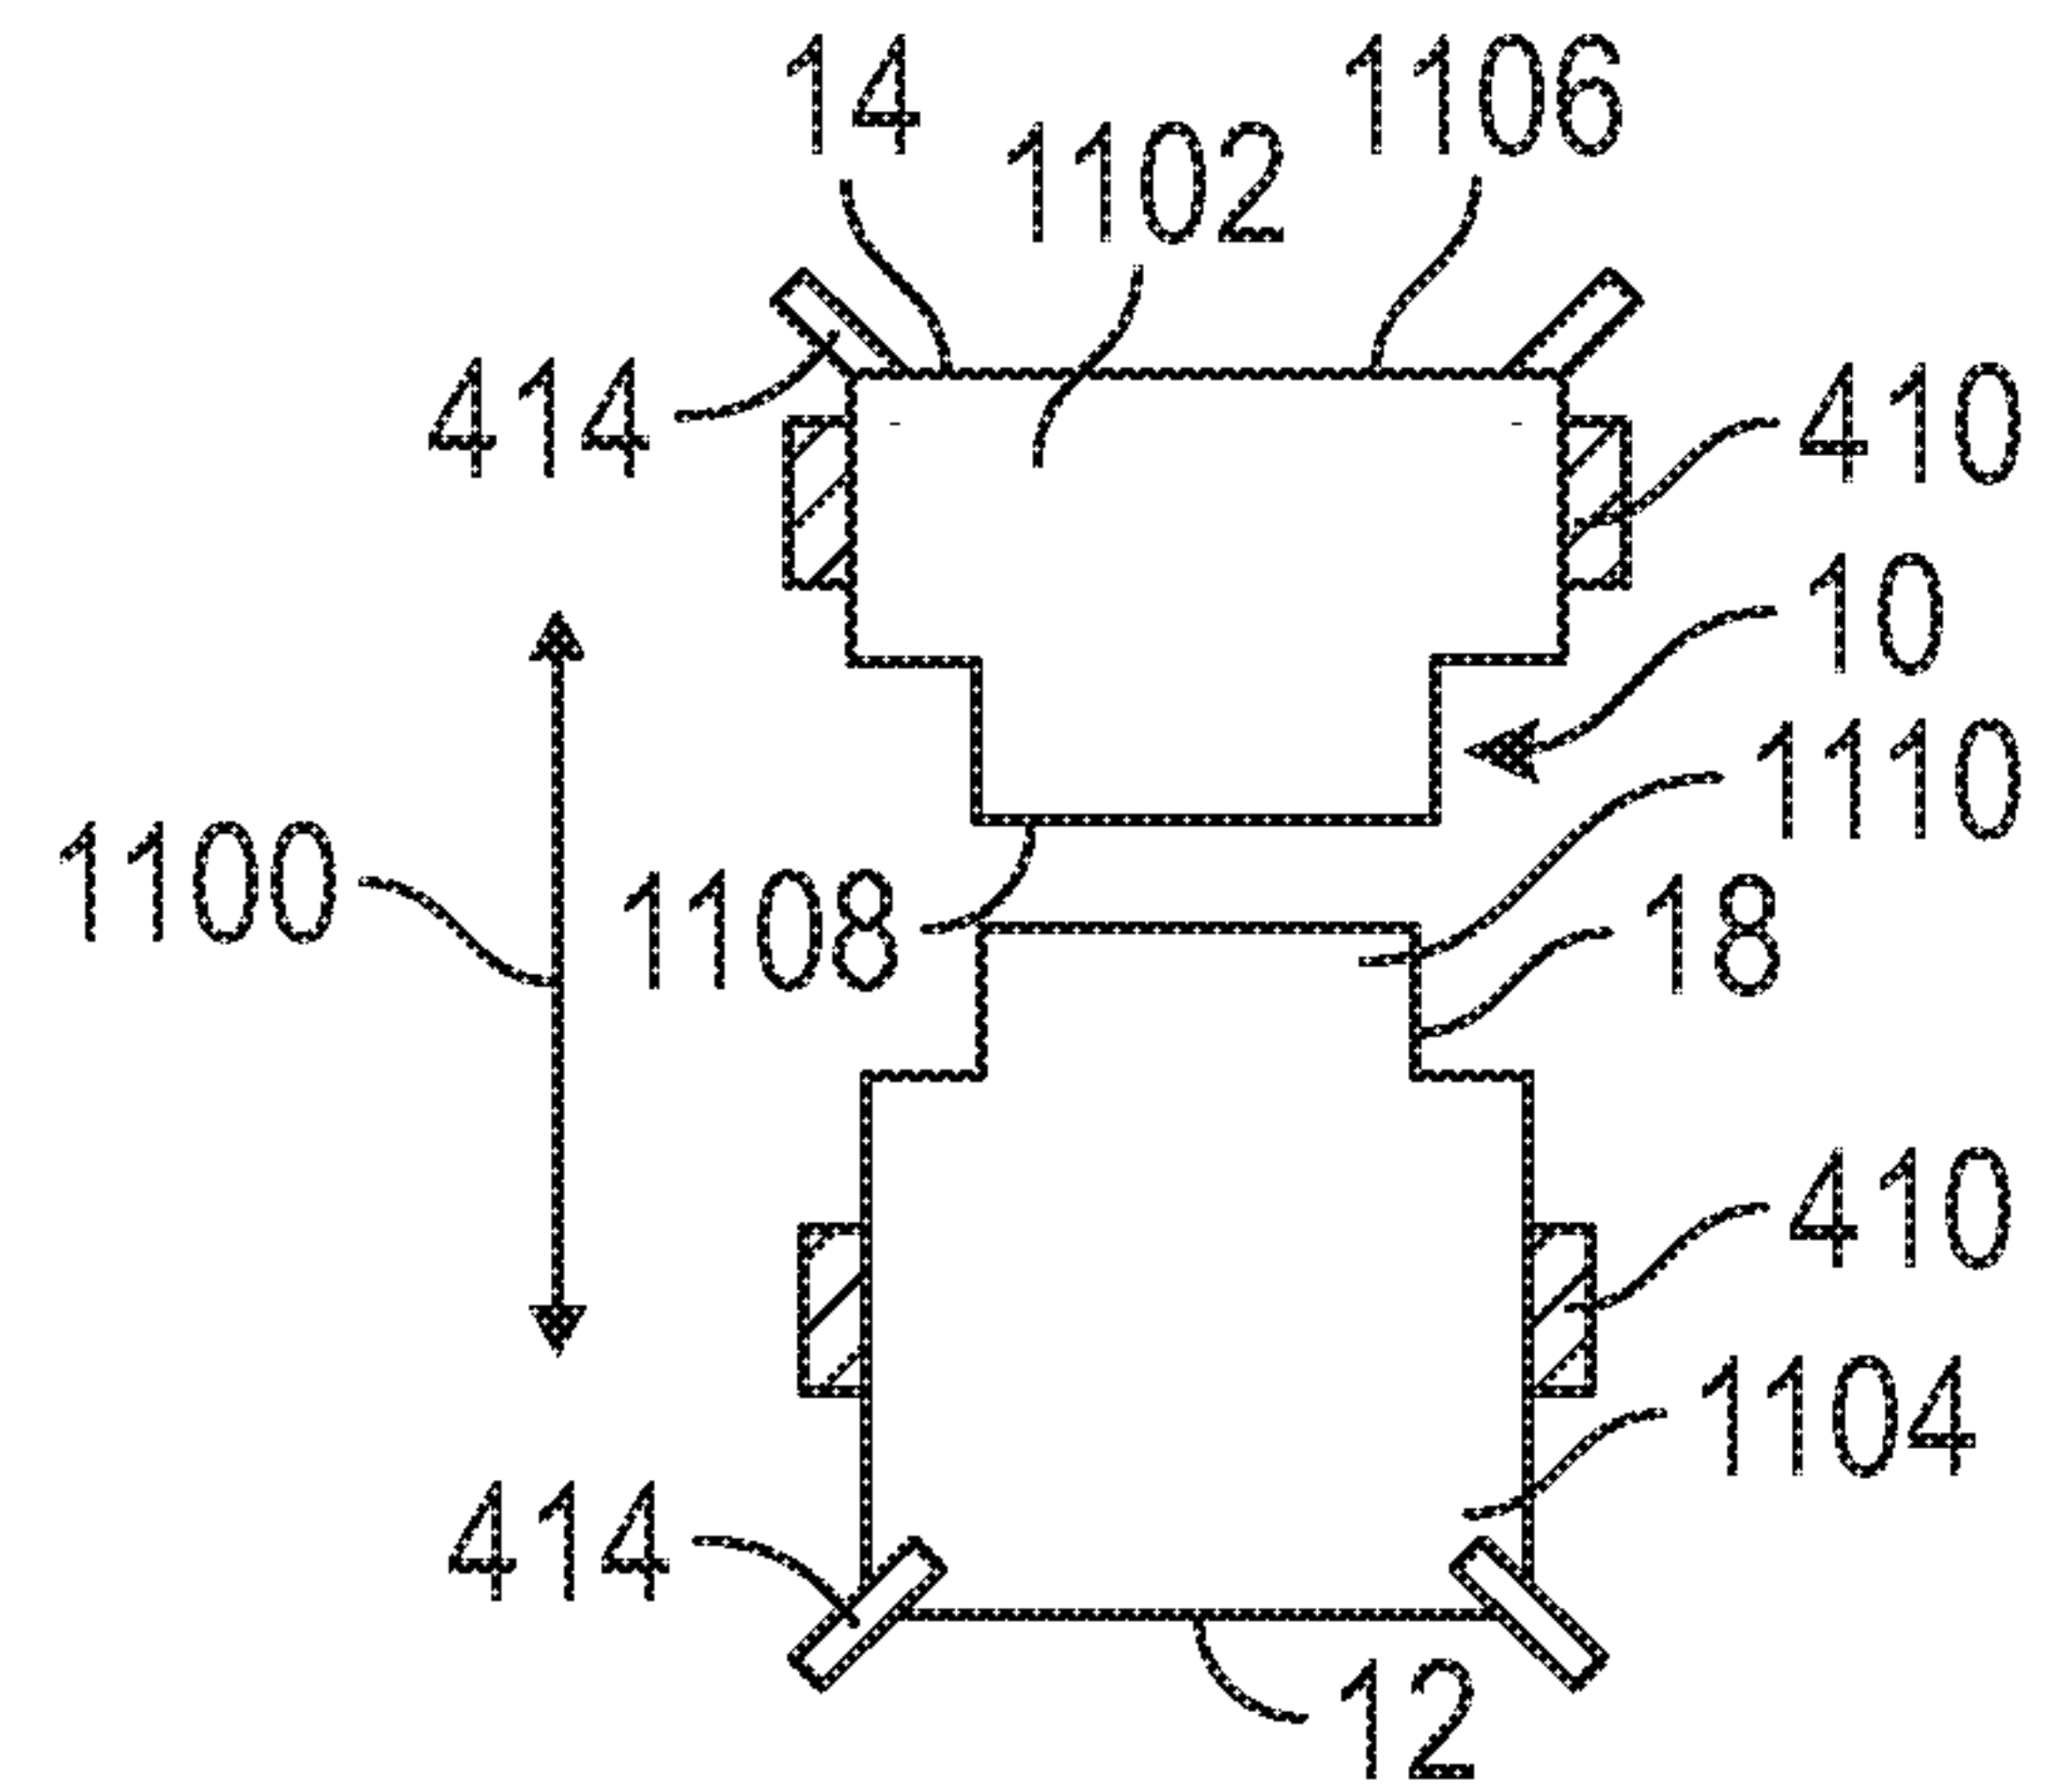


FIG. 13D

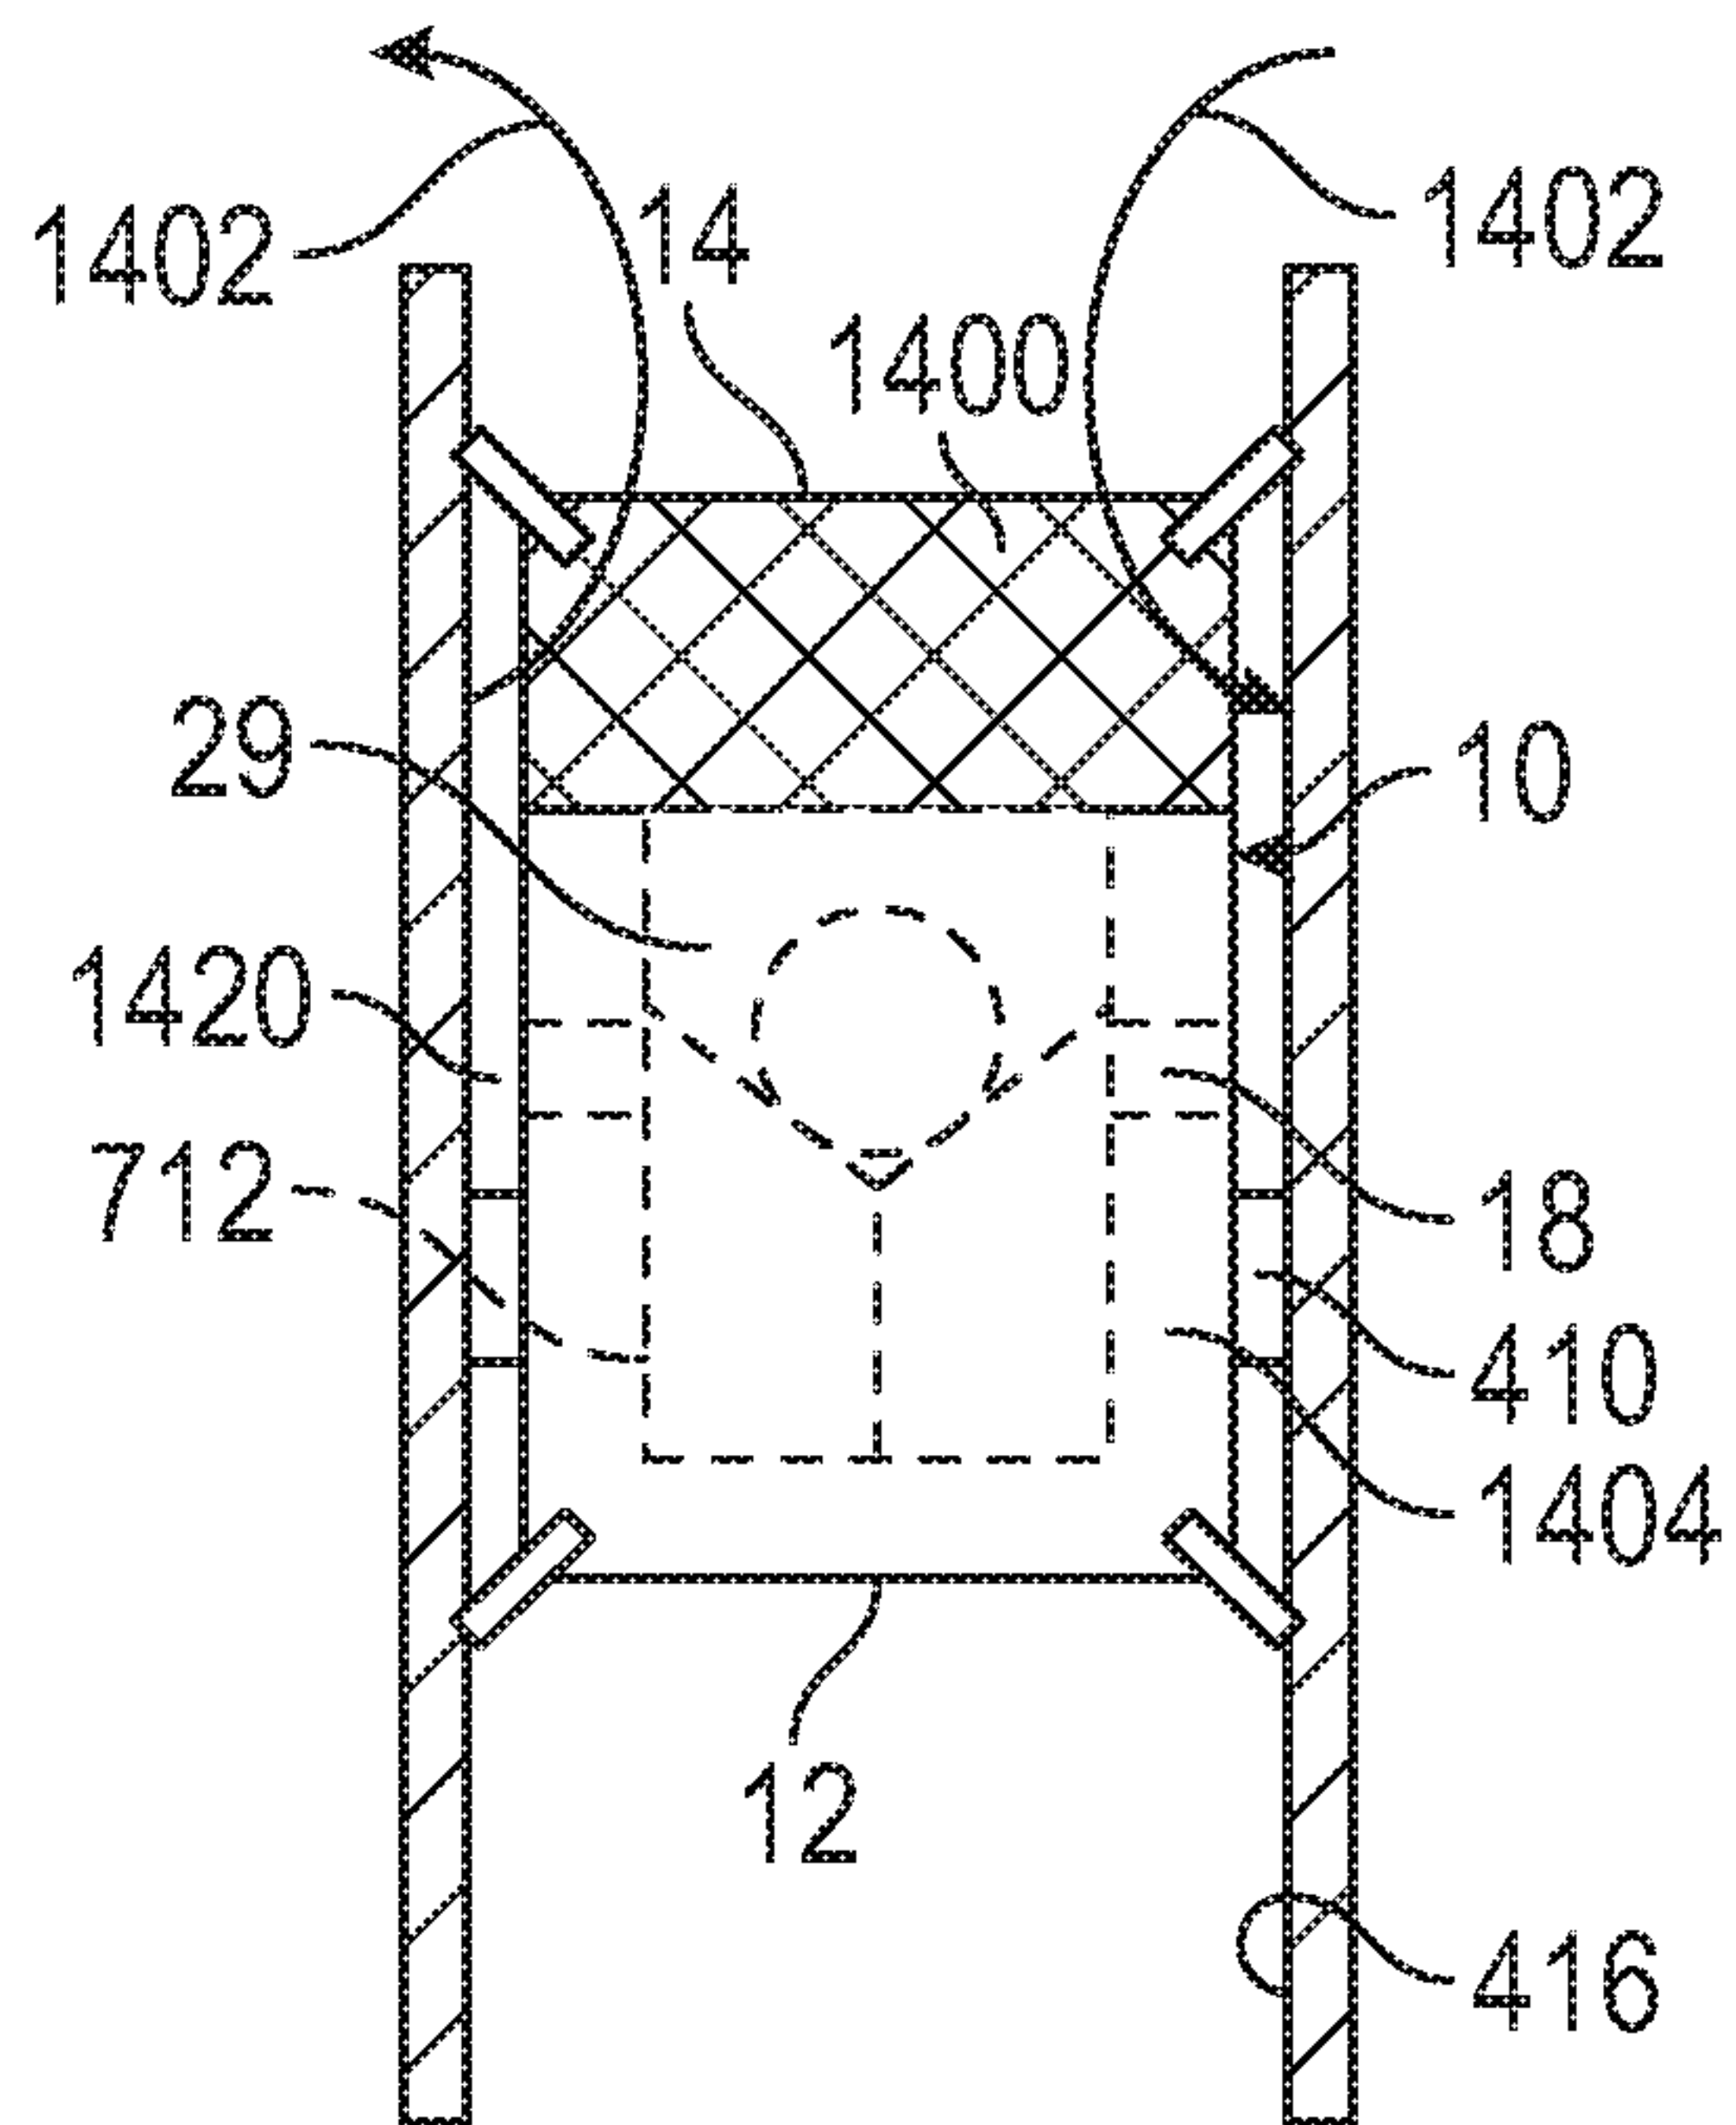


FIG. 14A

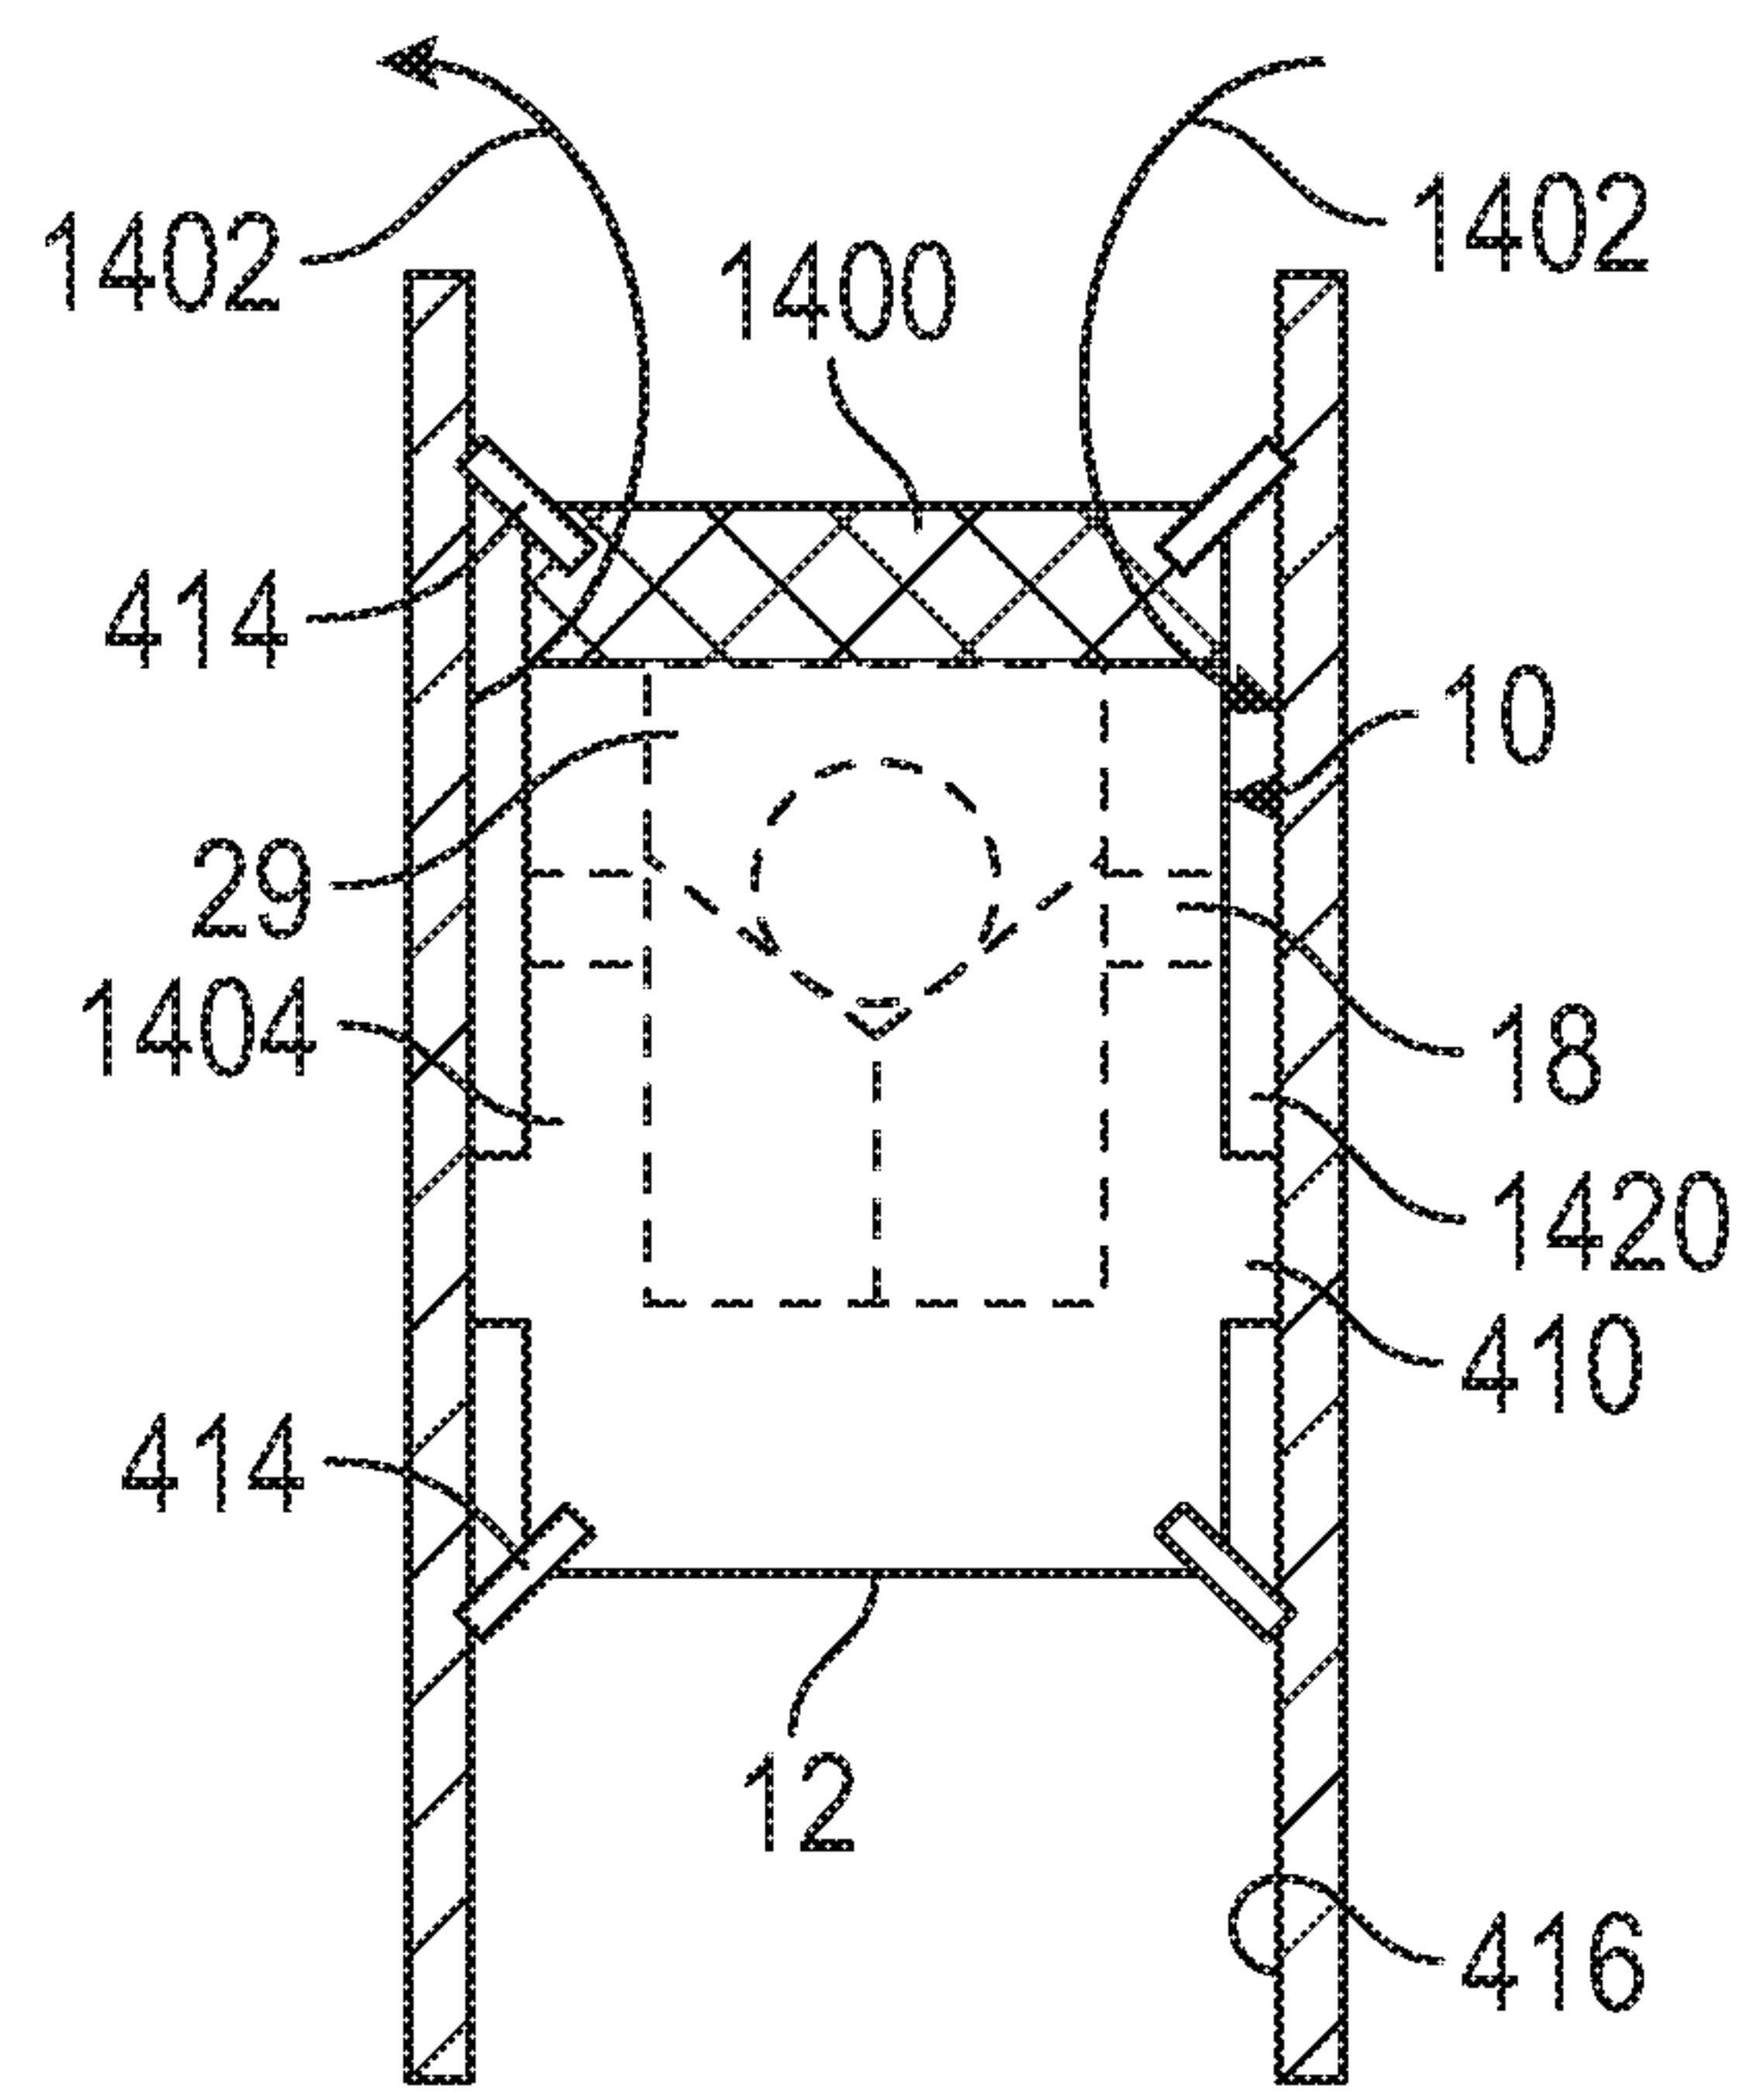


FIG. 14B

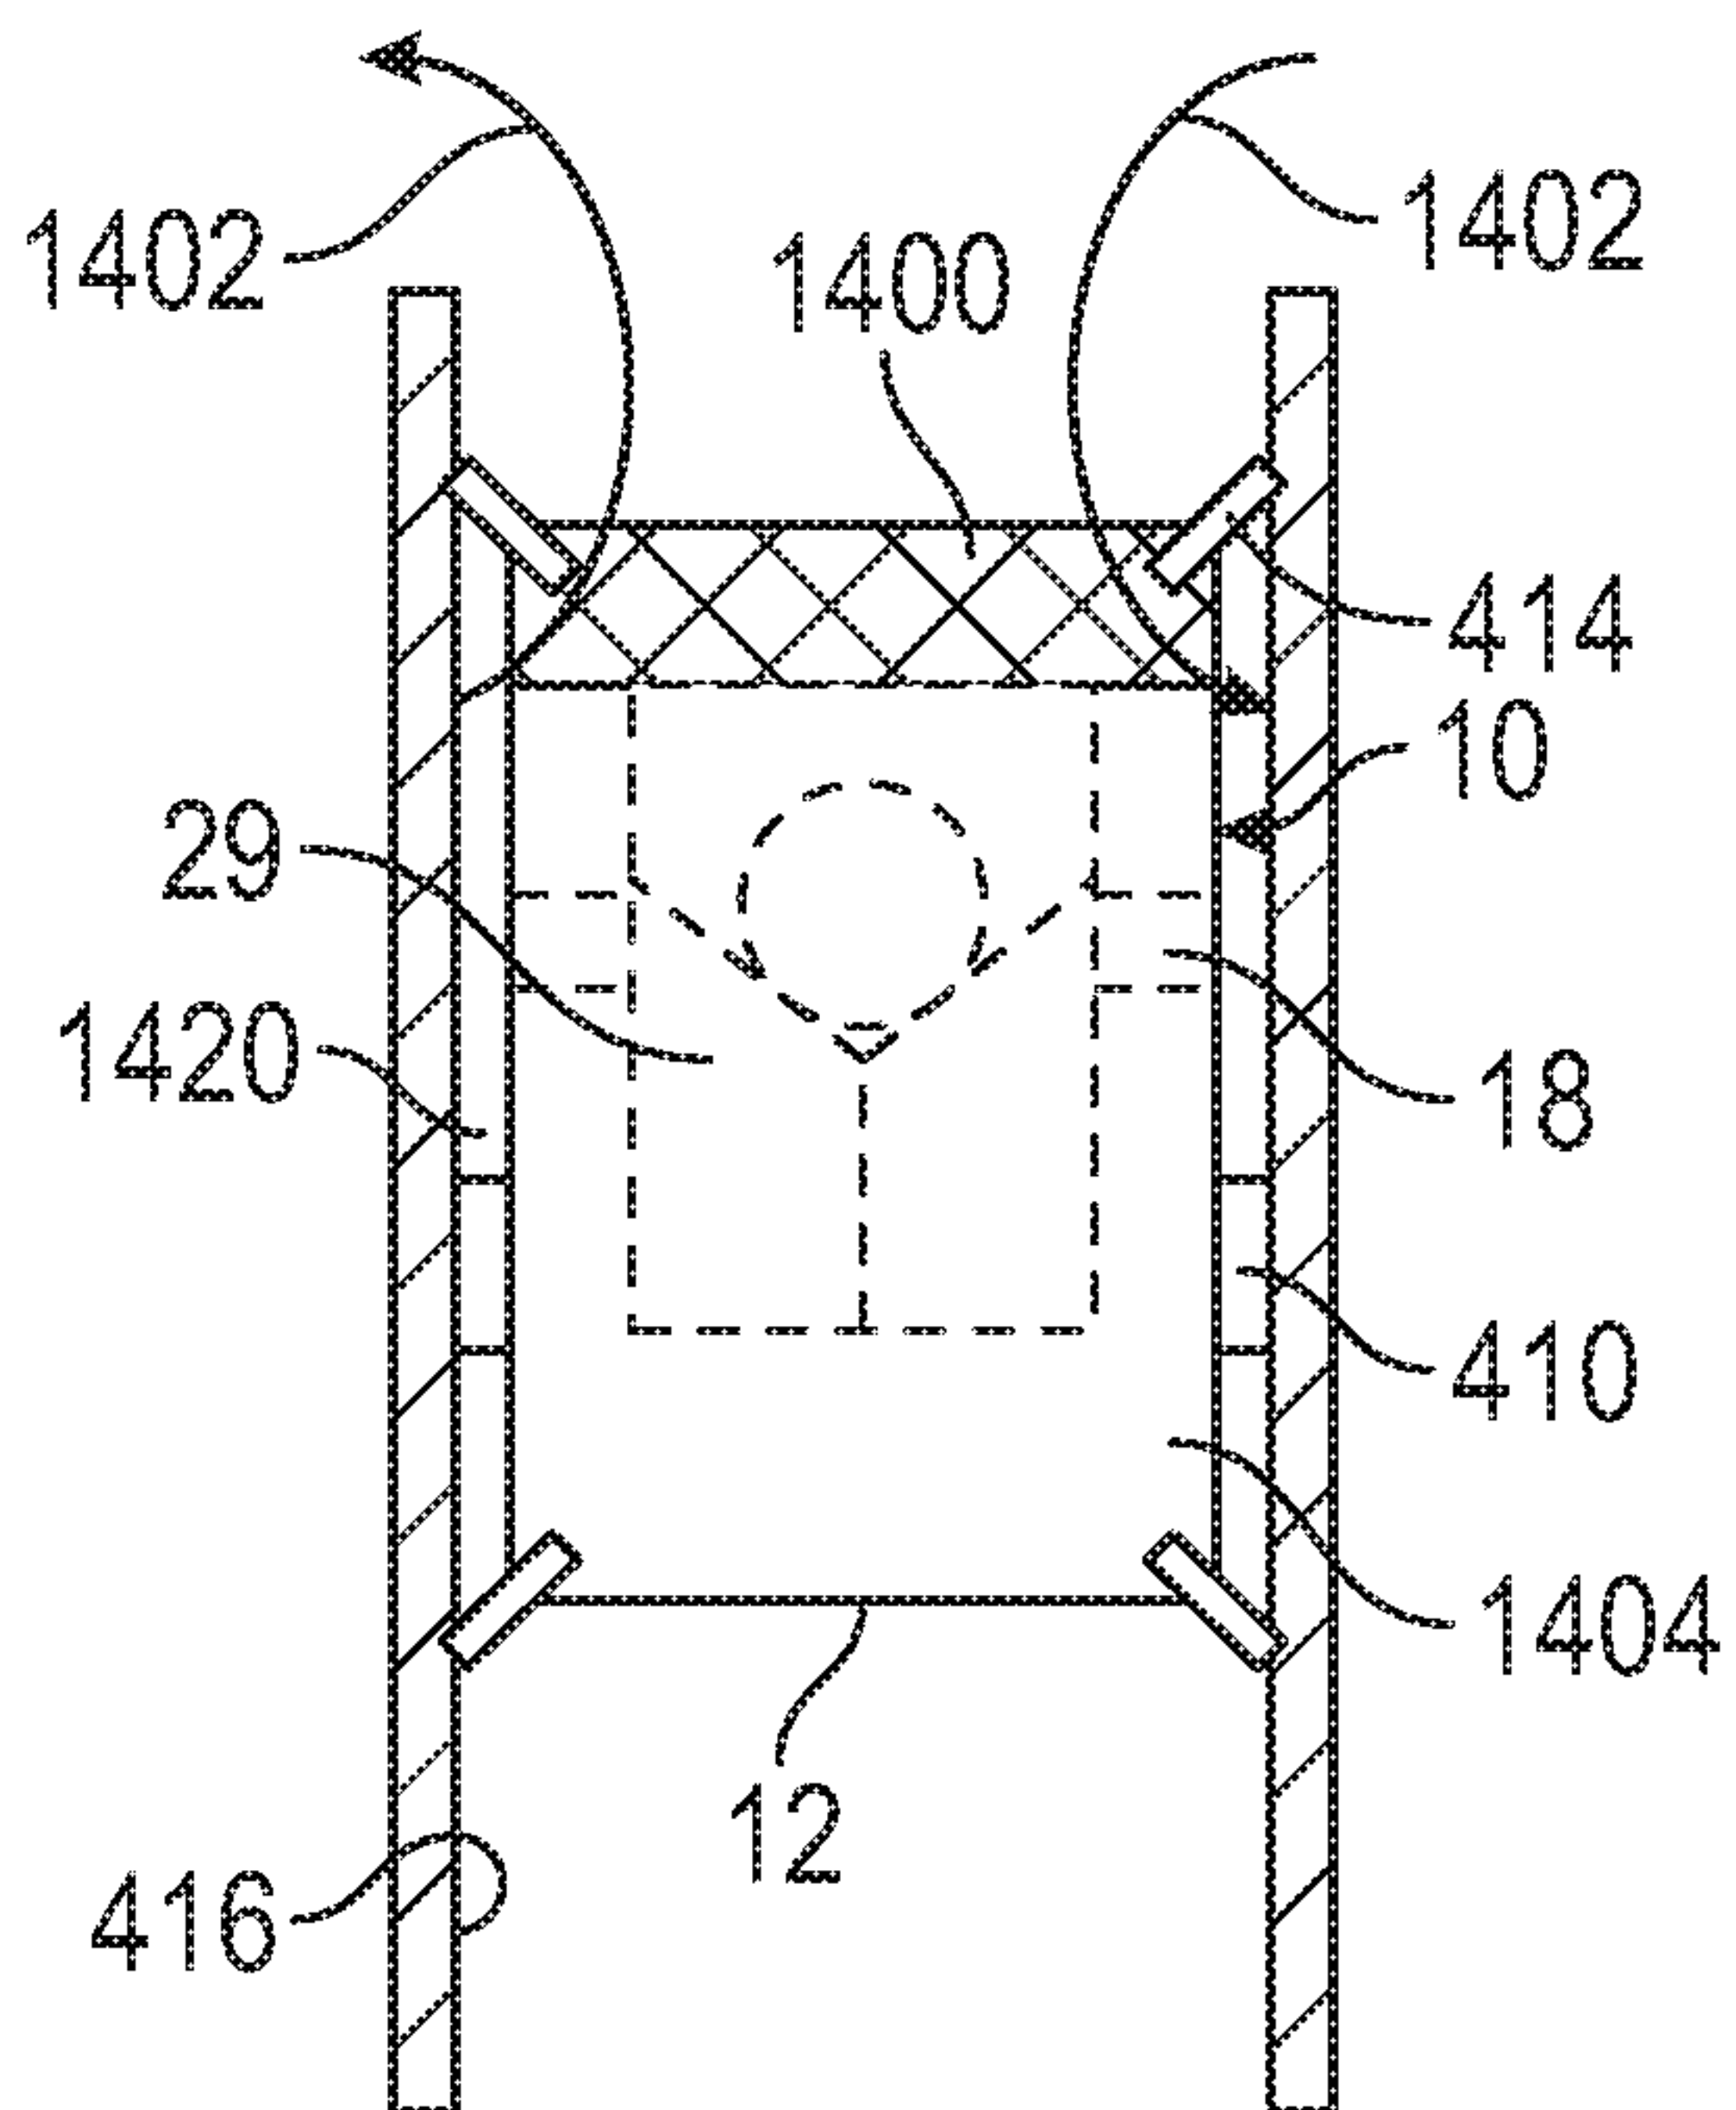


FIG. 14C

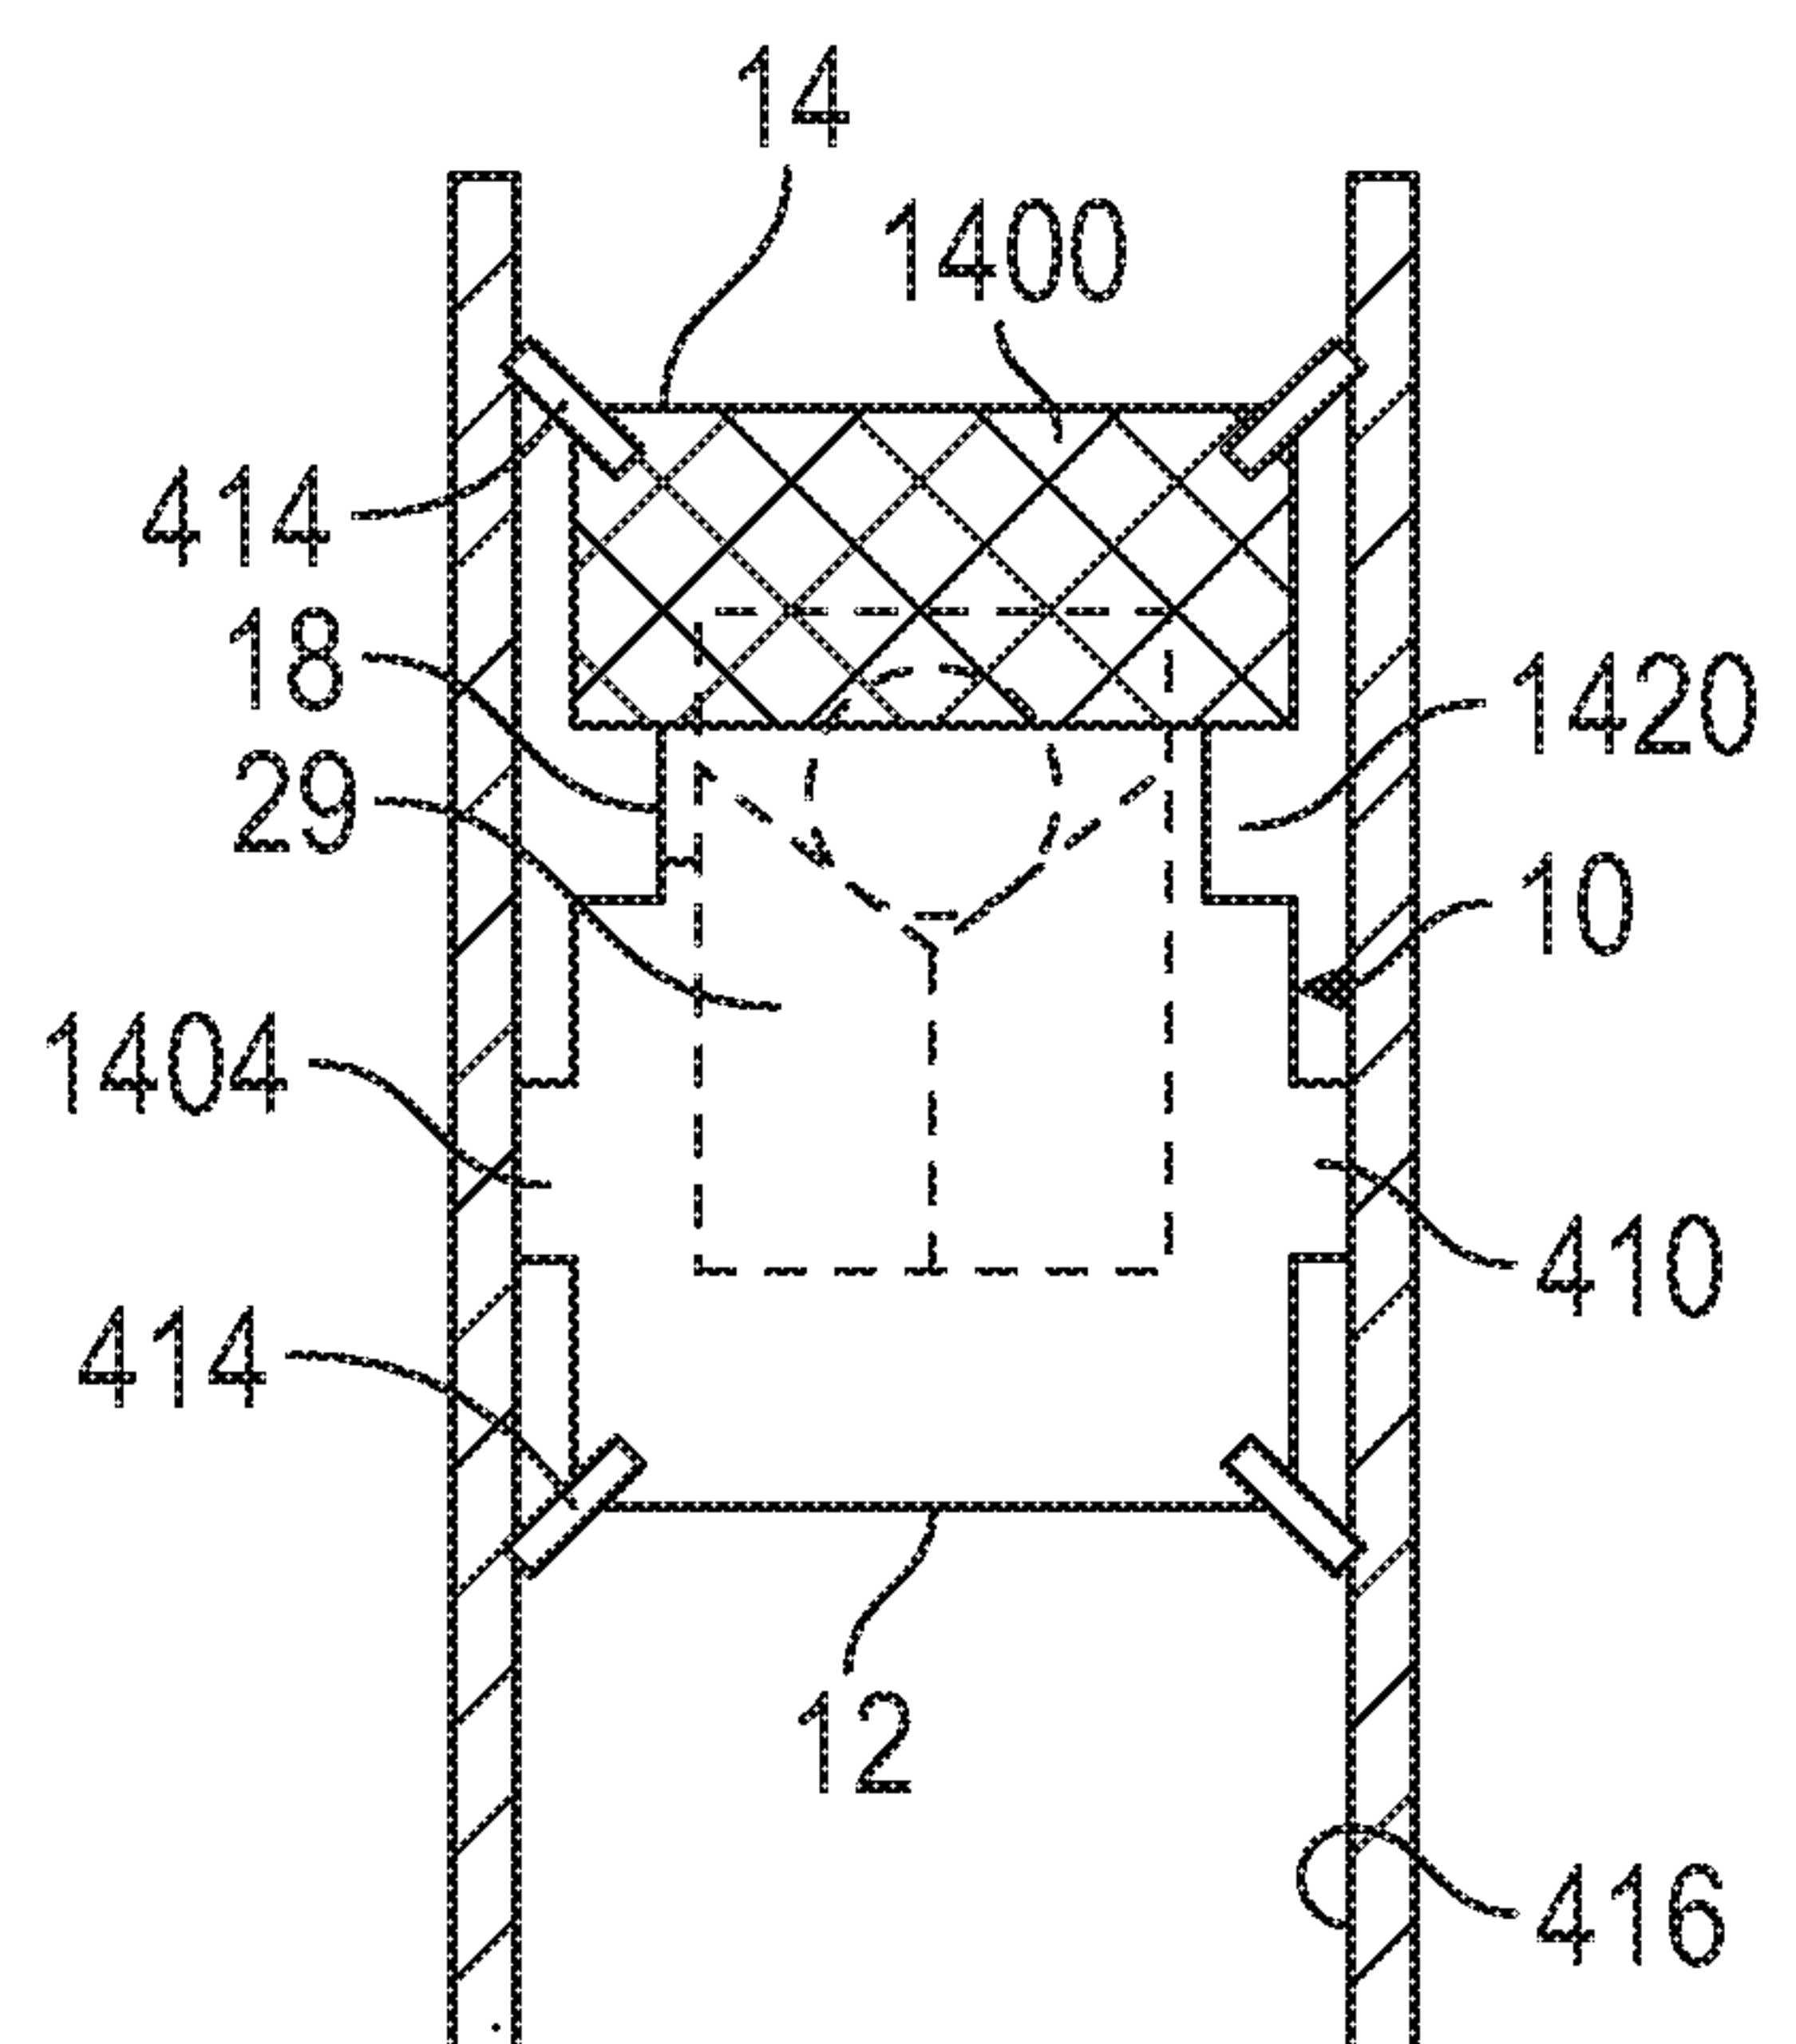


FIG. 14D

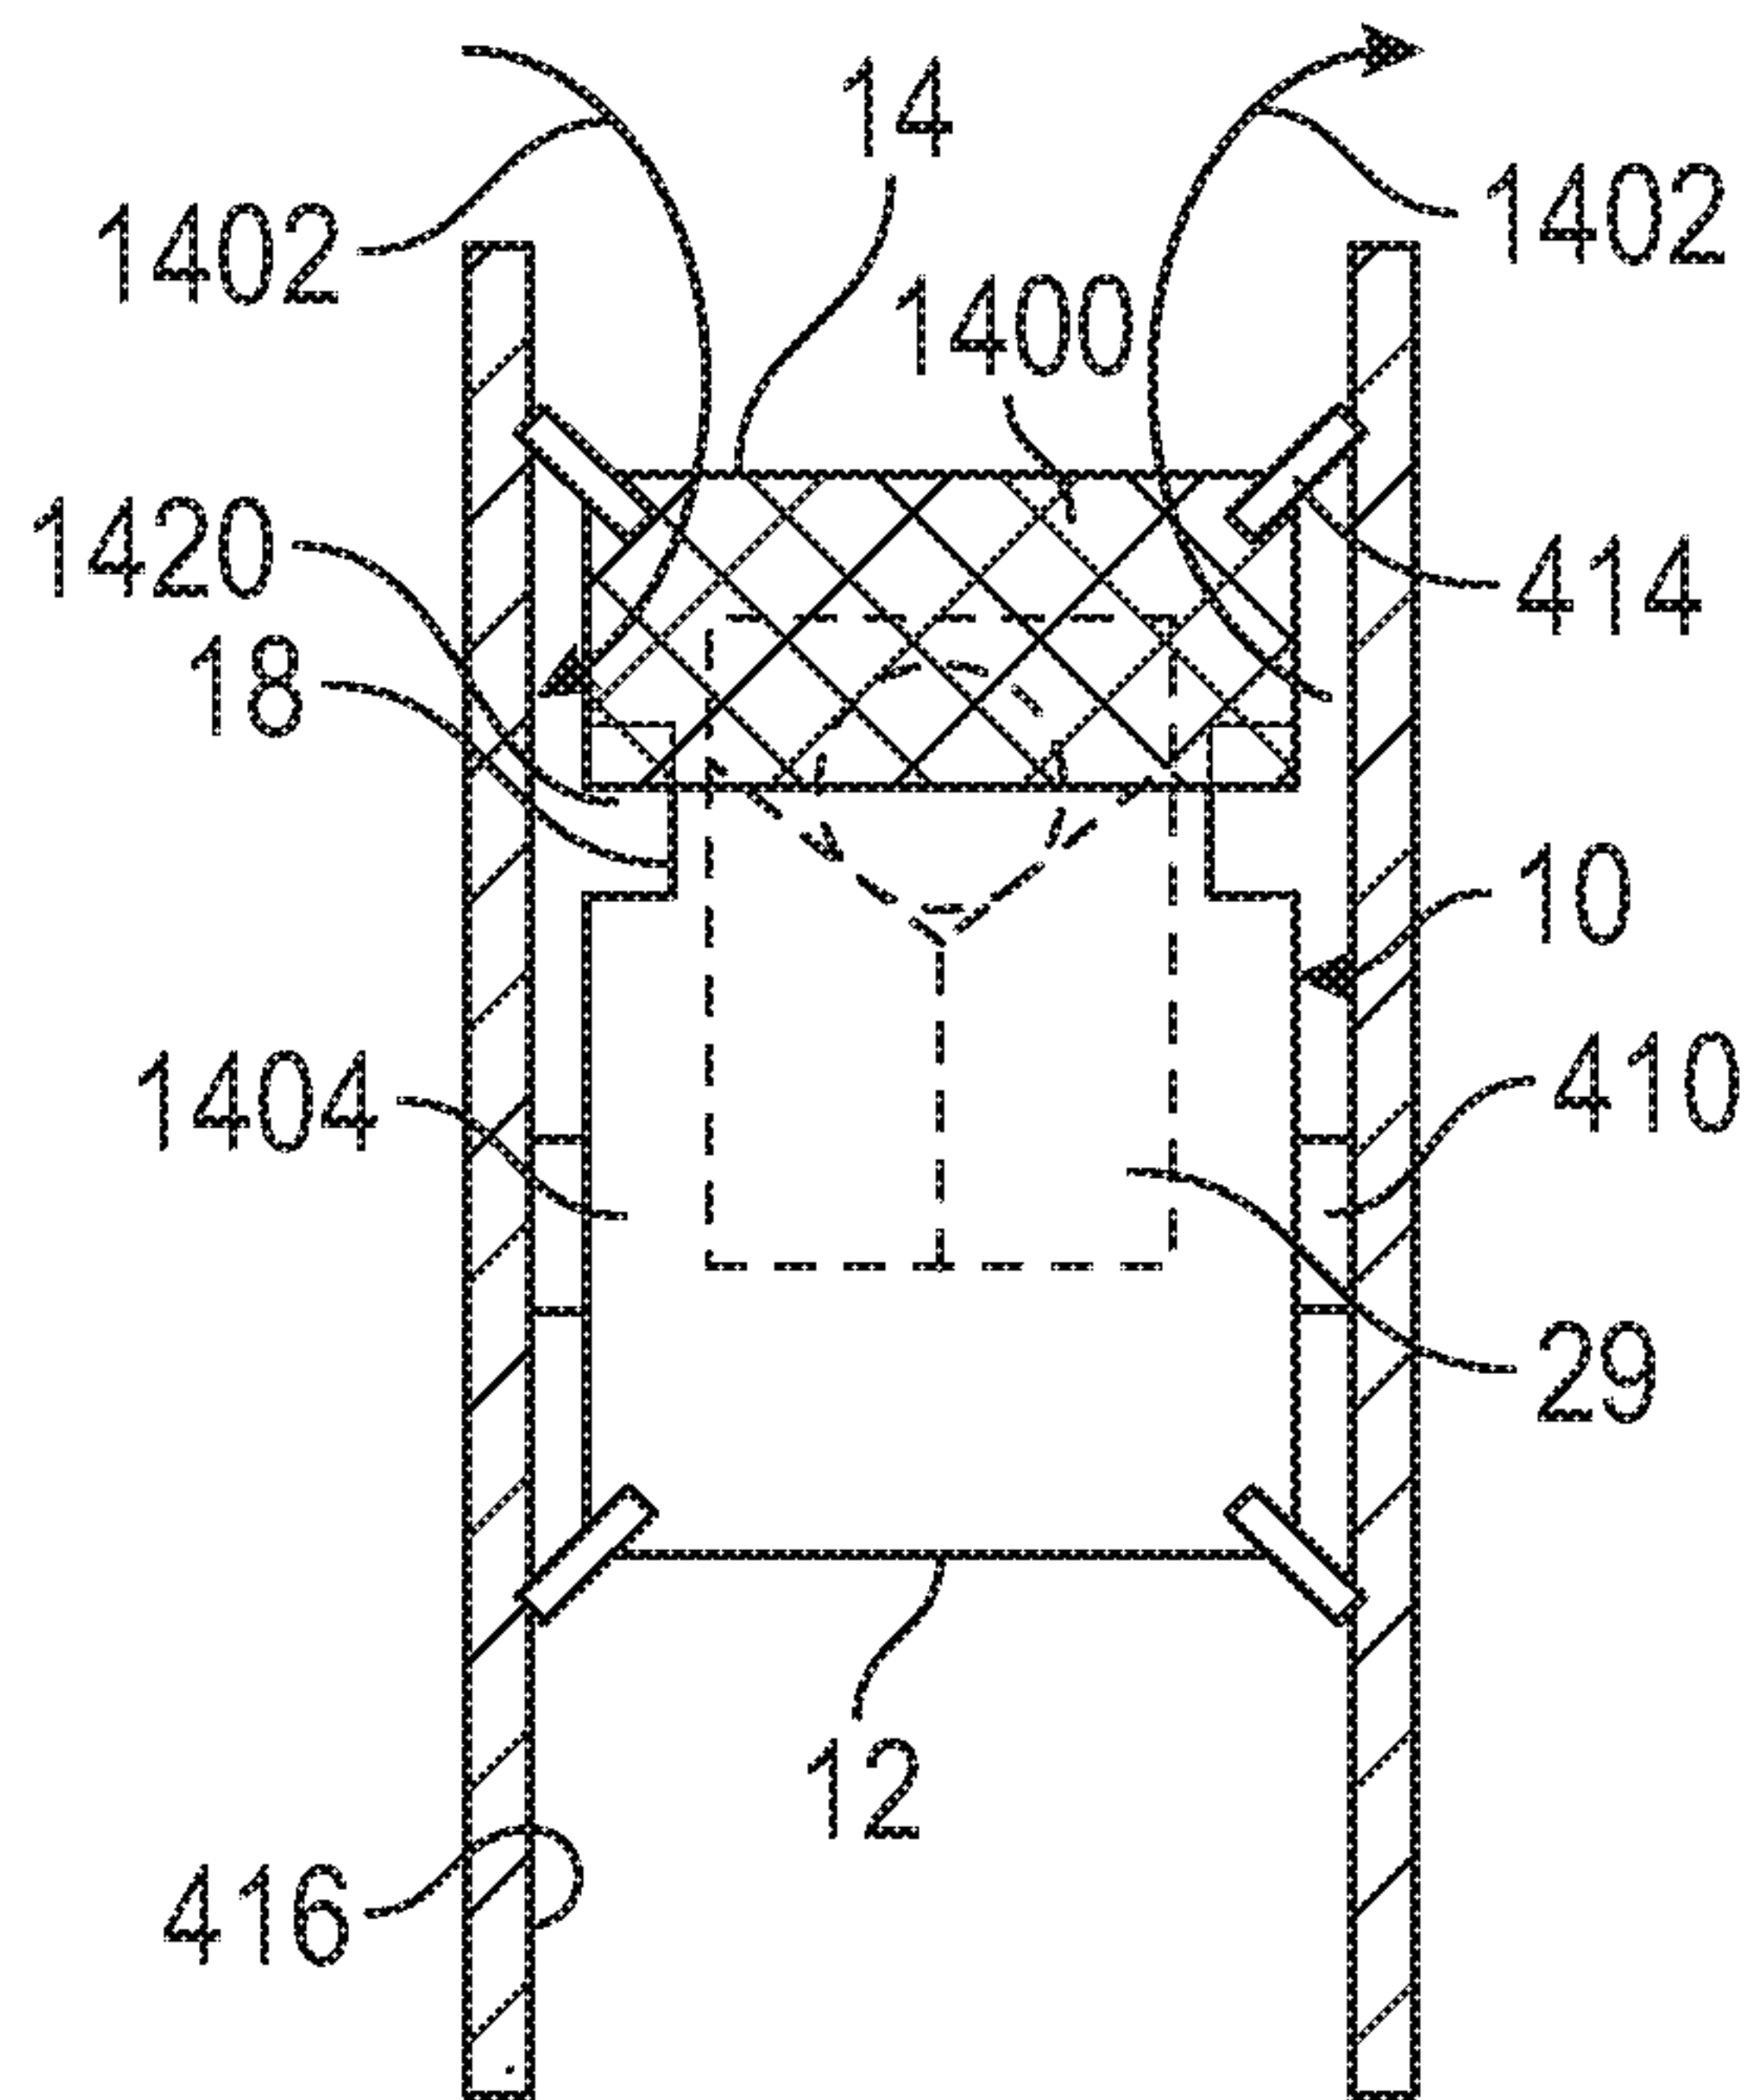


FIG. 14E

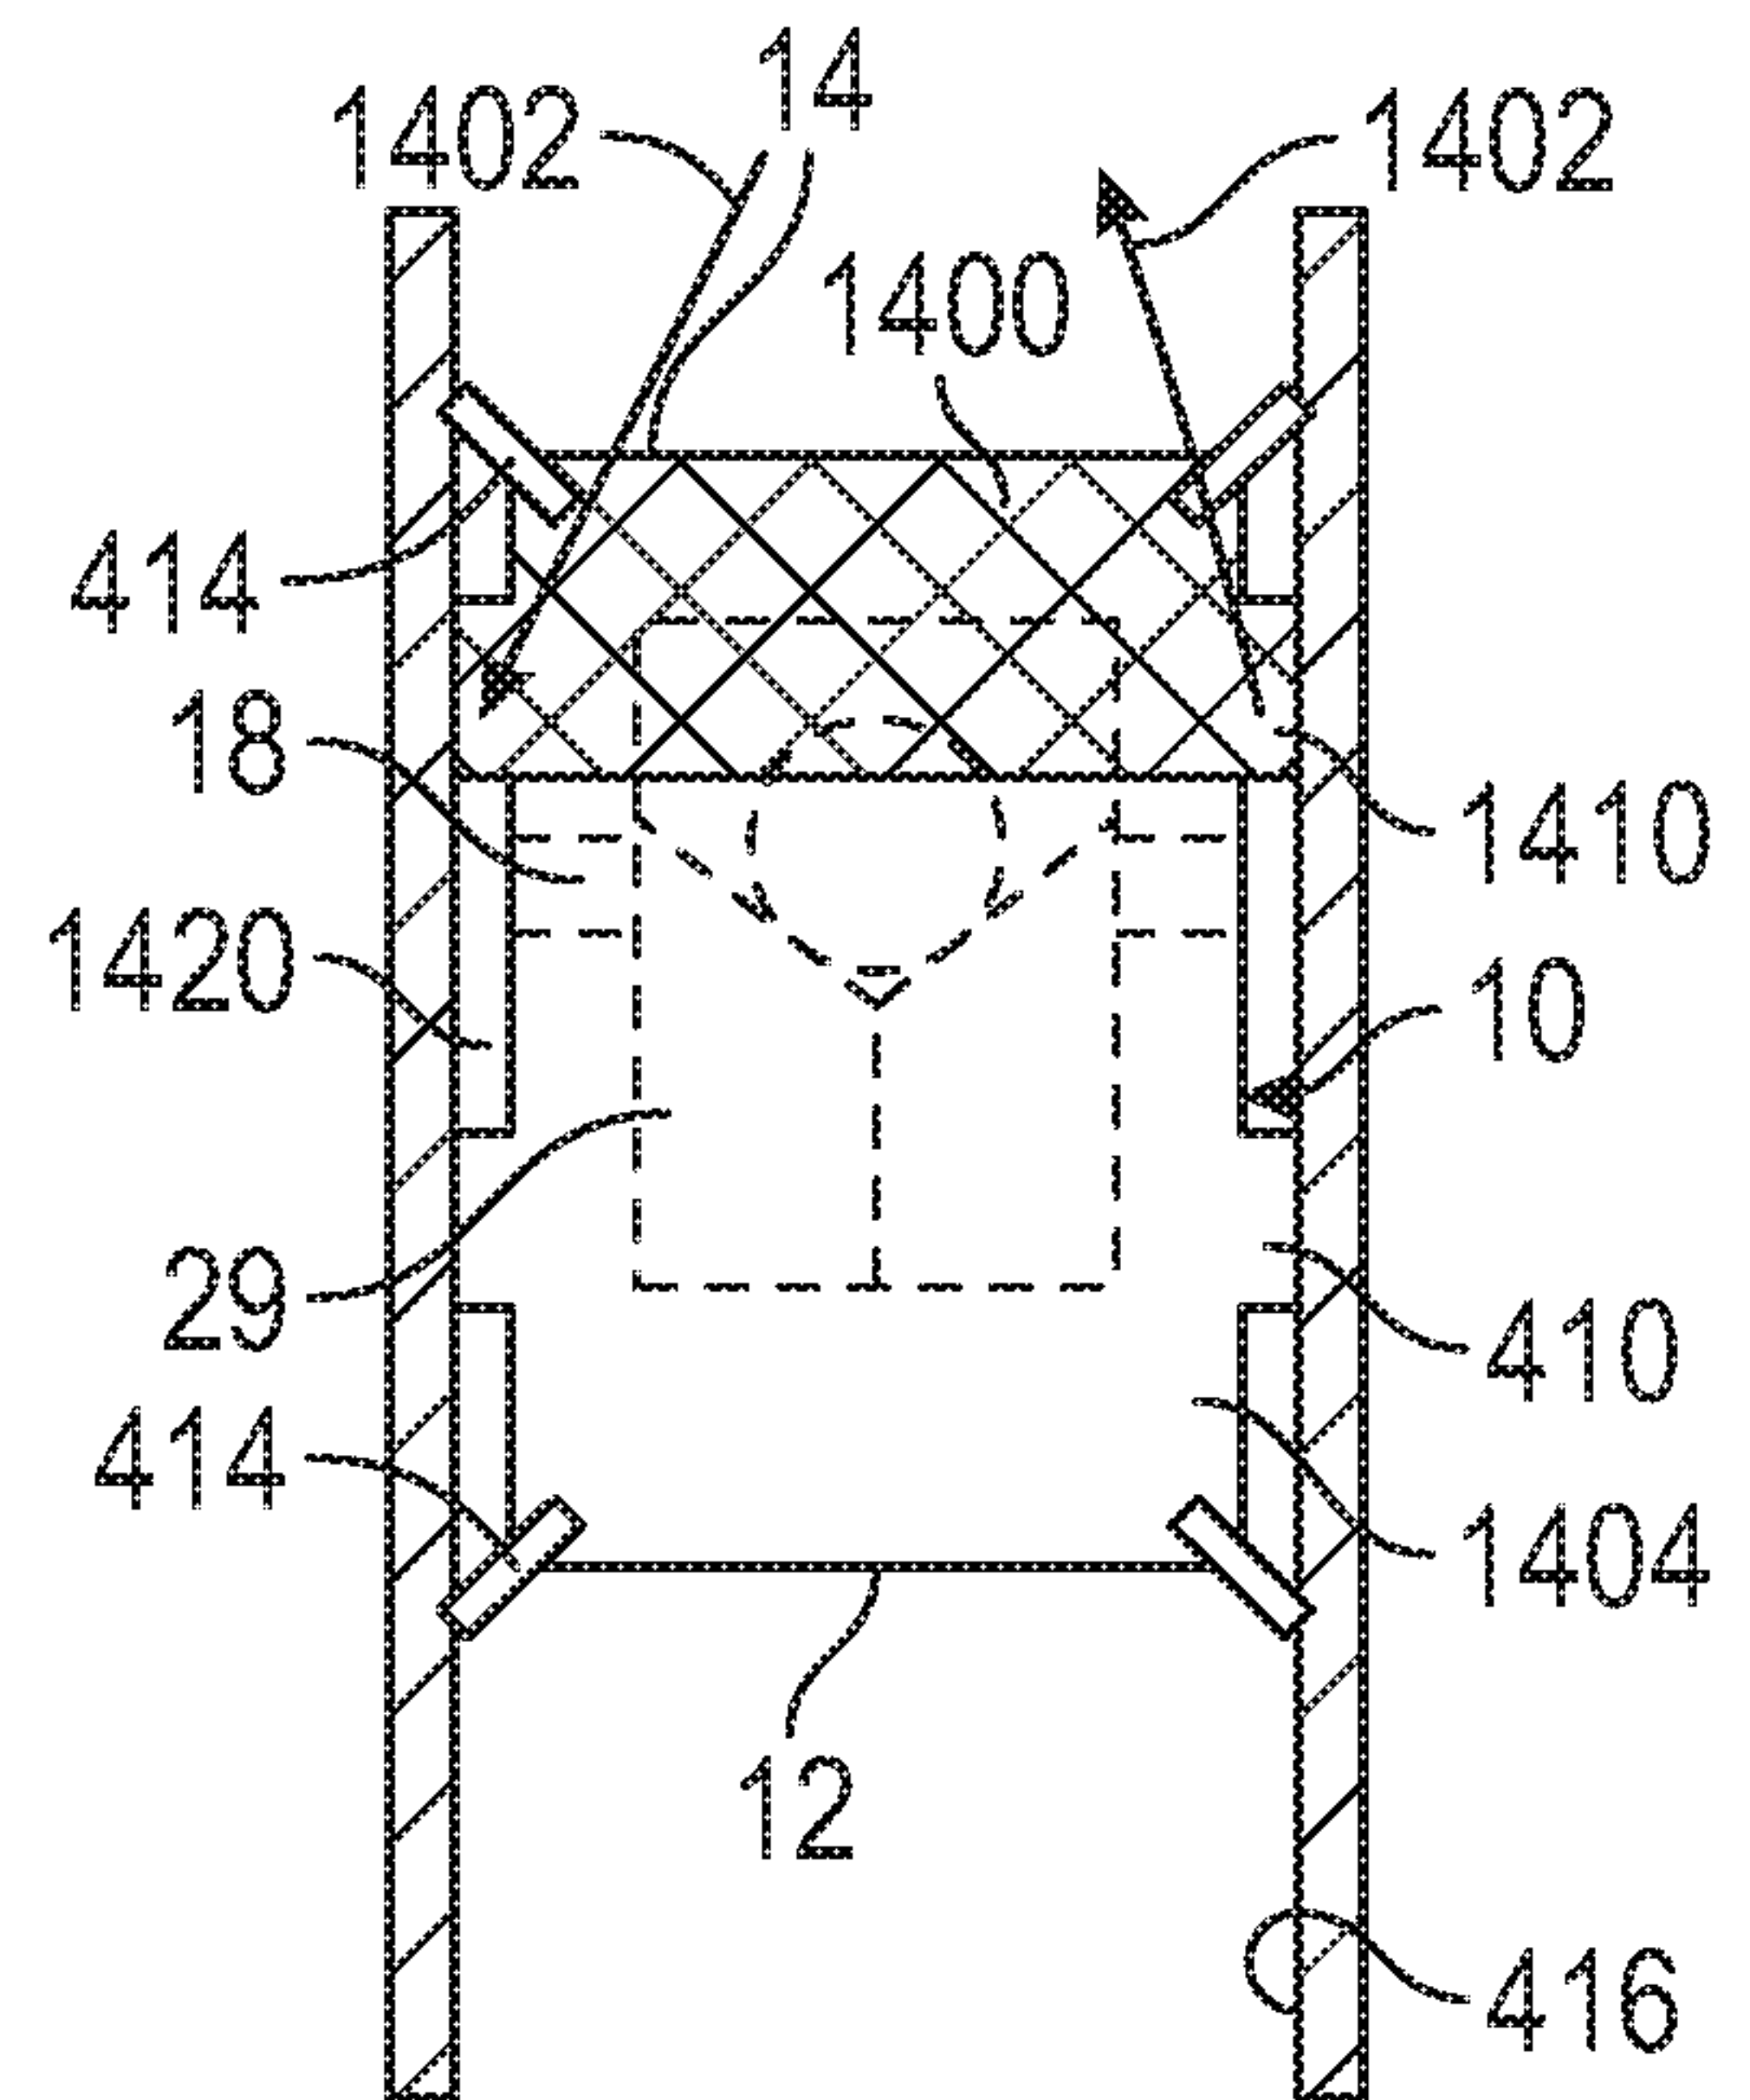


FIG. 14F

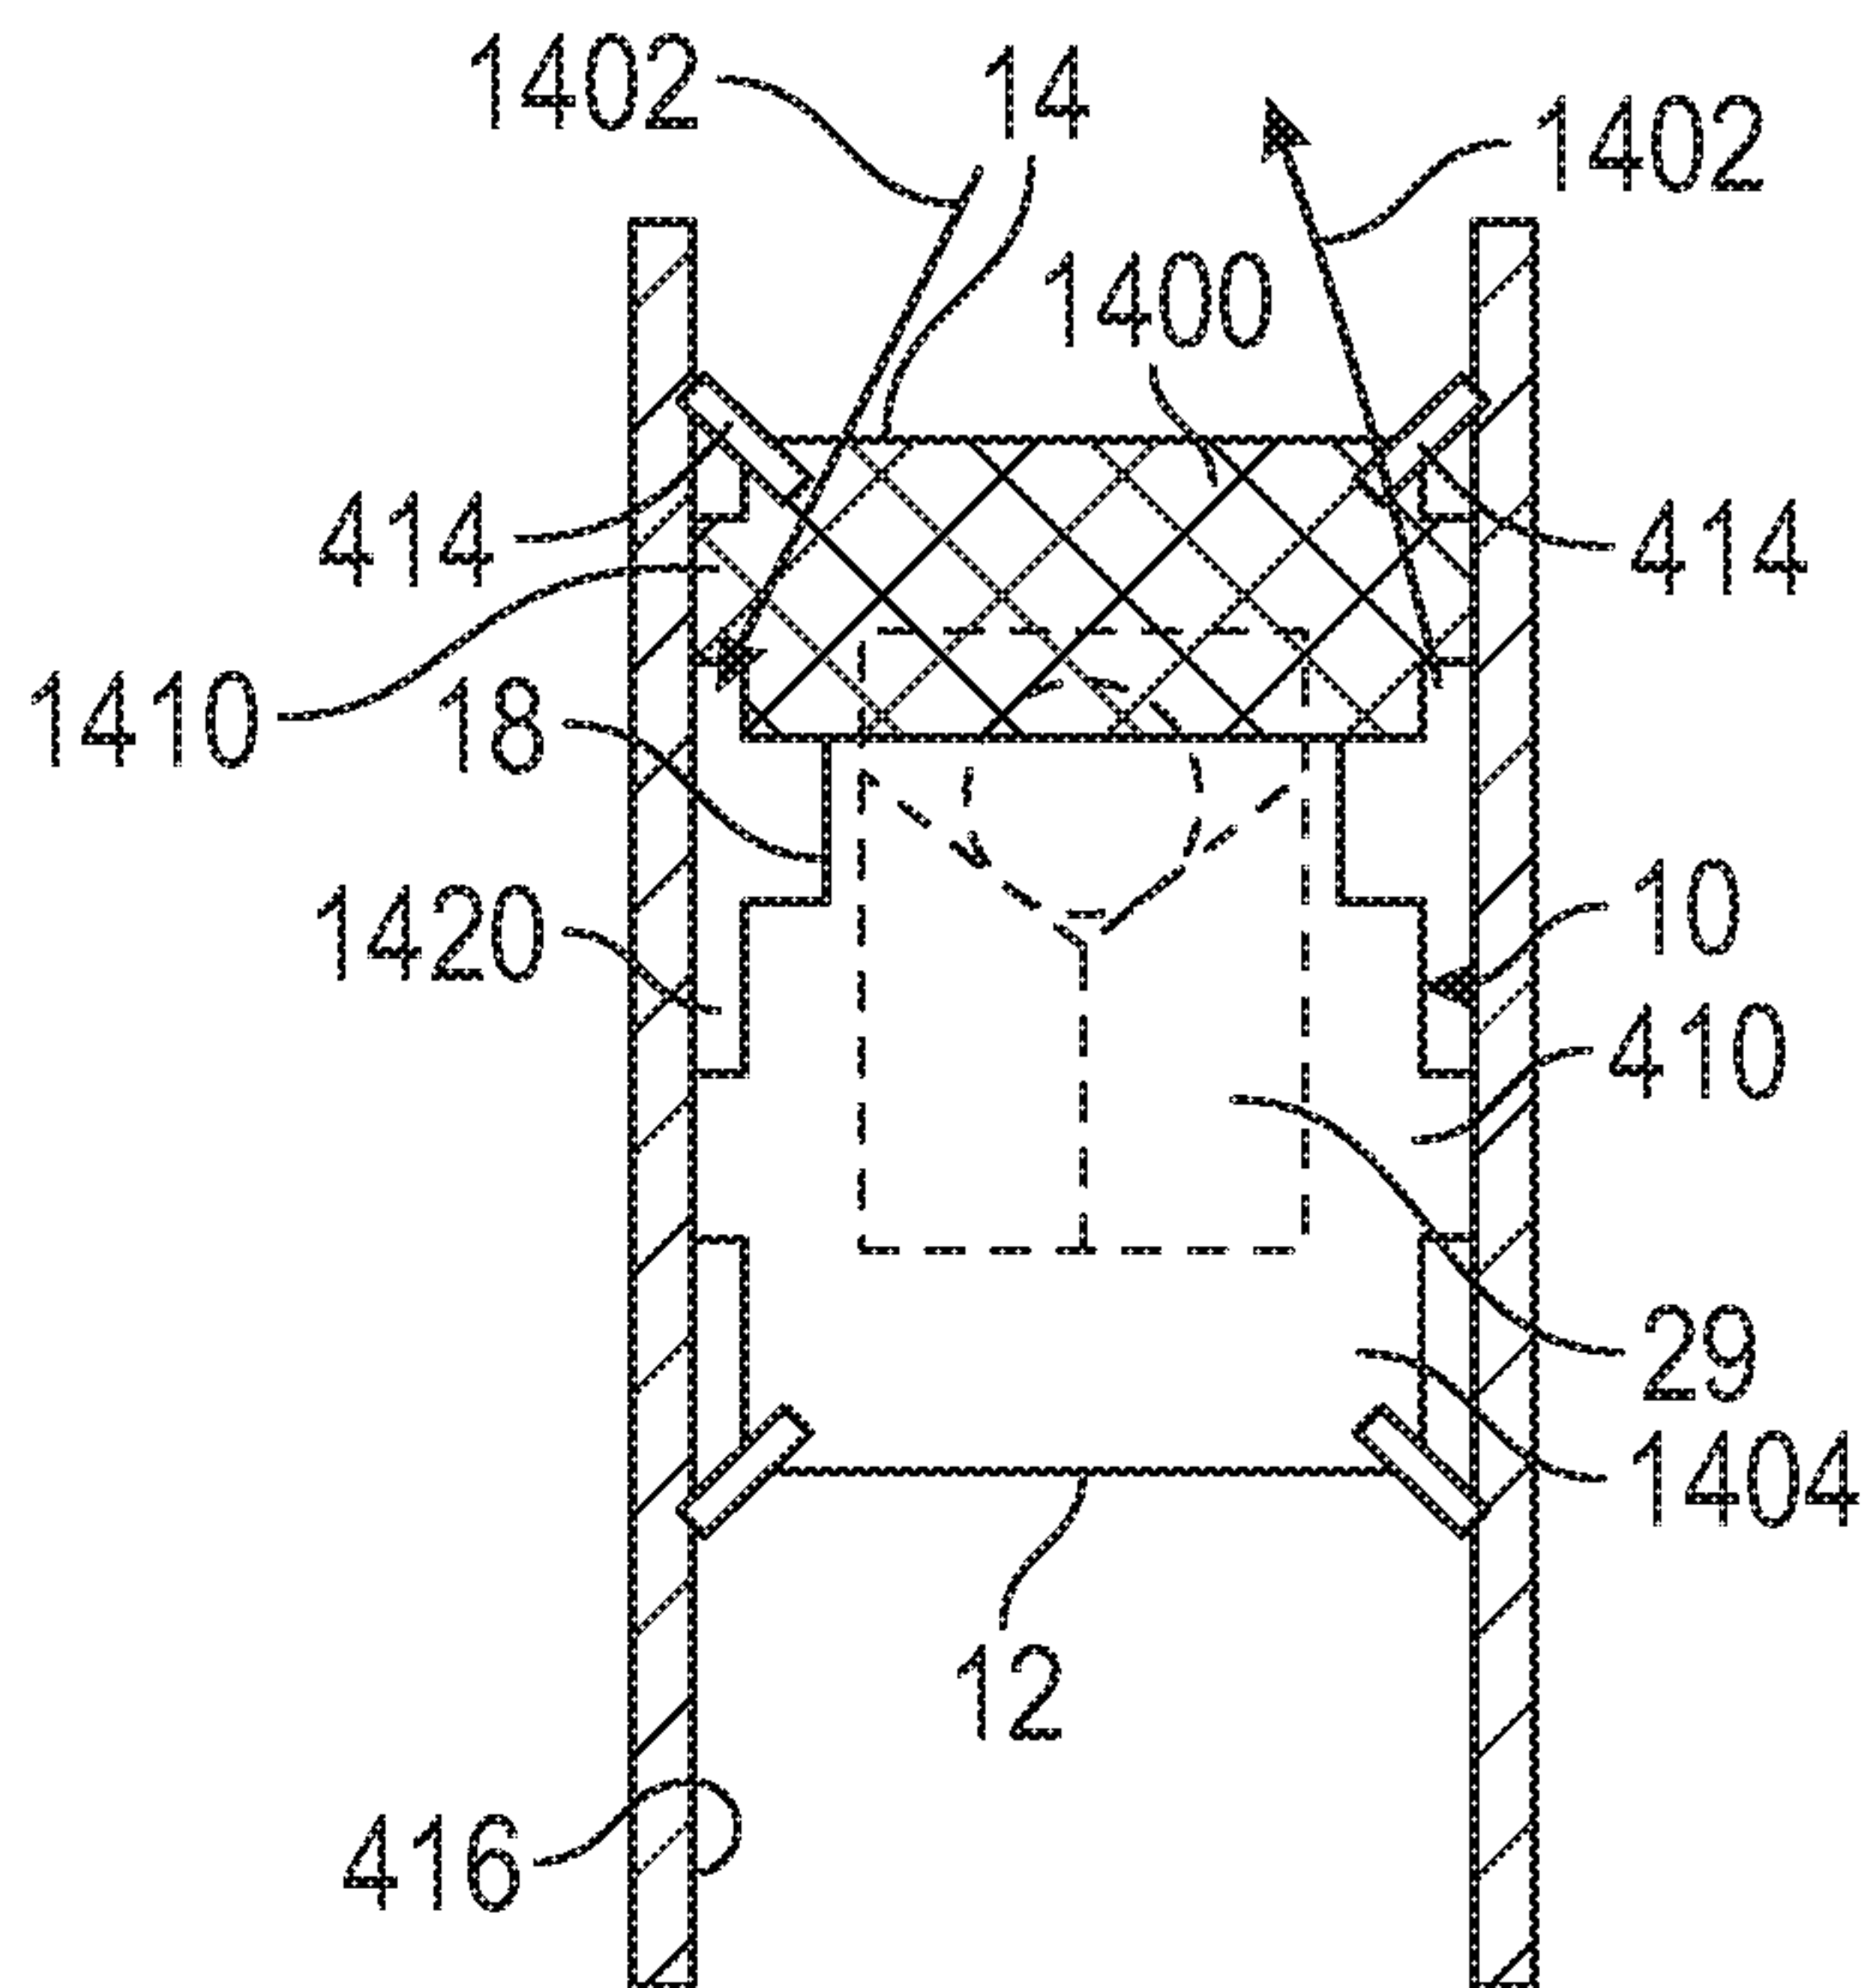


FIG. 14G

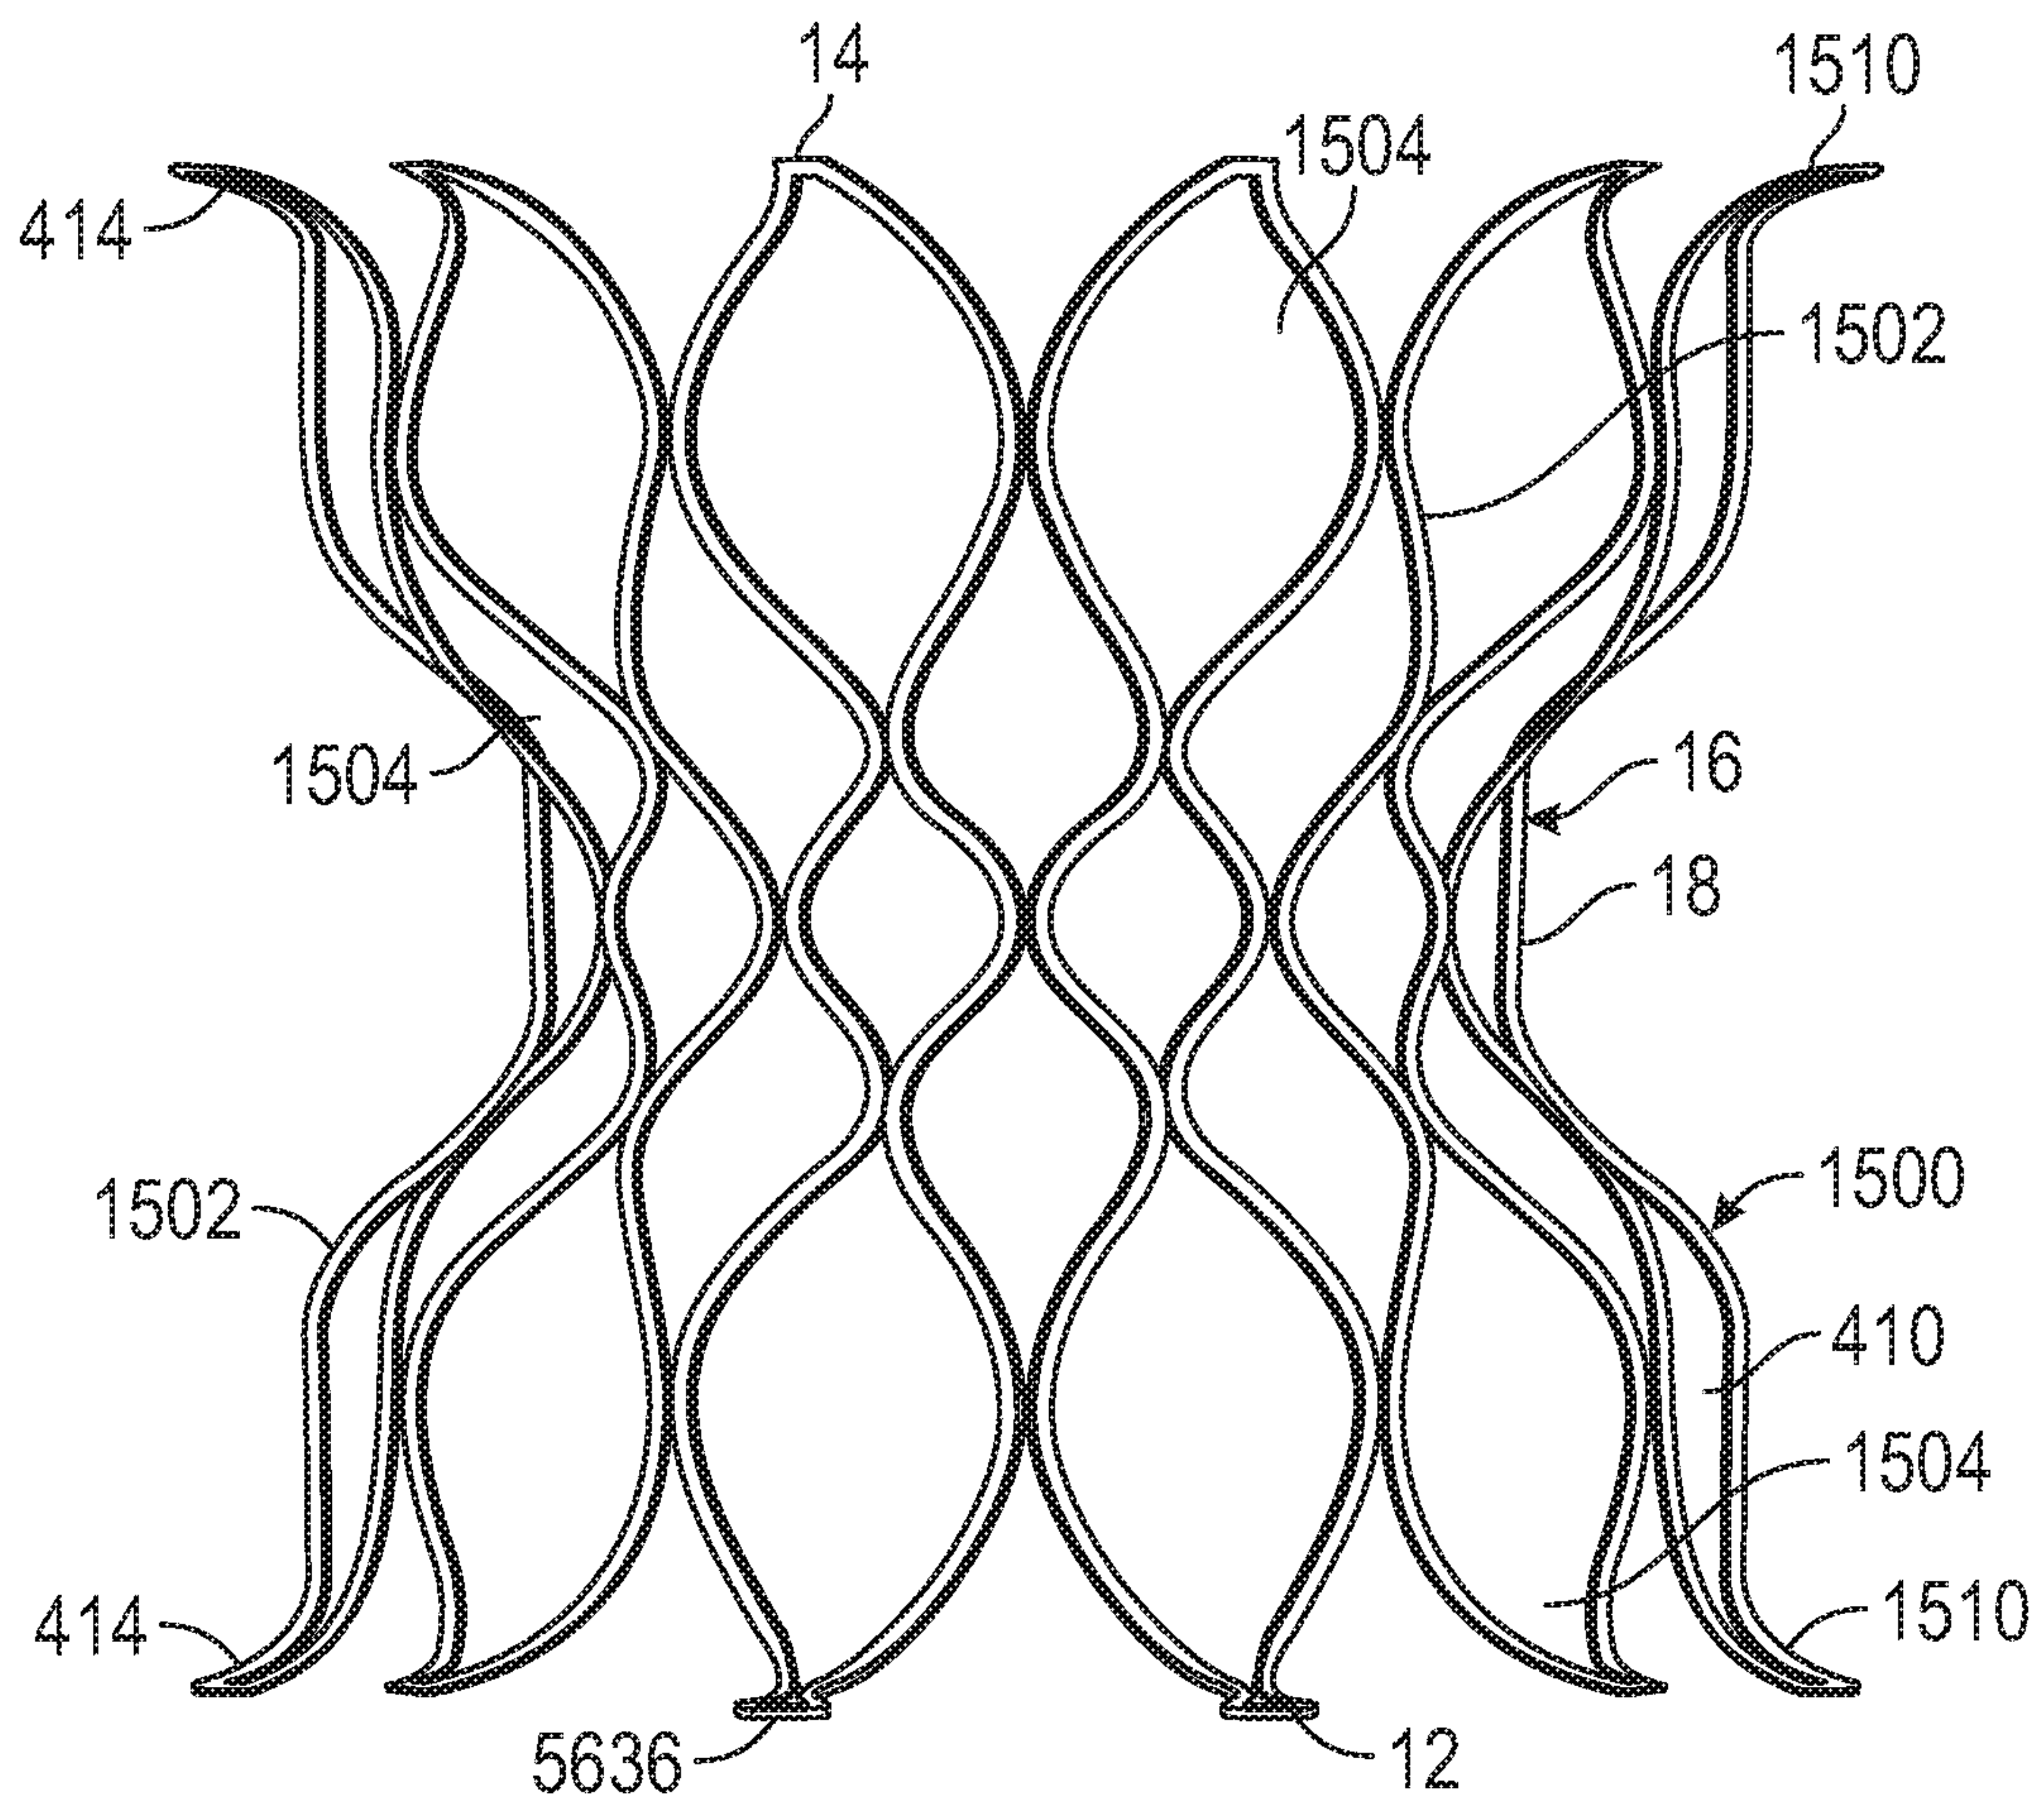


FIG. 15A

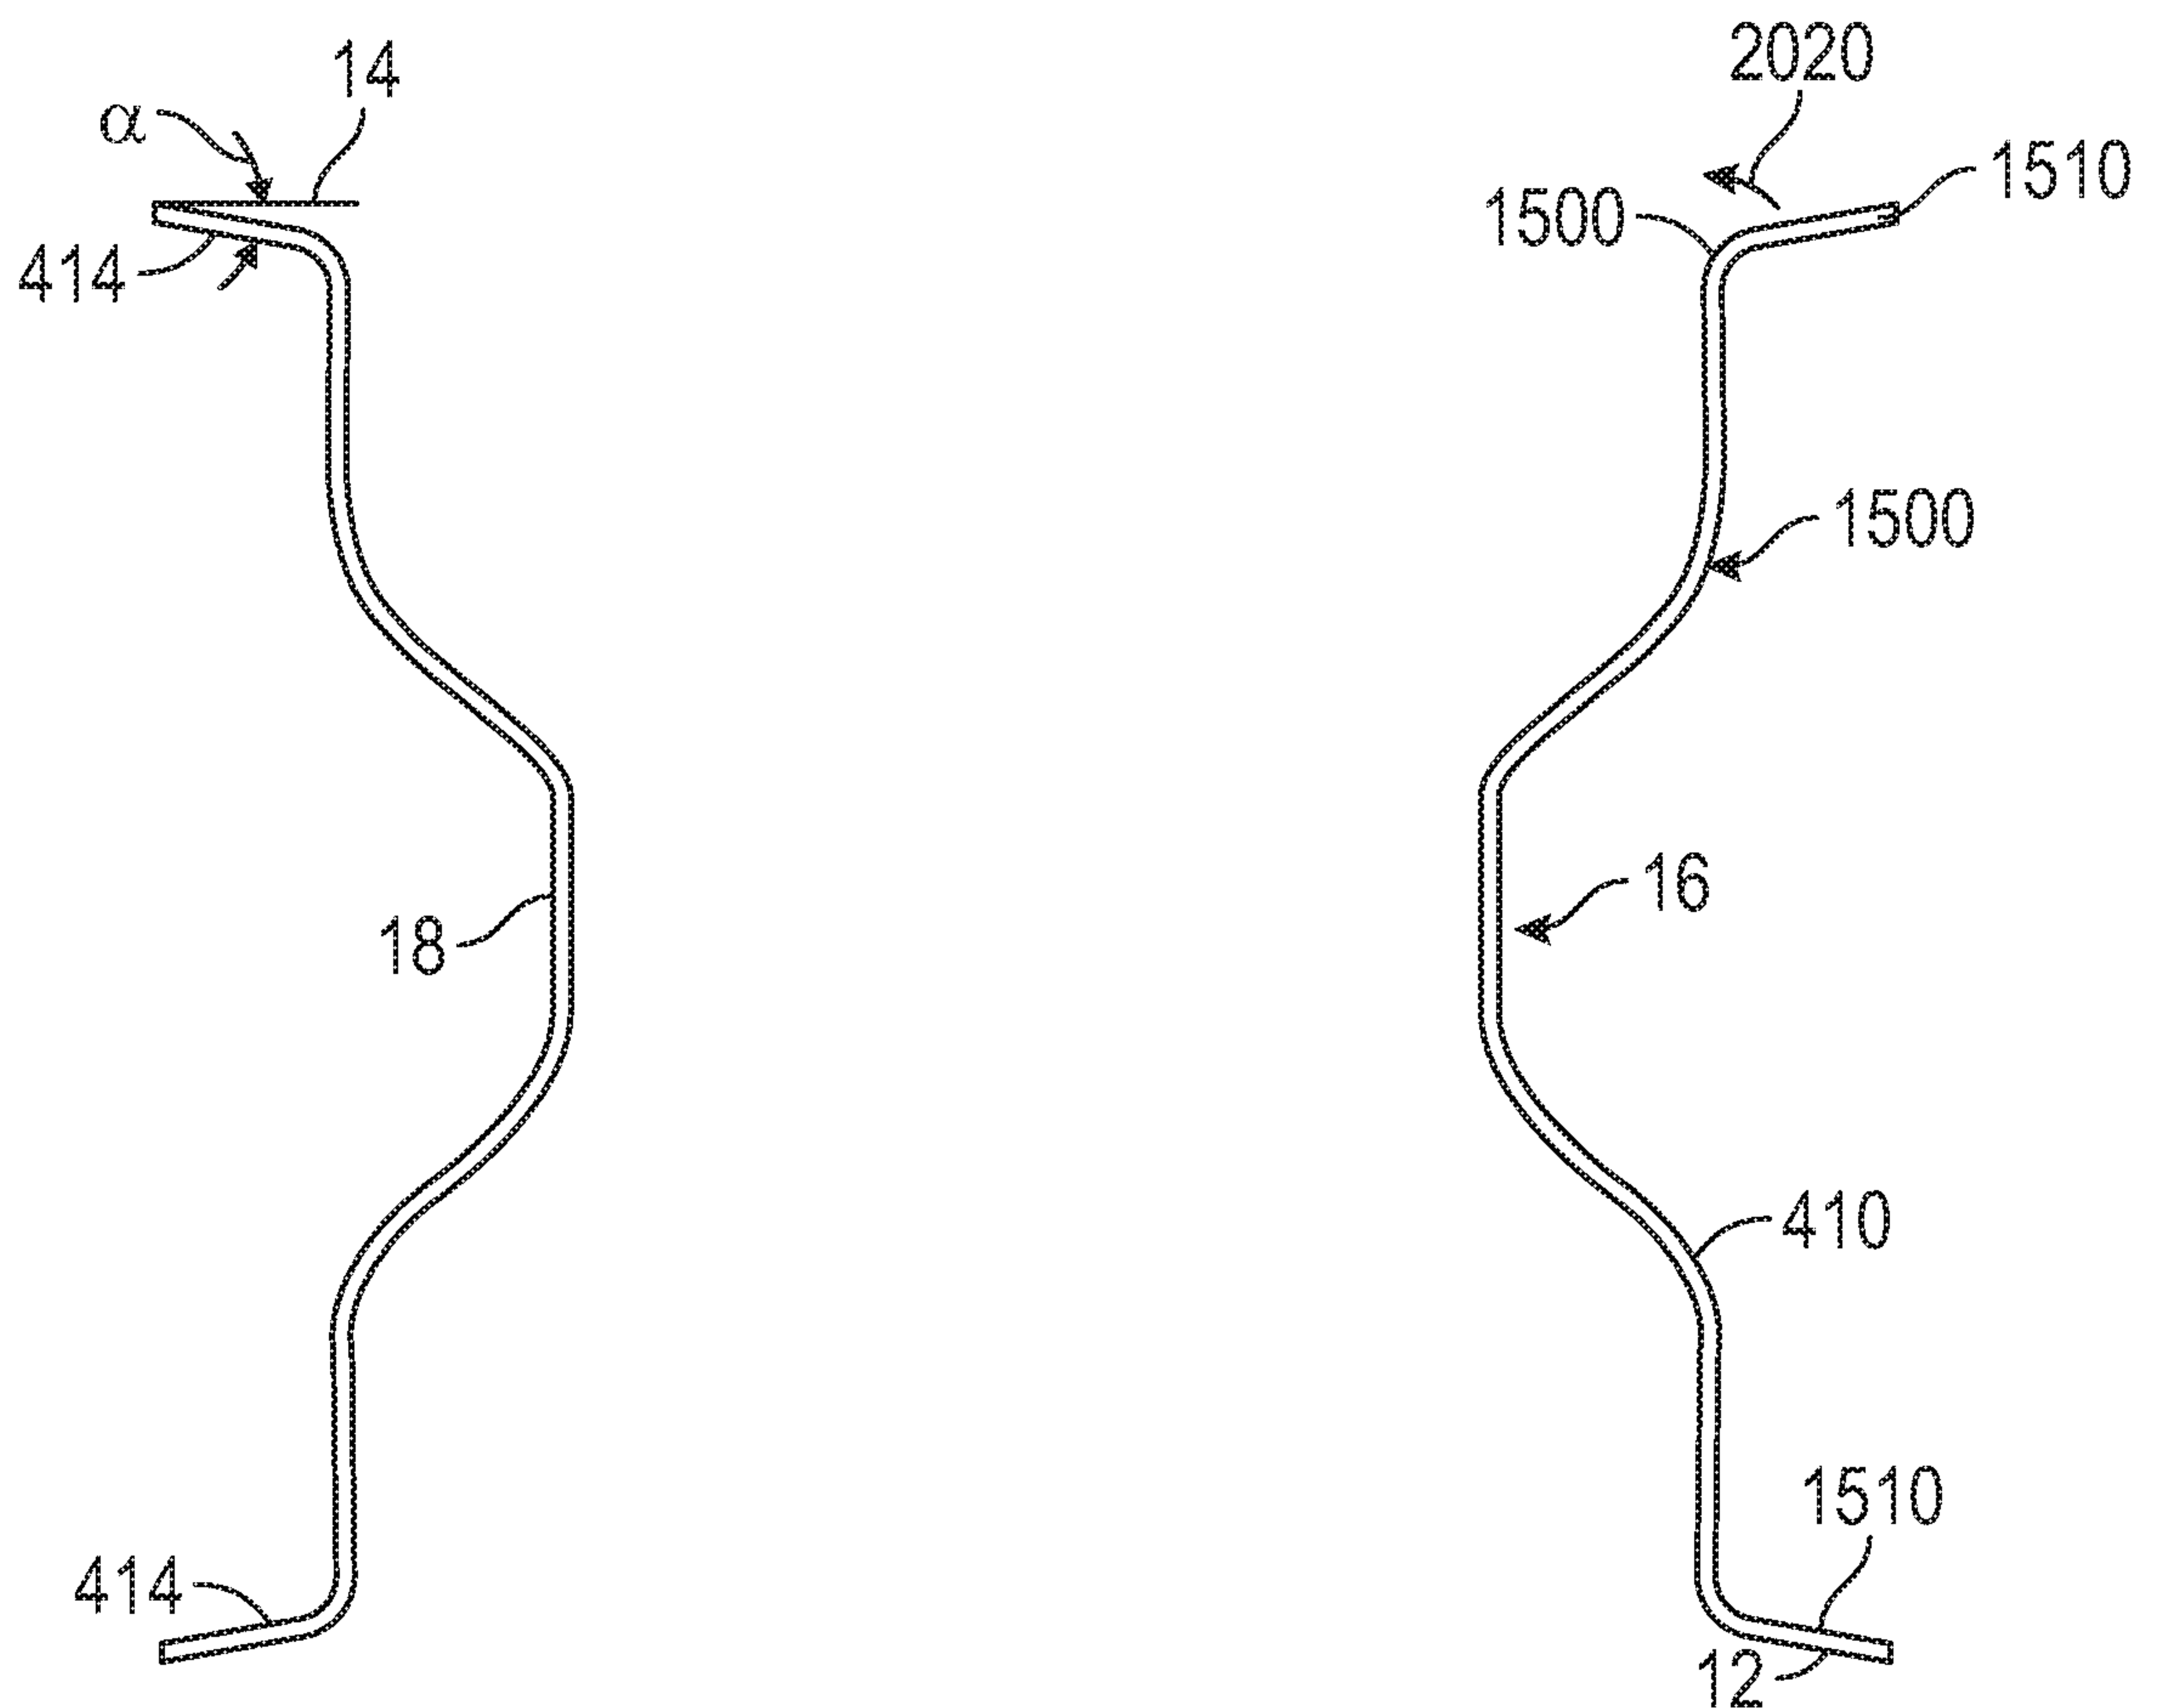


FIG. 15R

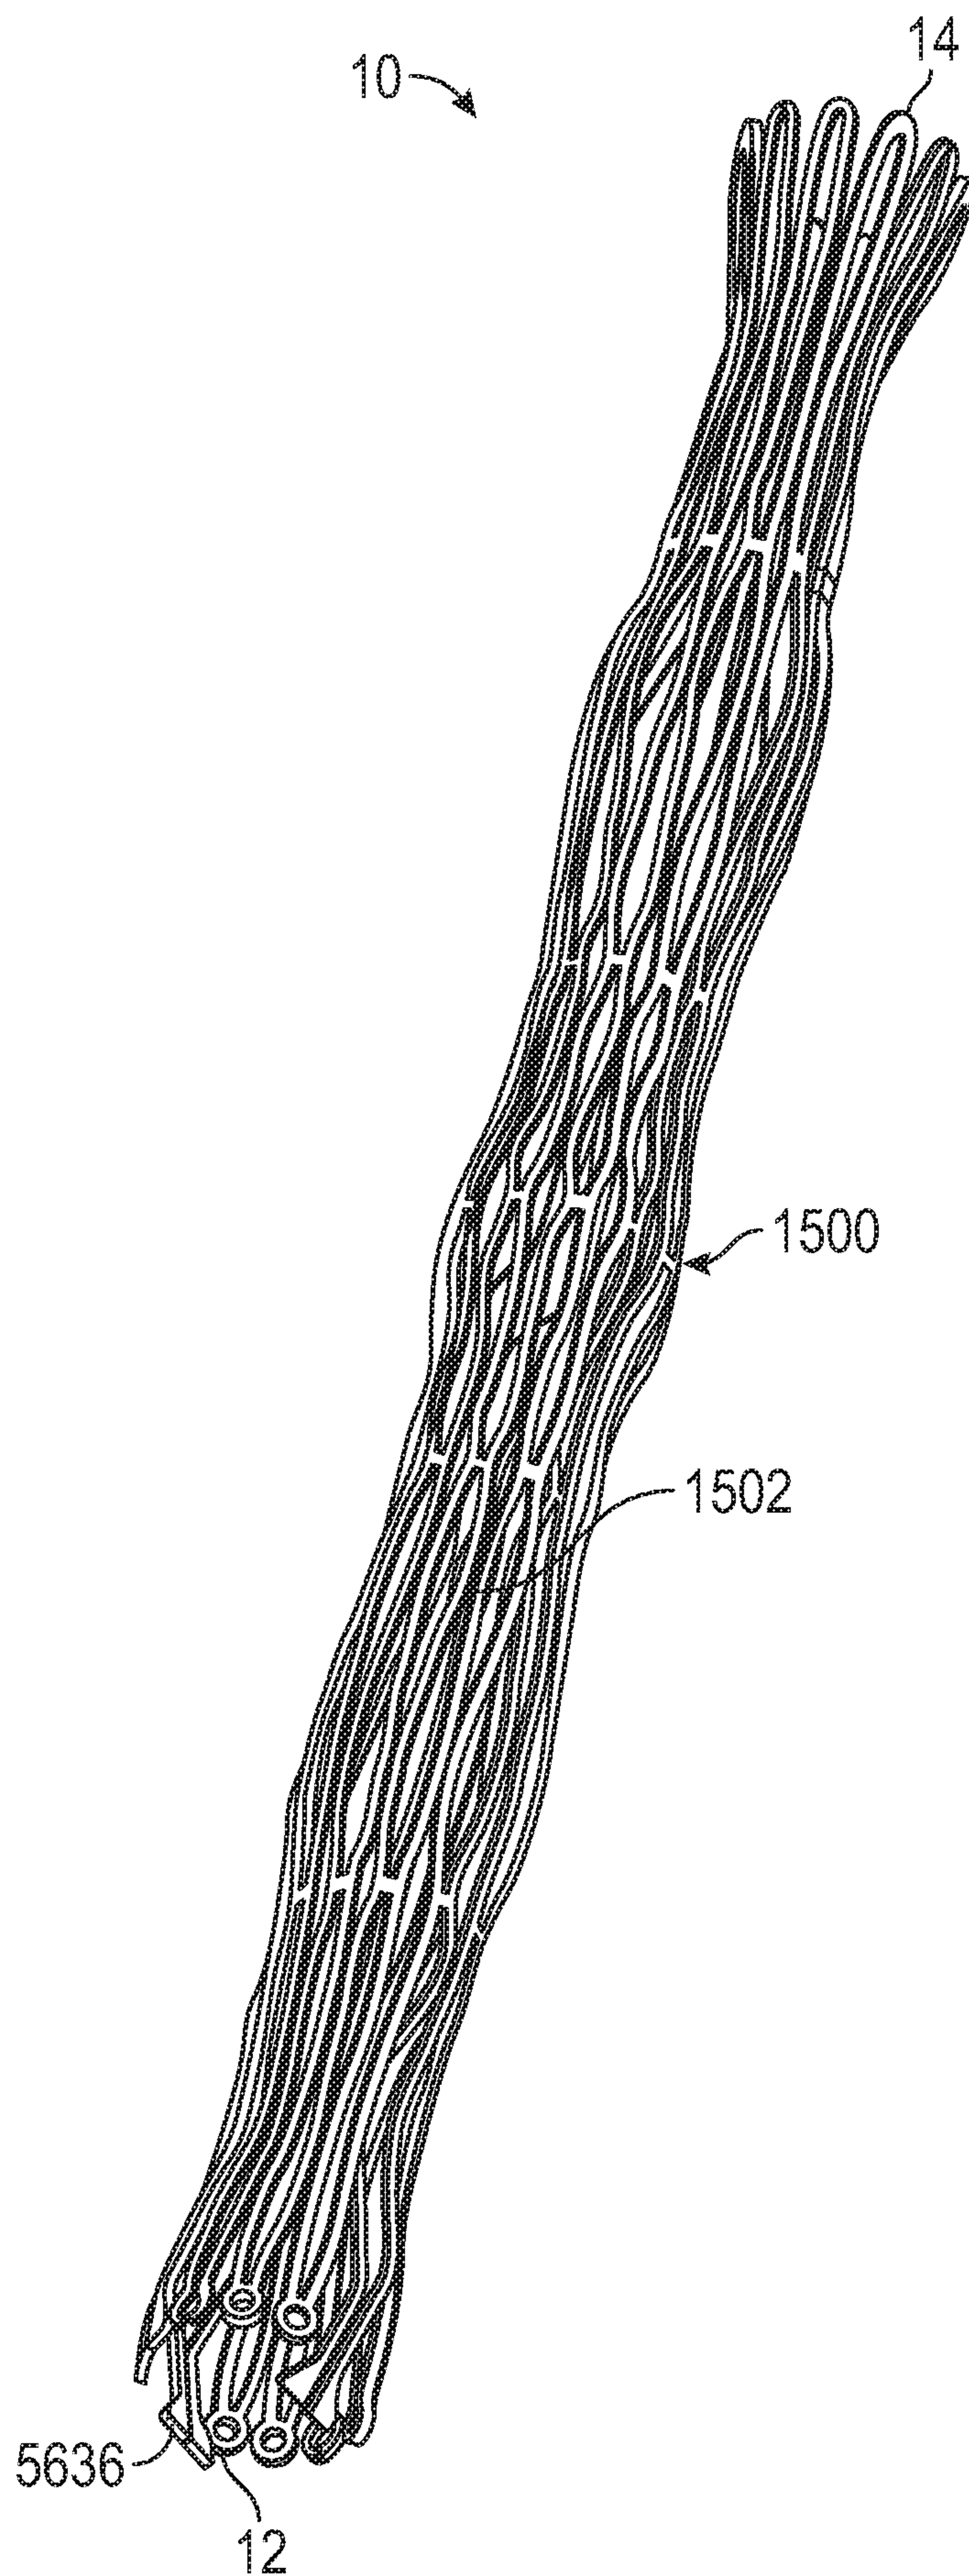


FIG. 16

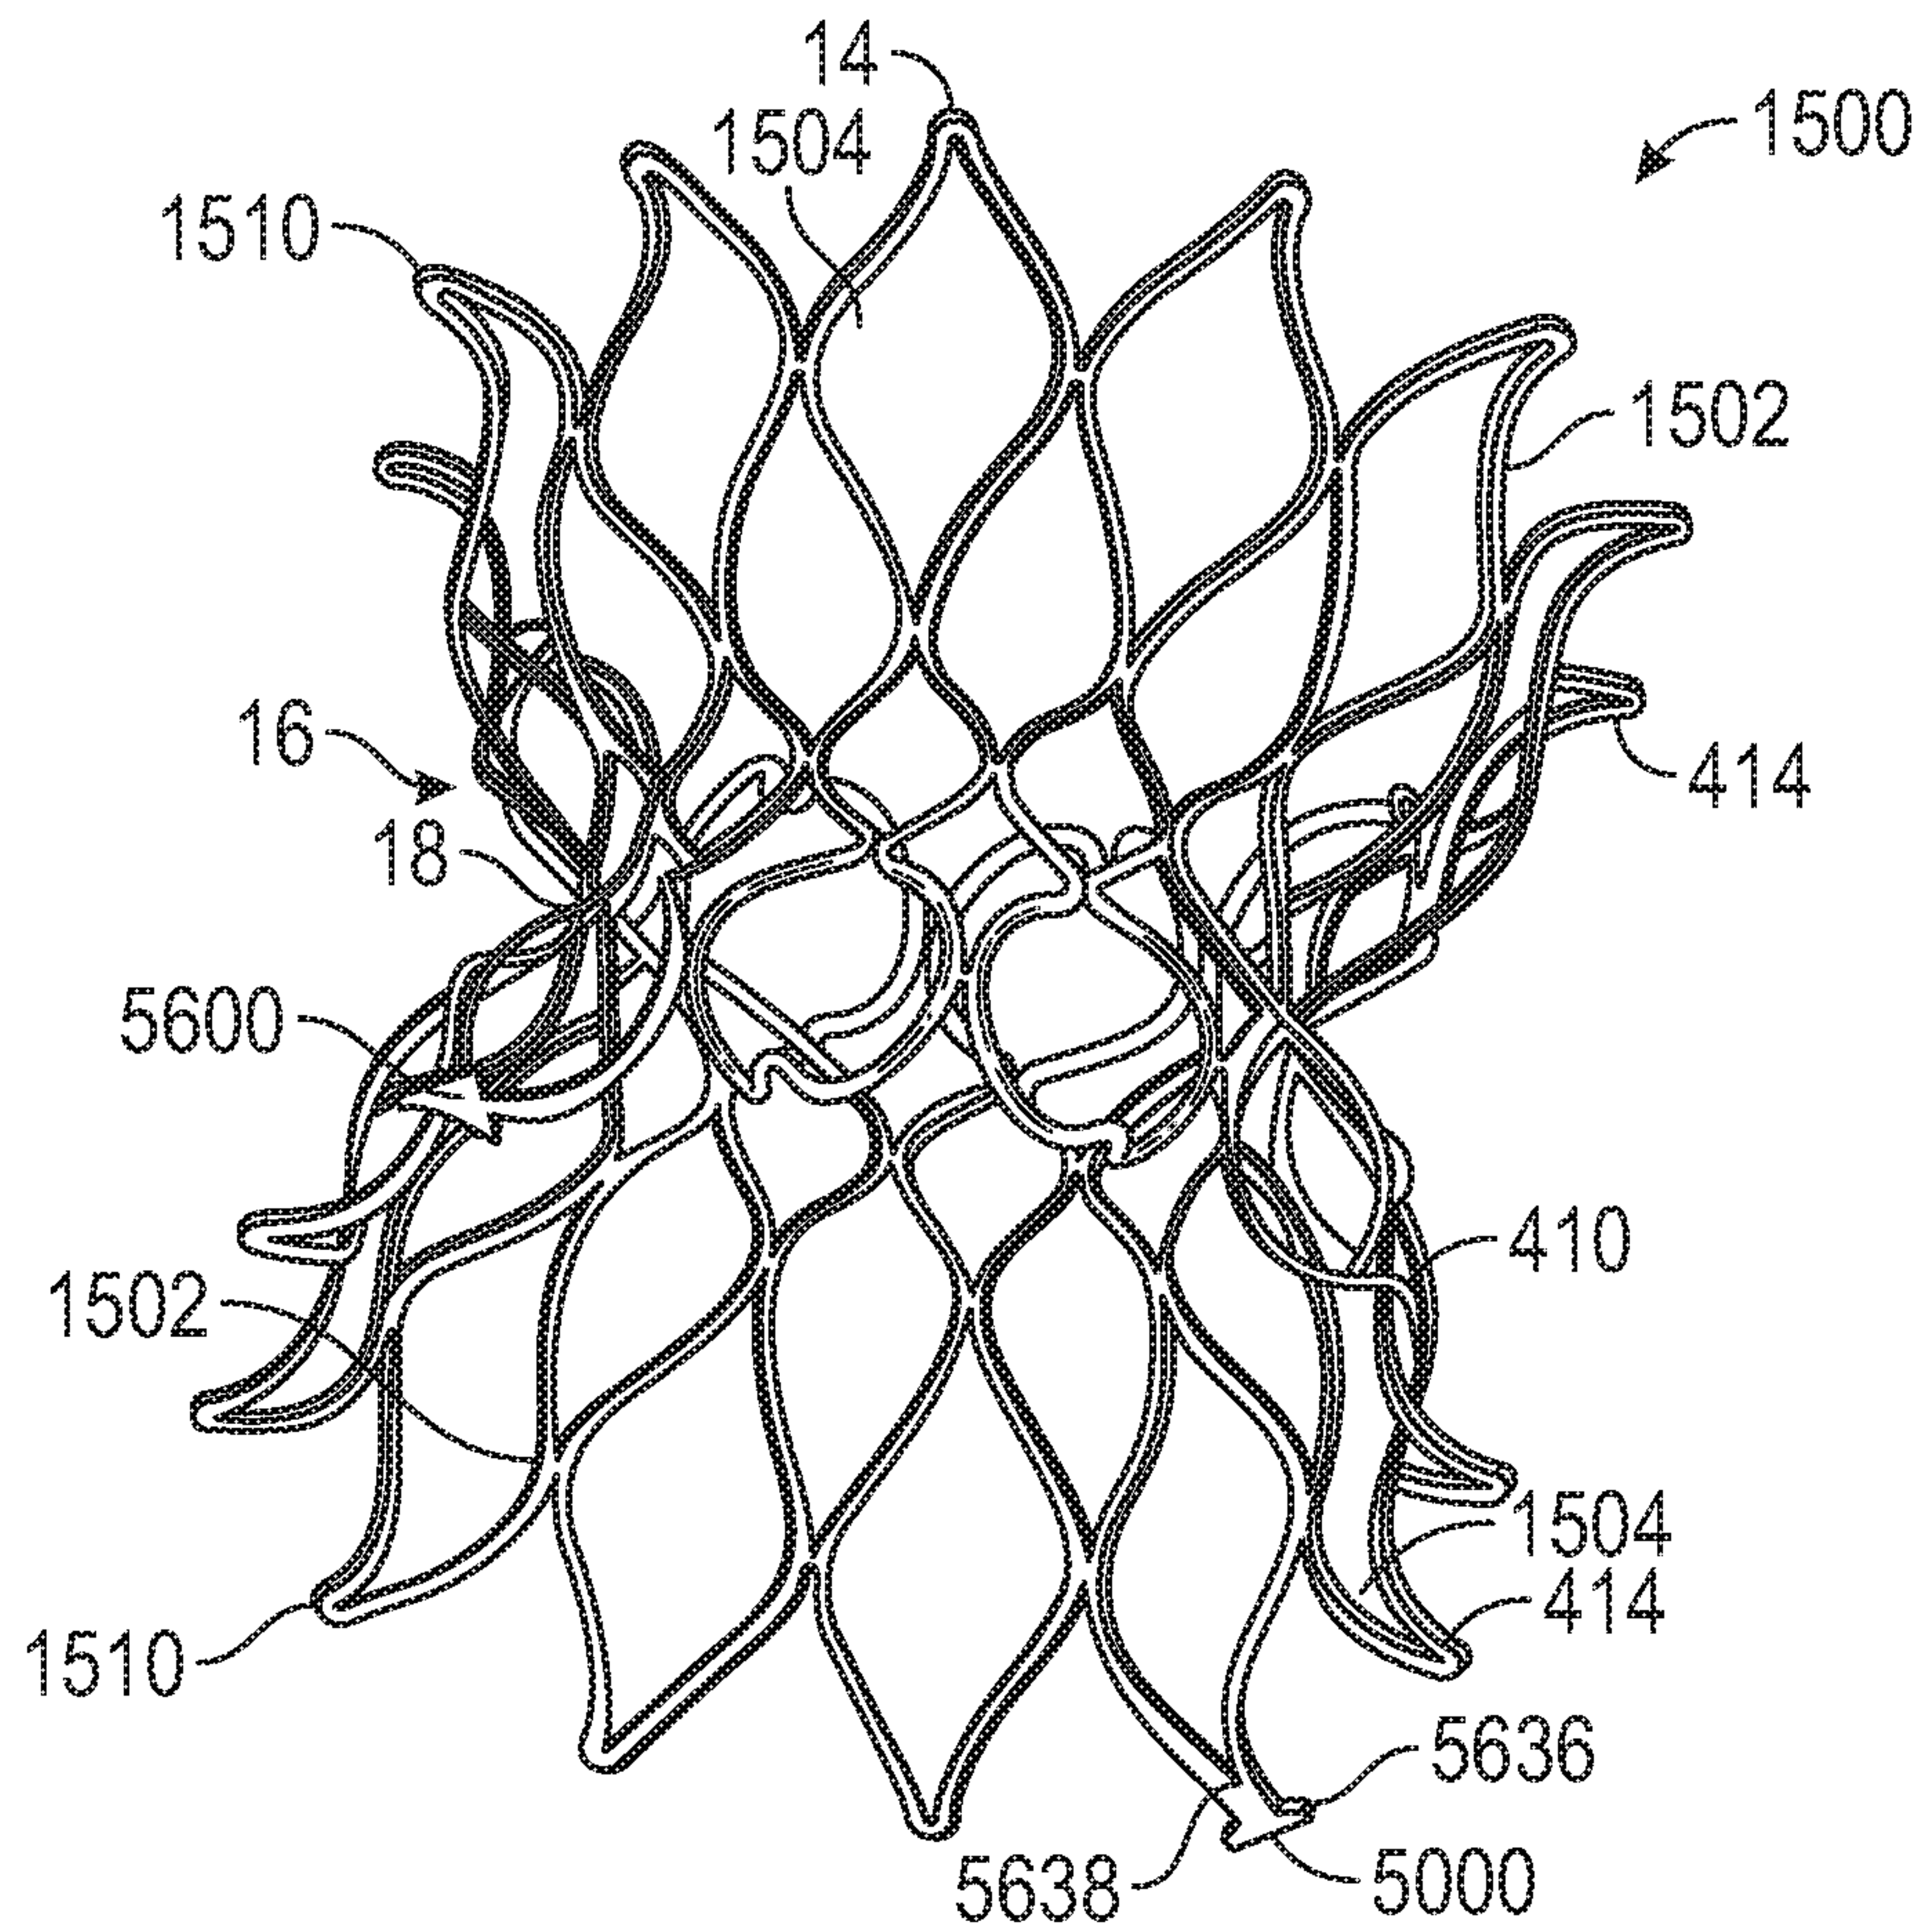


FIG. 17A

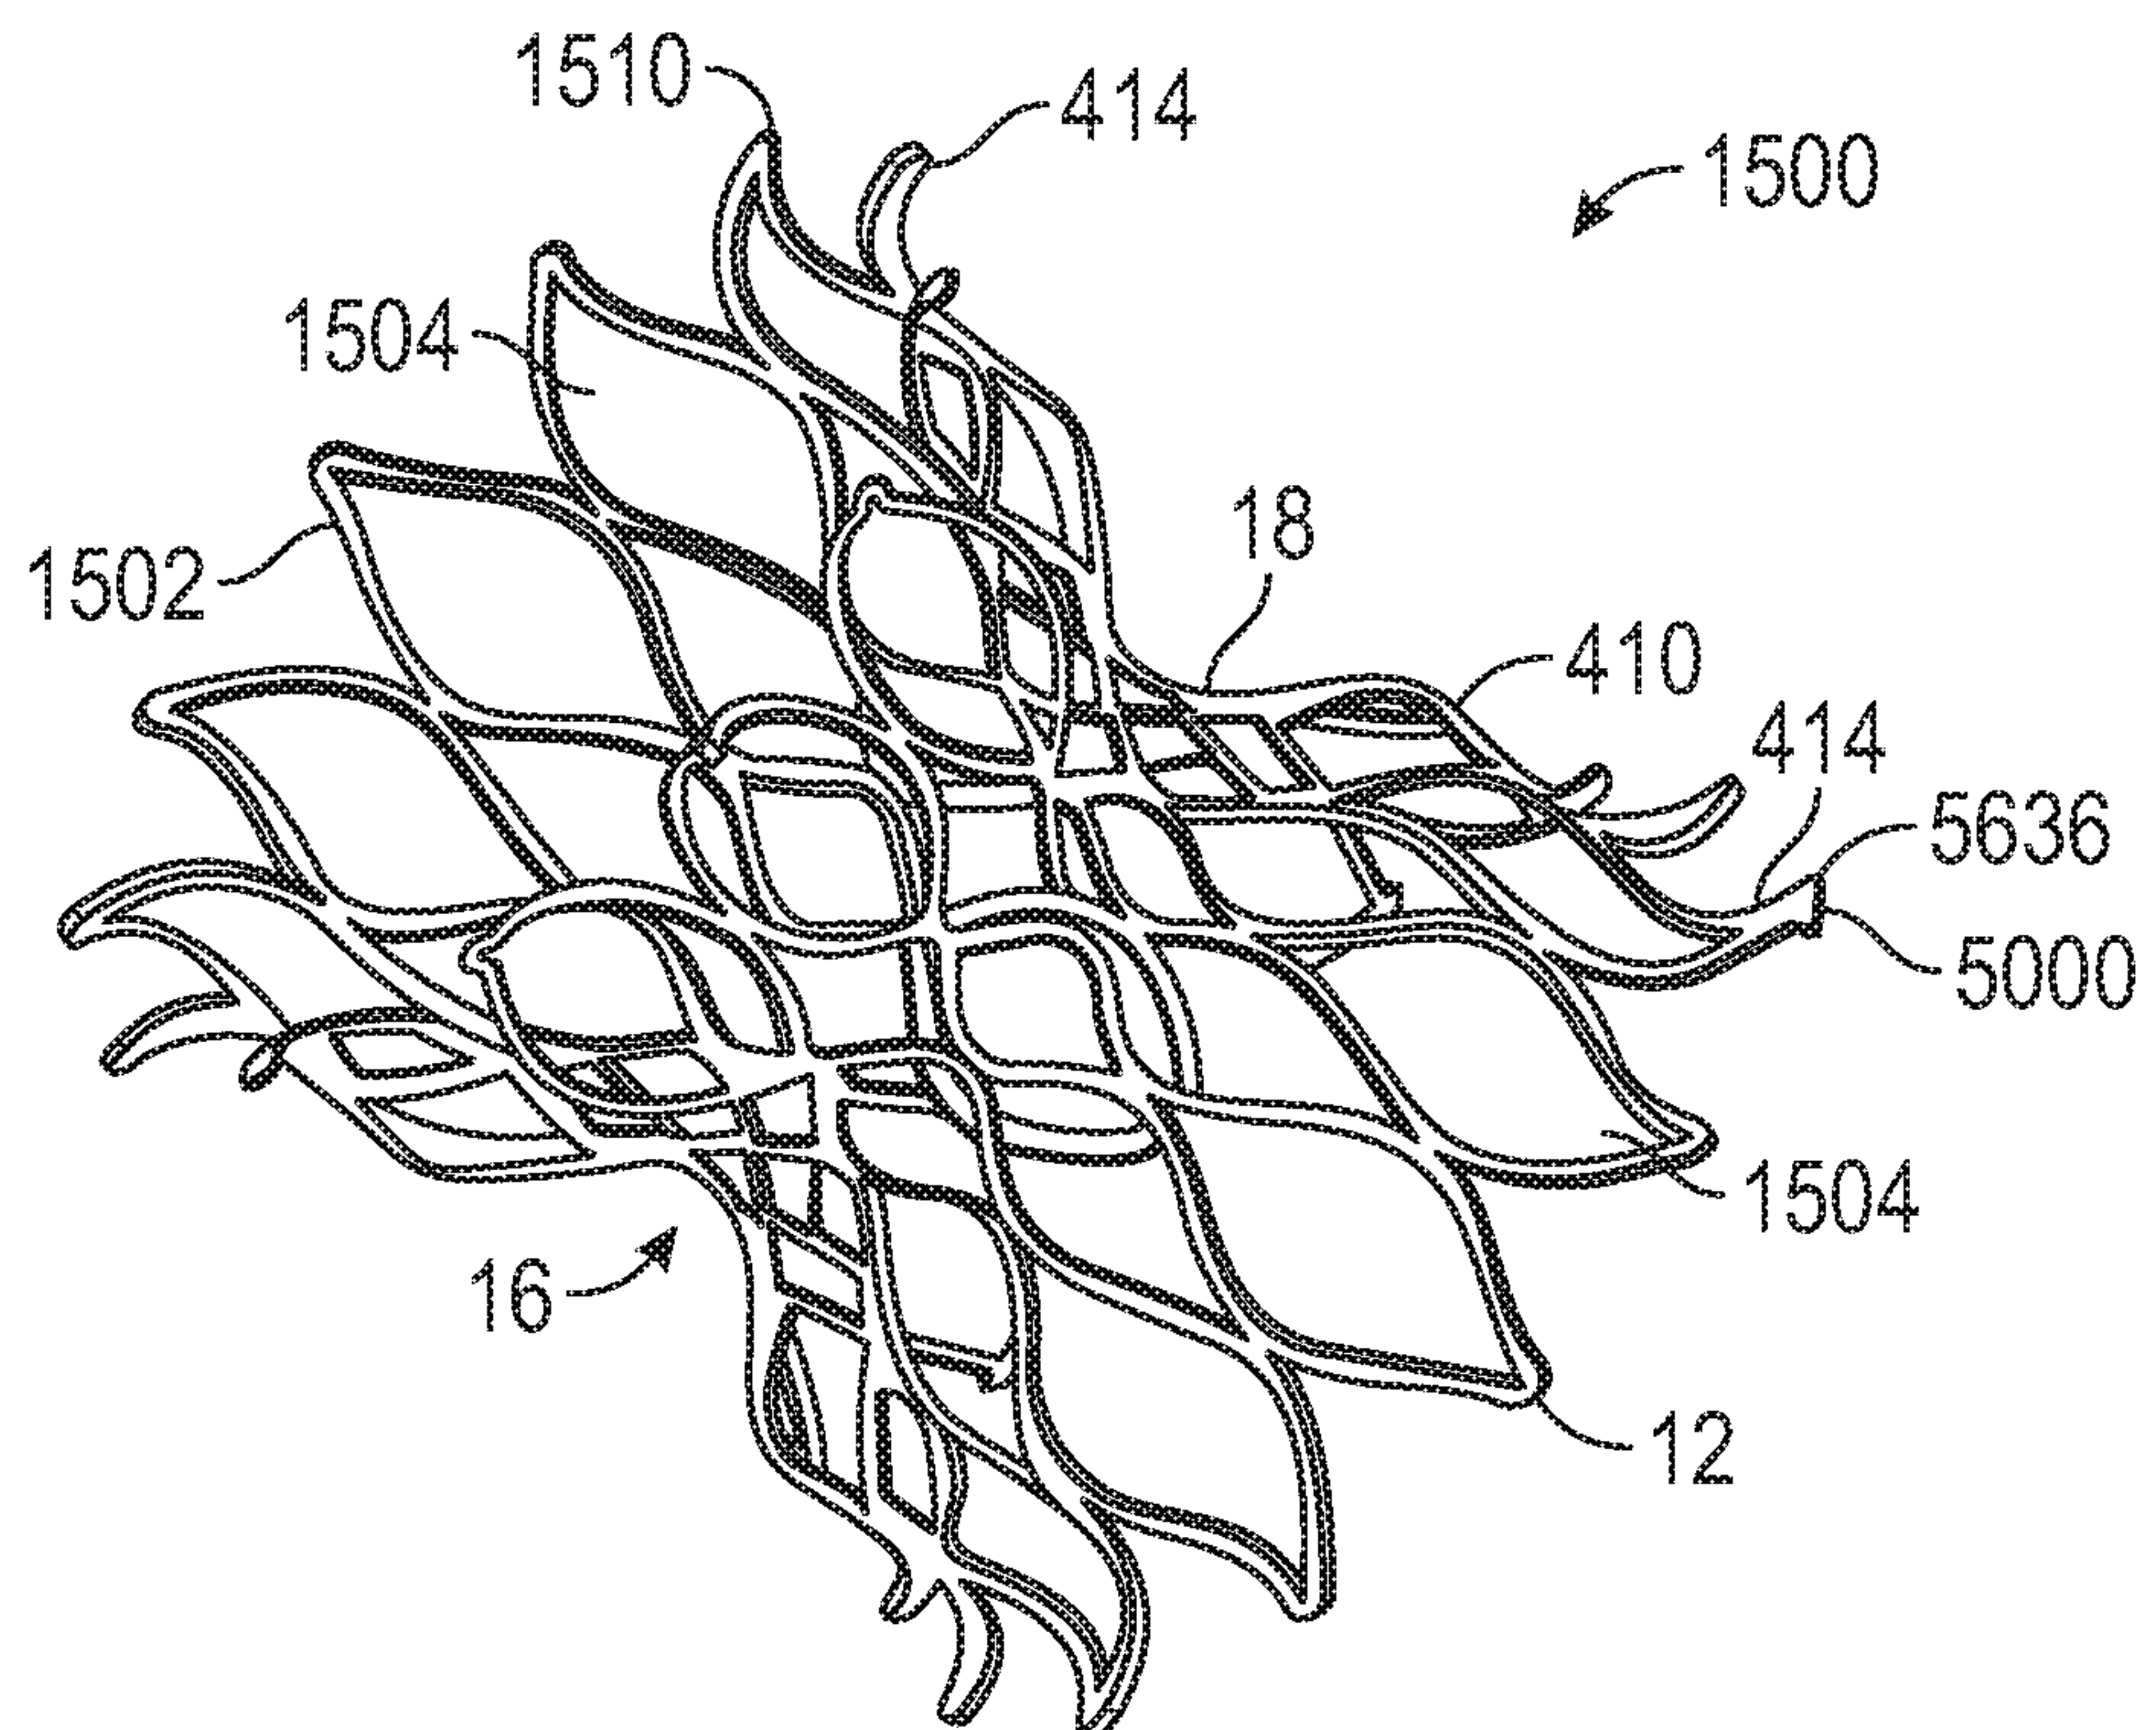


FIG. 17B

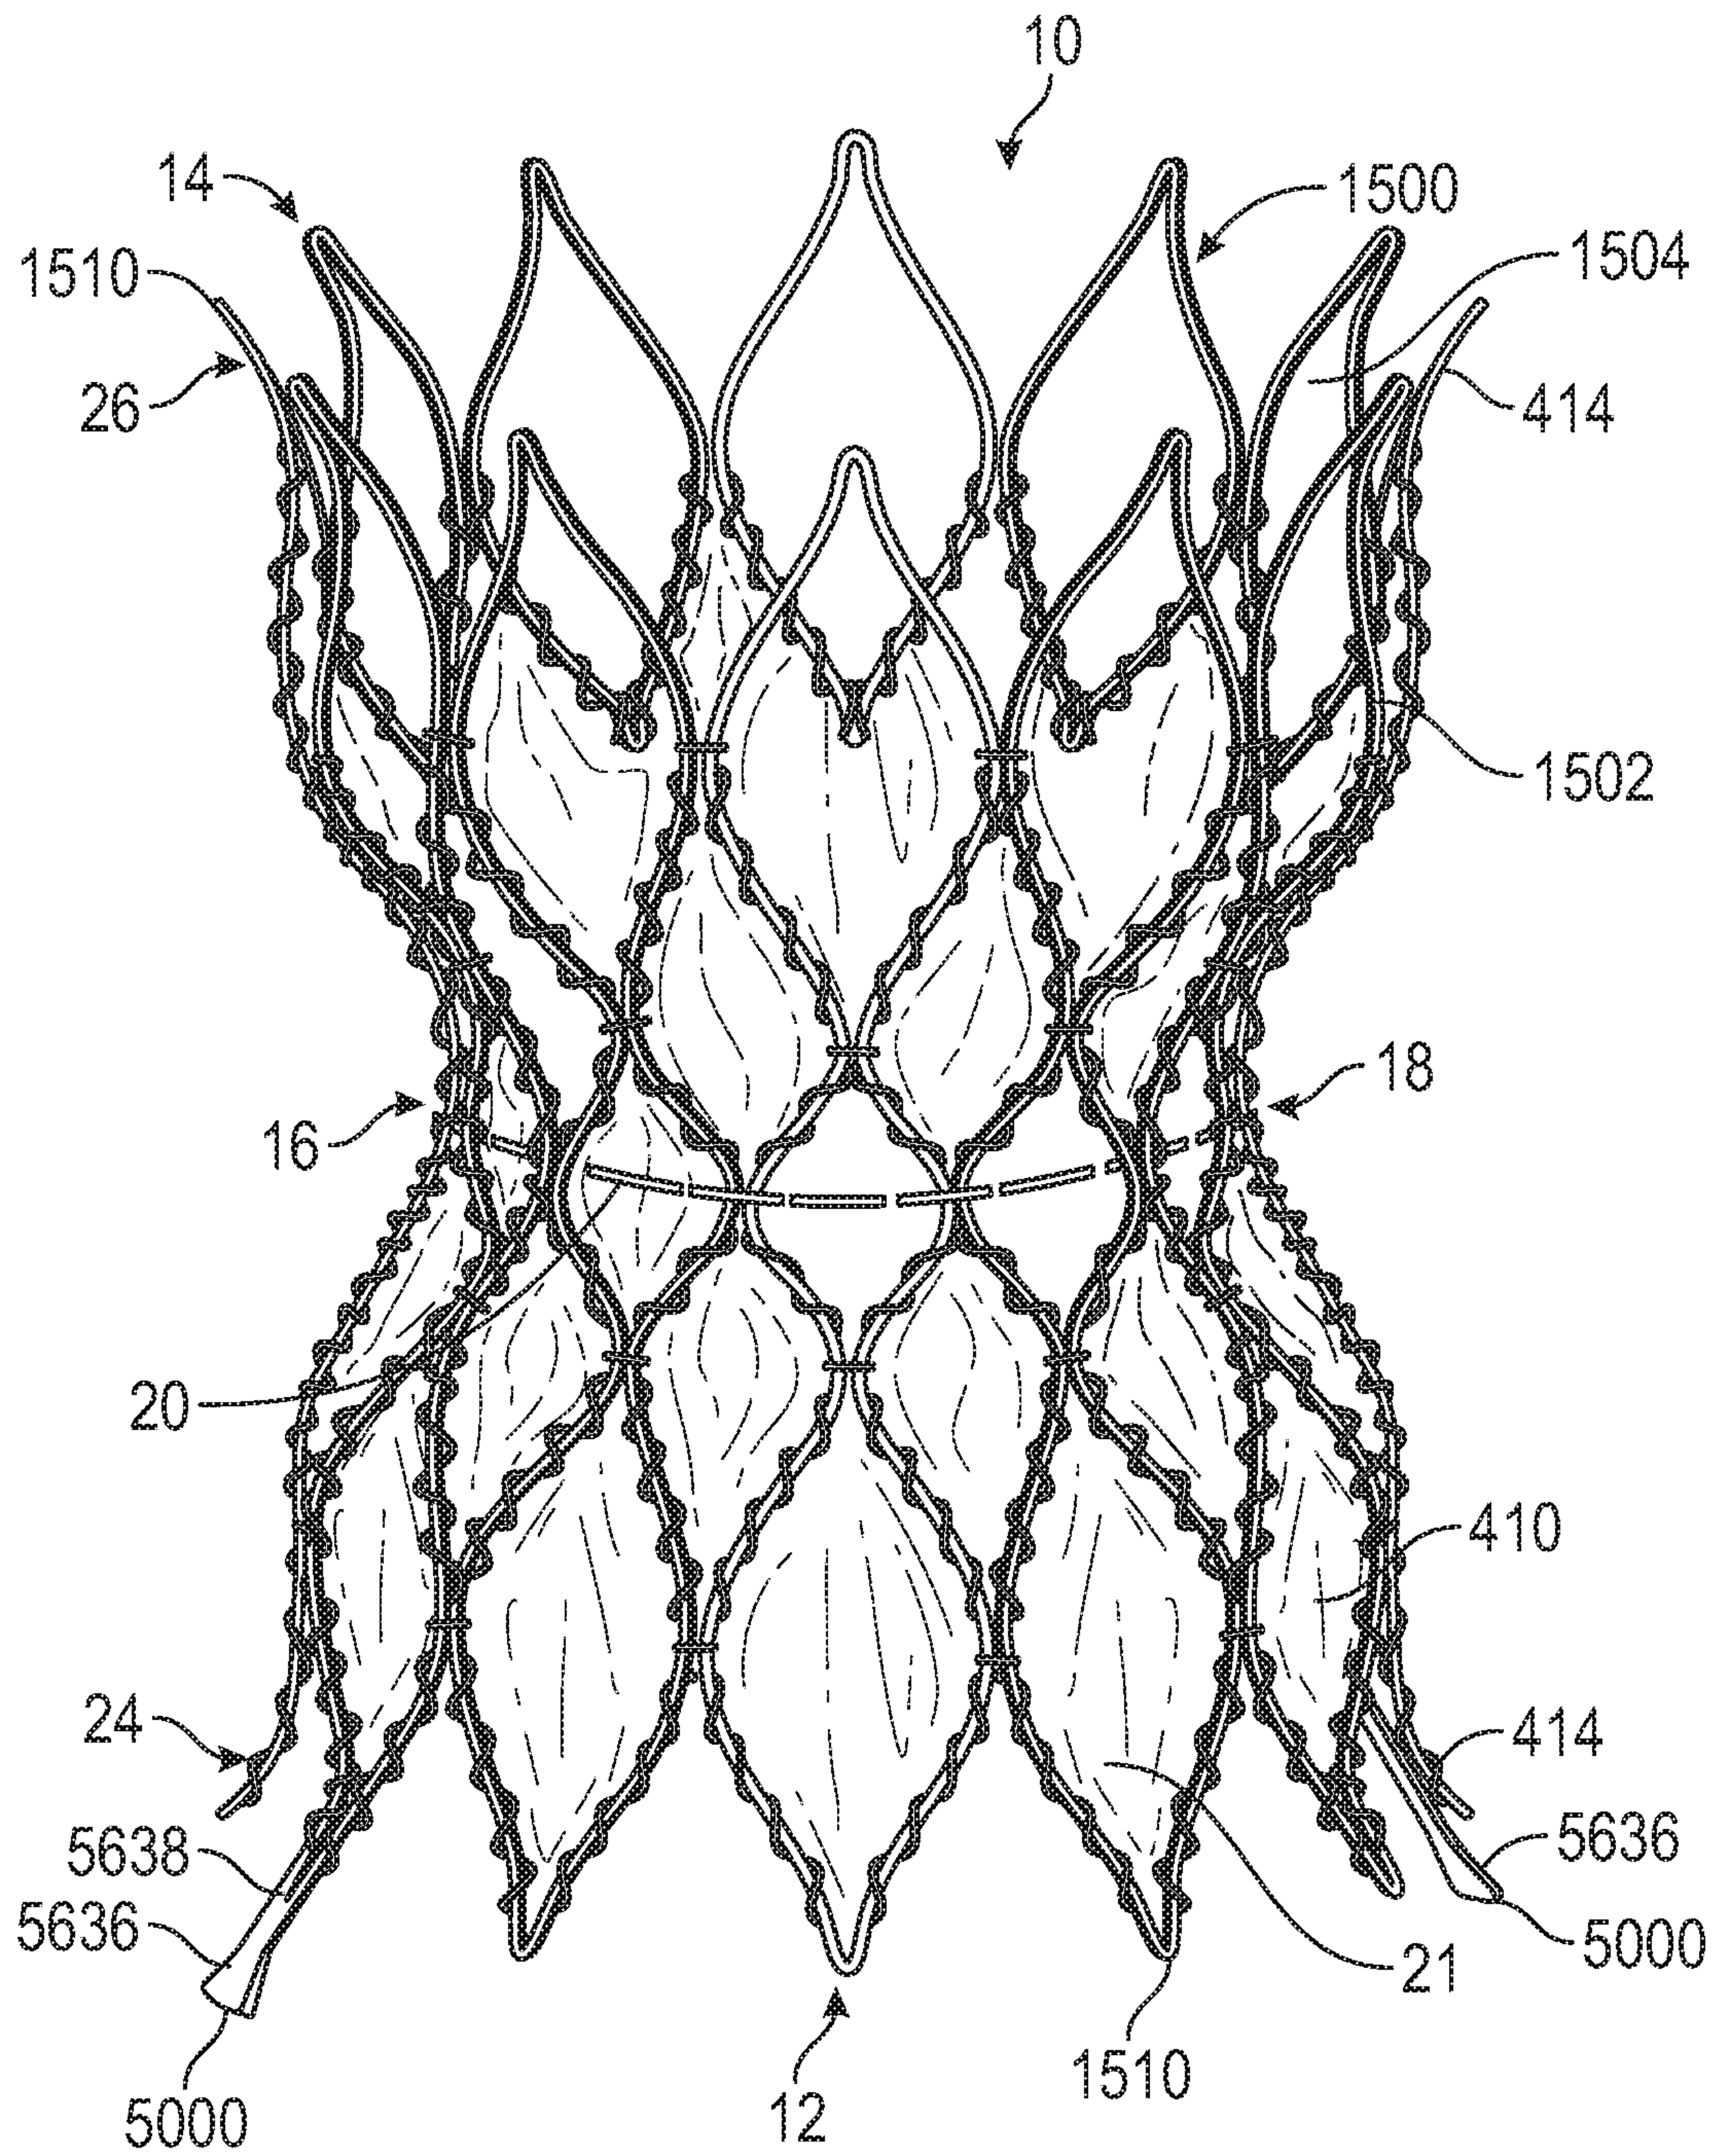


FIG. 18

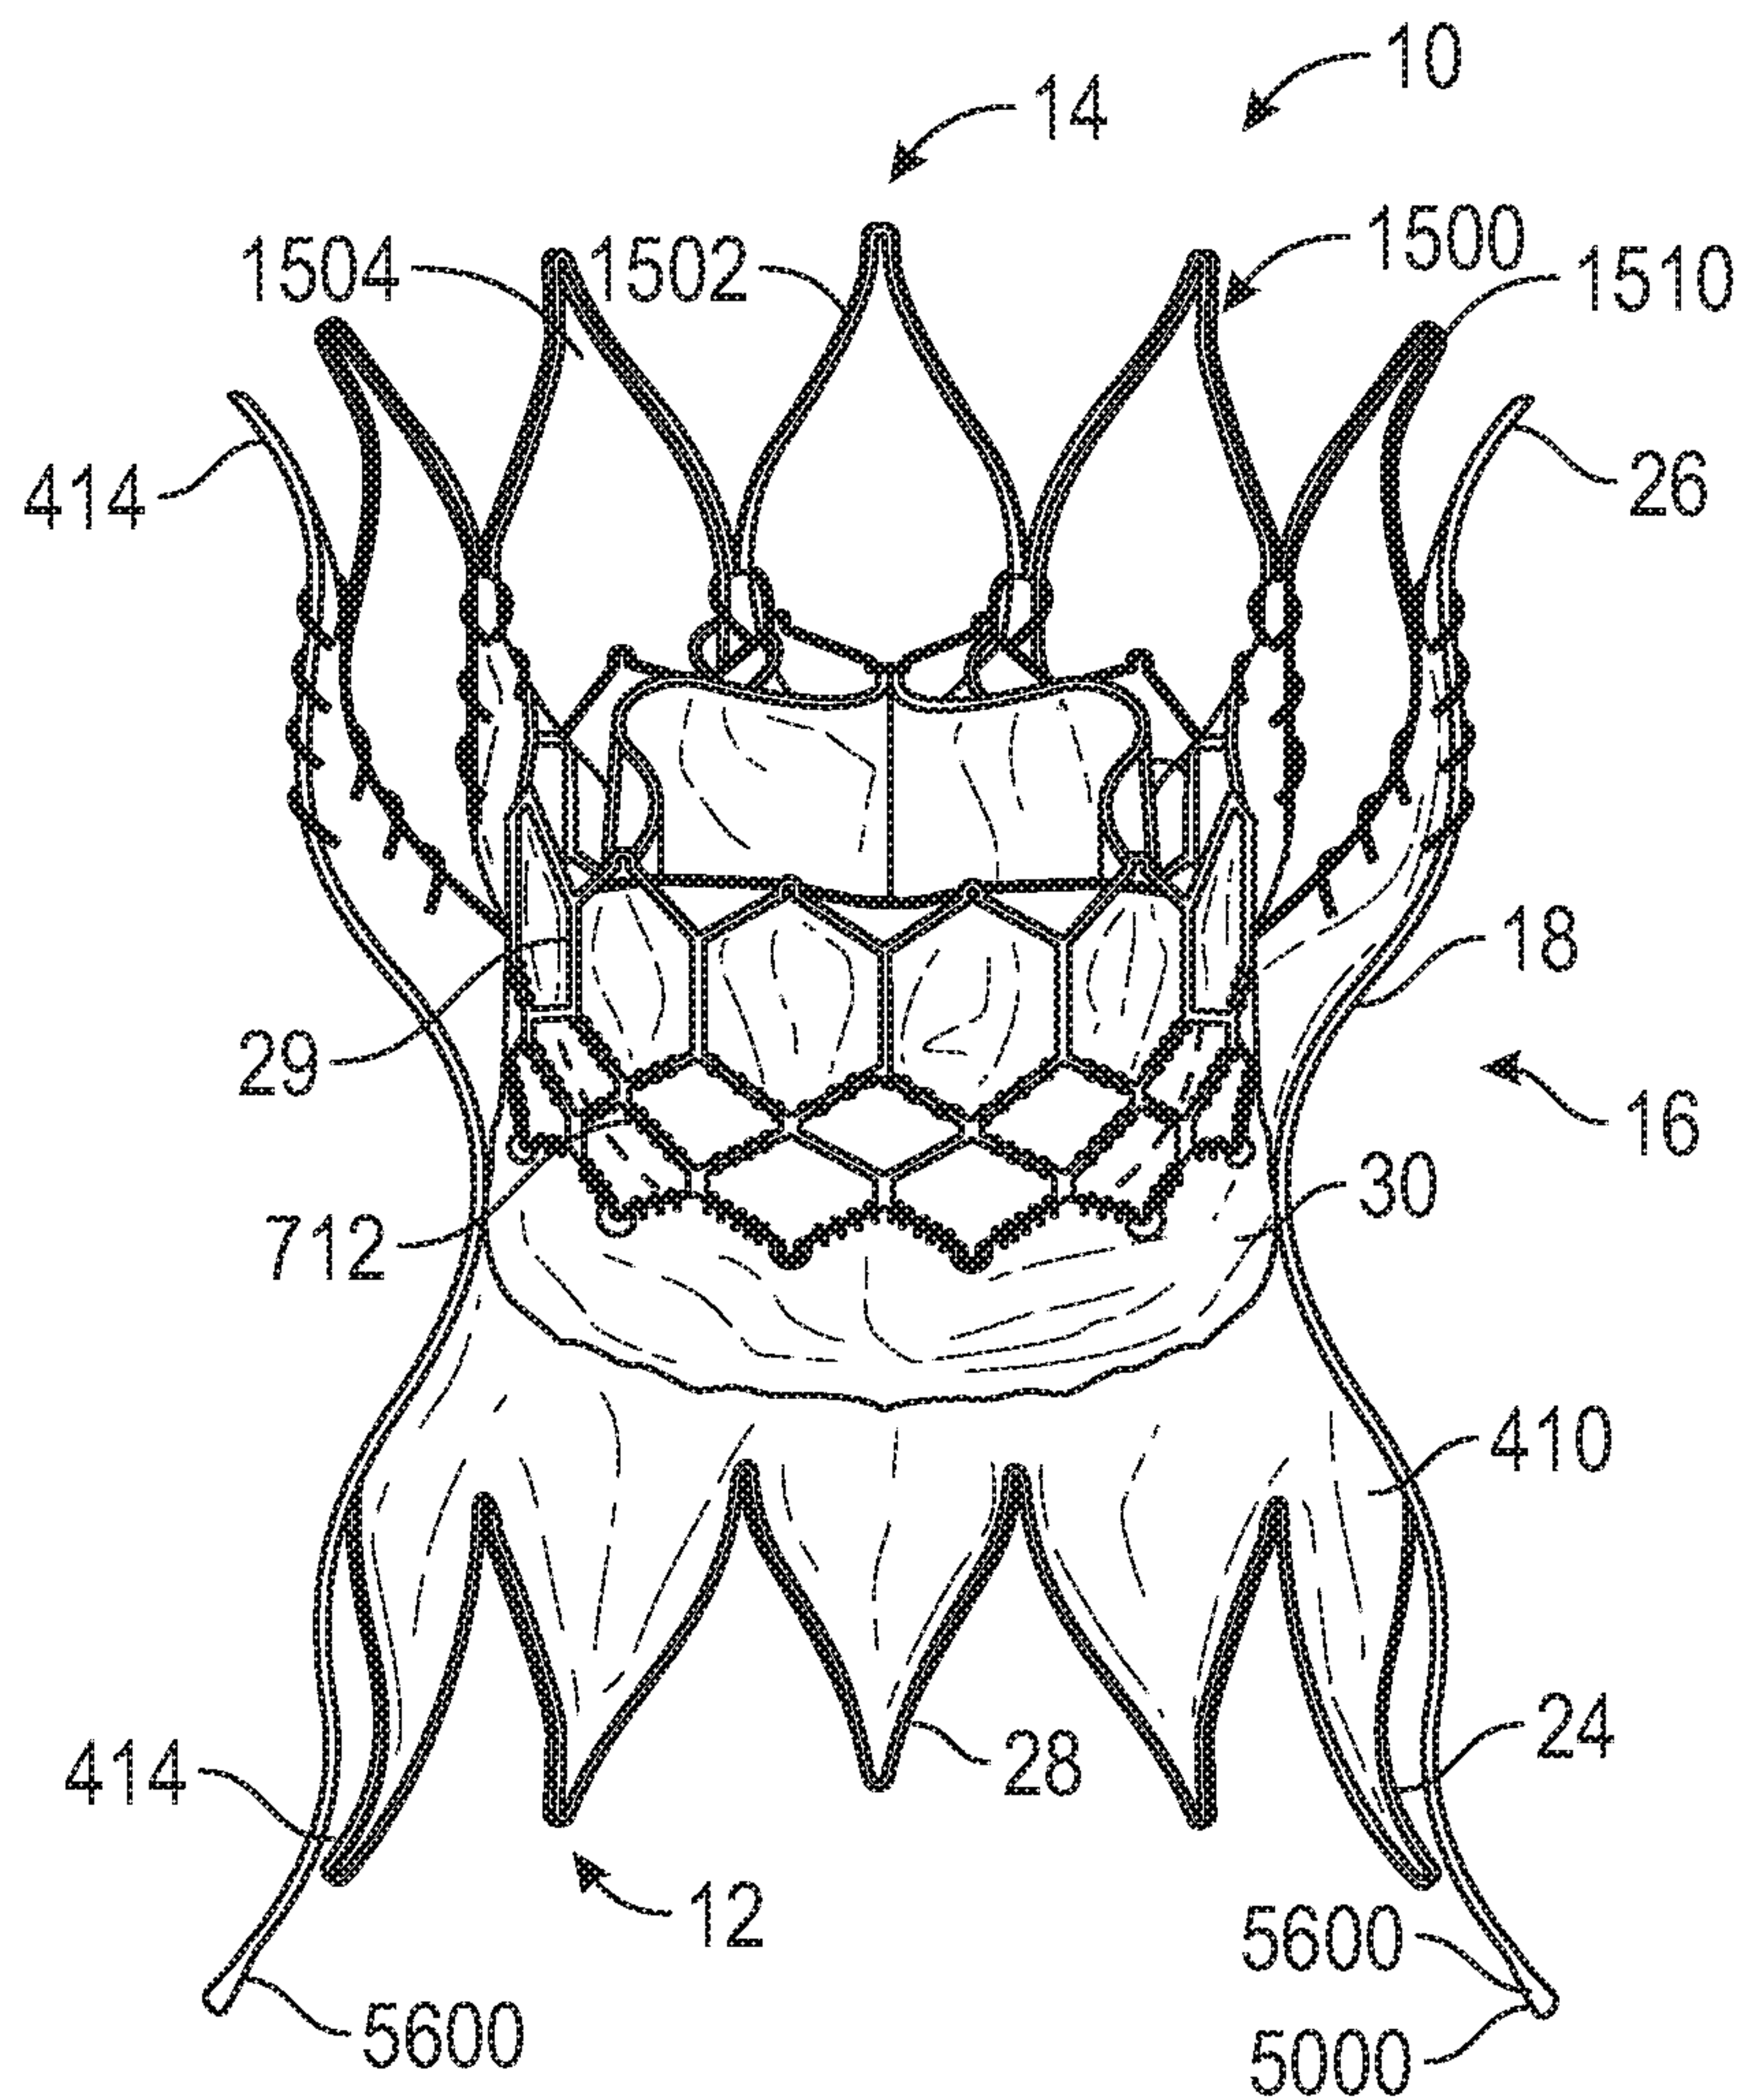


FIG. 19

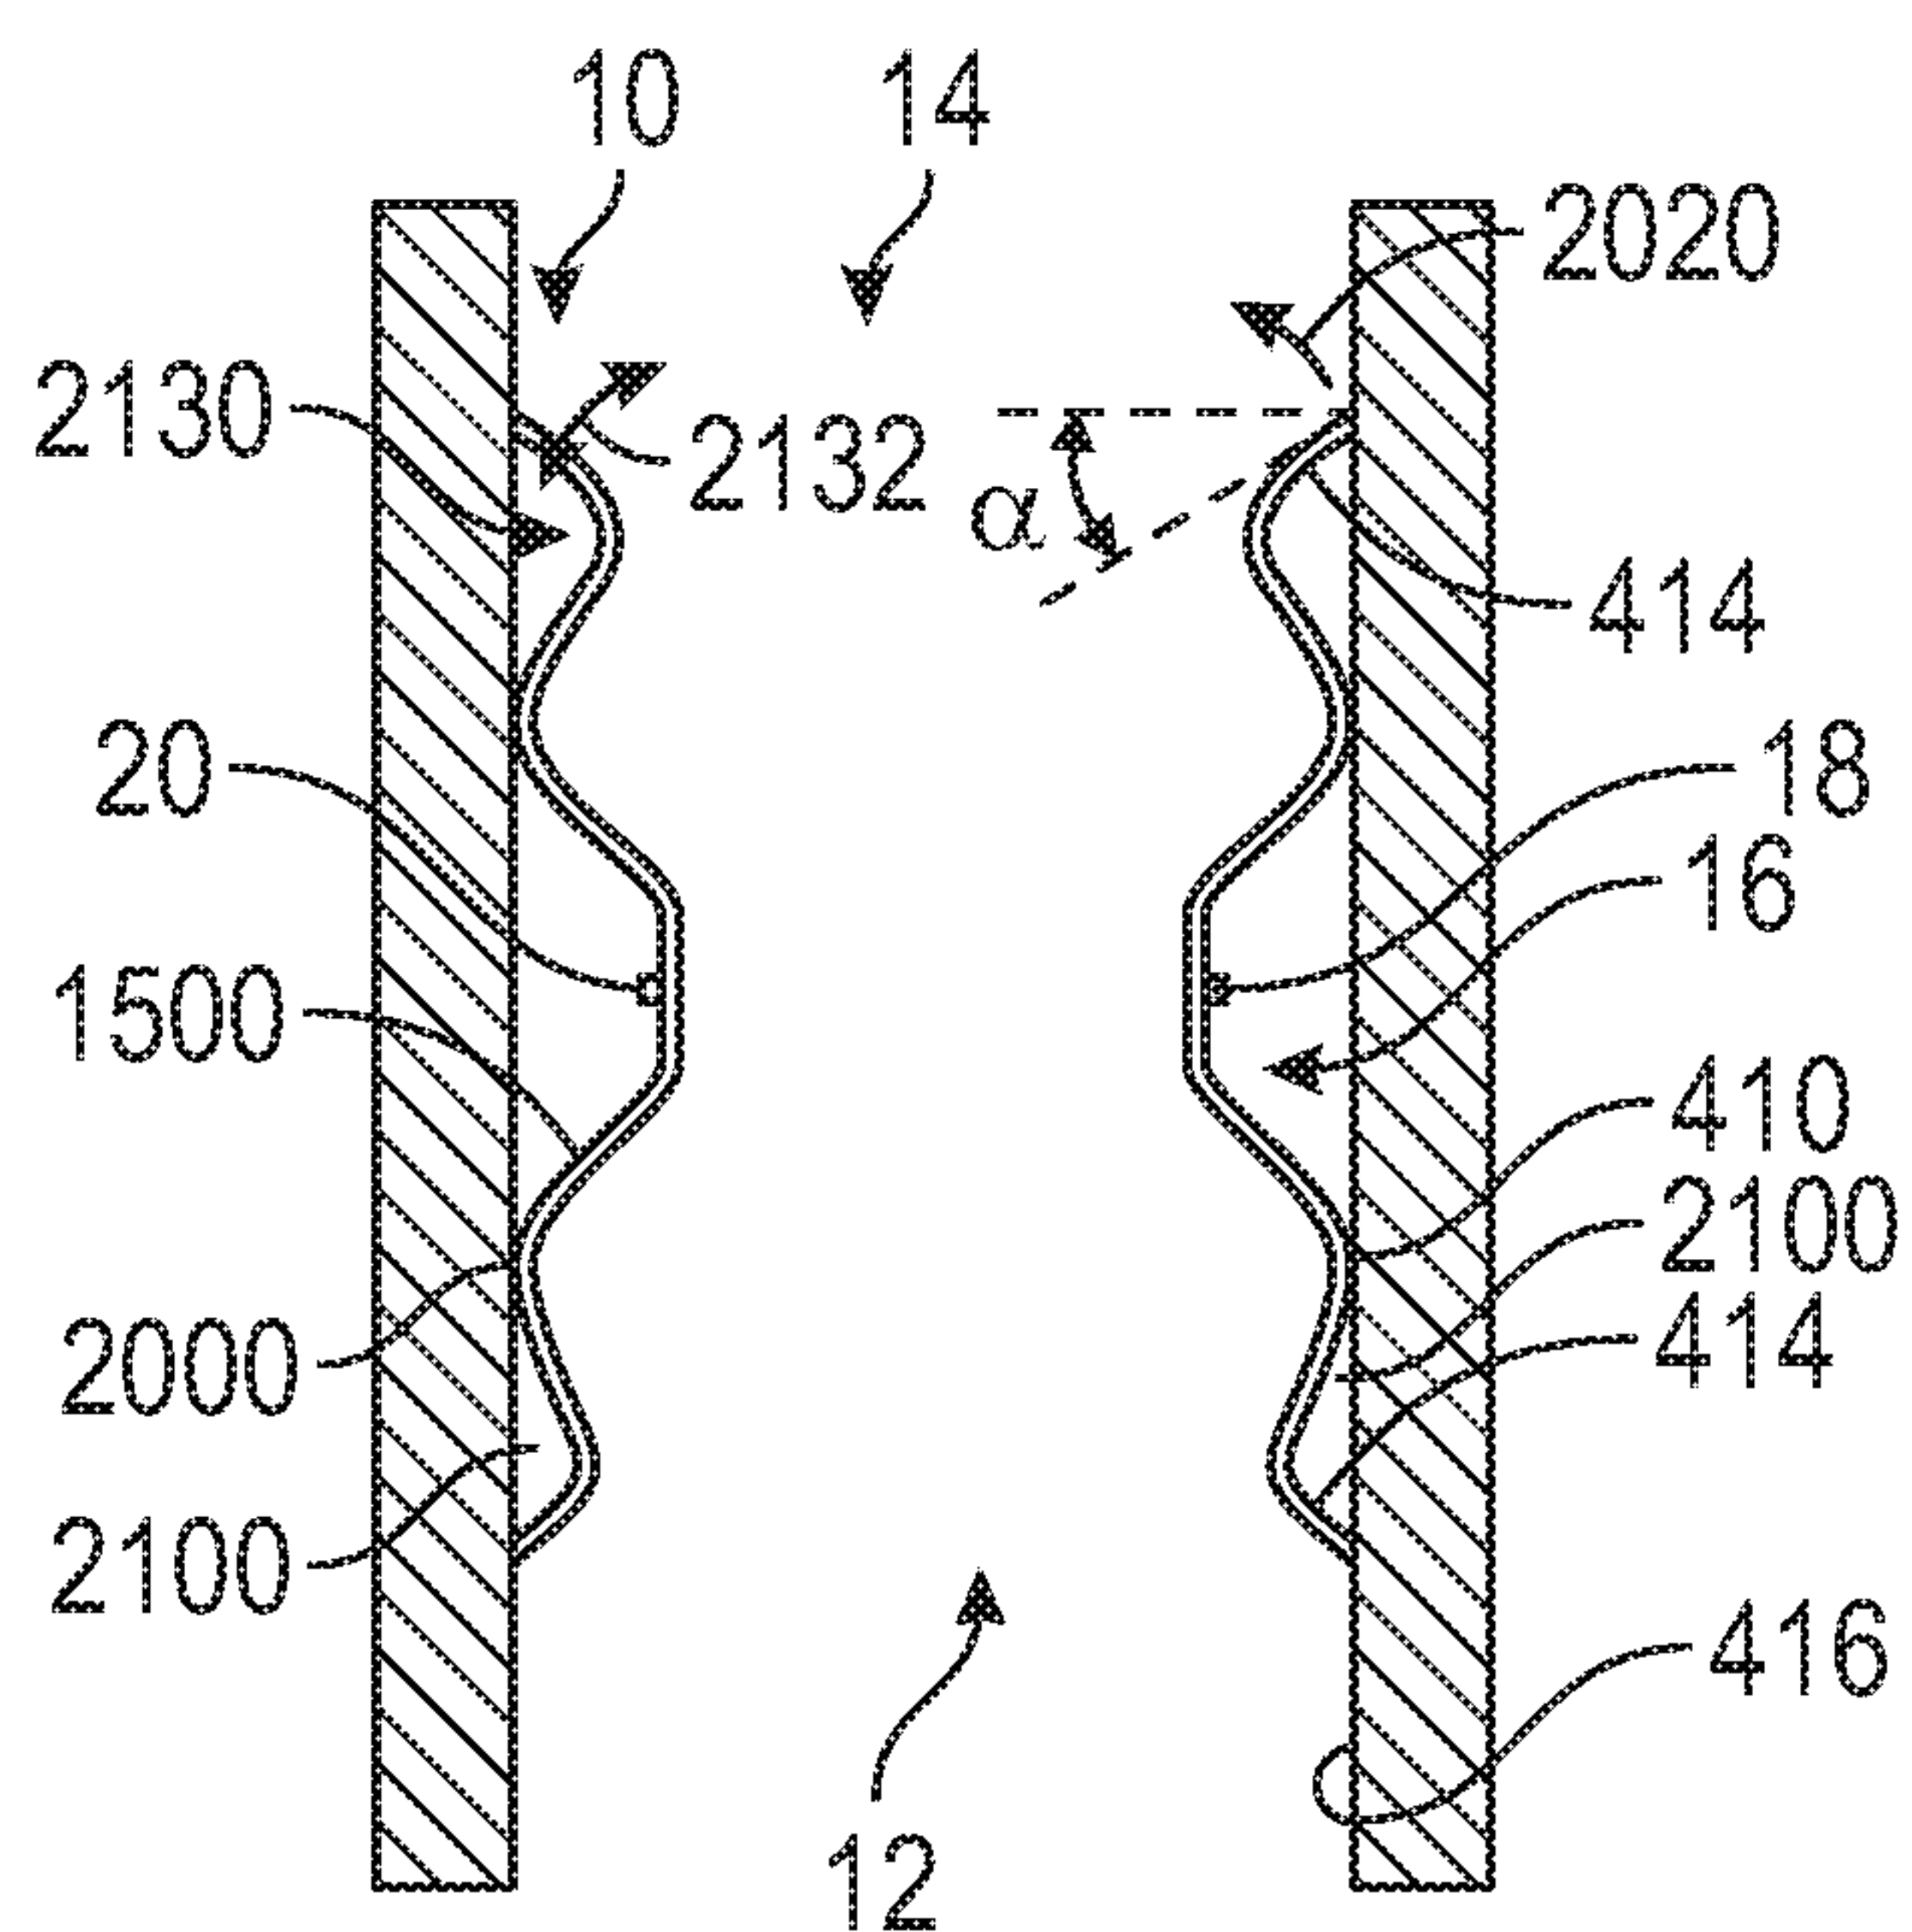


FIG. 20

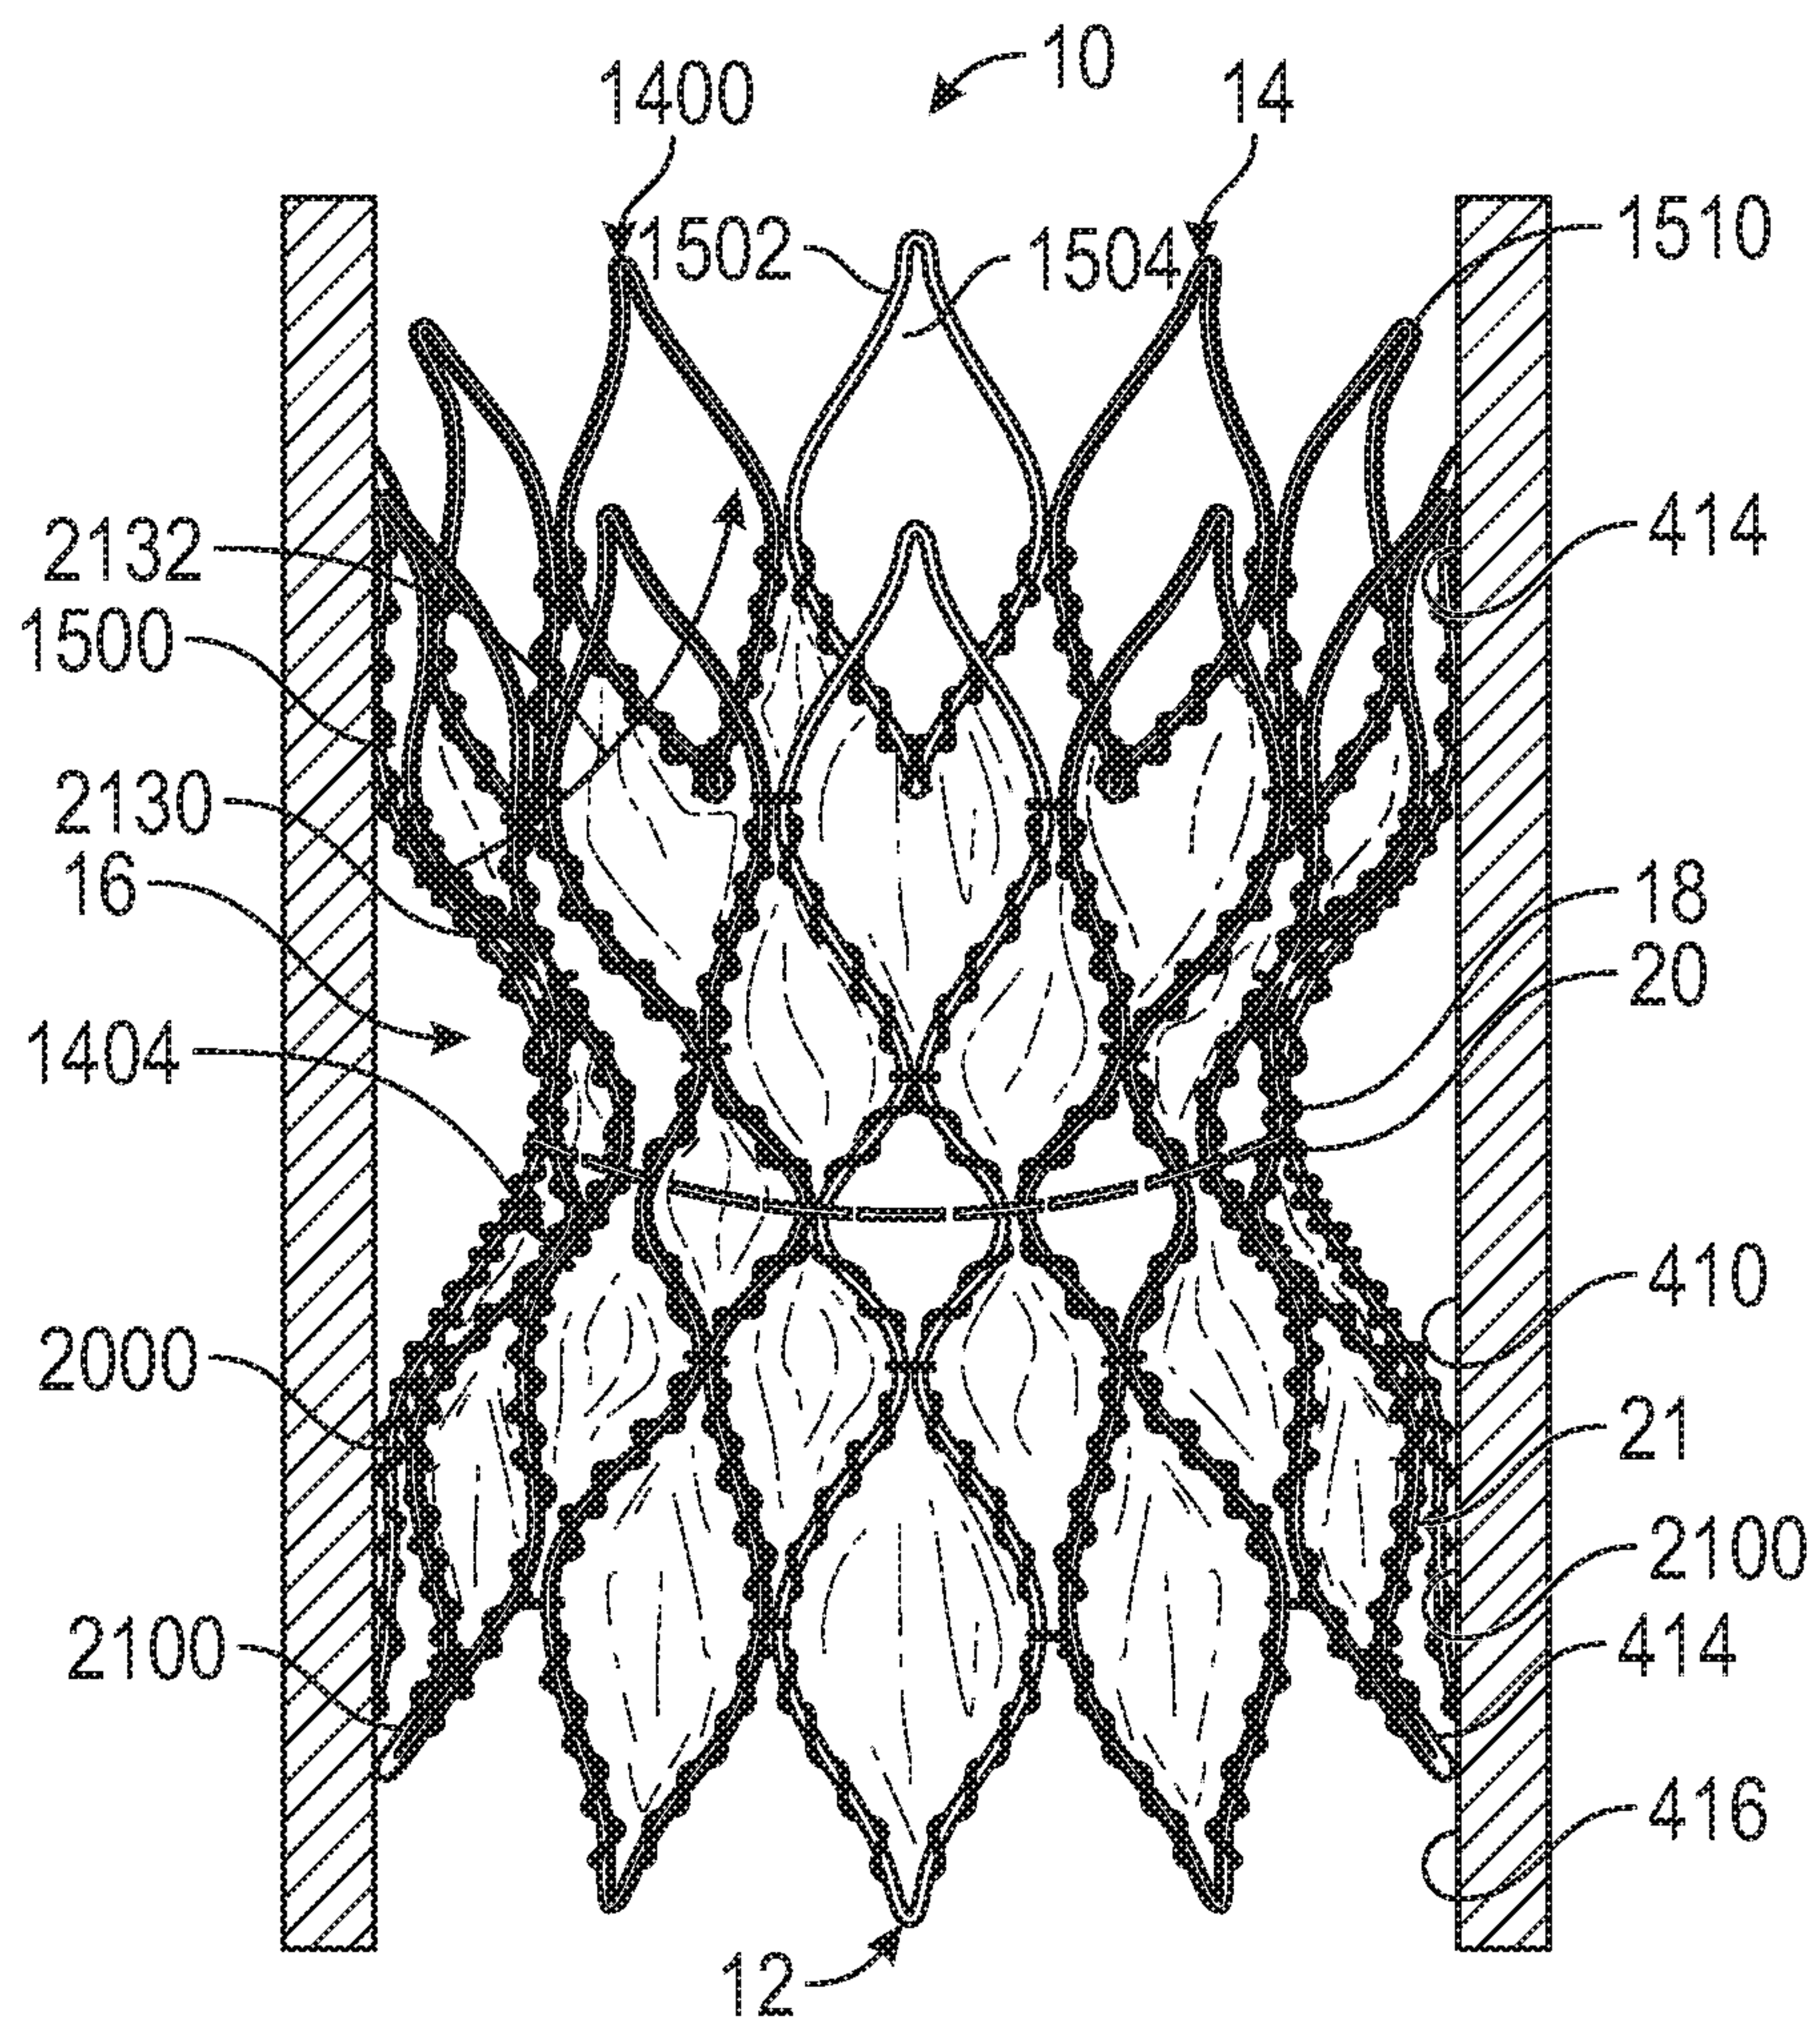


FIG. 21

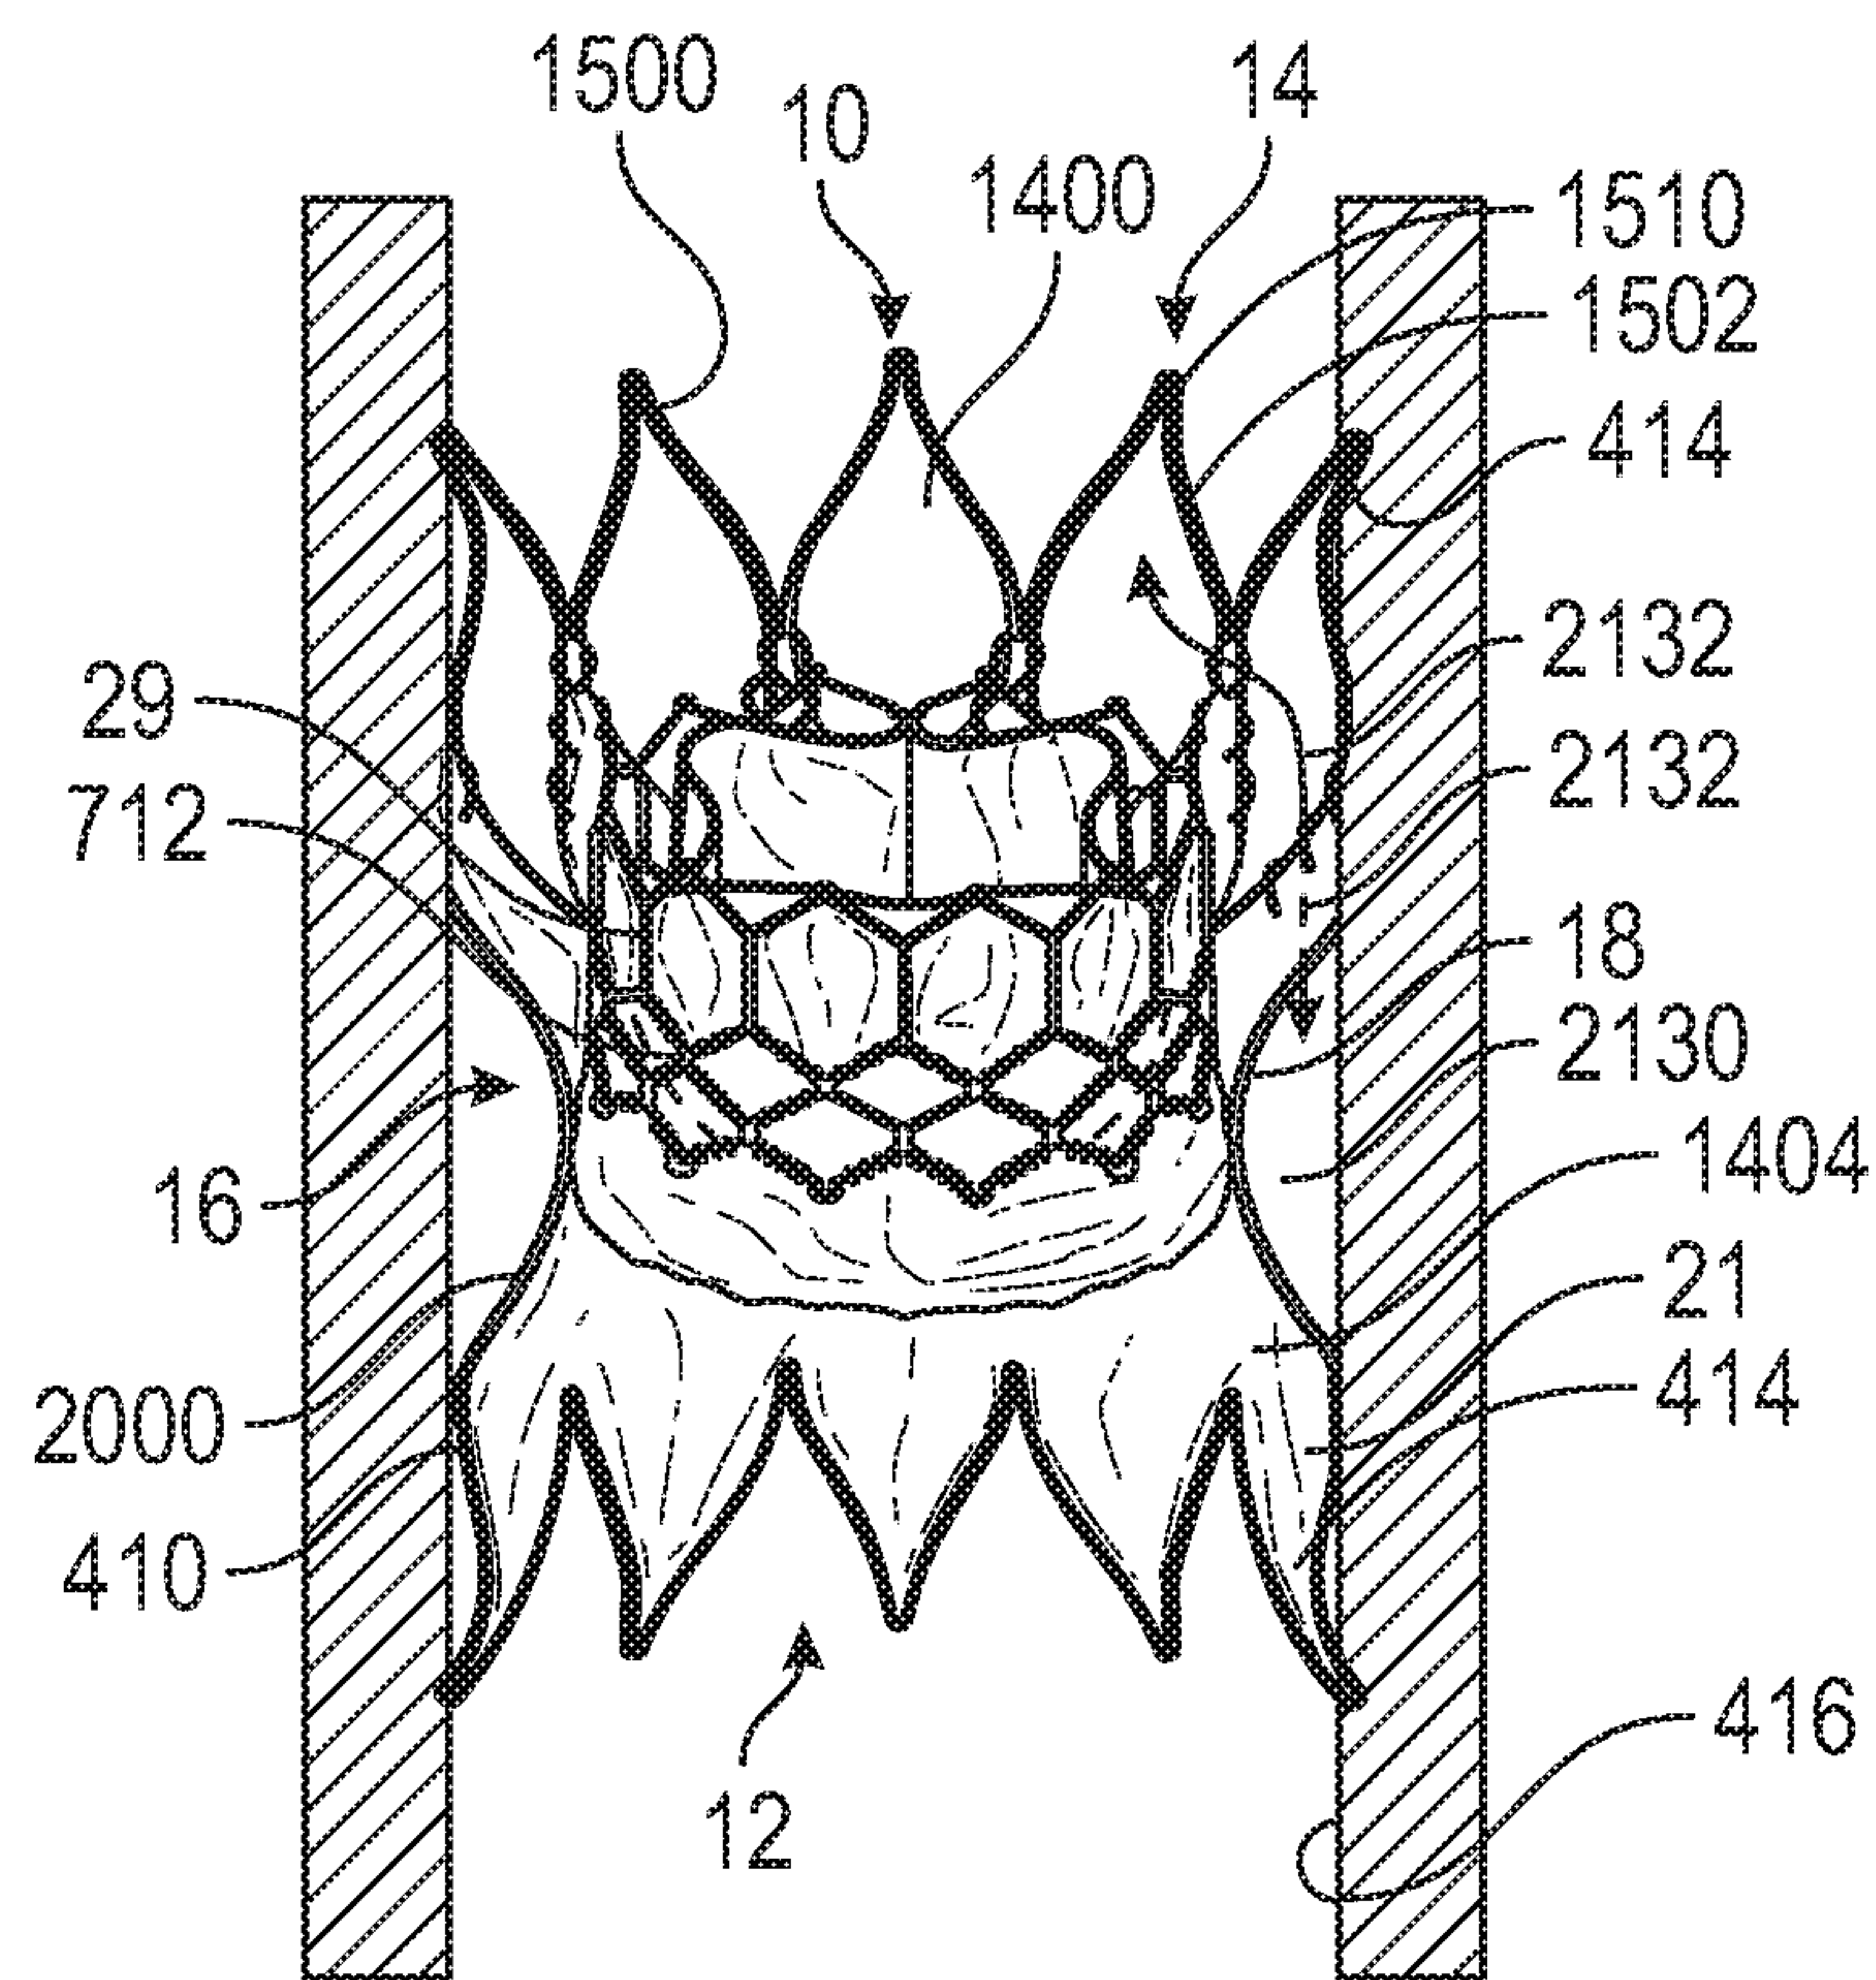


FIG. 22

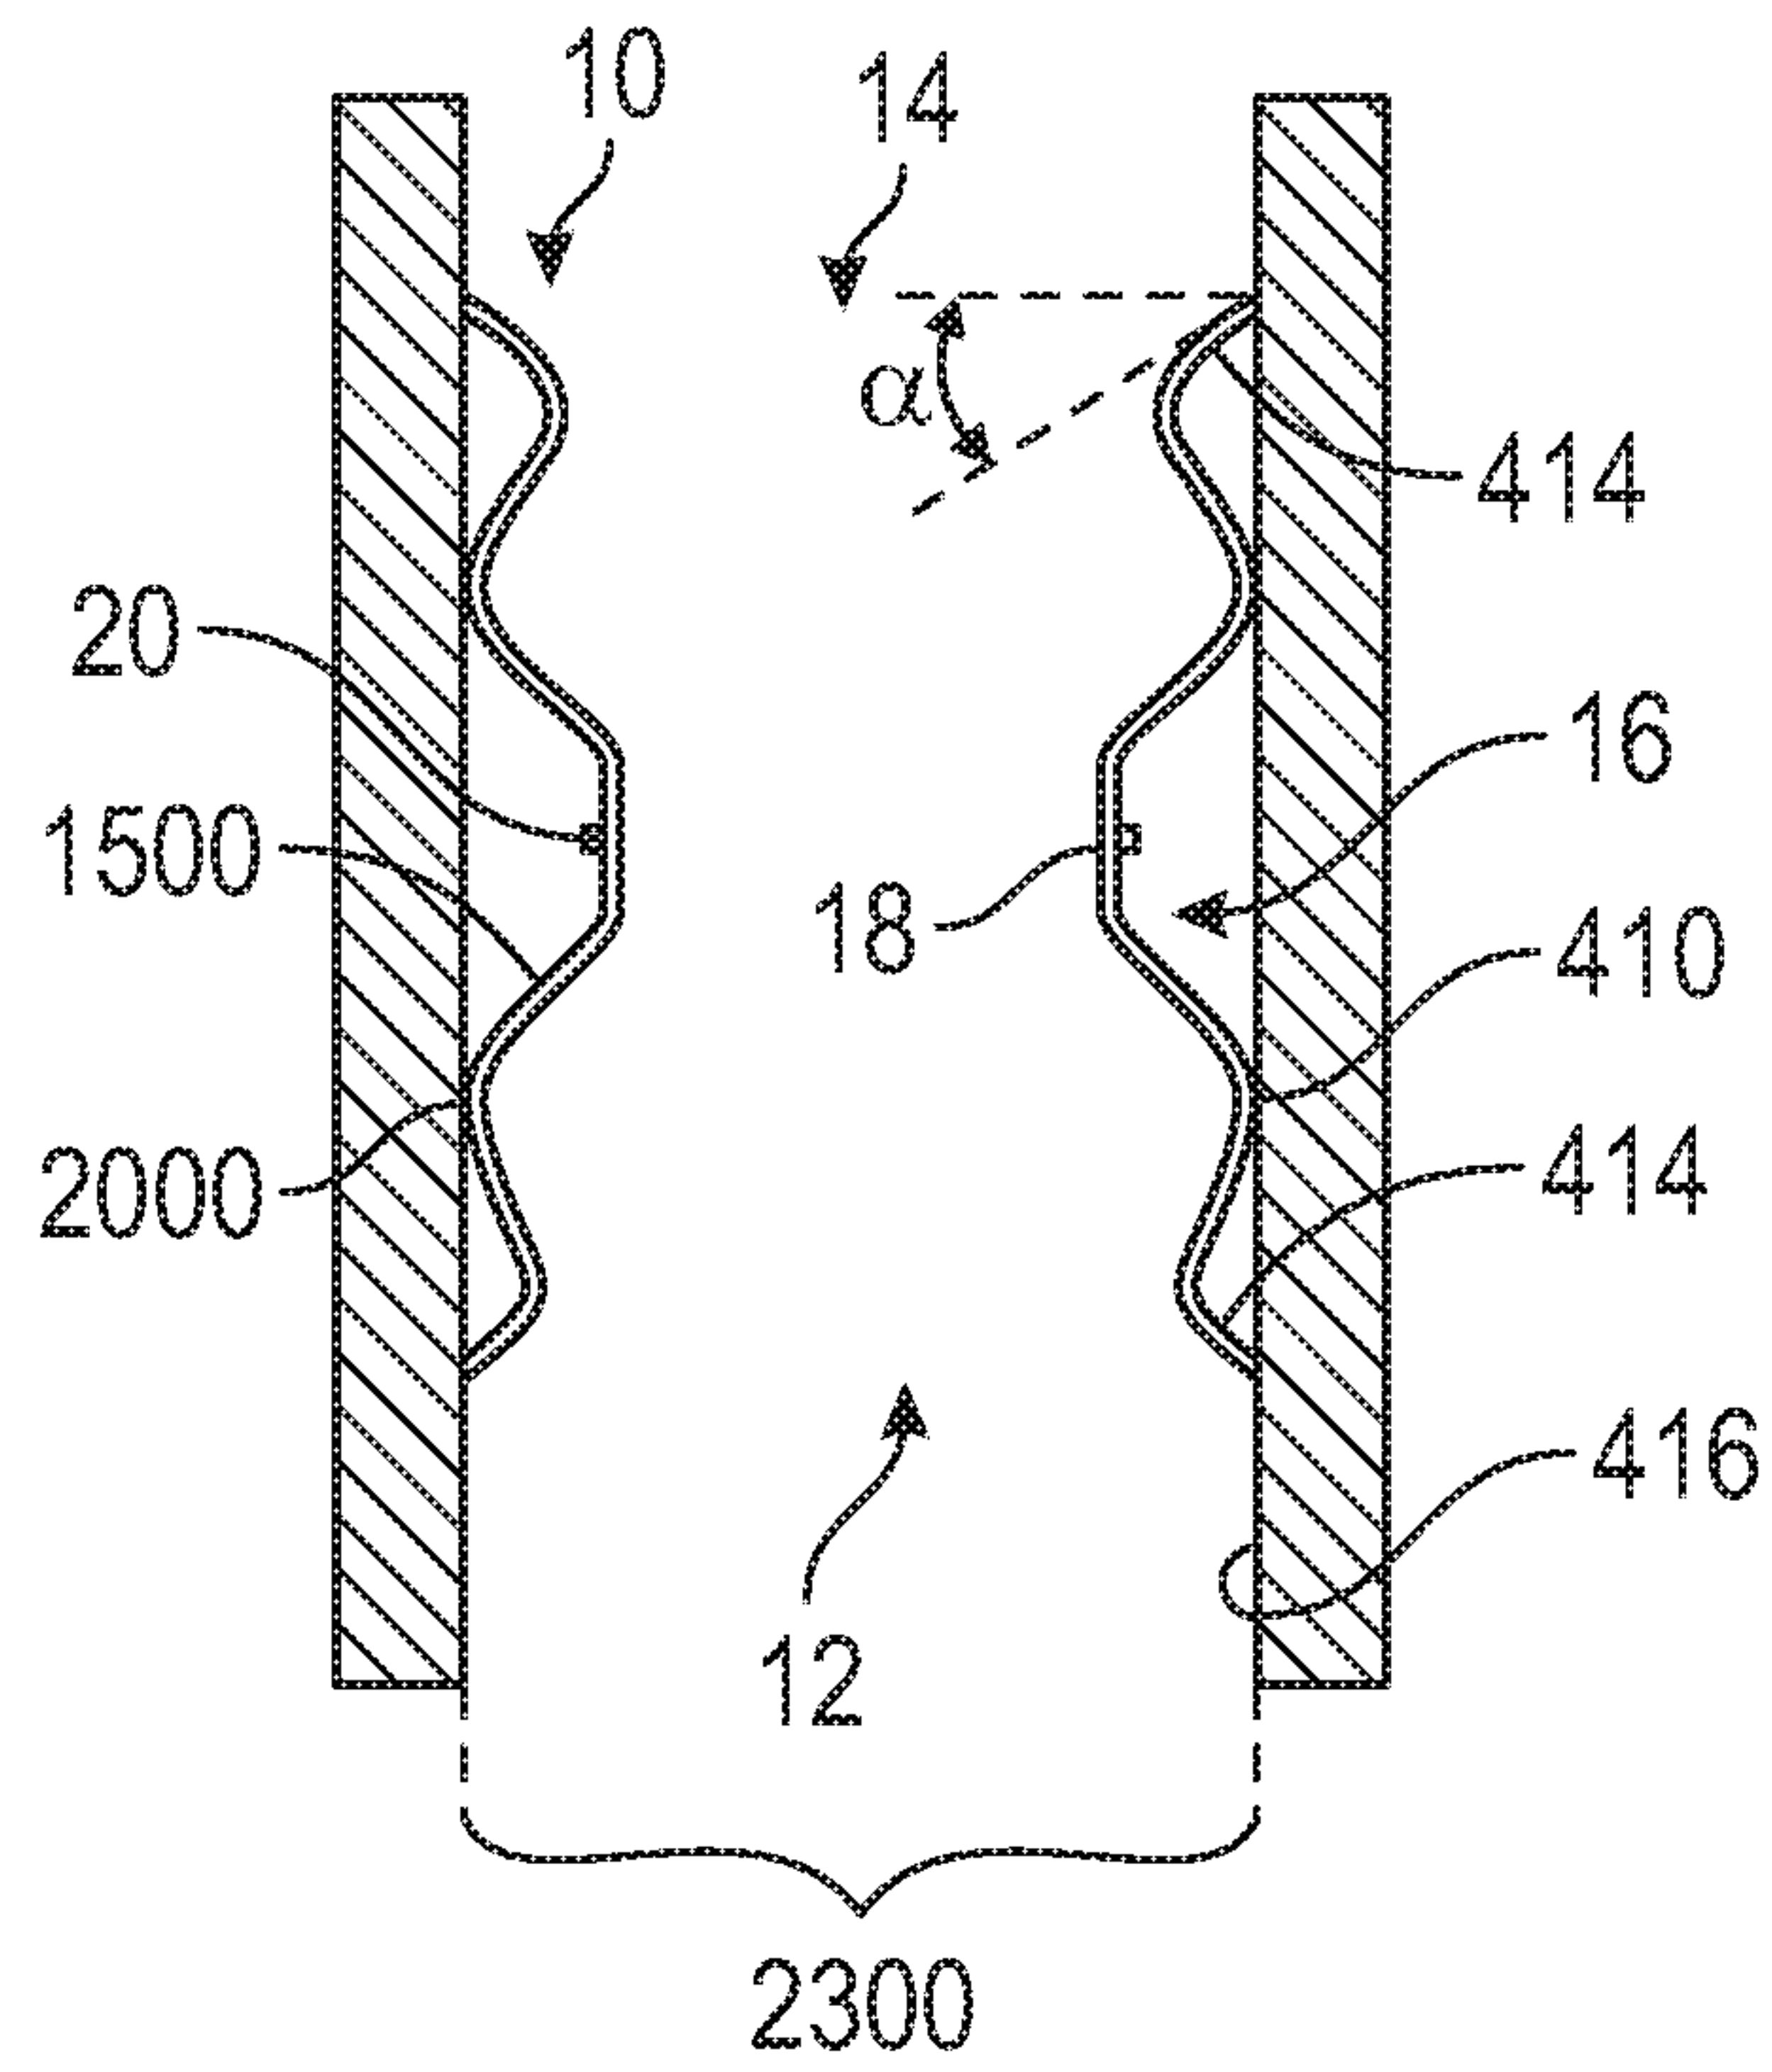


FIG. 23A

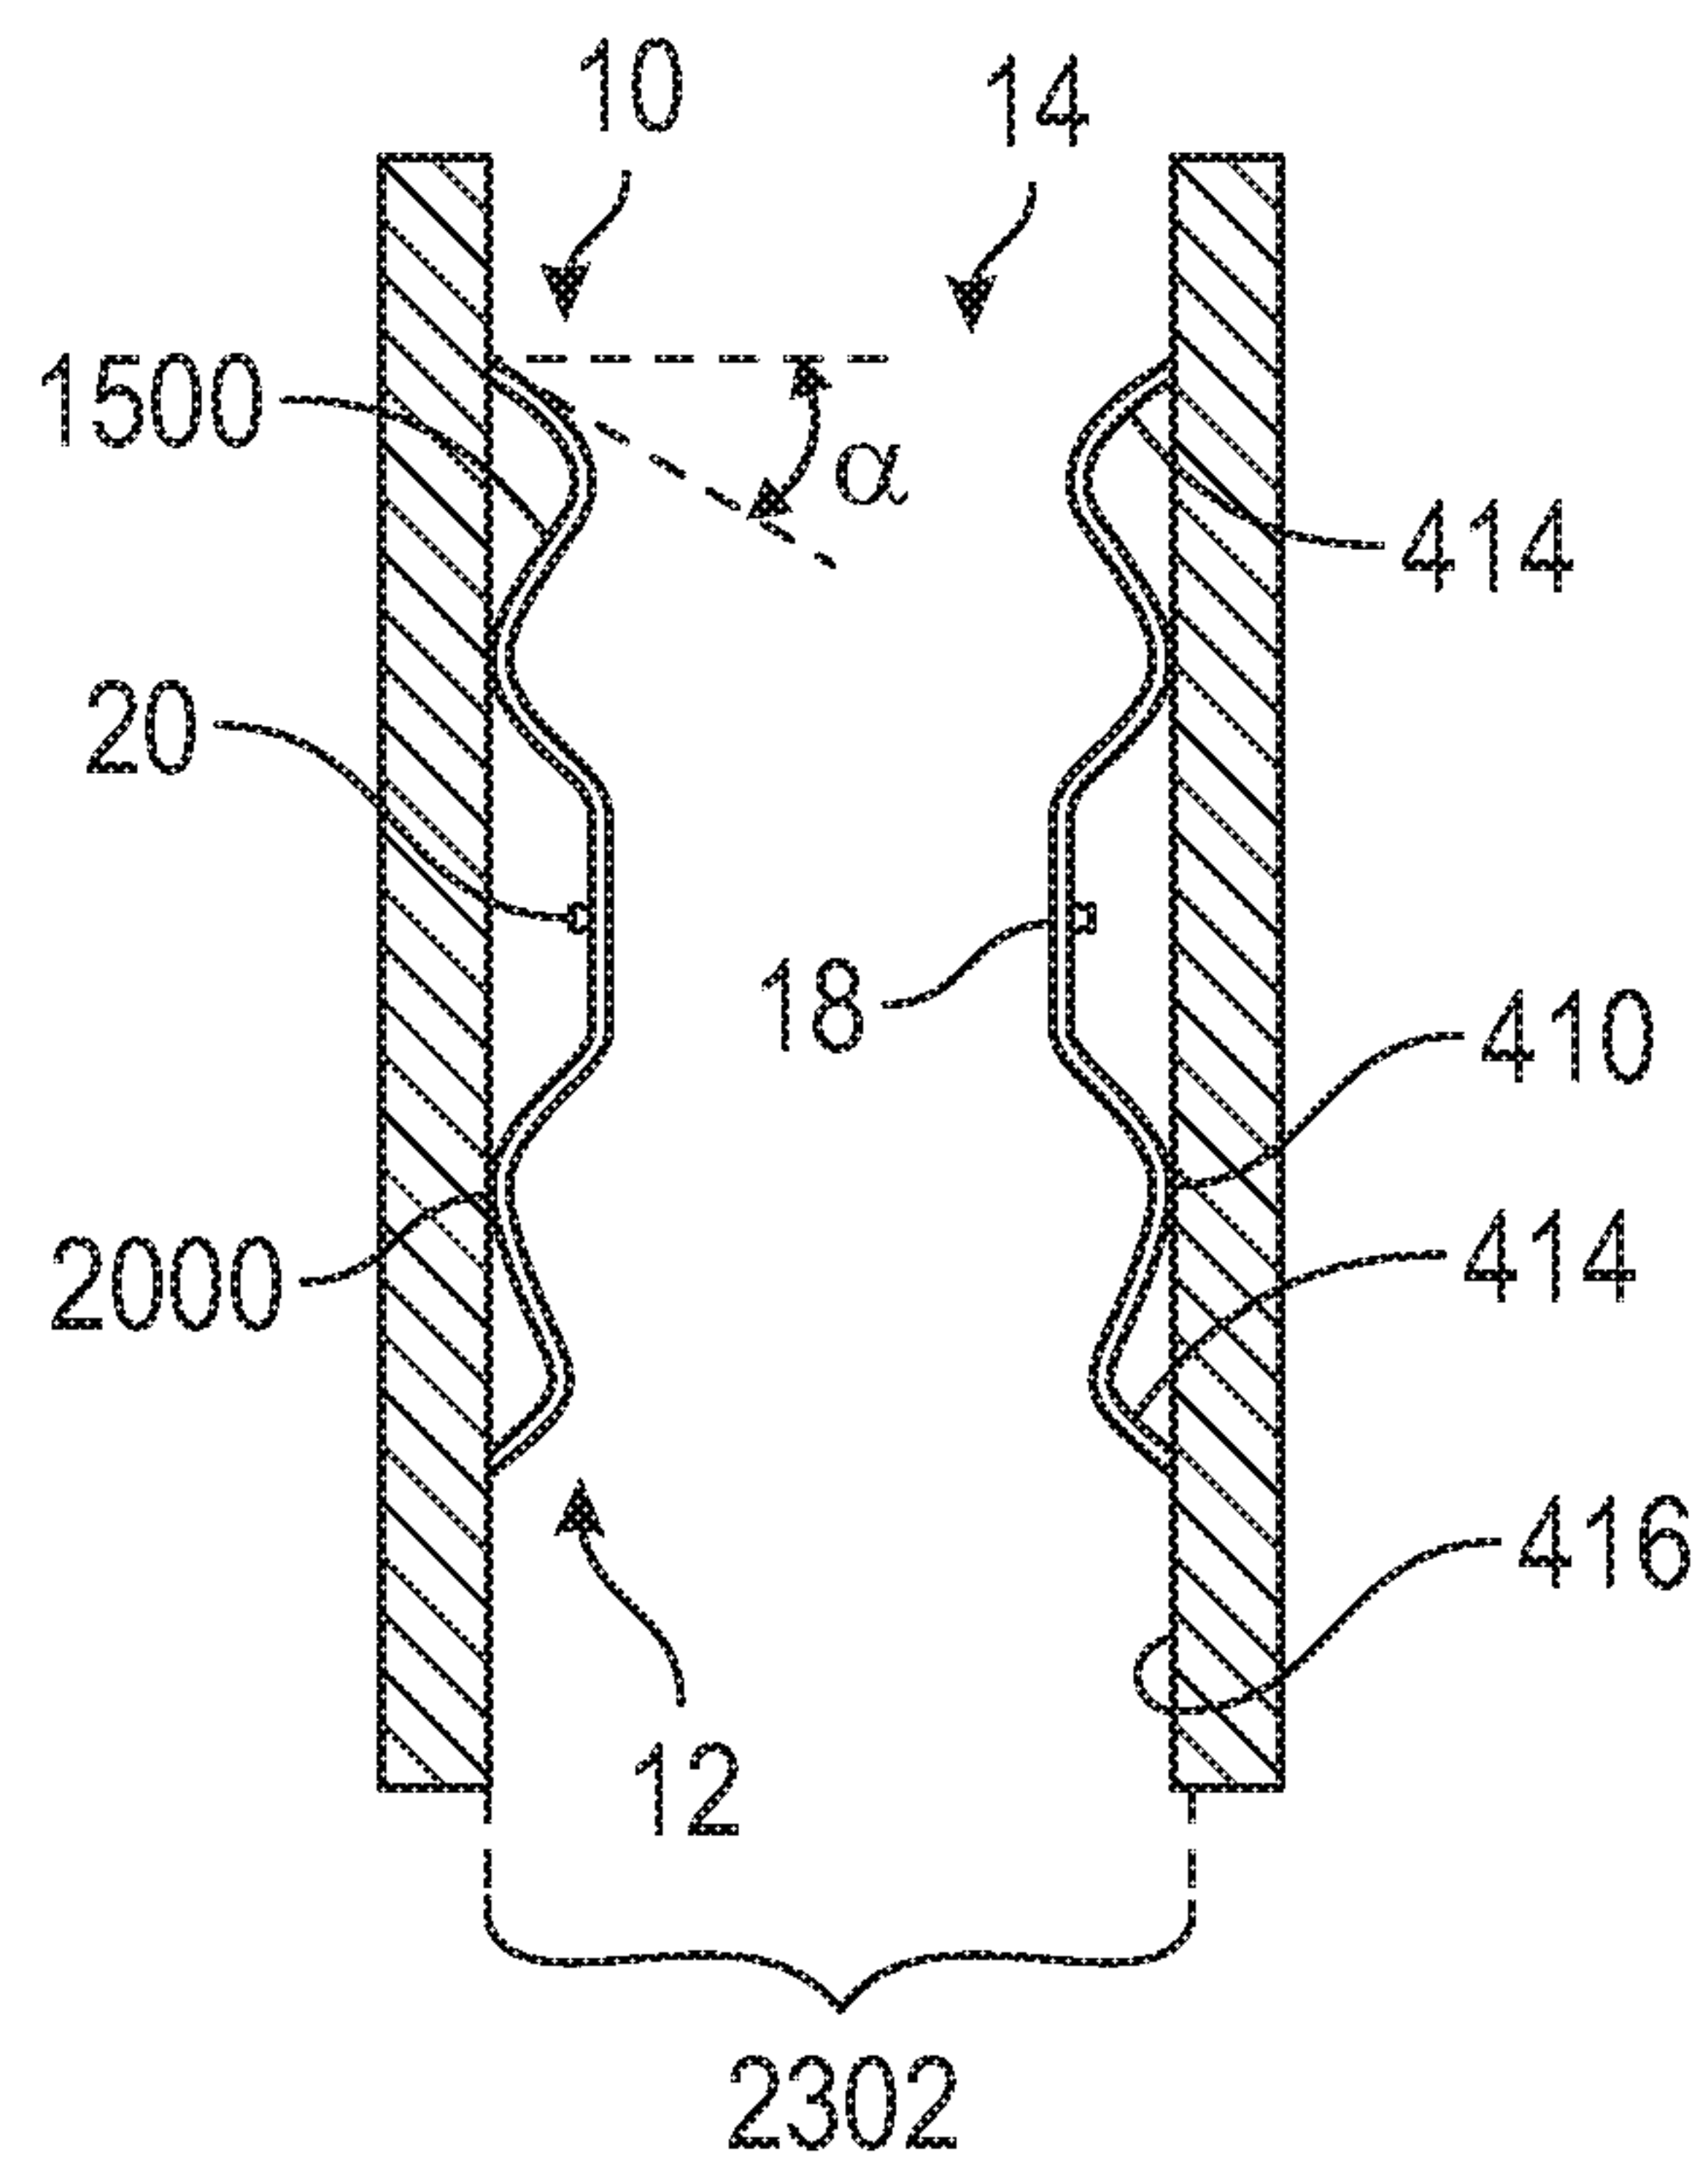


FIG. 23B

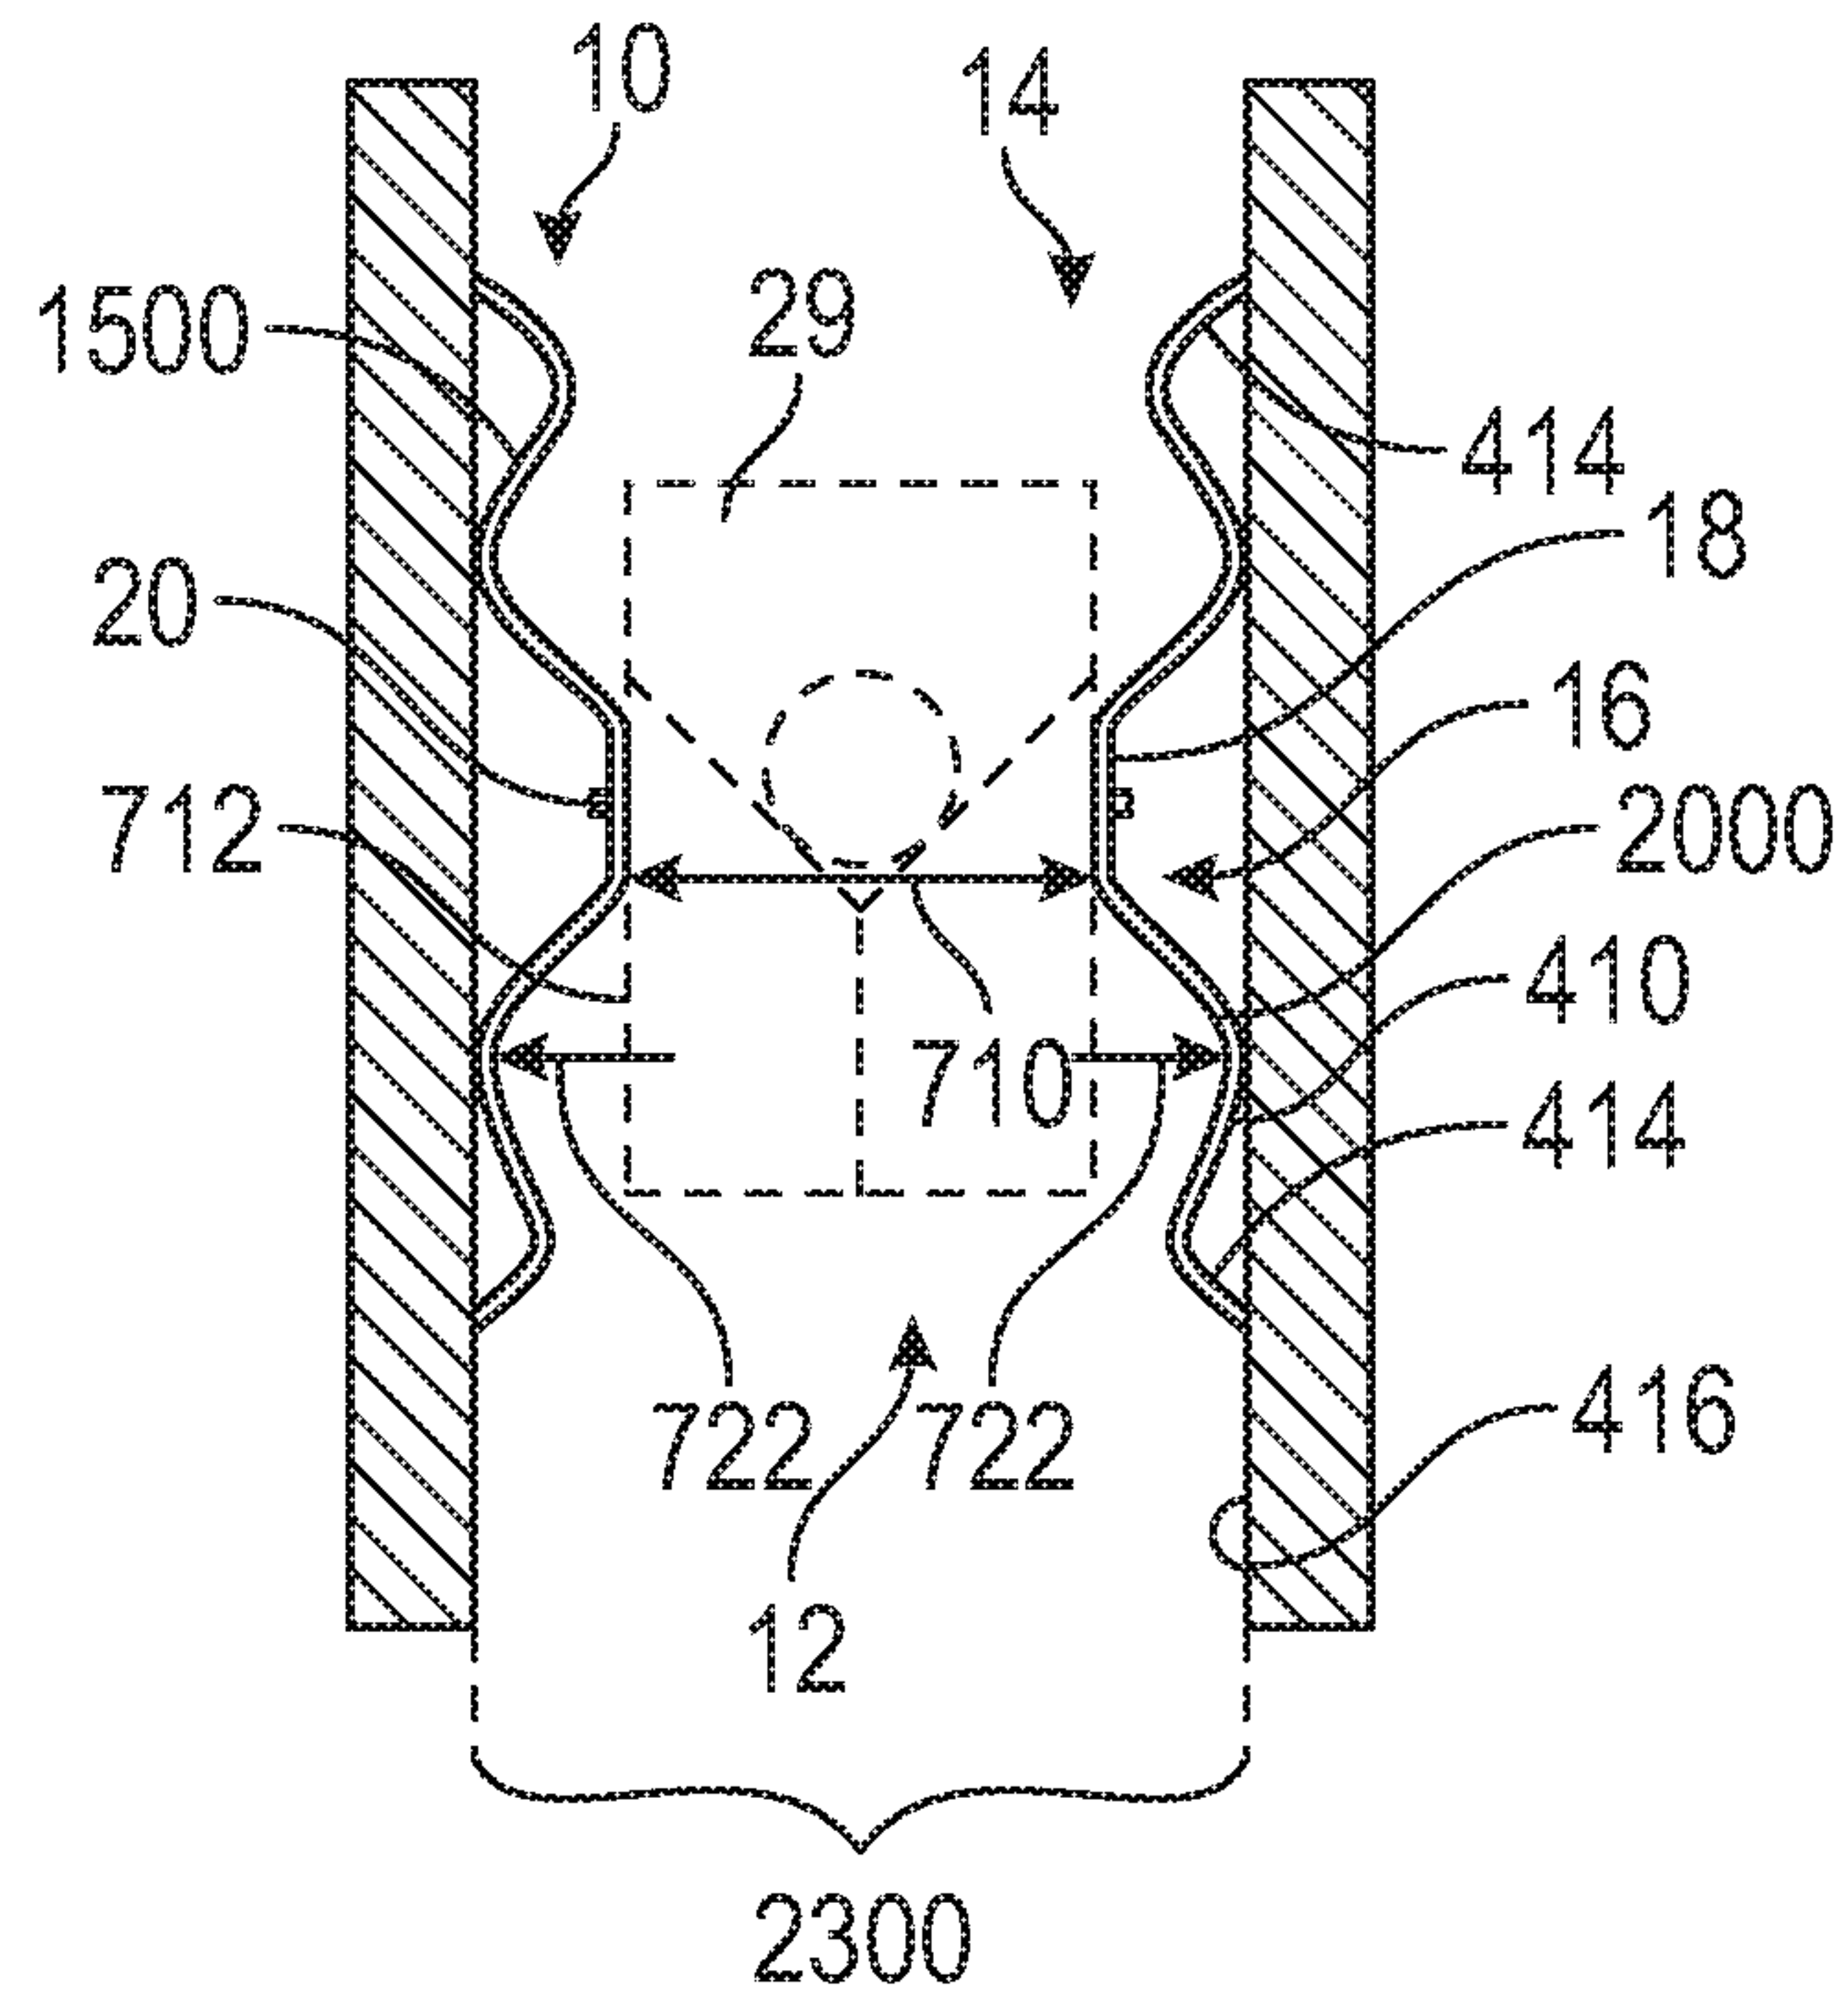


FIG. 24

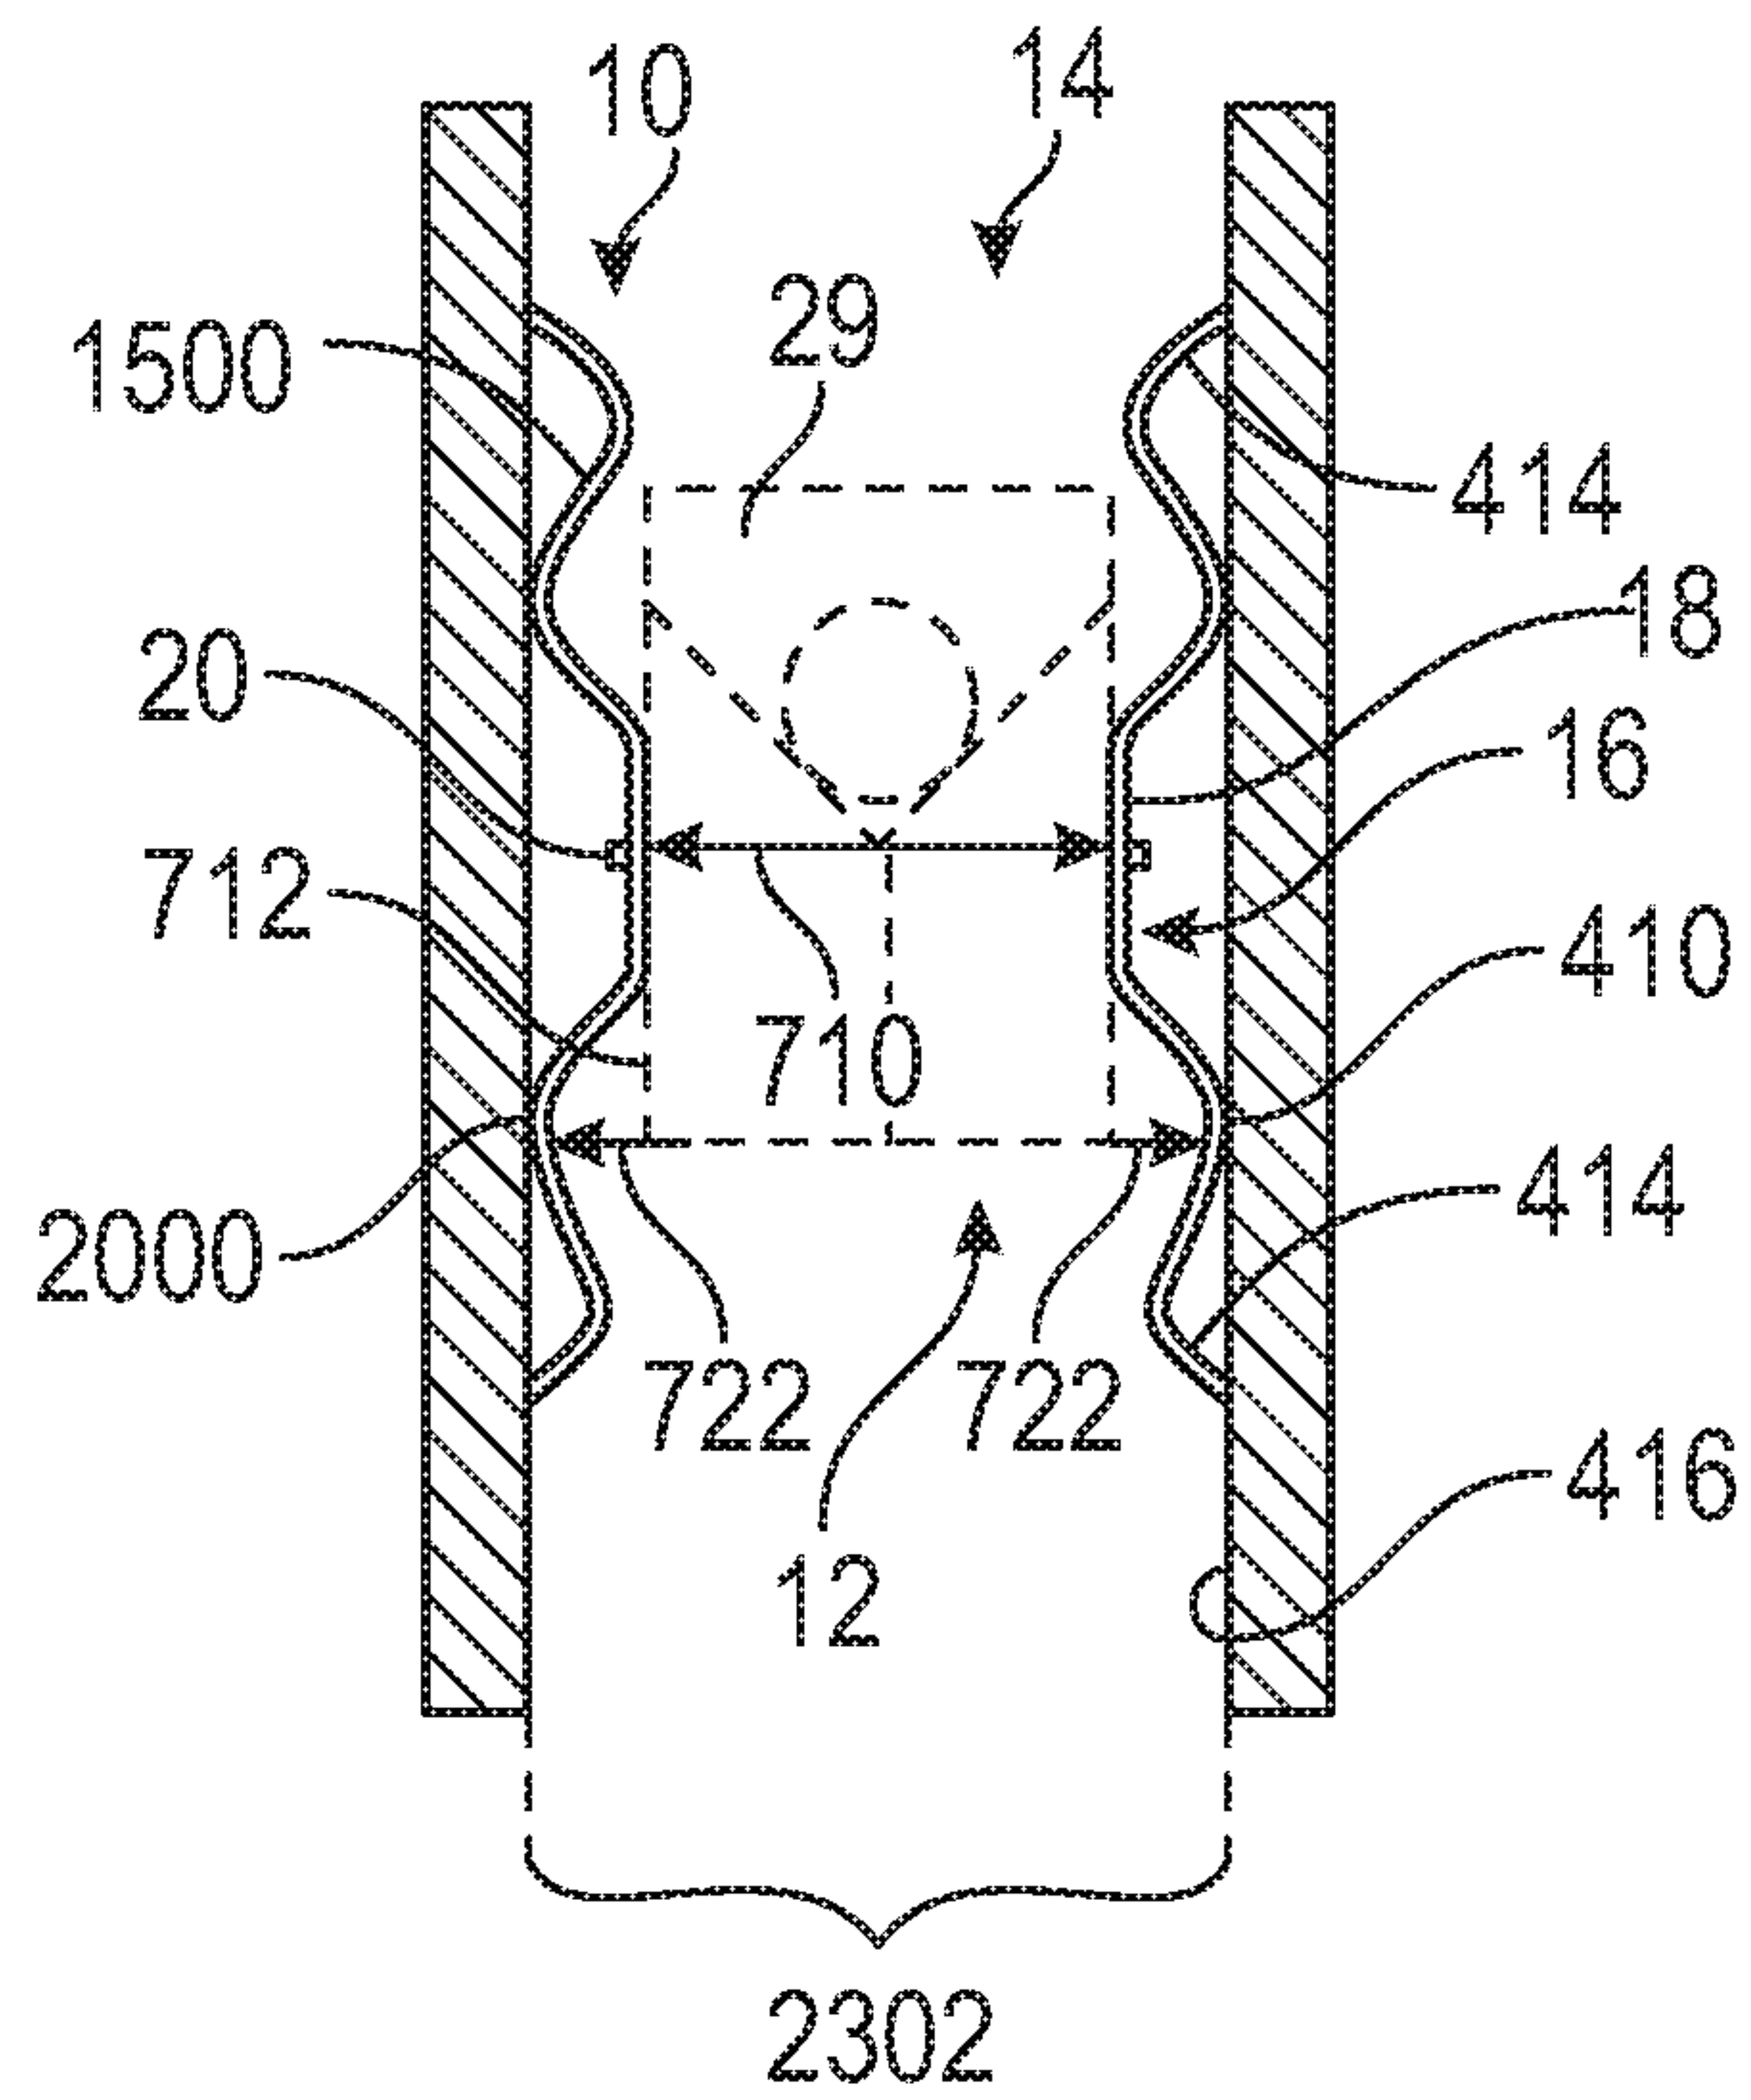


FIG. 25

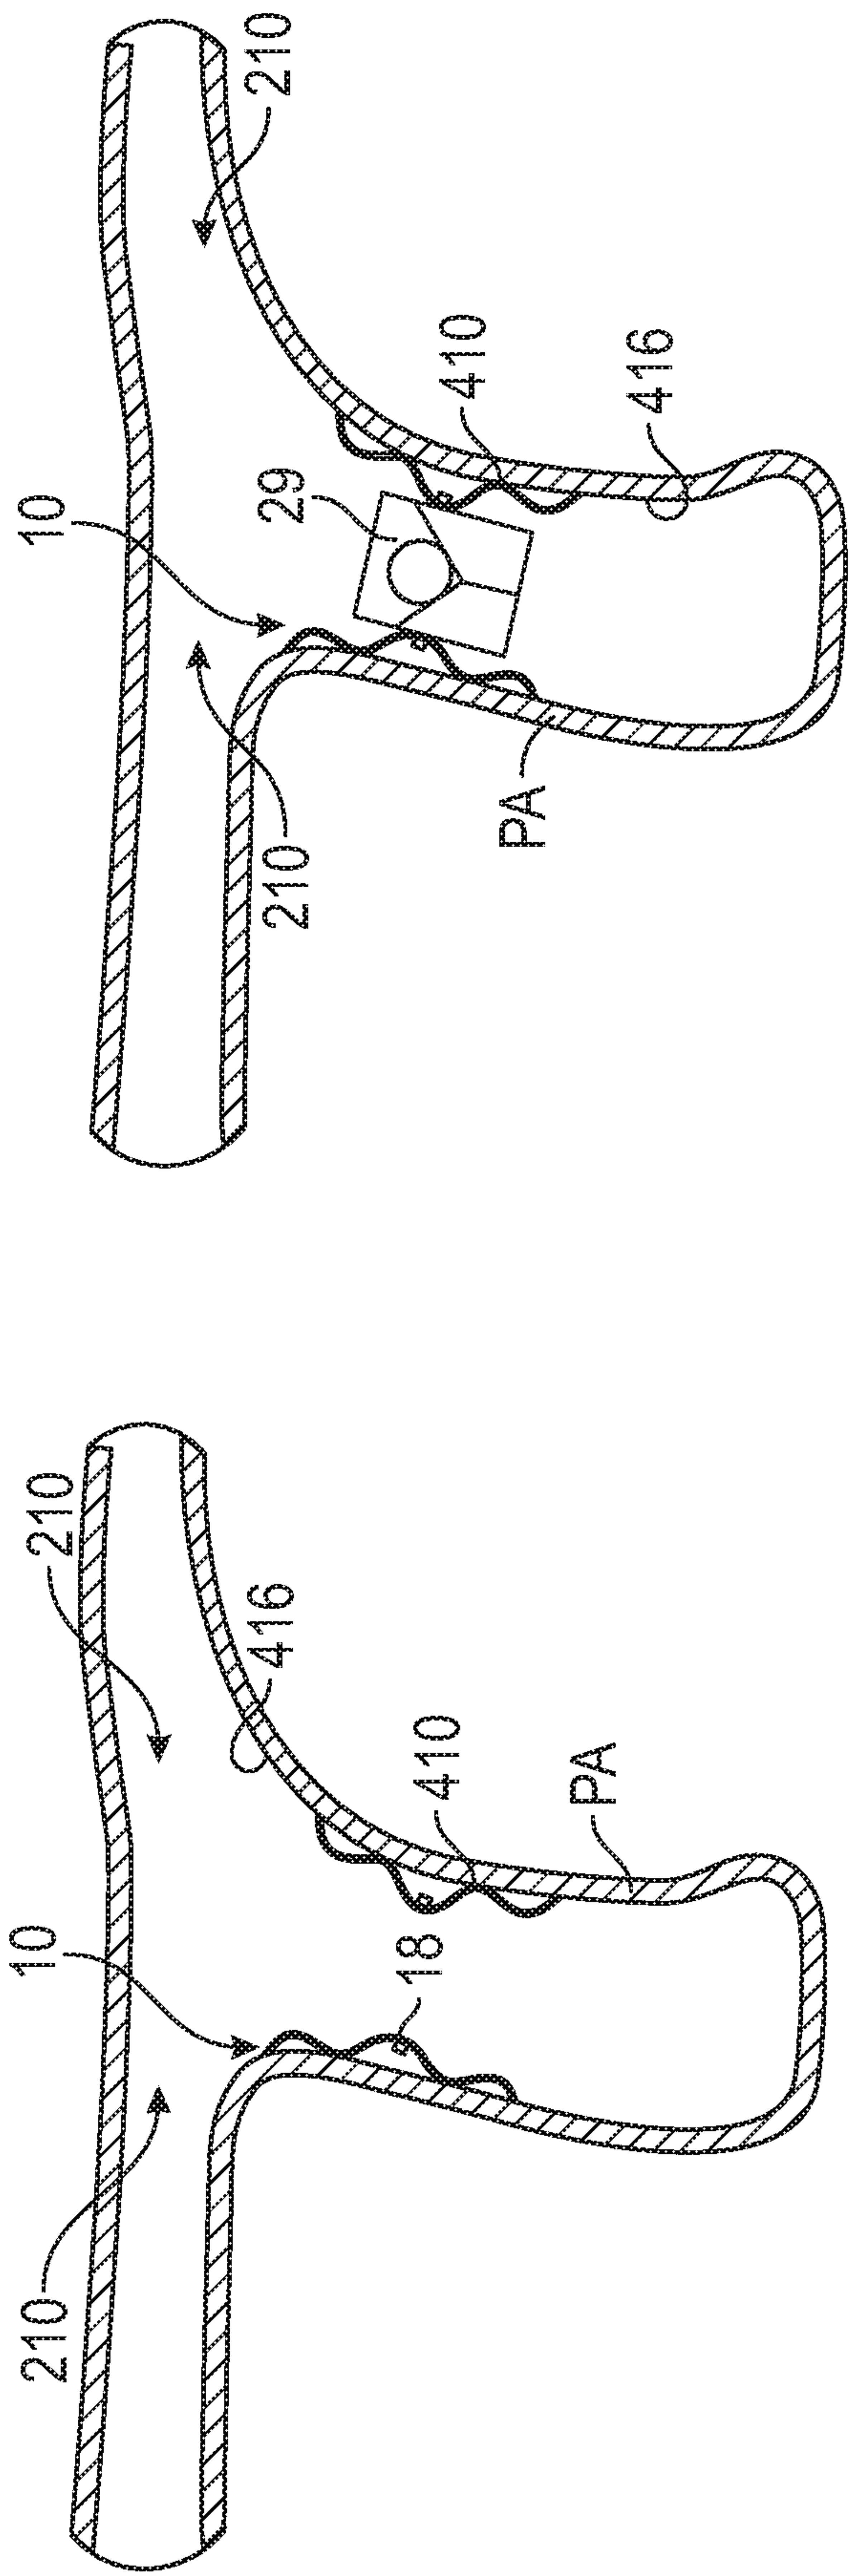


FIG. 26B

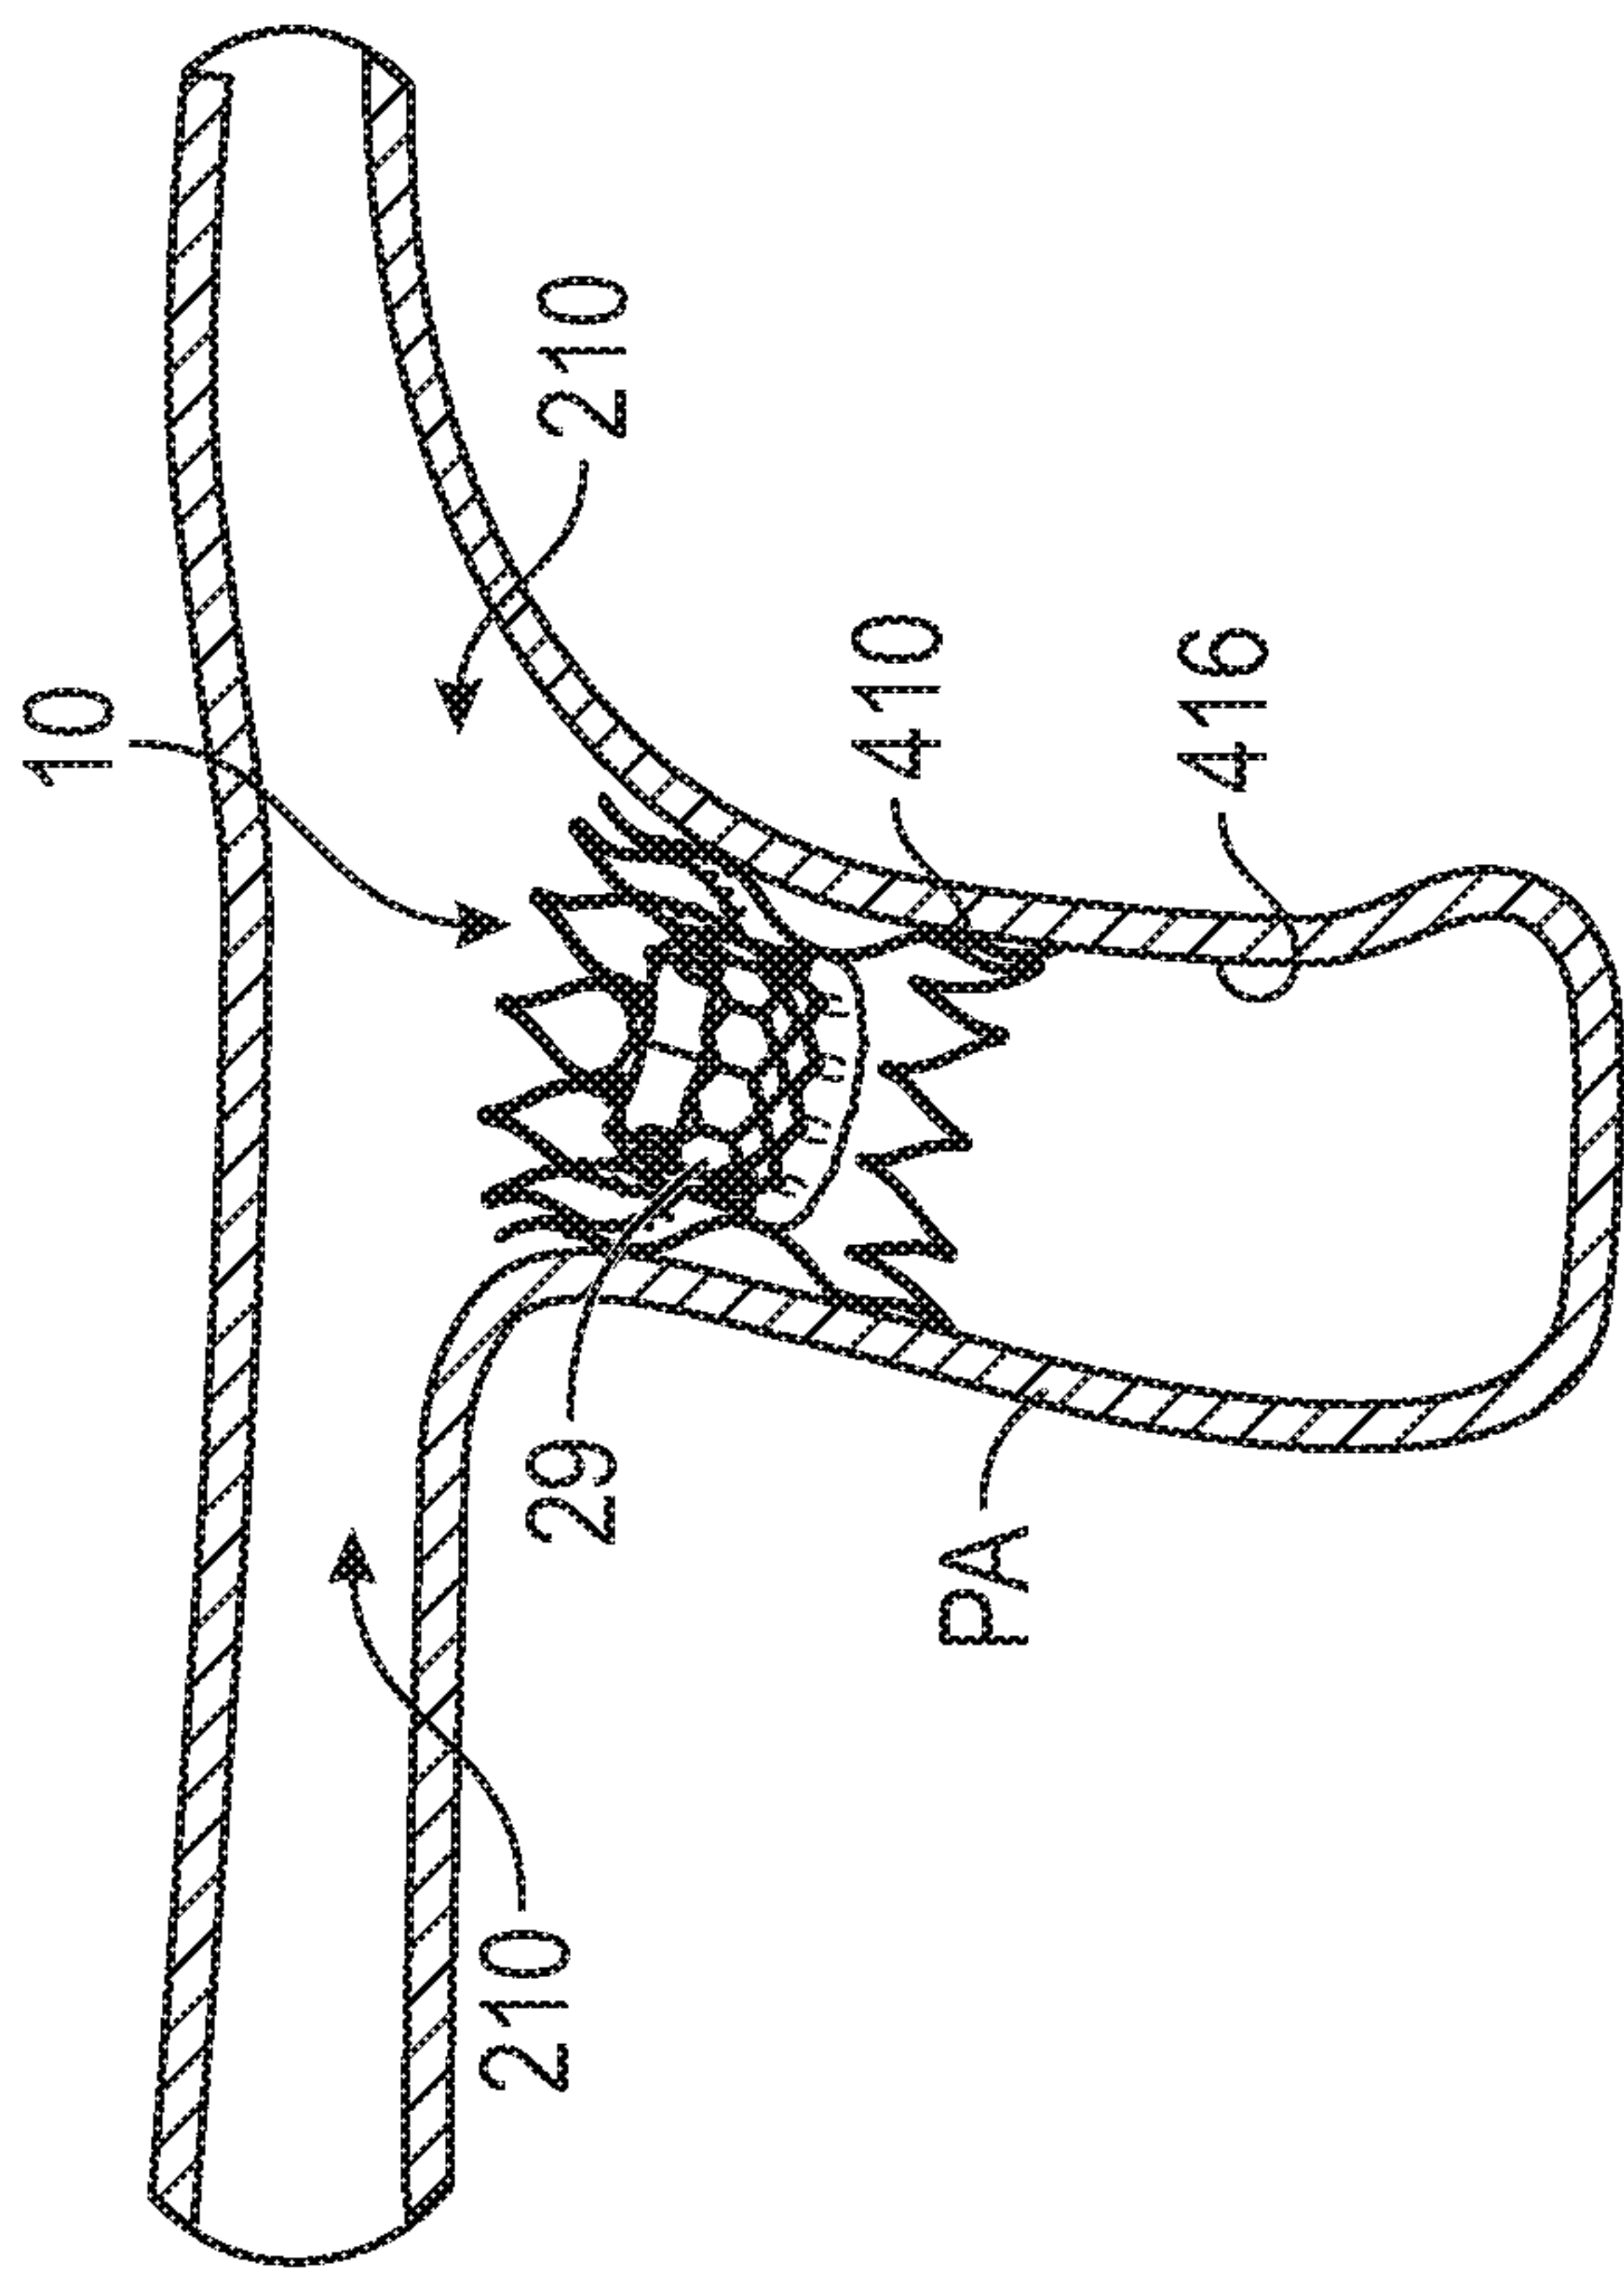
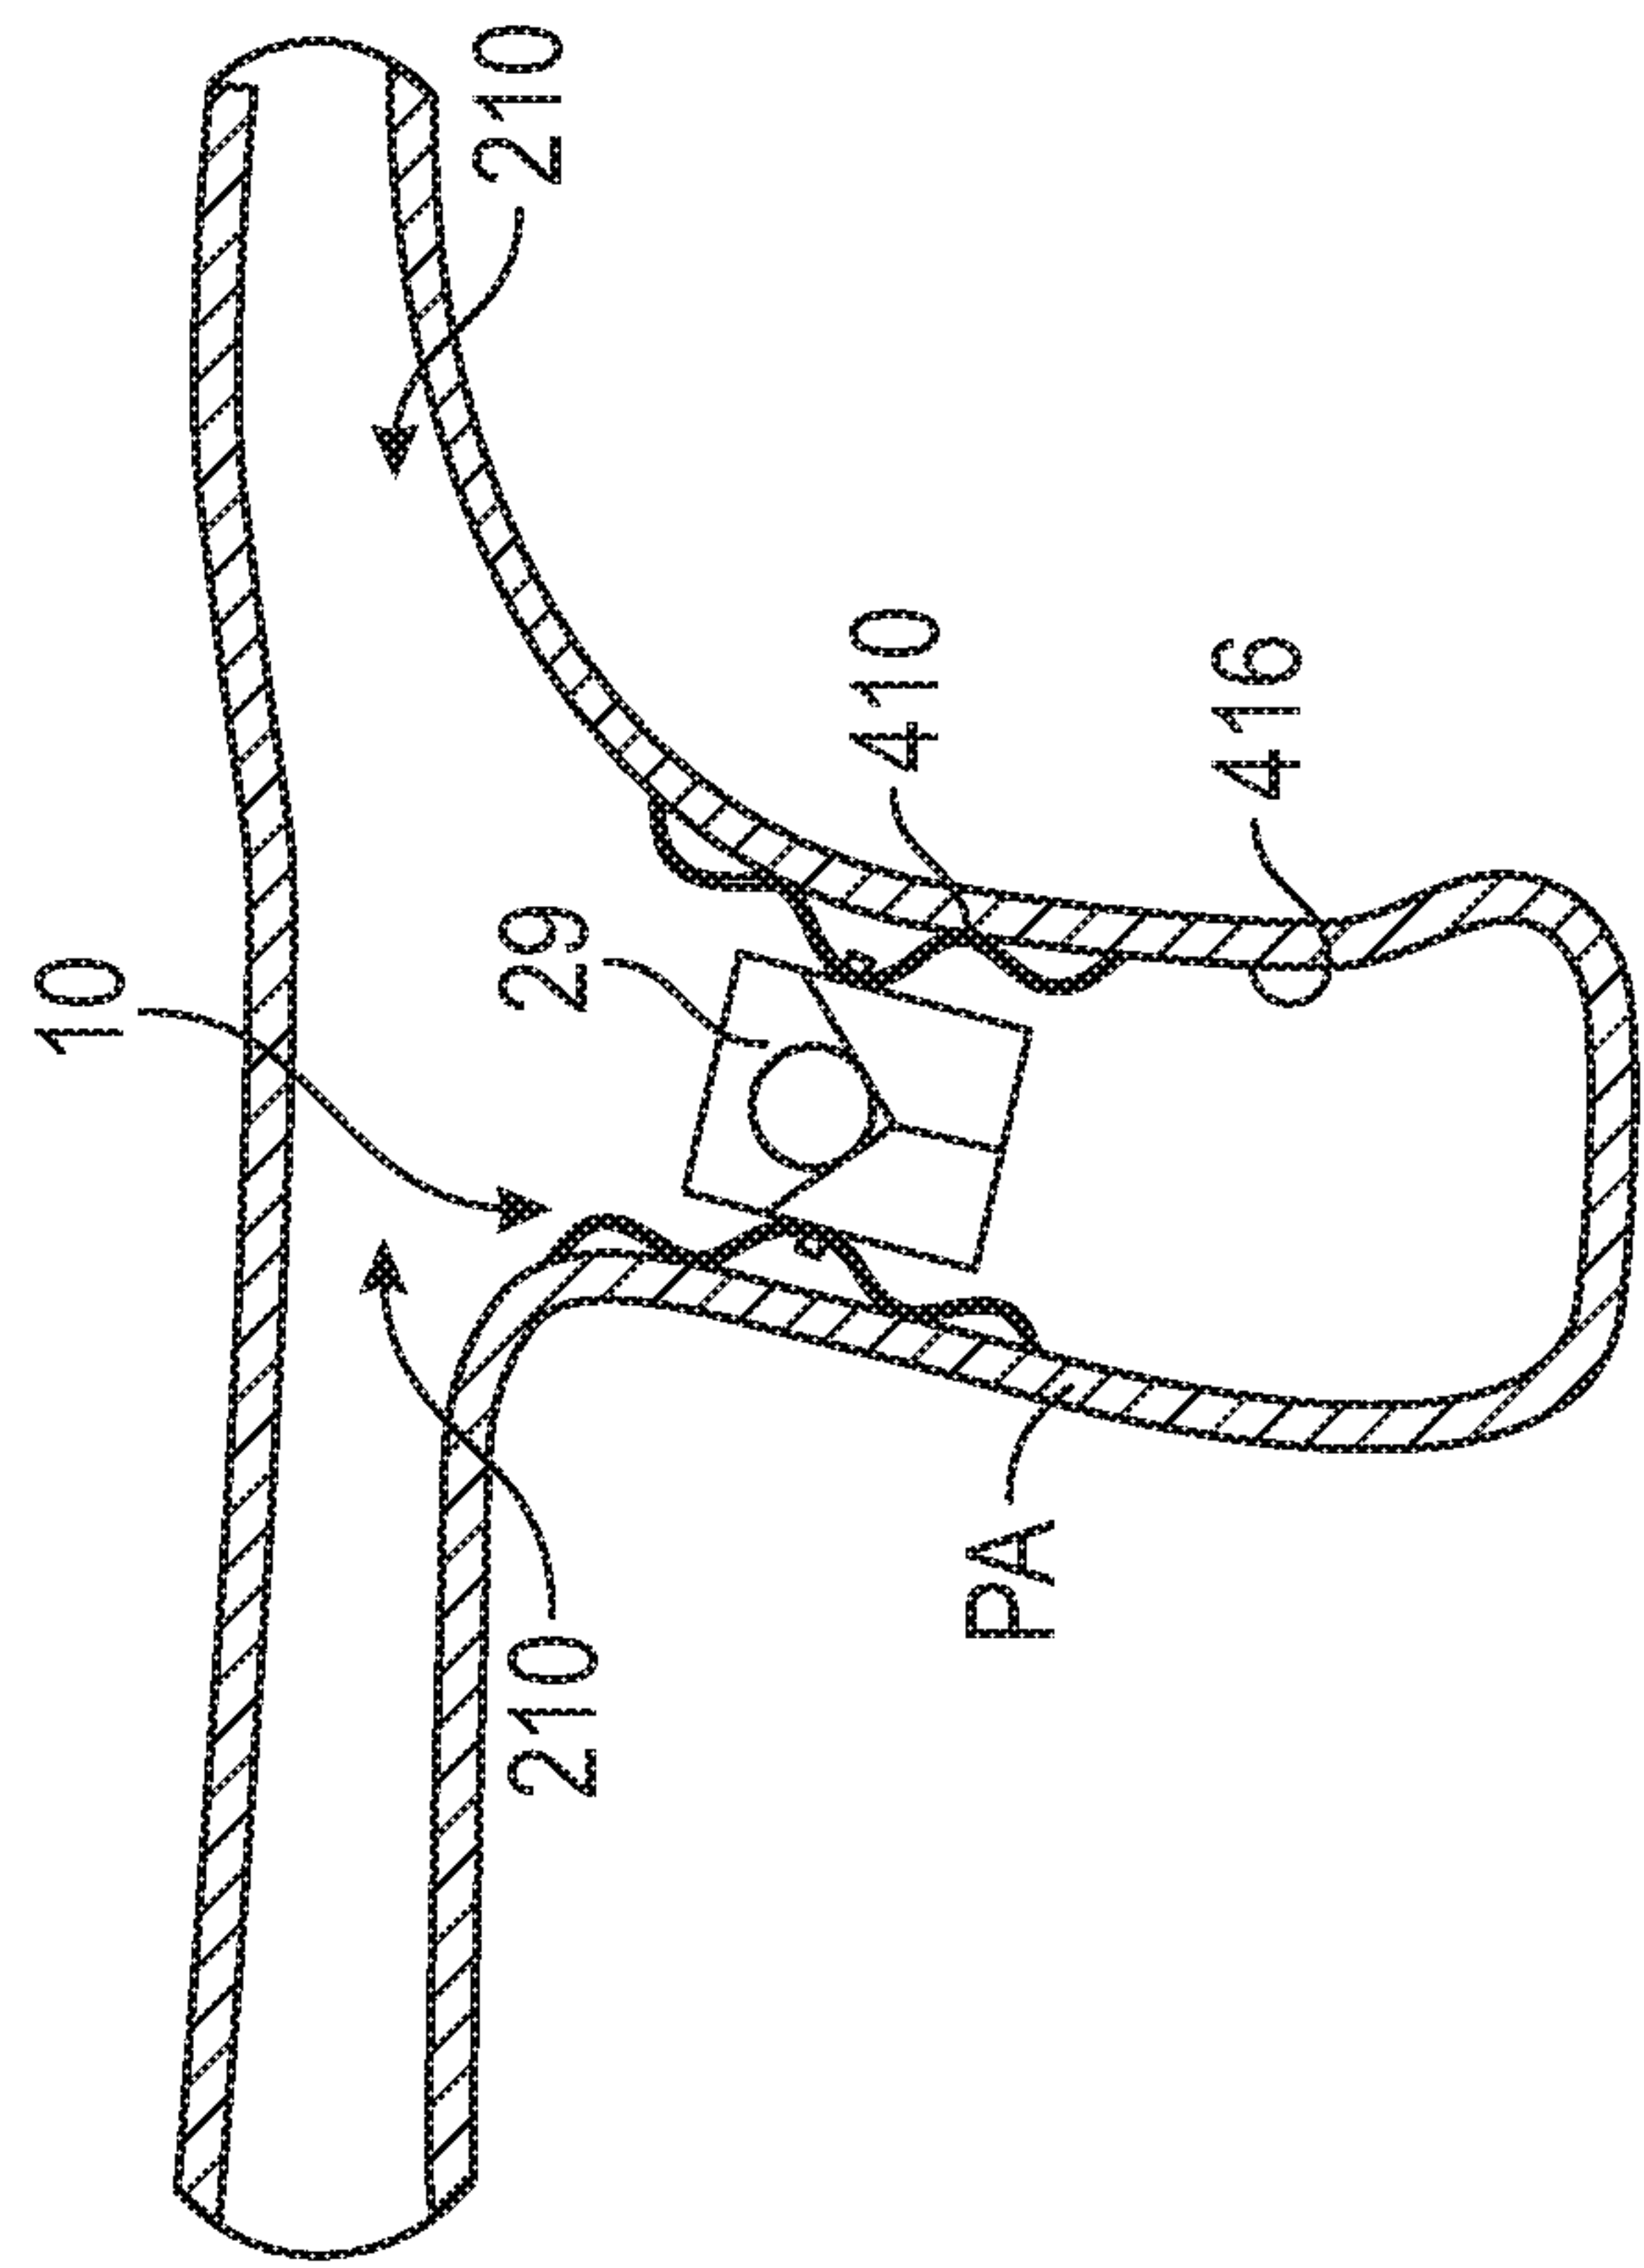


FIG. 26C

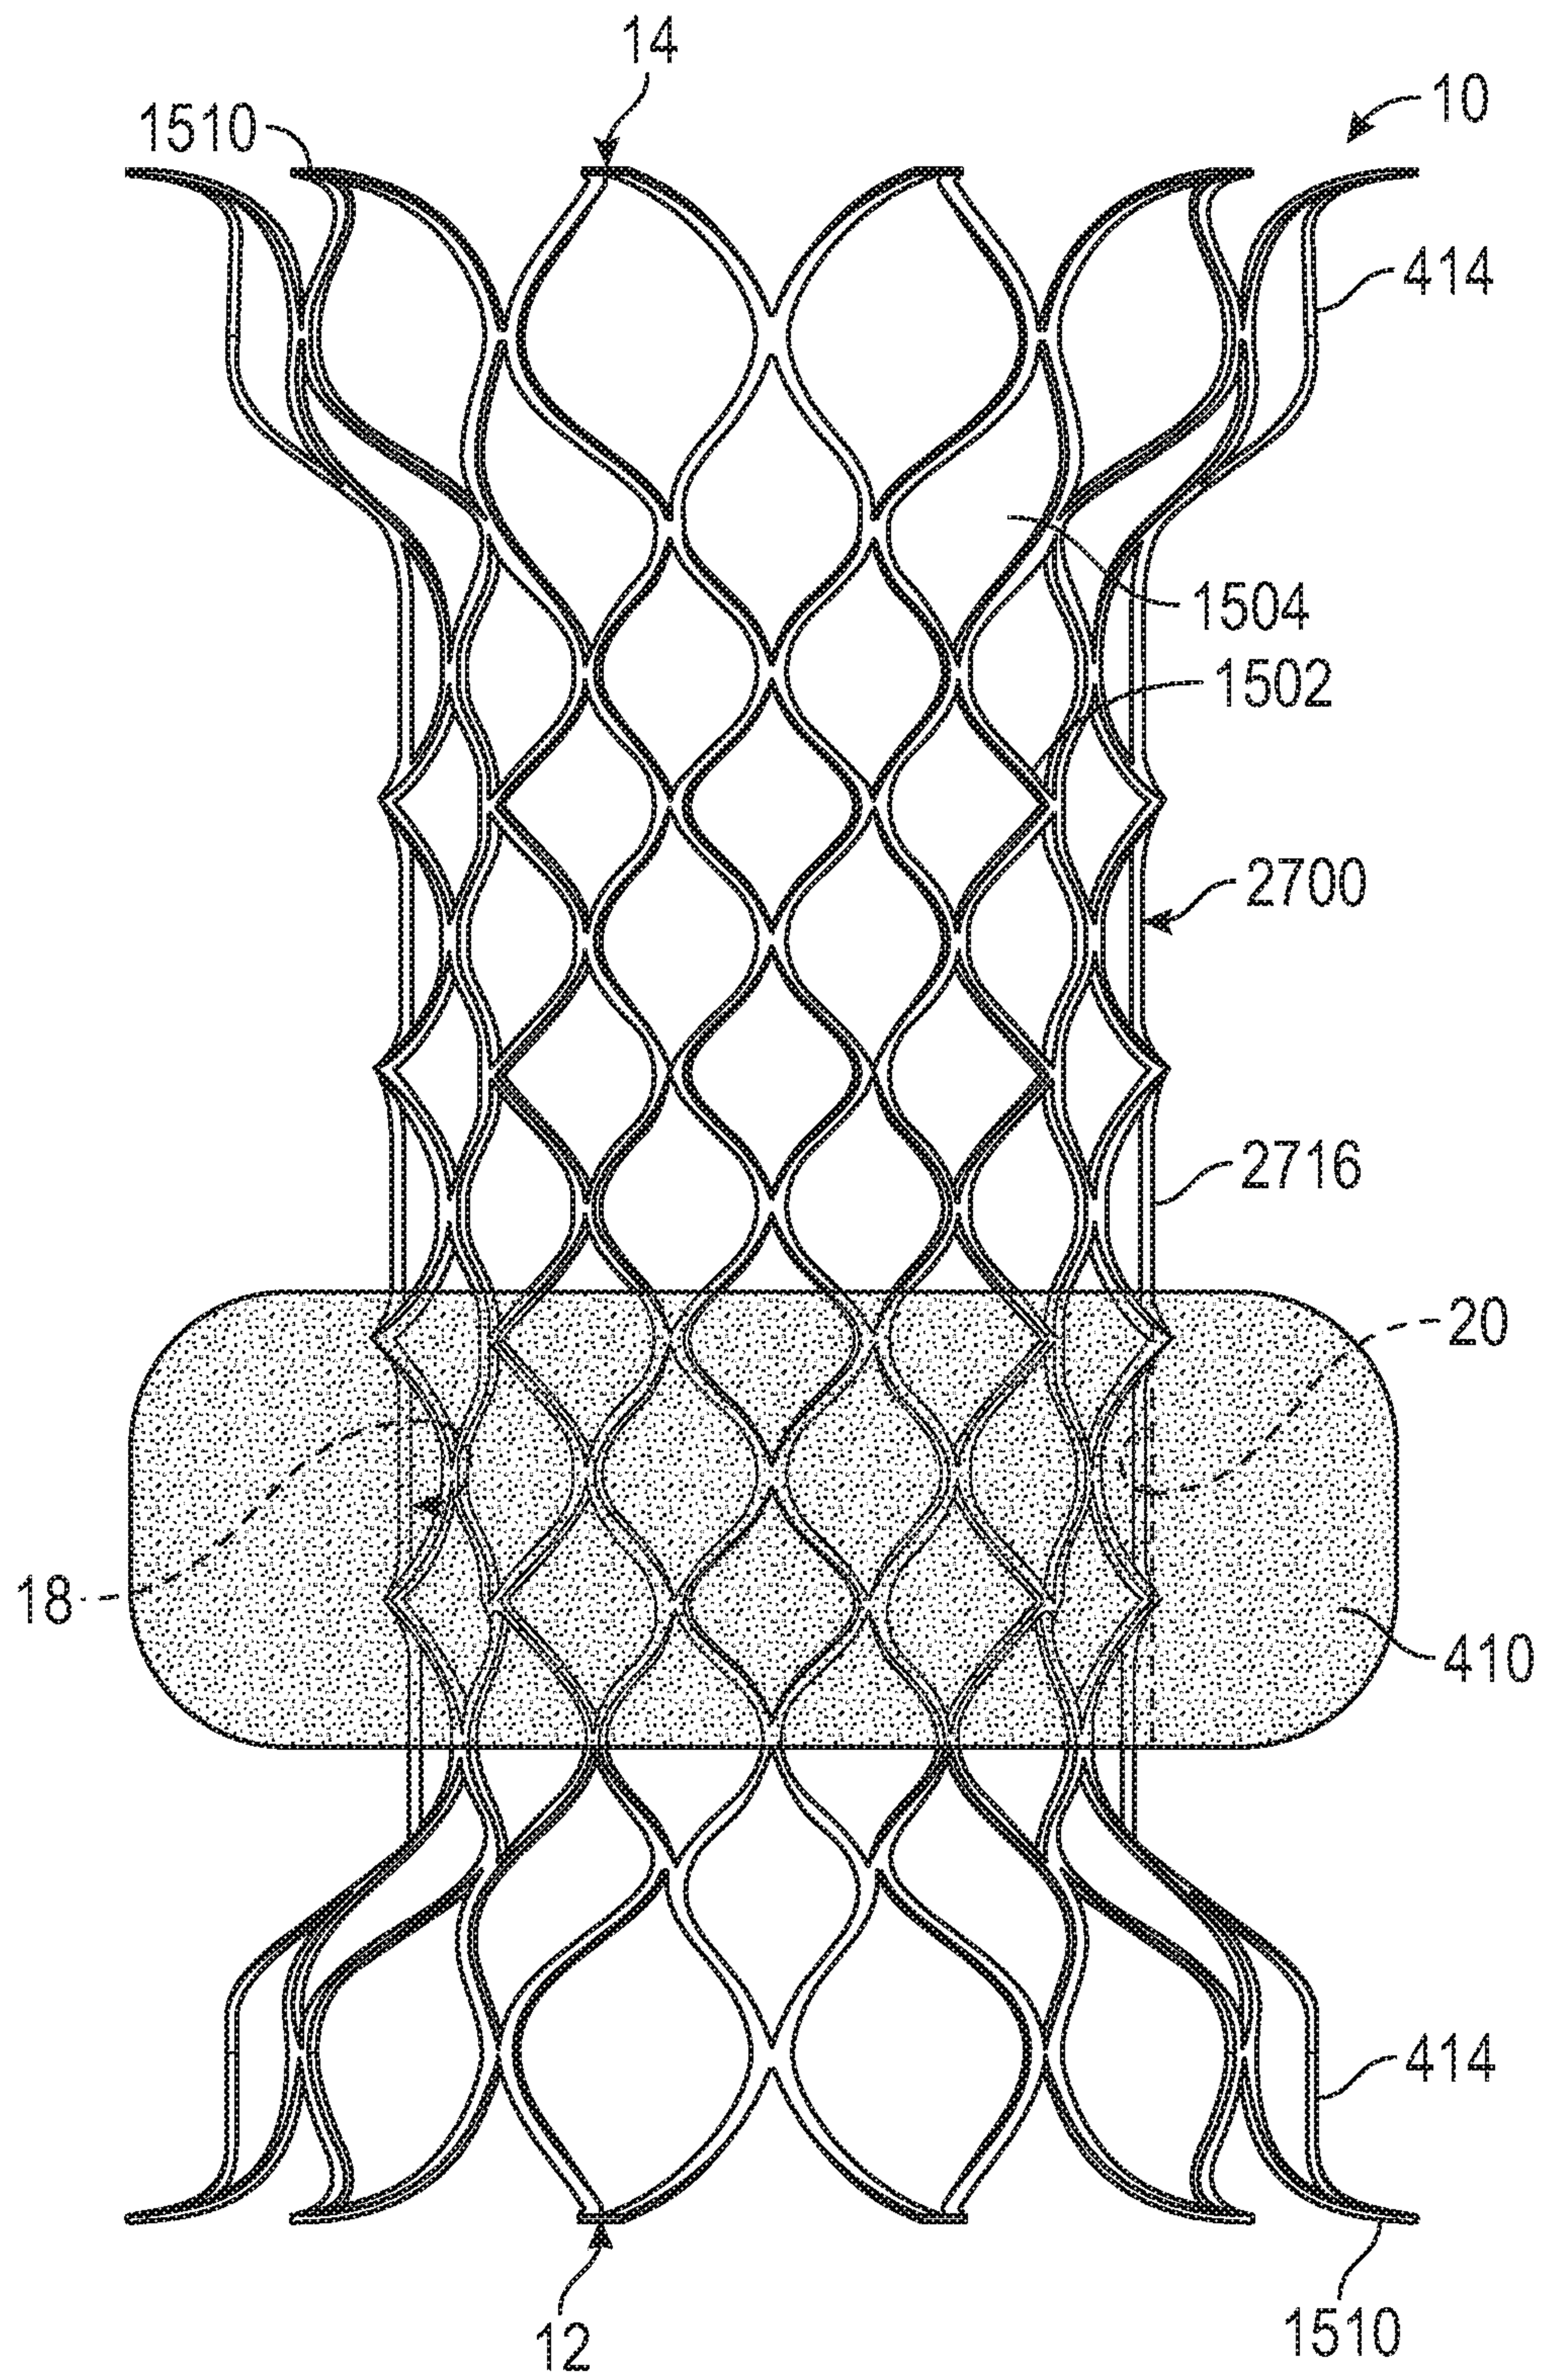


FIG. 27

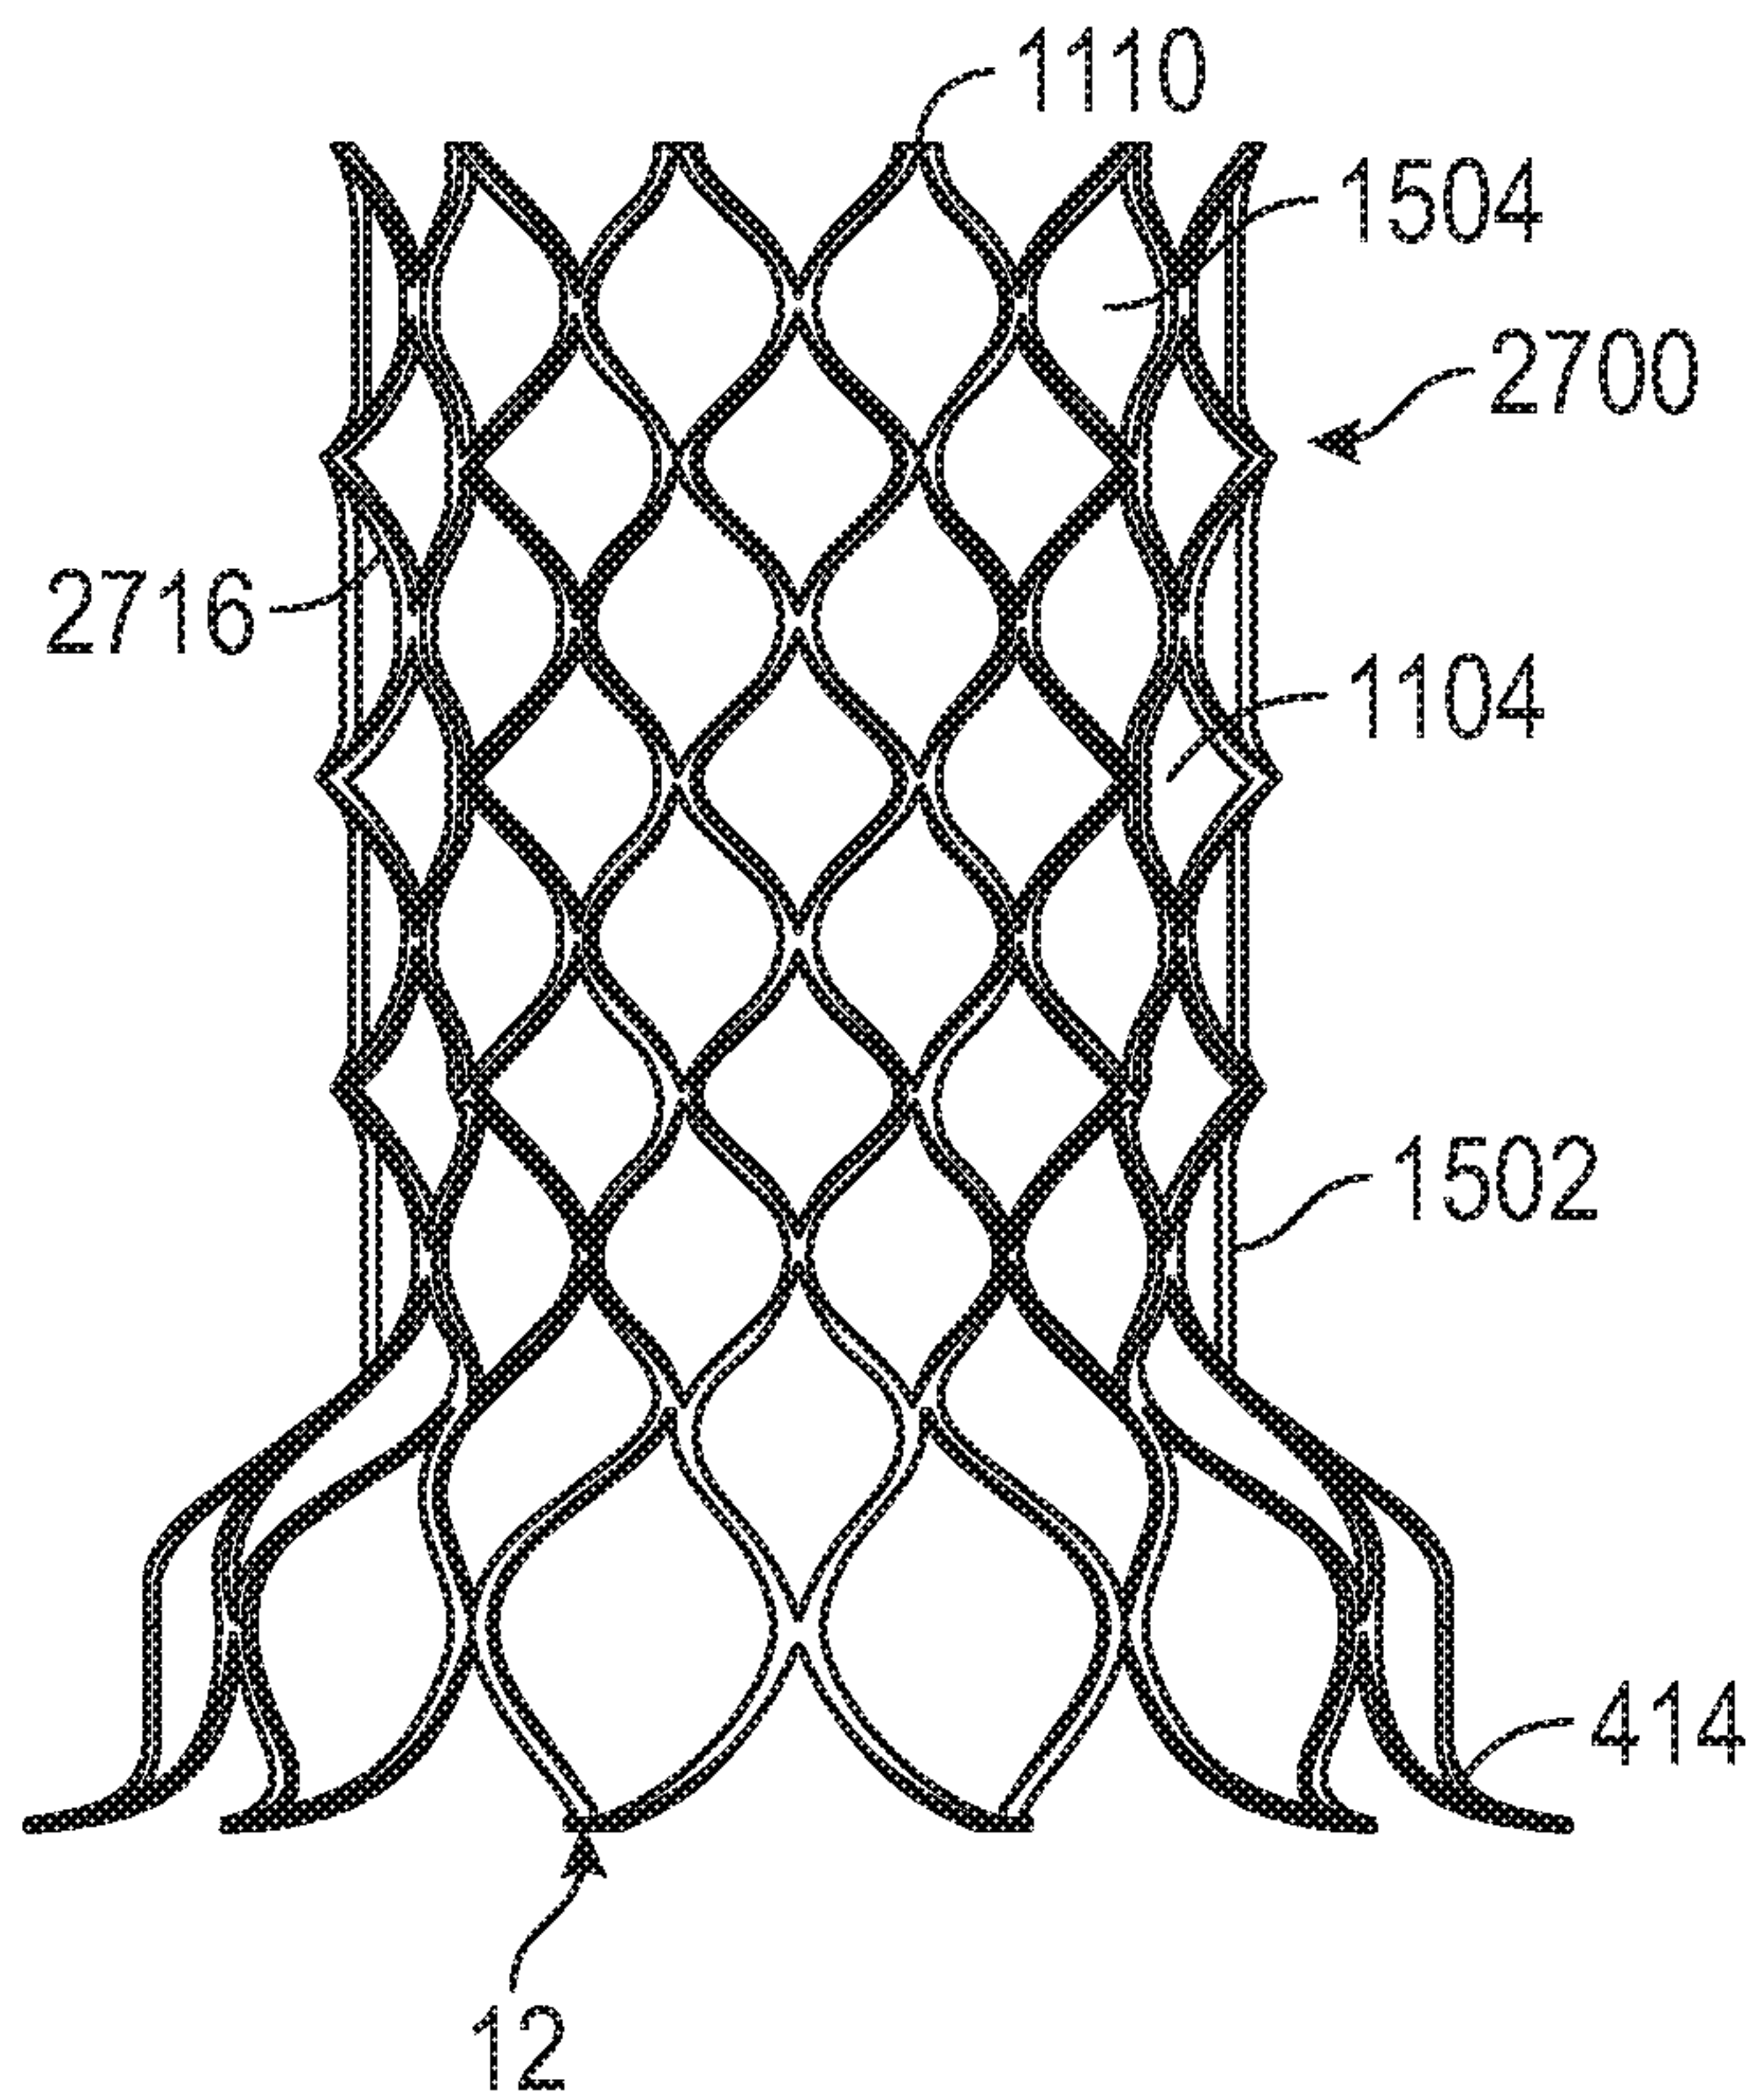
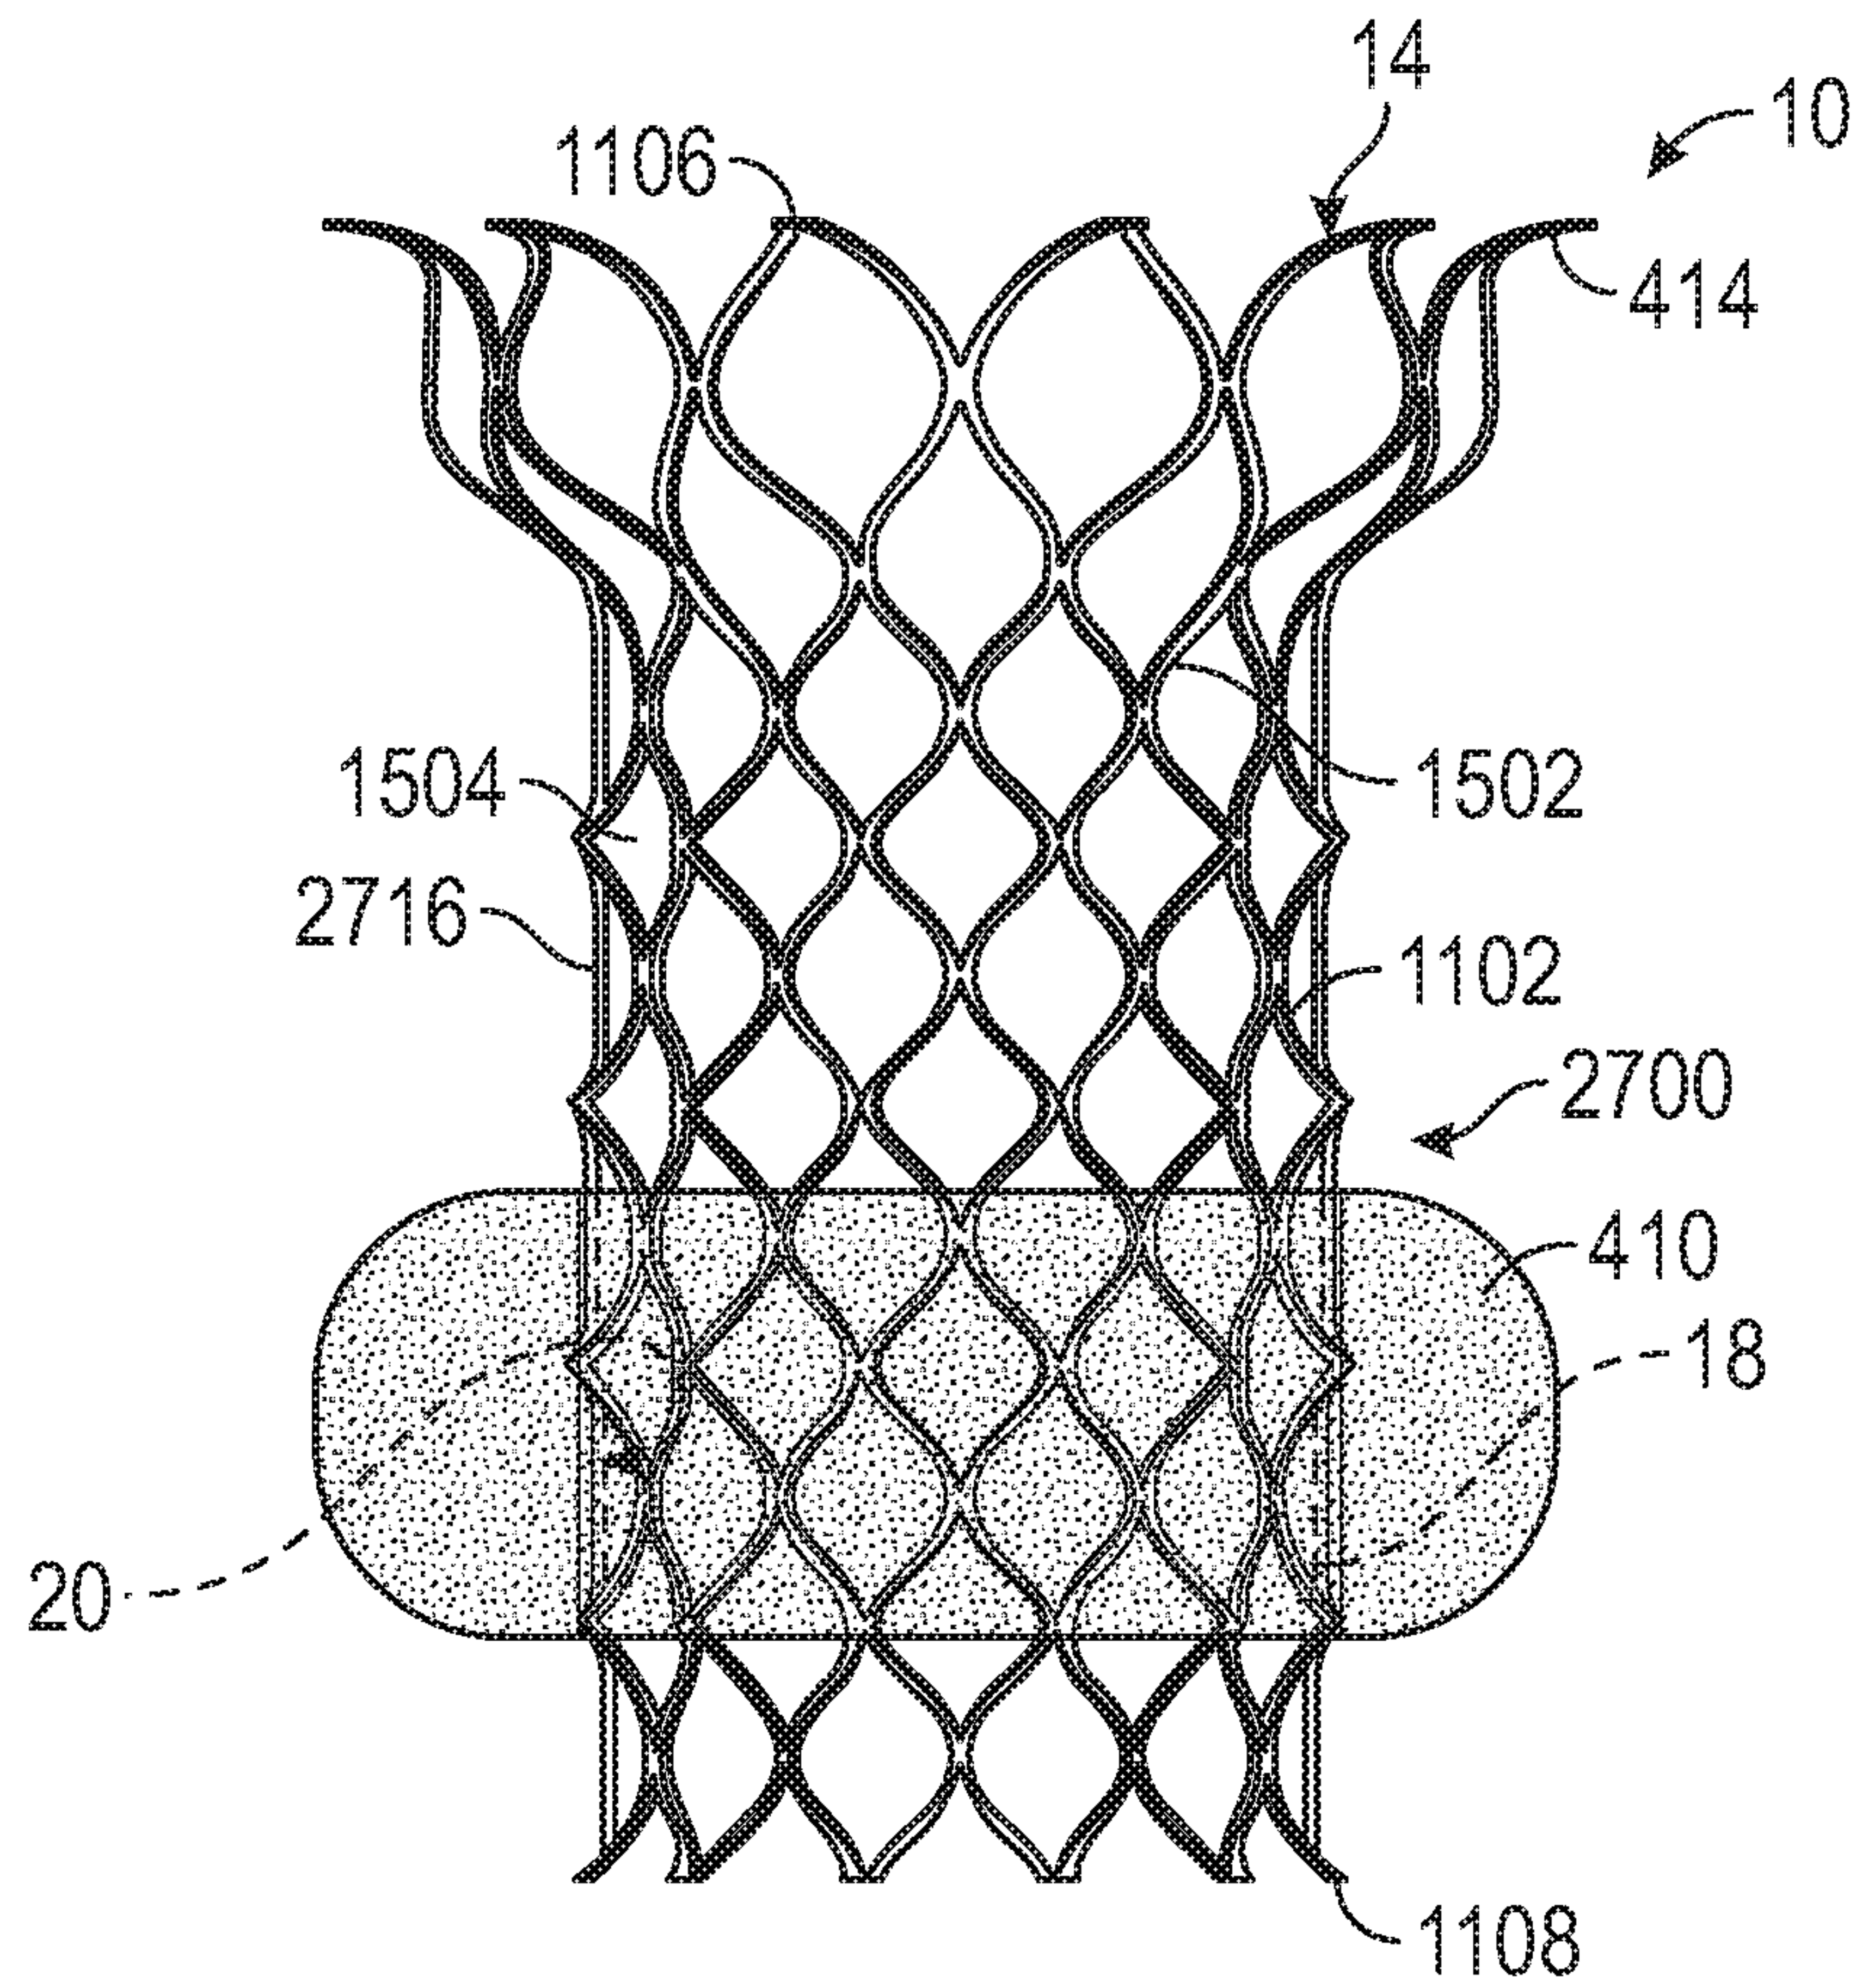


FIG. 28

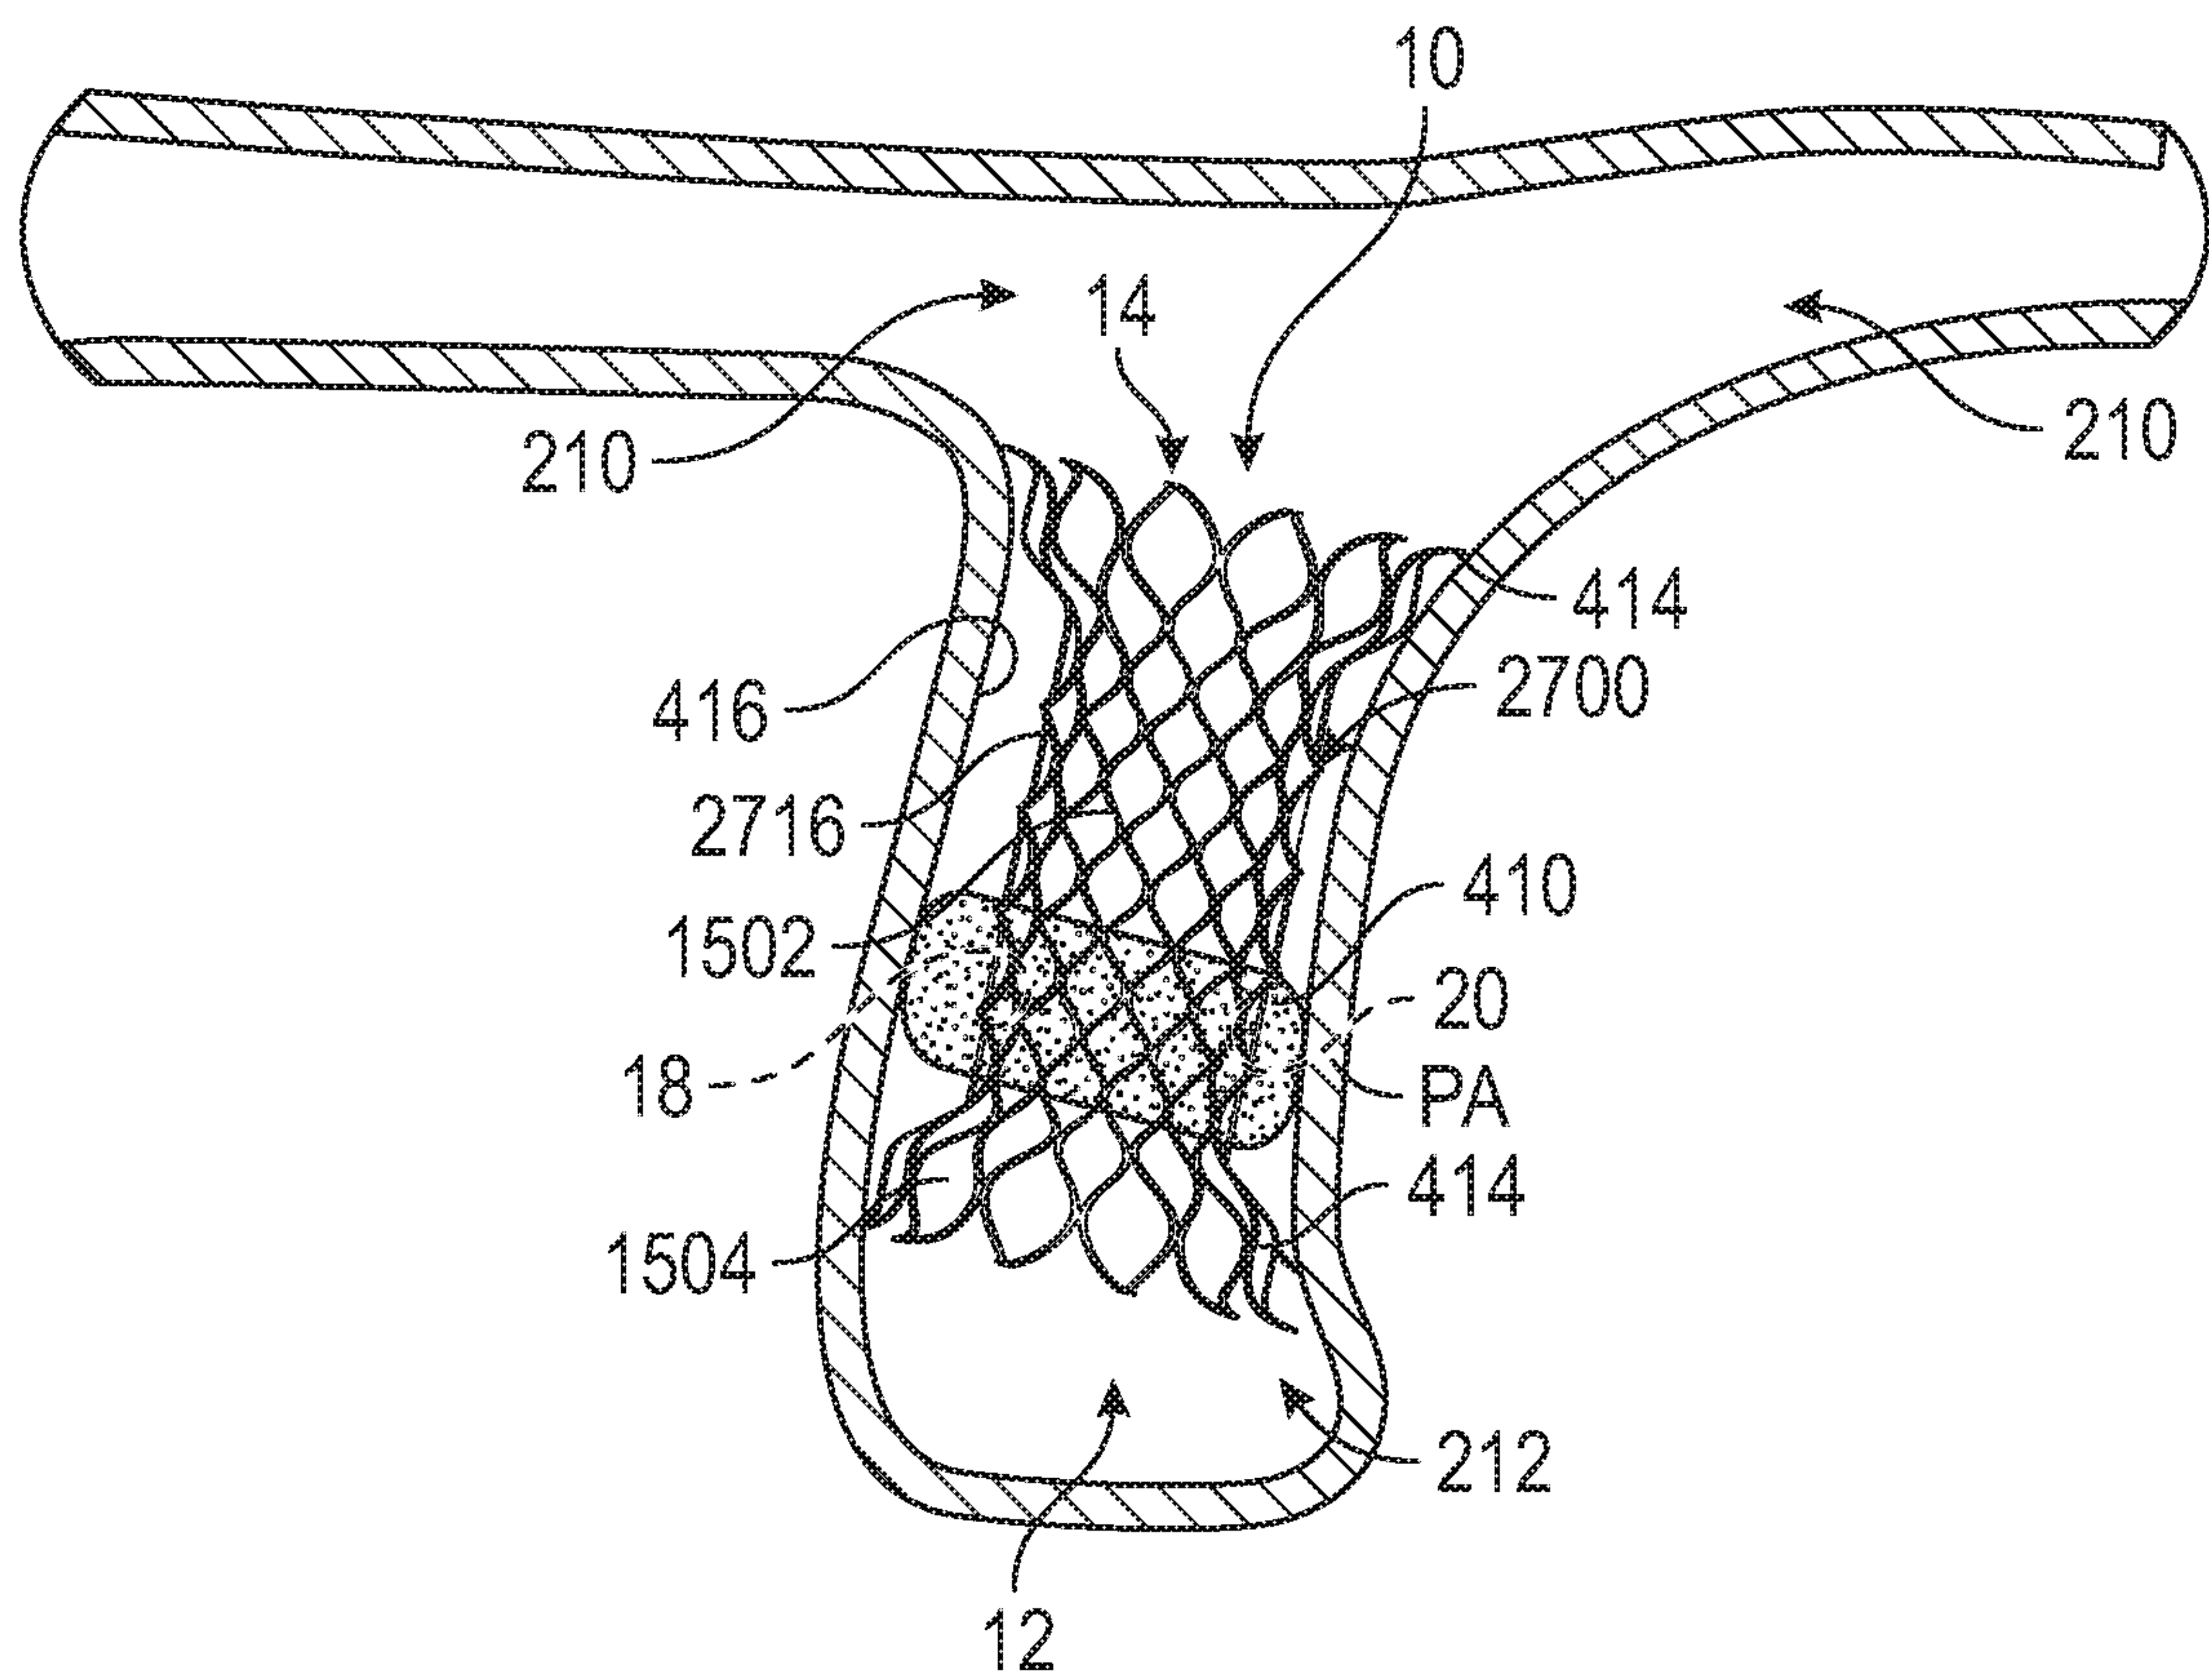


FIG. 30

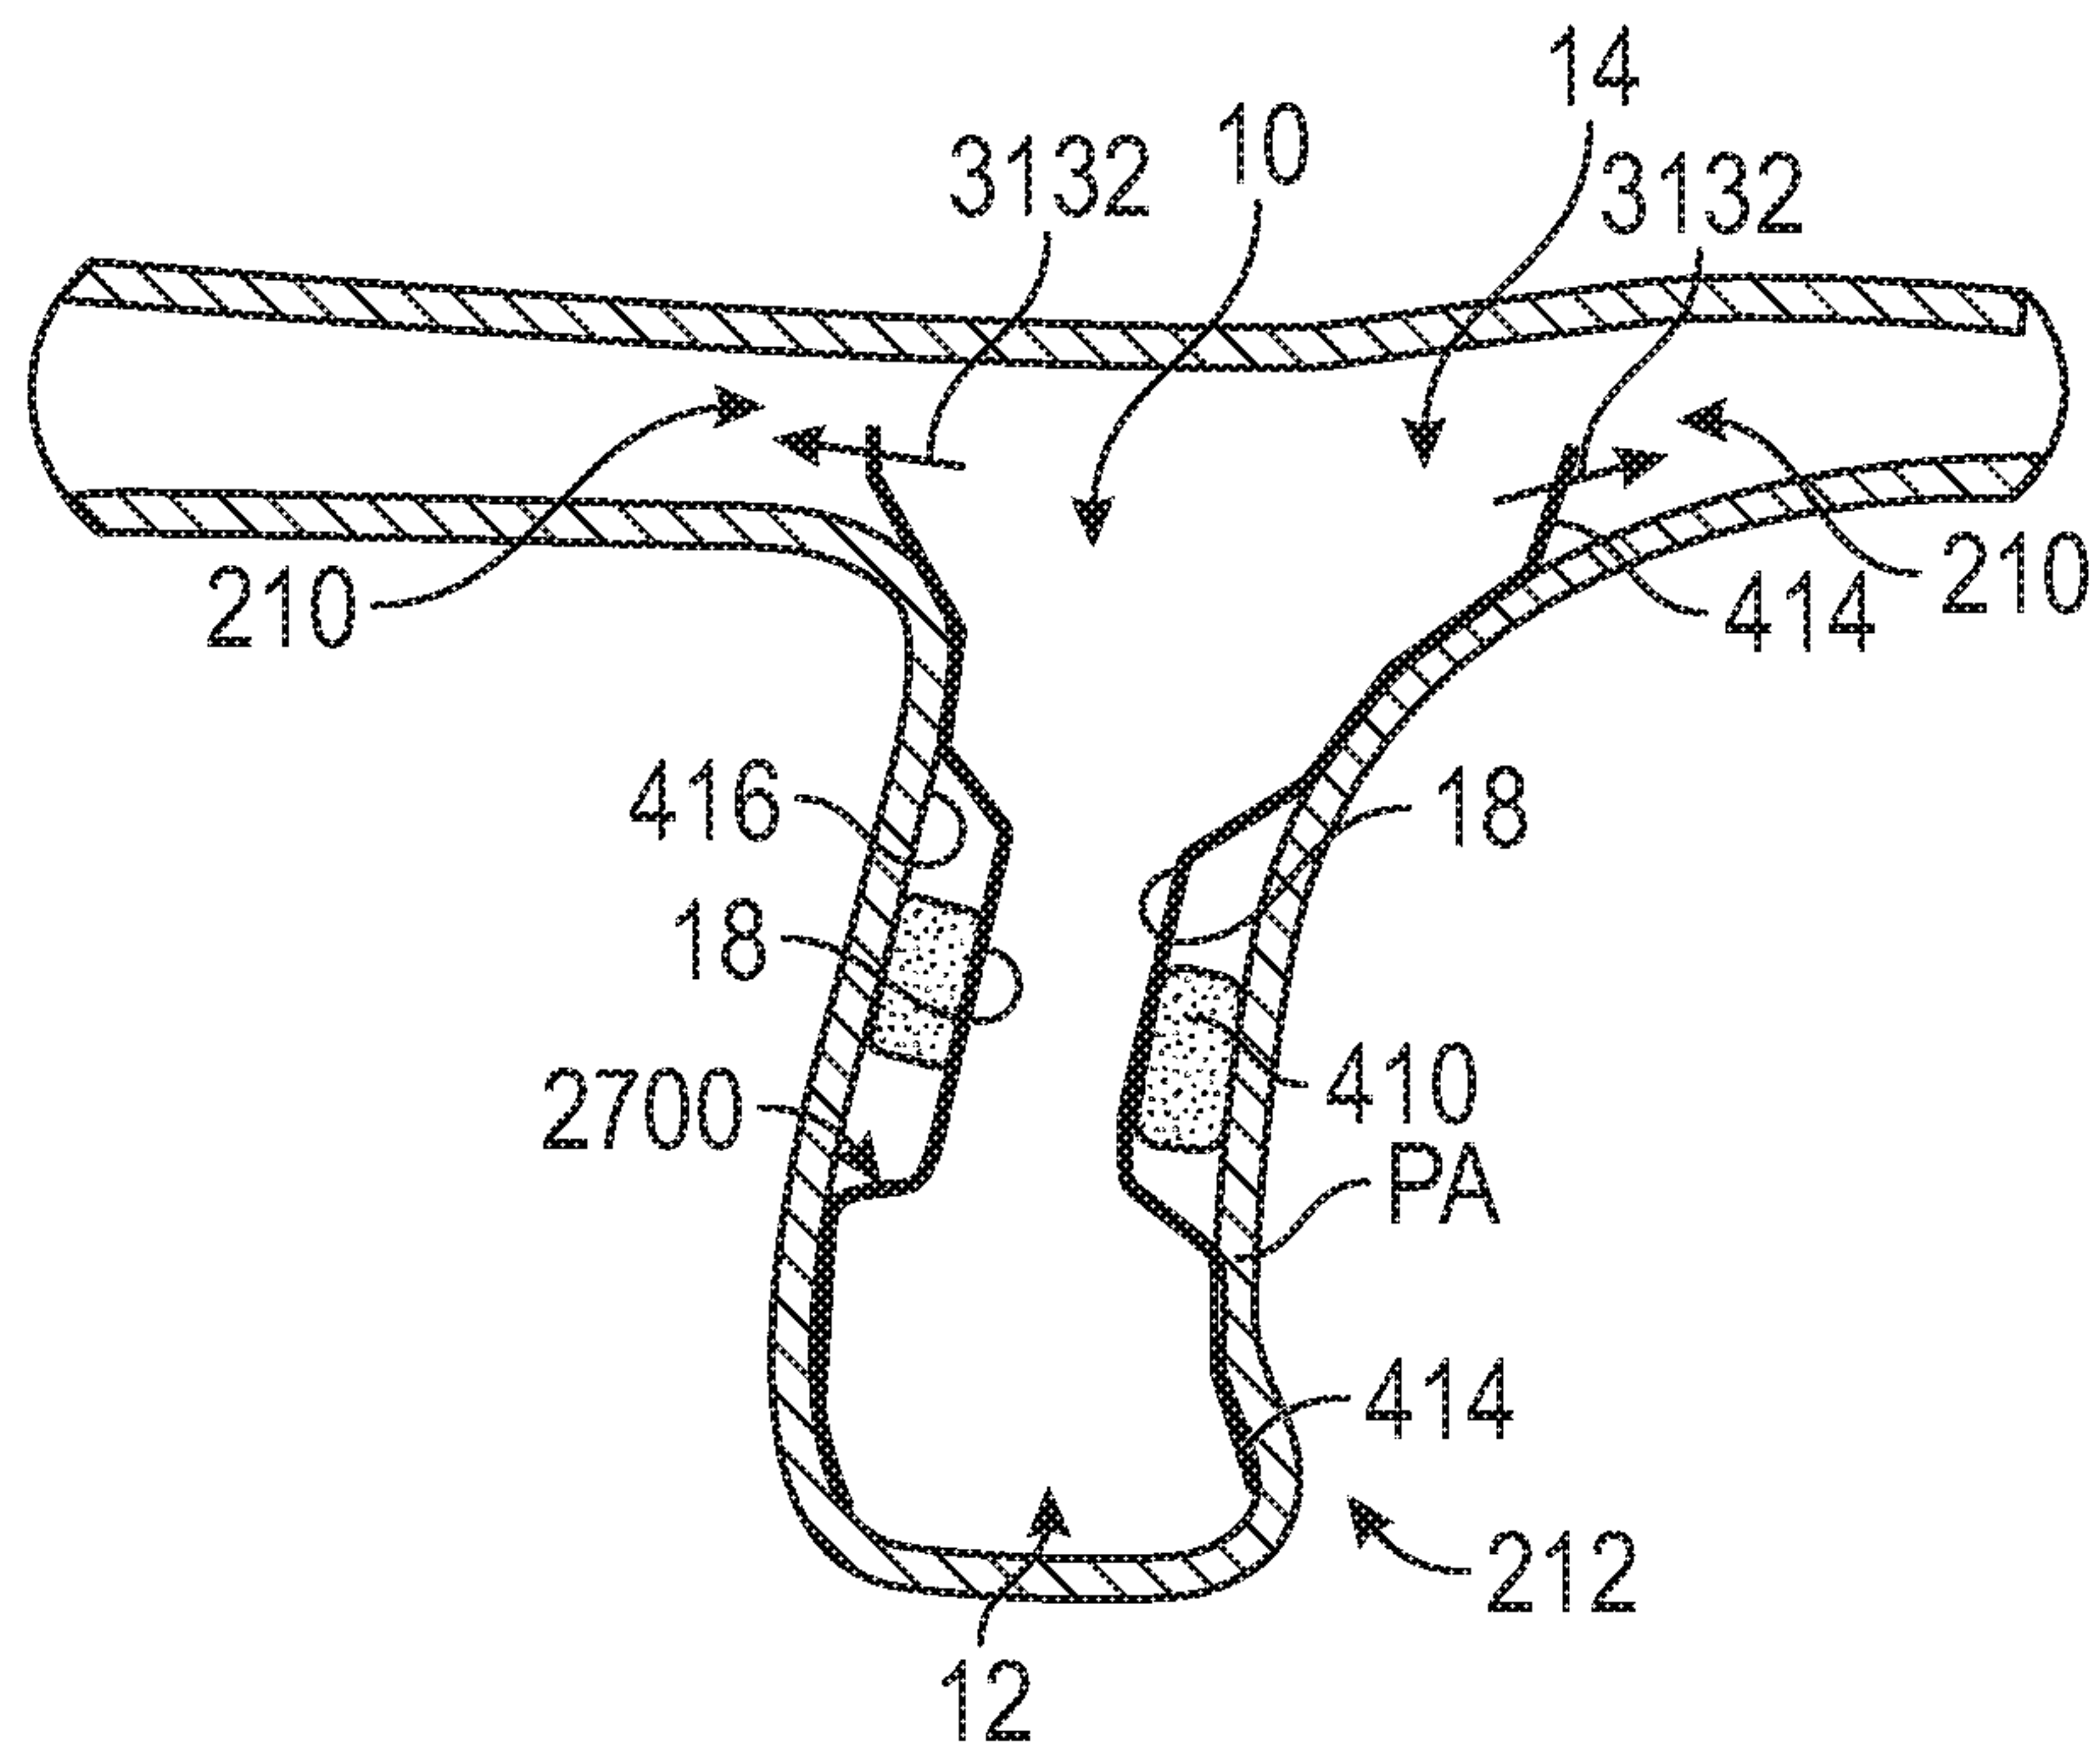


FIG. 31A

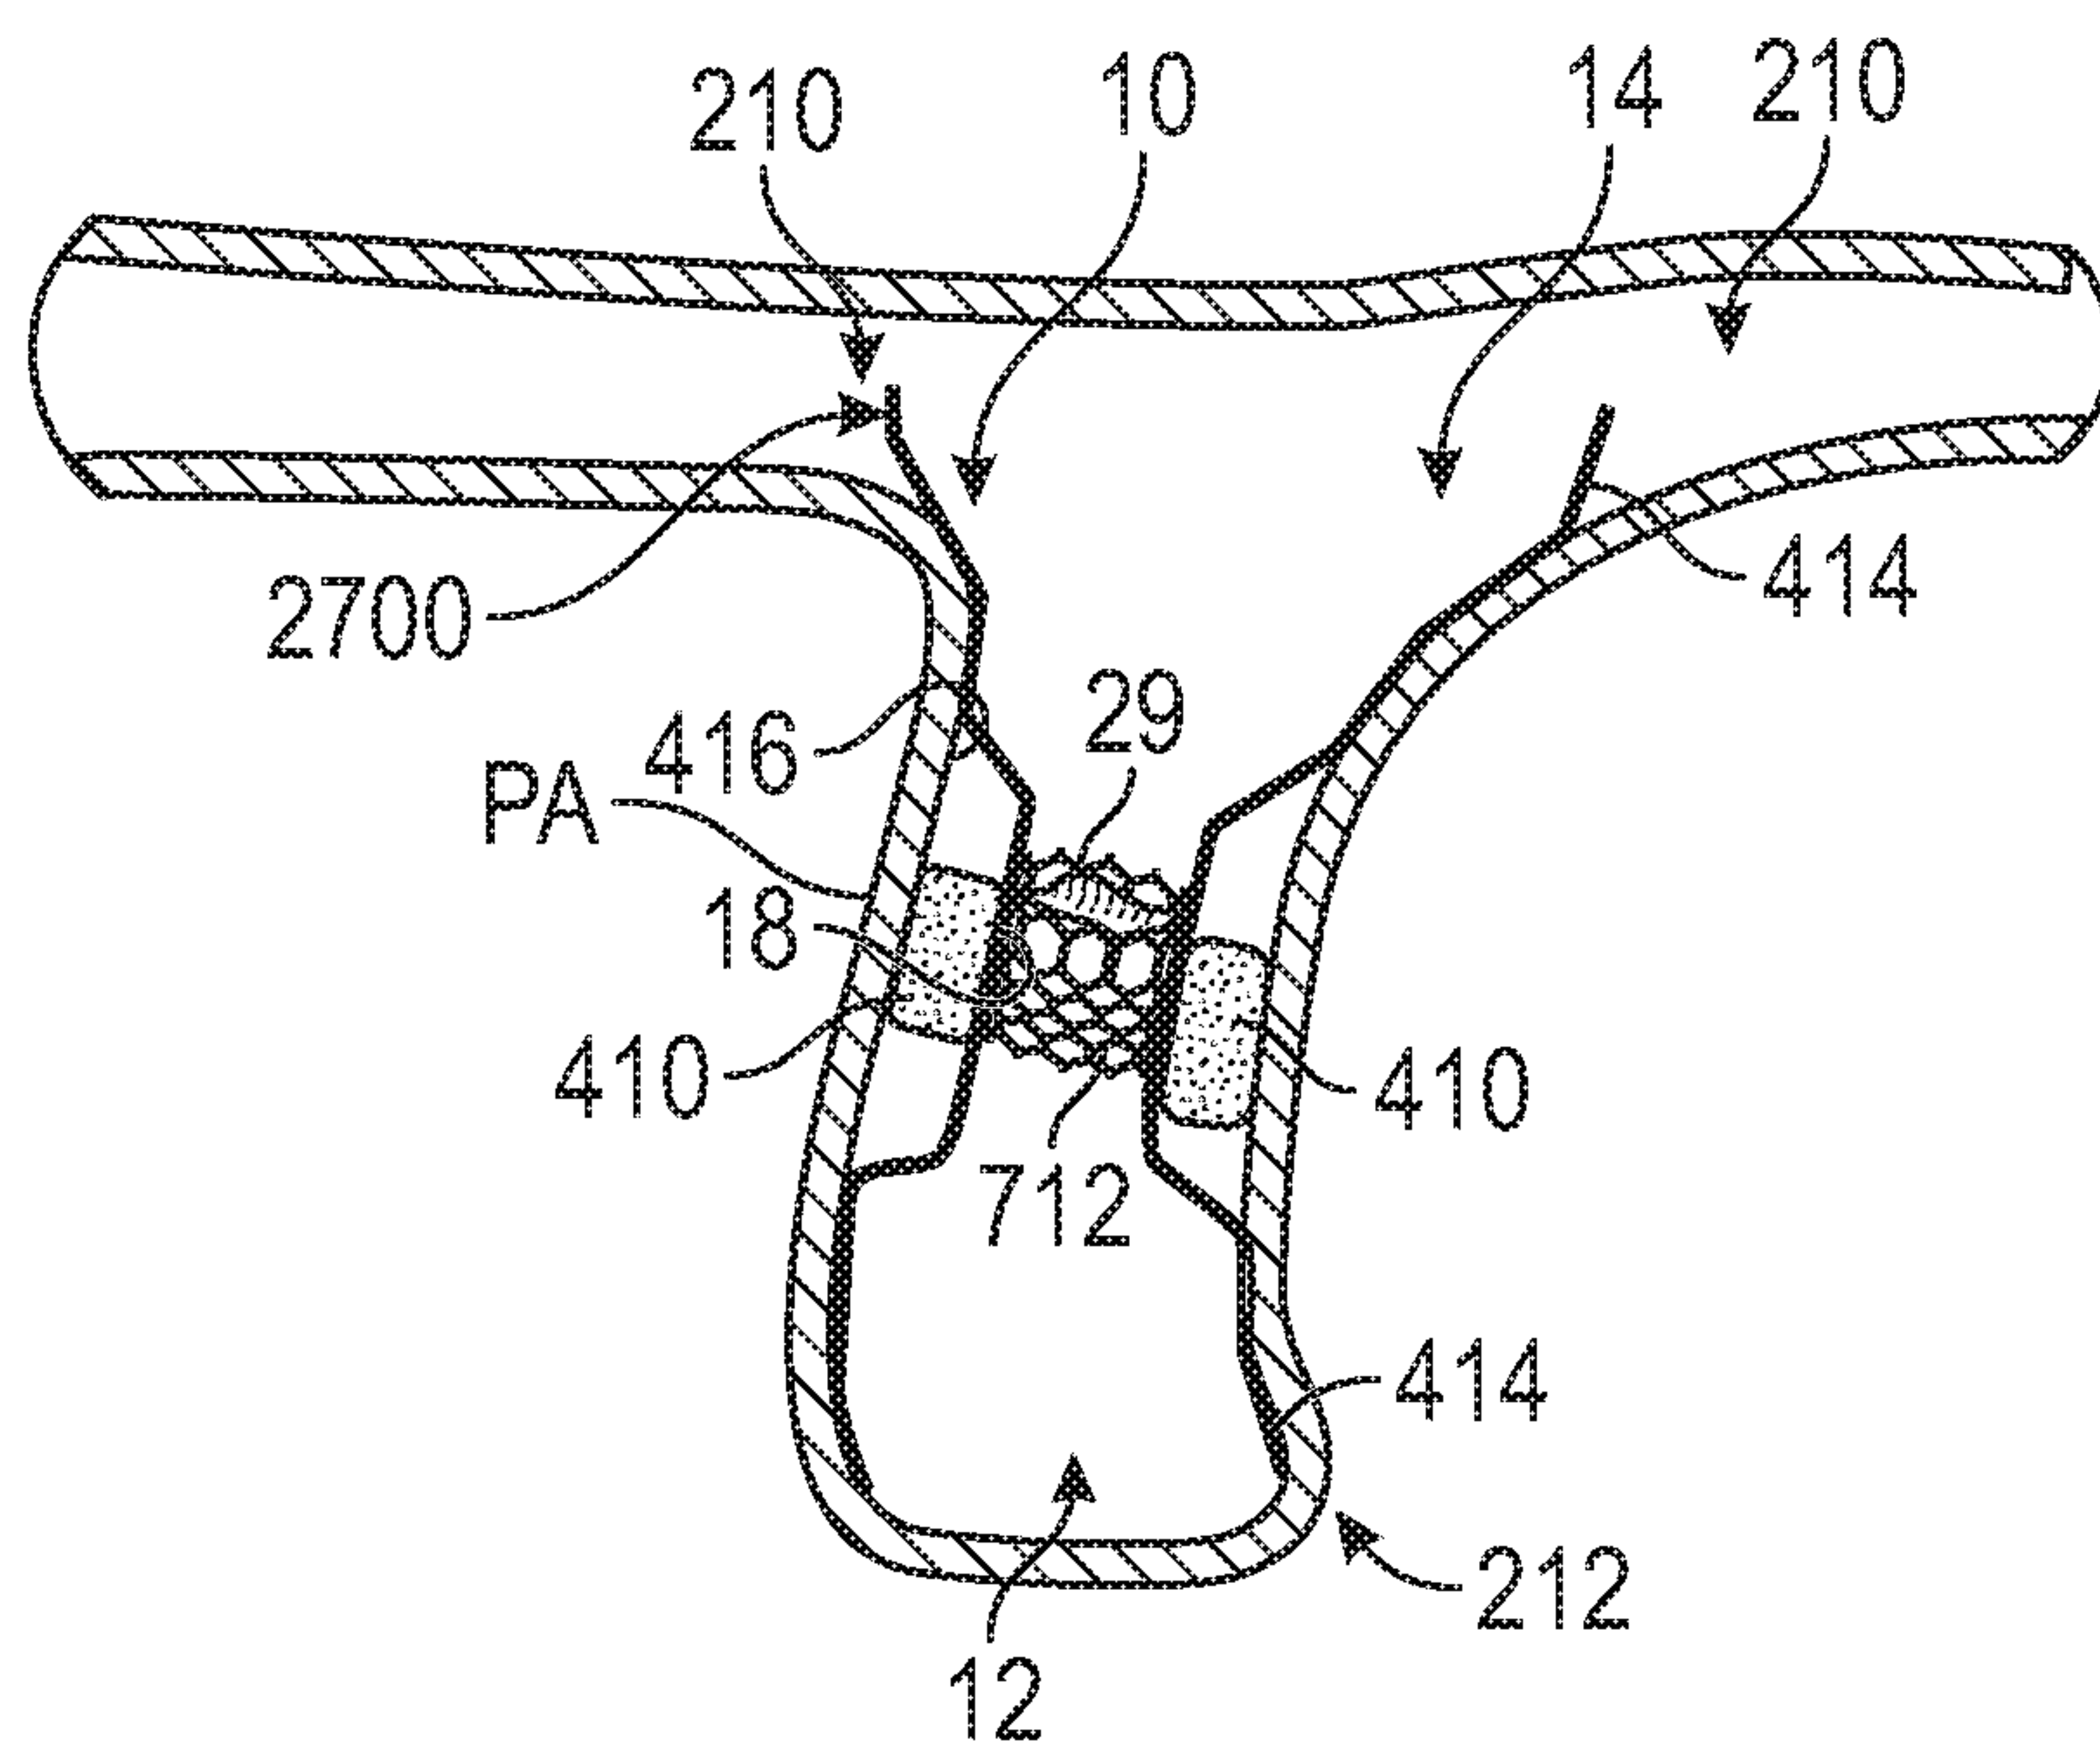


FIG. 31B

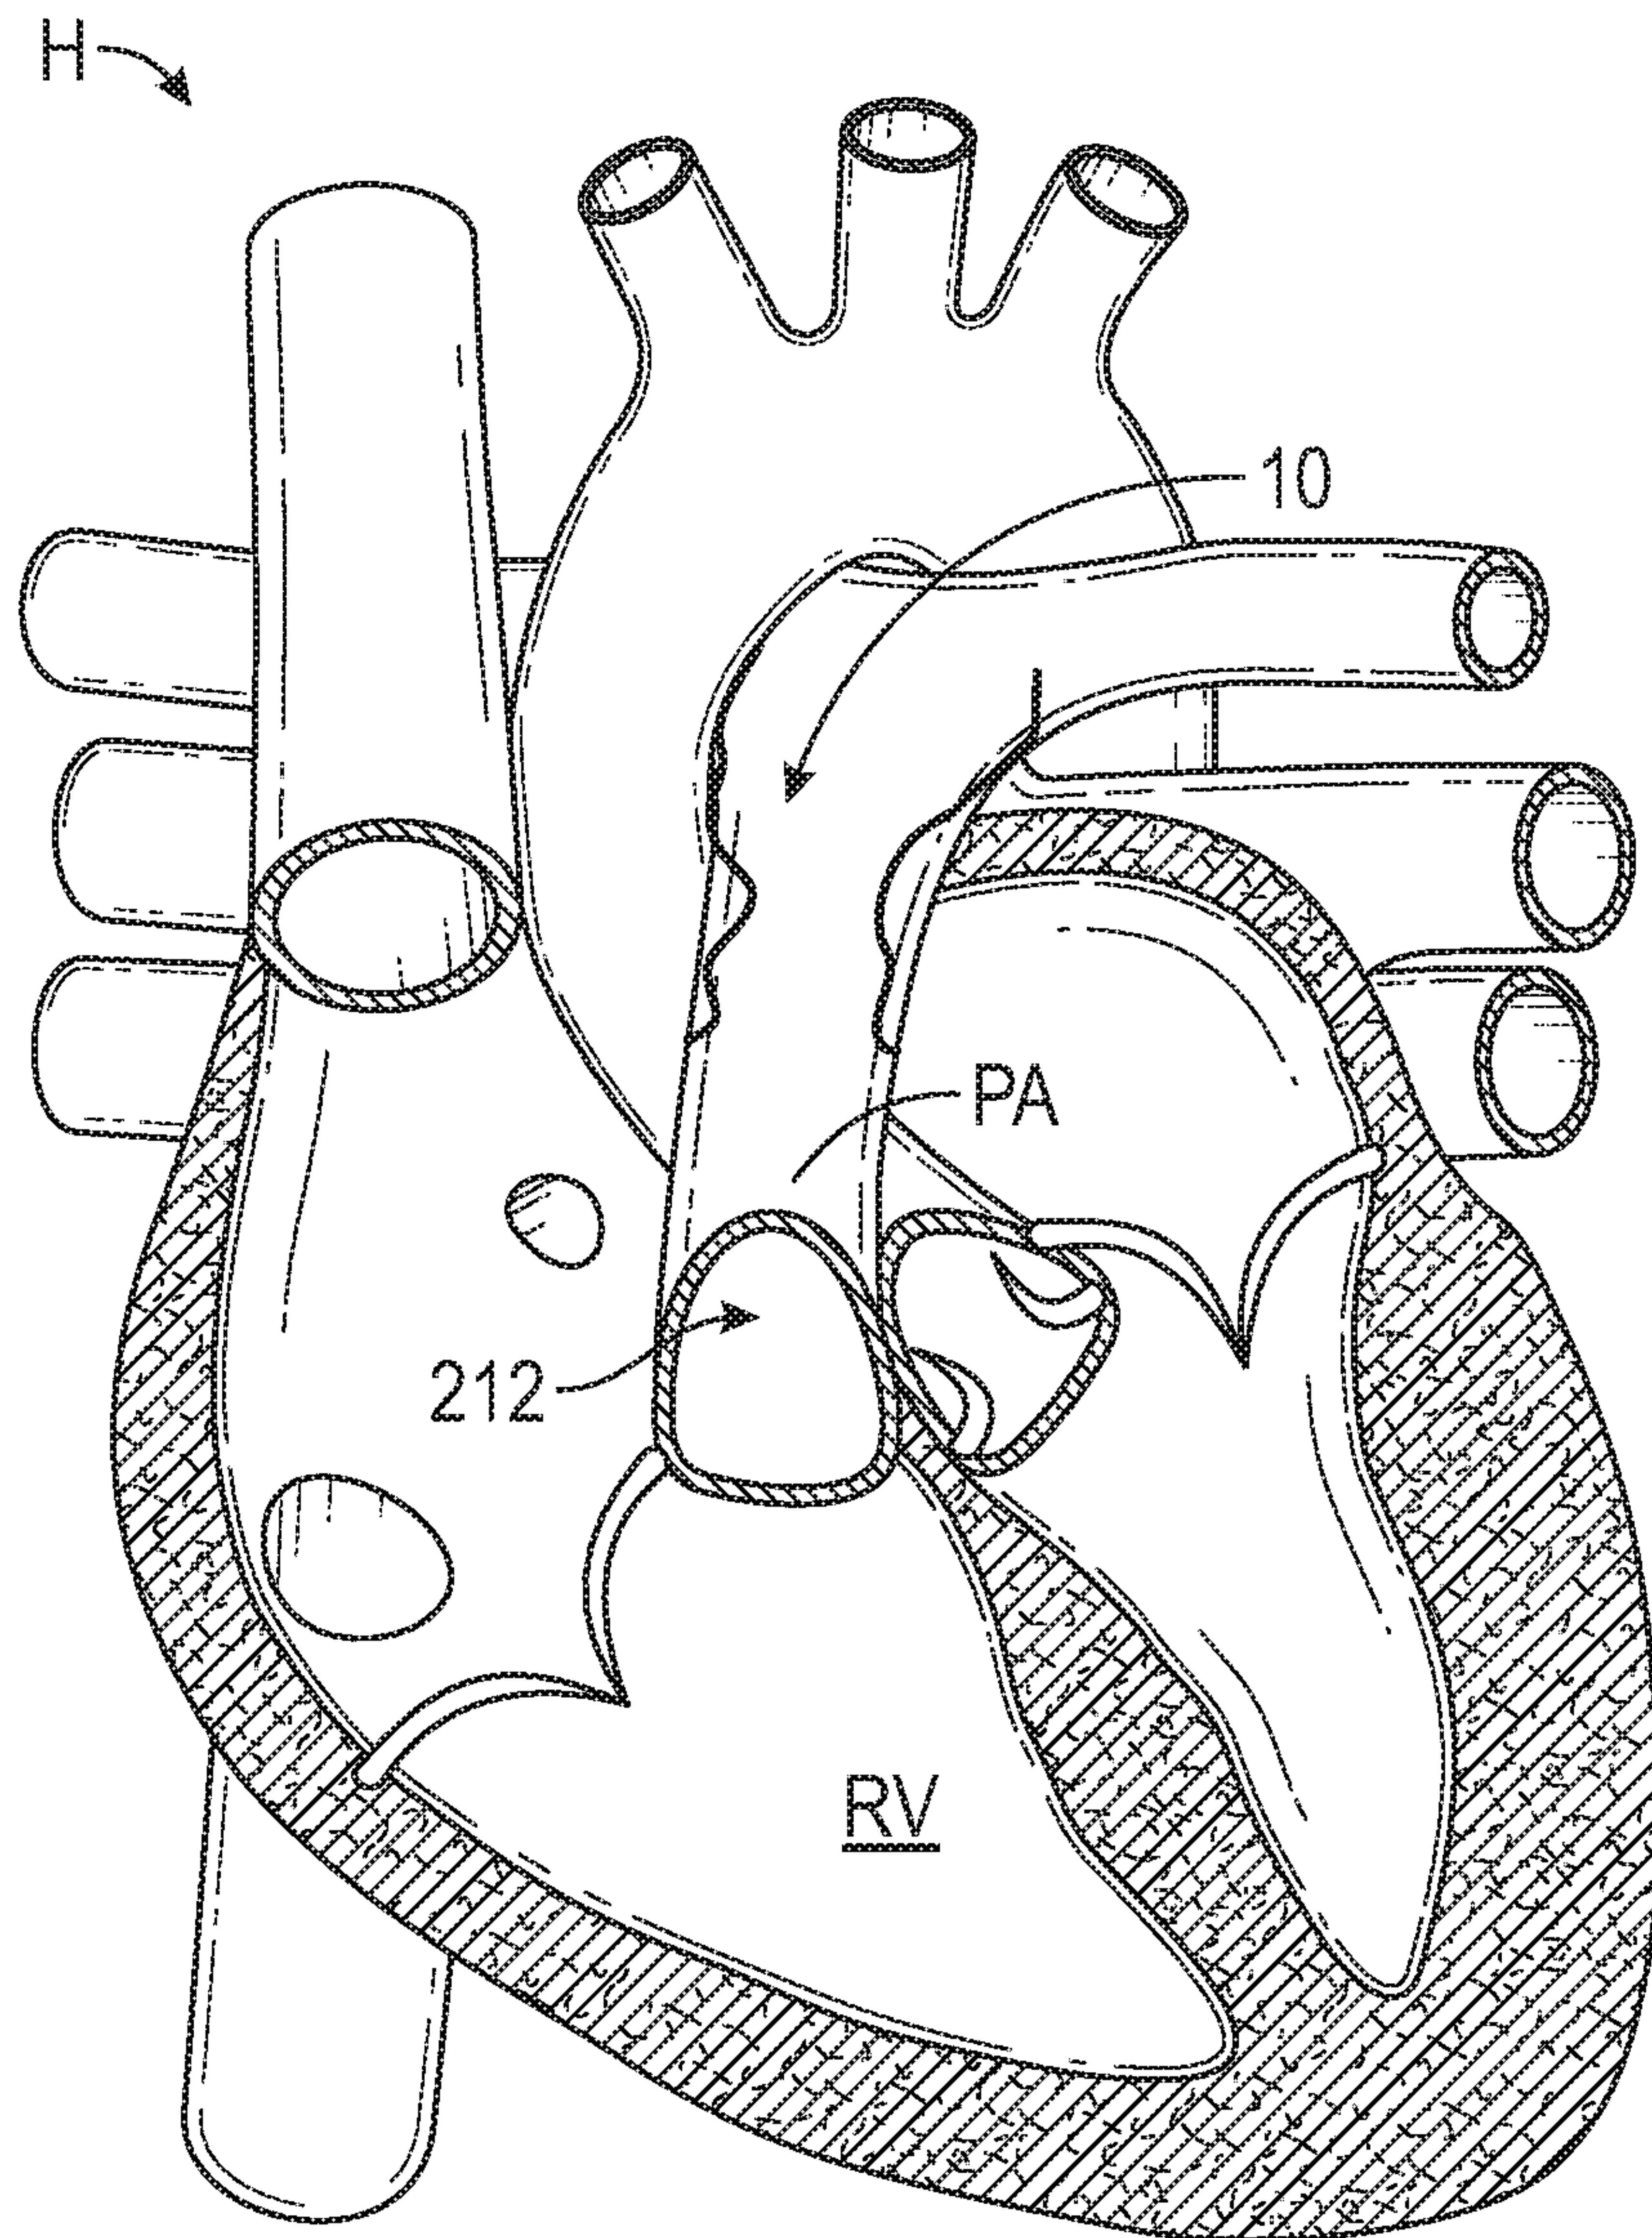


FIG. 32A

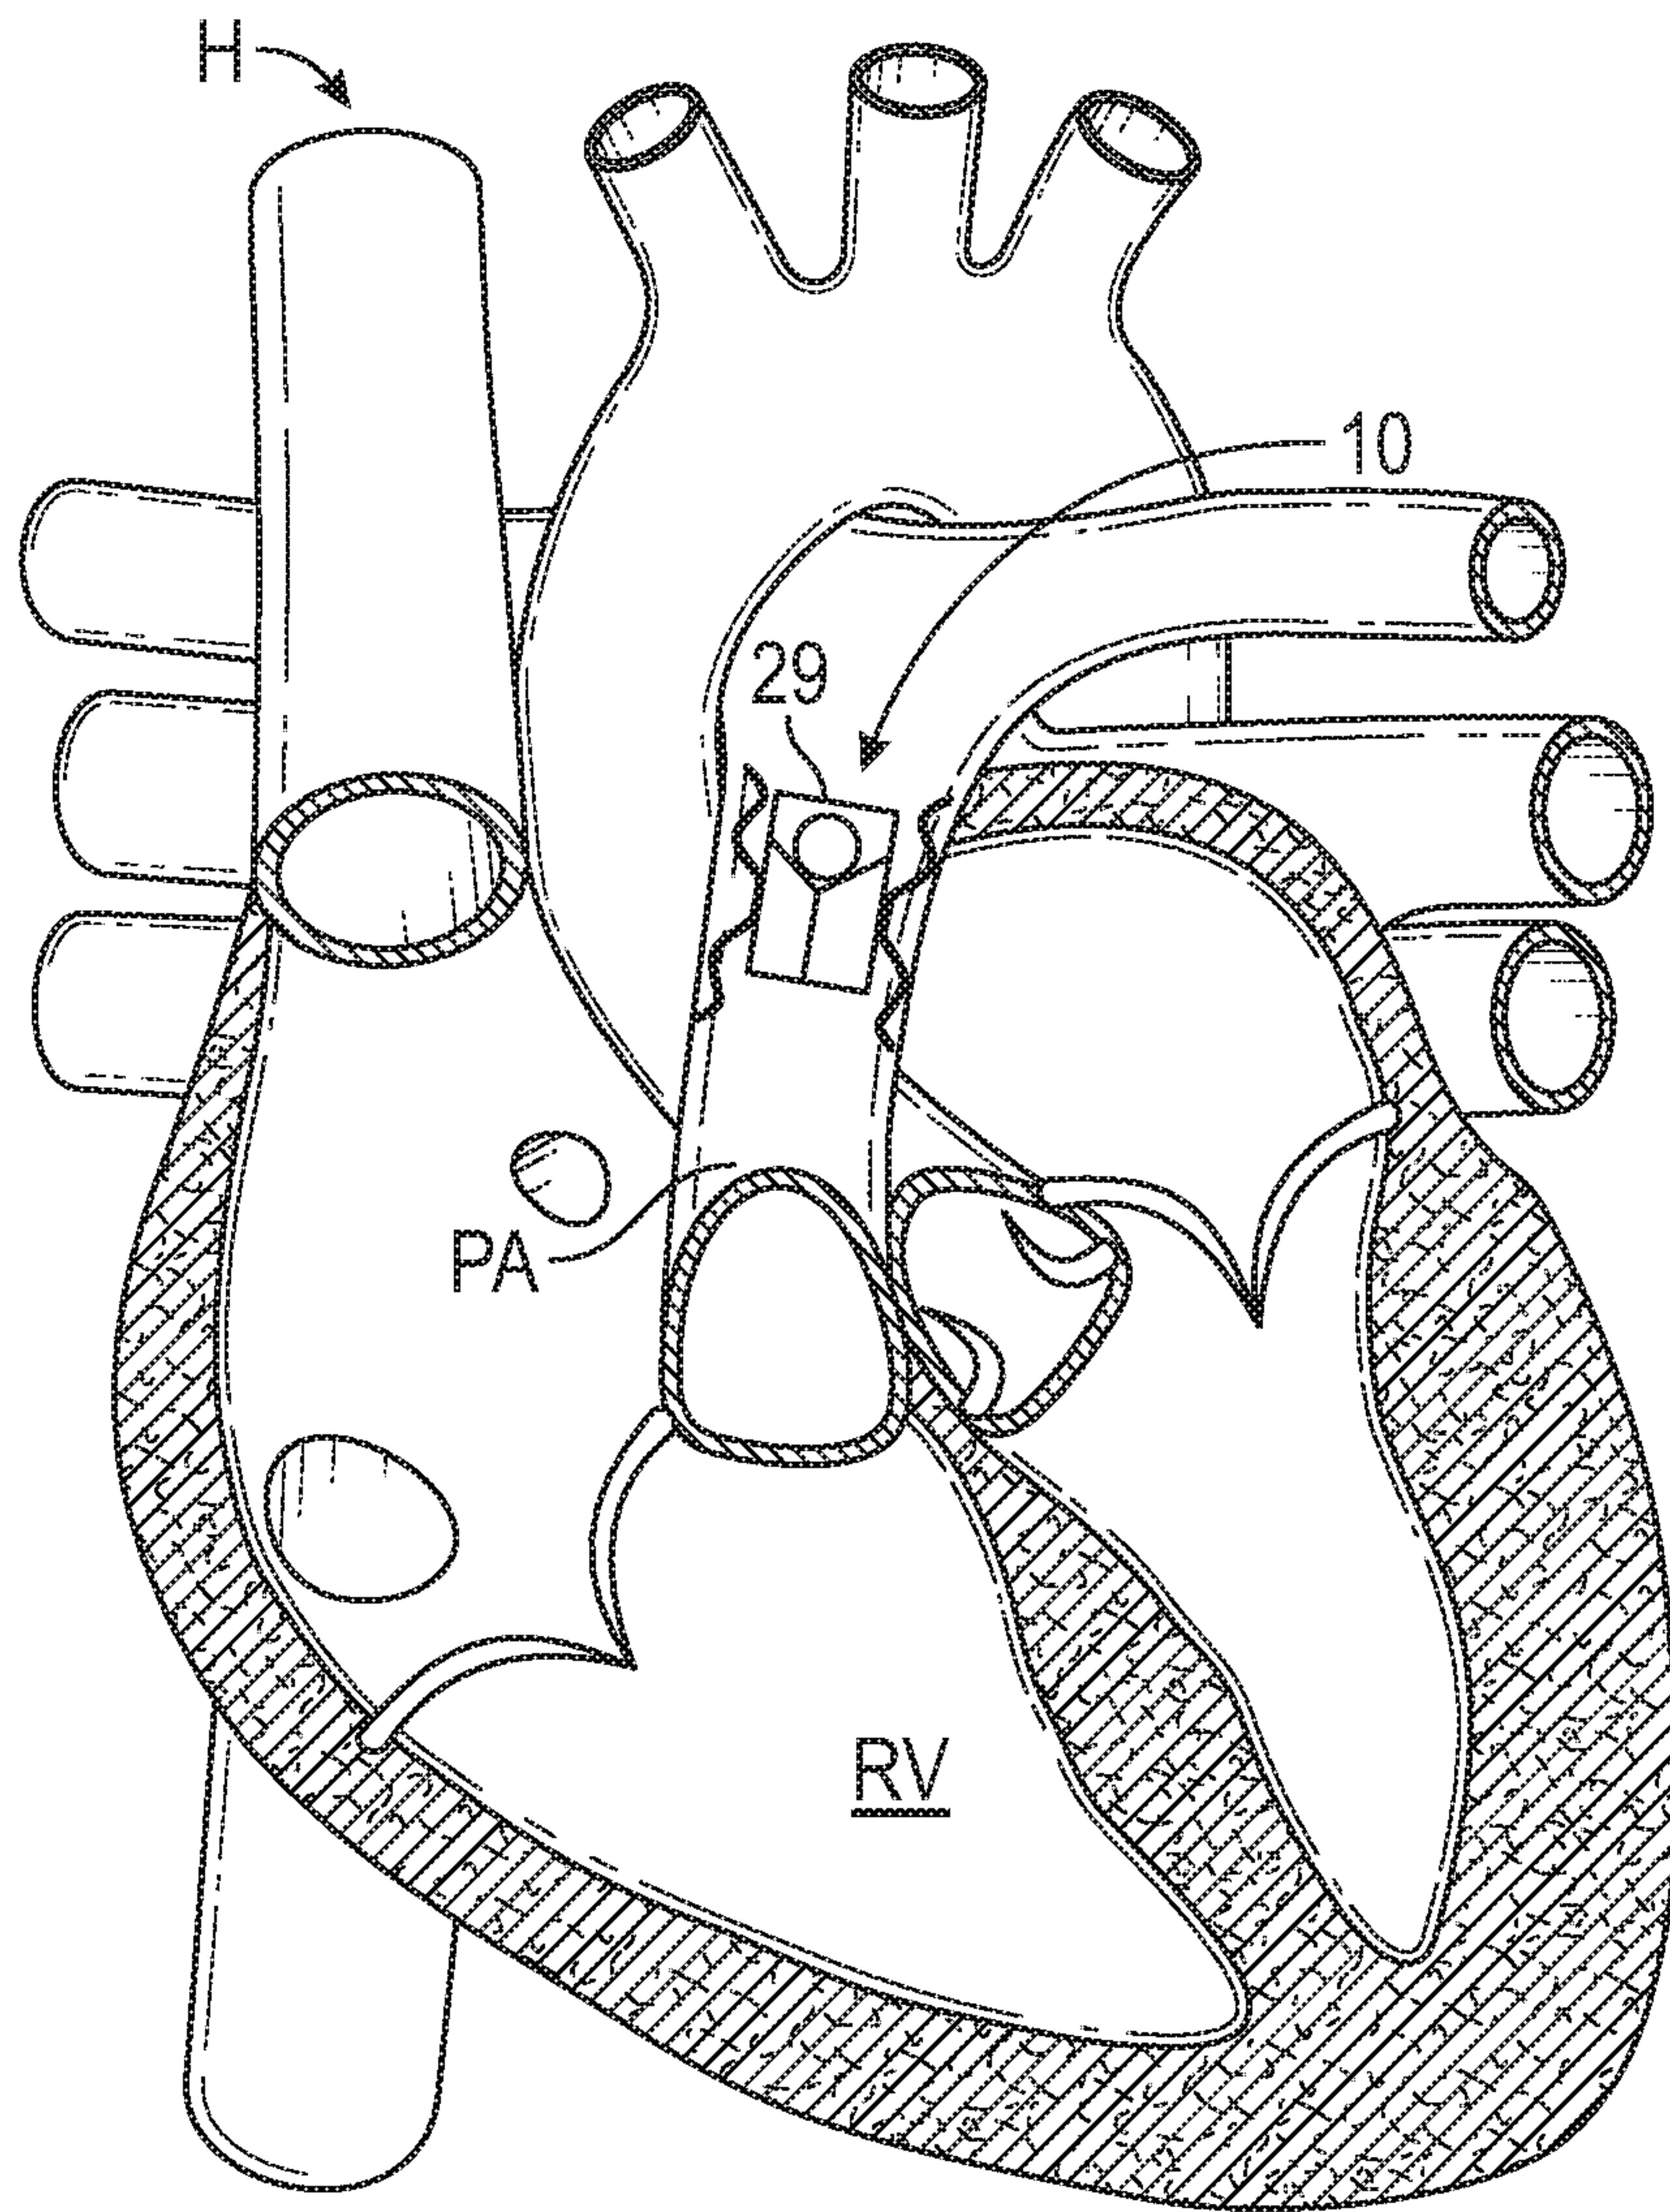


FIG. 32B

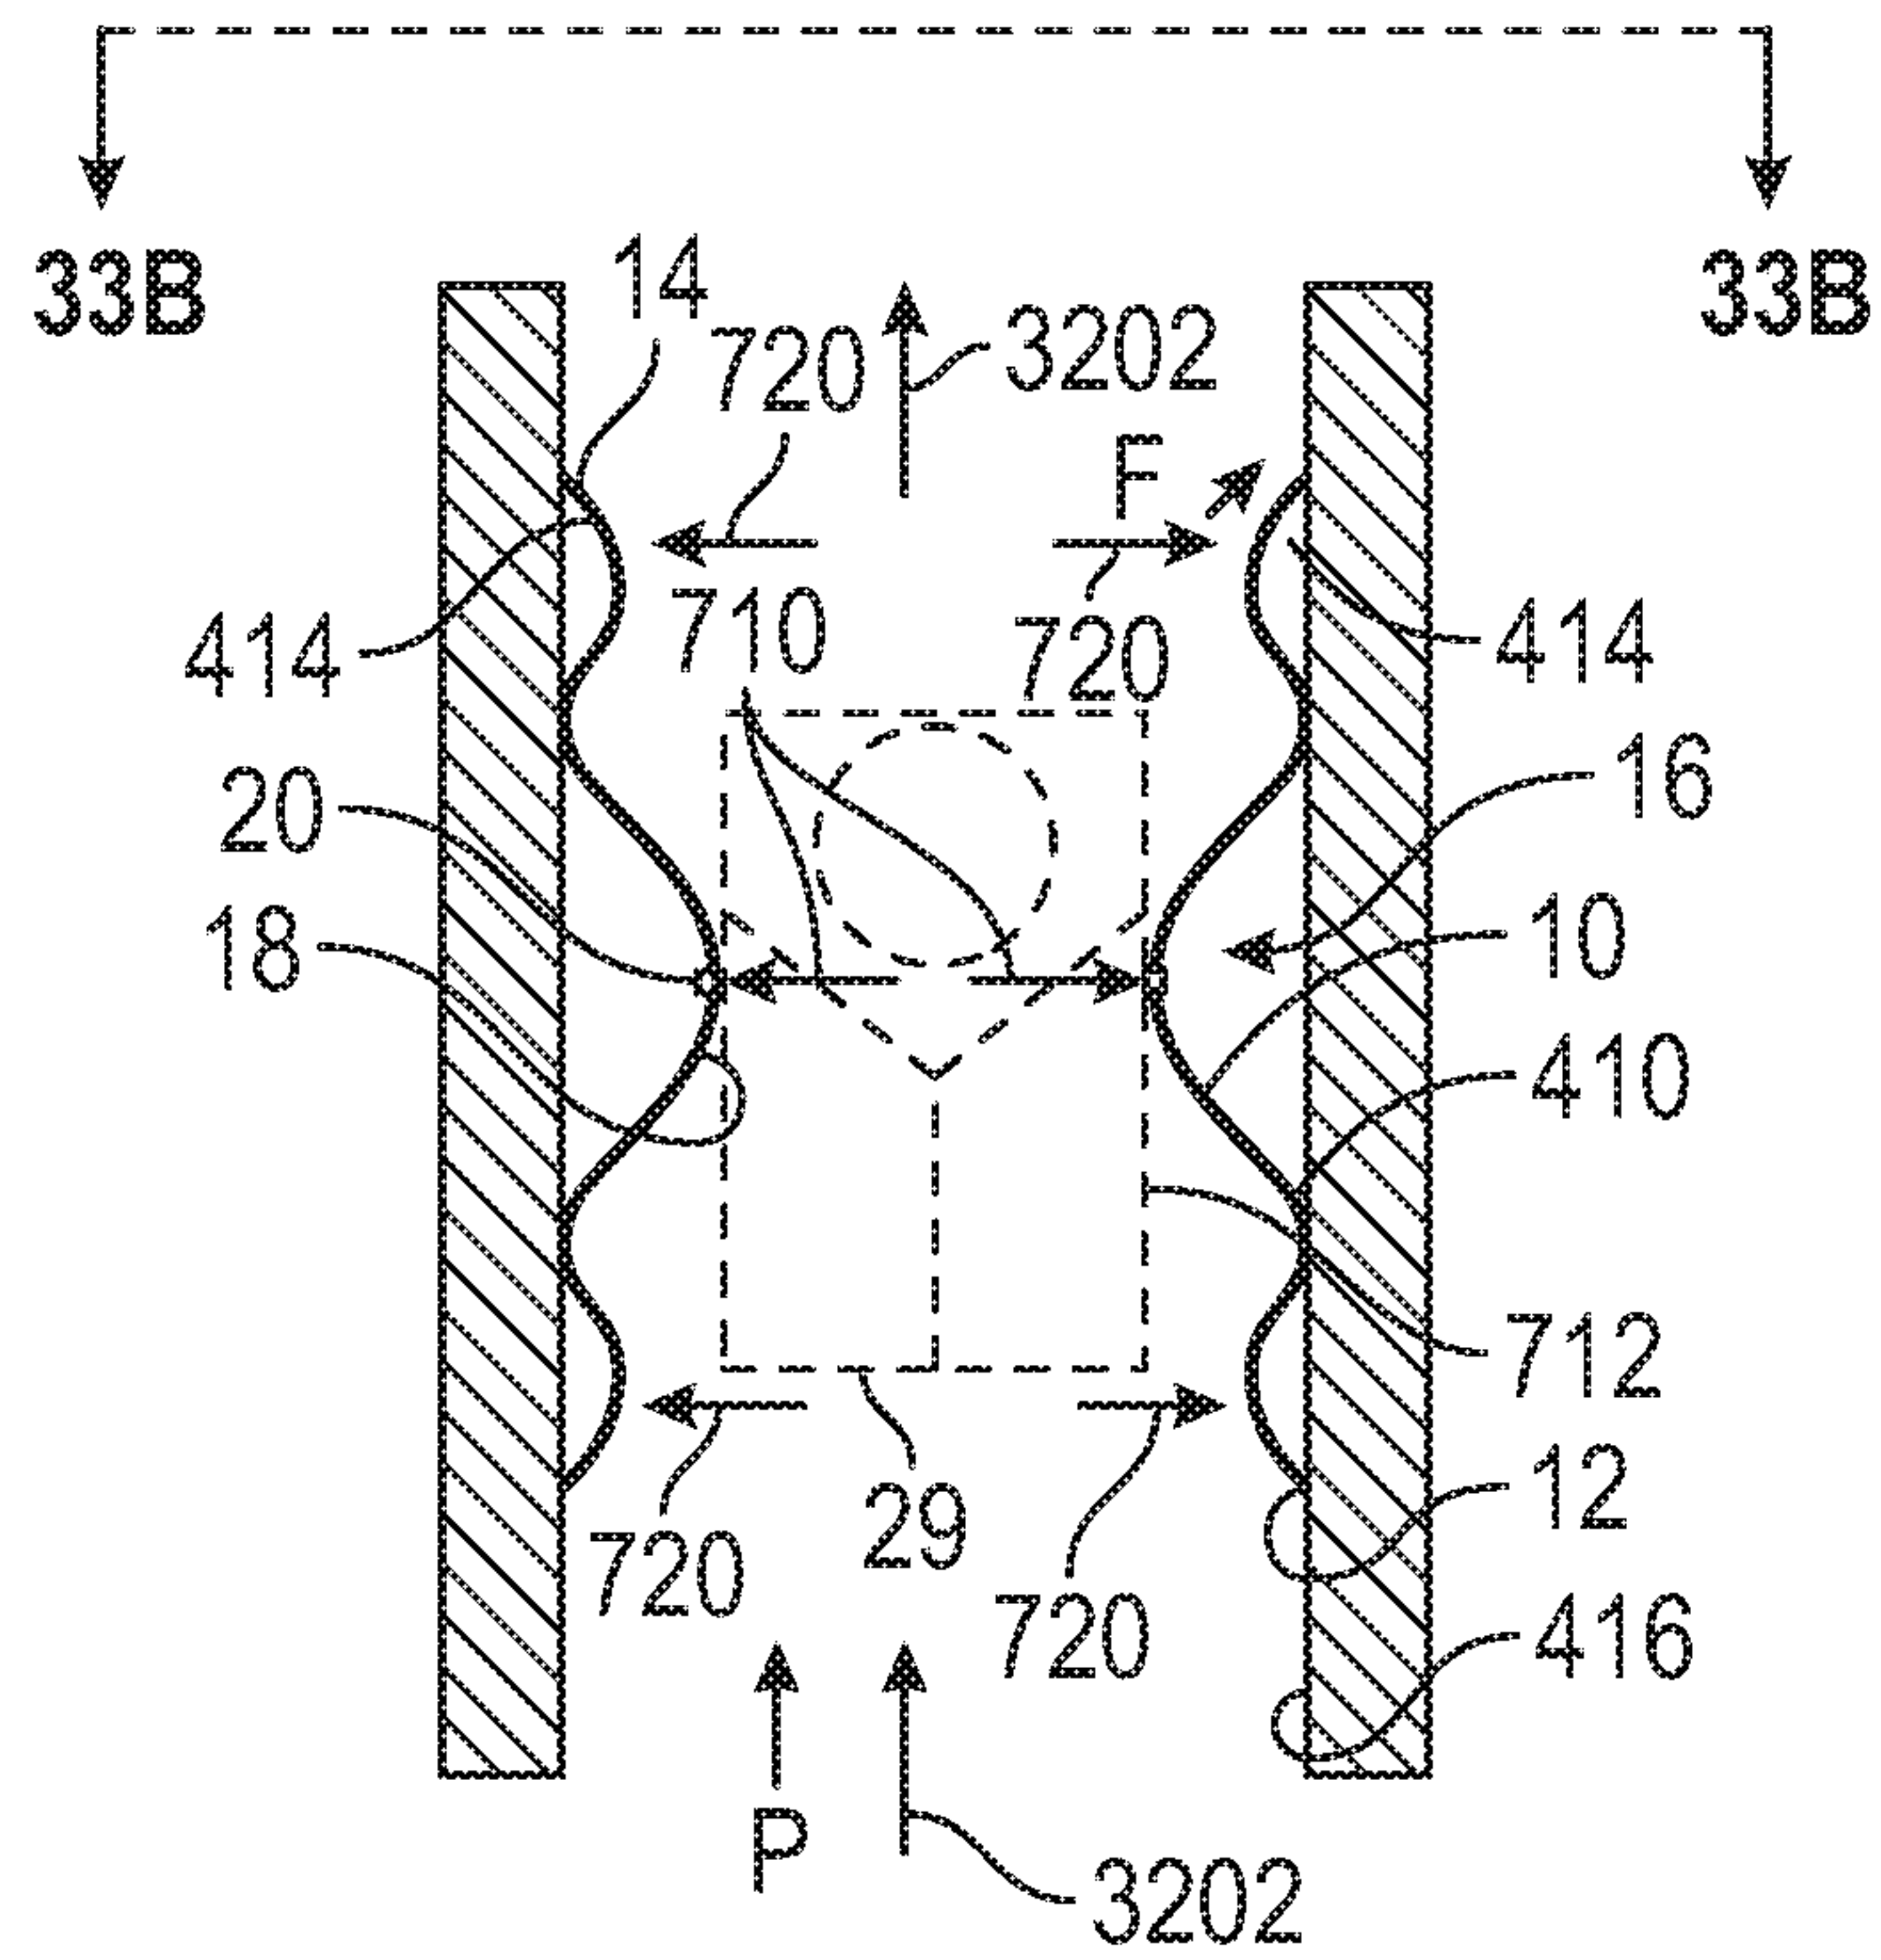


FIG. 33A

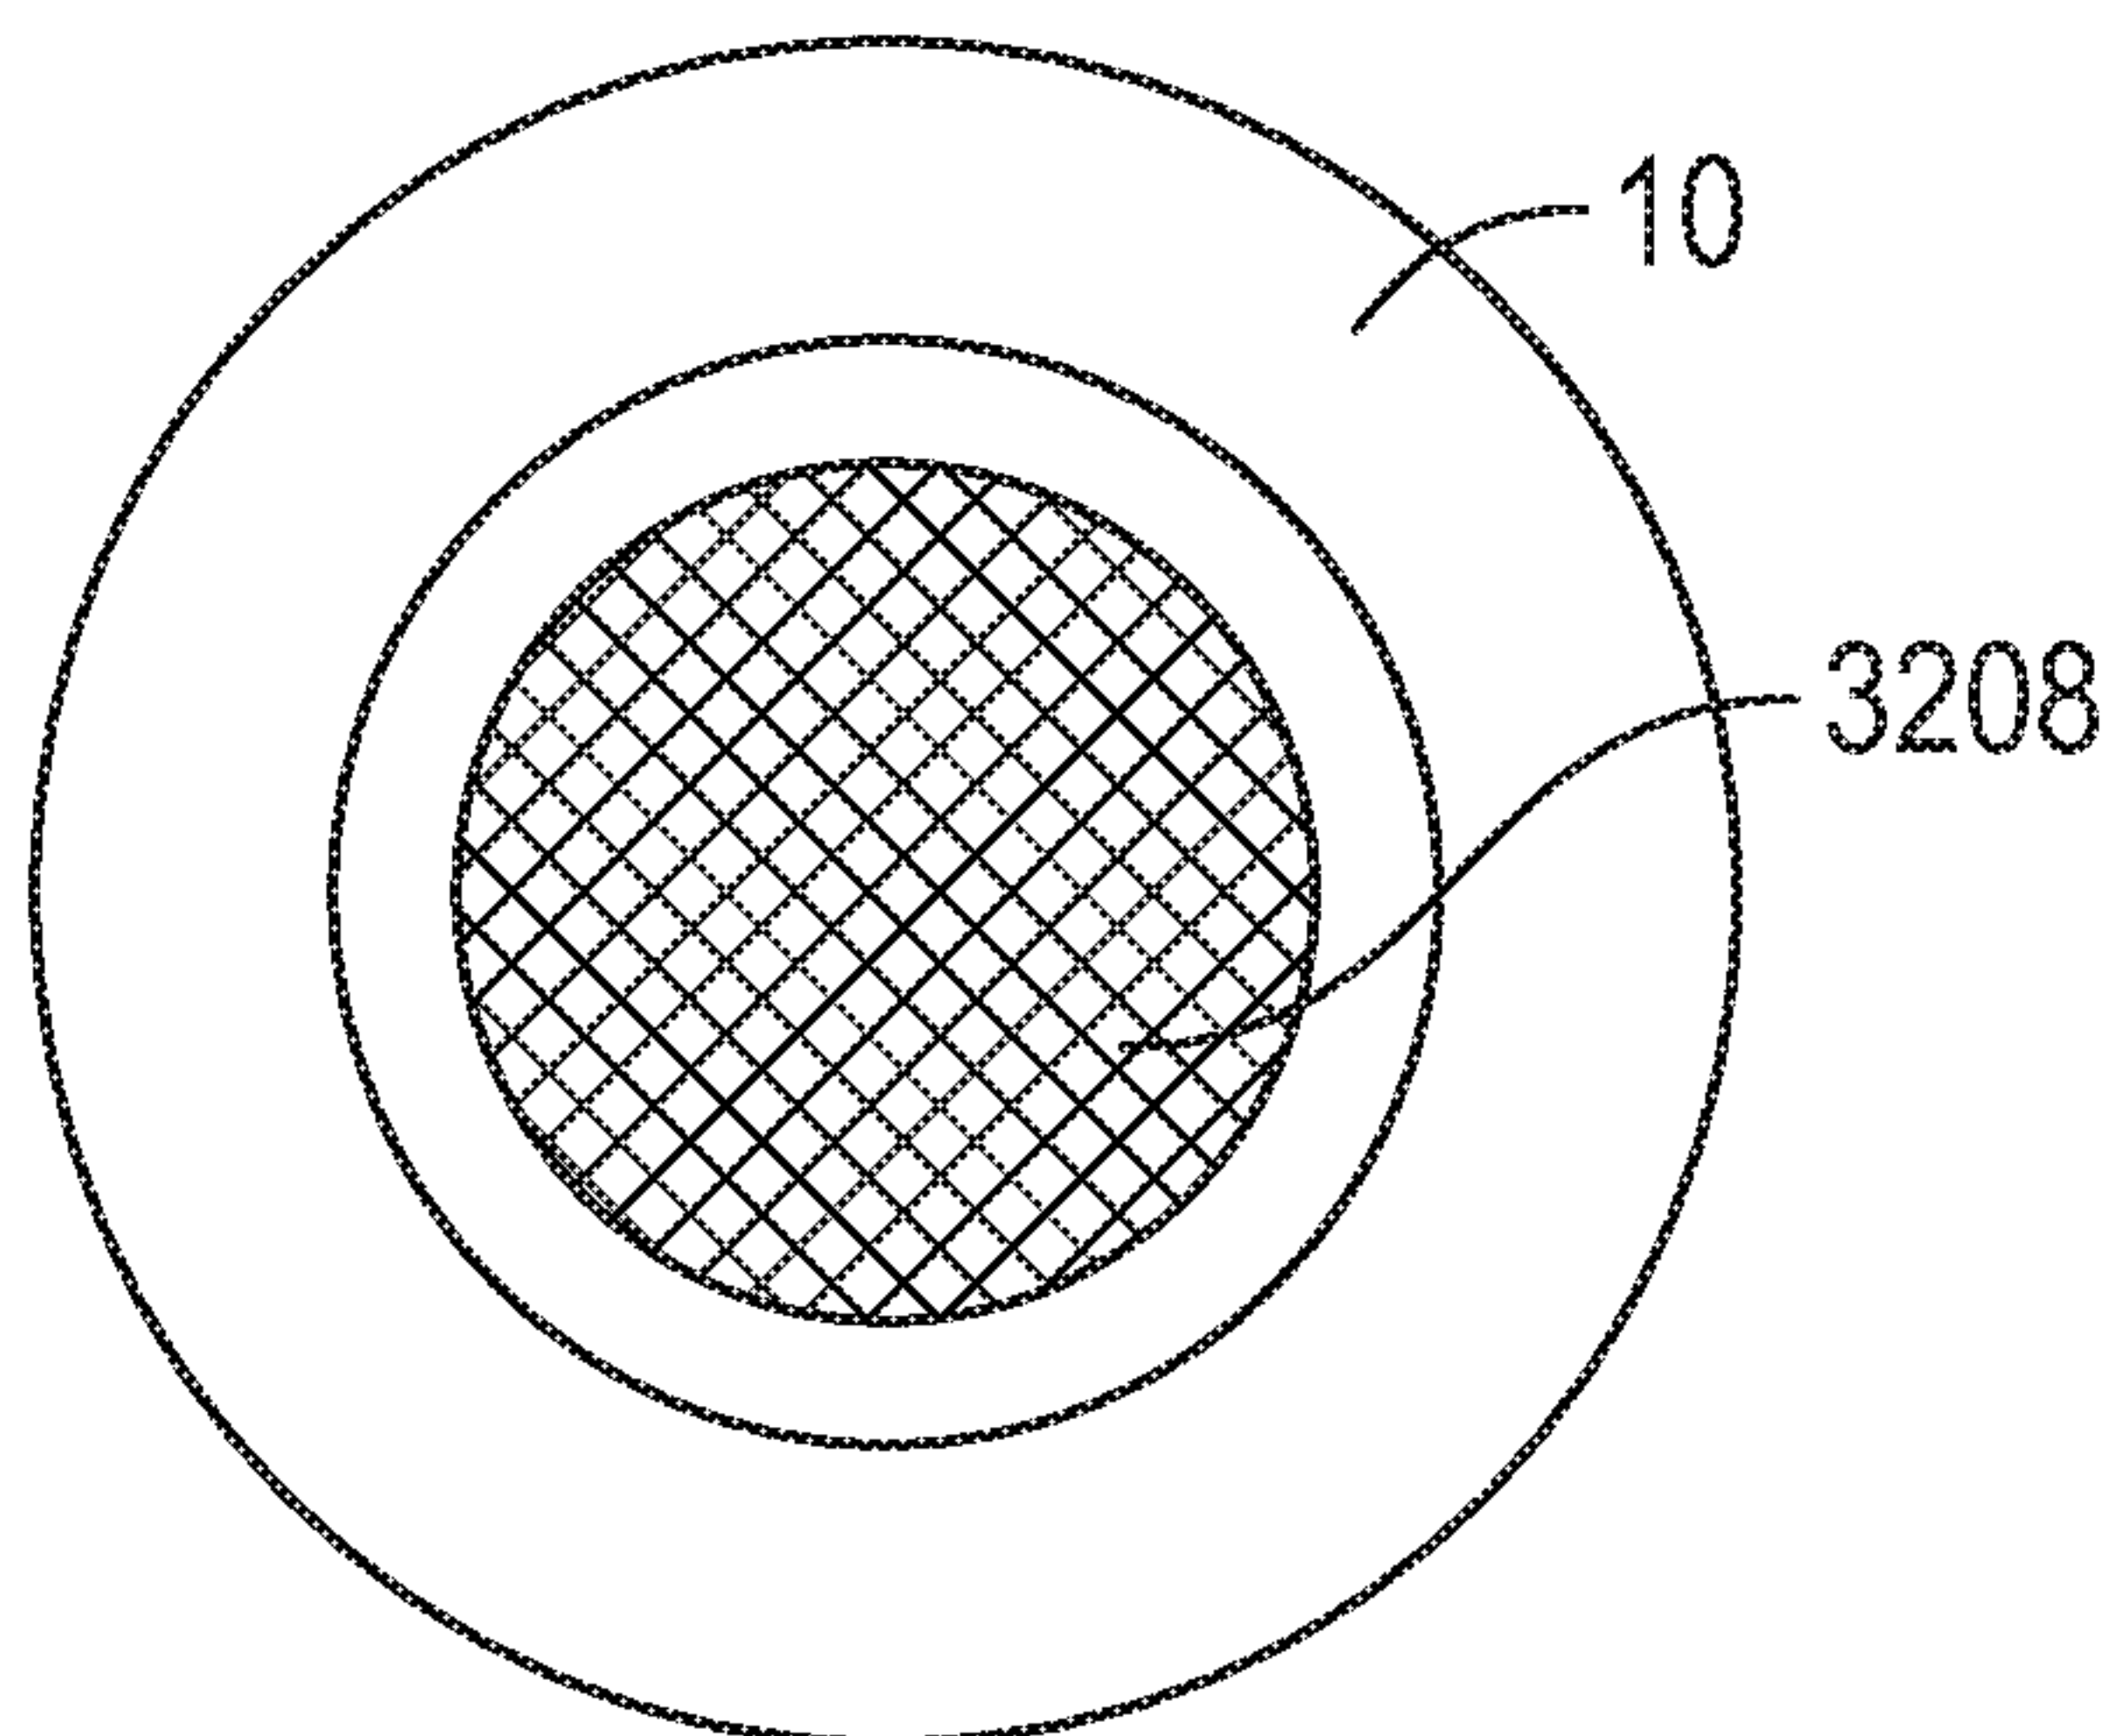


FIG. 33B

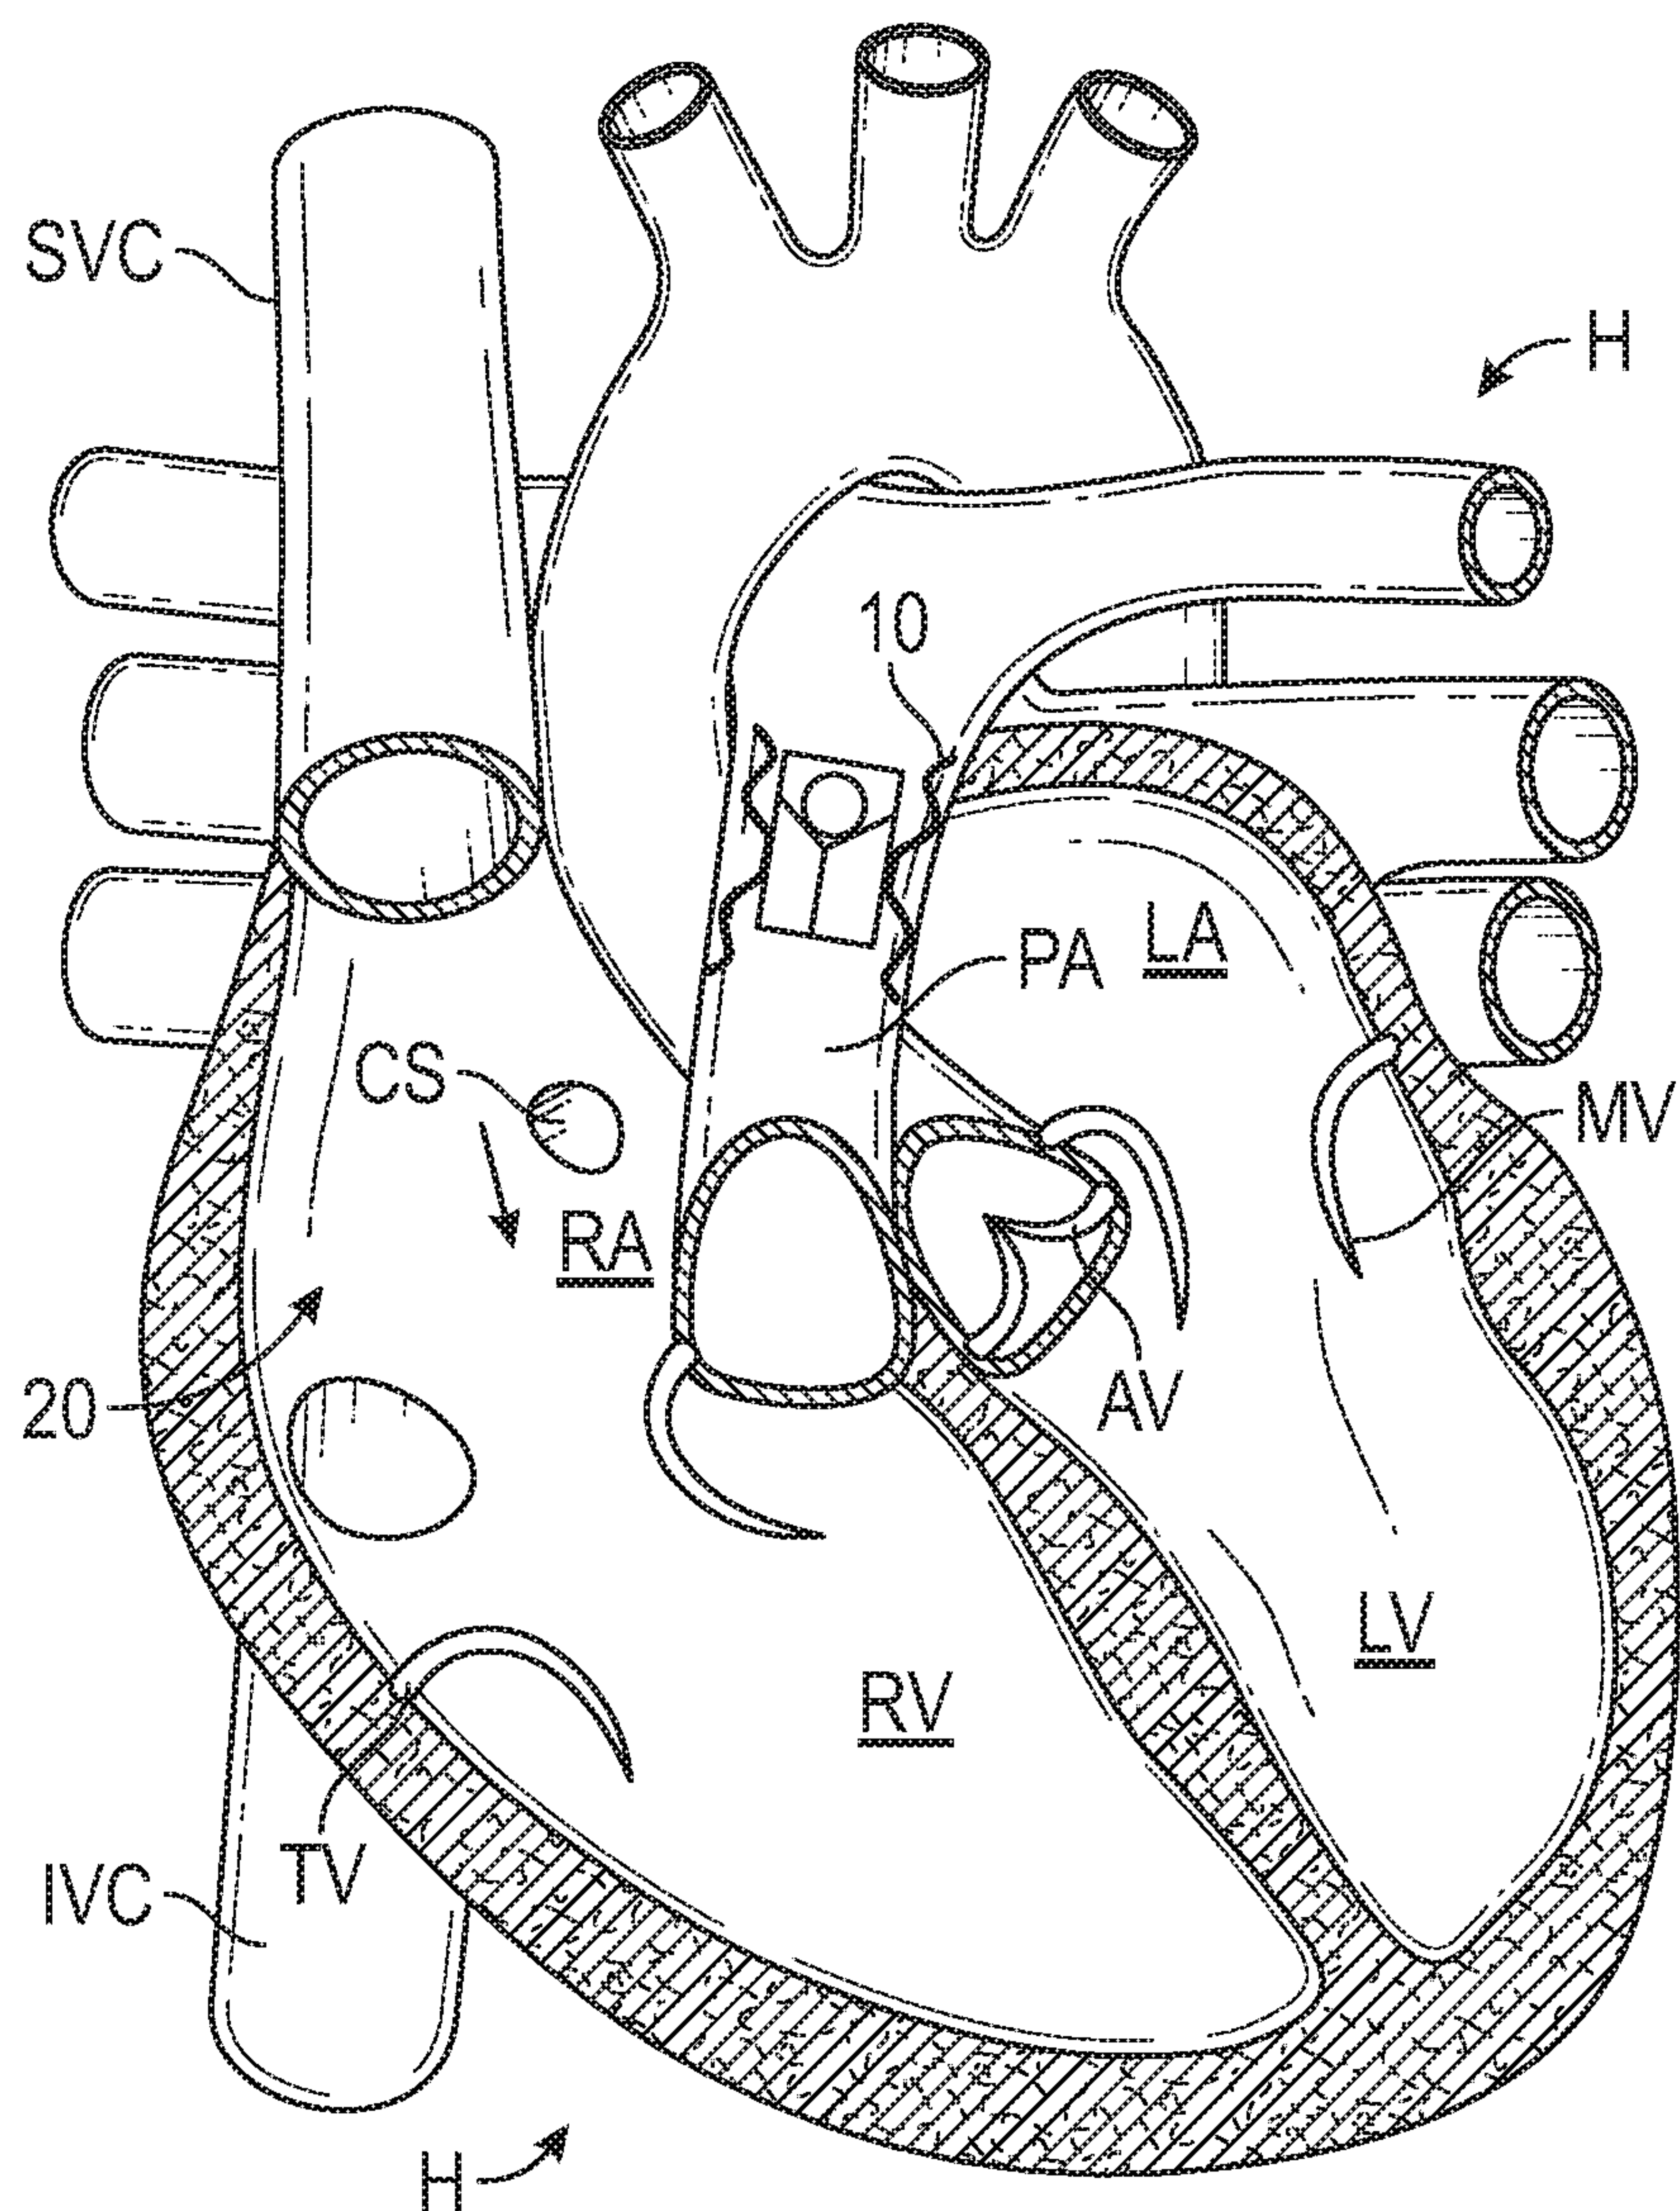


FIG. 34

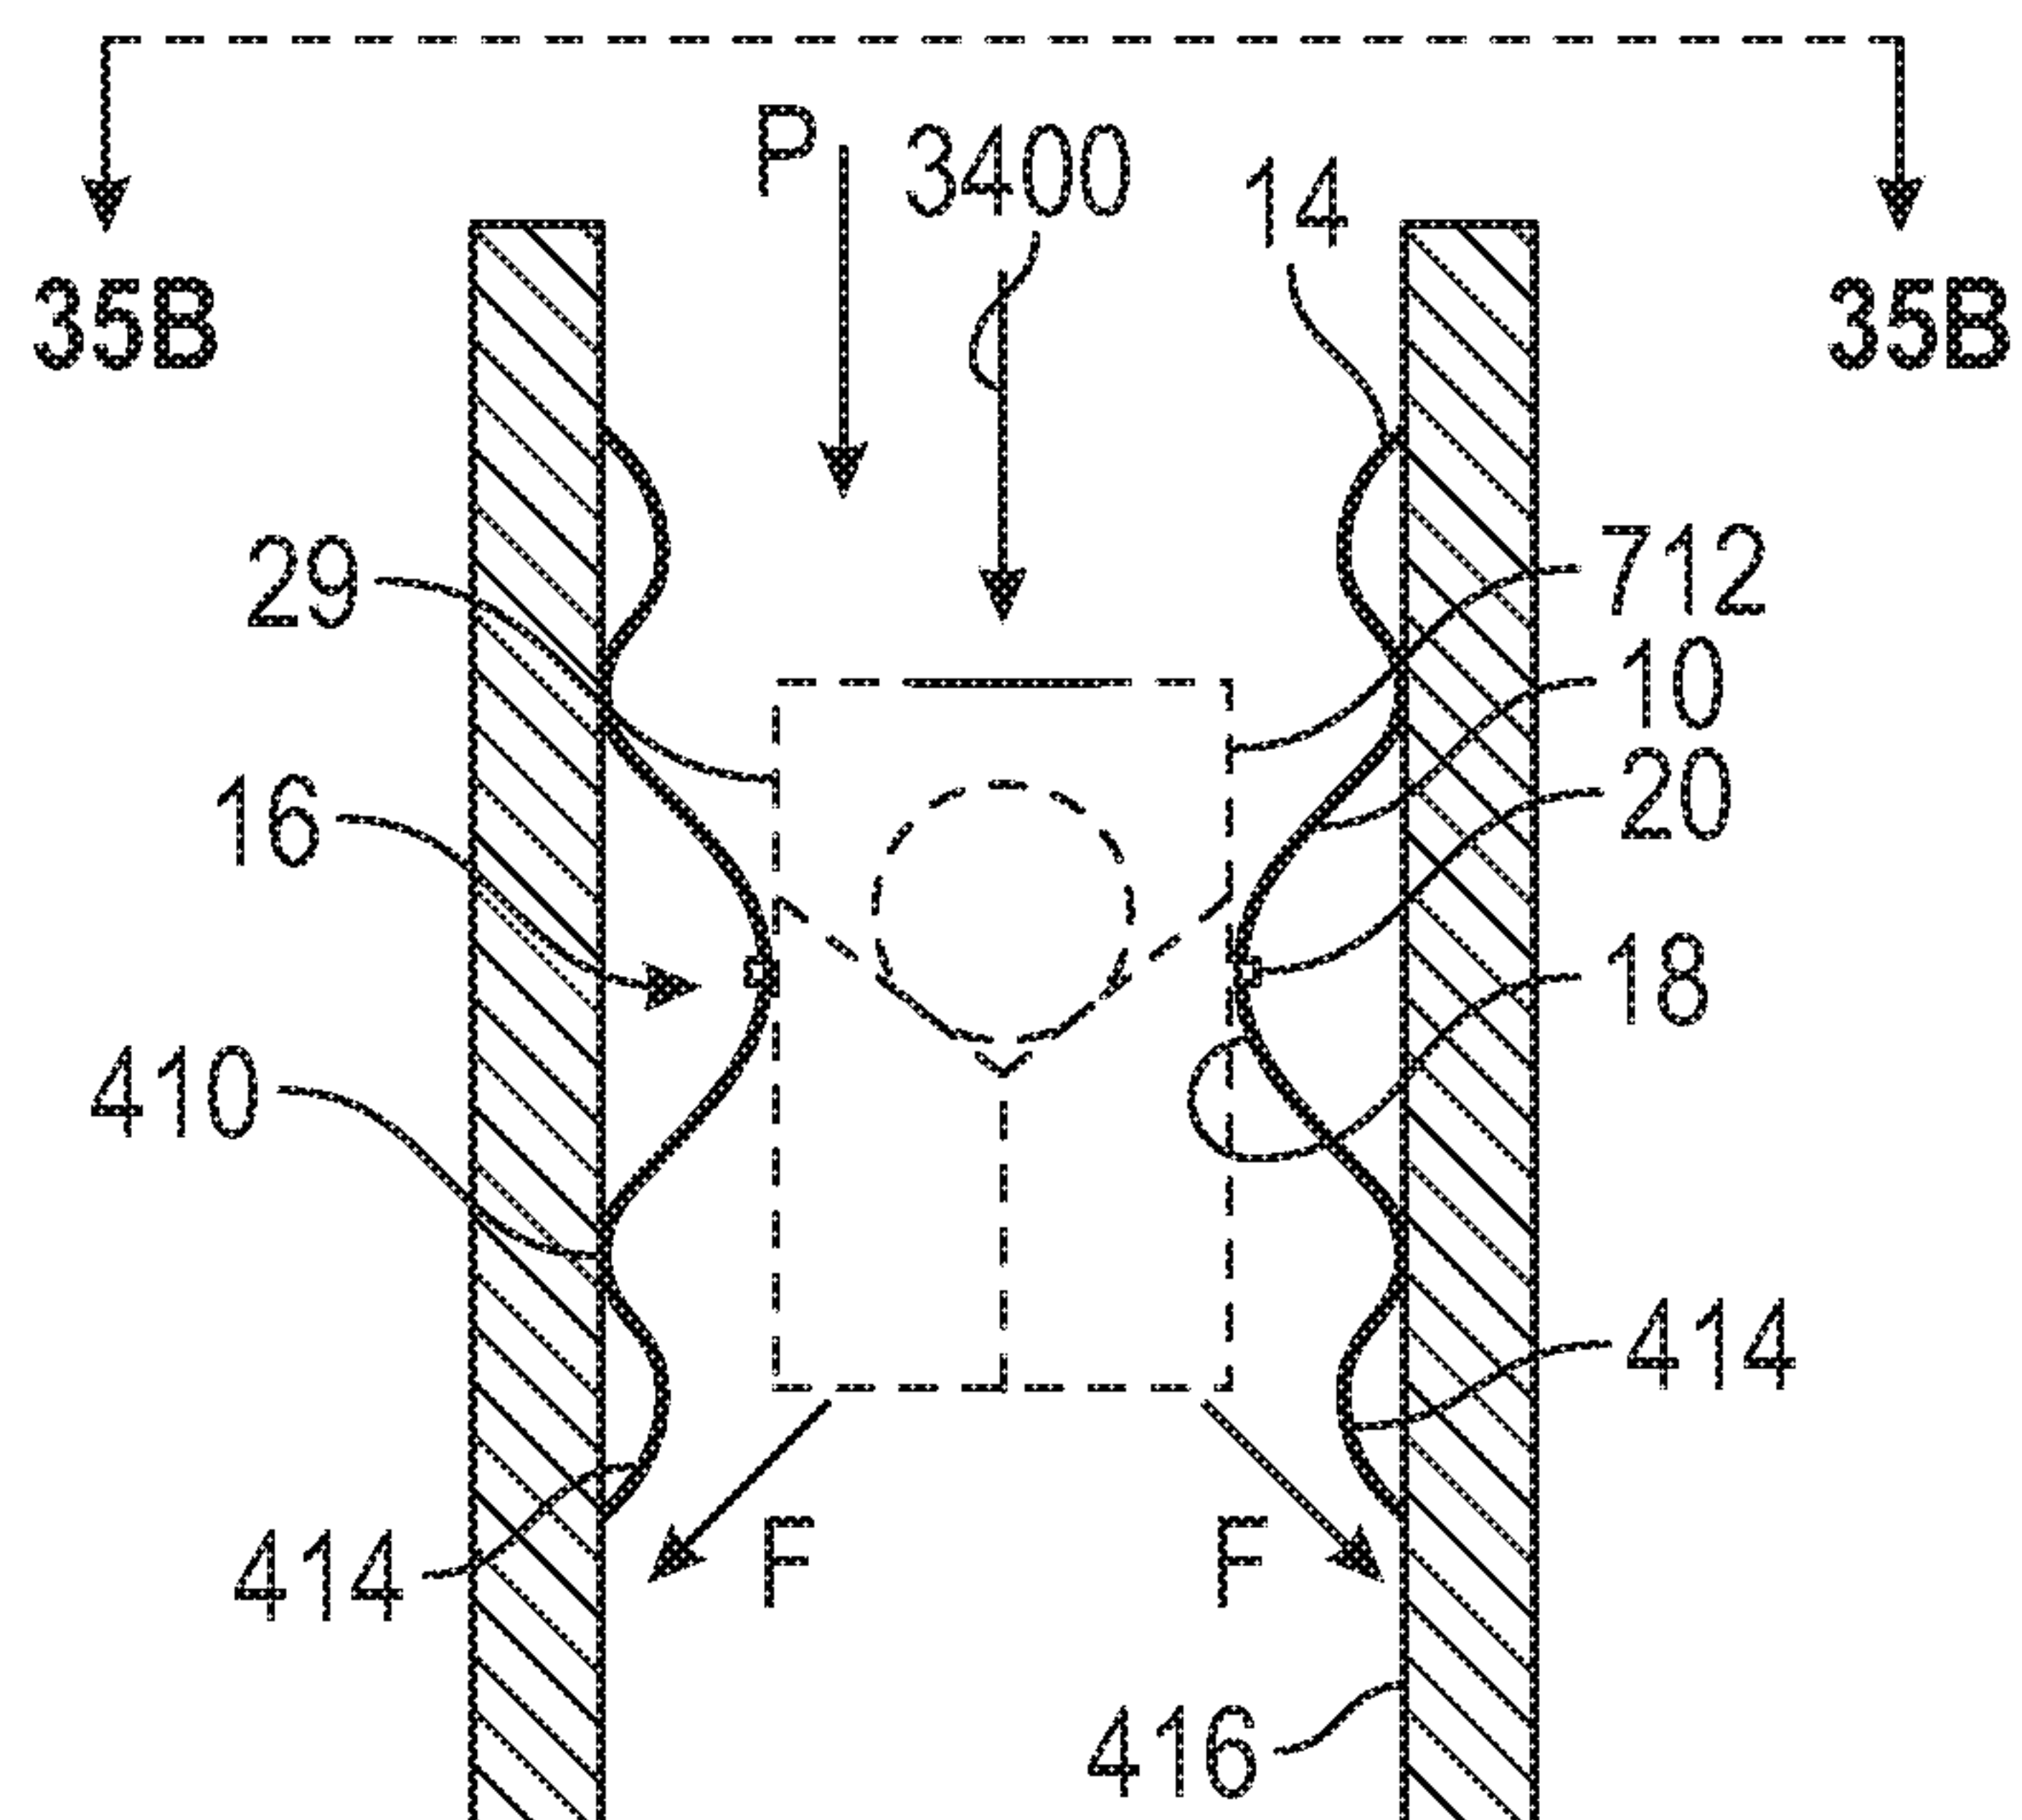


FIG. 35A

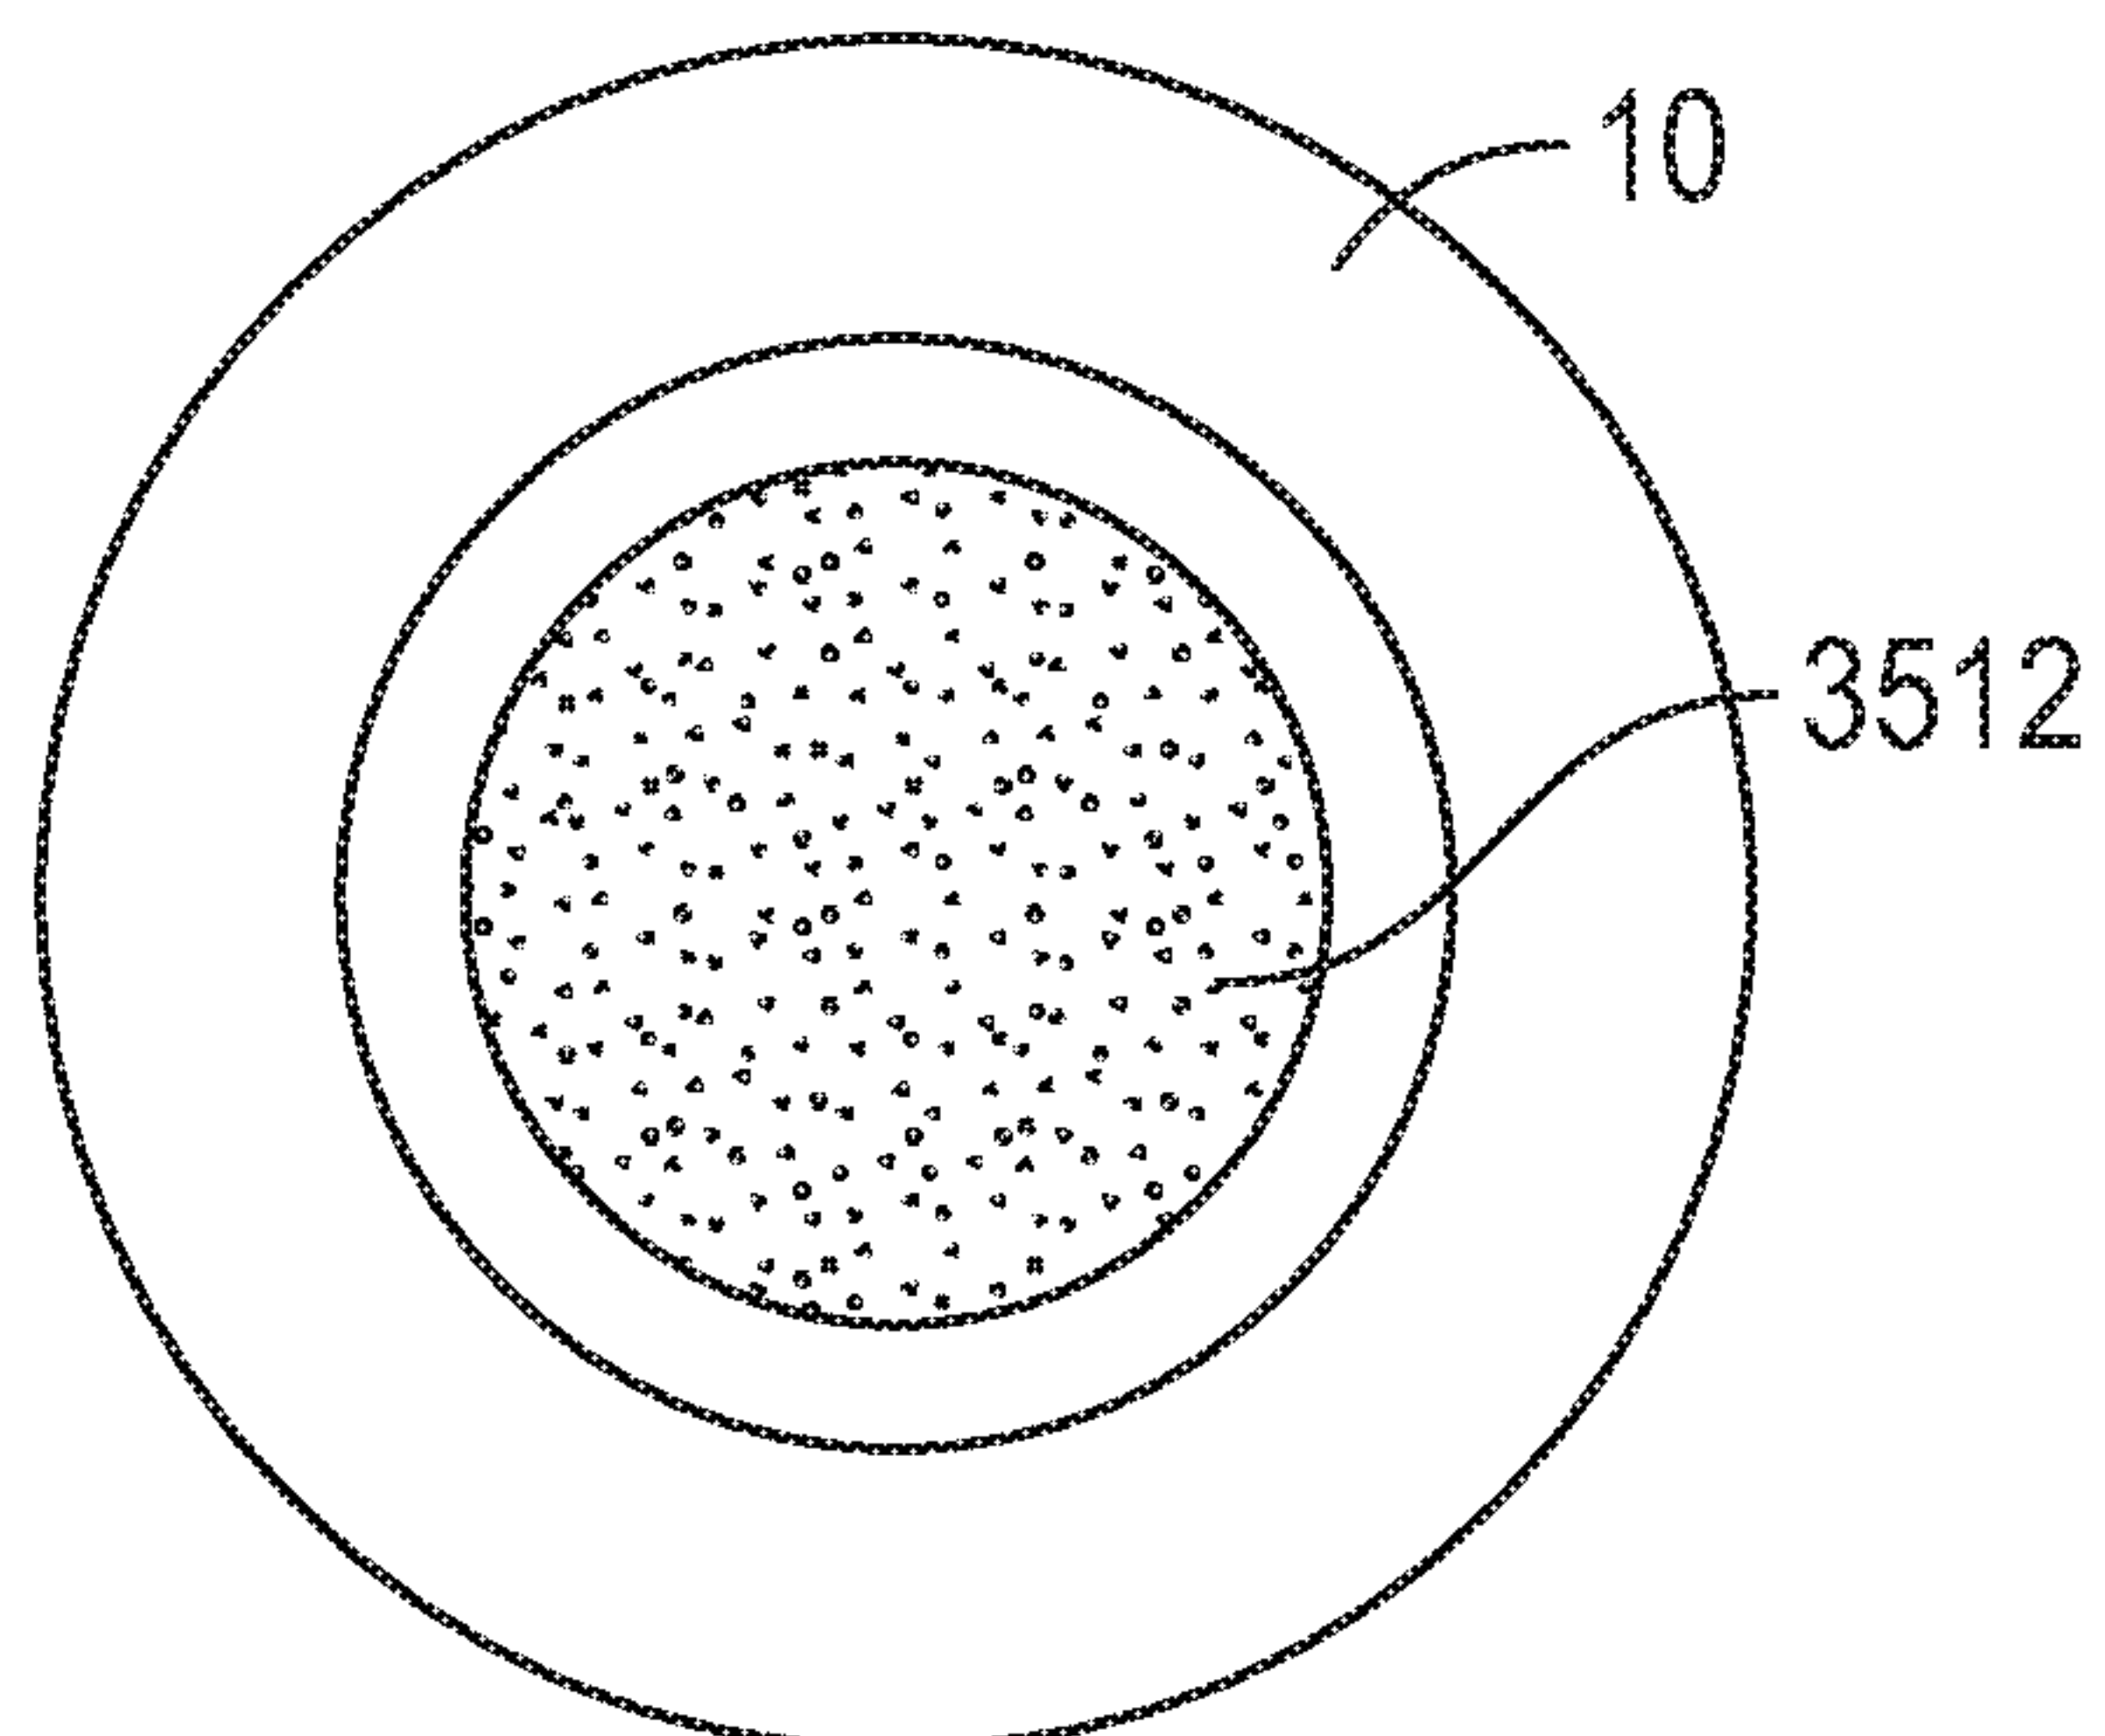


FIG. 35B

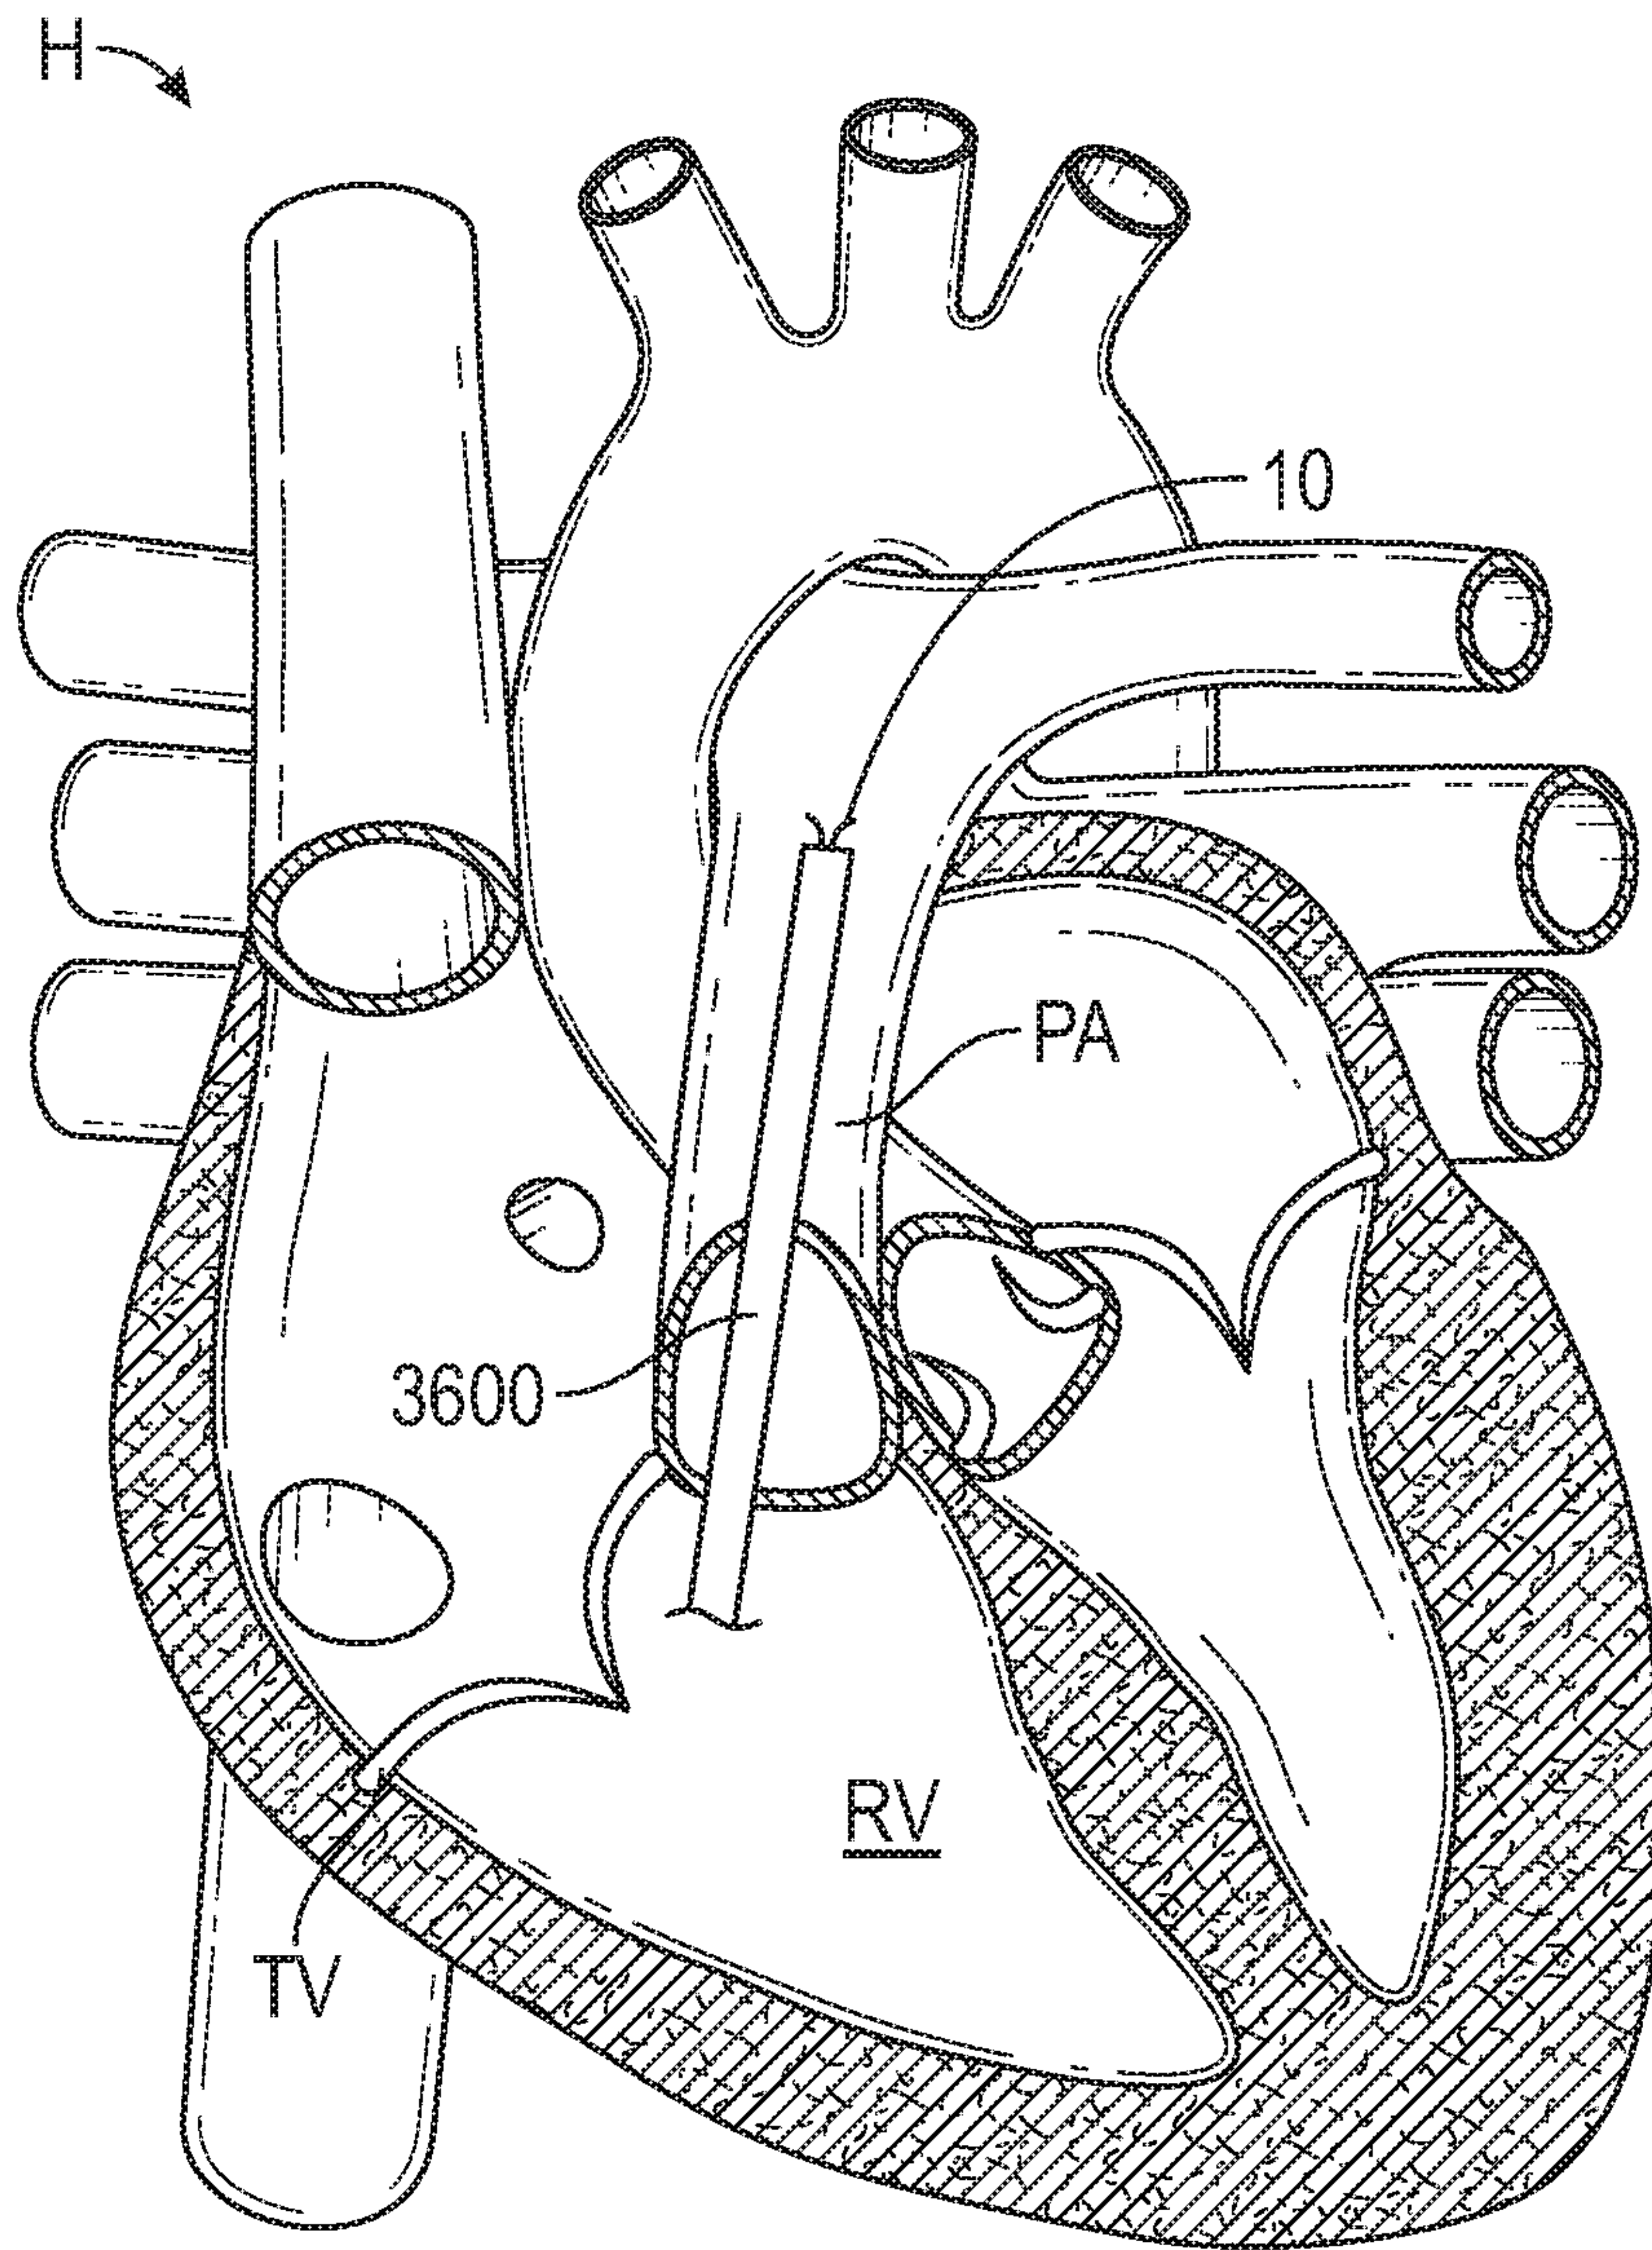


FIG. 36A

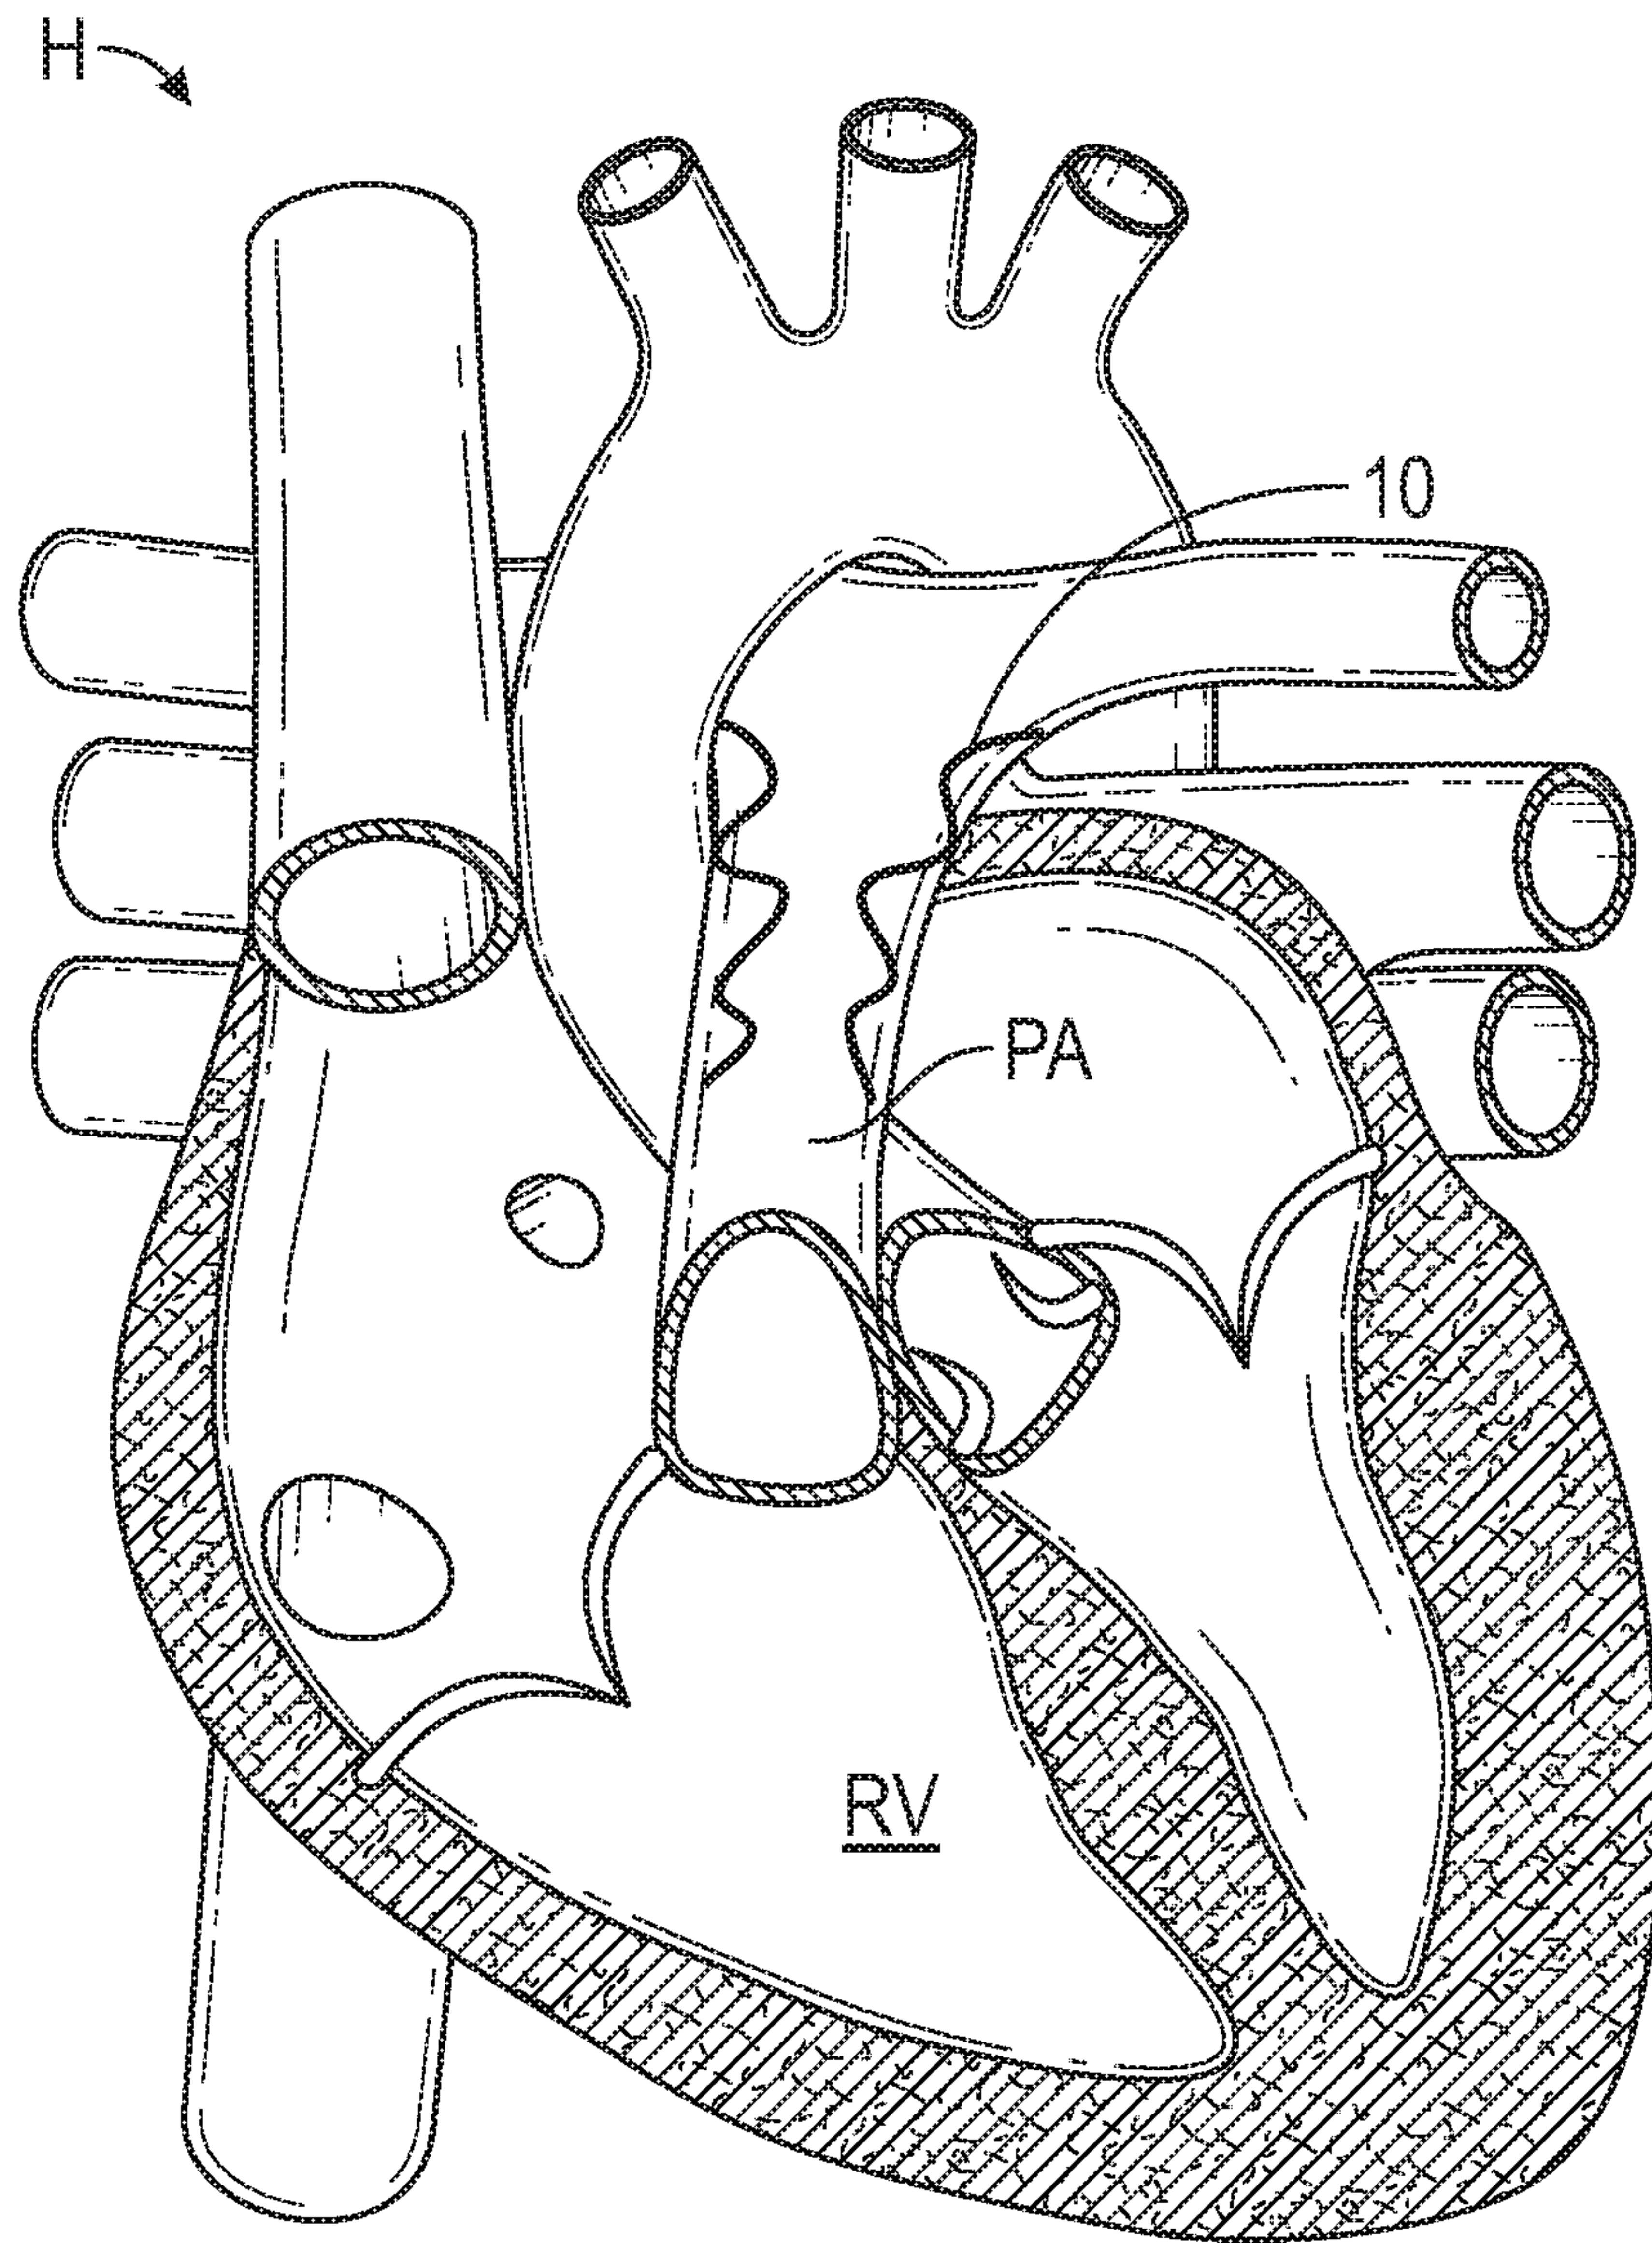


FIG. 36B

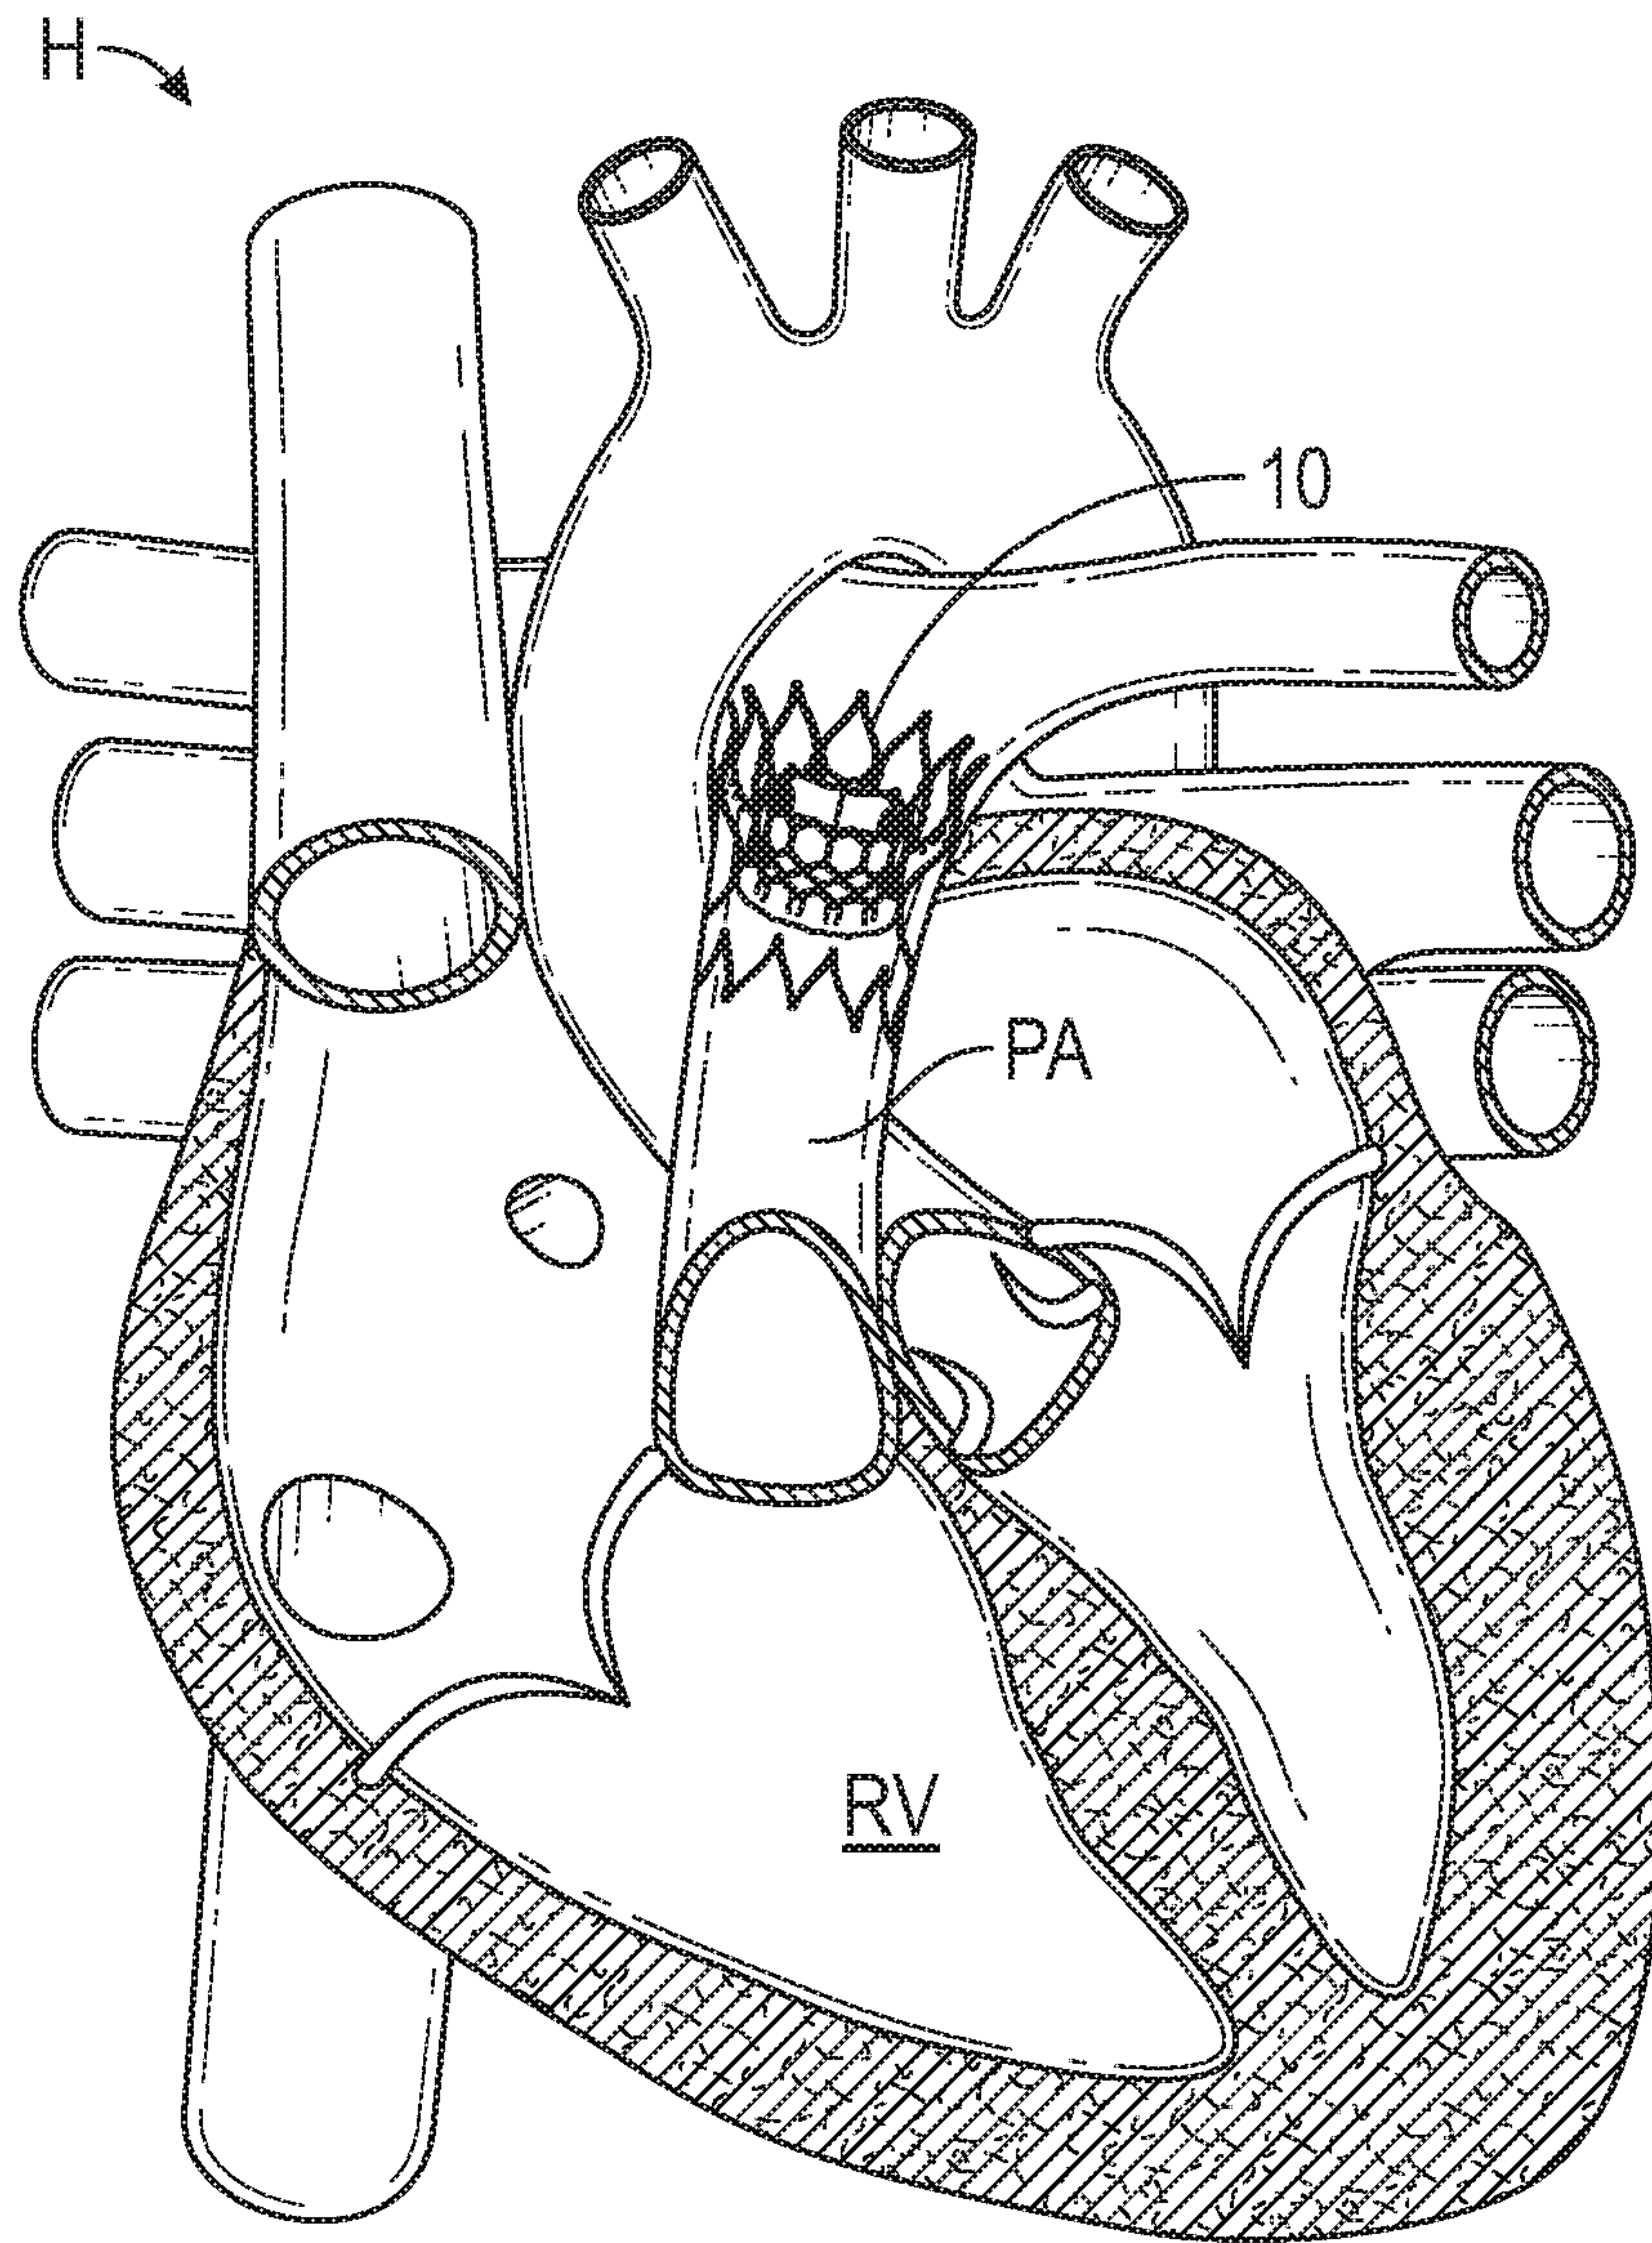


FIG. 36C

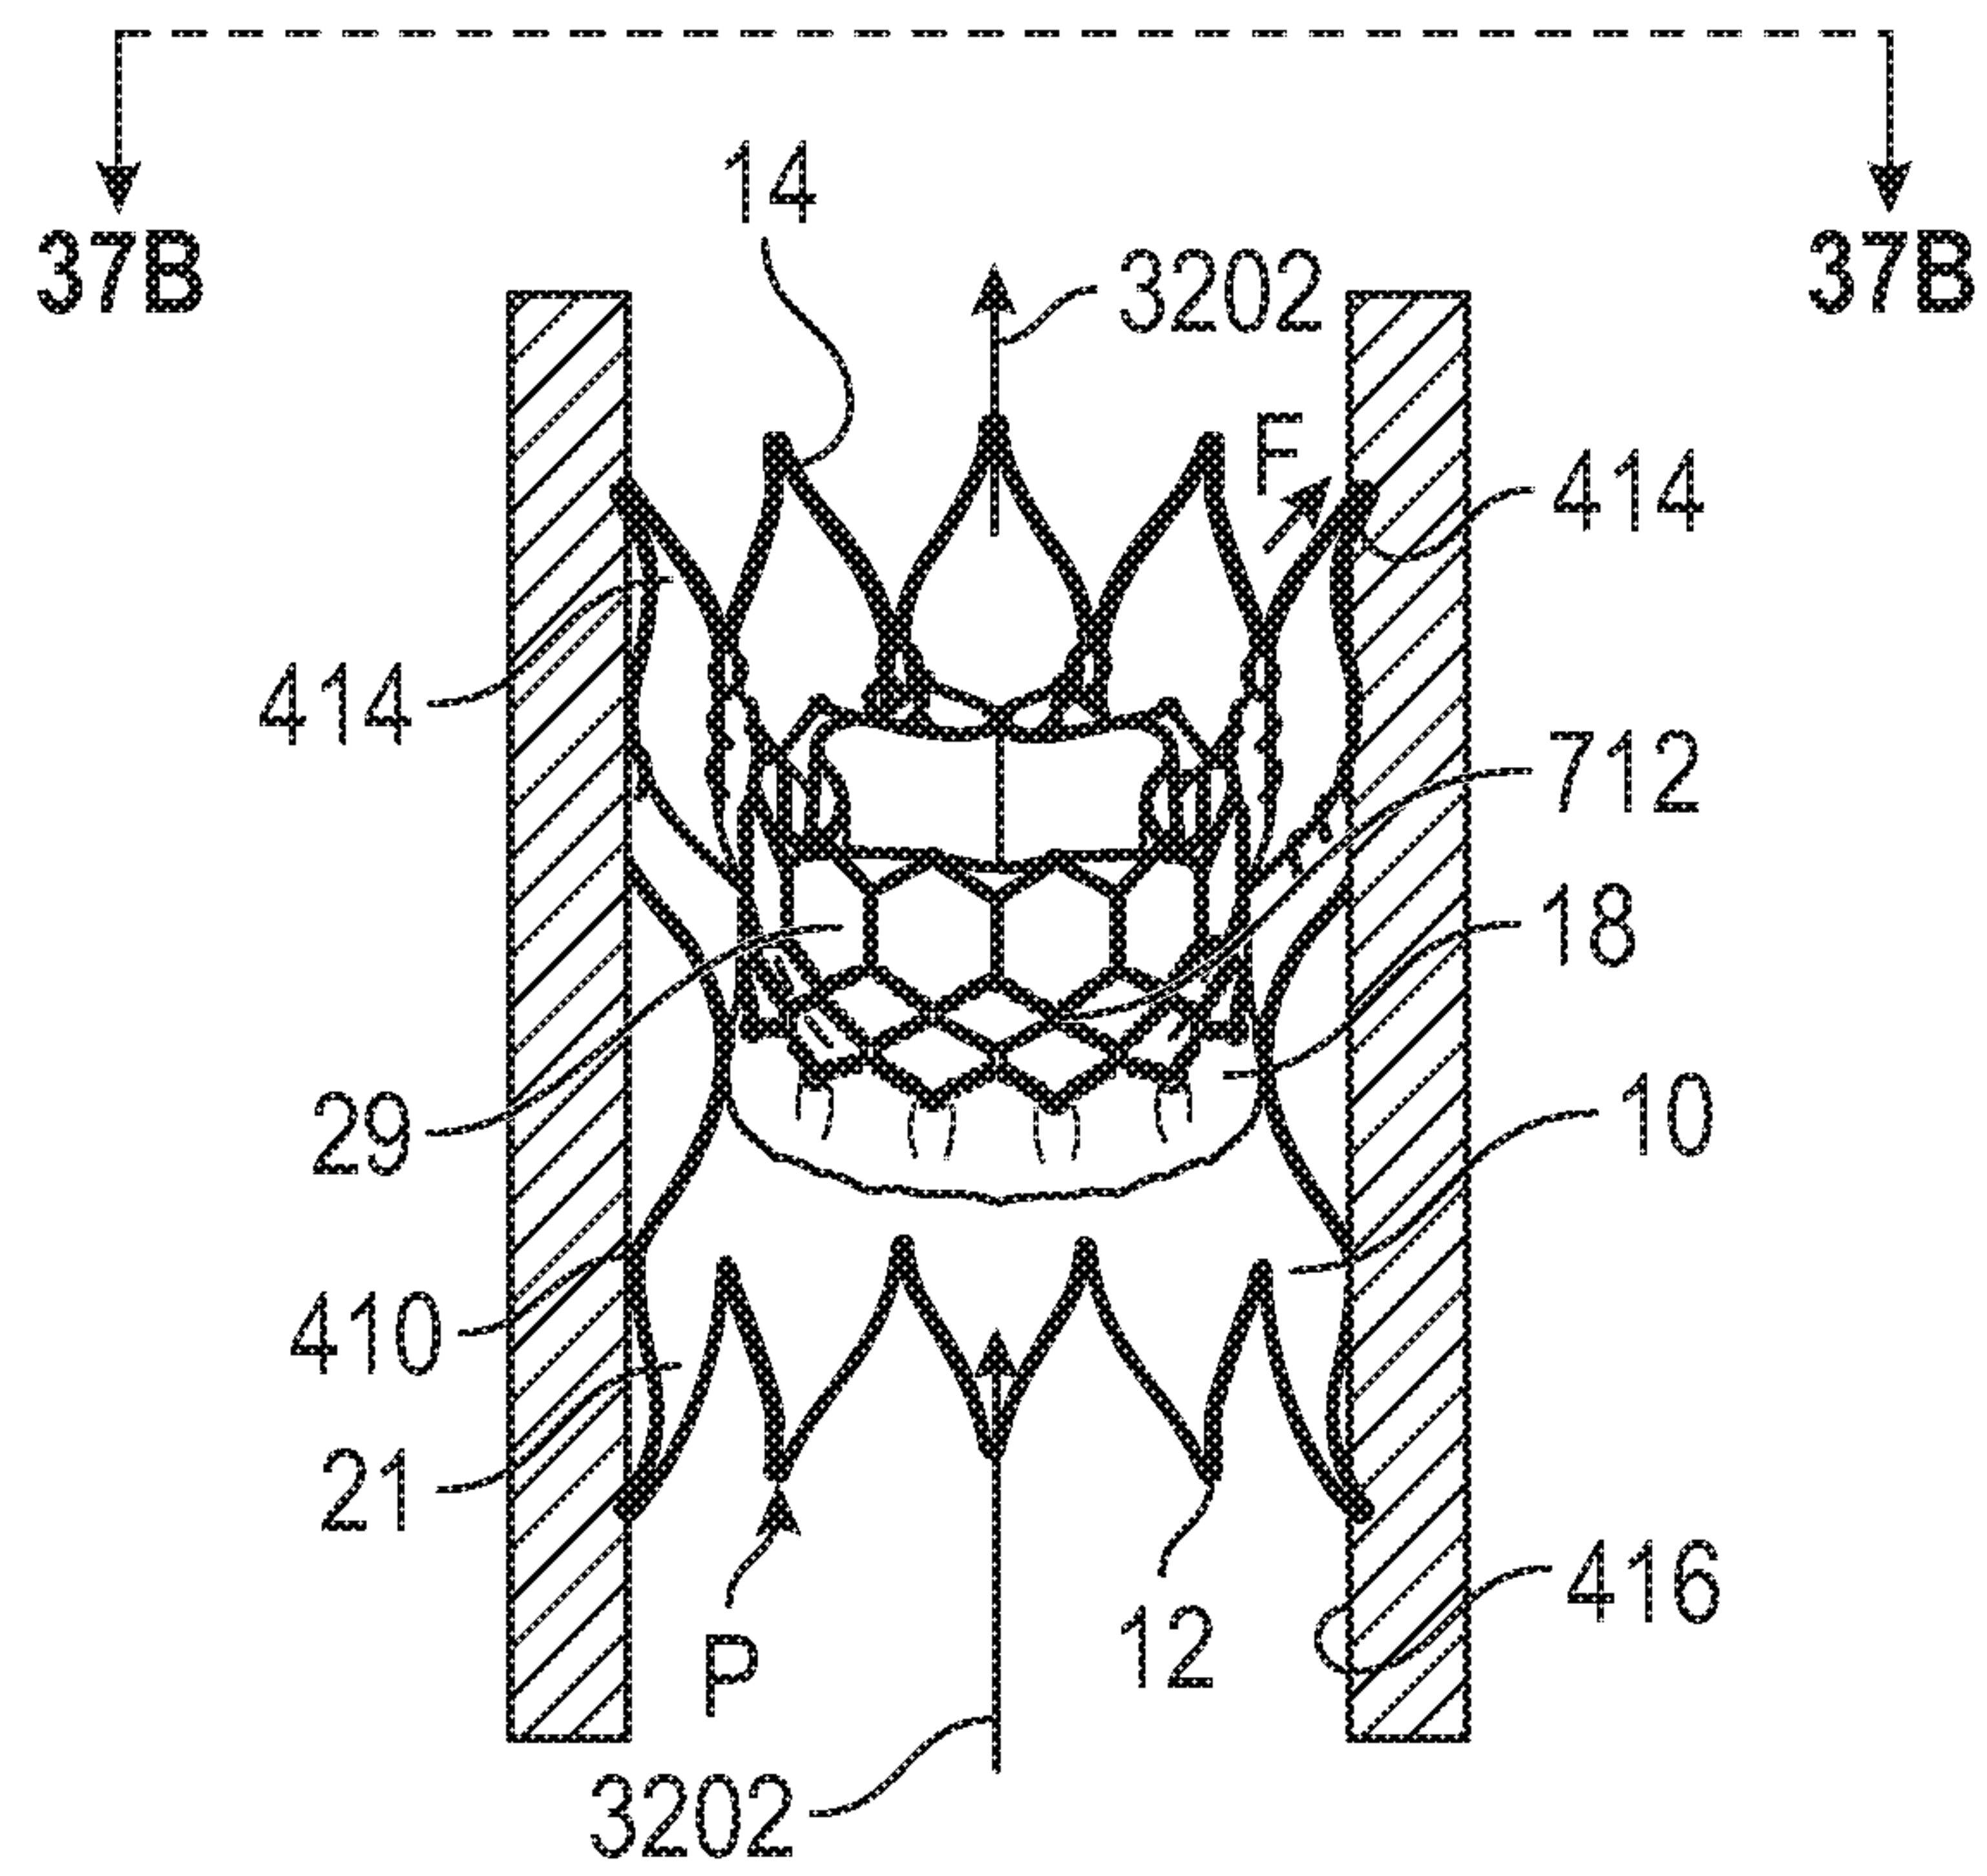


FIG. 37A

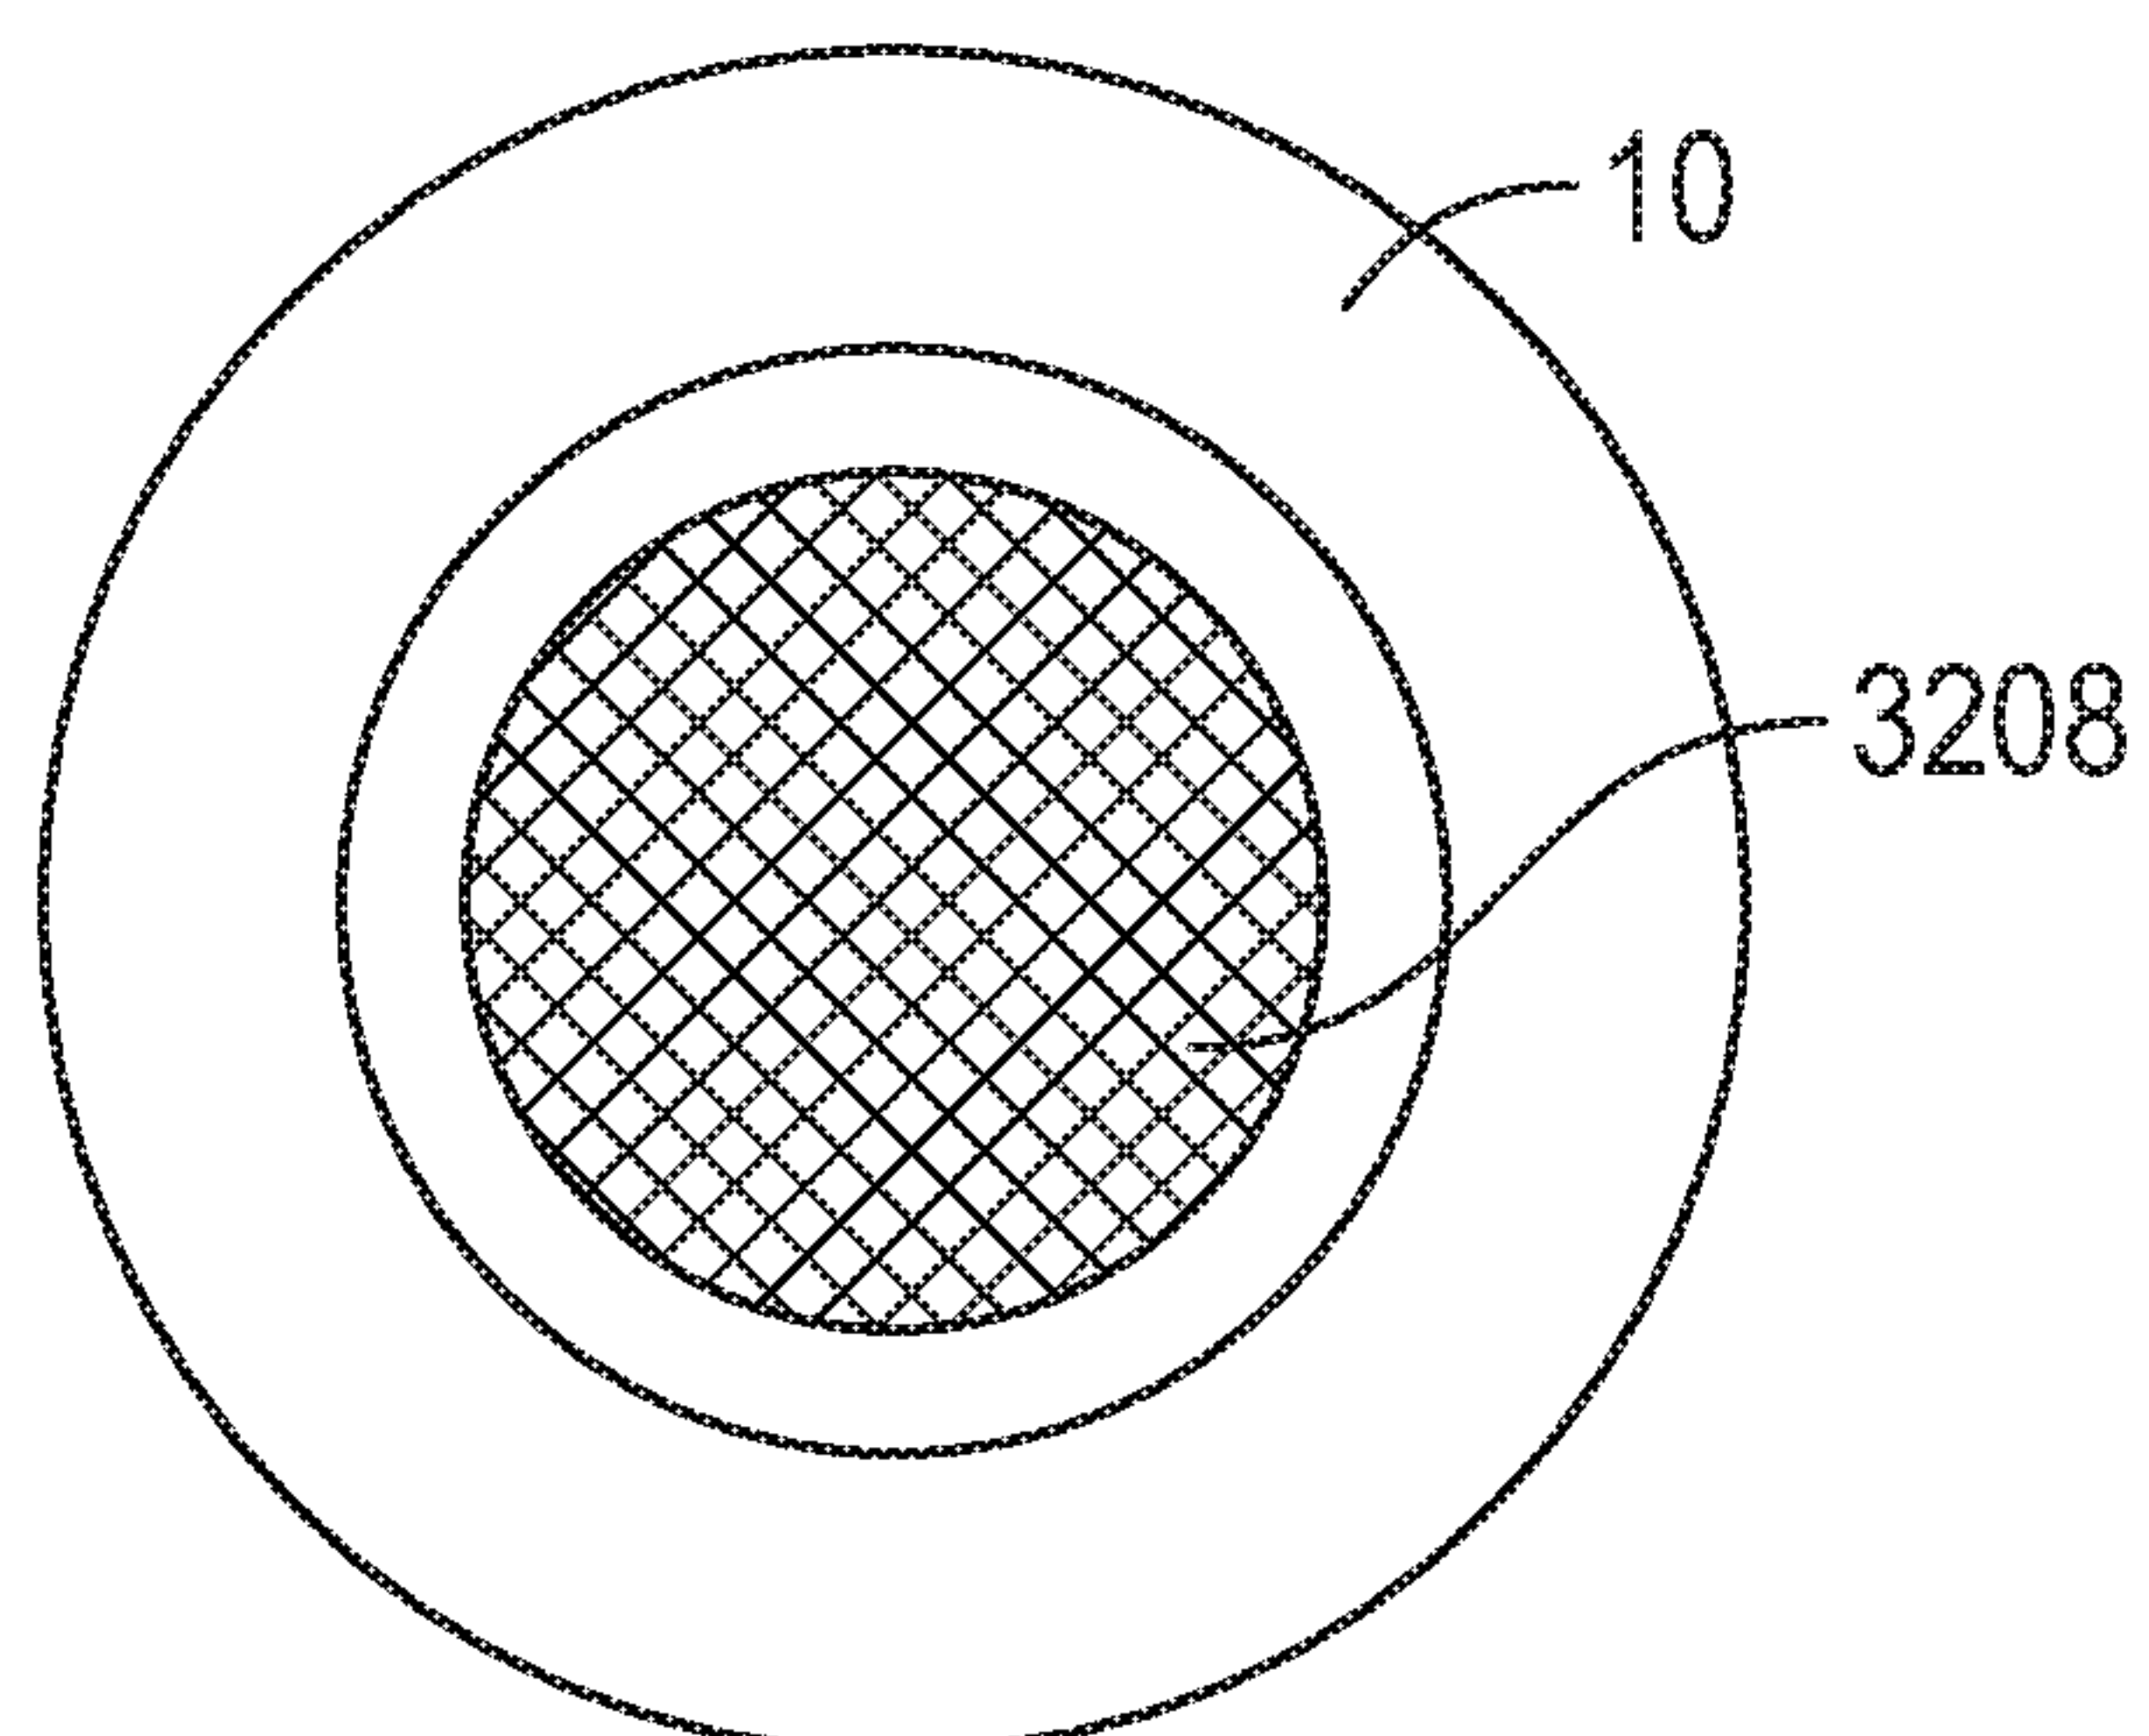


FIG. 37B

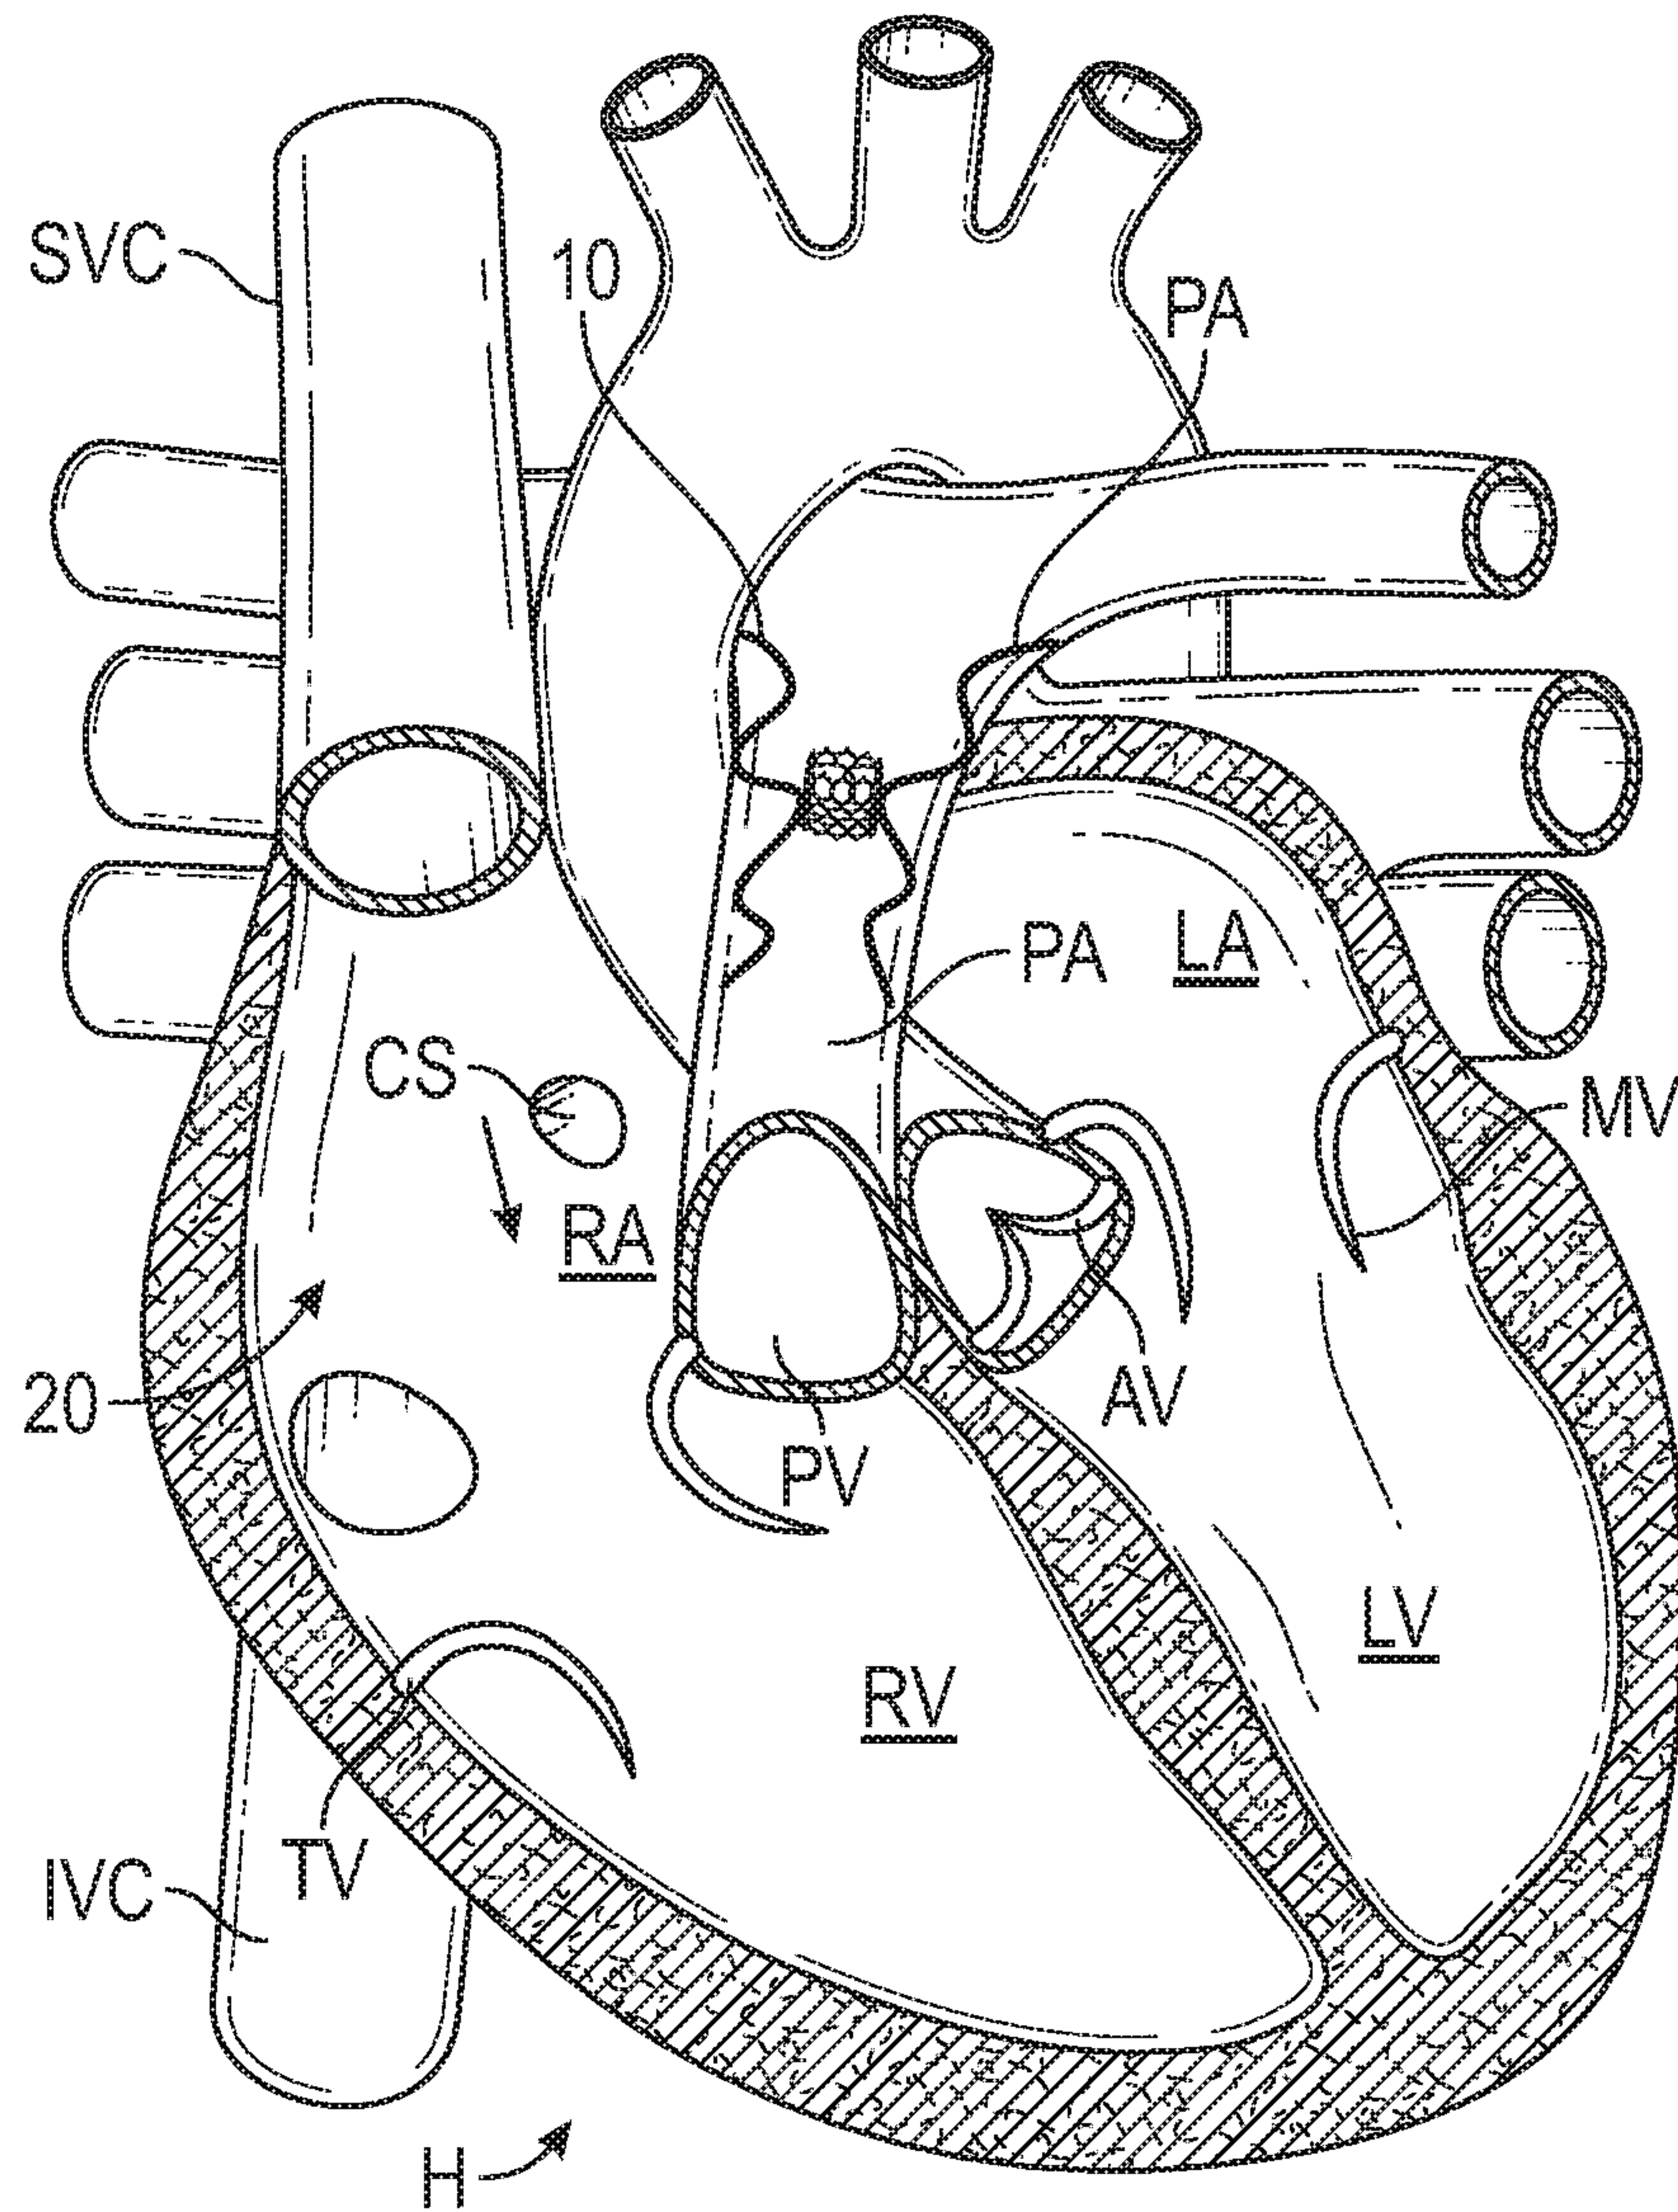


FIG. 38

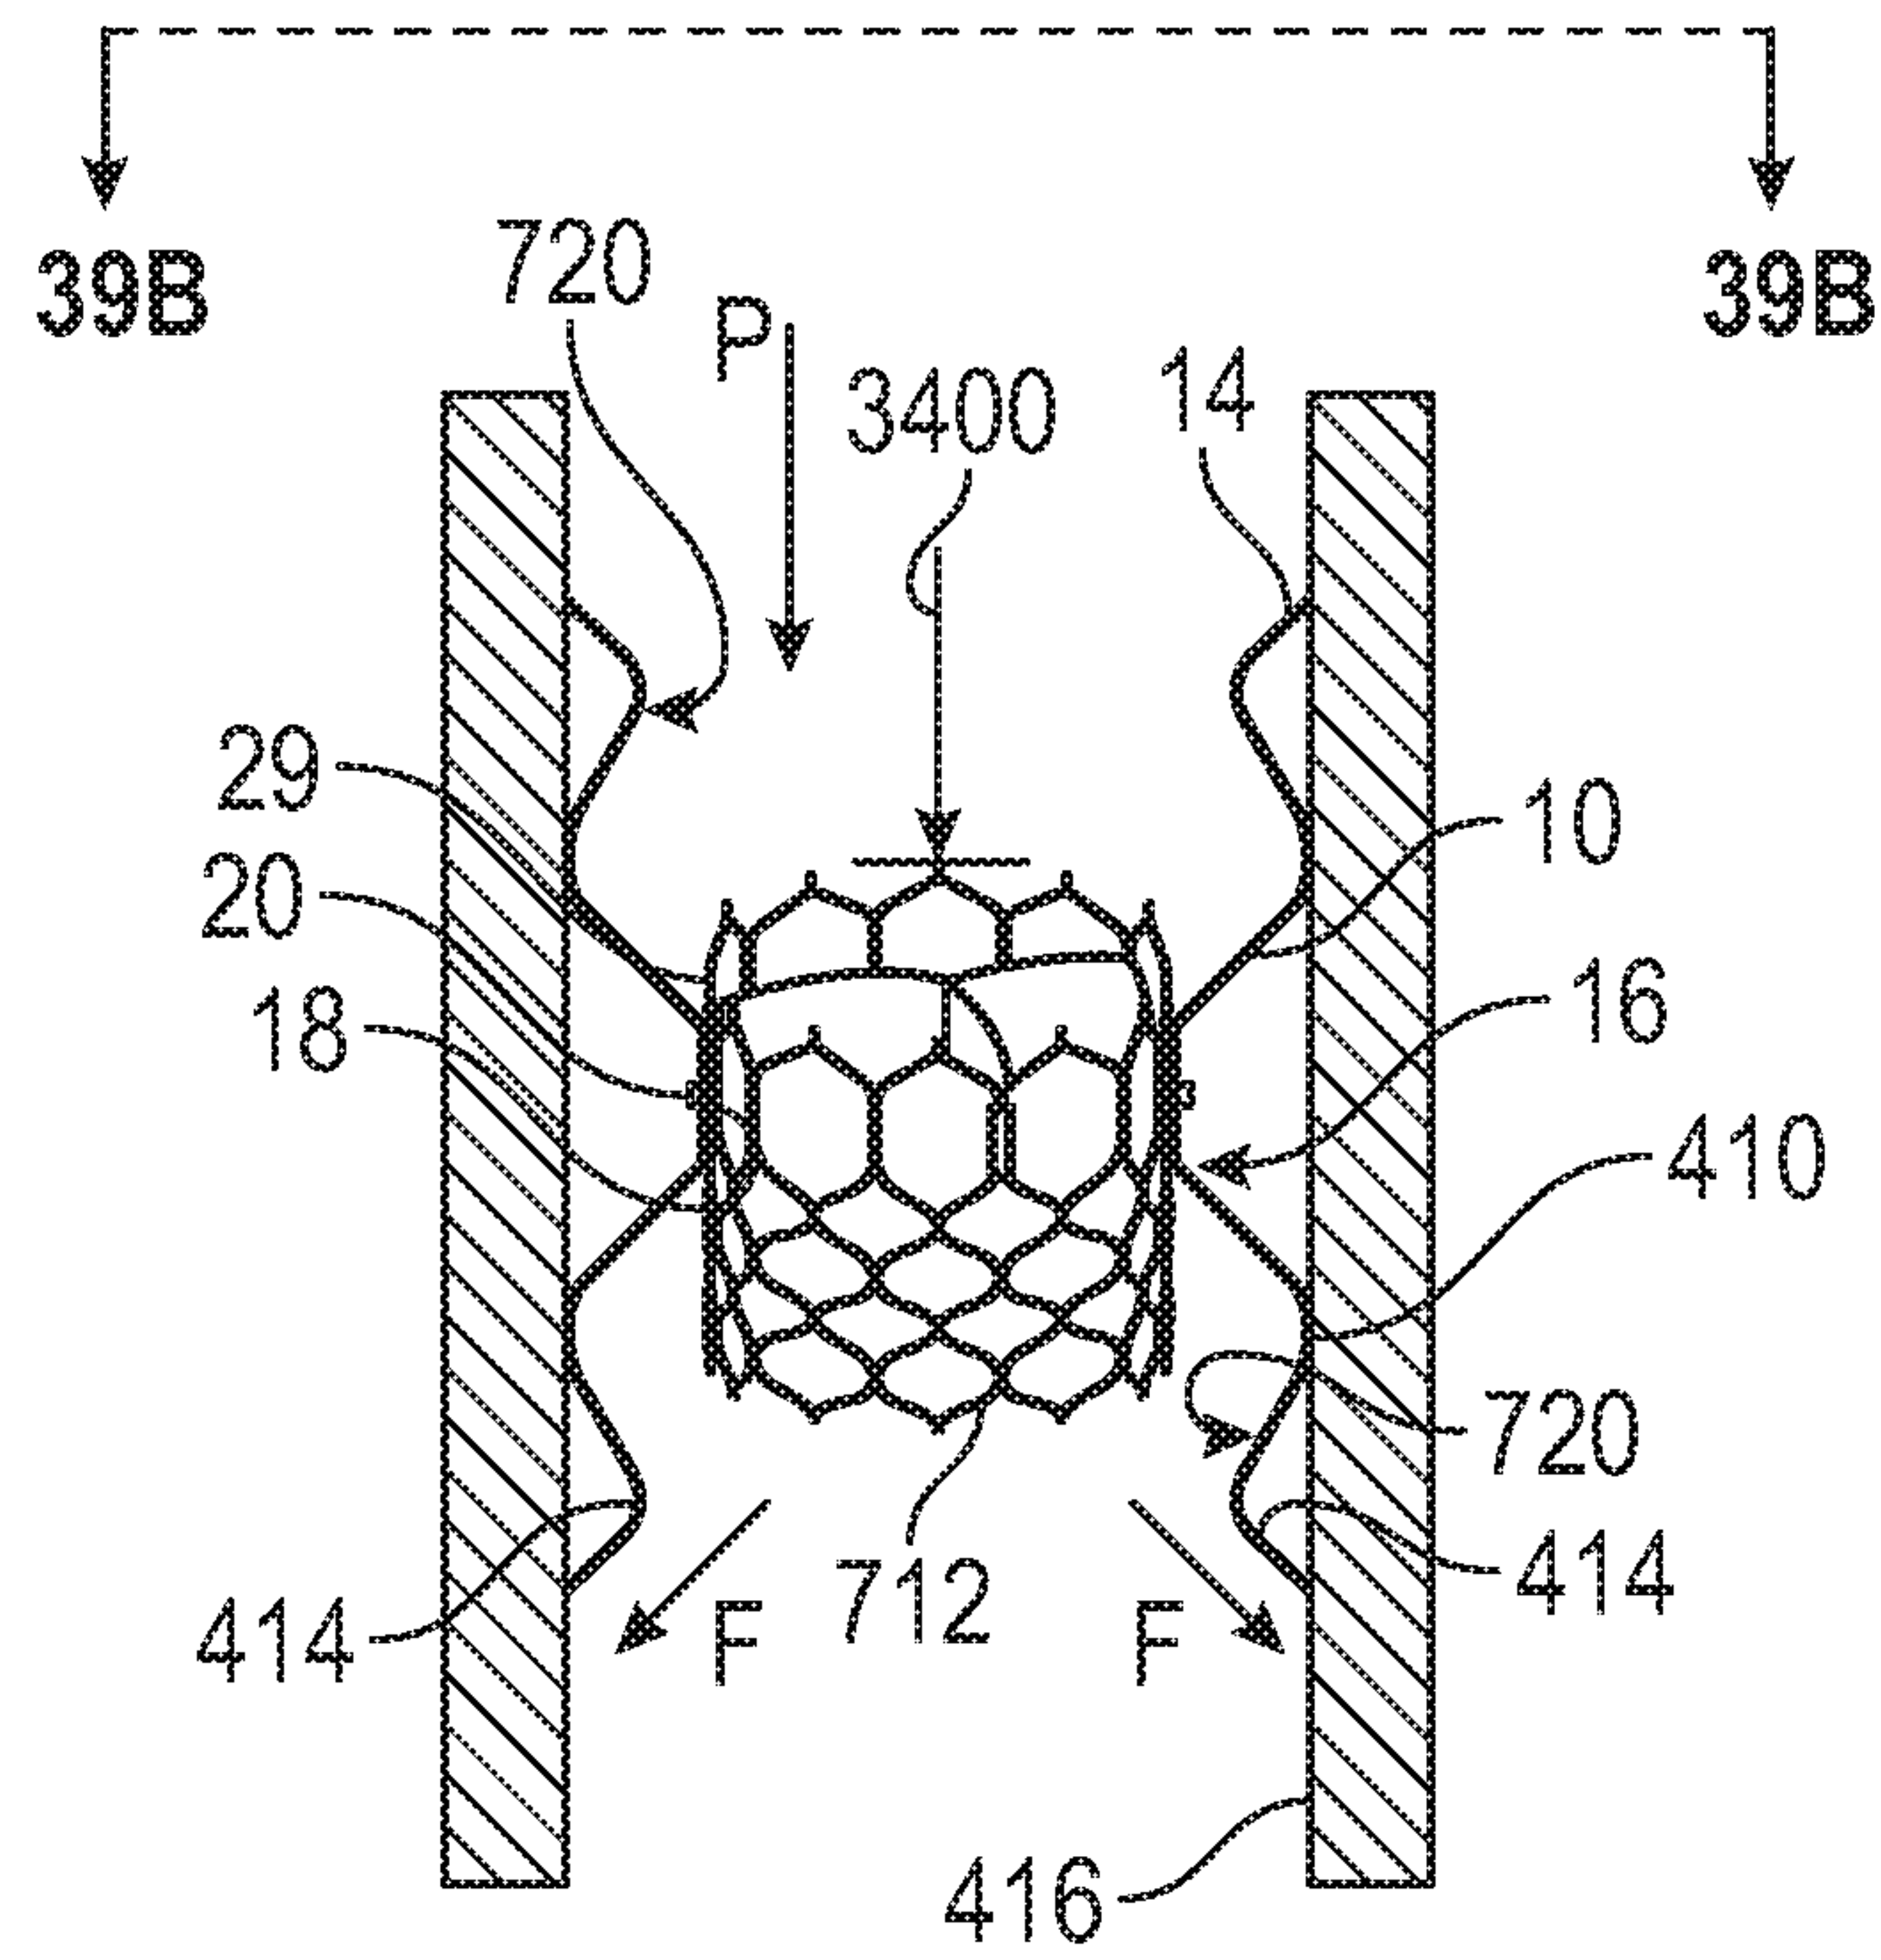


FIG. 39A

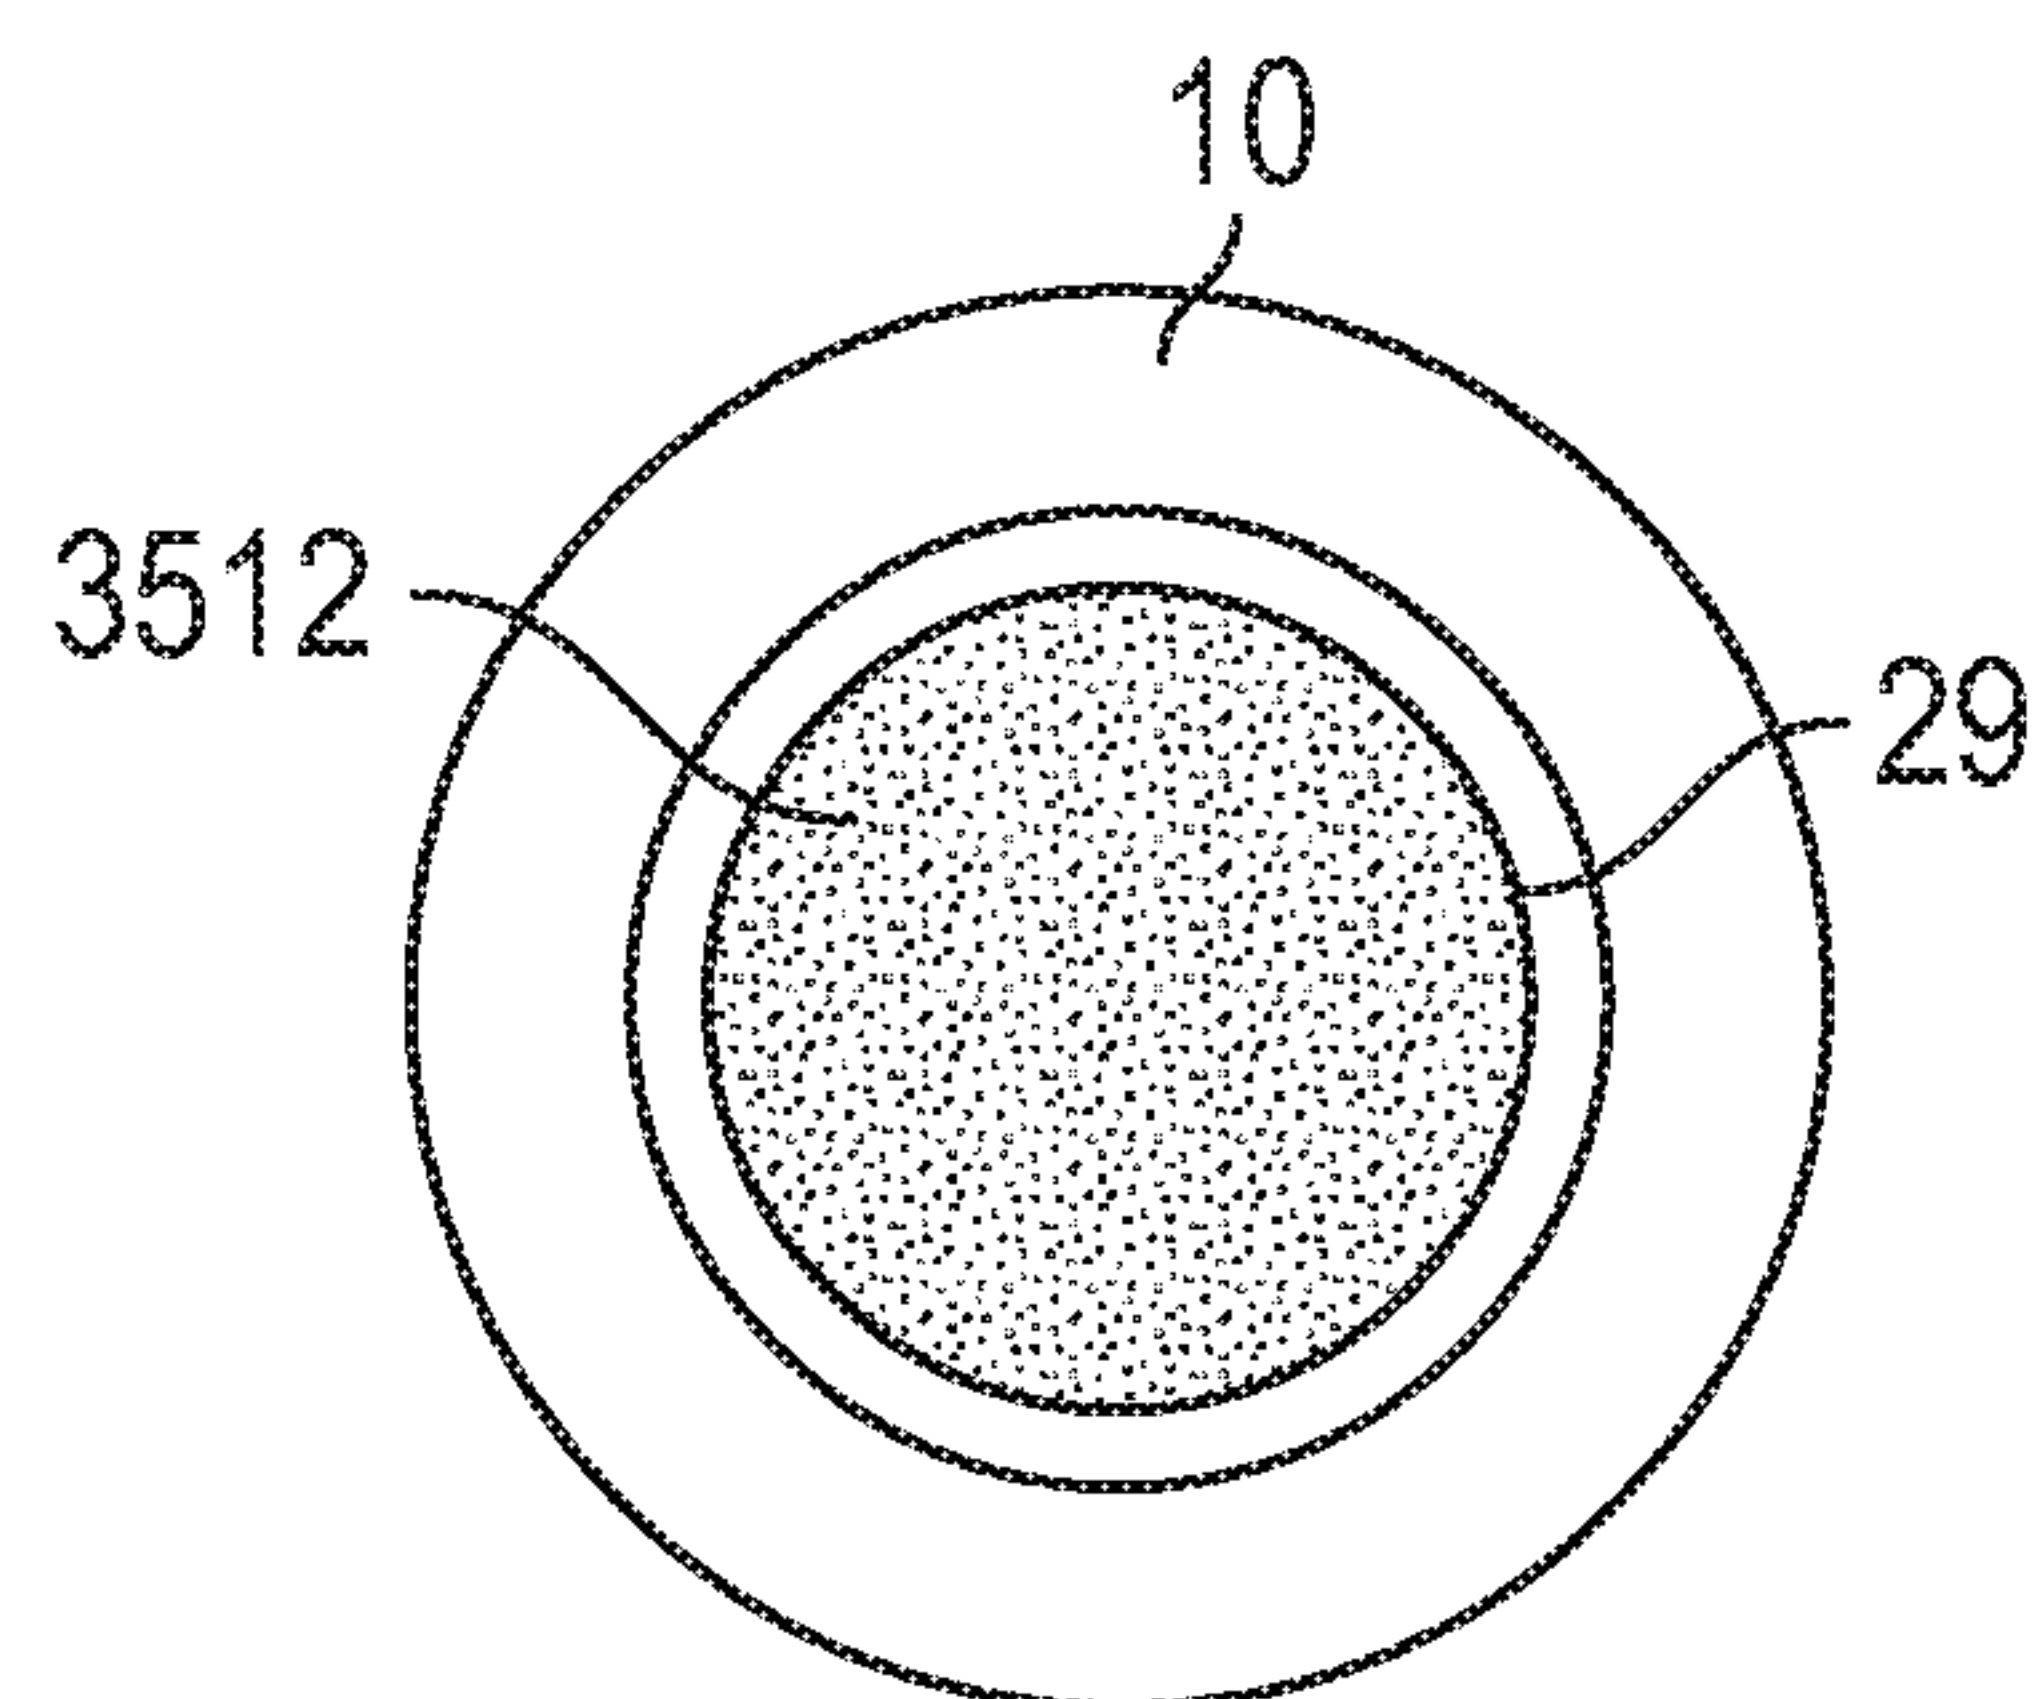


FIG. 39B

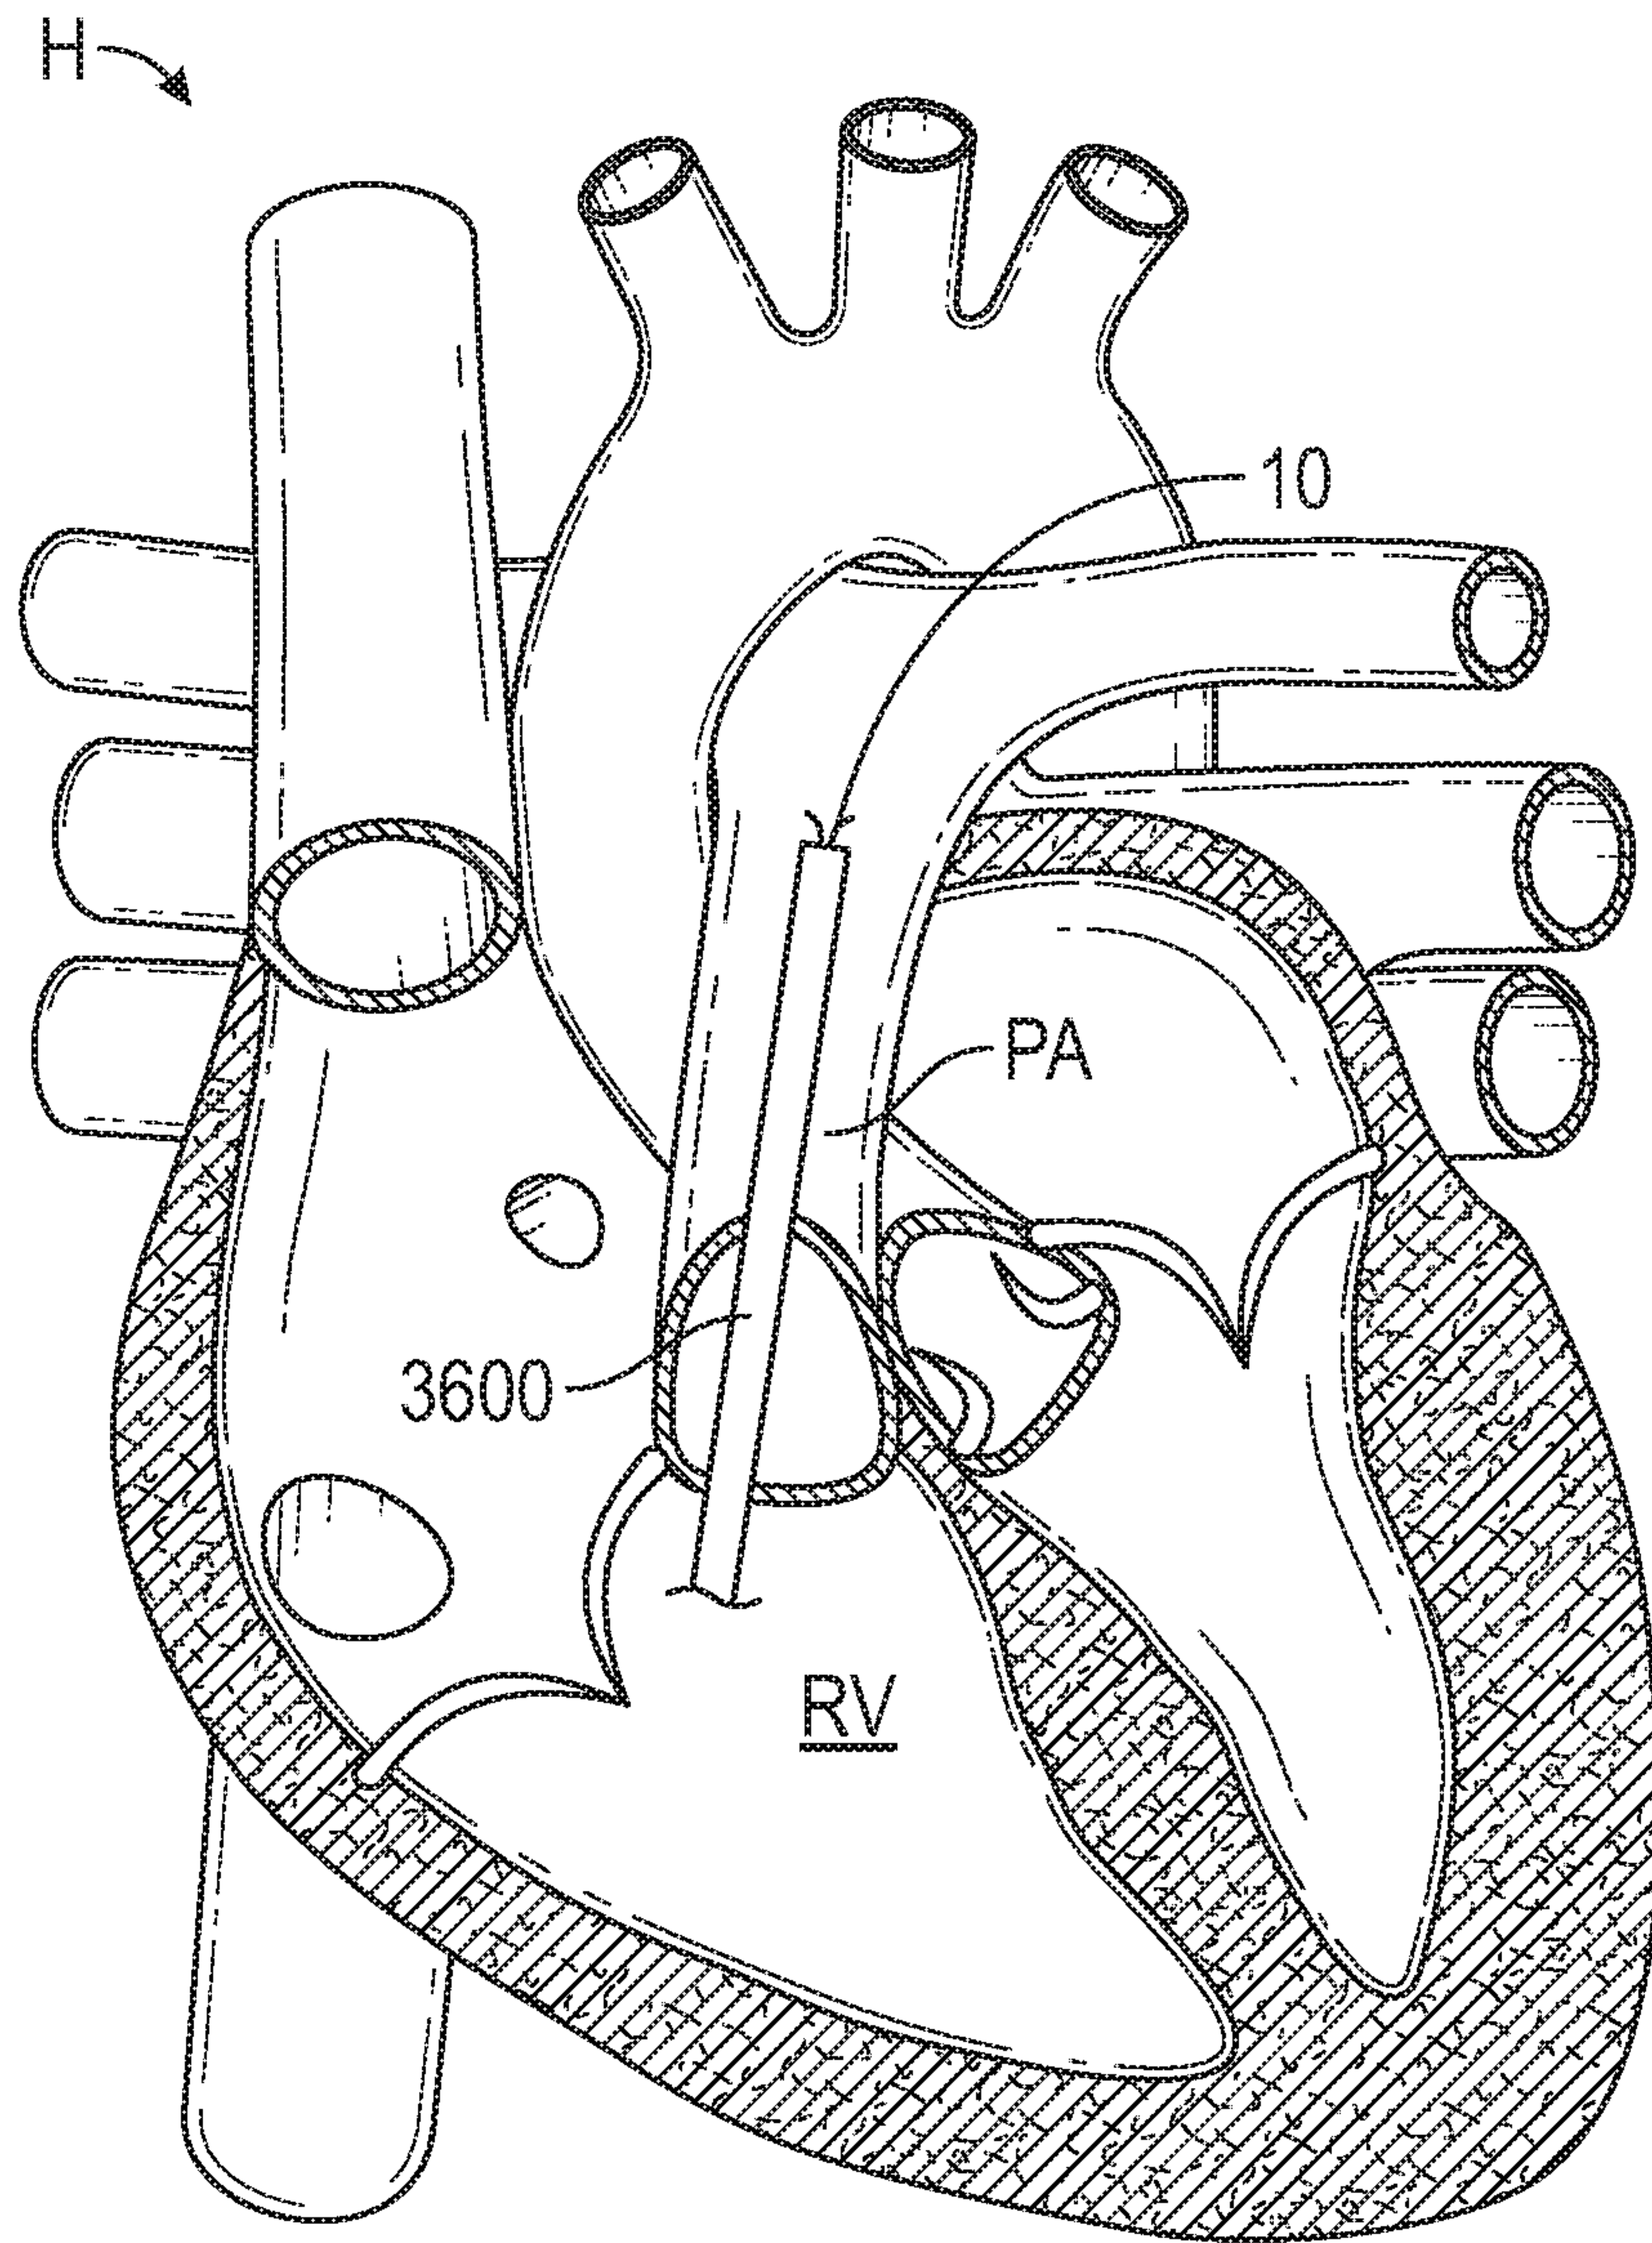


FIG. 40A

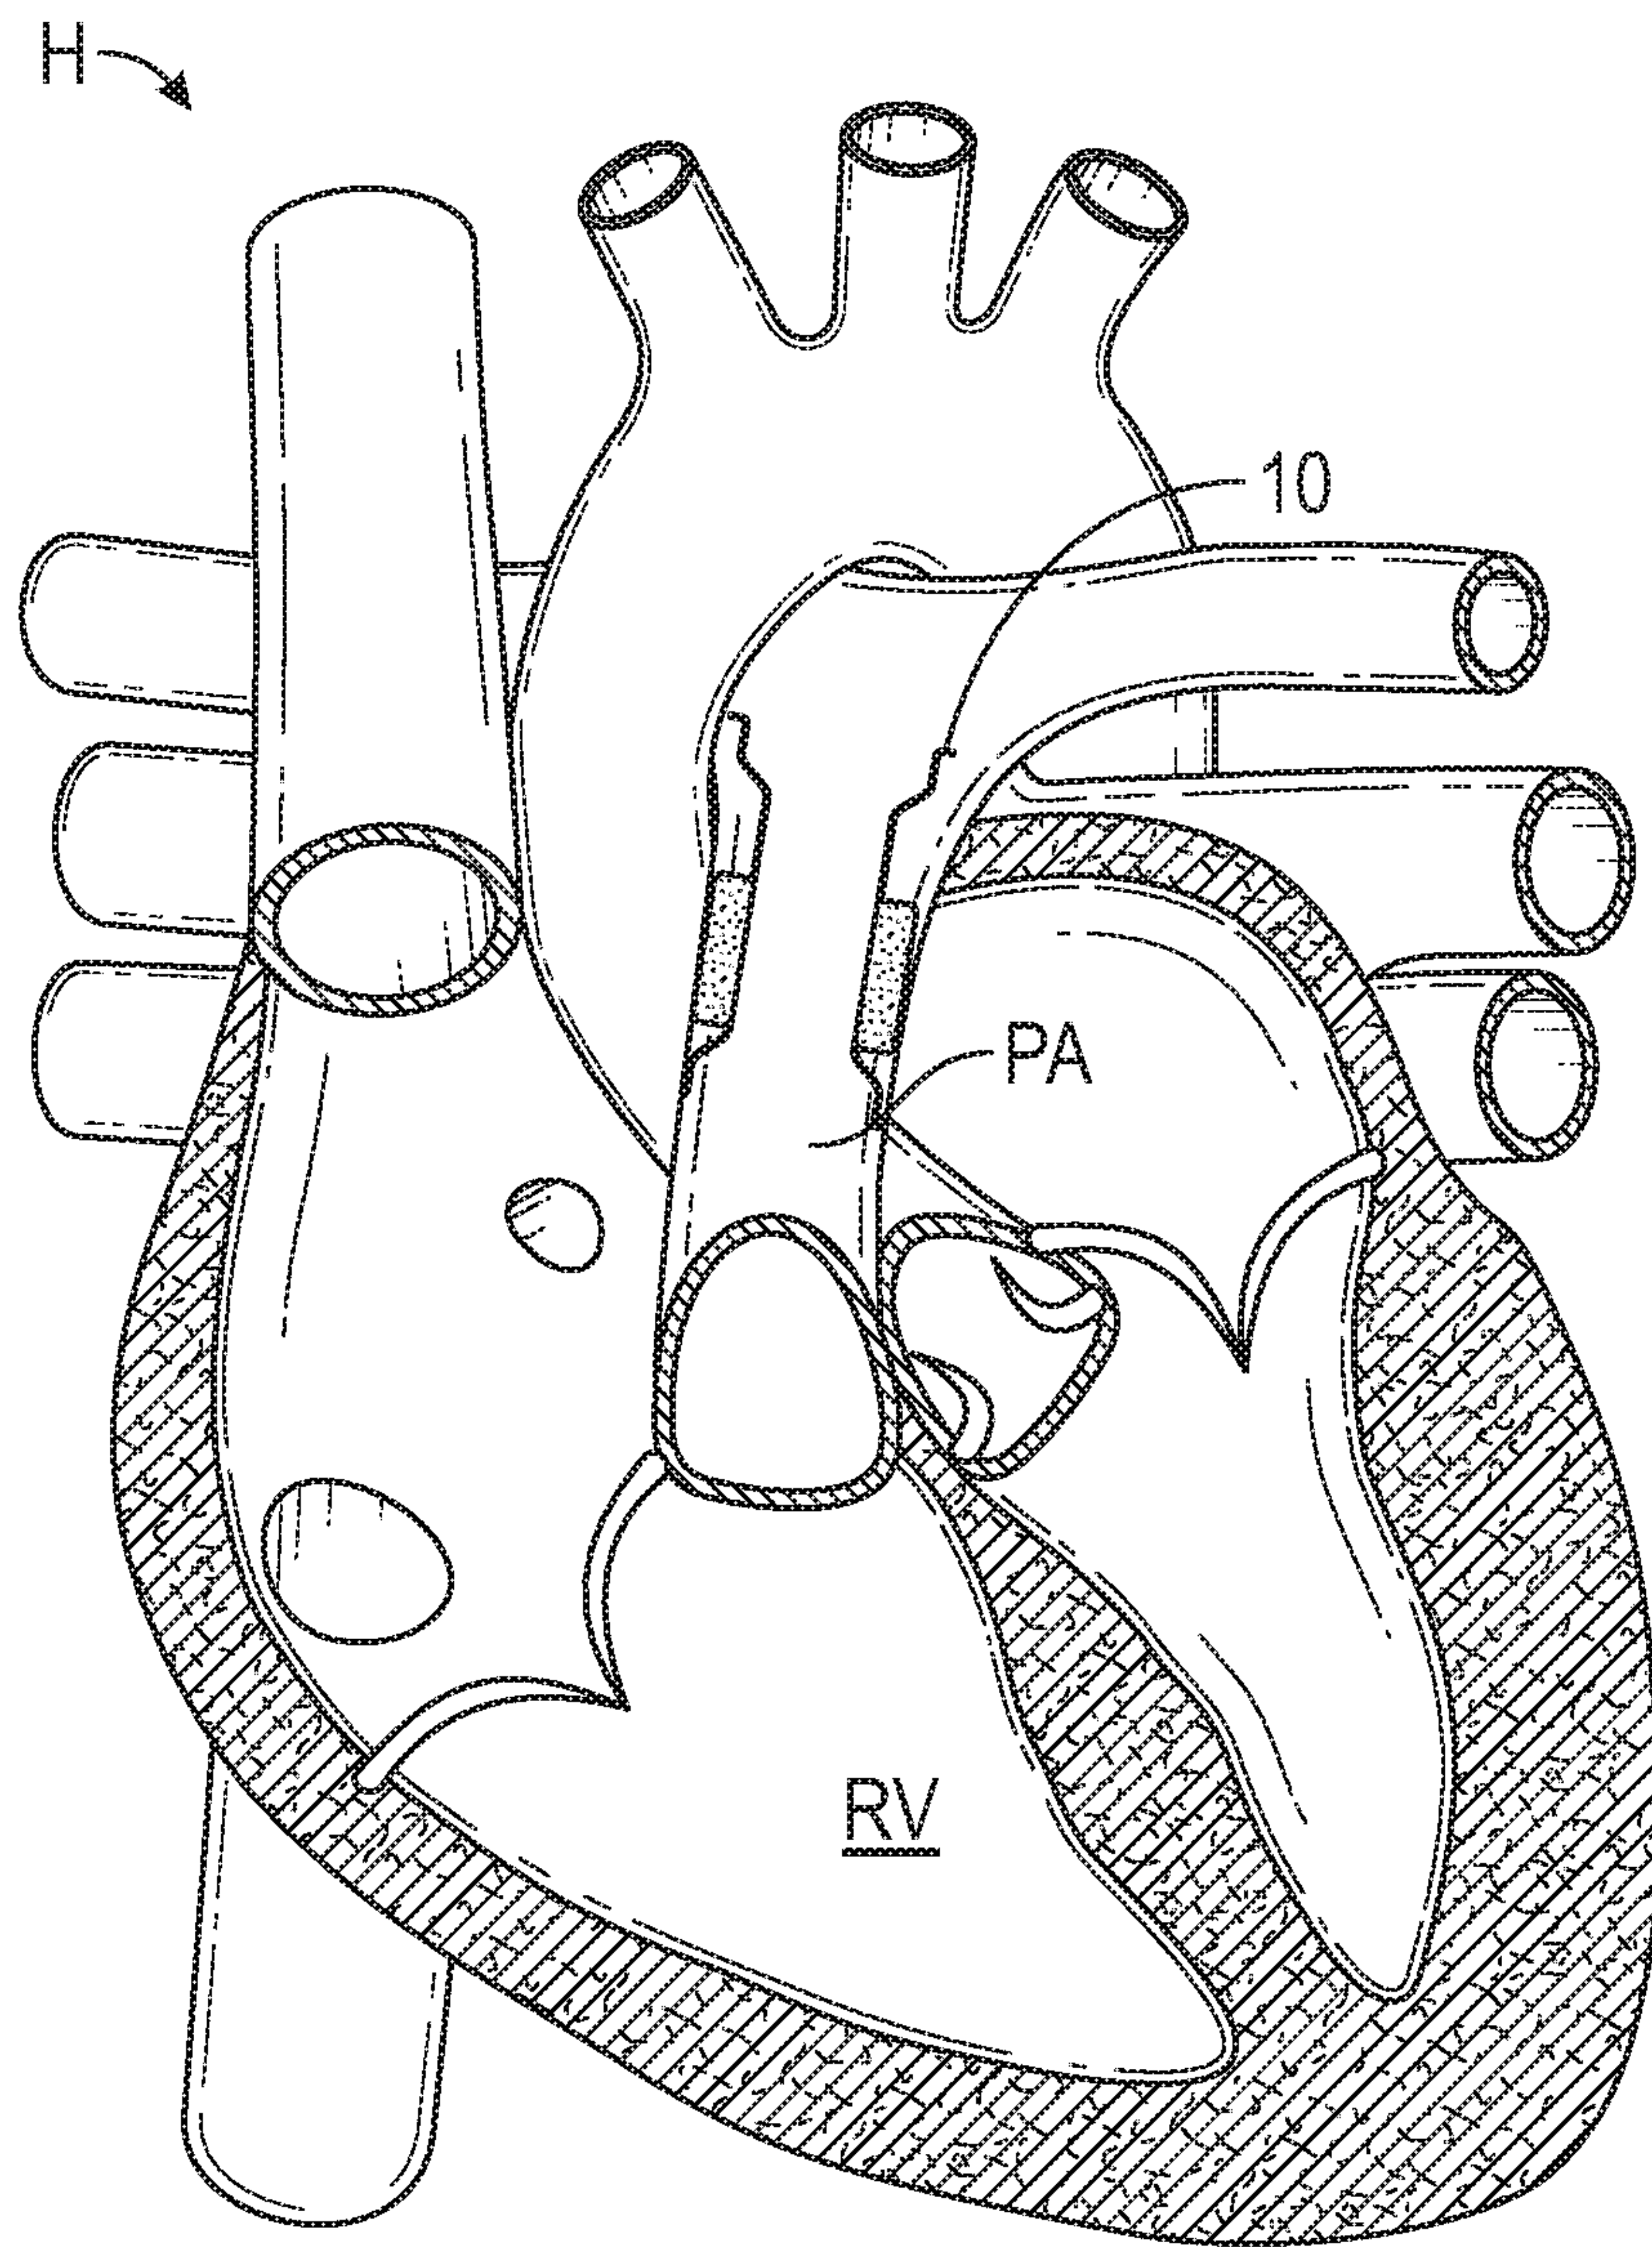


FIG. 40B

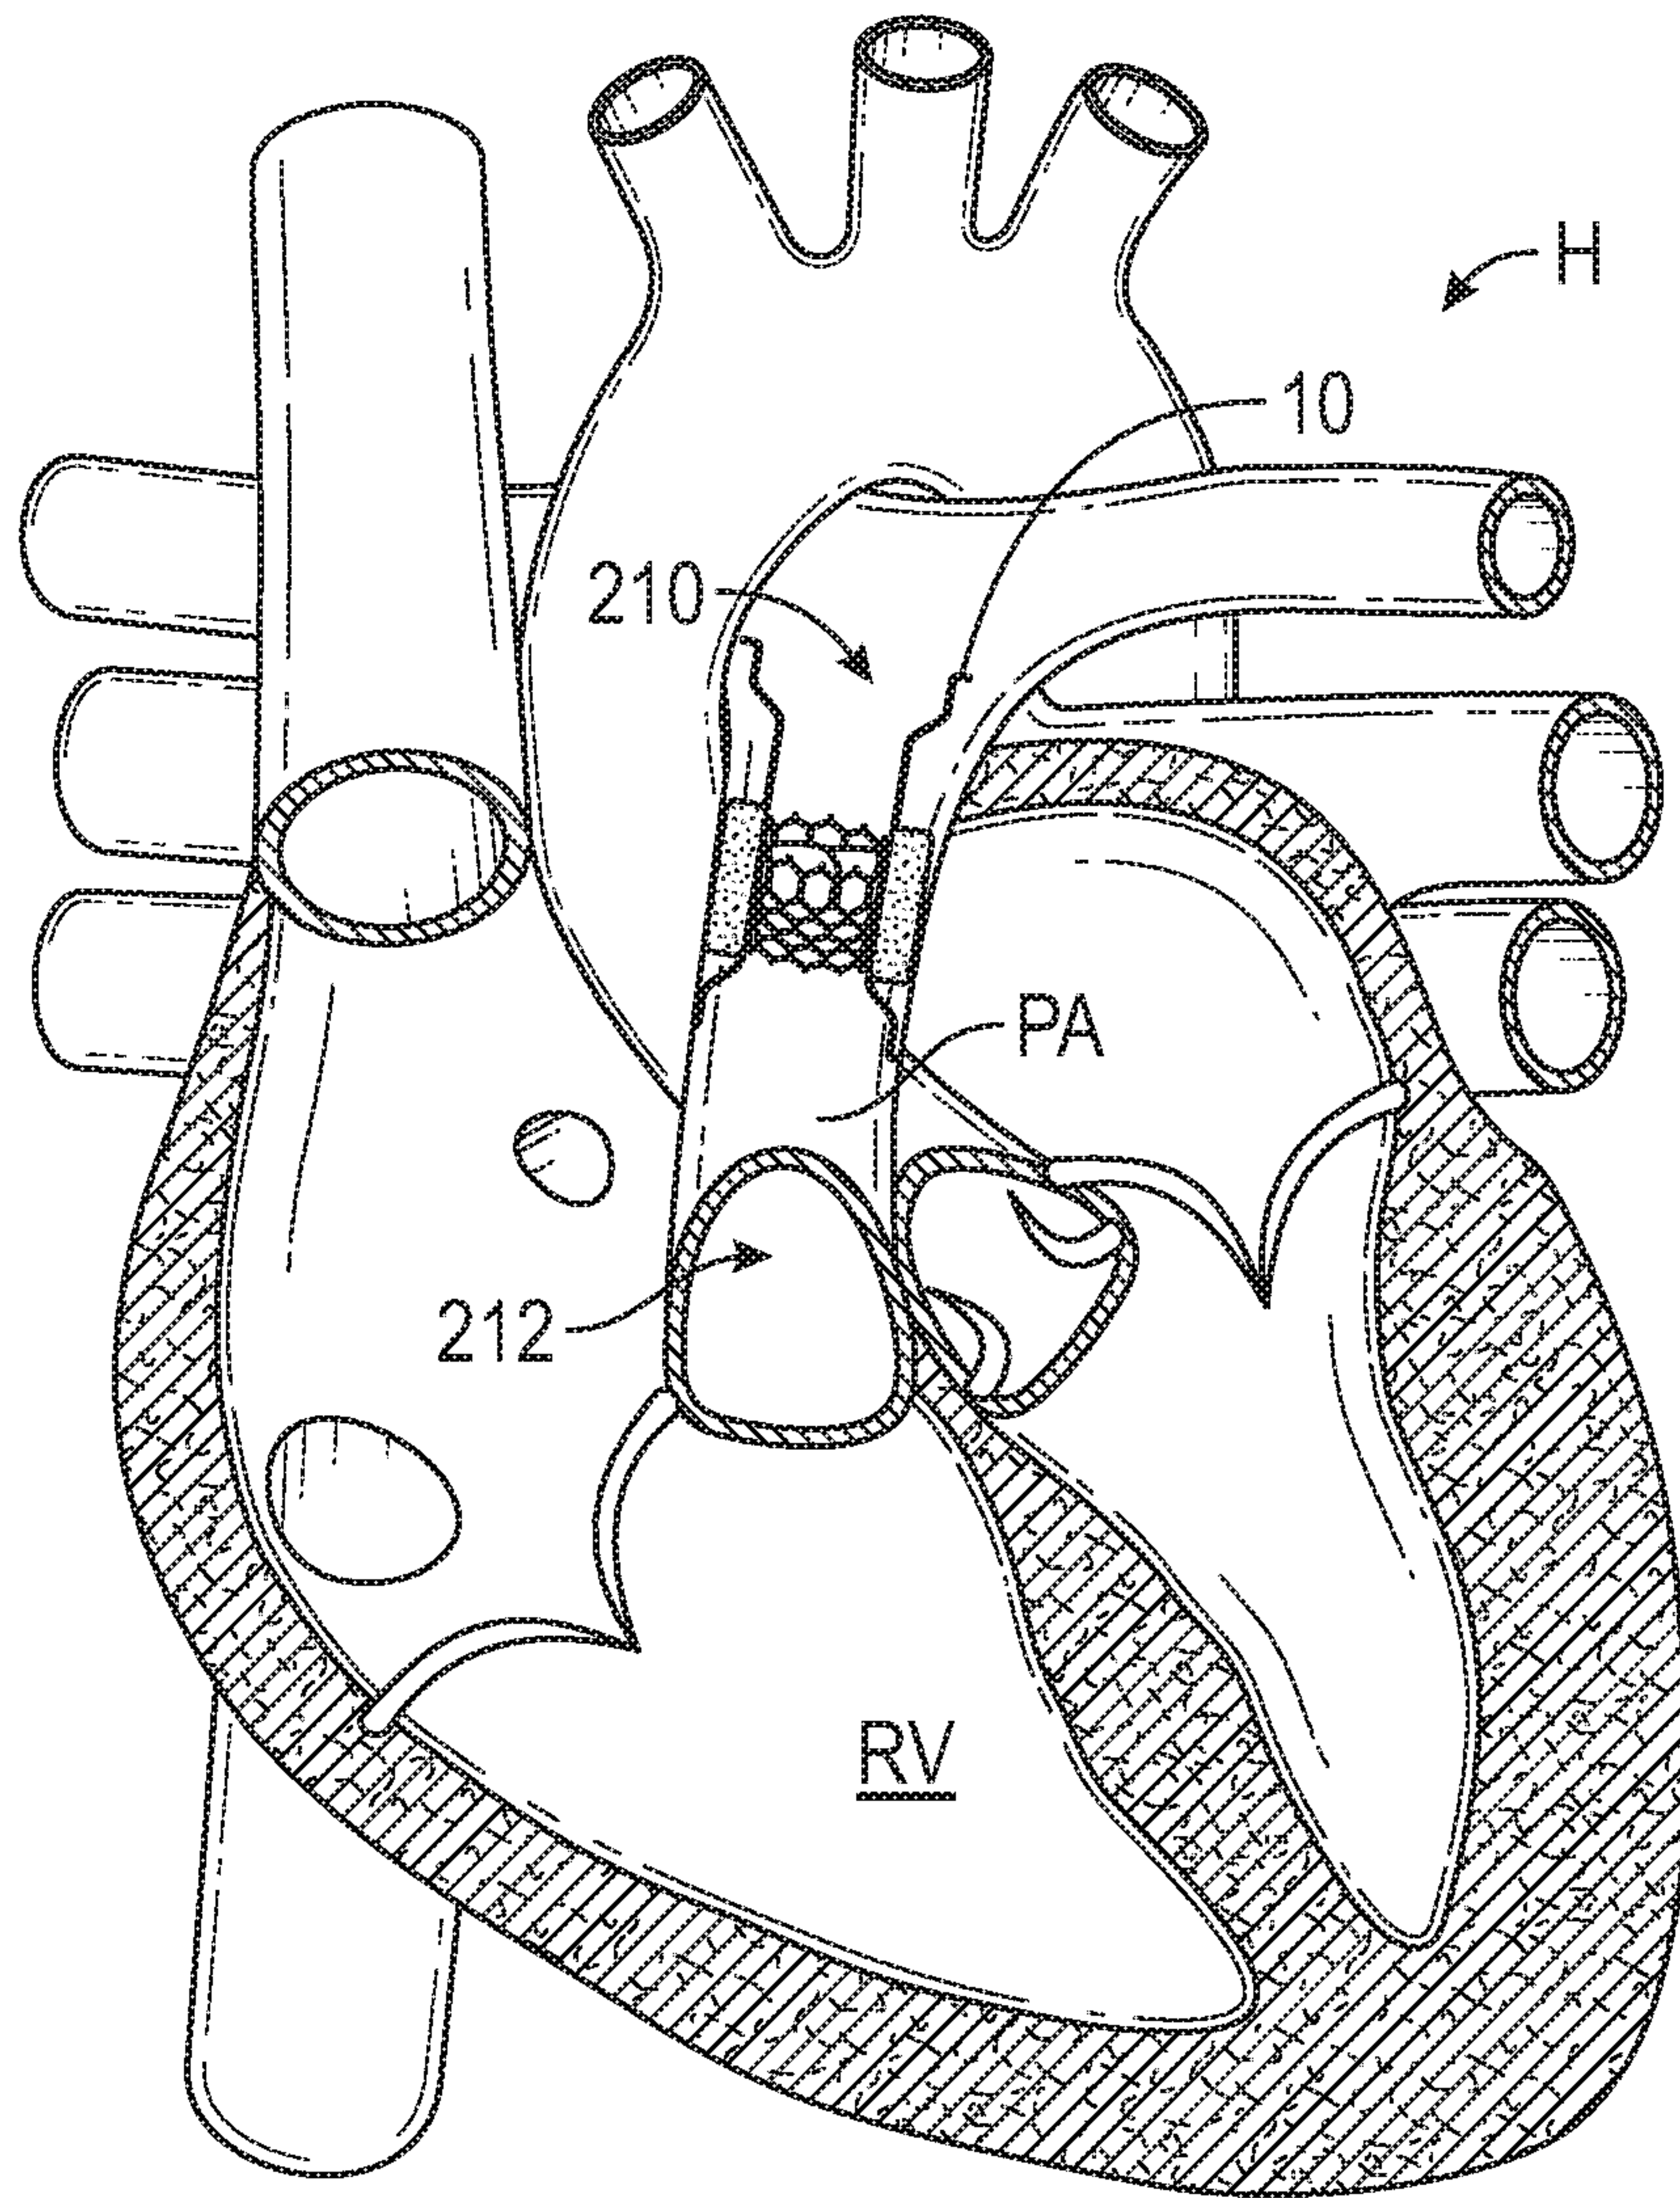


FIG. 40C

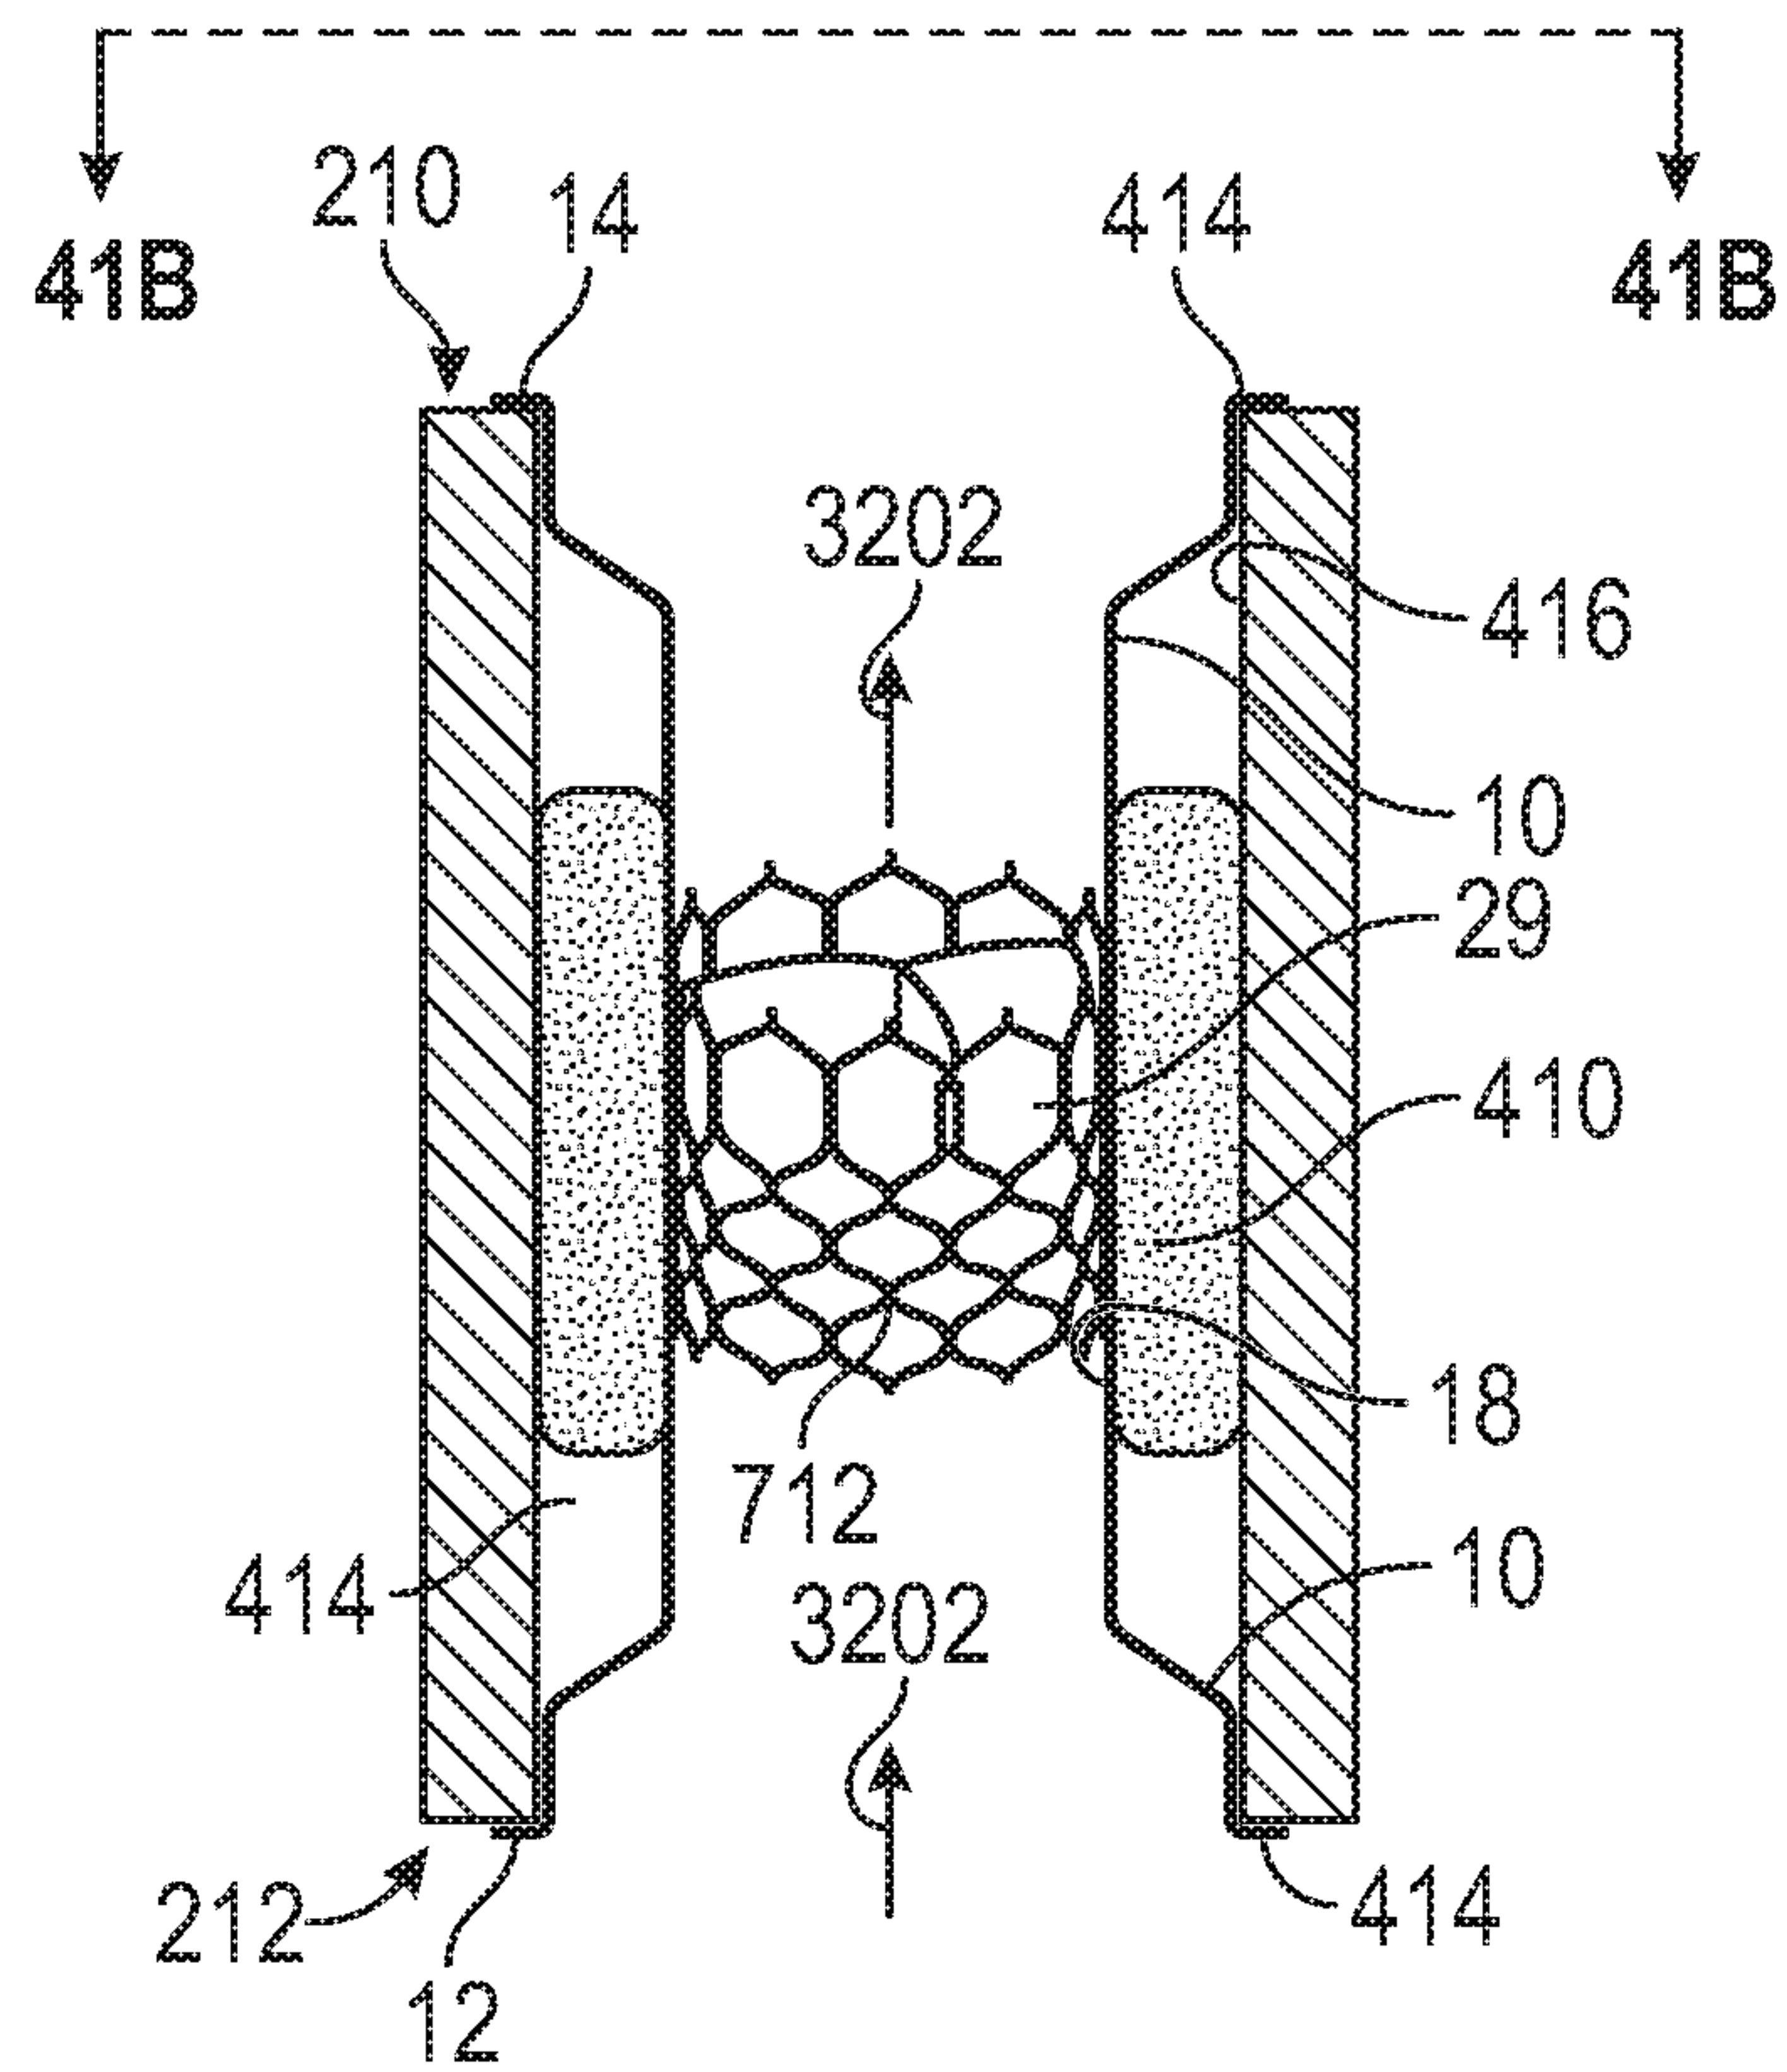


FIG. 41A

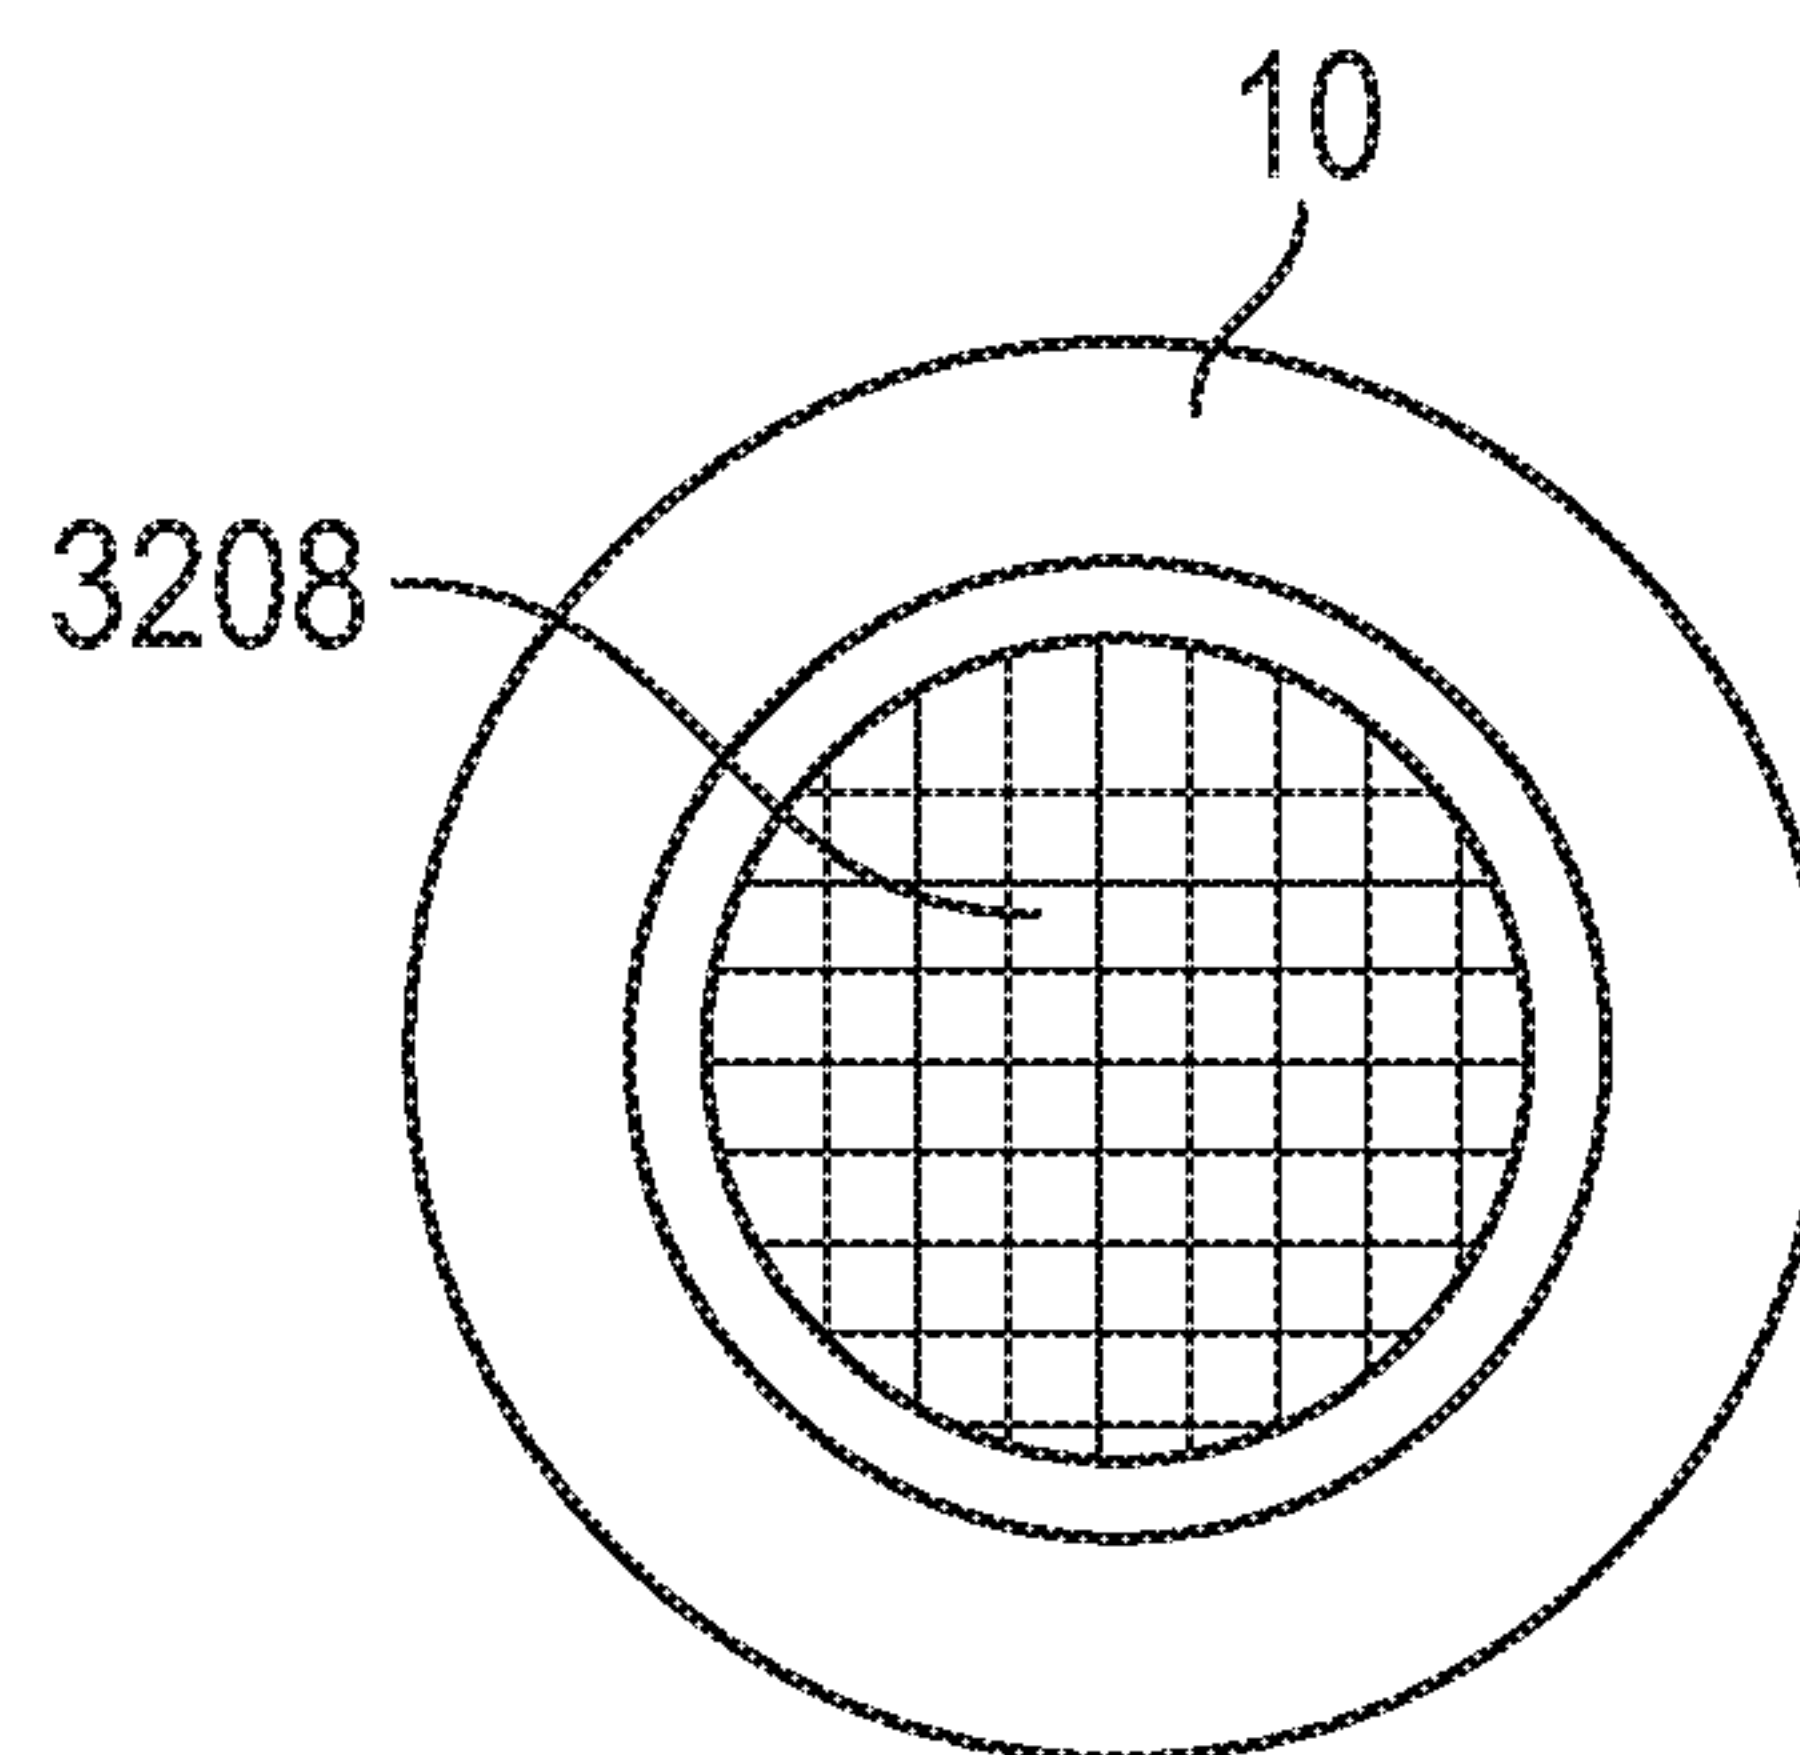


FIG. 41B

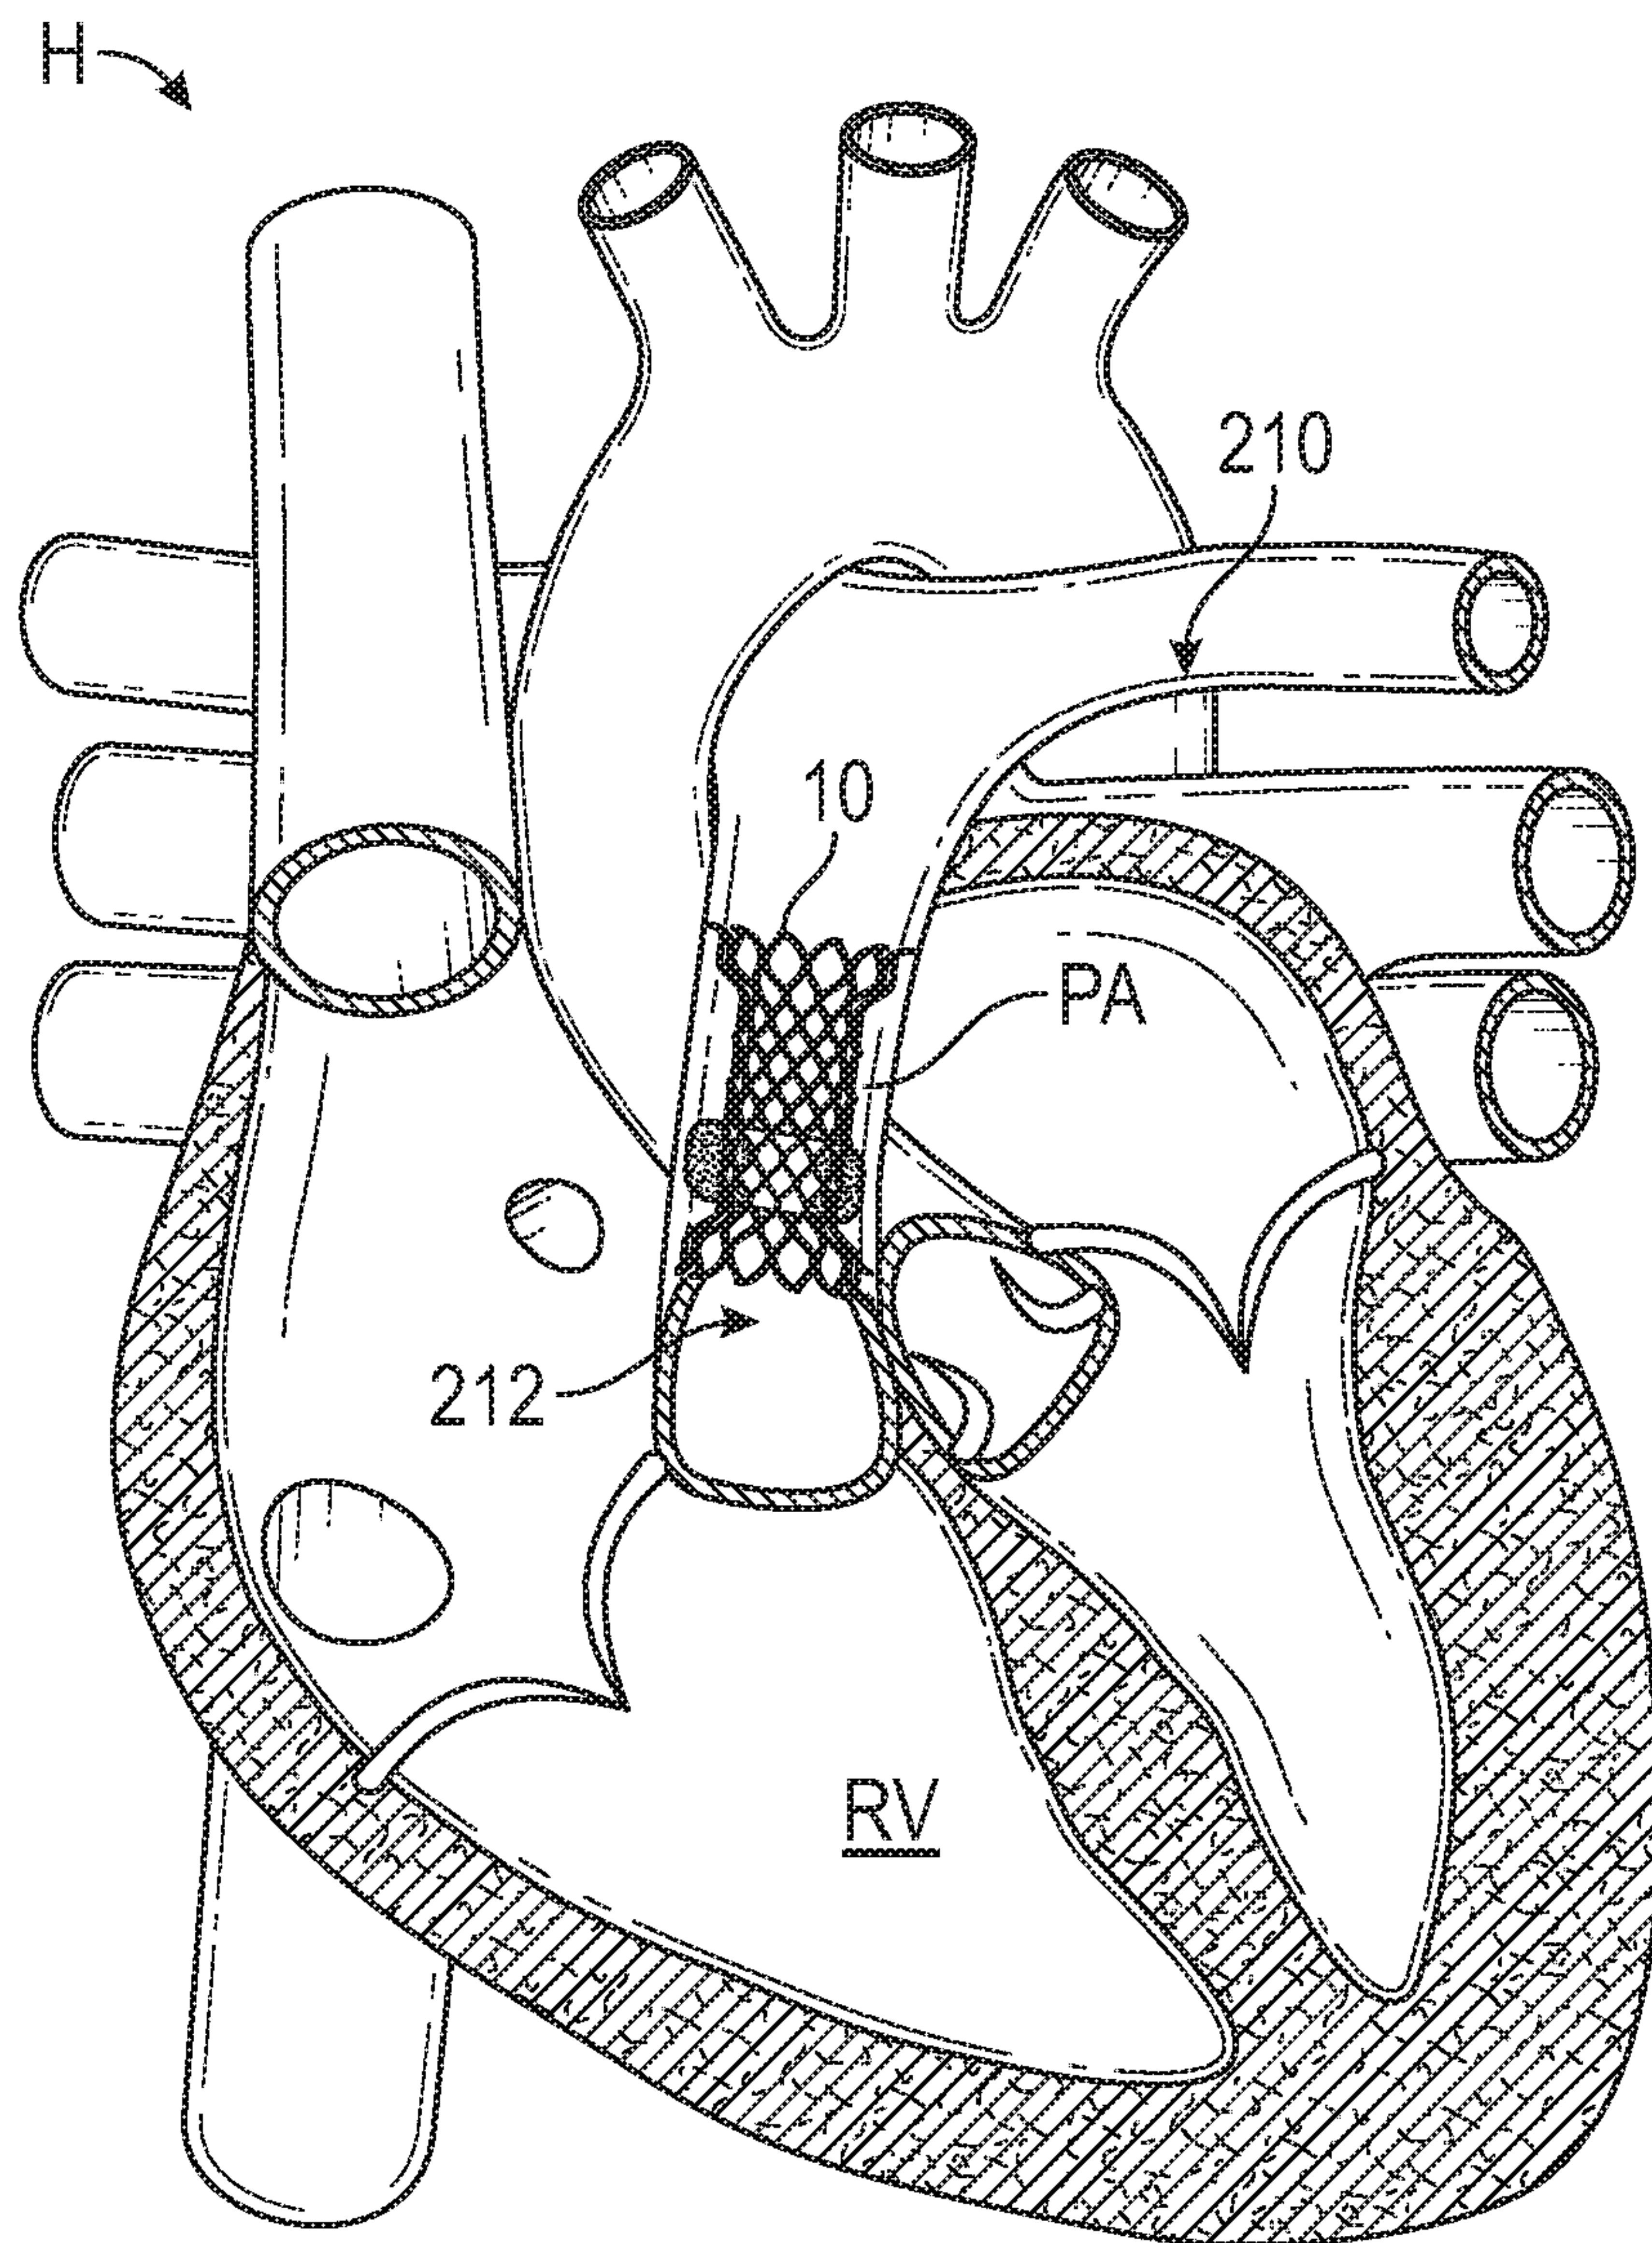


FIG. 42

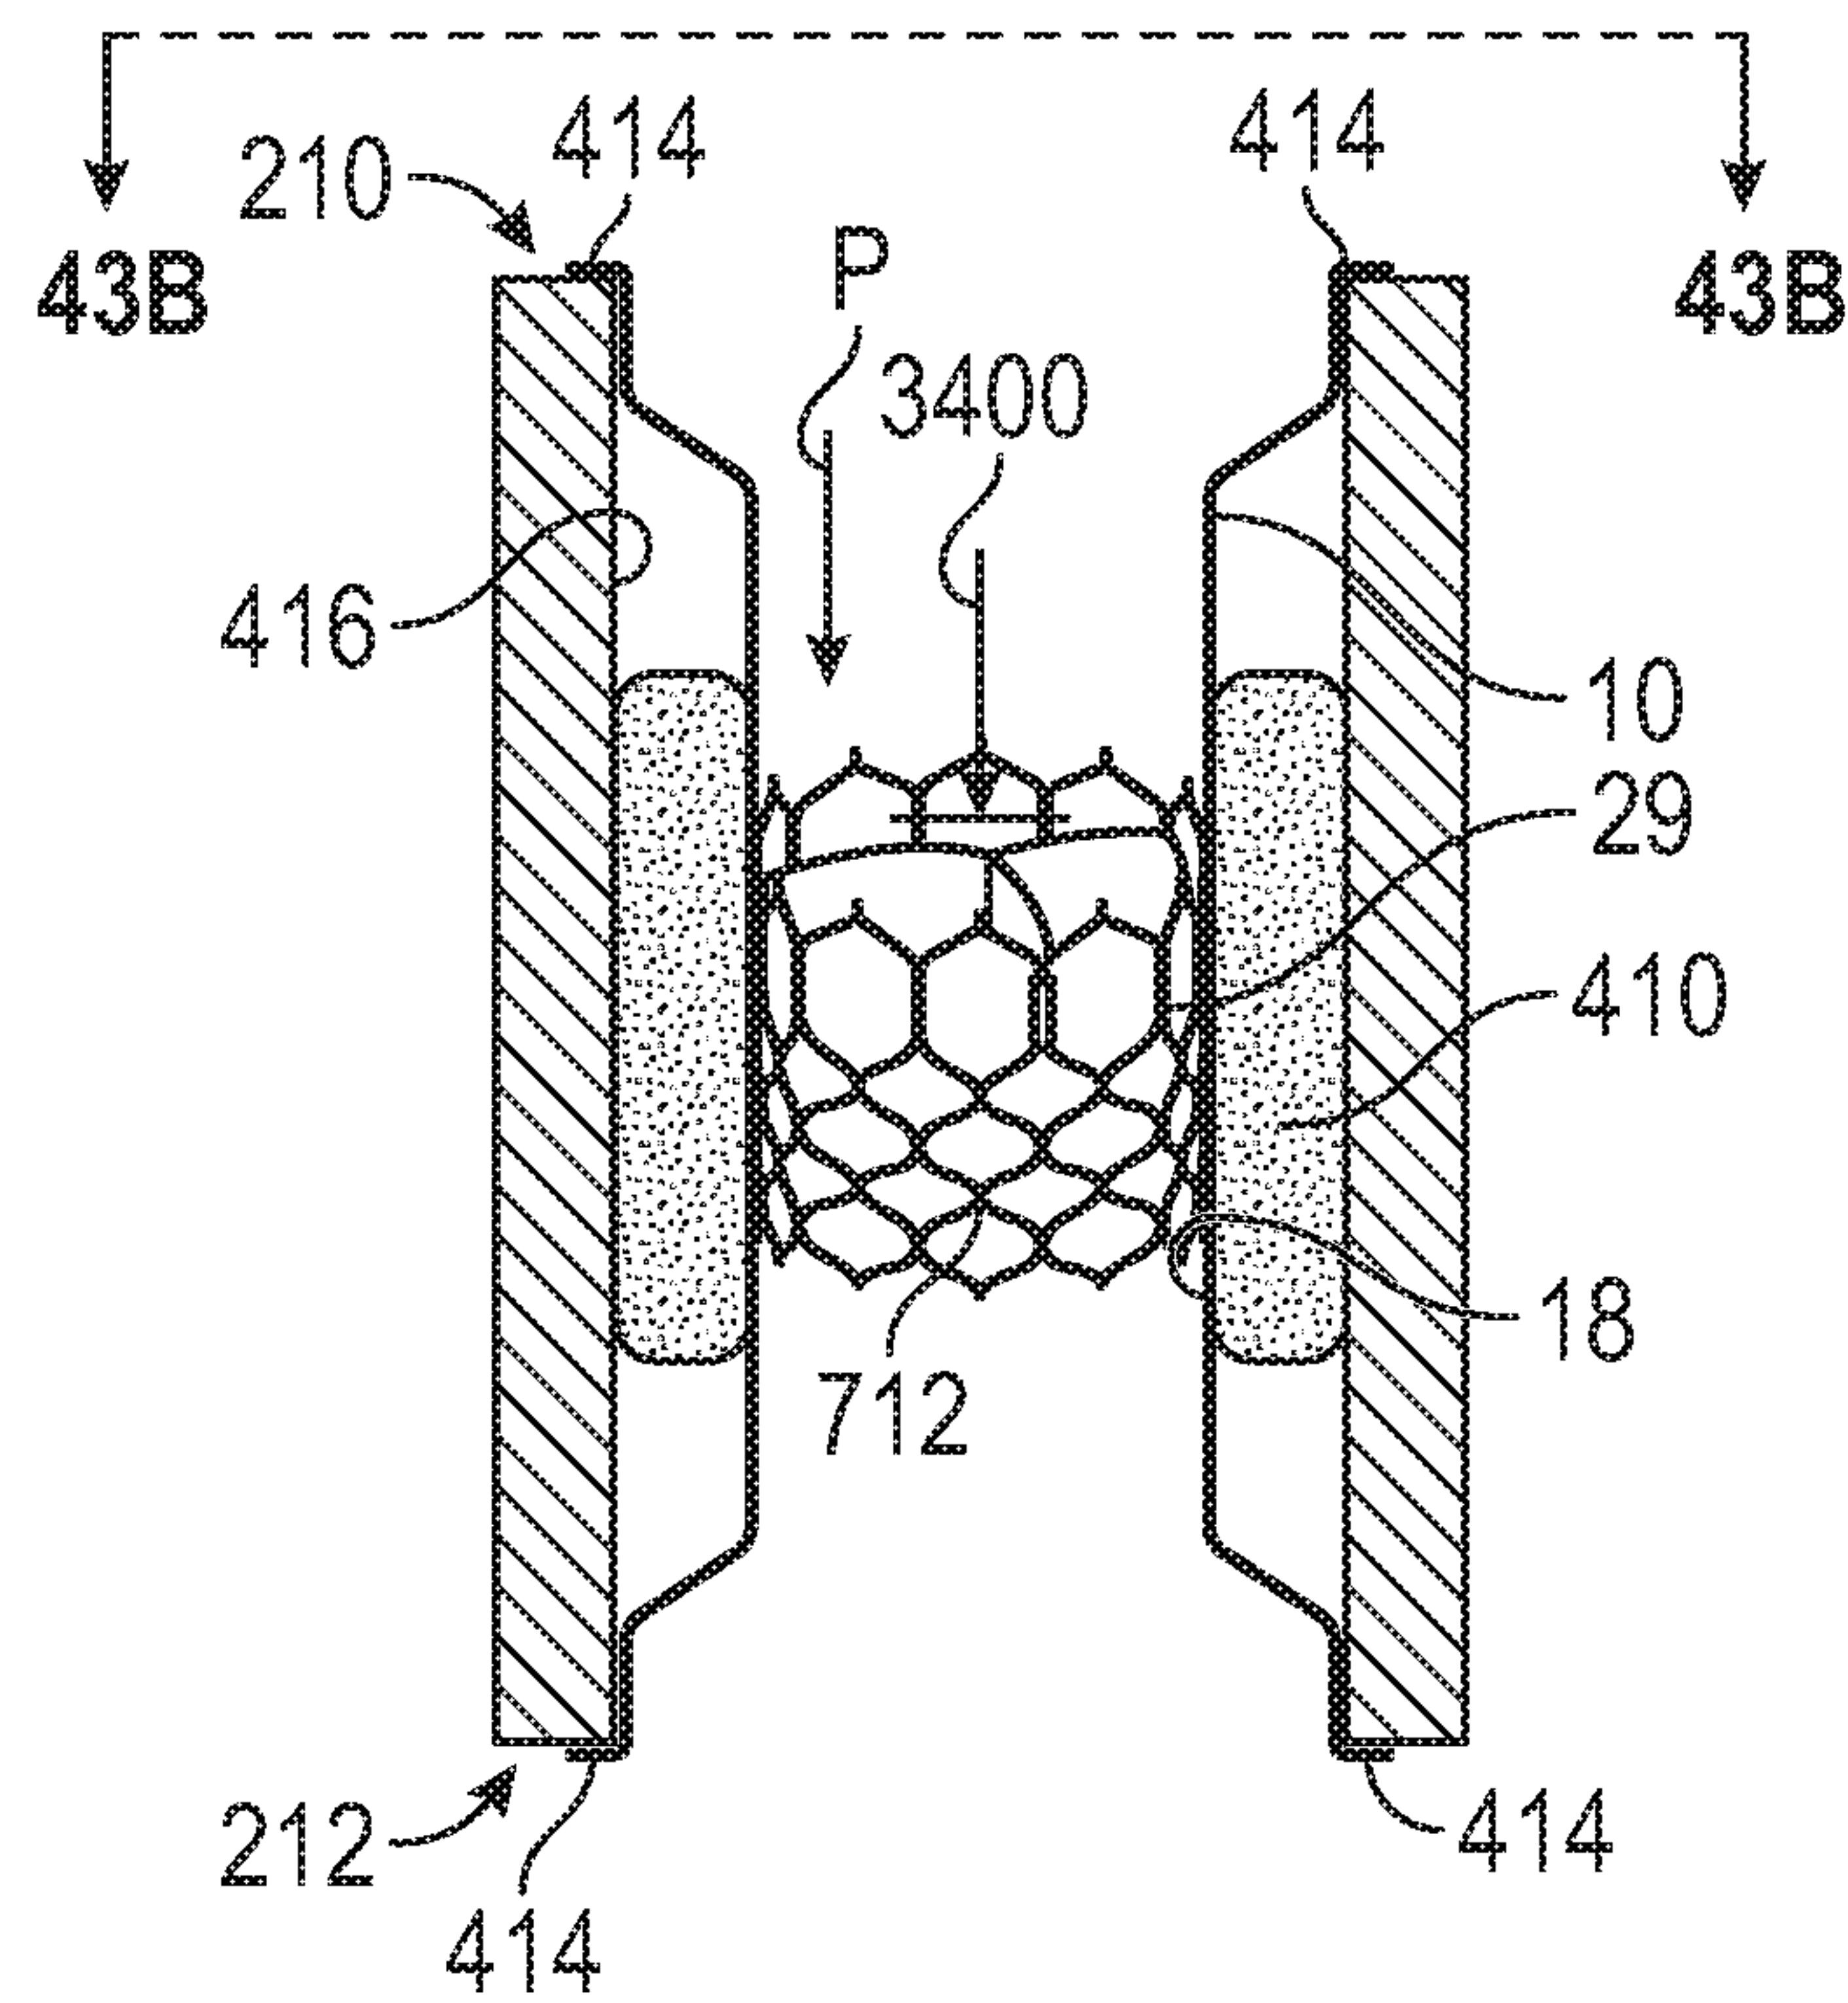


FIG. 43A

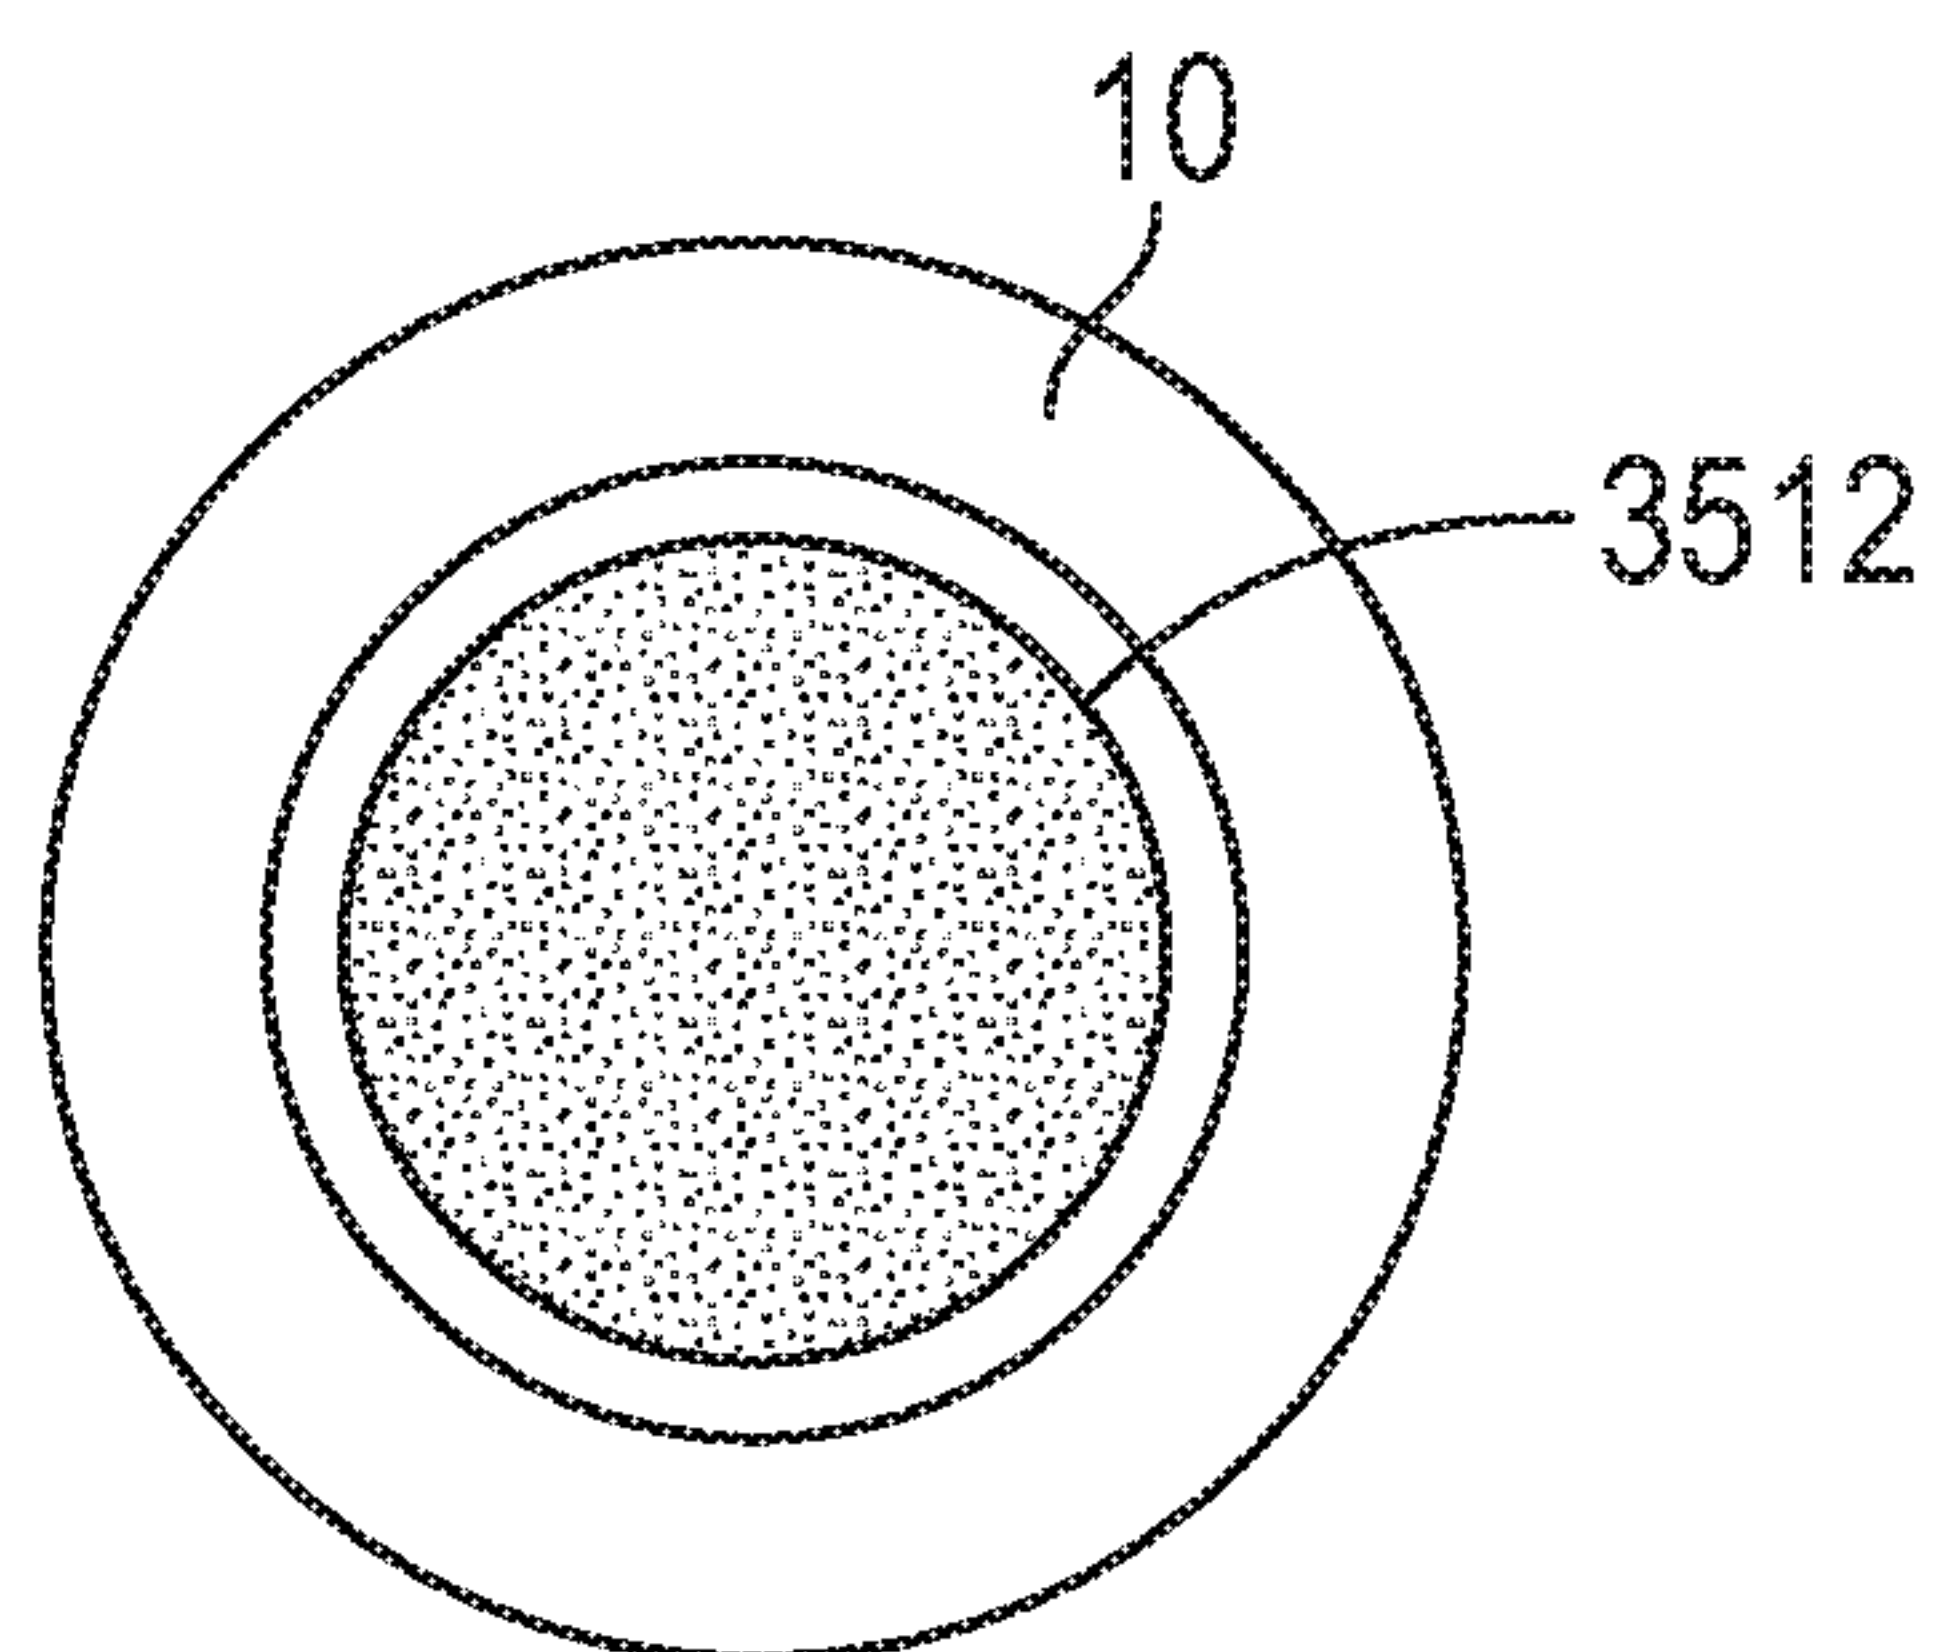


FIG. 43B

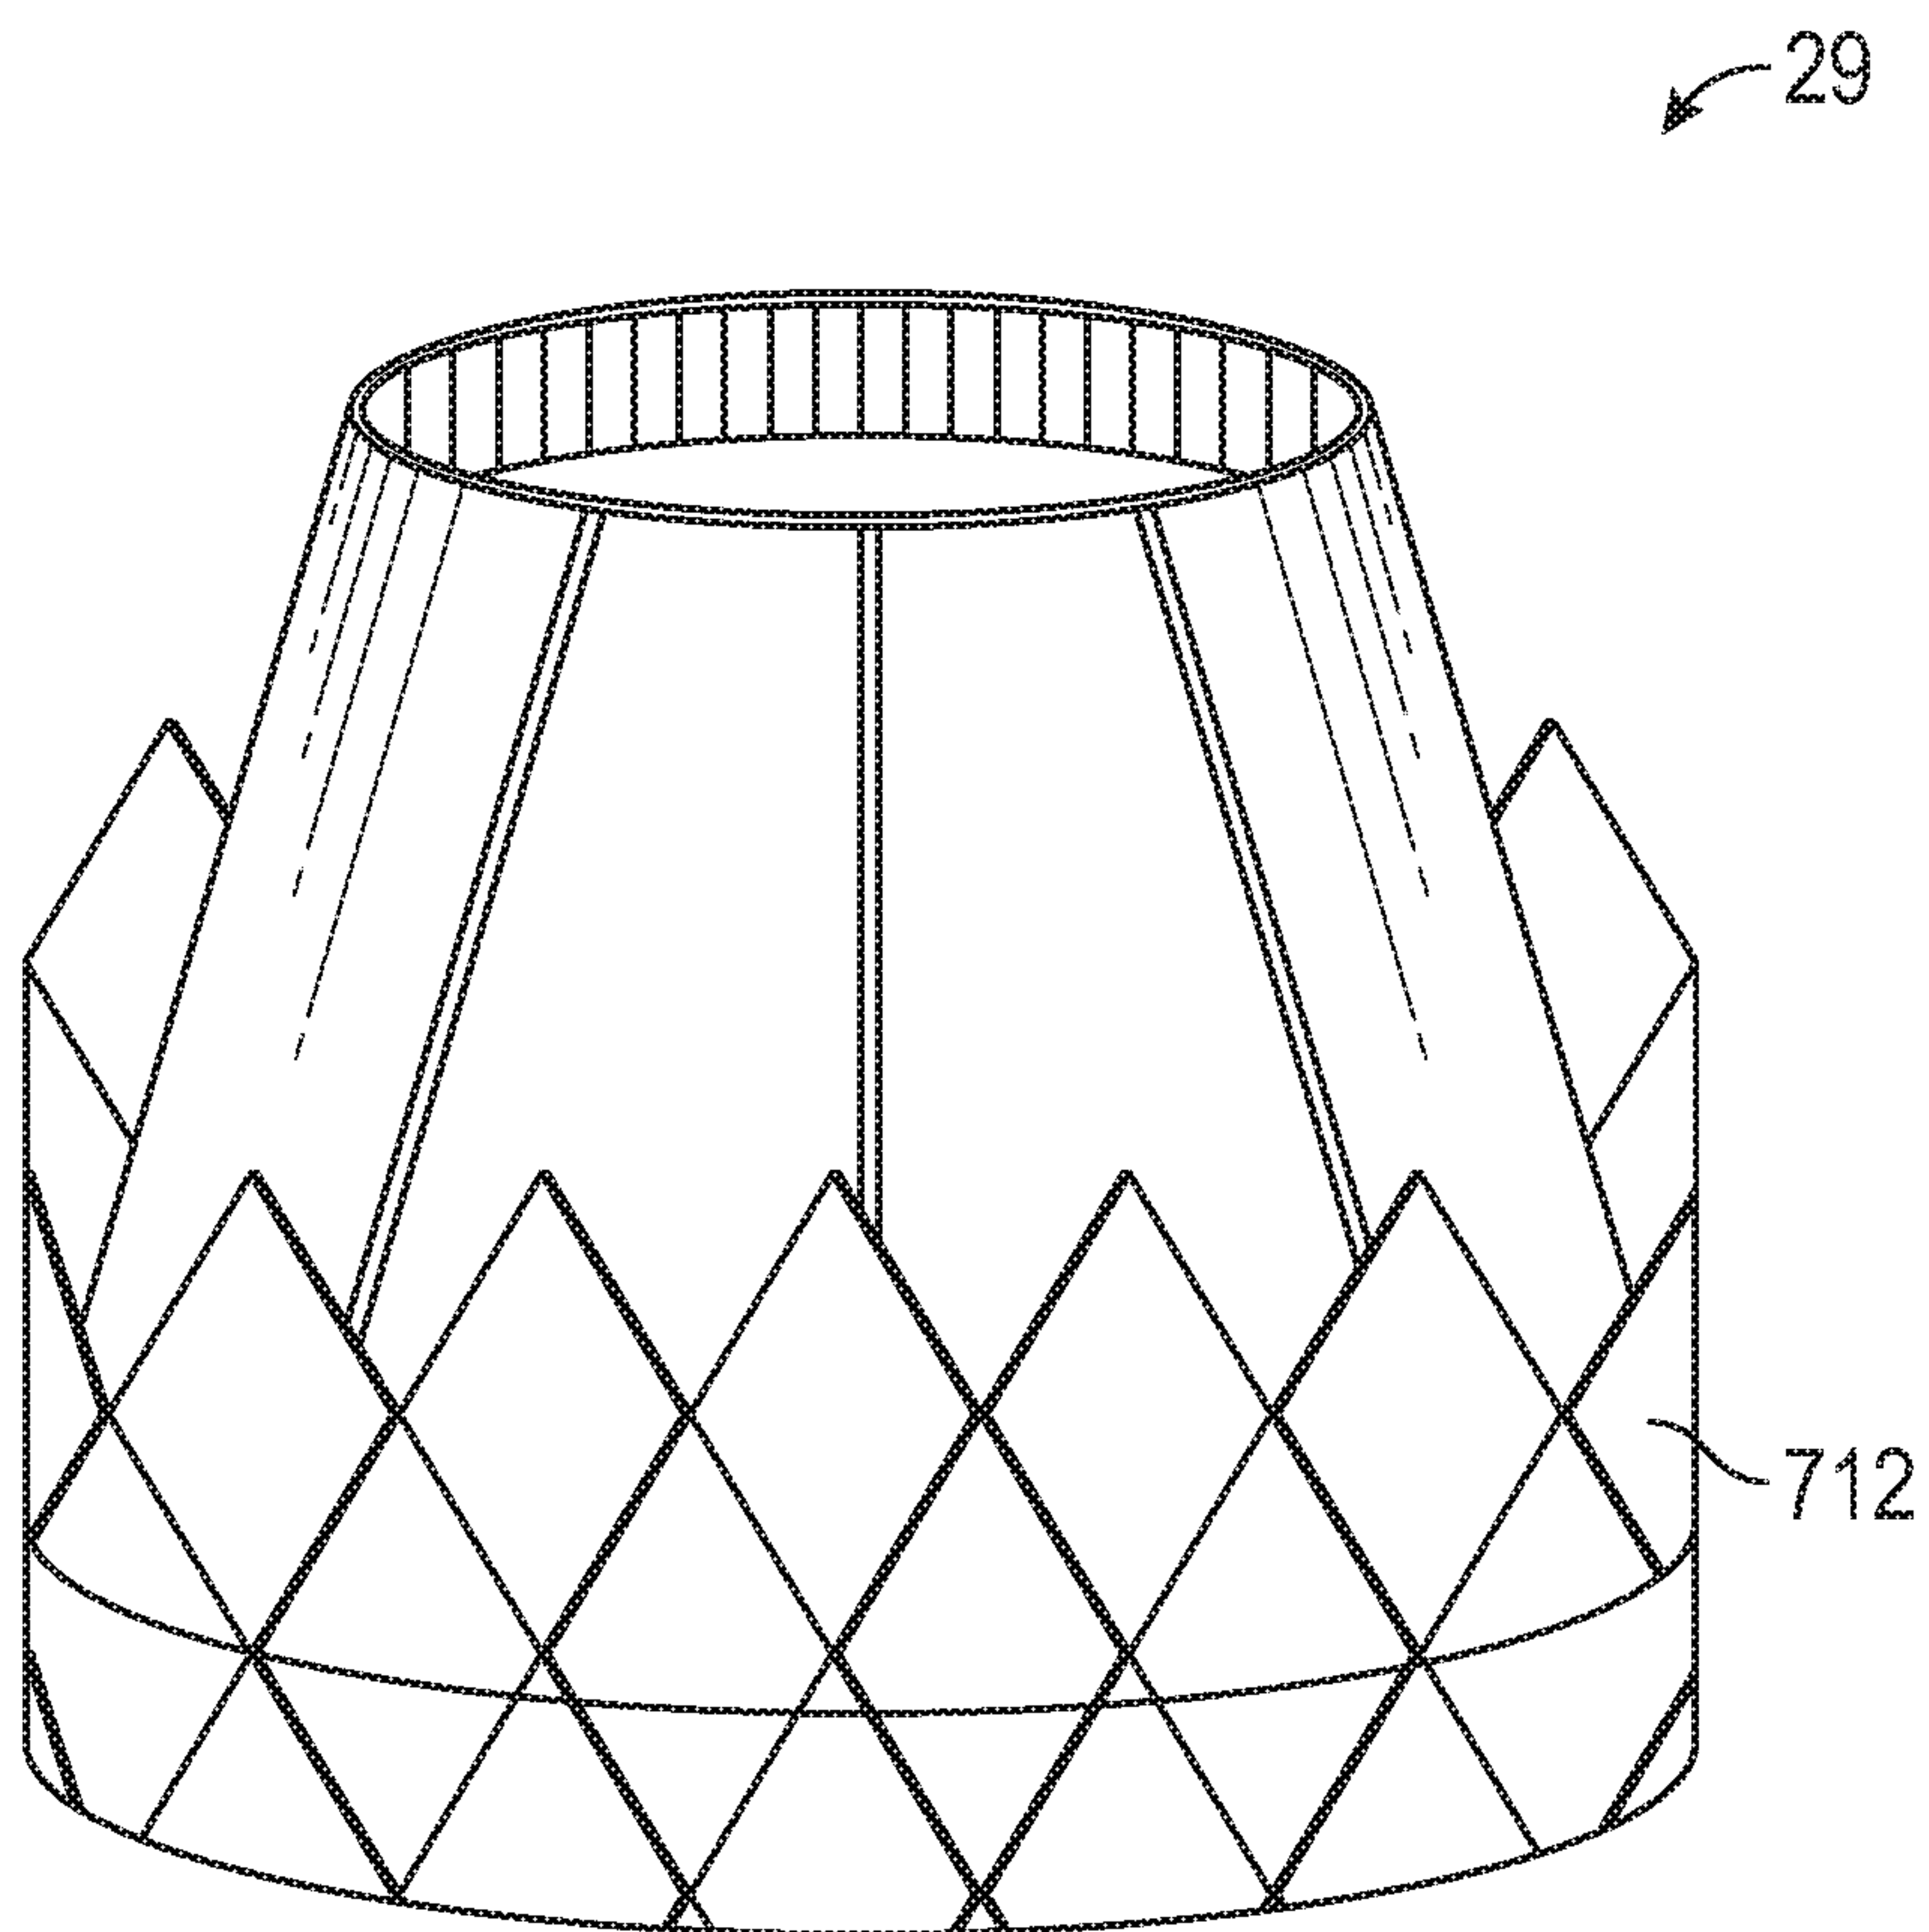


FIG. 44

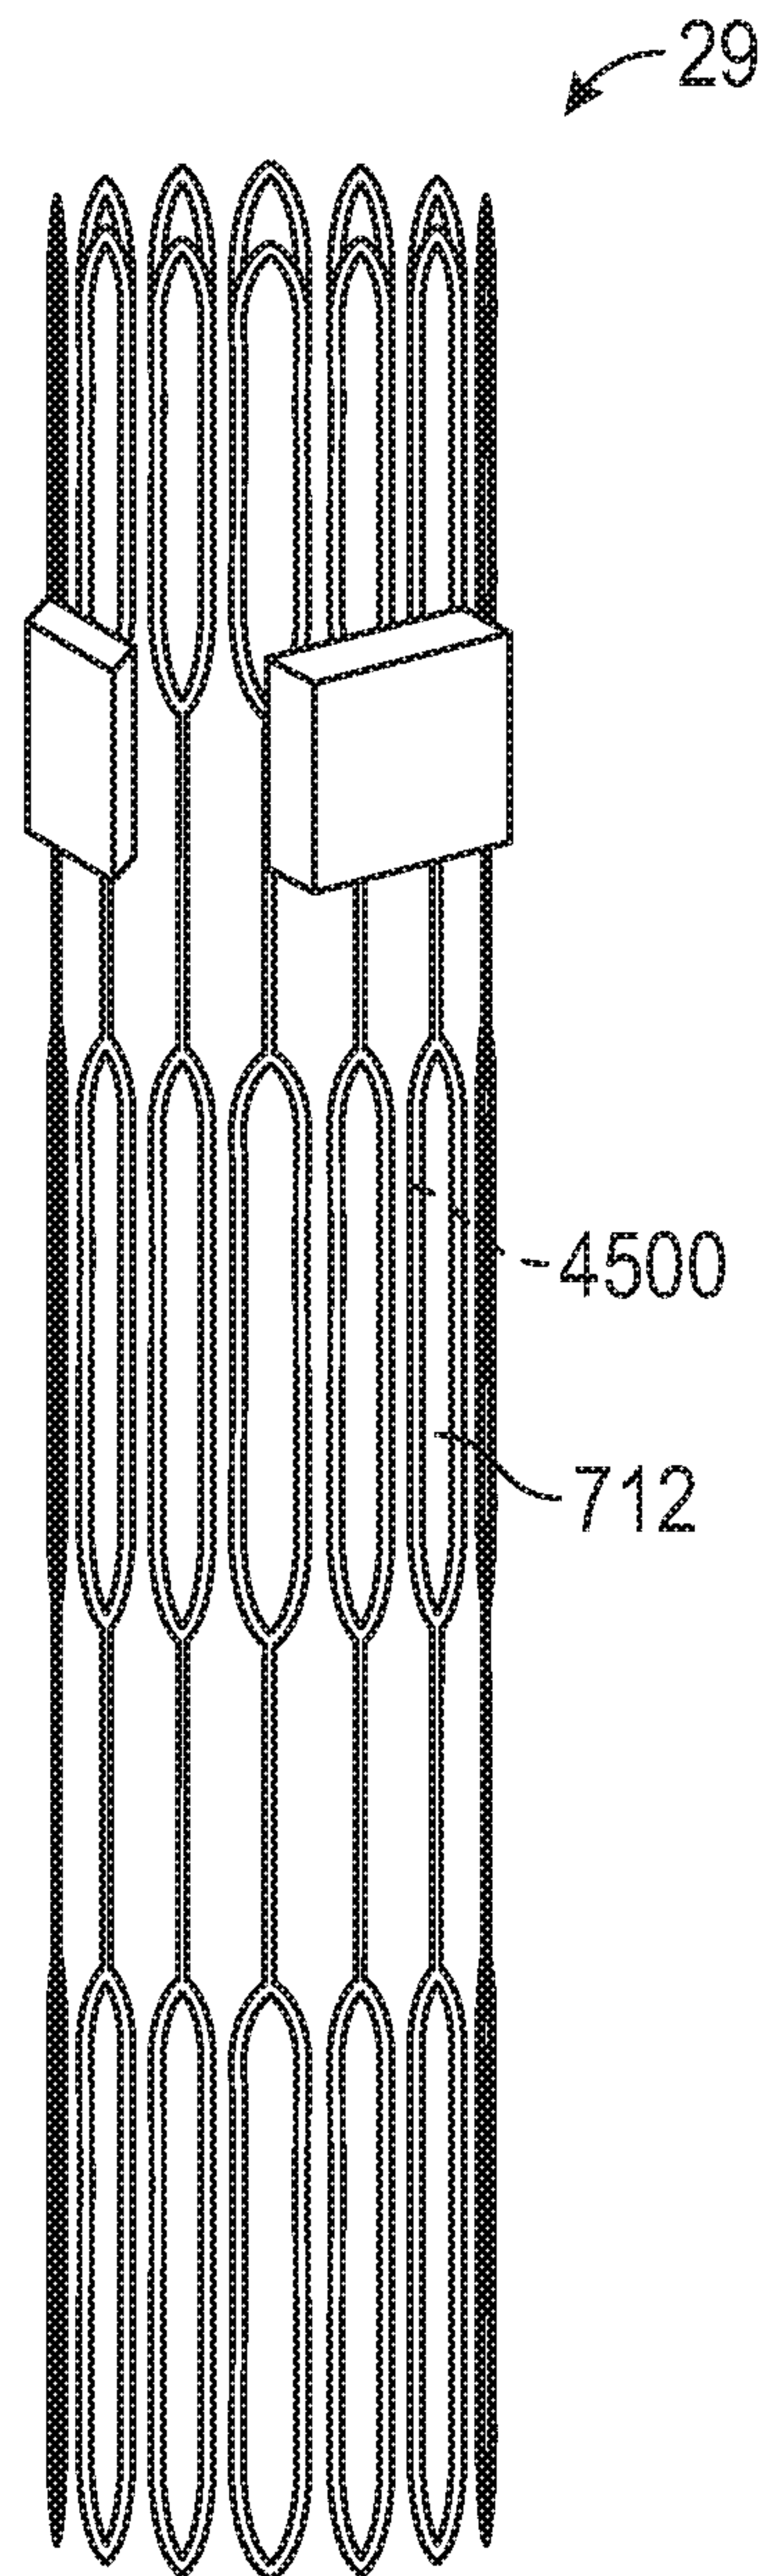


FIG. 45

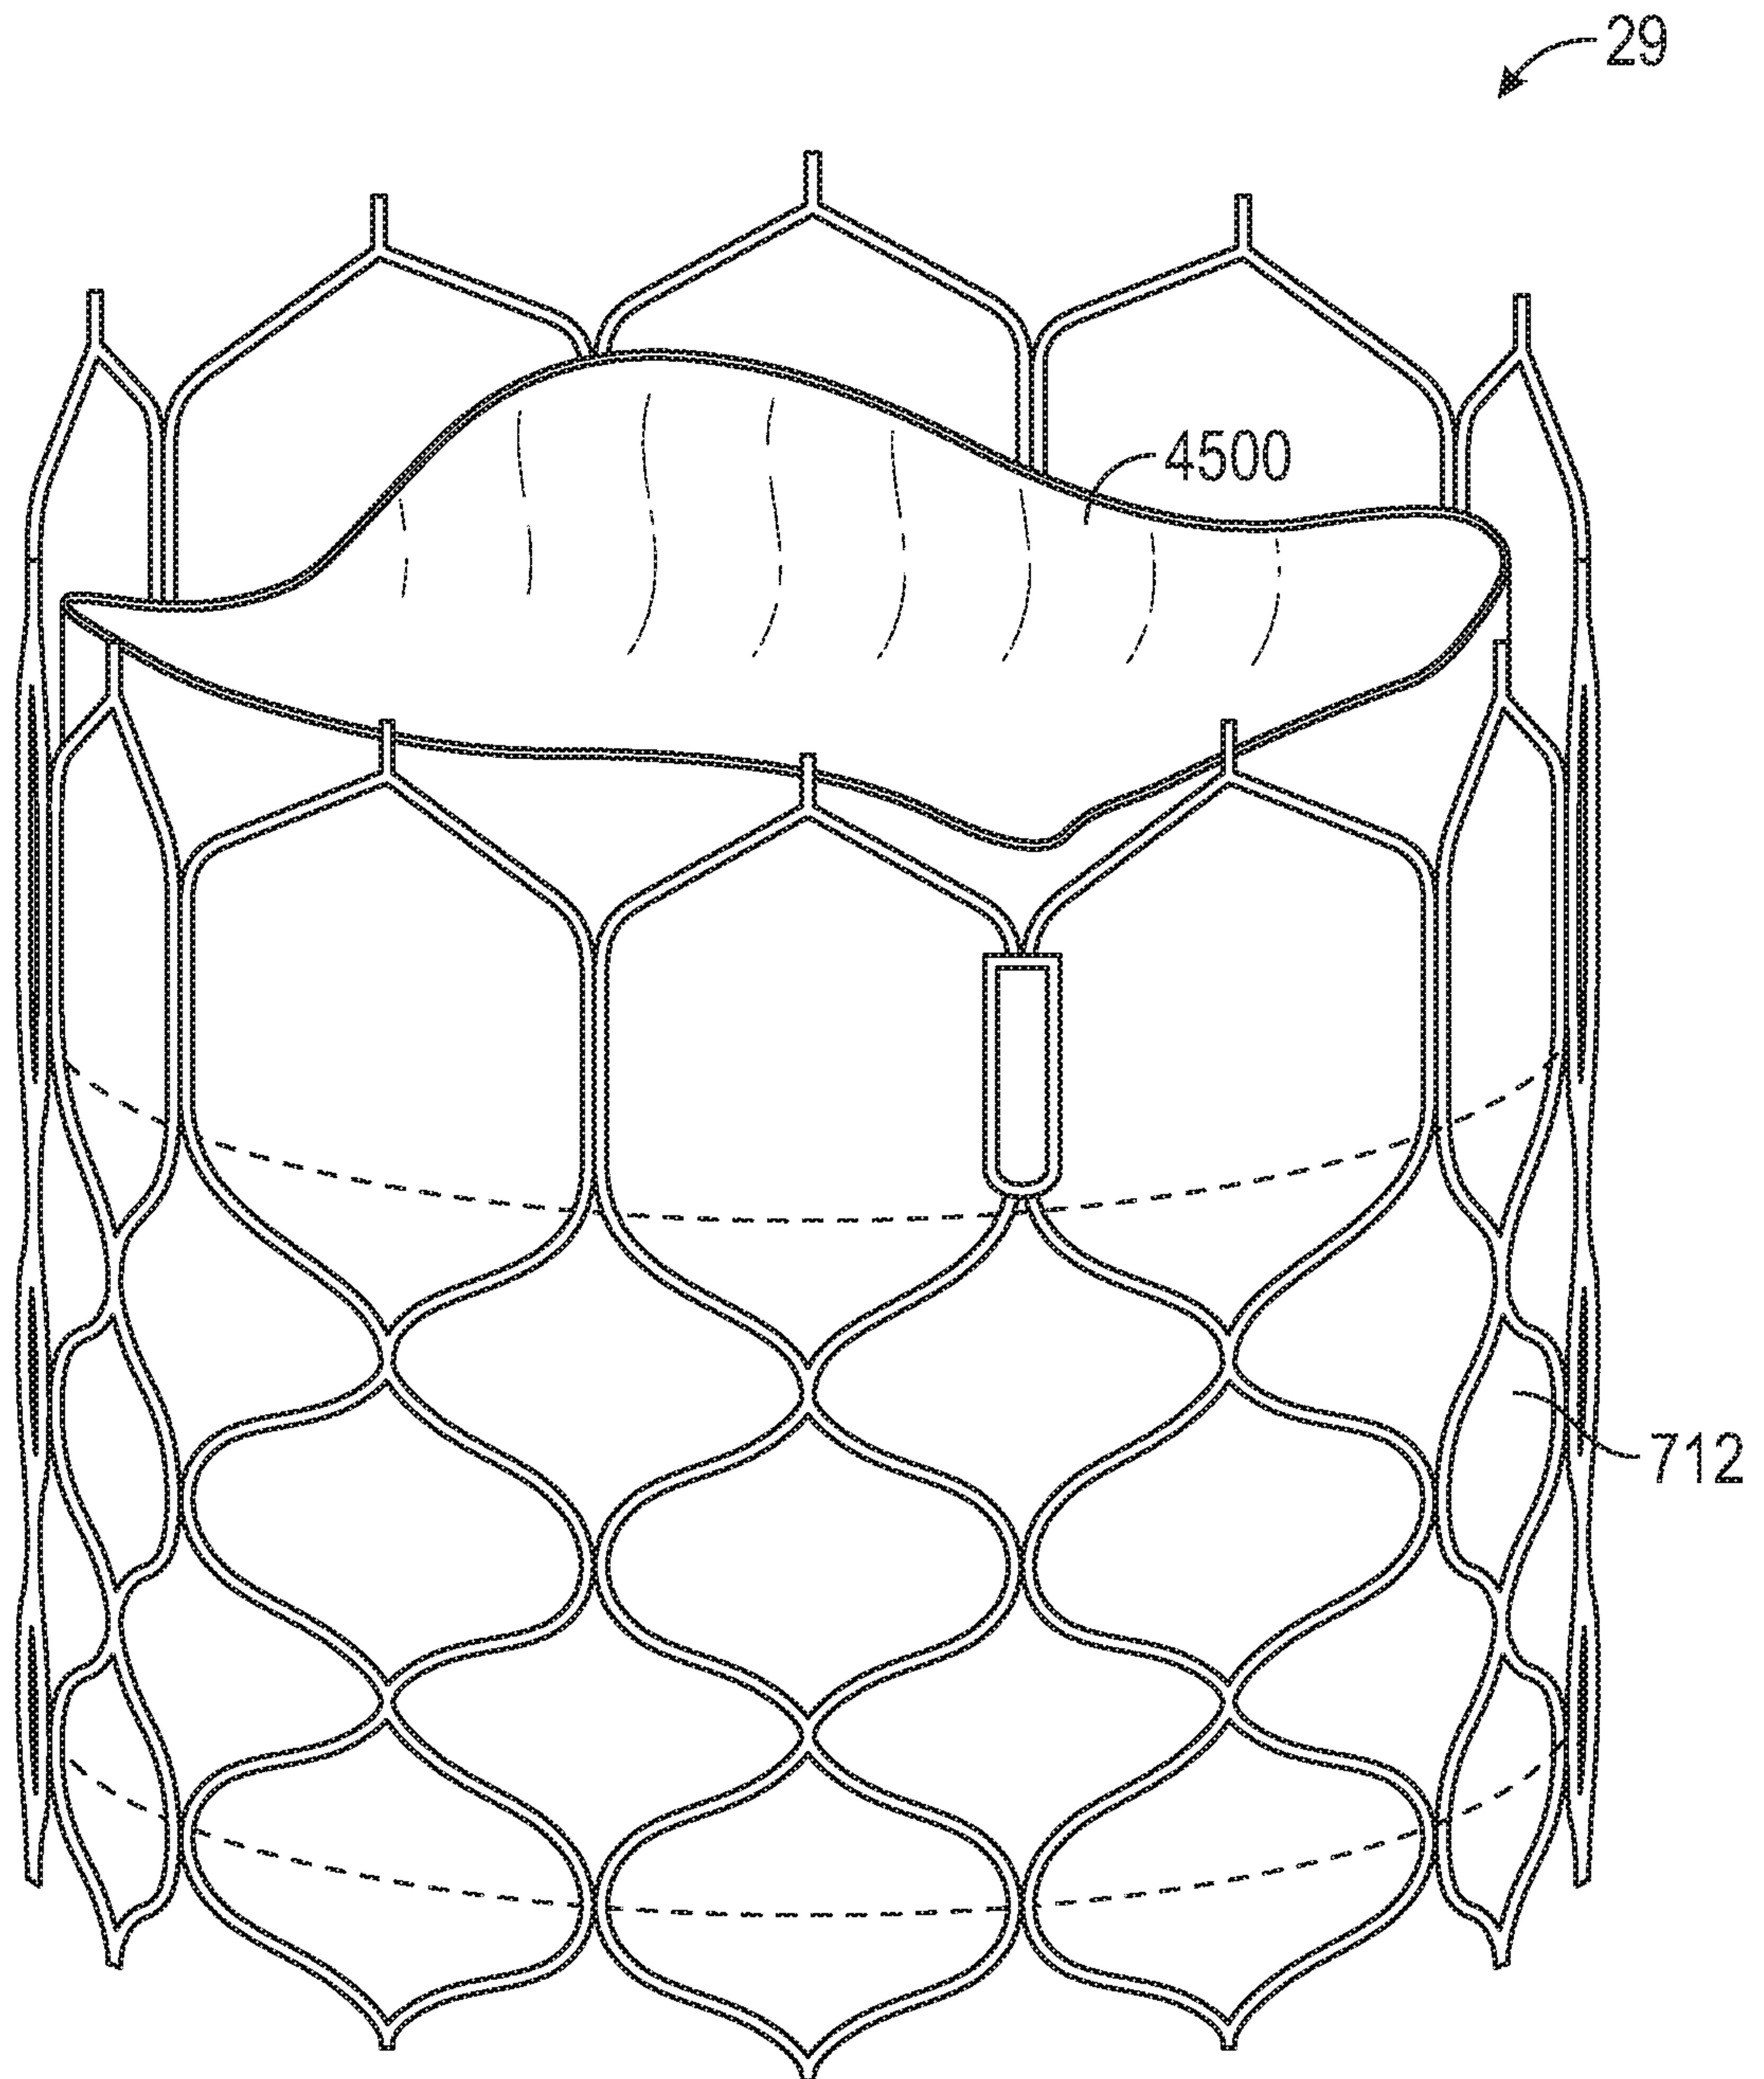


FIG. 46

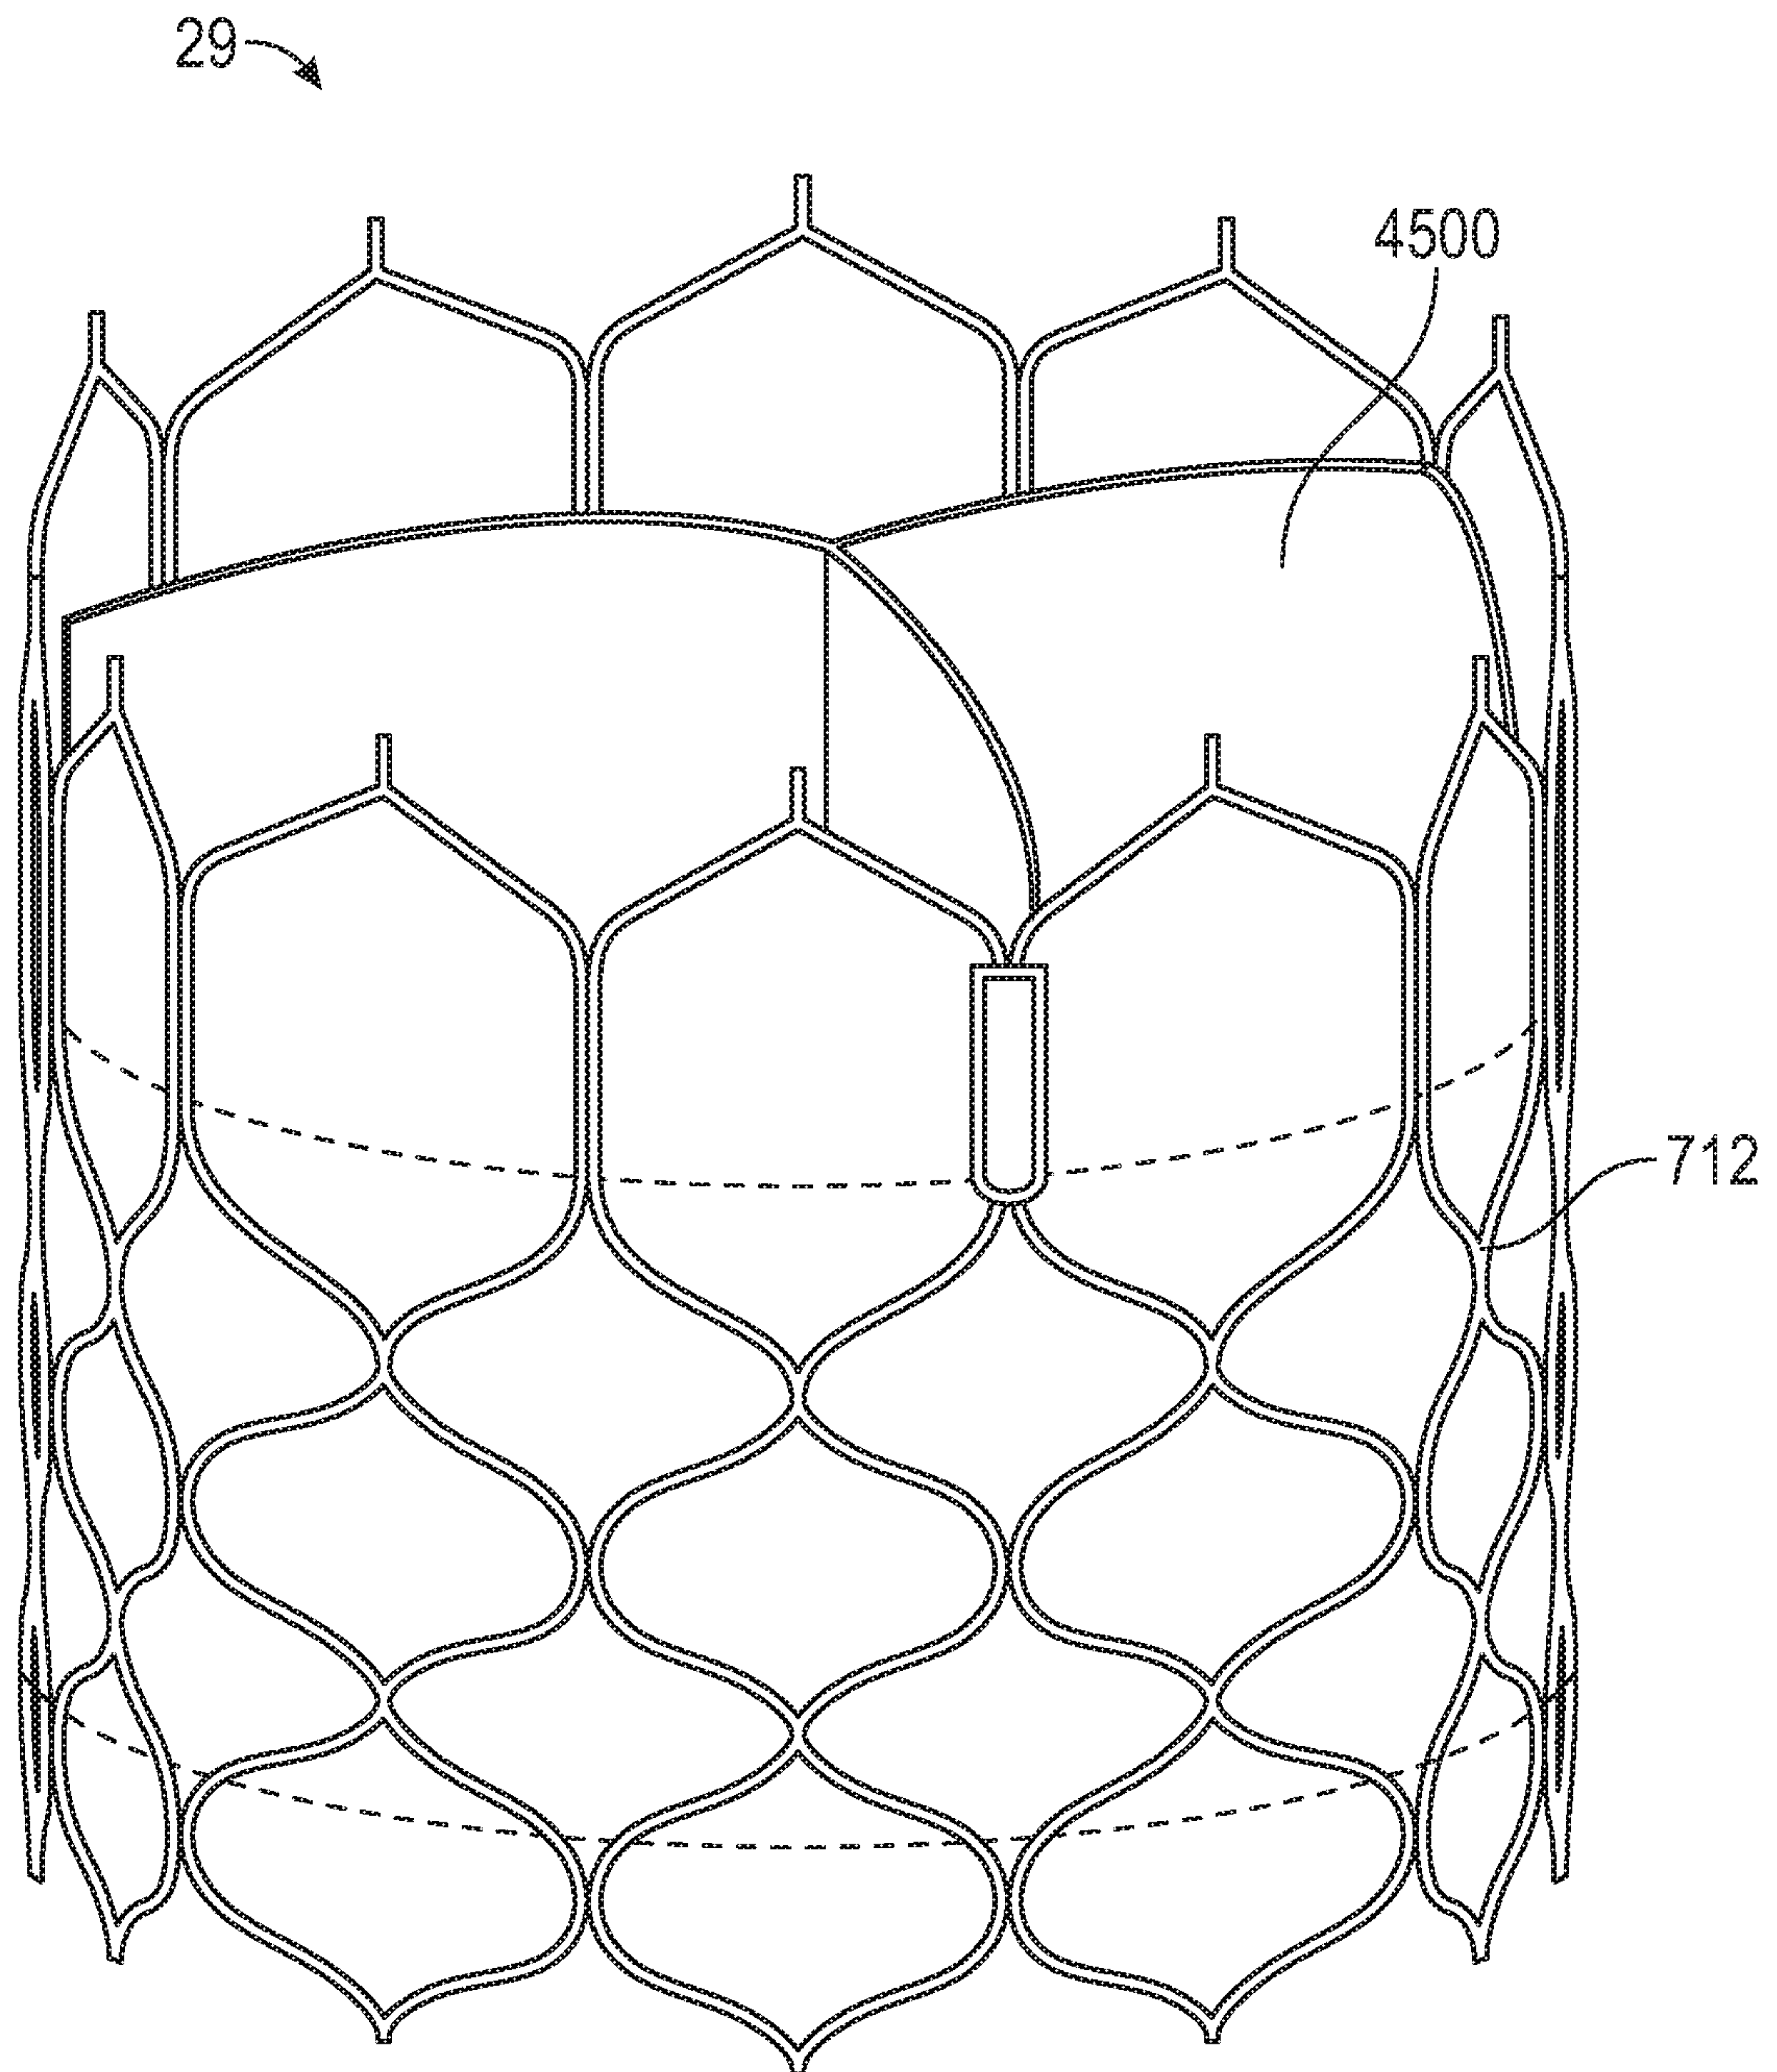


FIG. 47

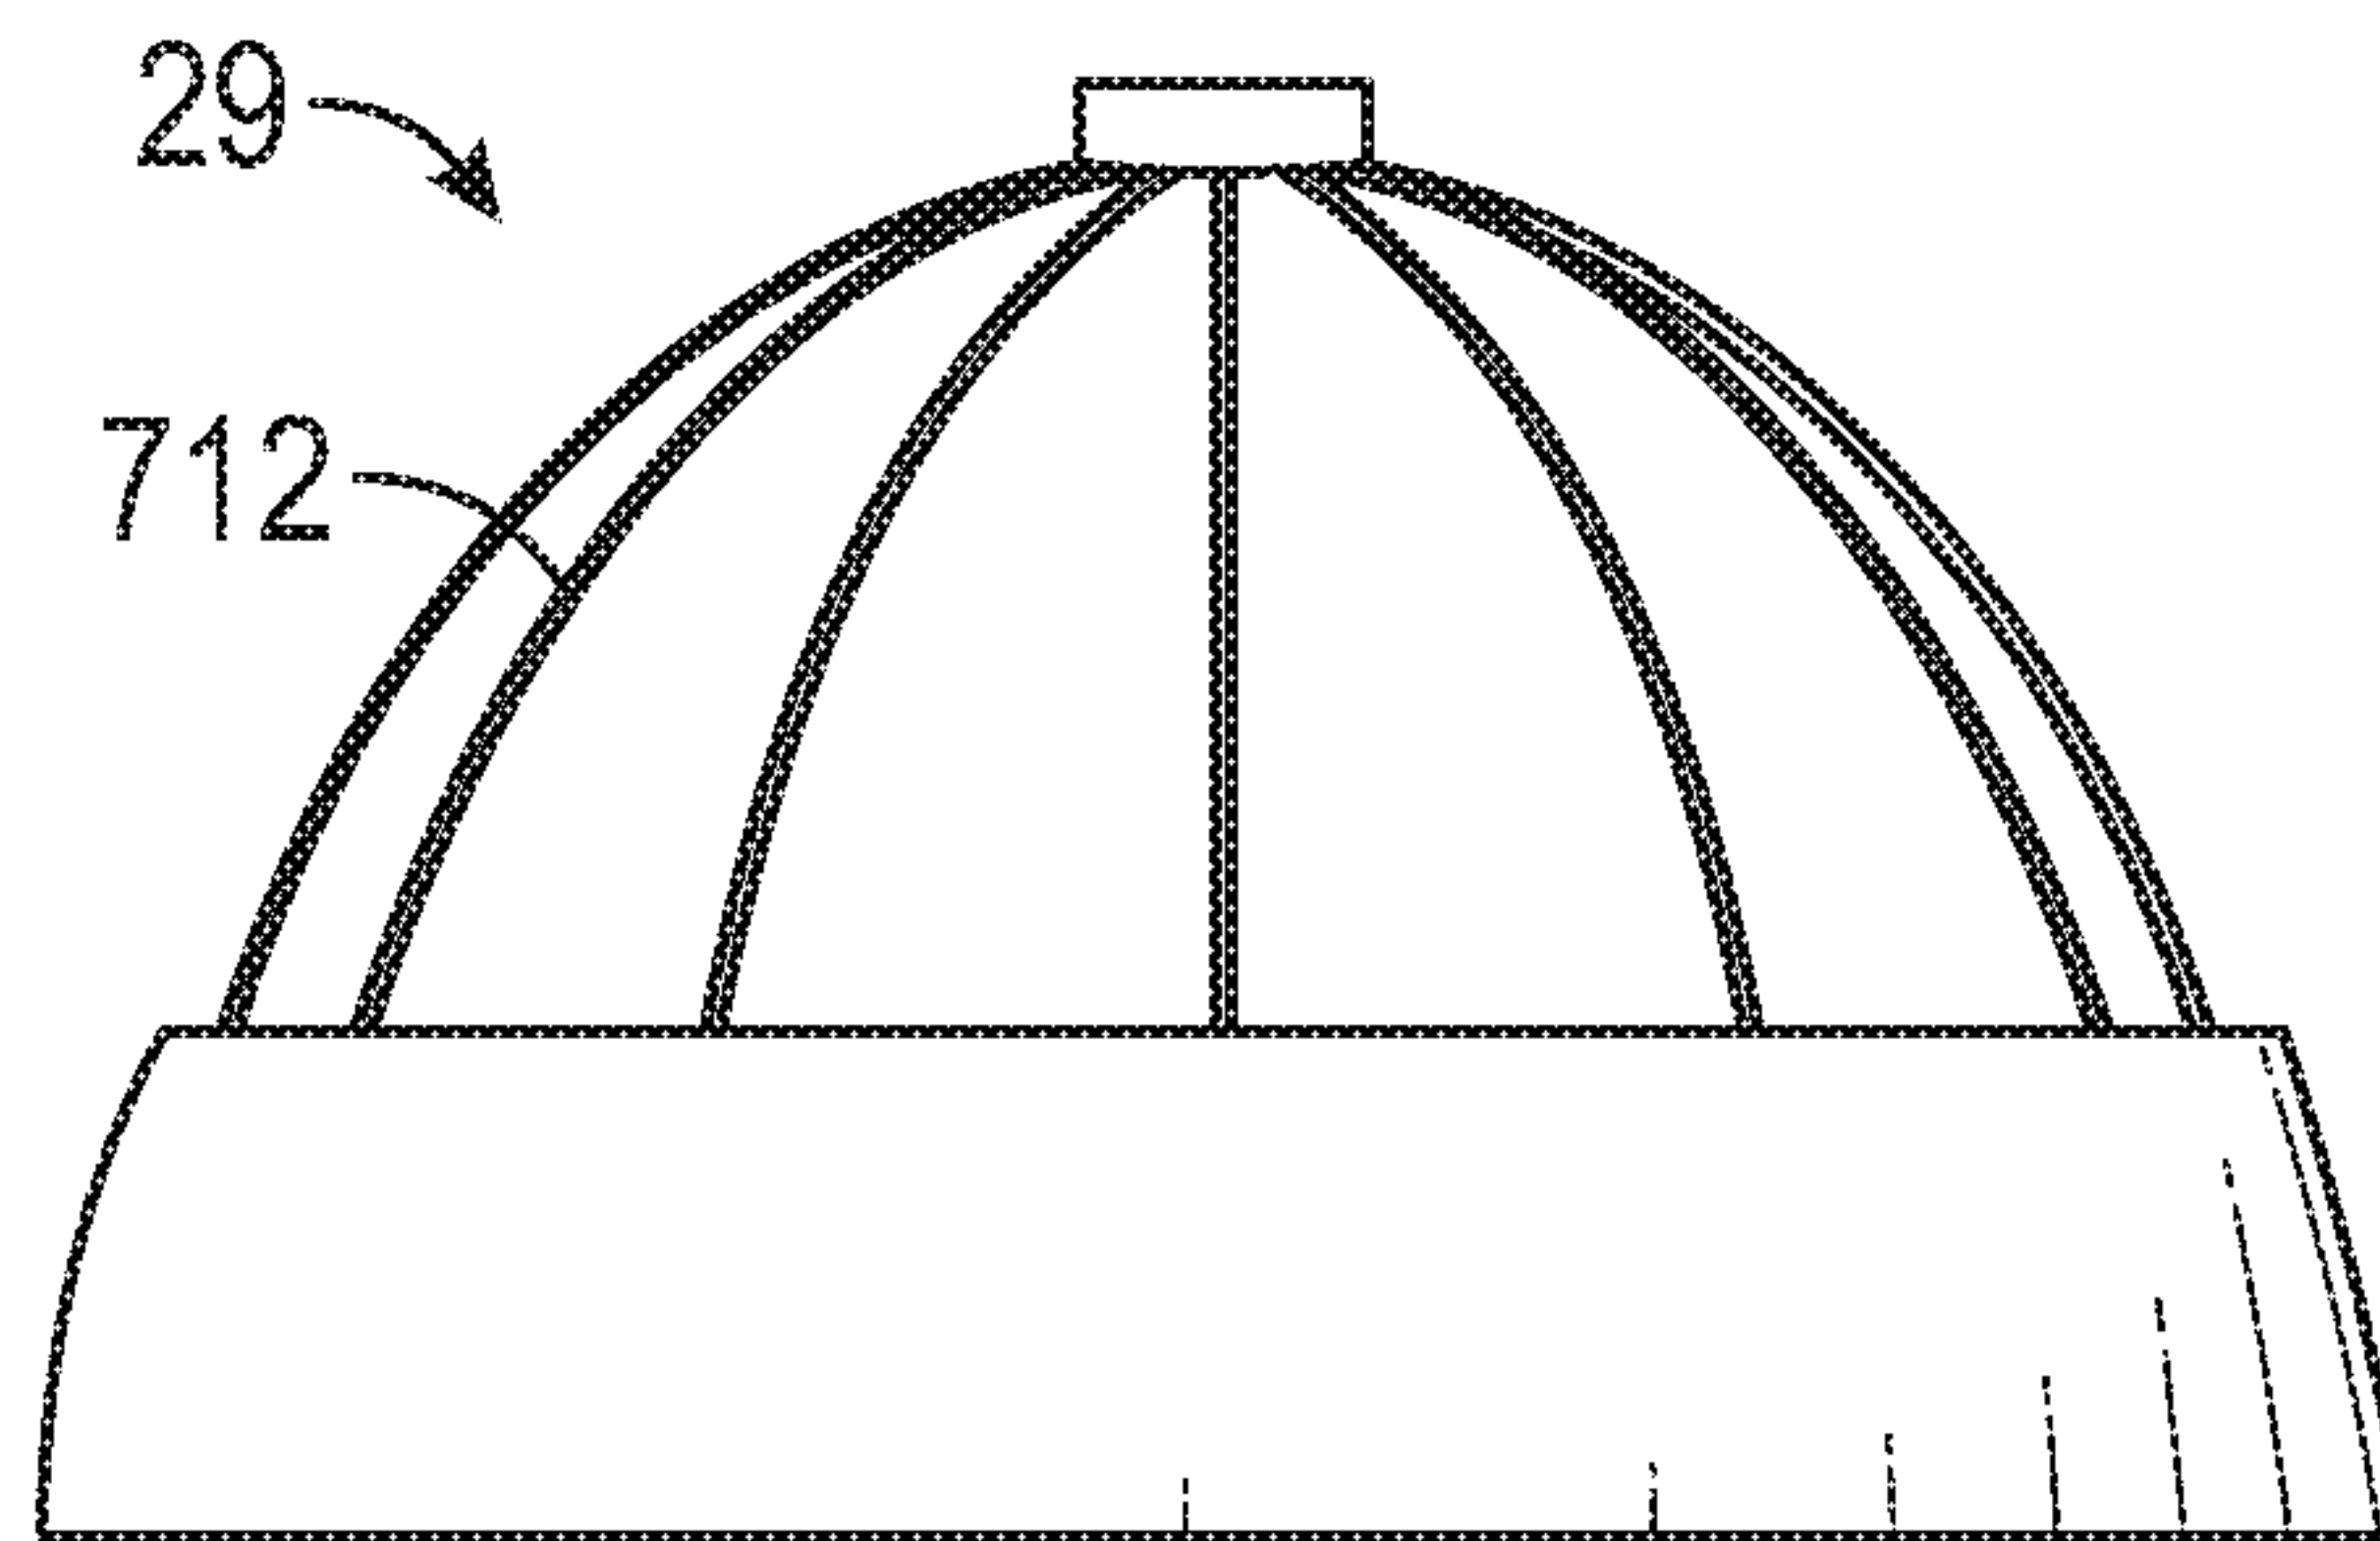


FIG. 48A

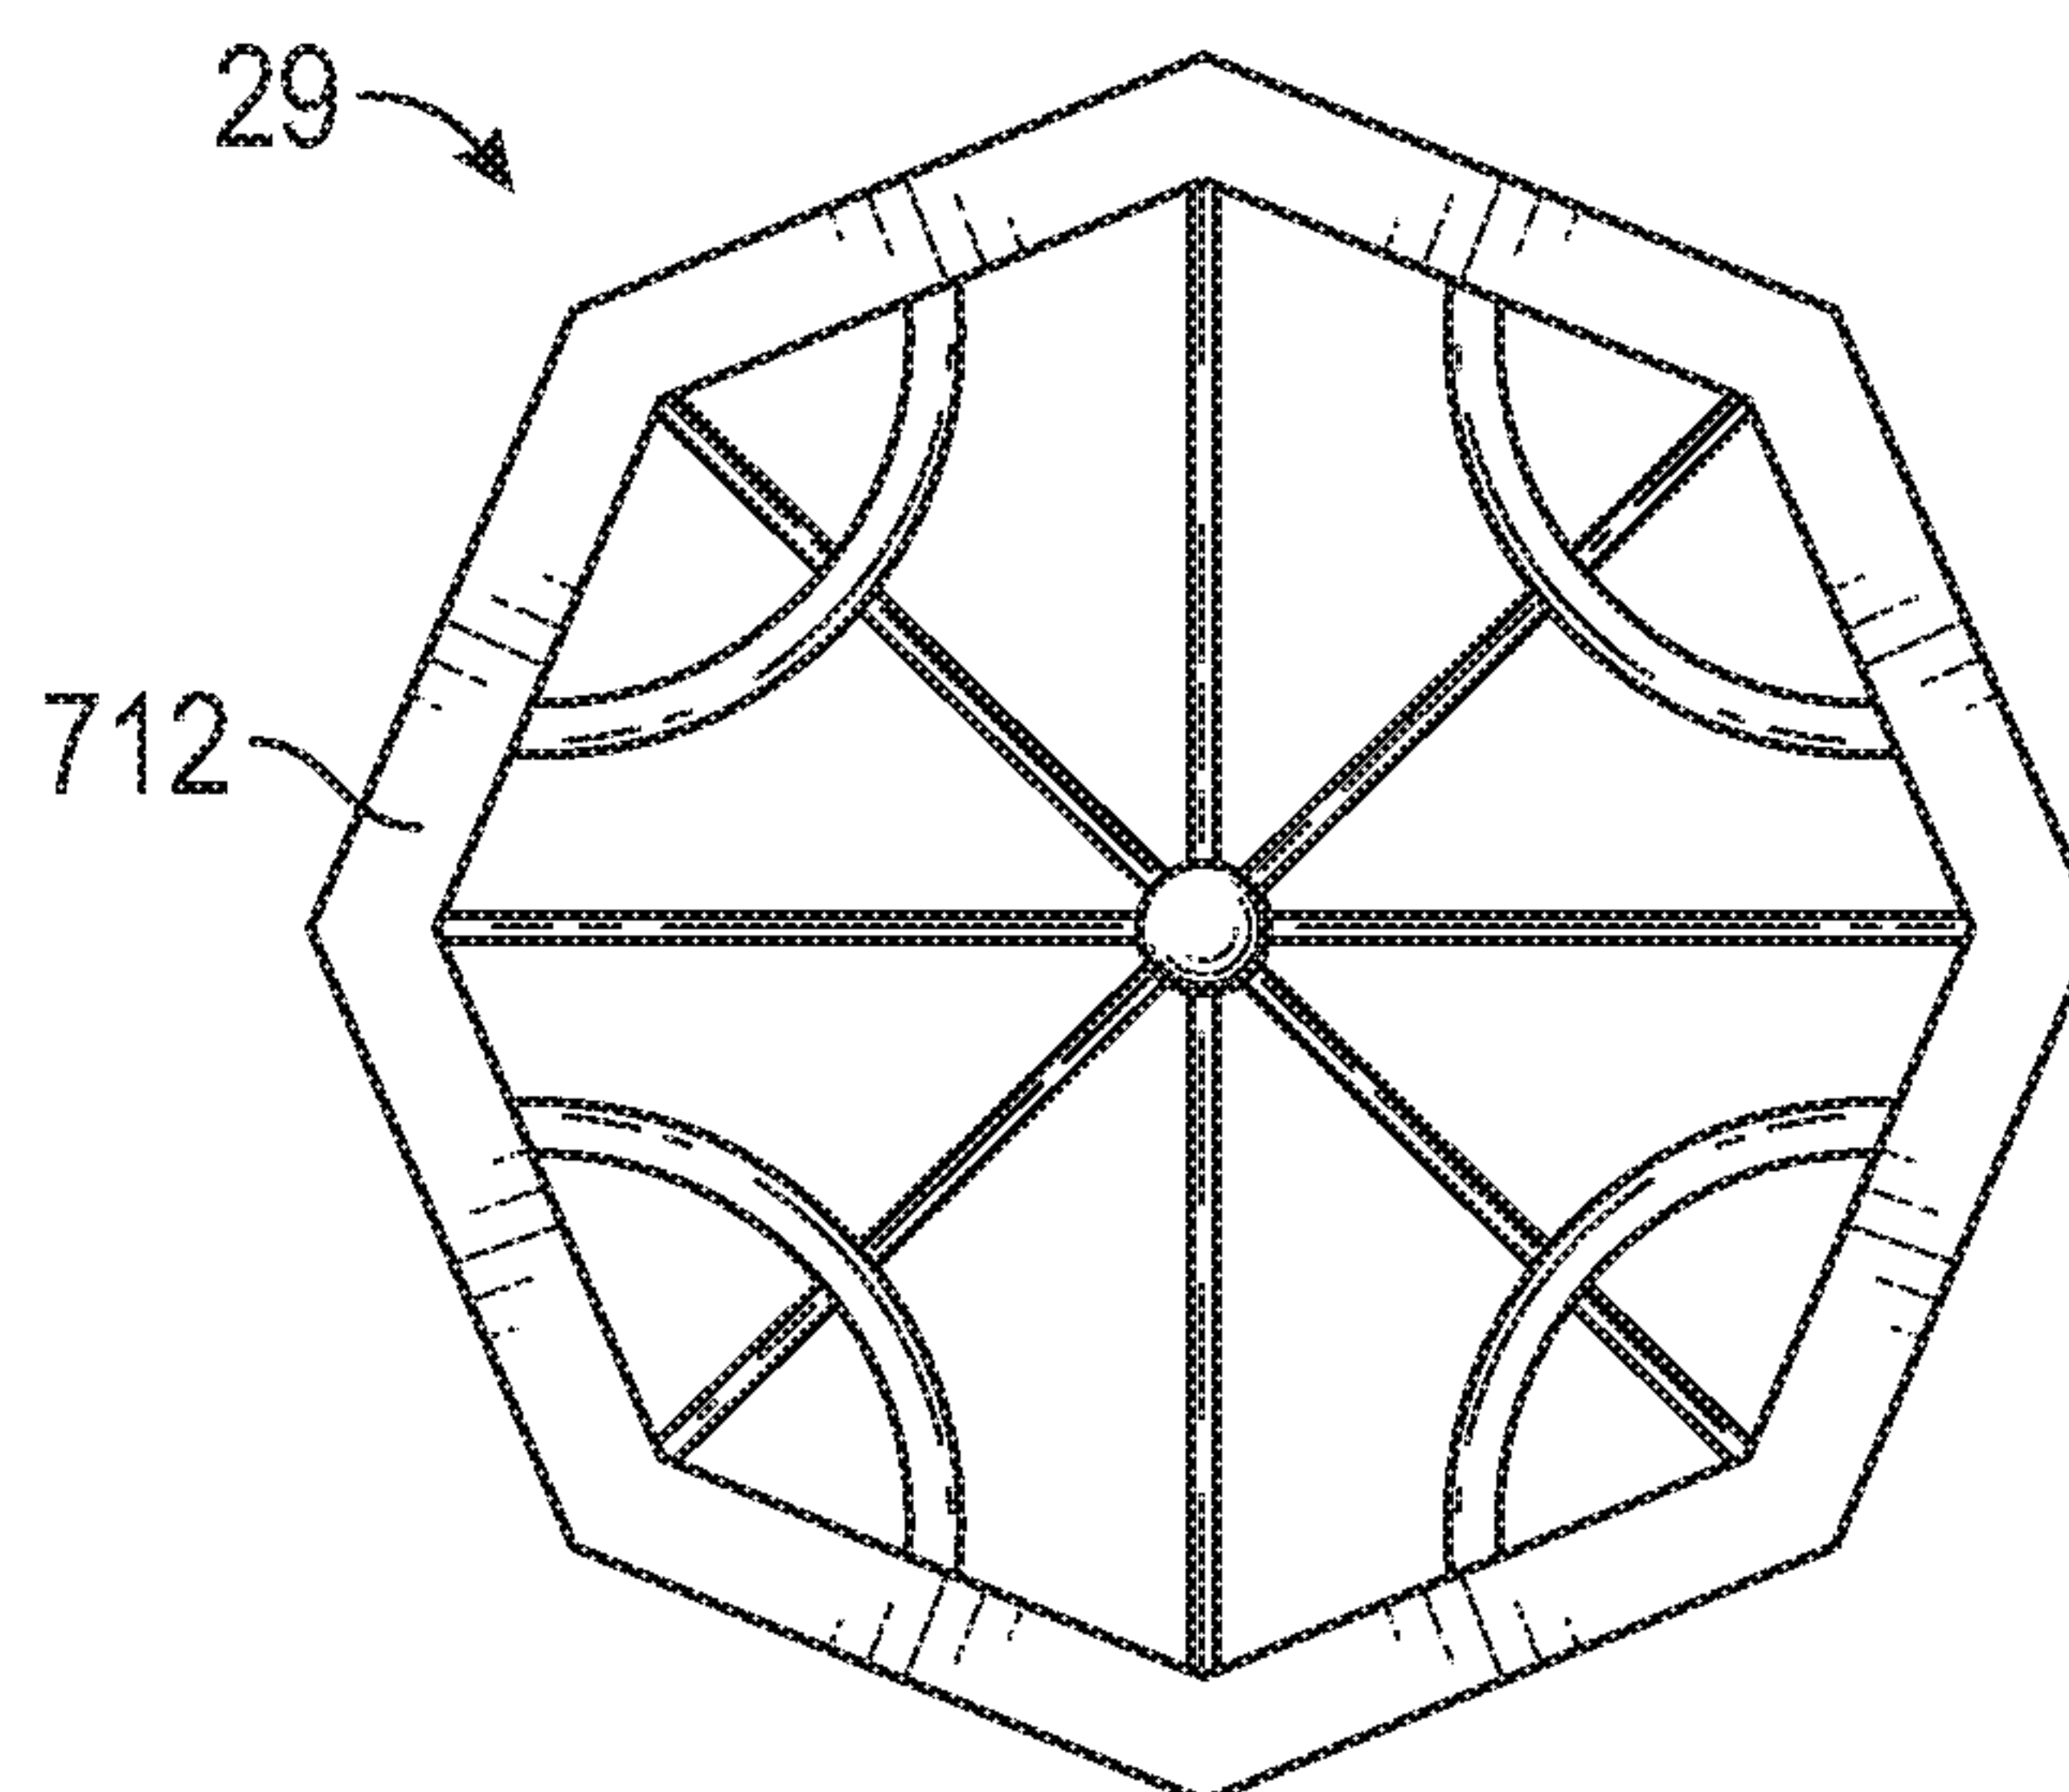


FIG. 48B

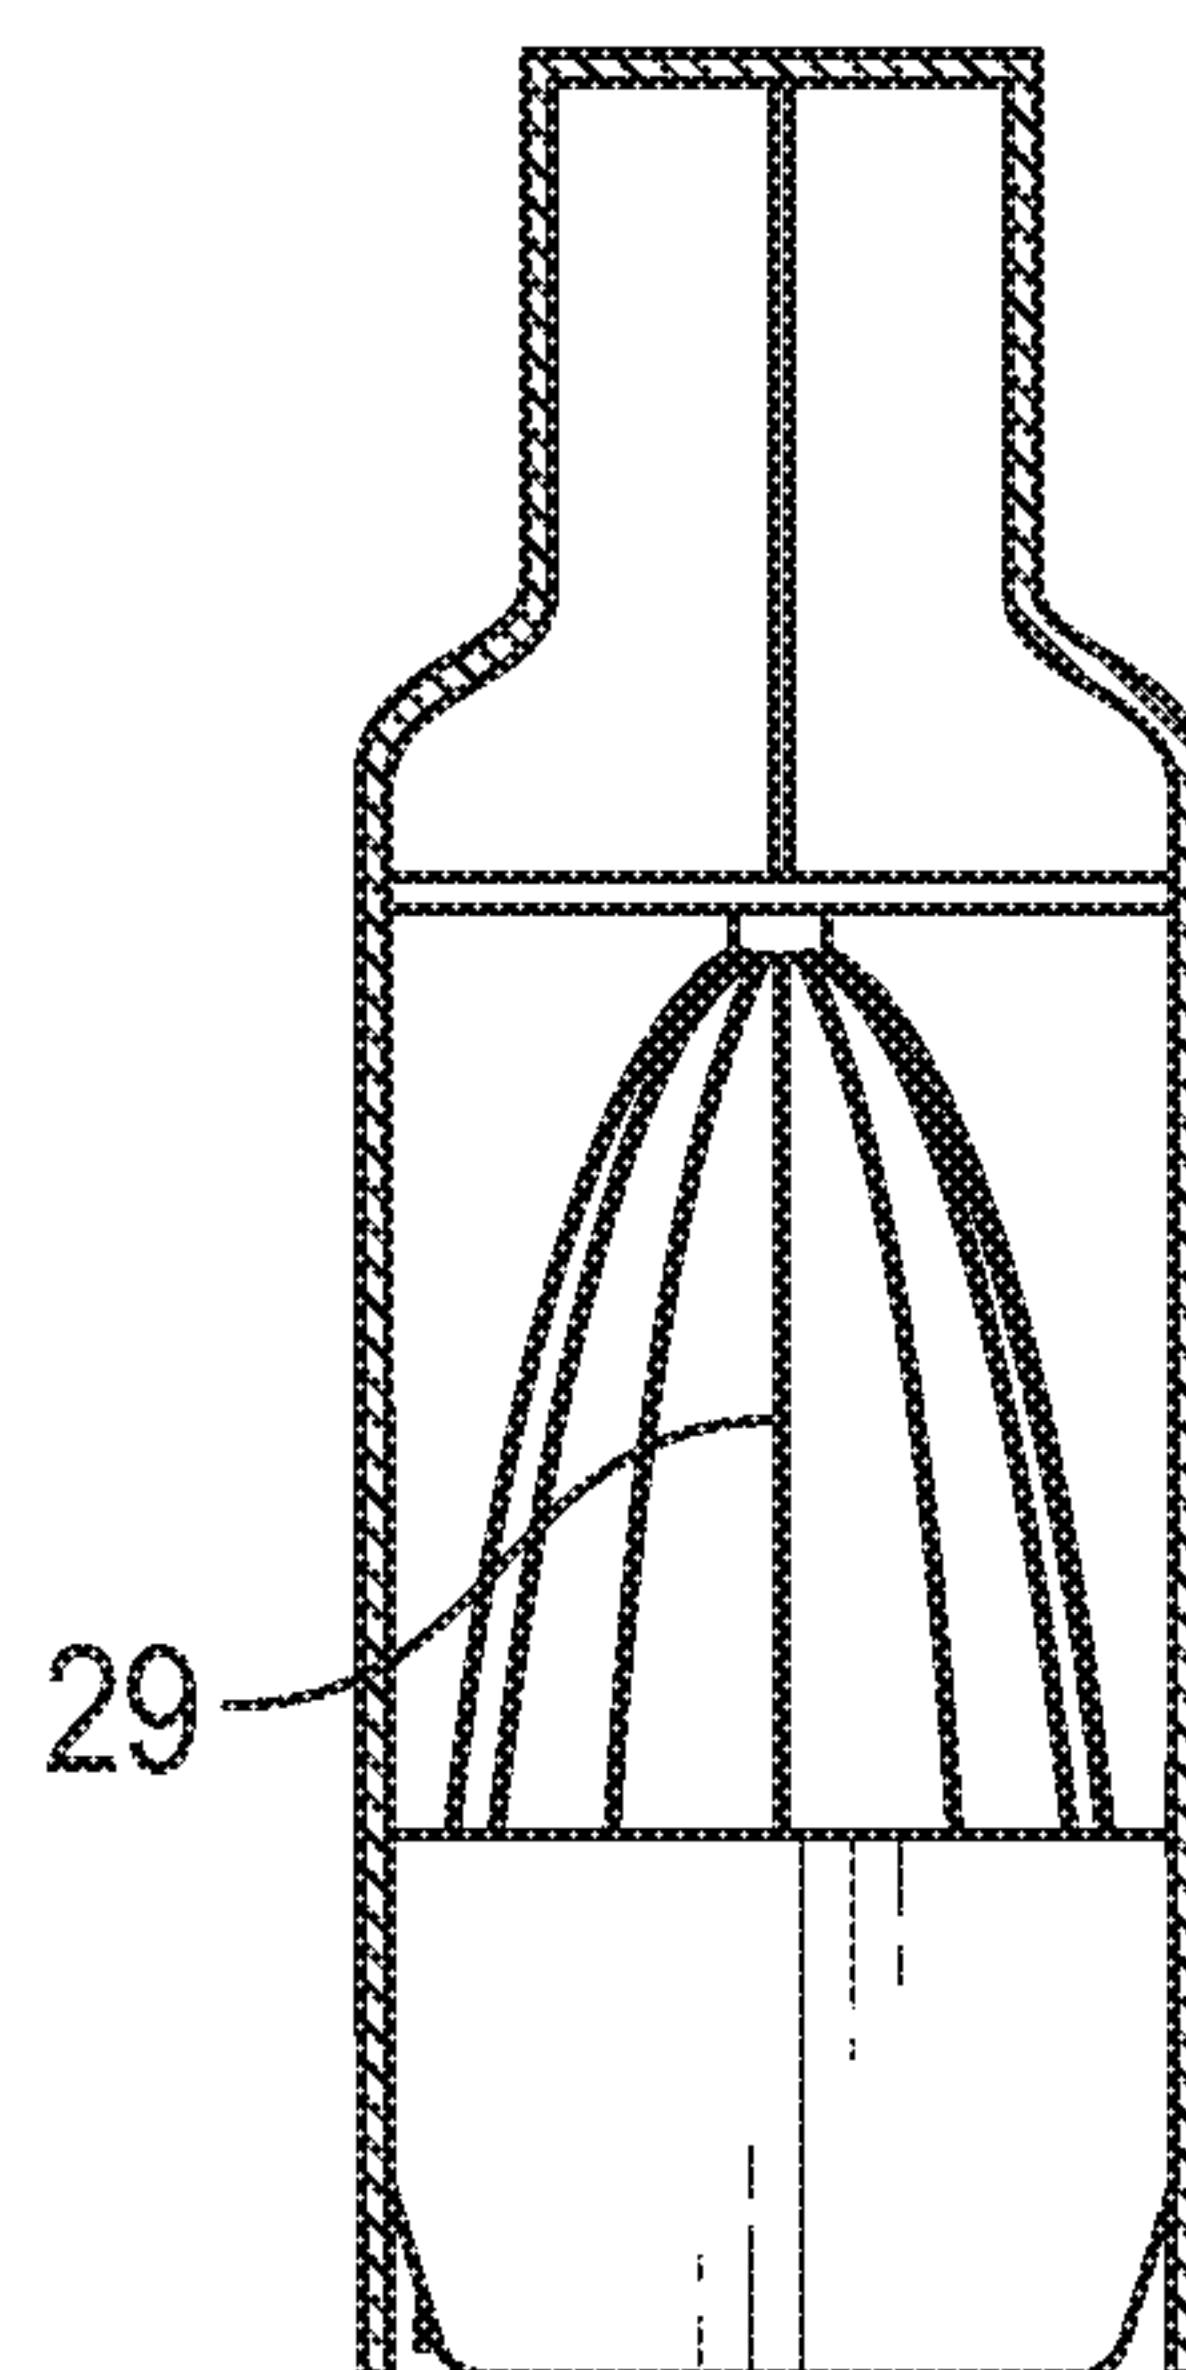


FIG. 48C

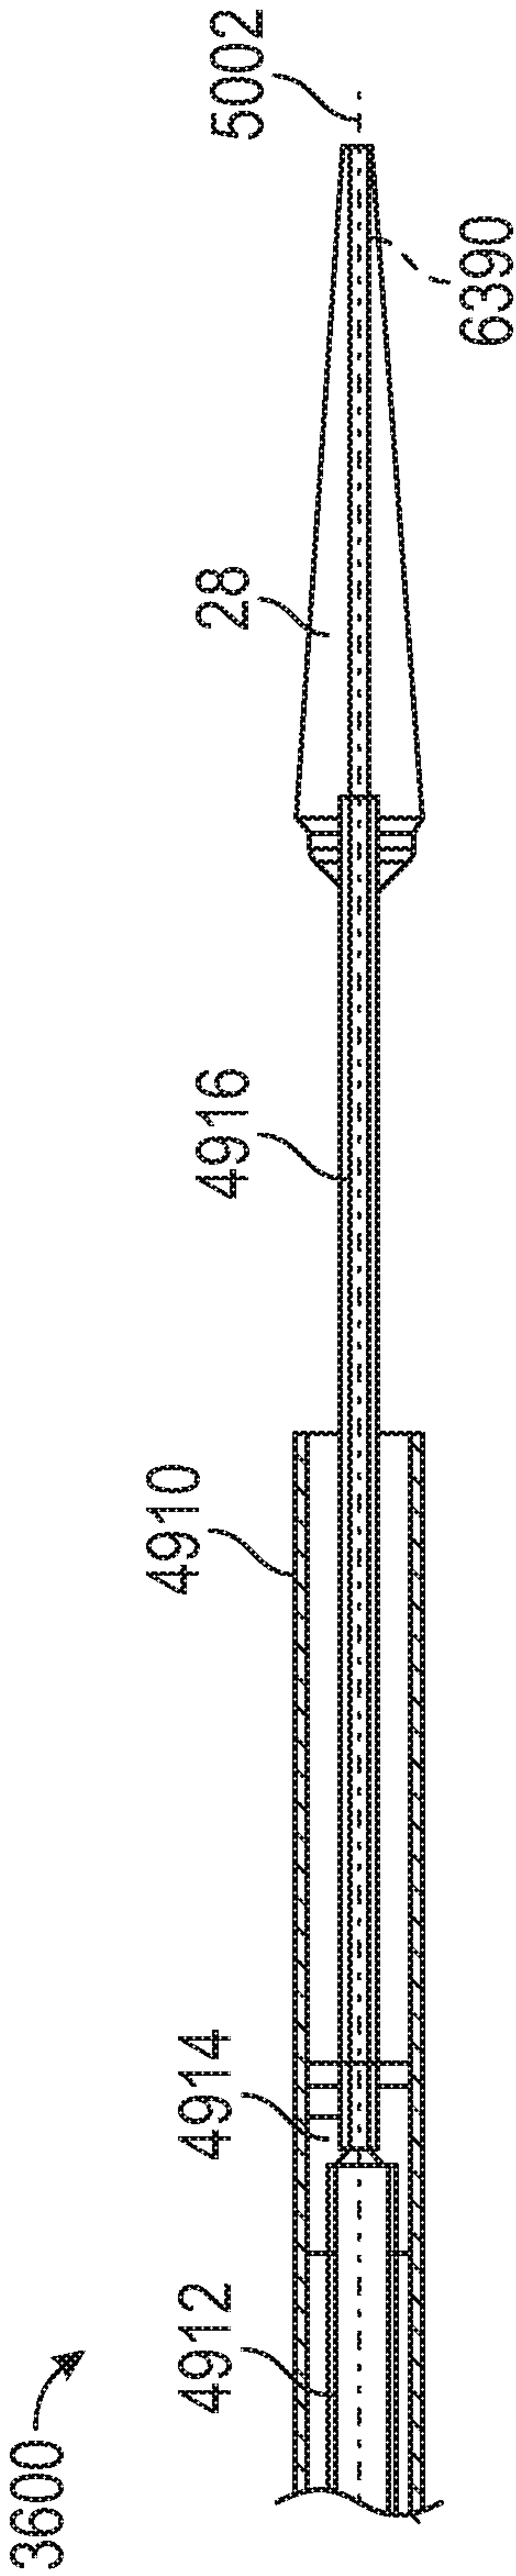


FIG. 49A

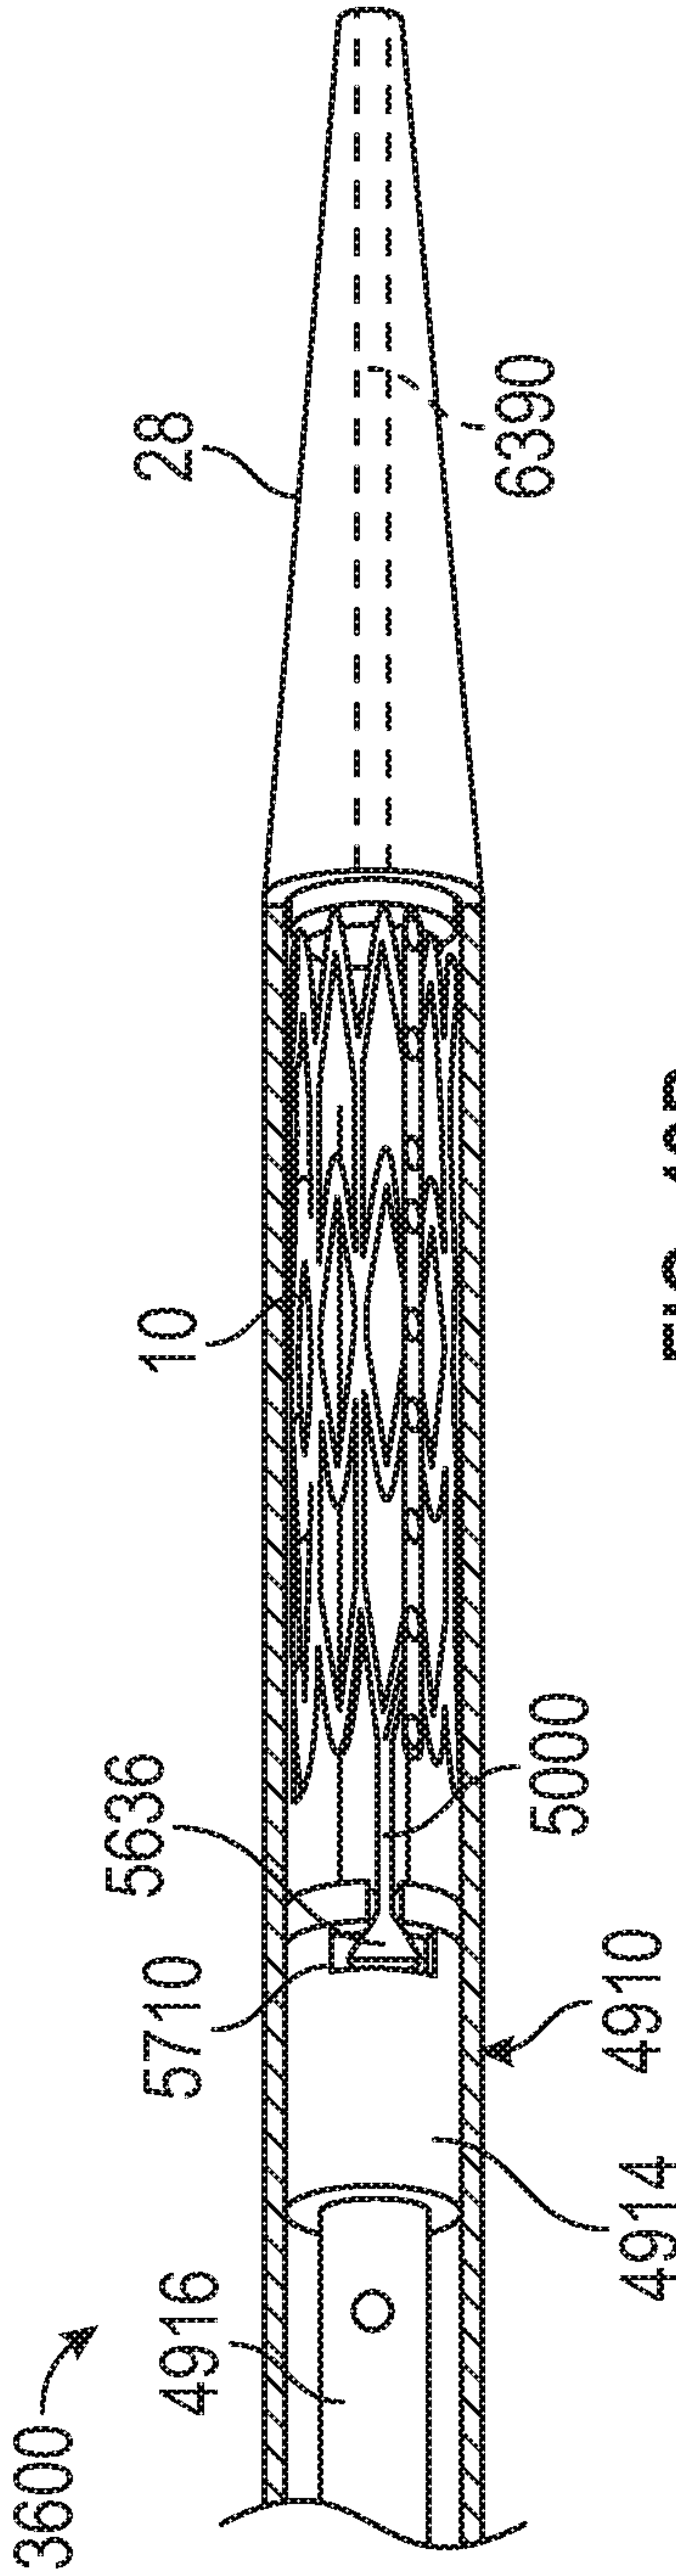


FIG. 49B

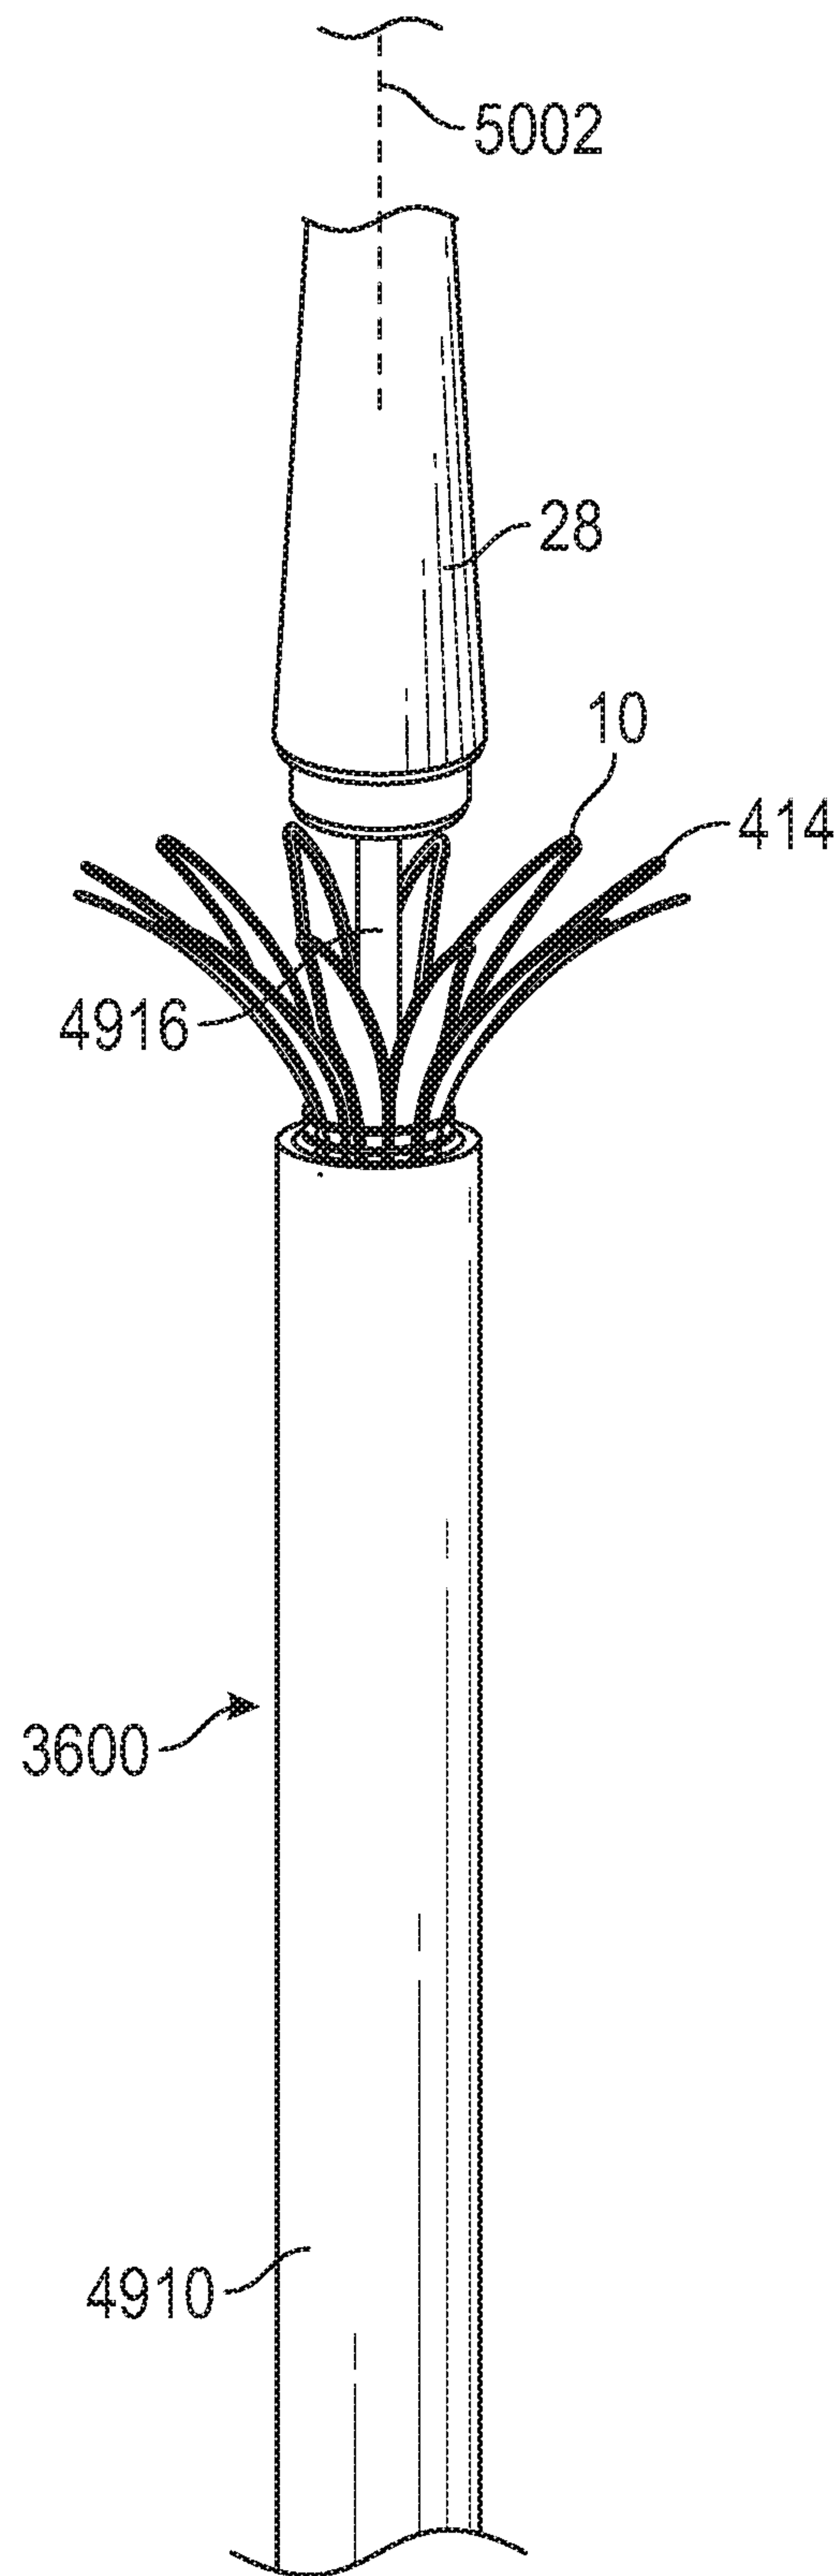


FIG. 50A

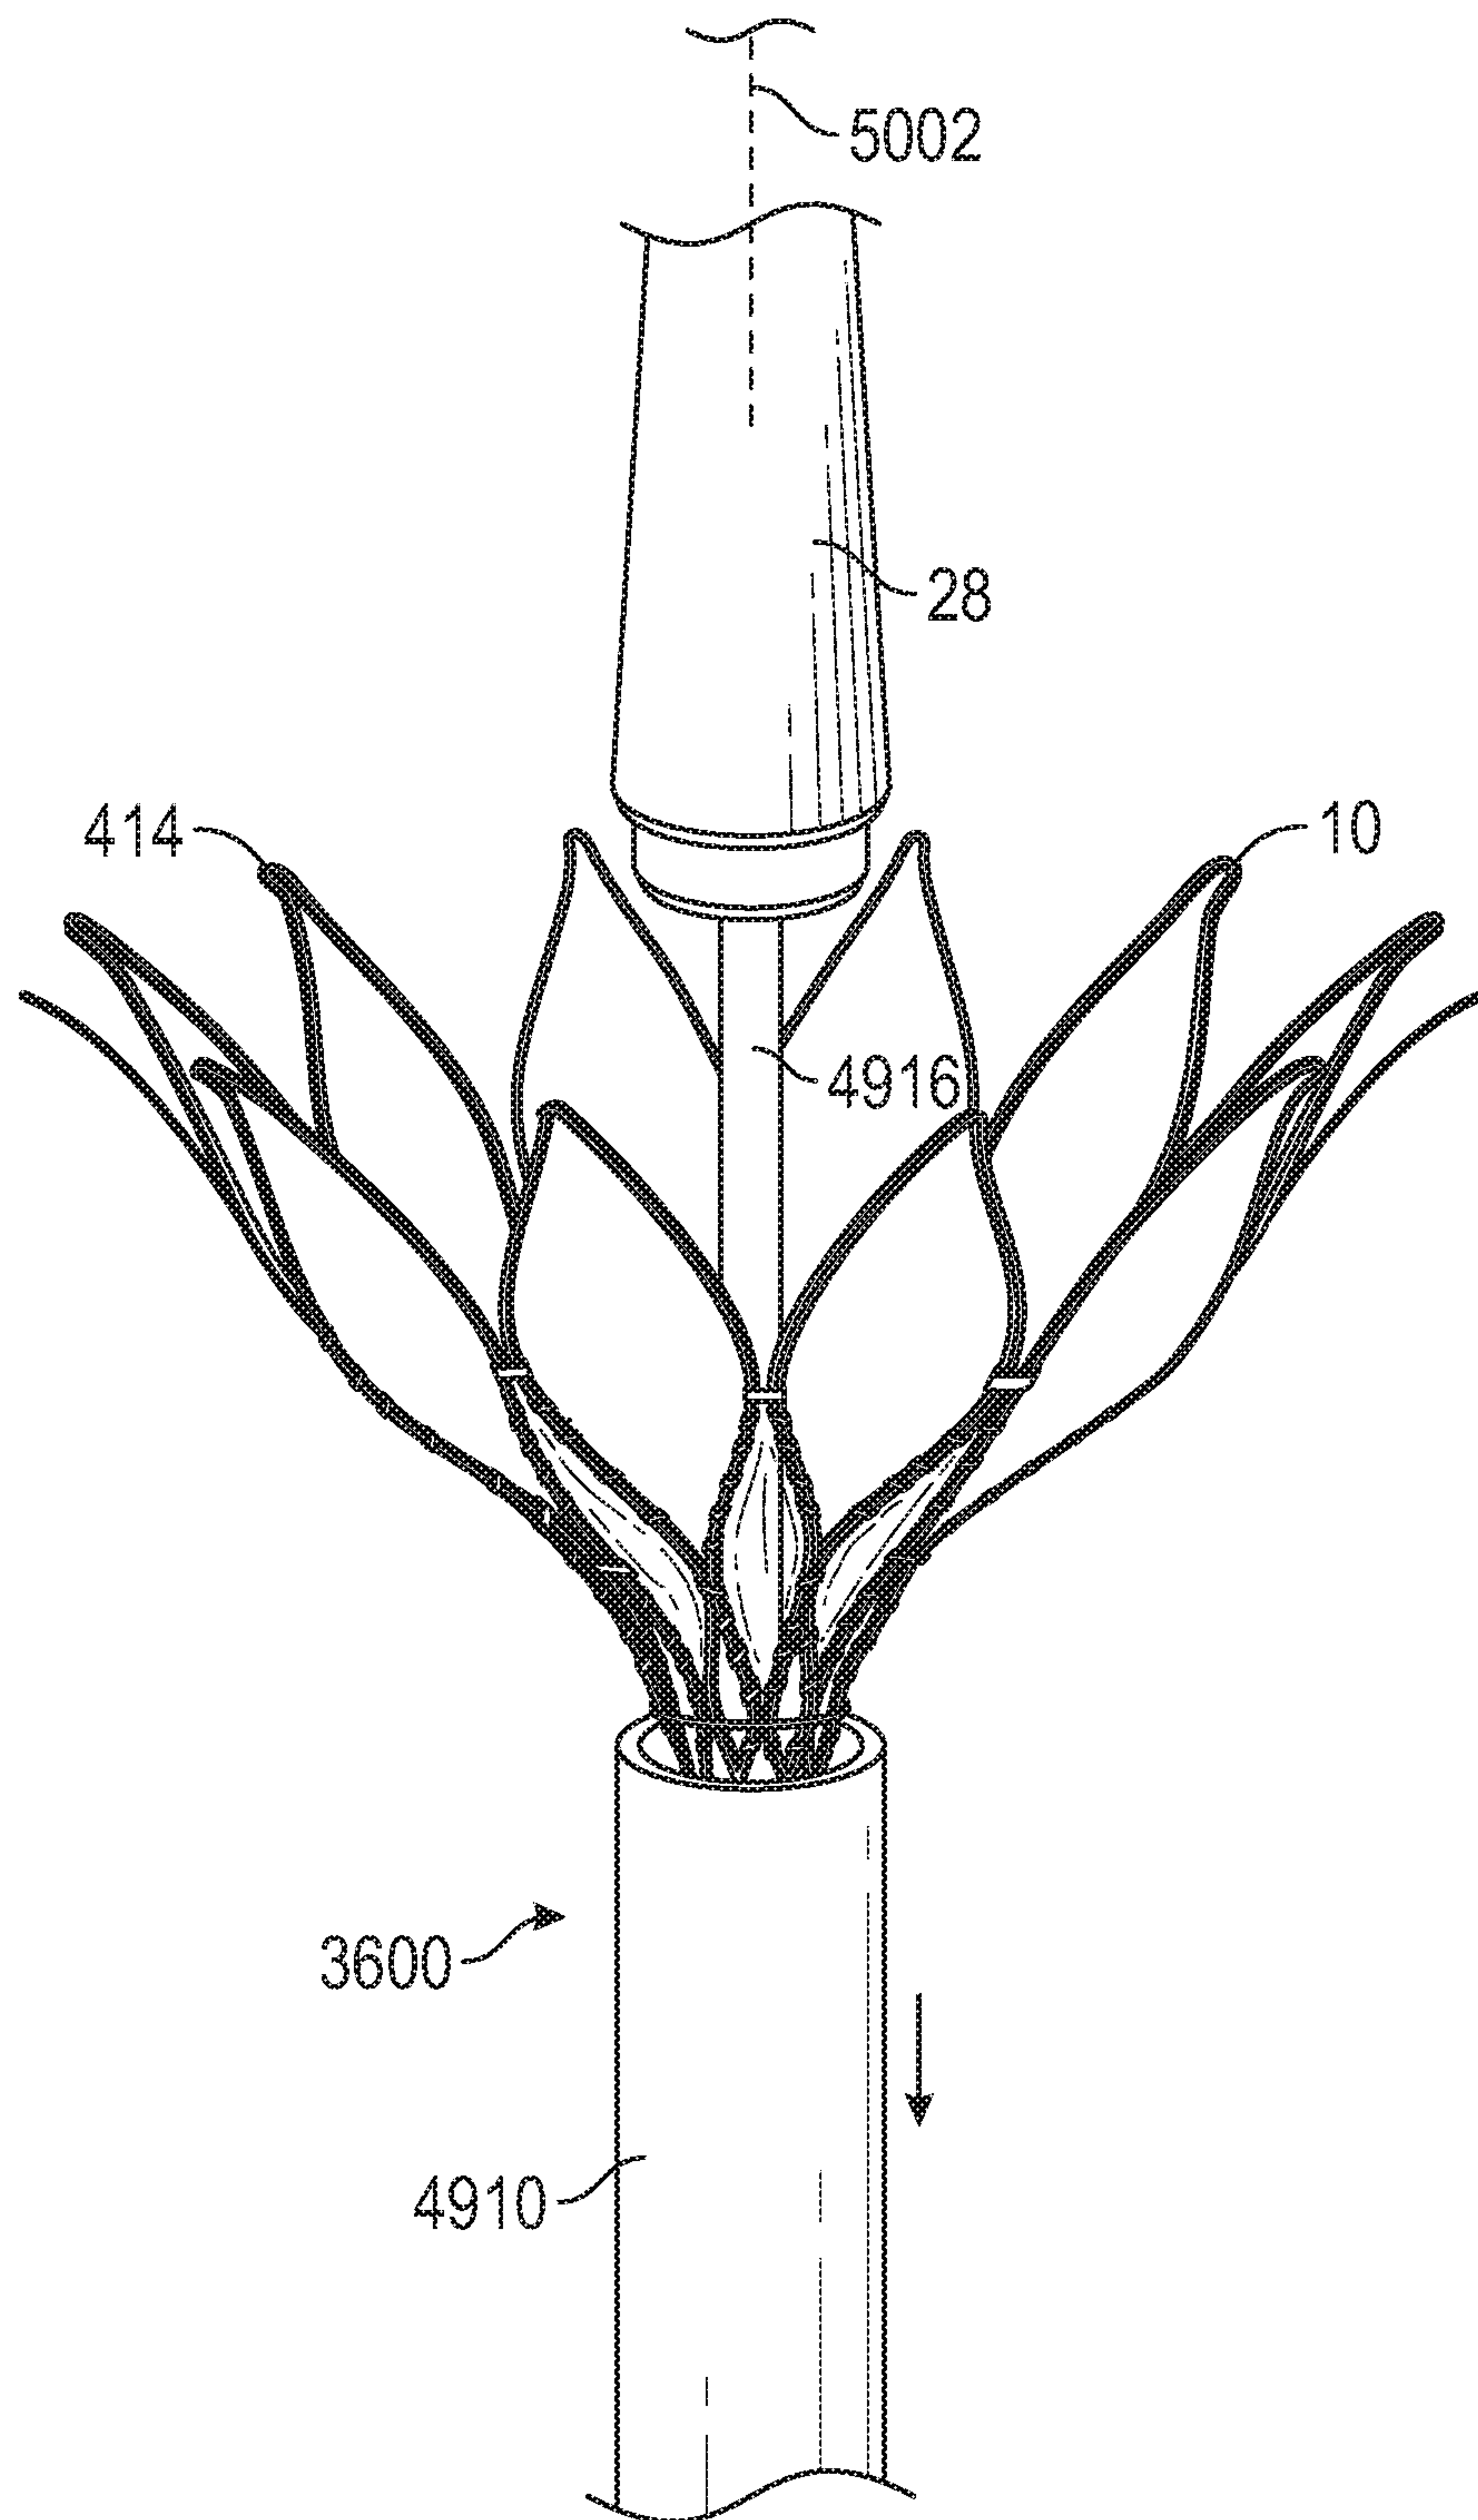


FIG. 50B

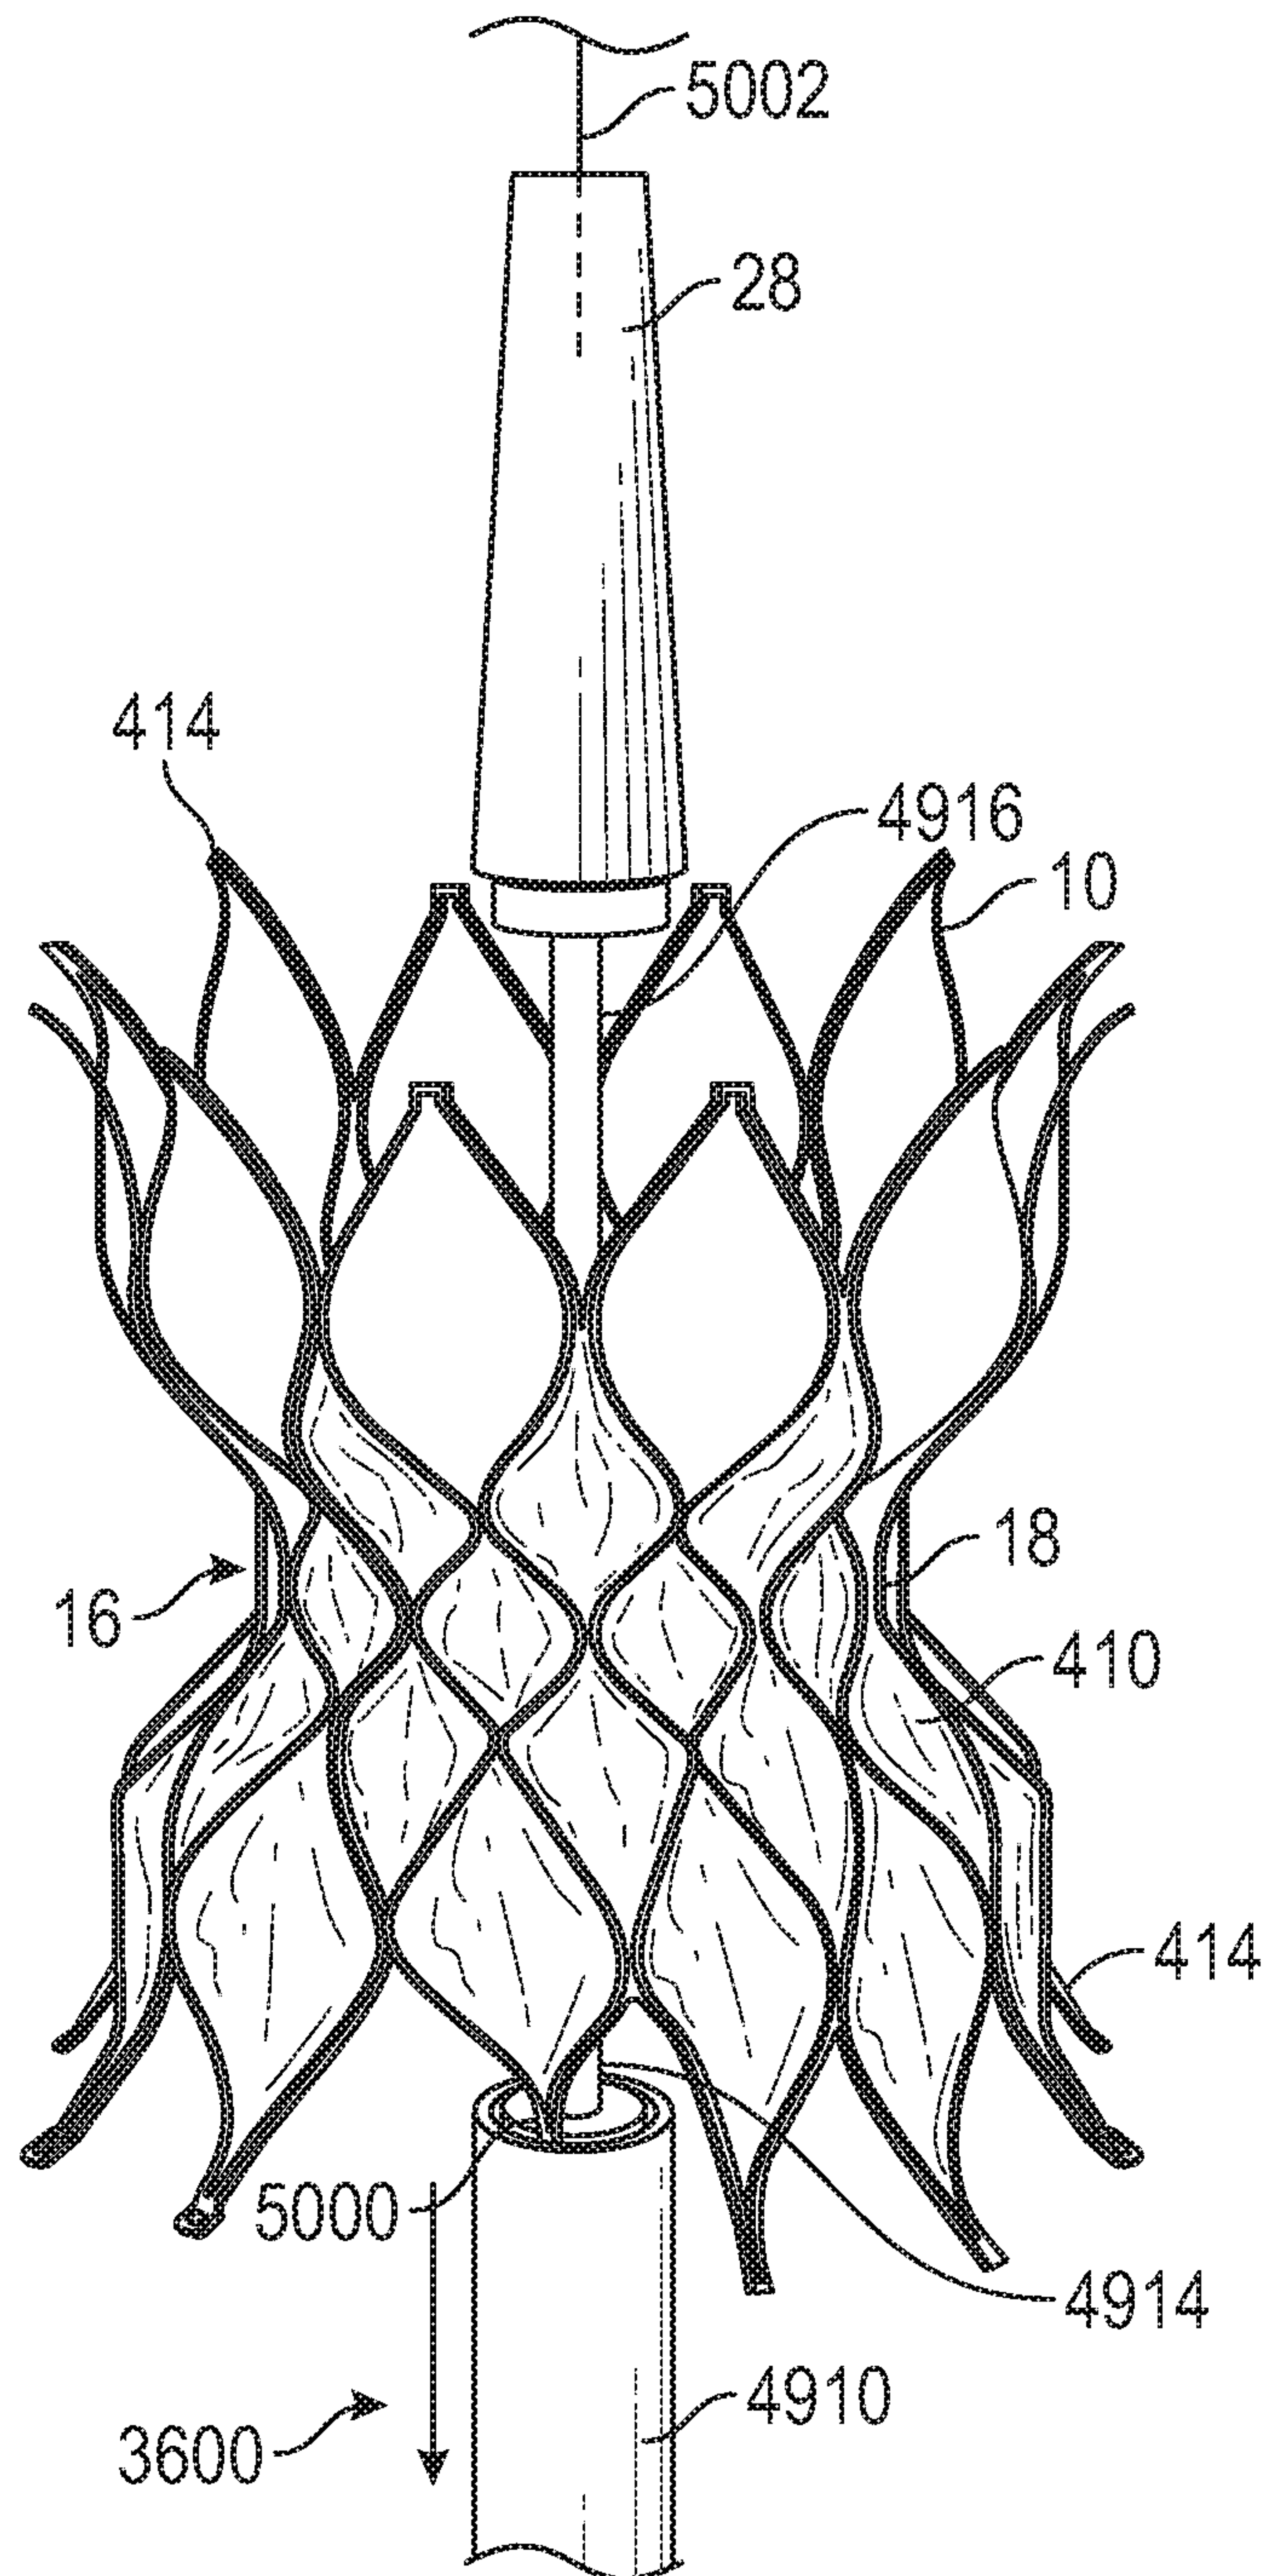


FIG. 50C

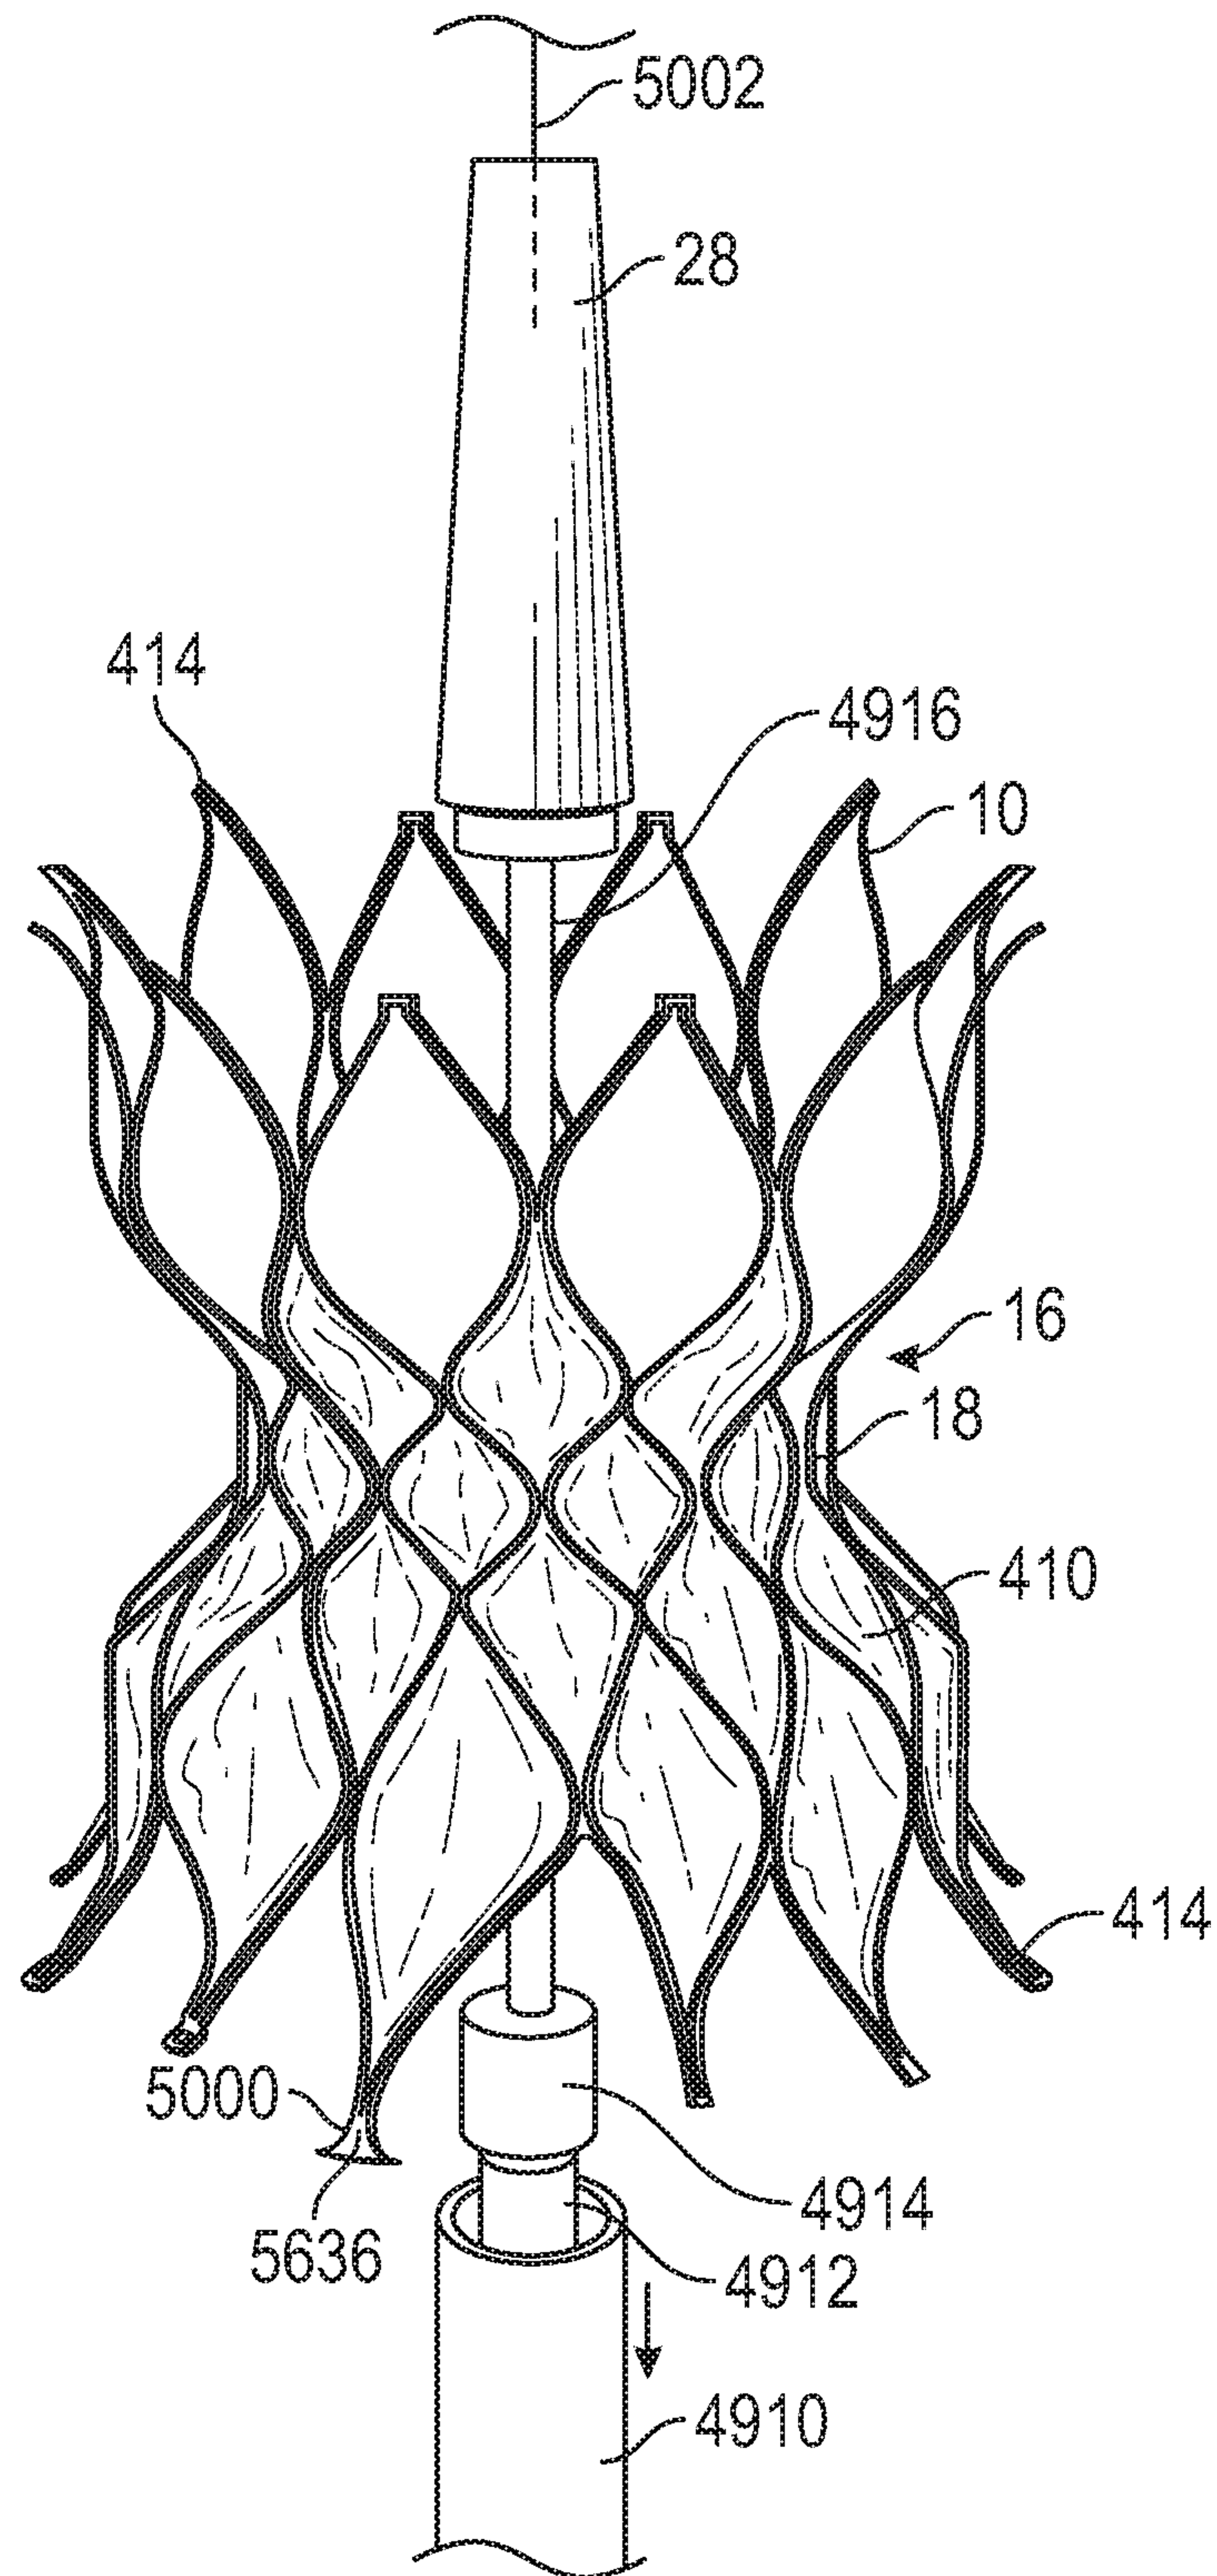


FIG. 50D

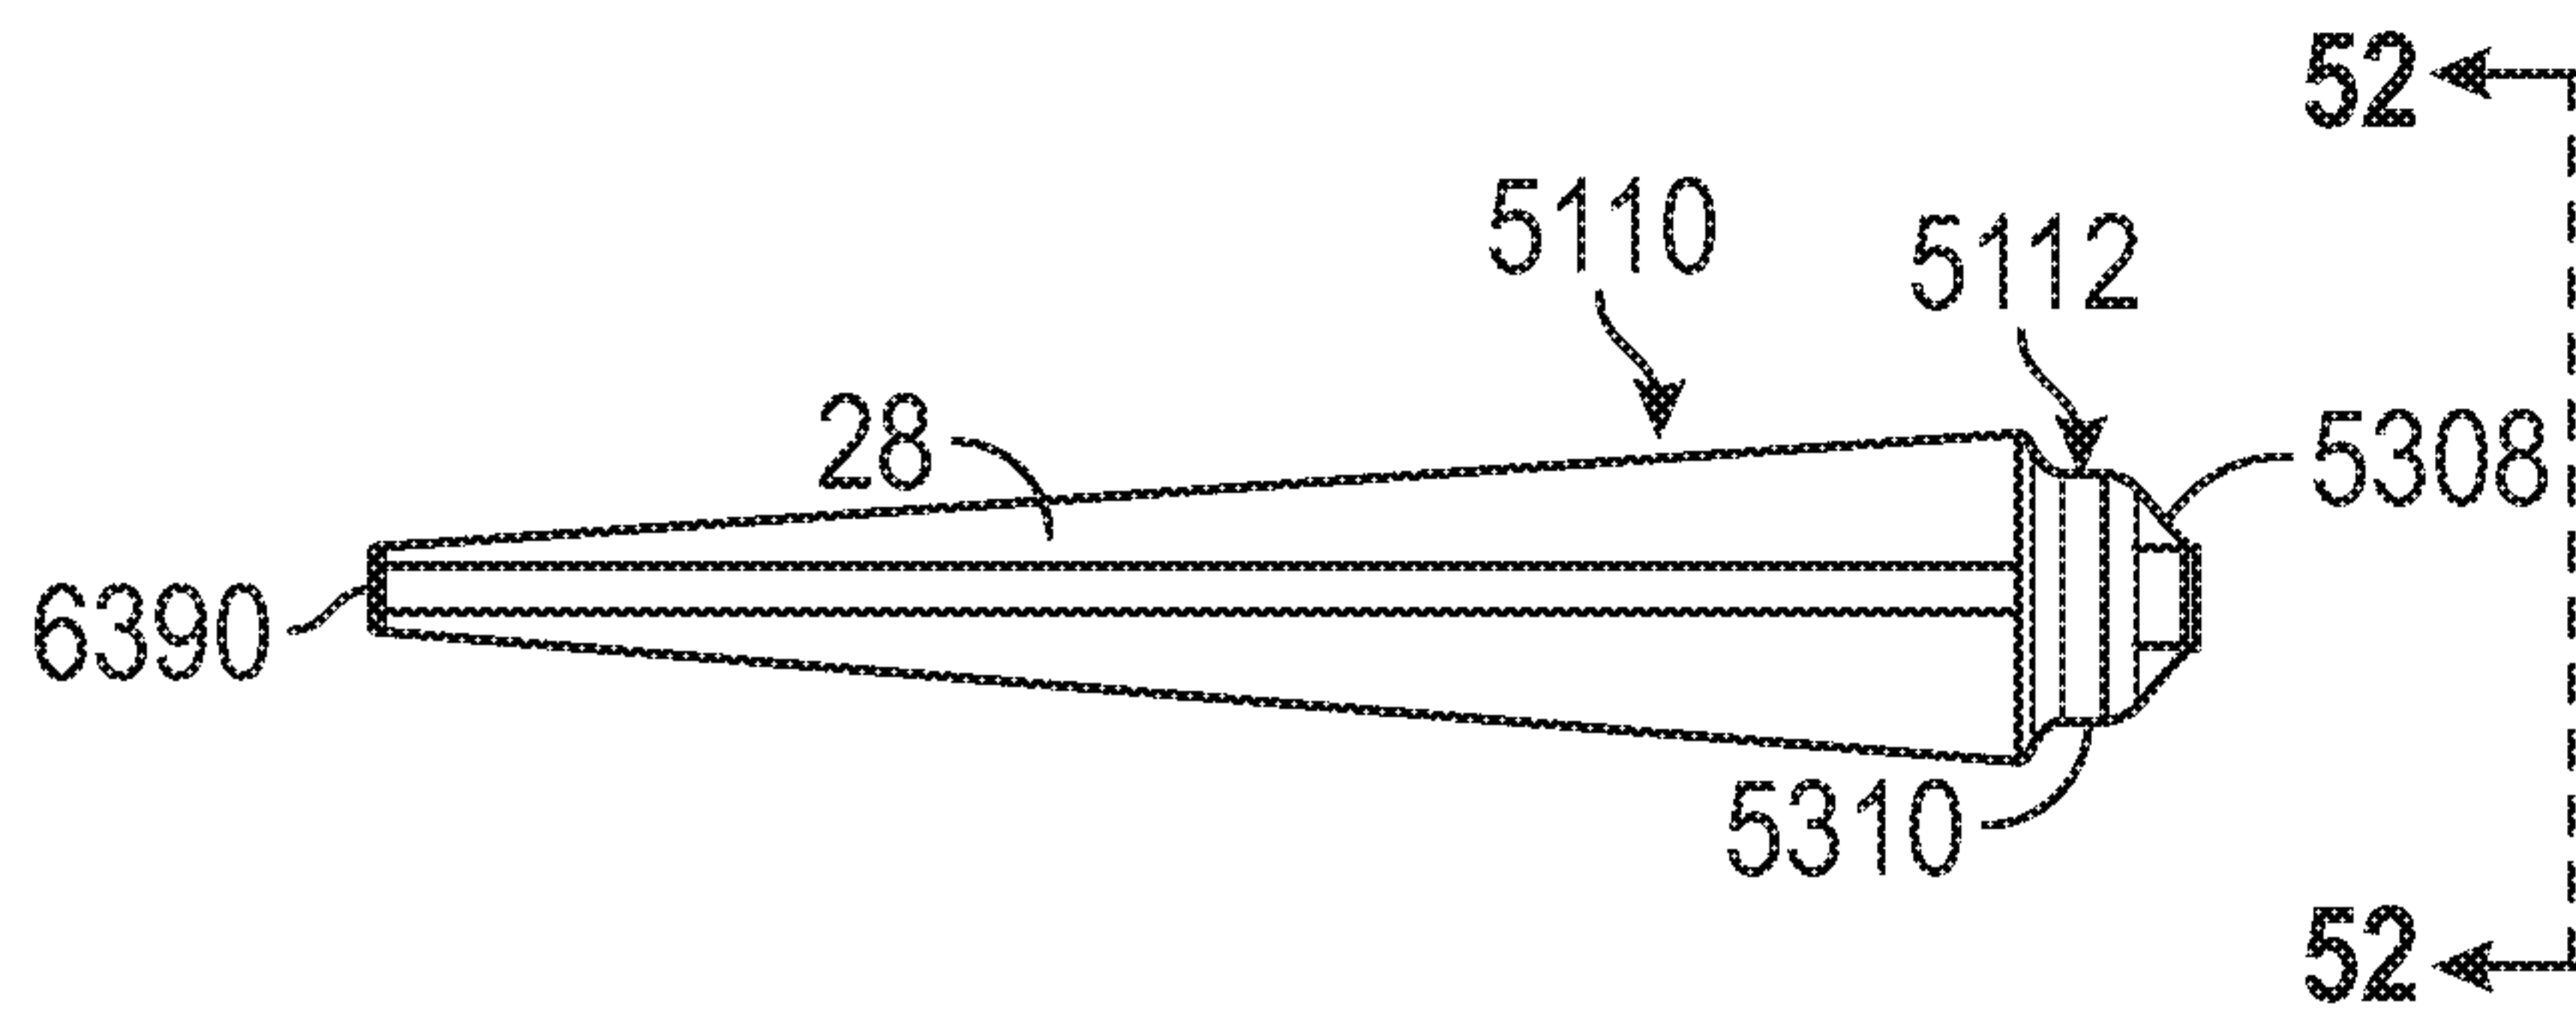


FIG. 51

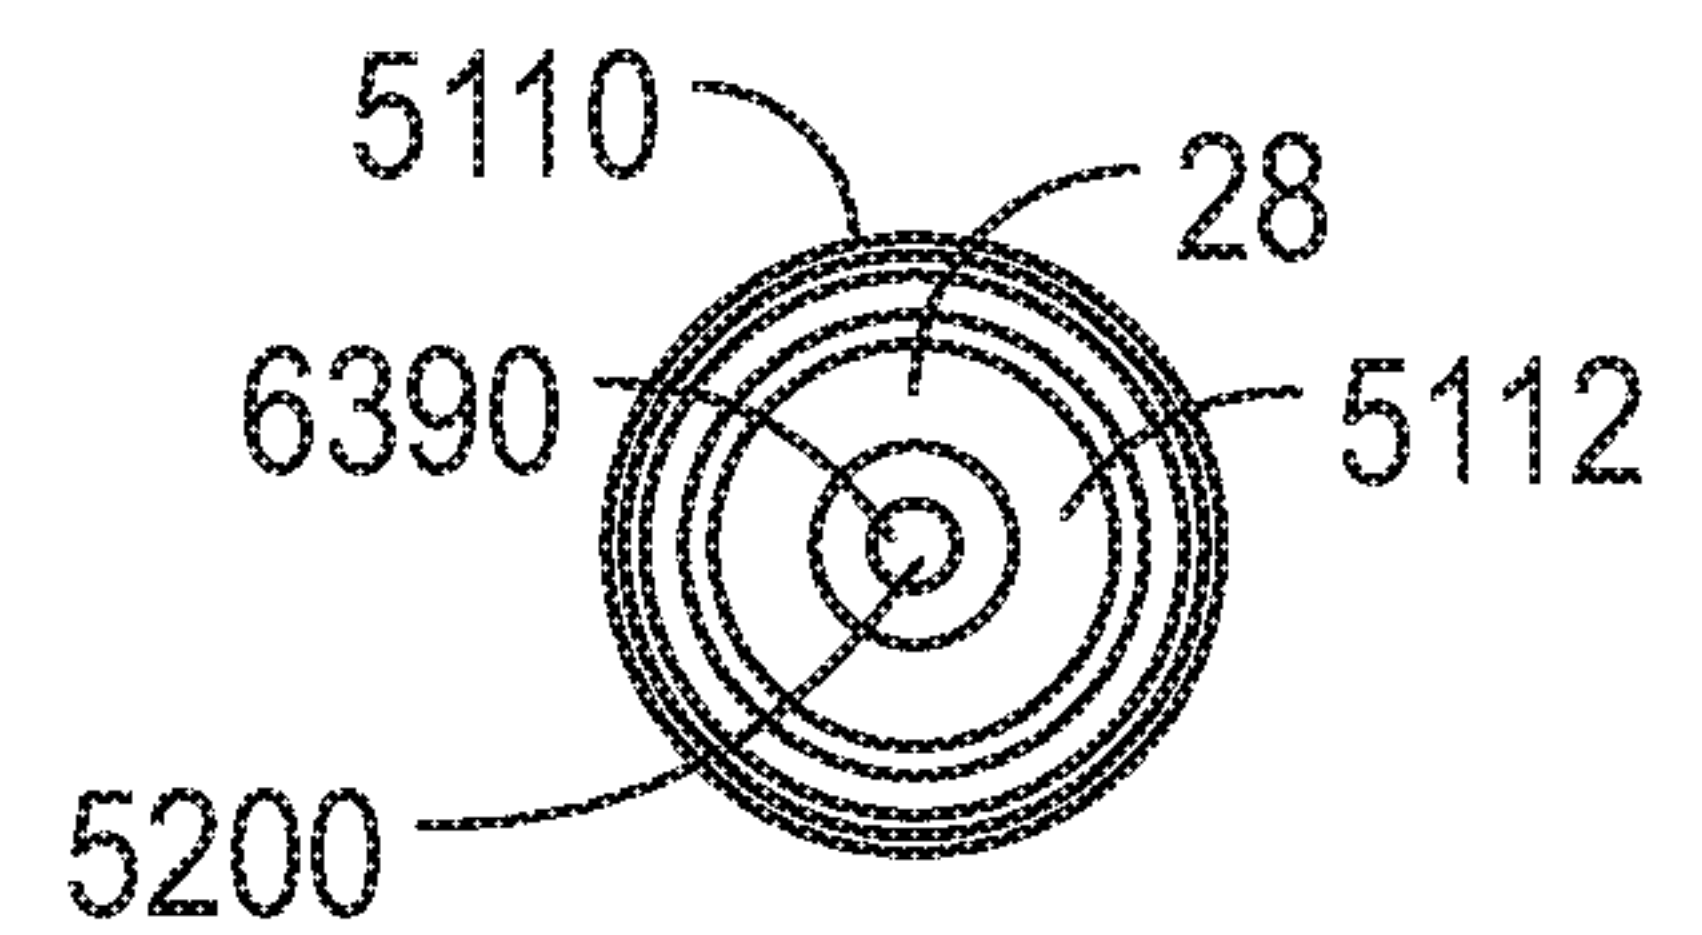


FIG. 52

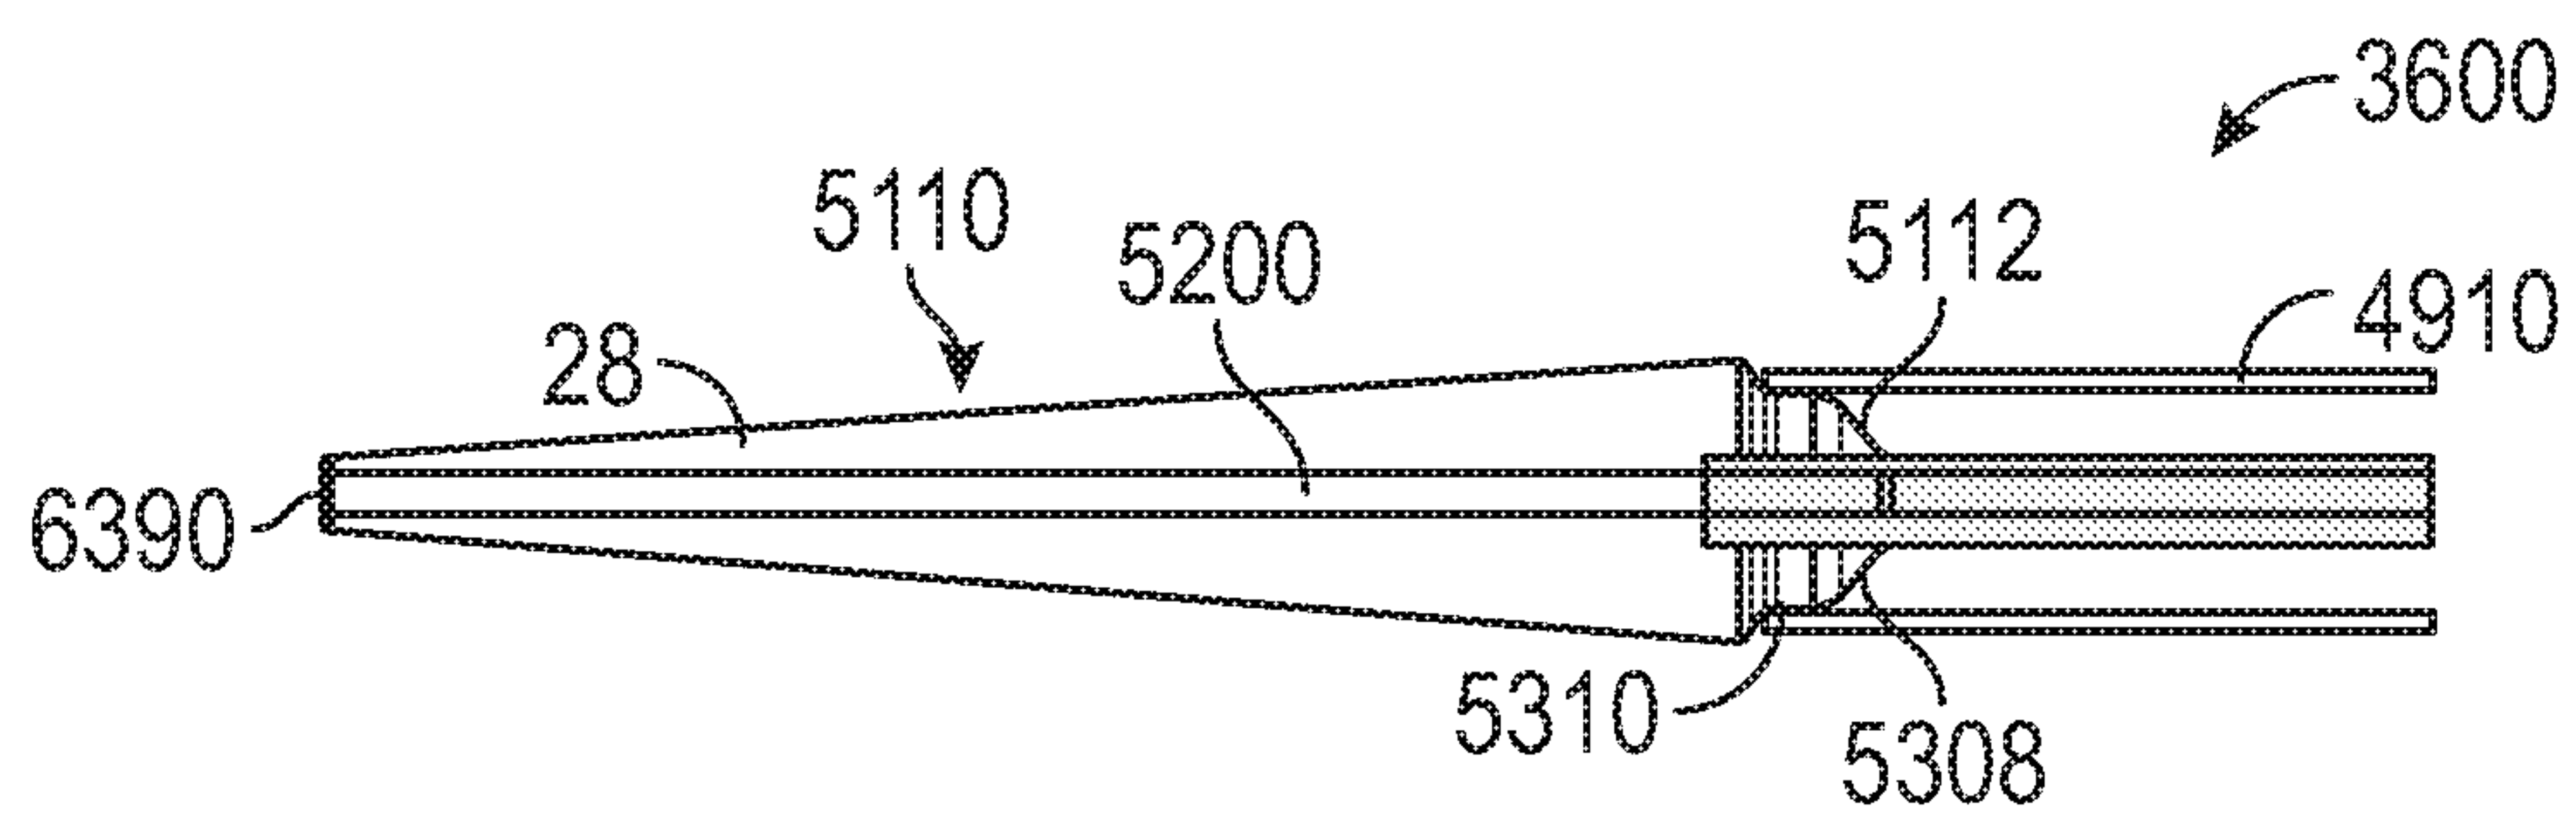


FIG. 53

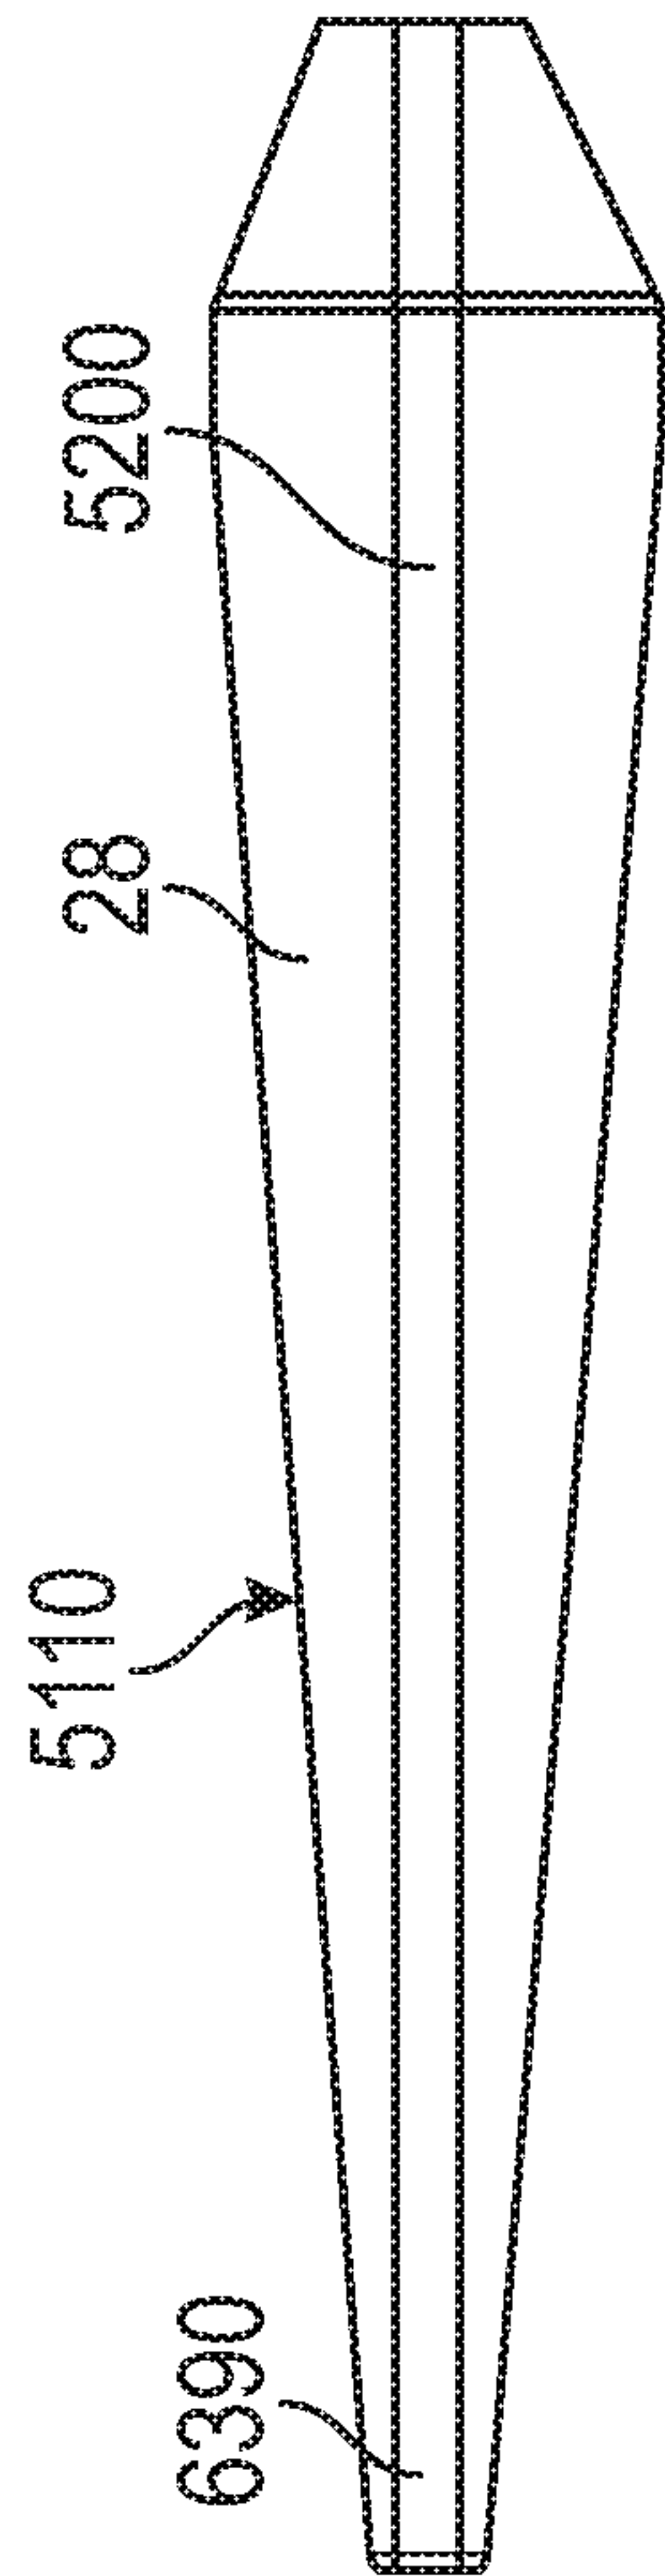


FIG. 54

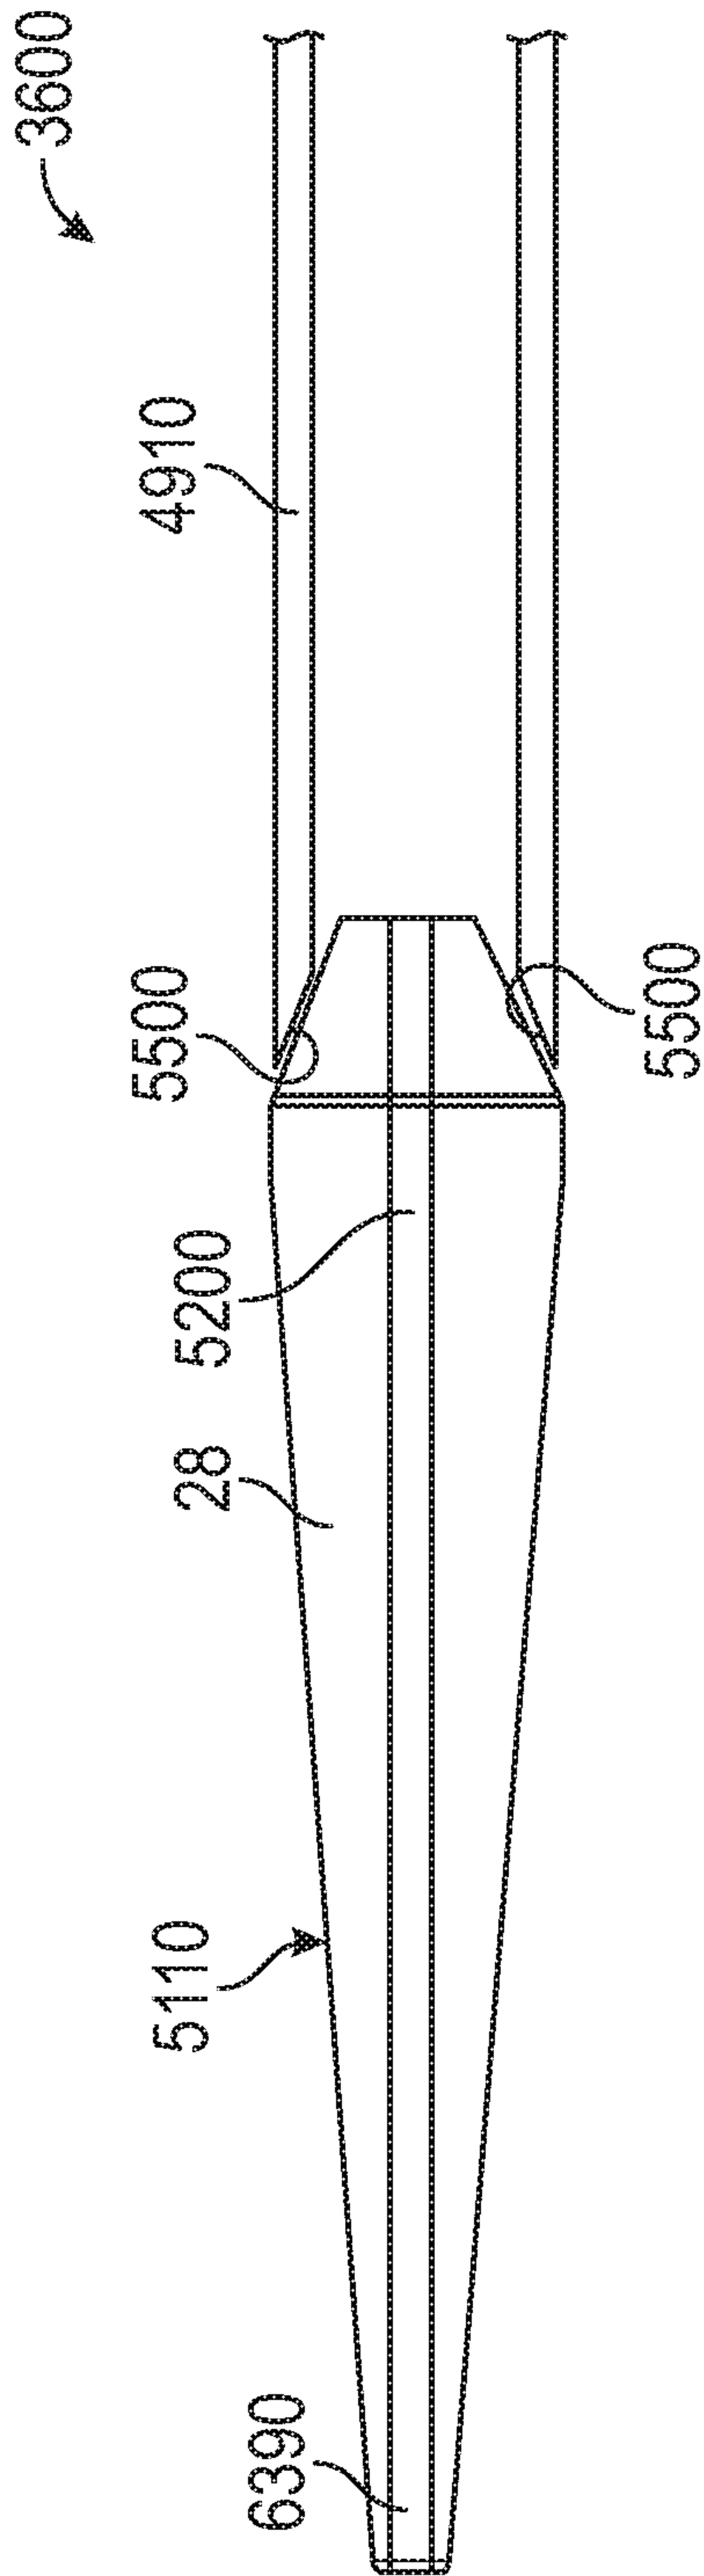


FIG. 55

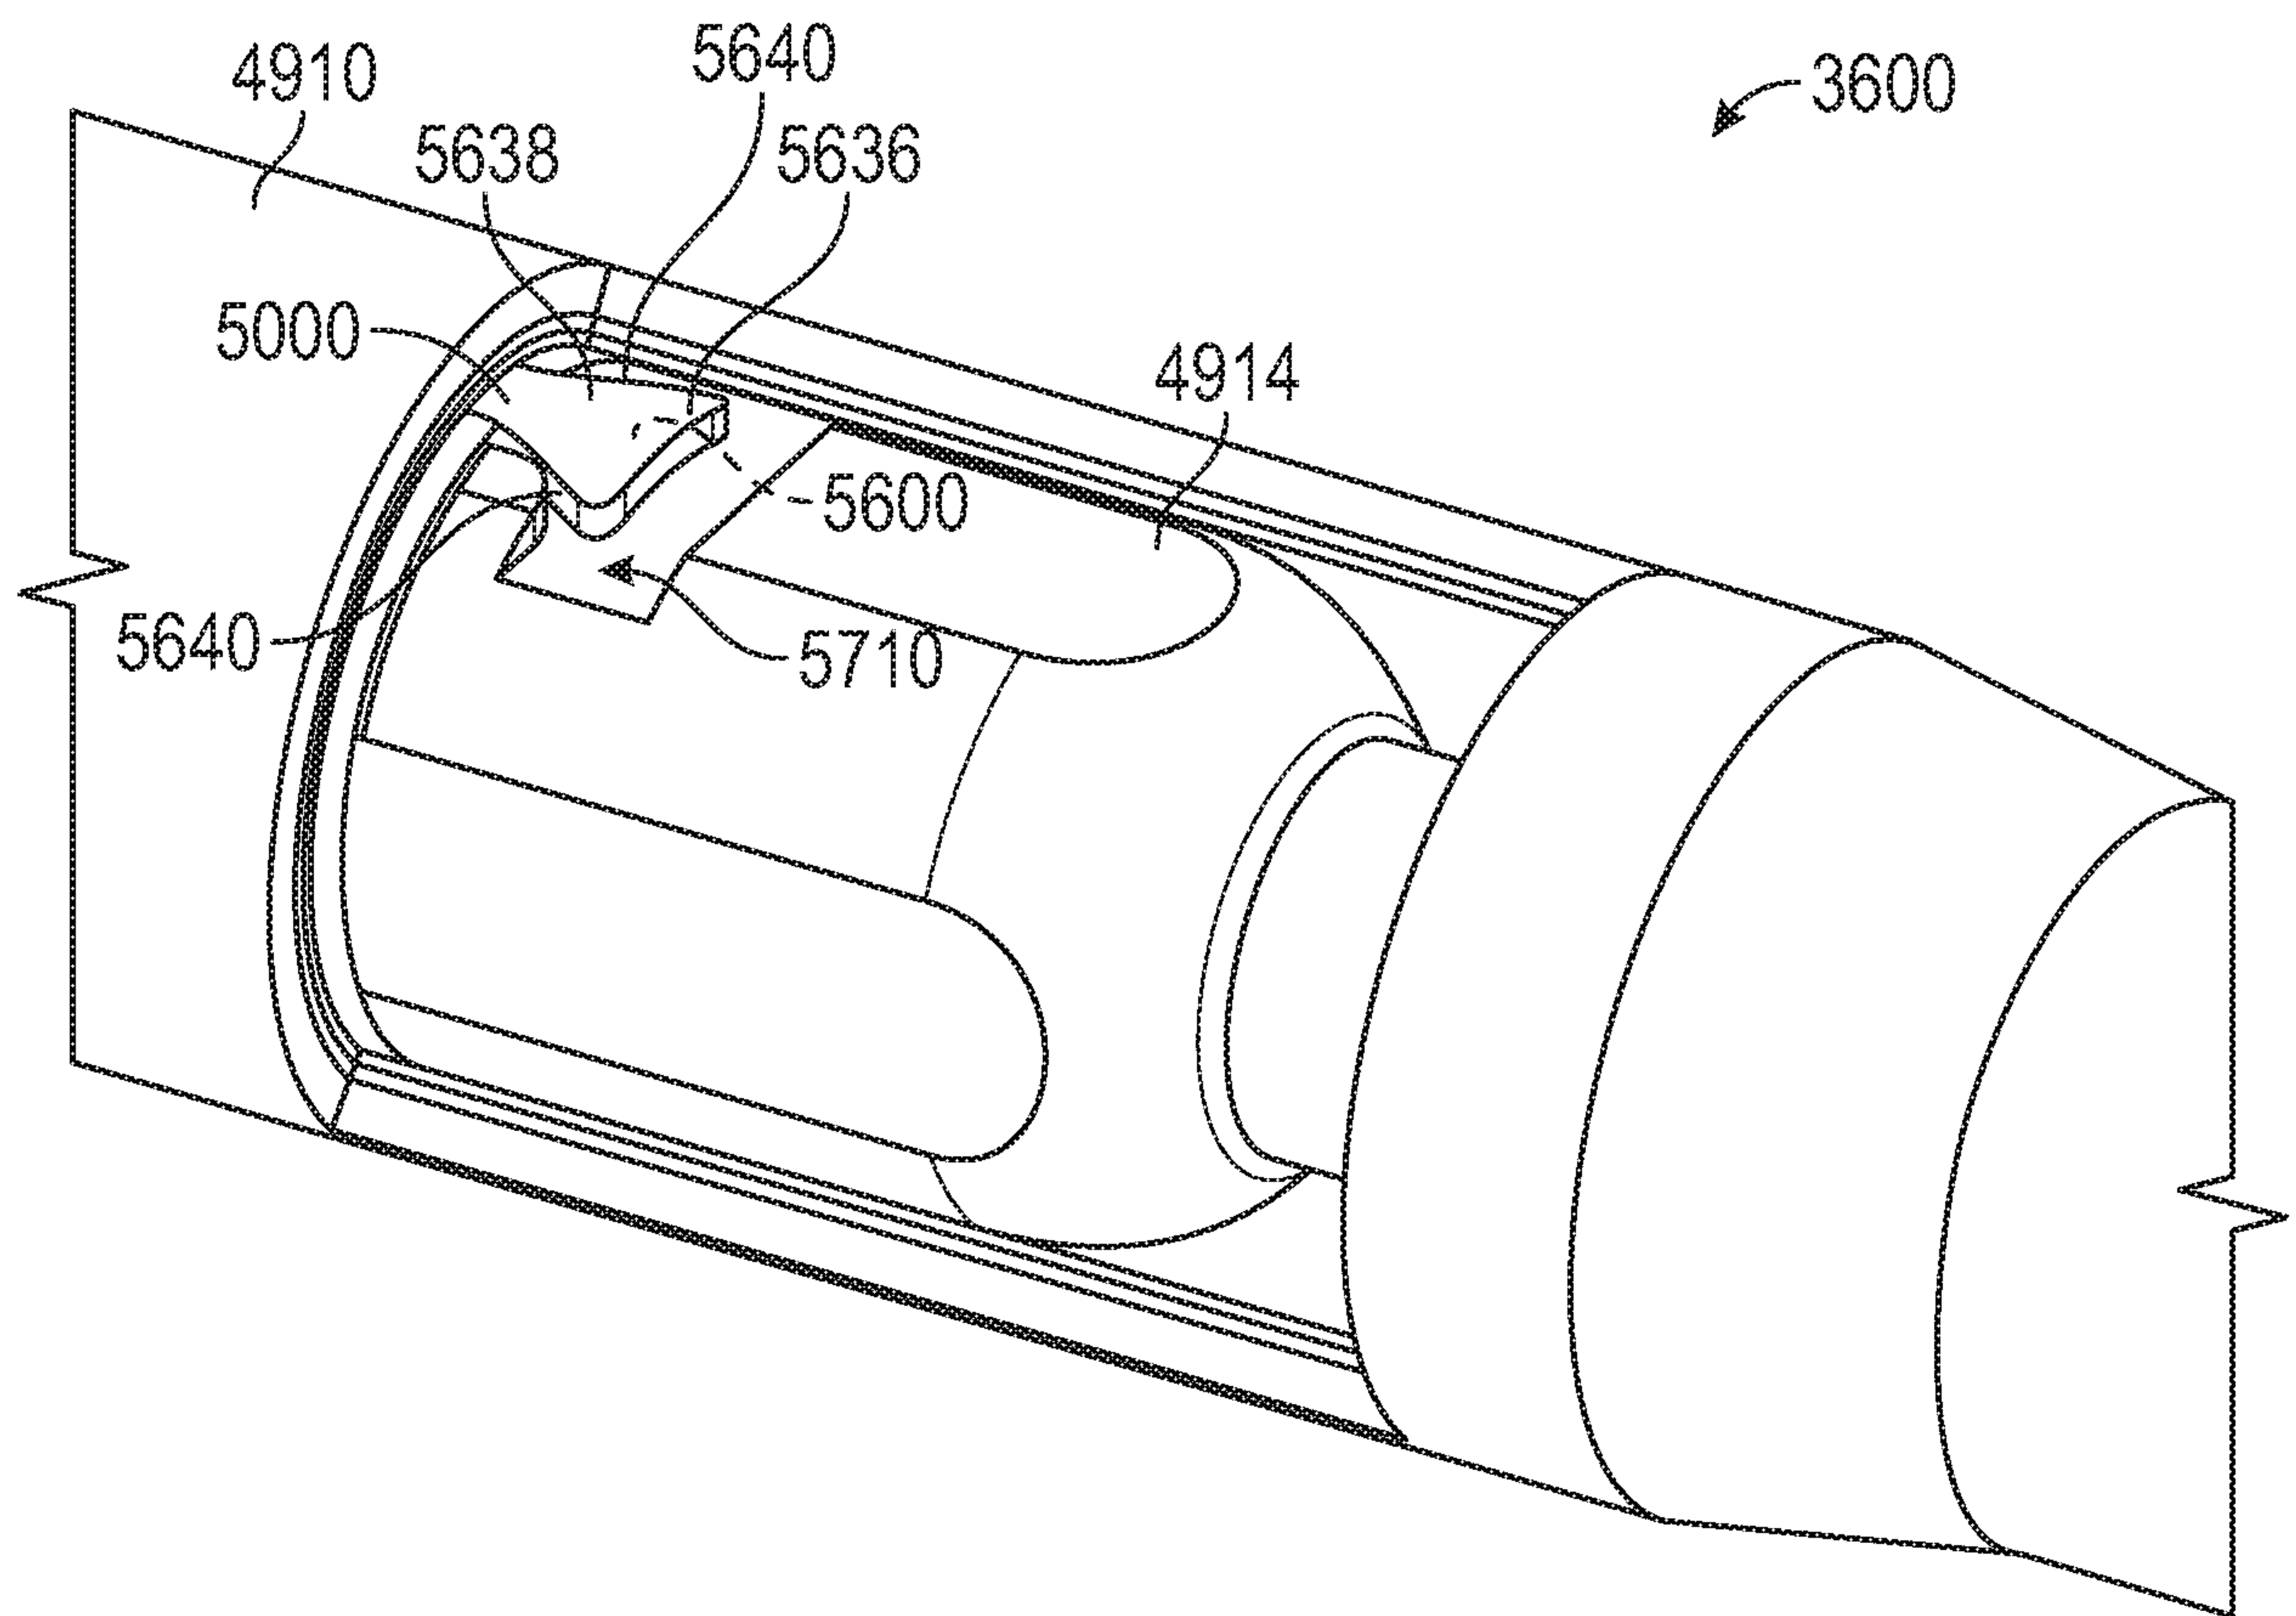


FIG. 56

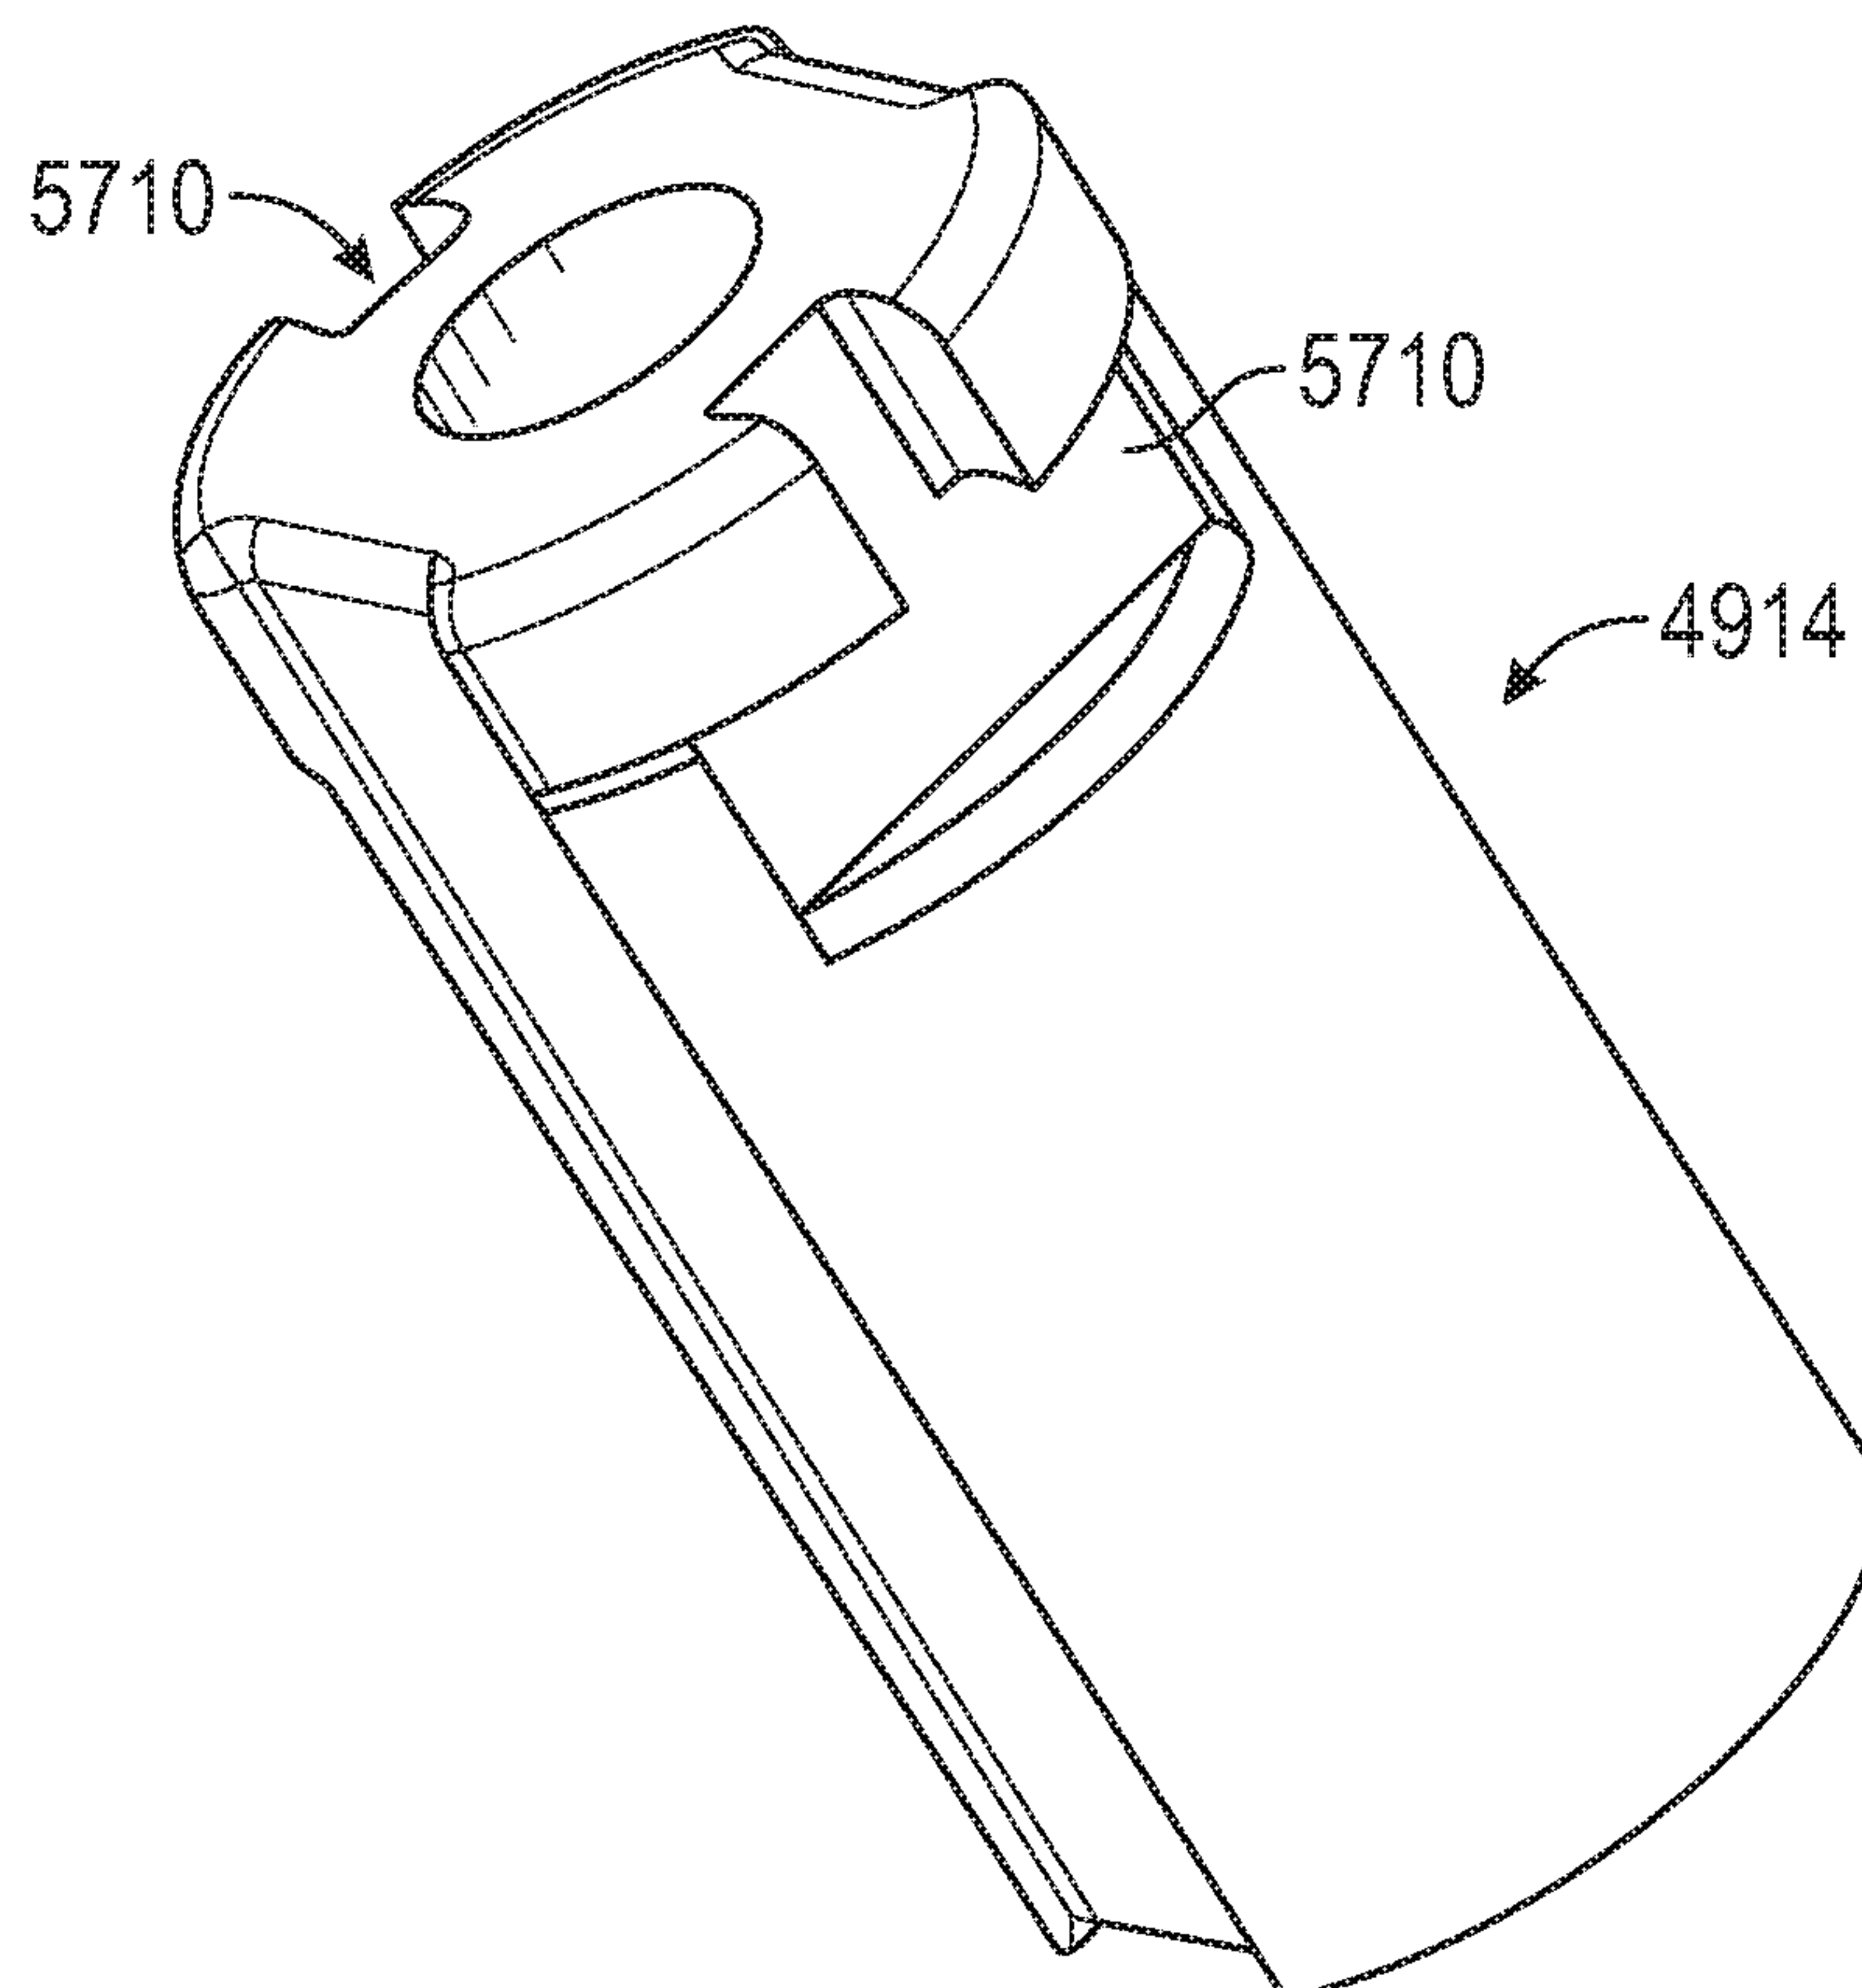
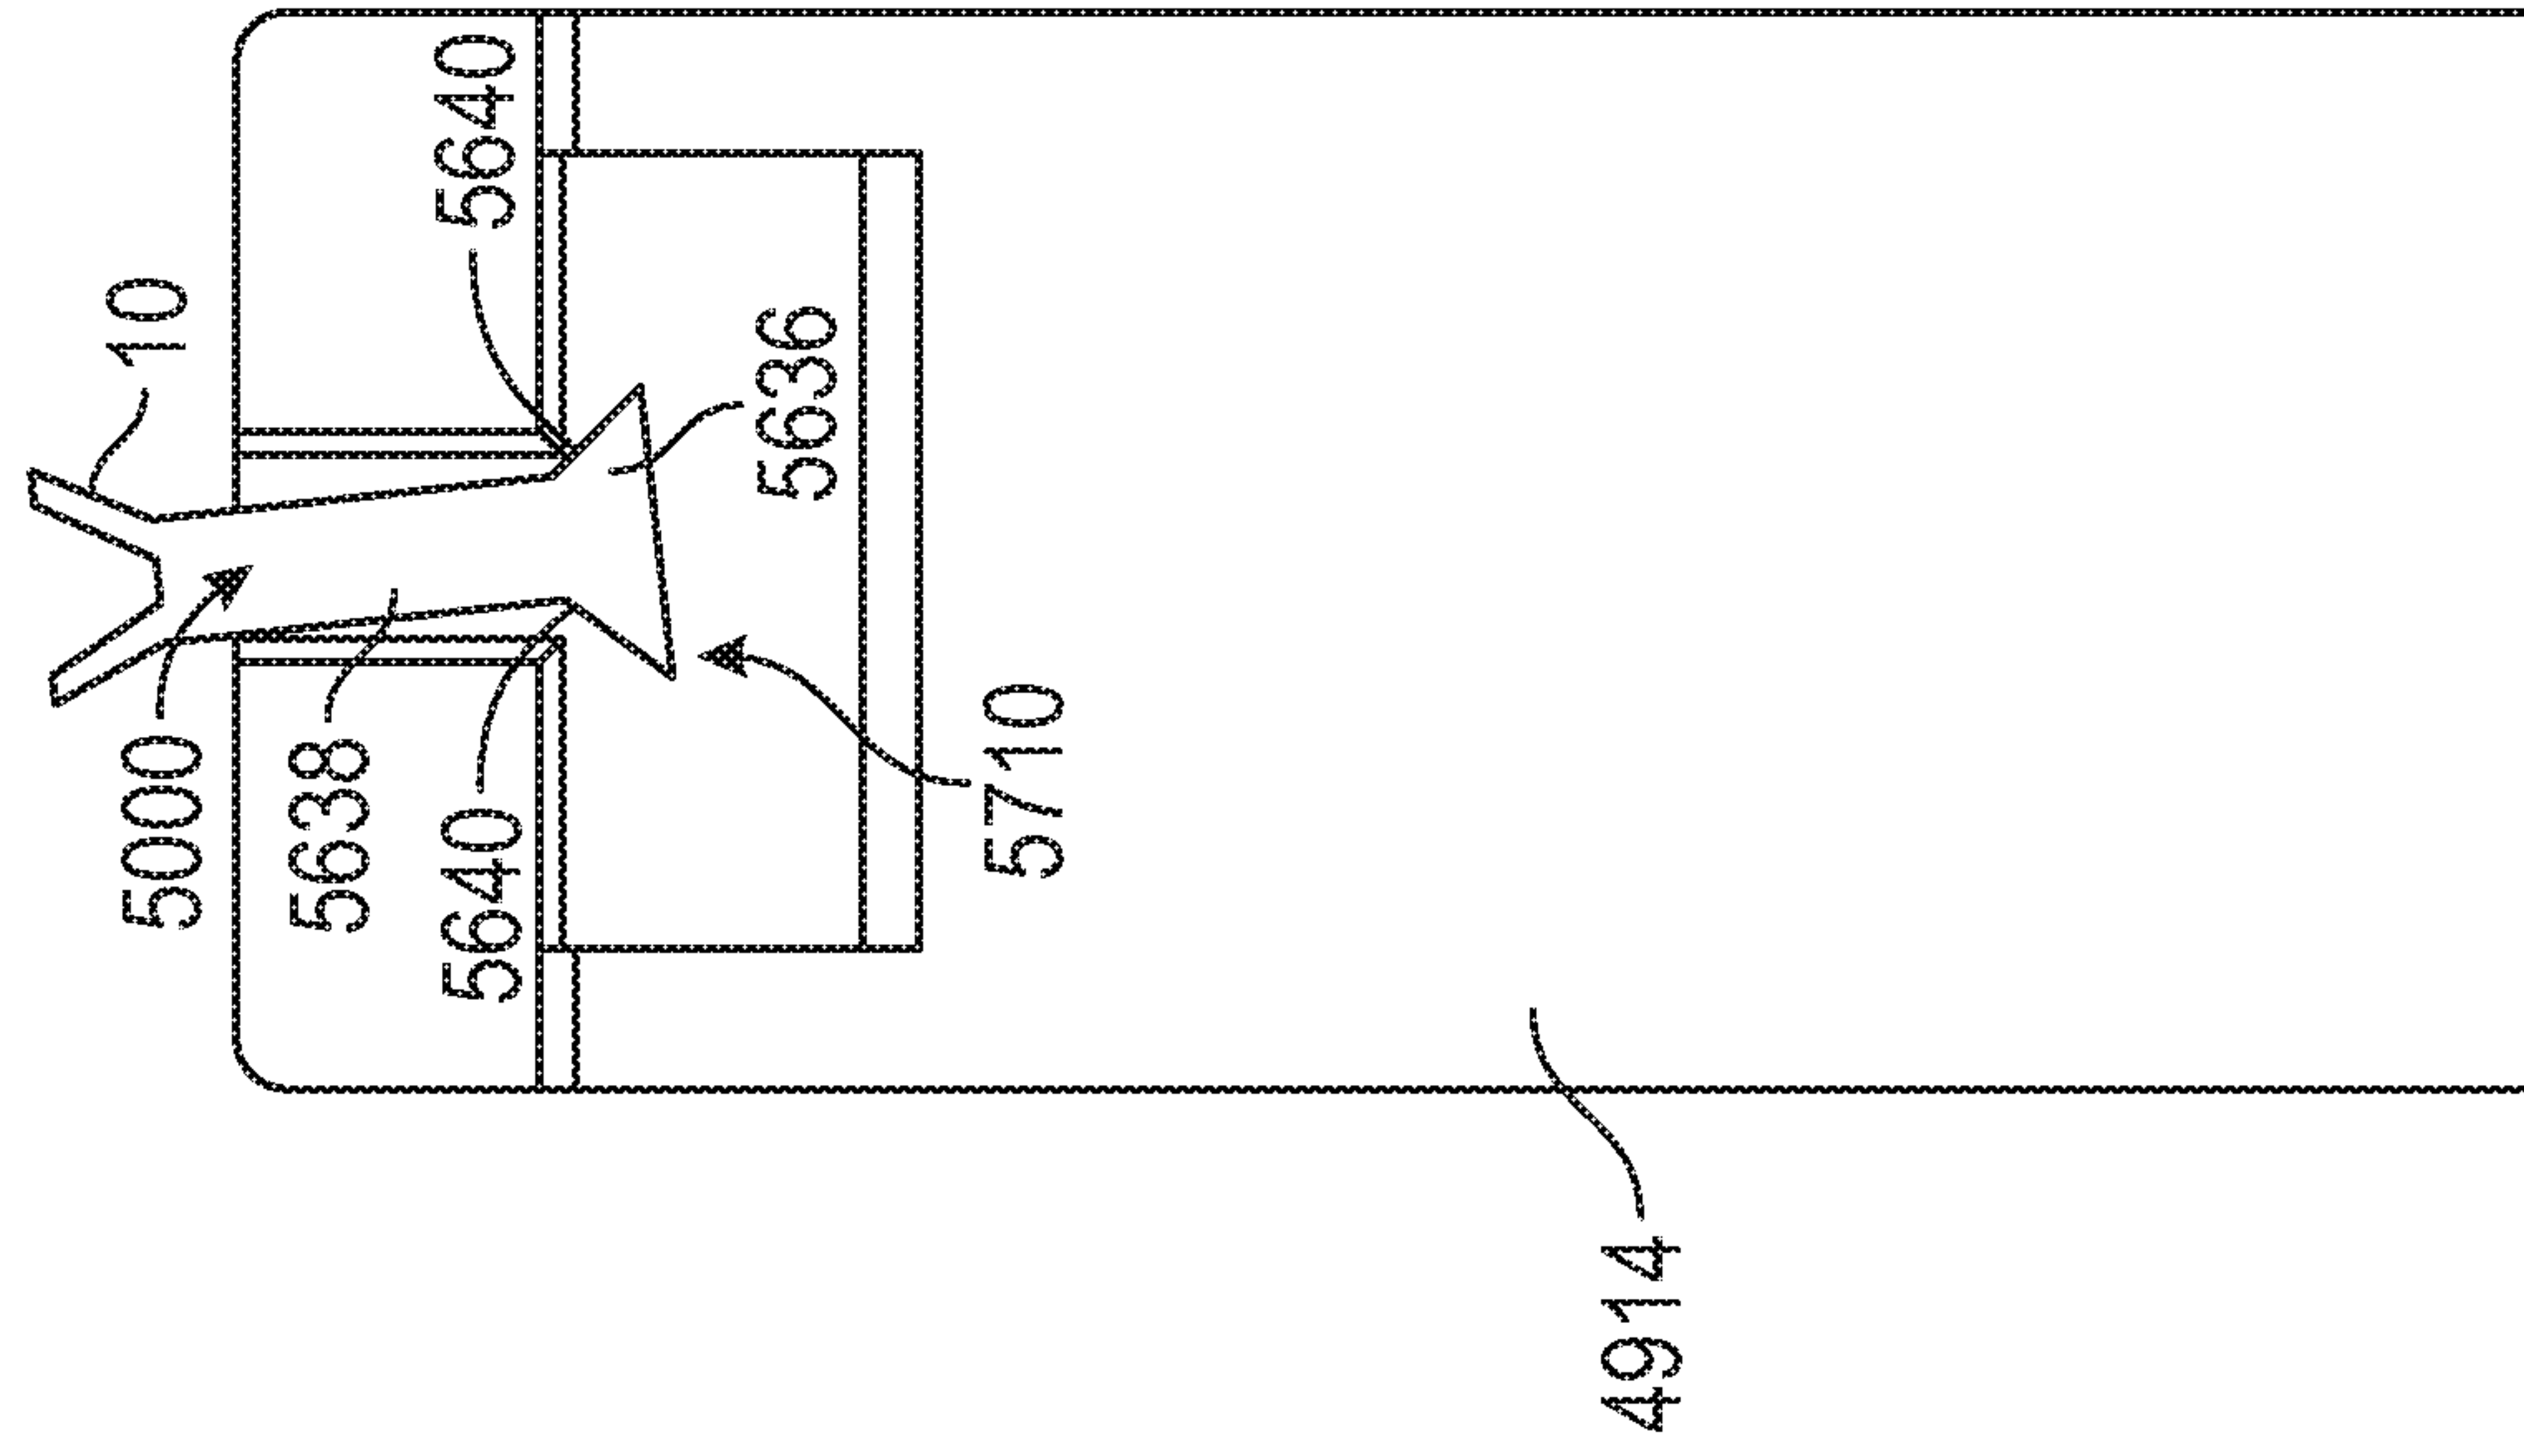
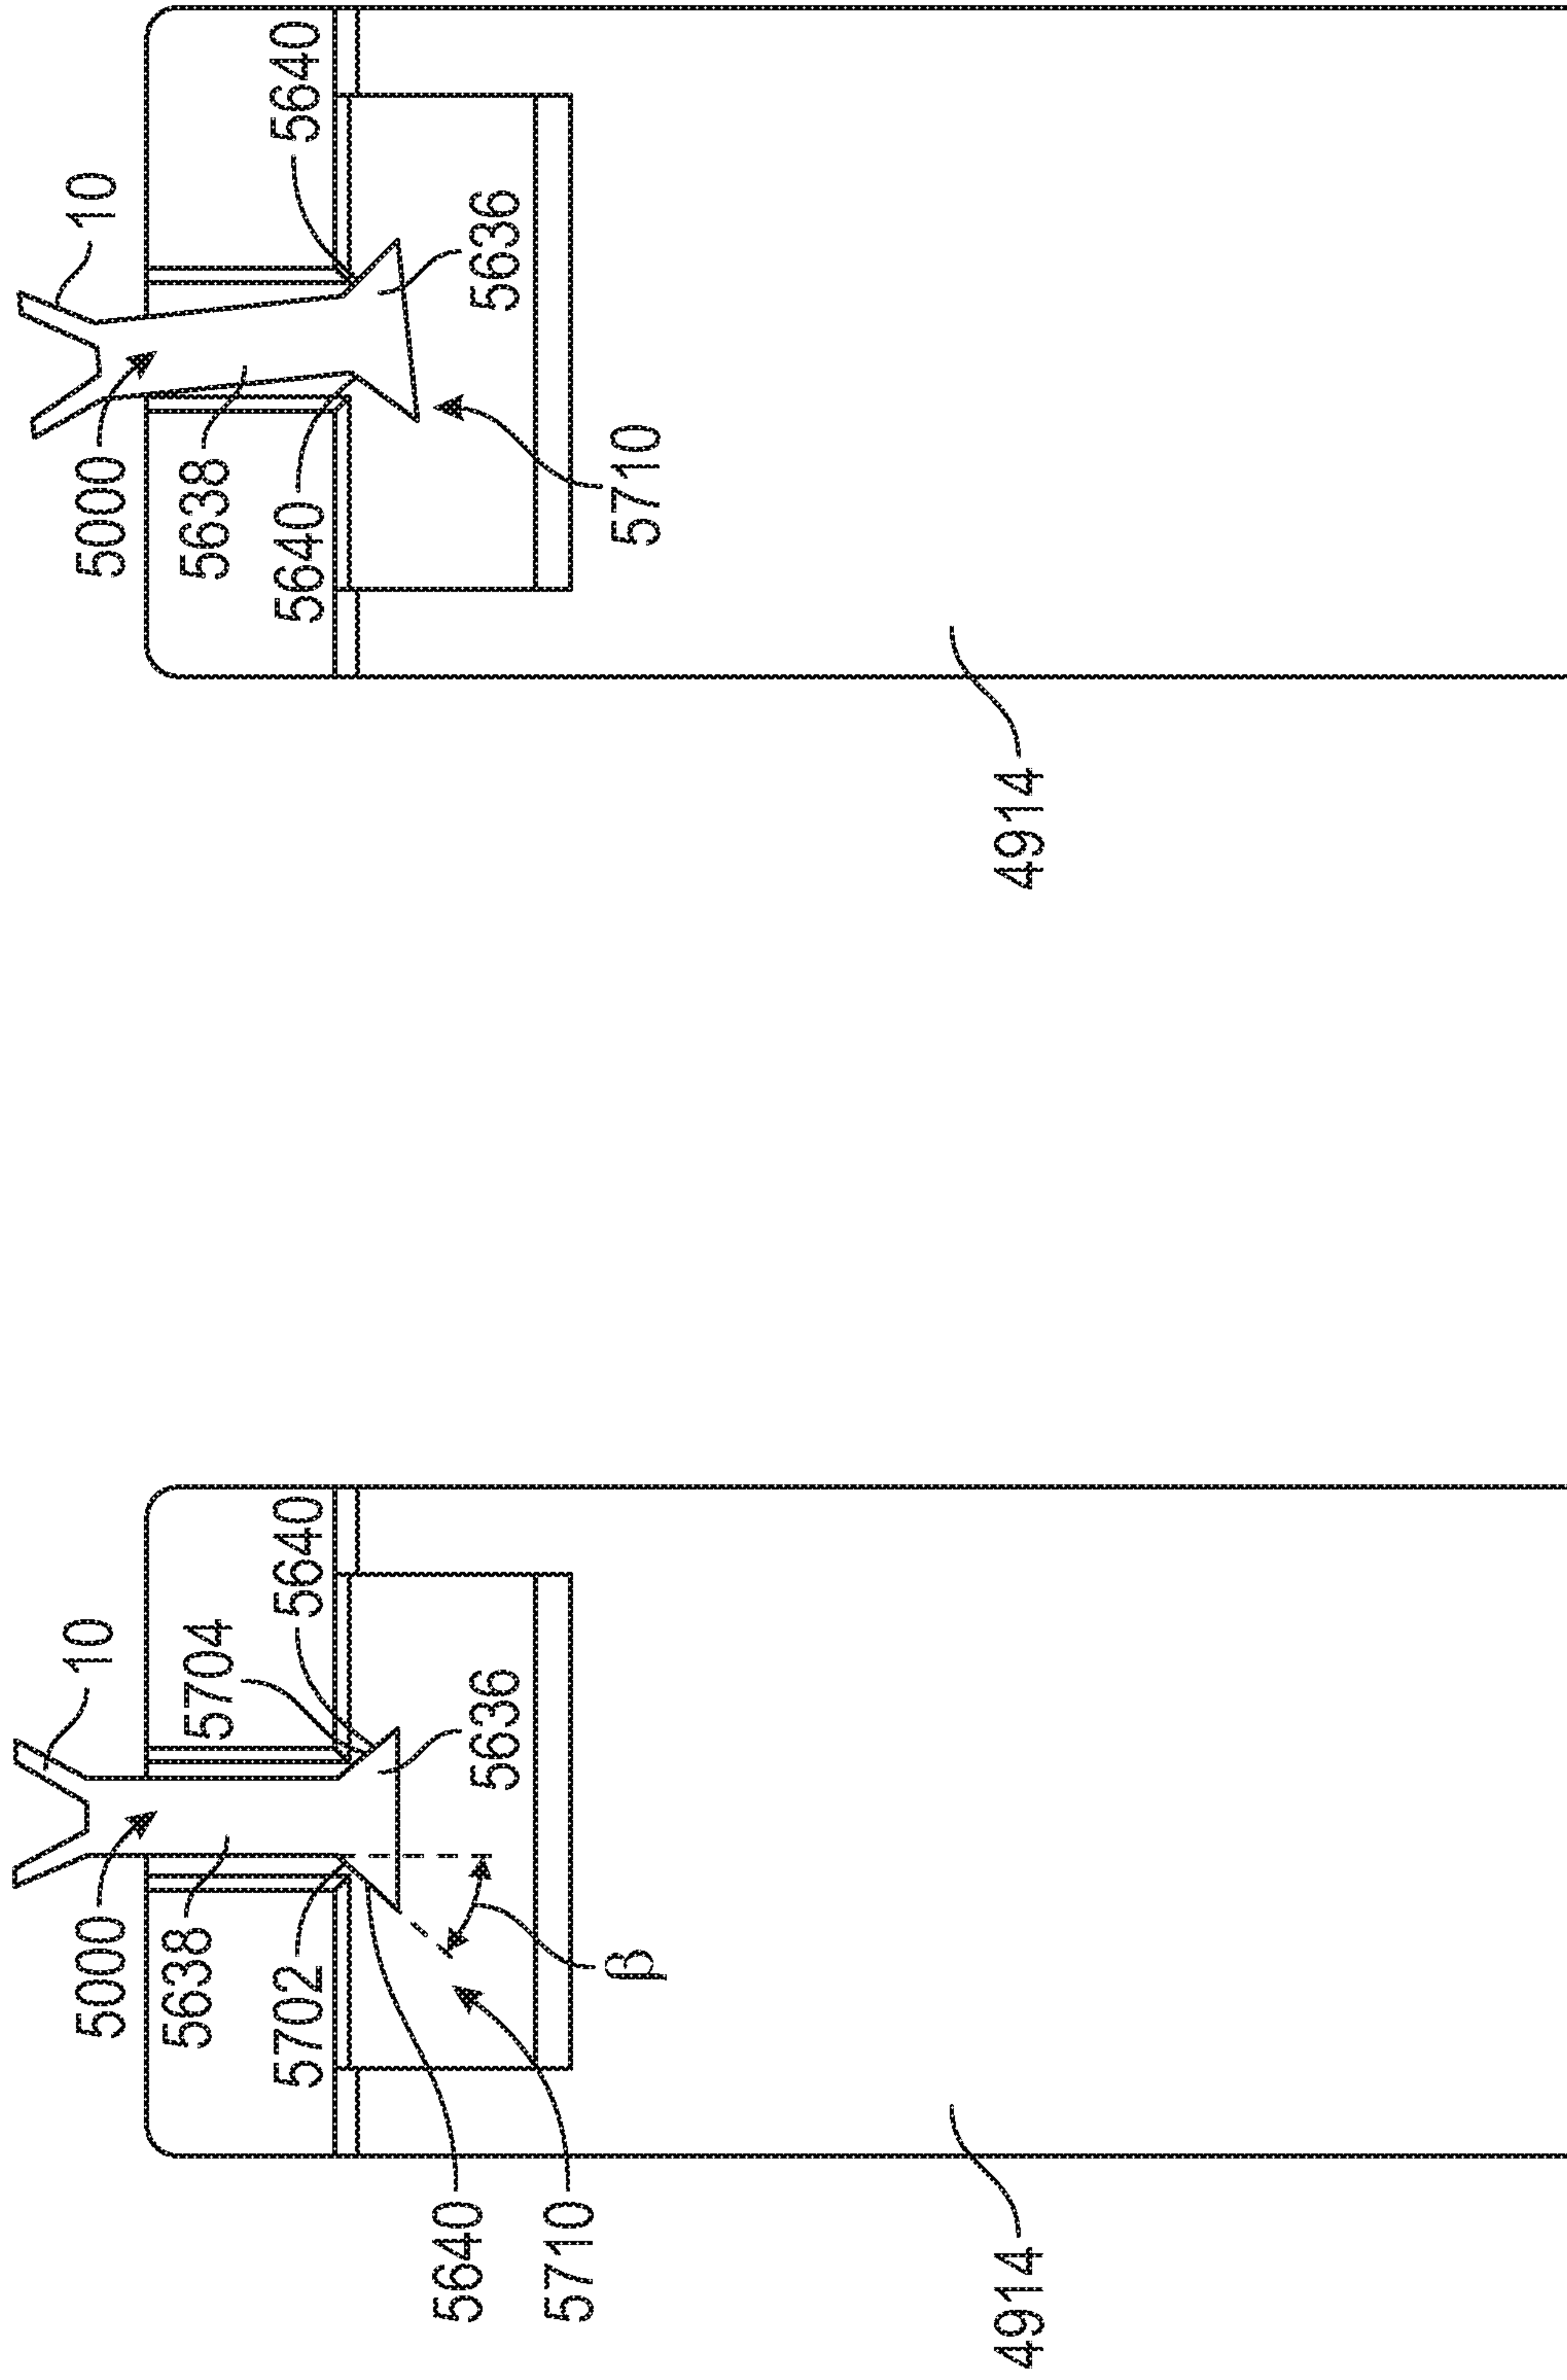


FIG. 57



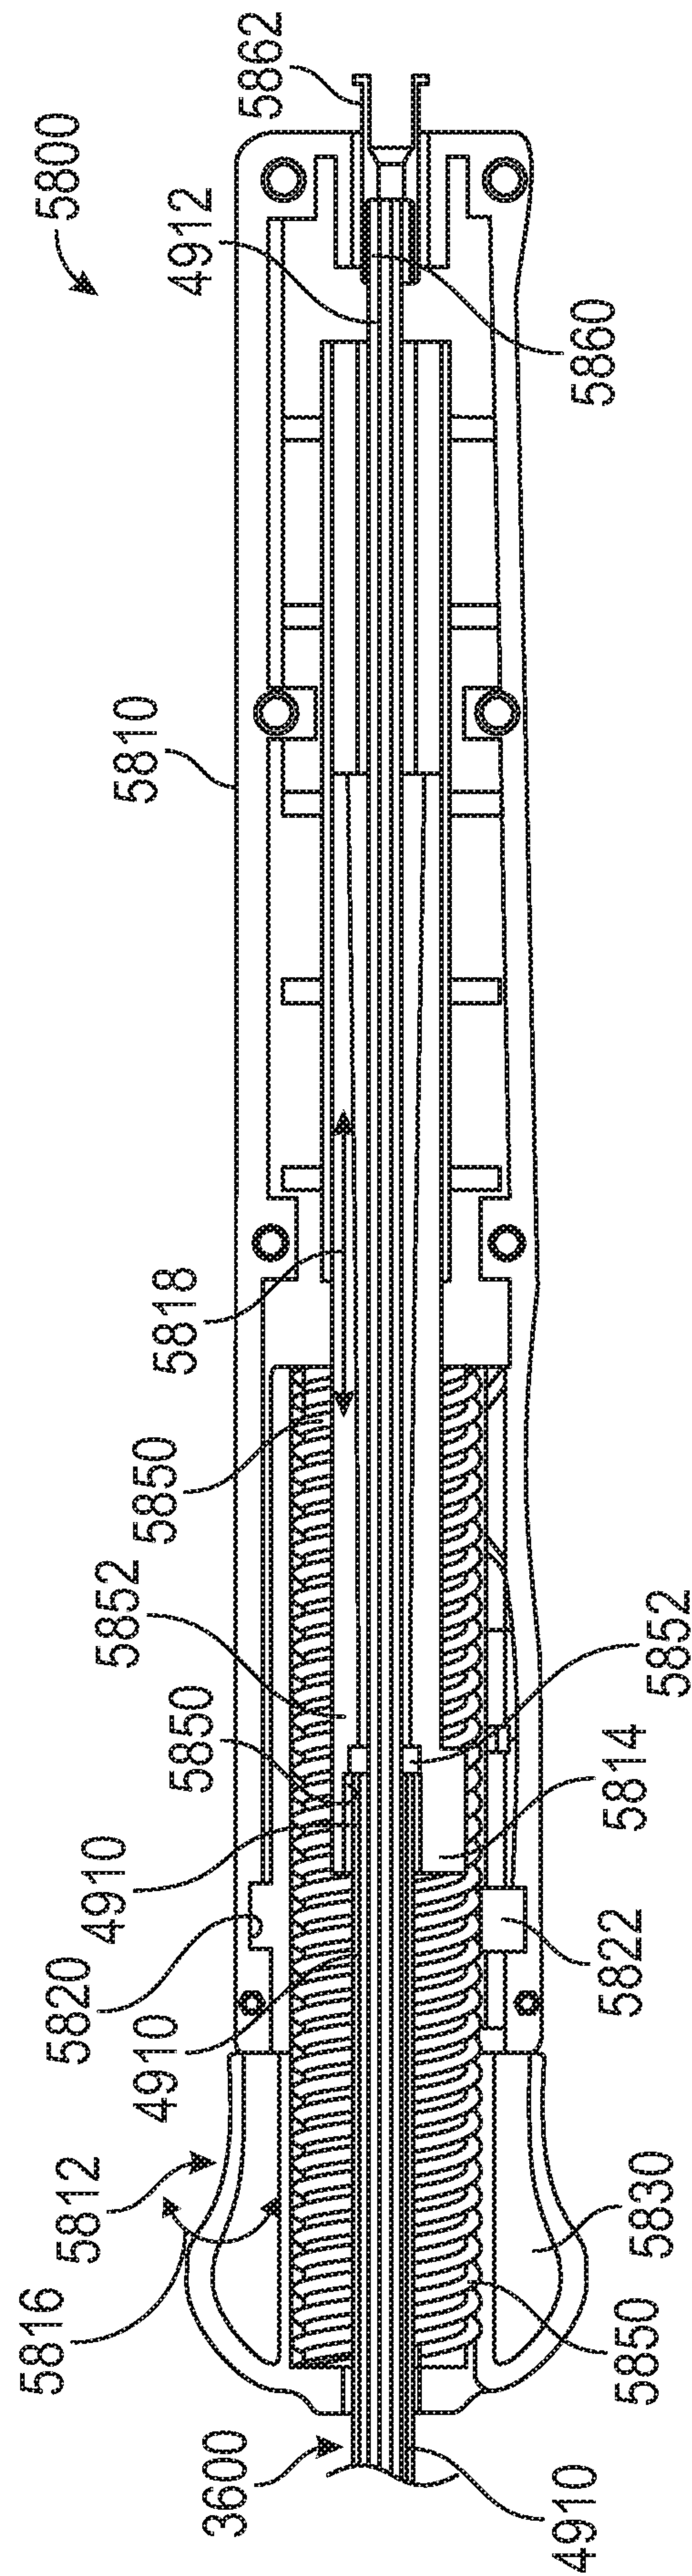


FIG. 58

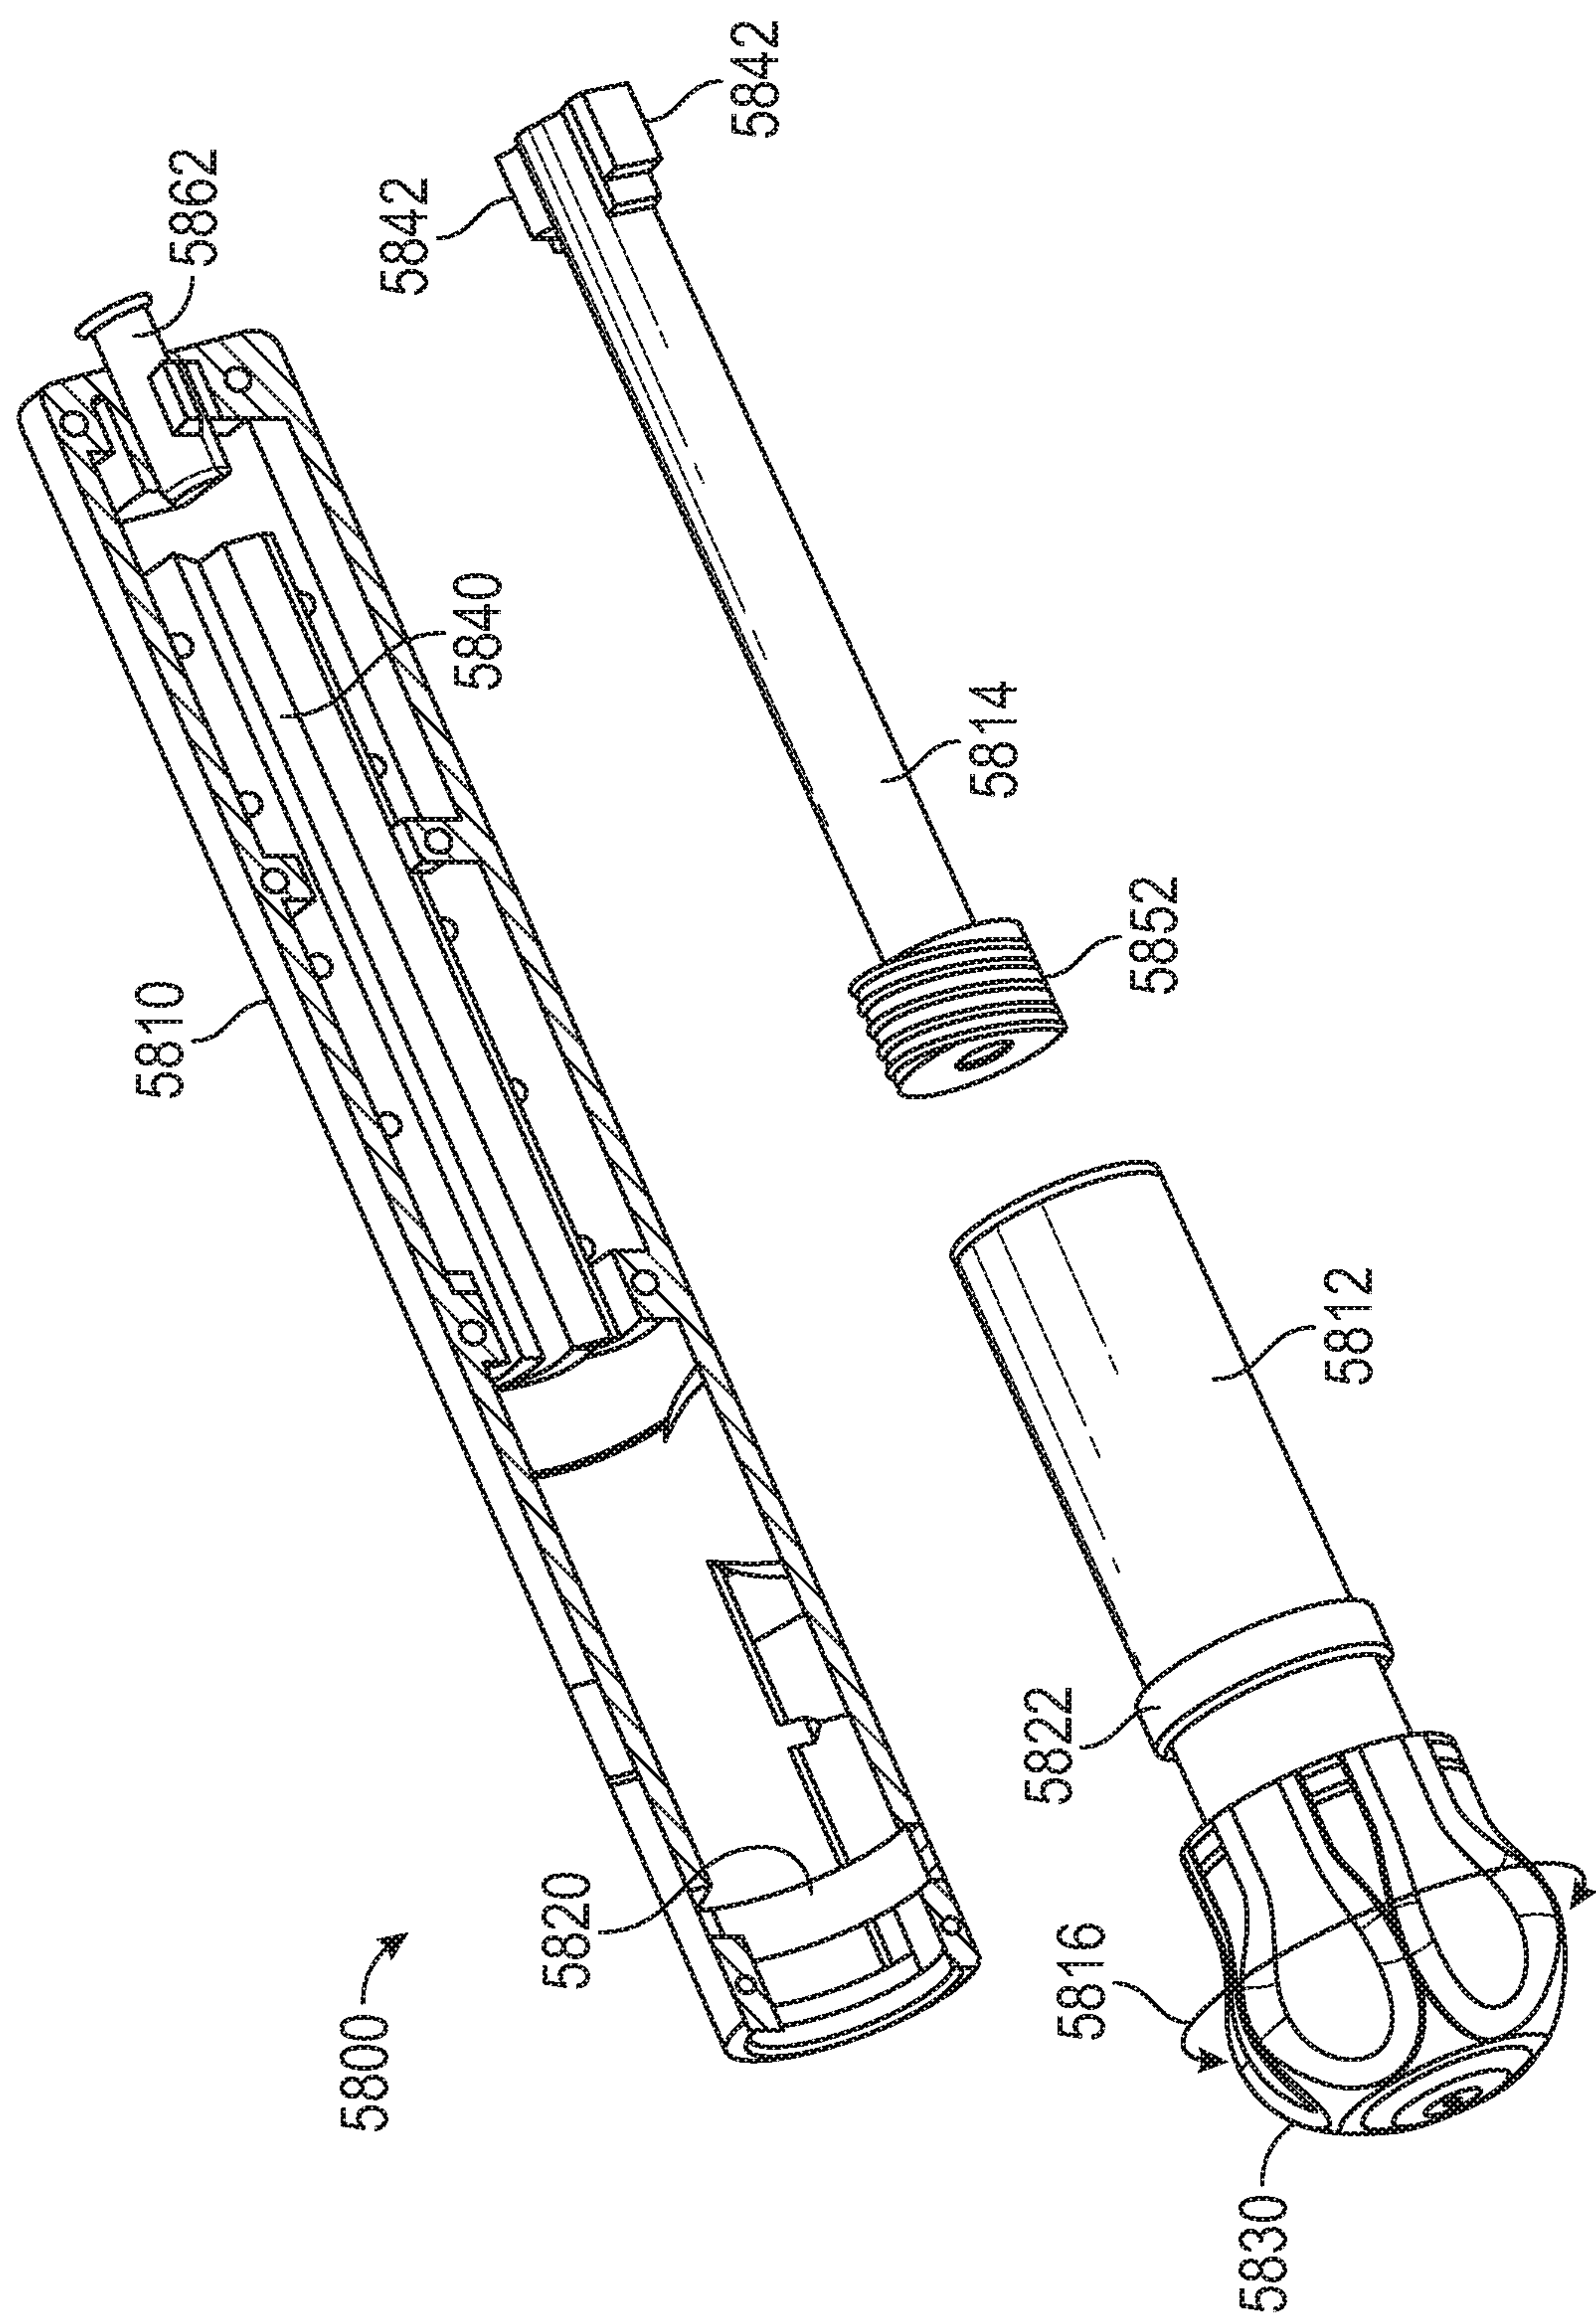
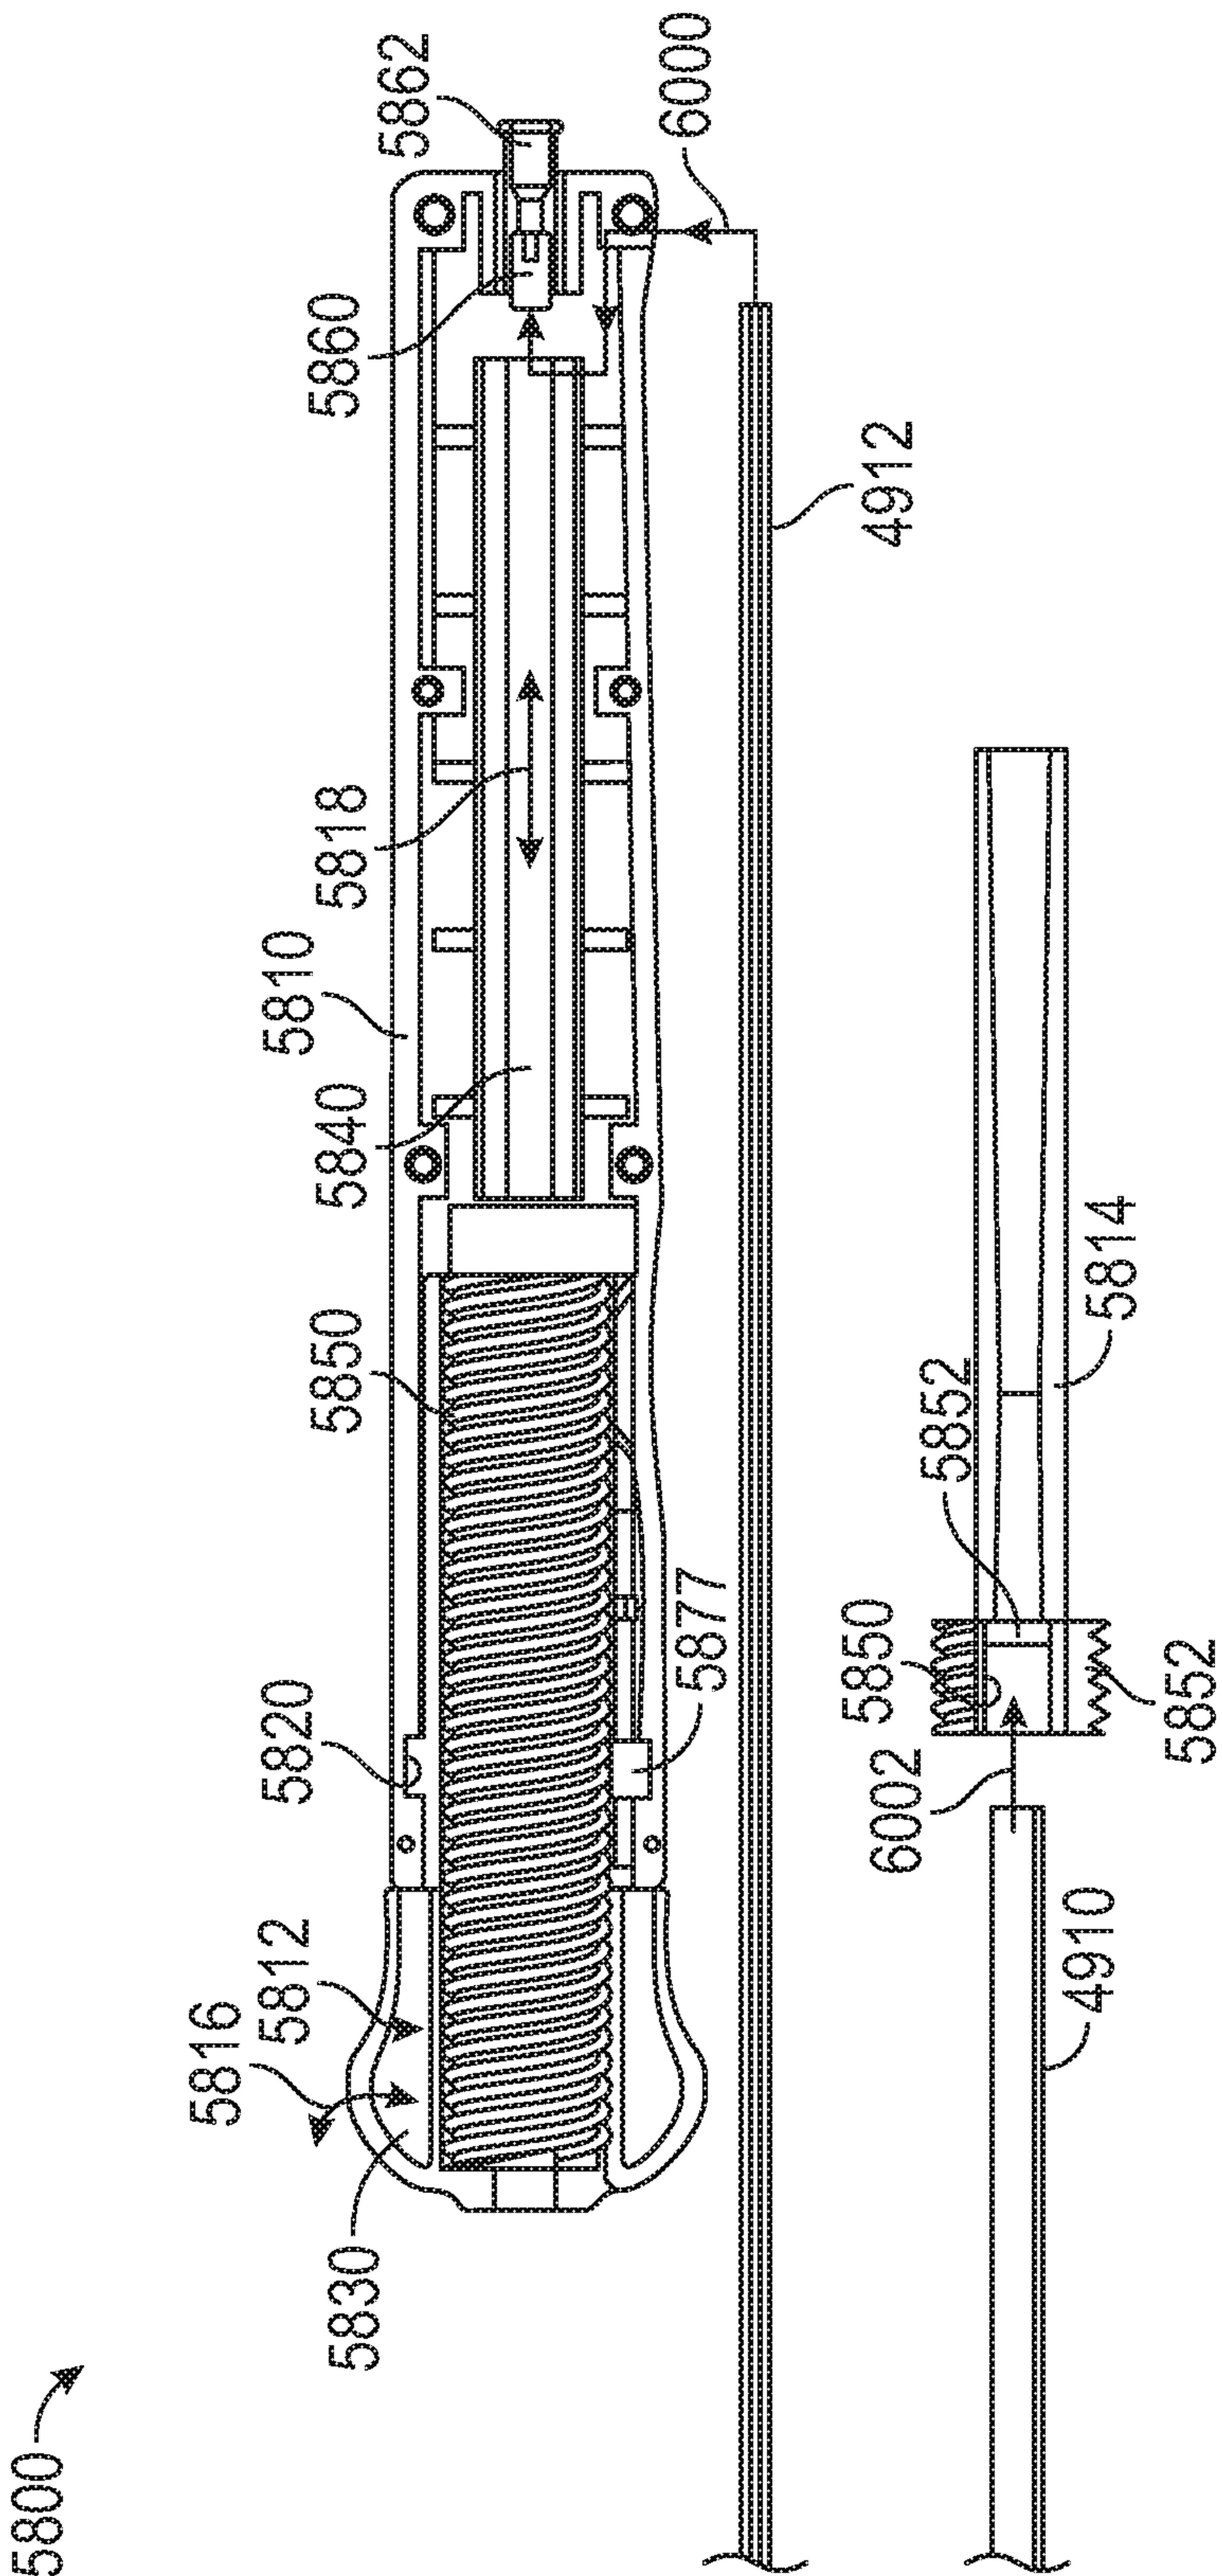


FIG. 59



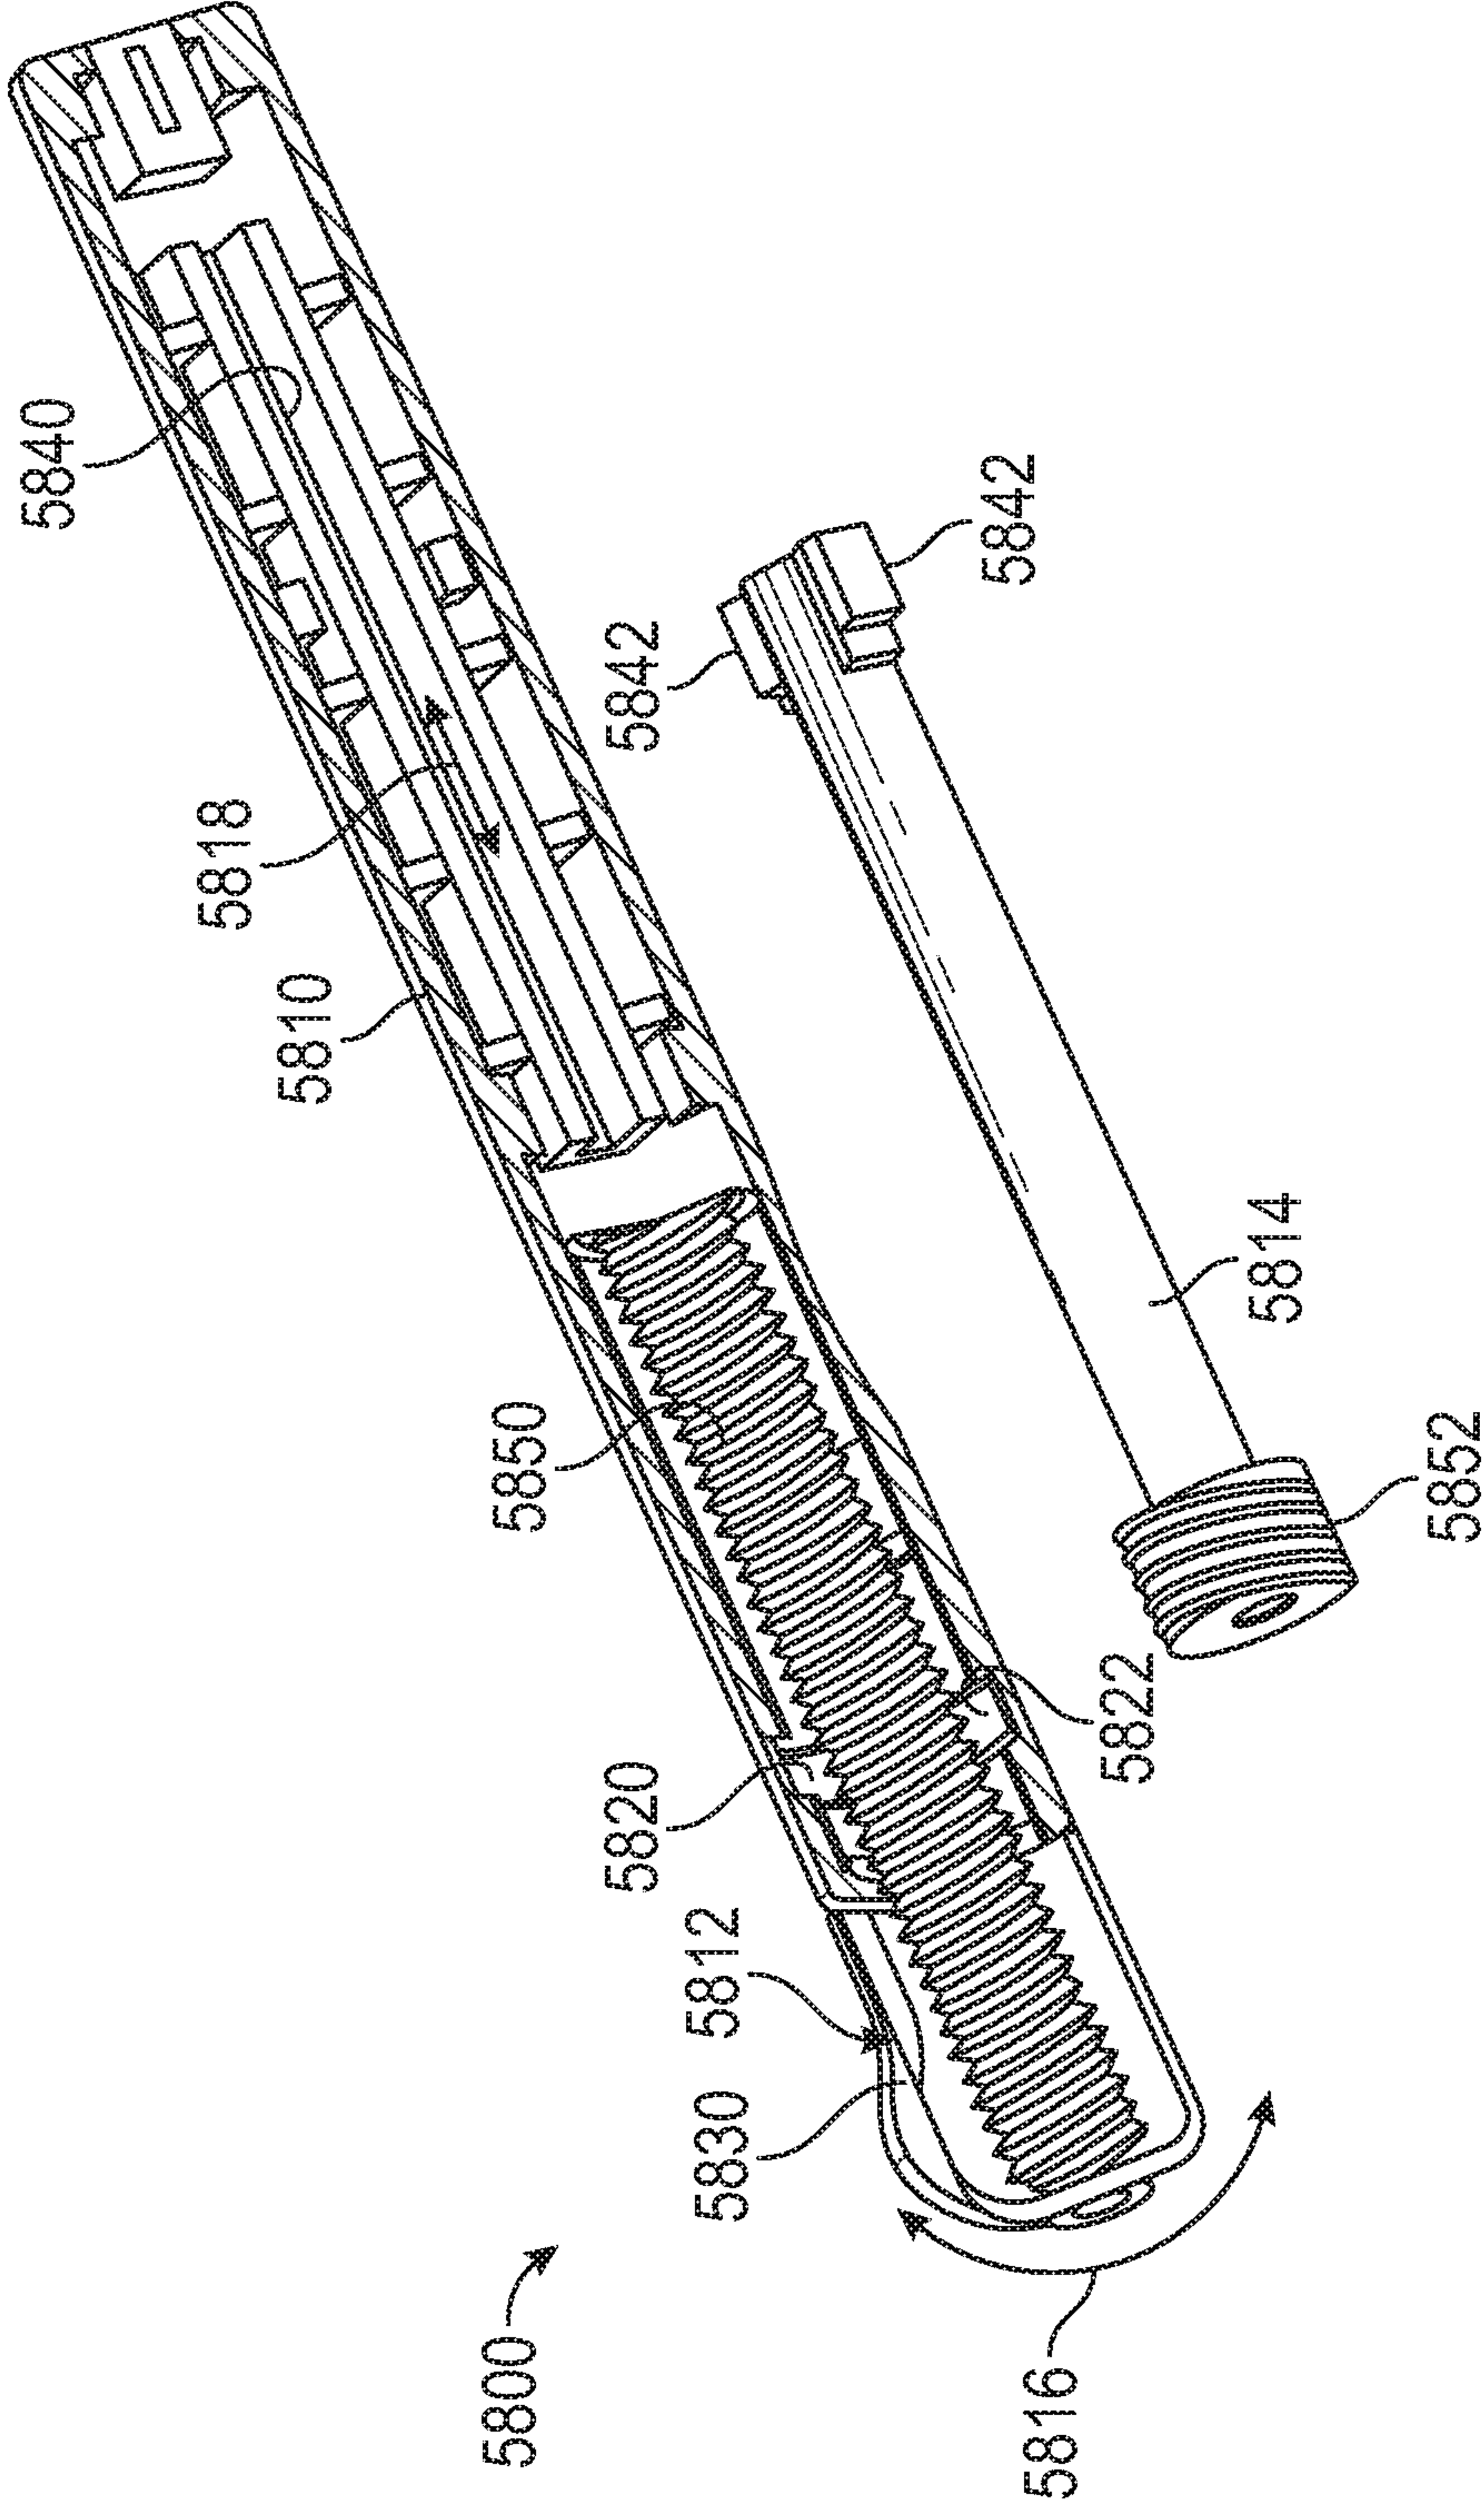


FIG. 61

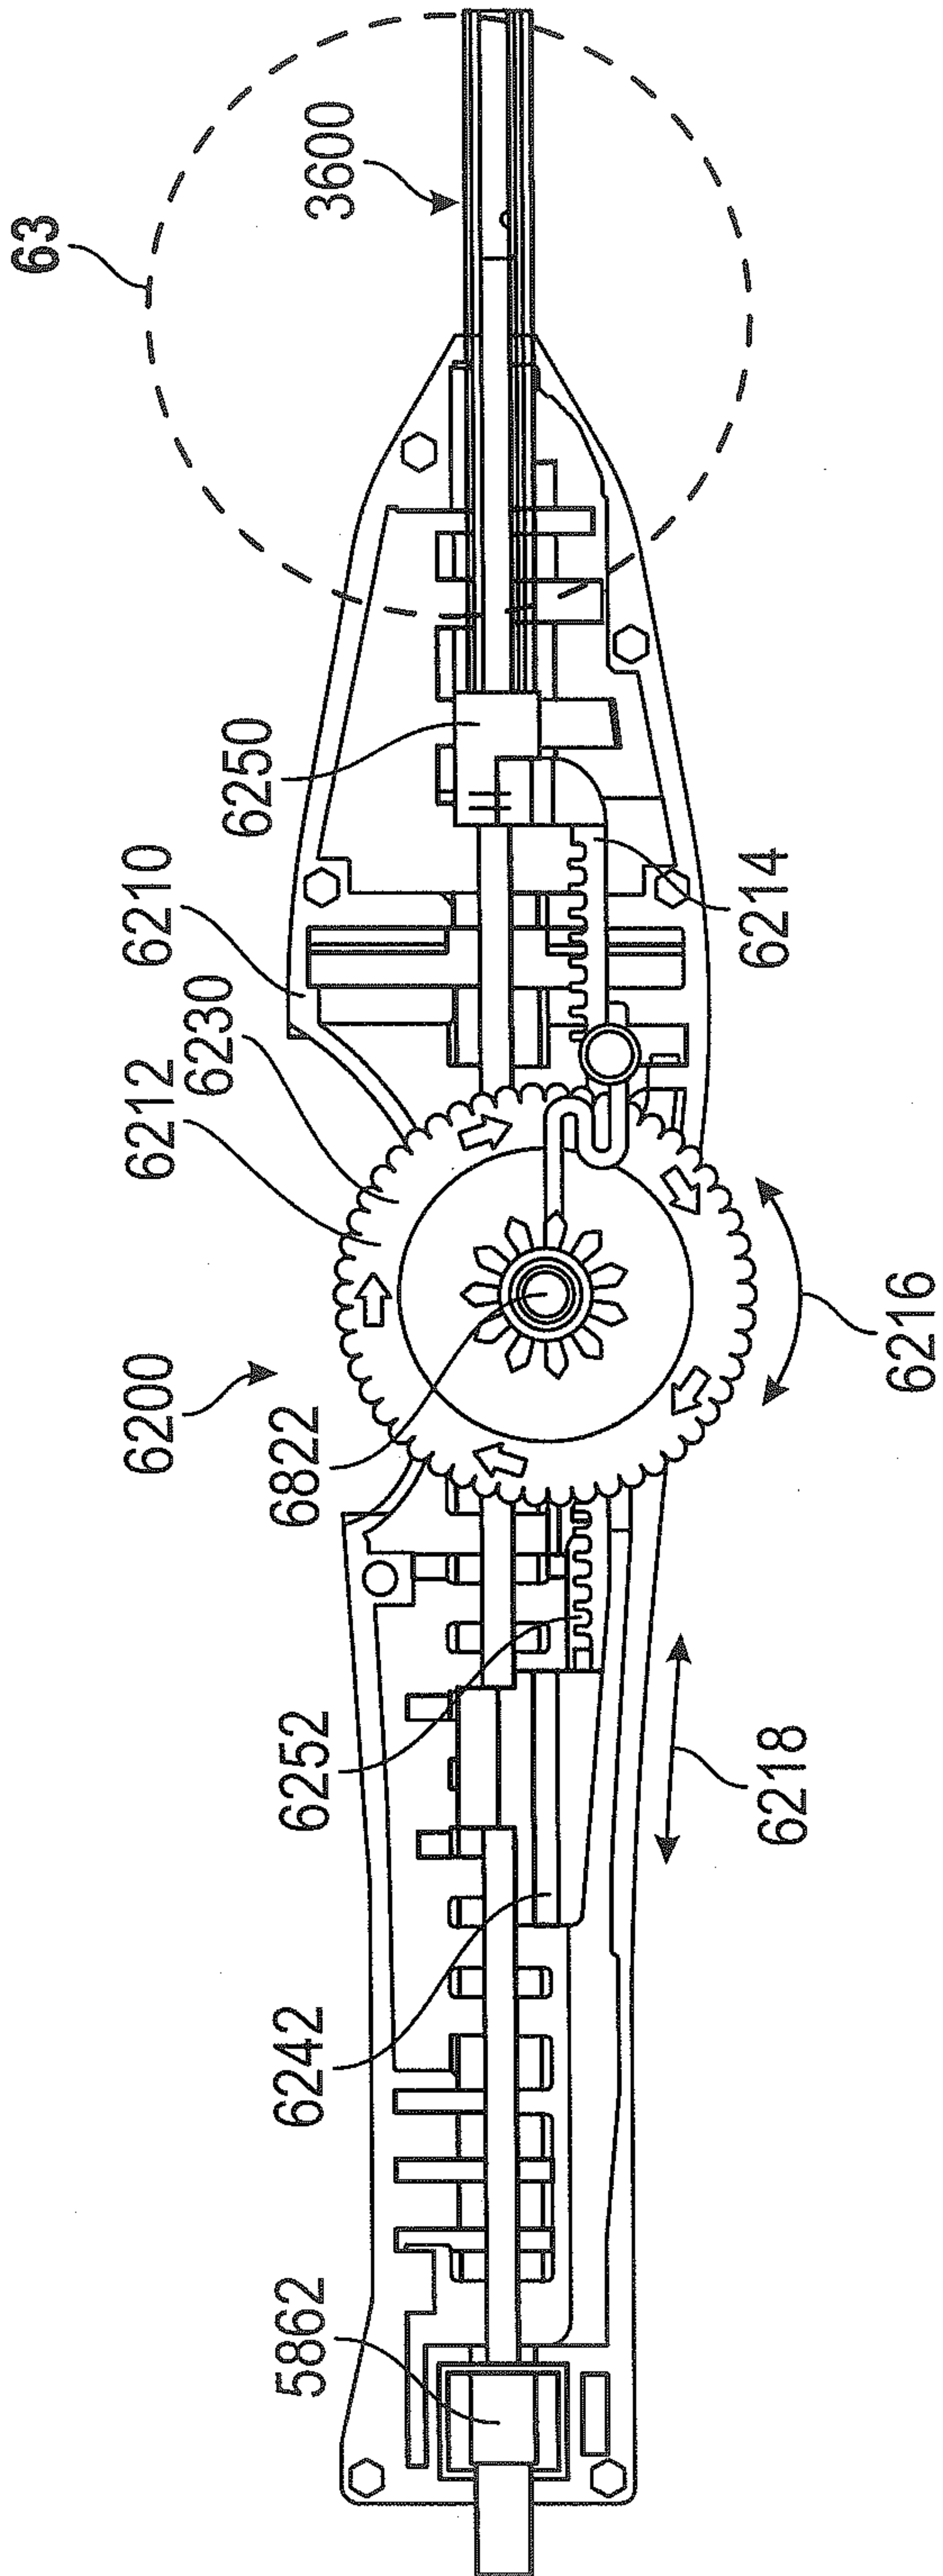


FIG. 62

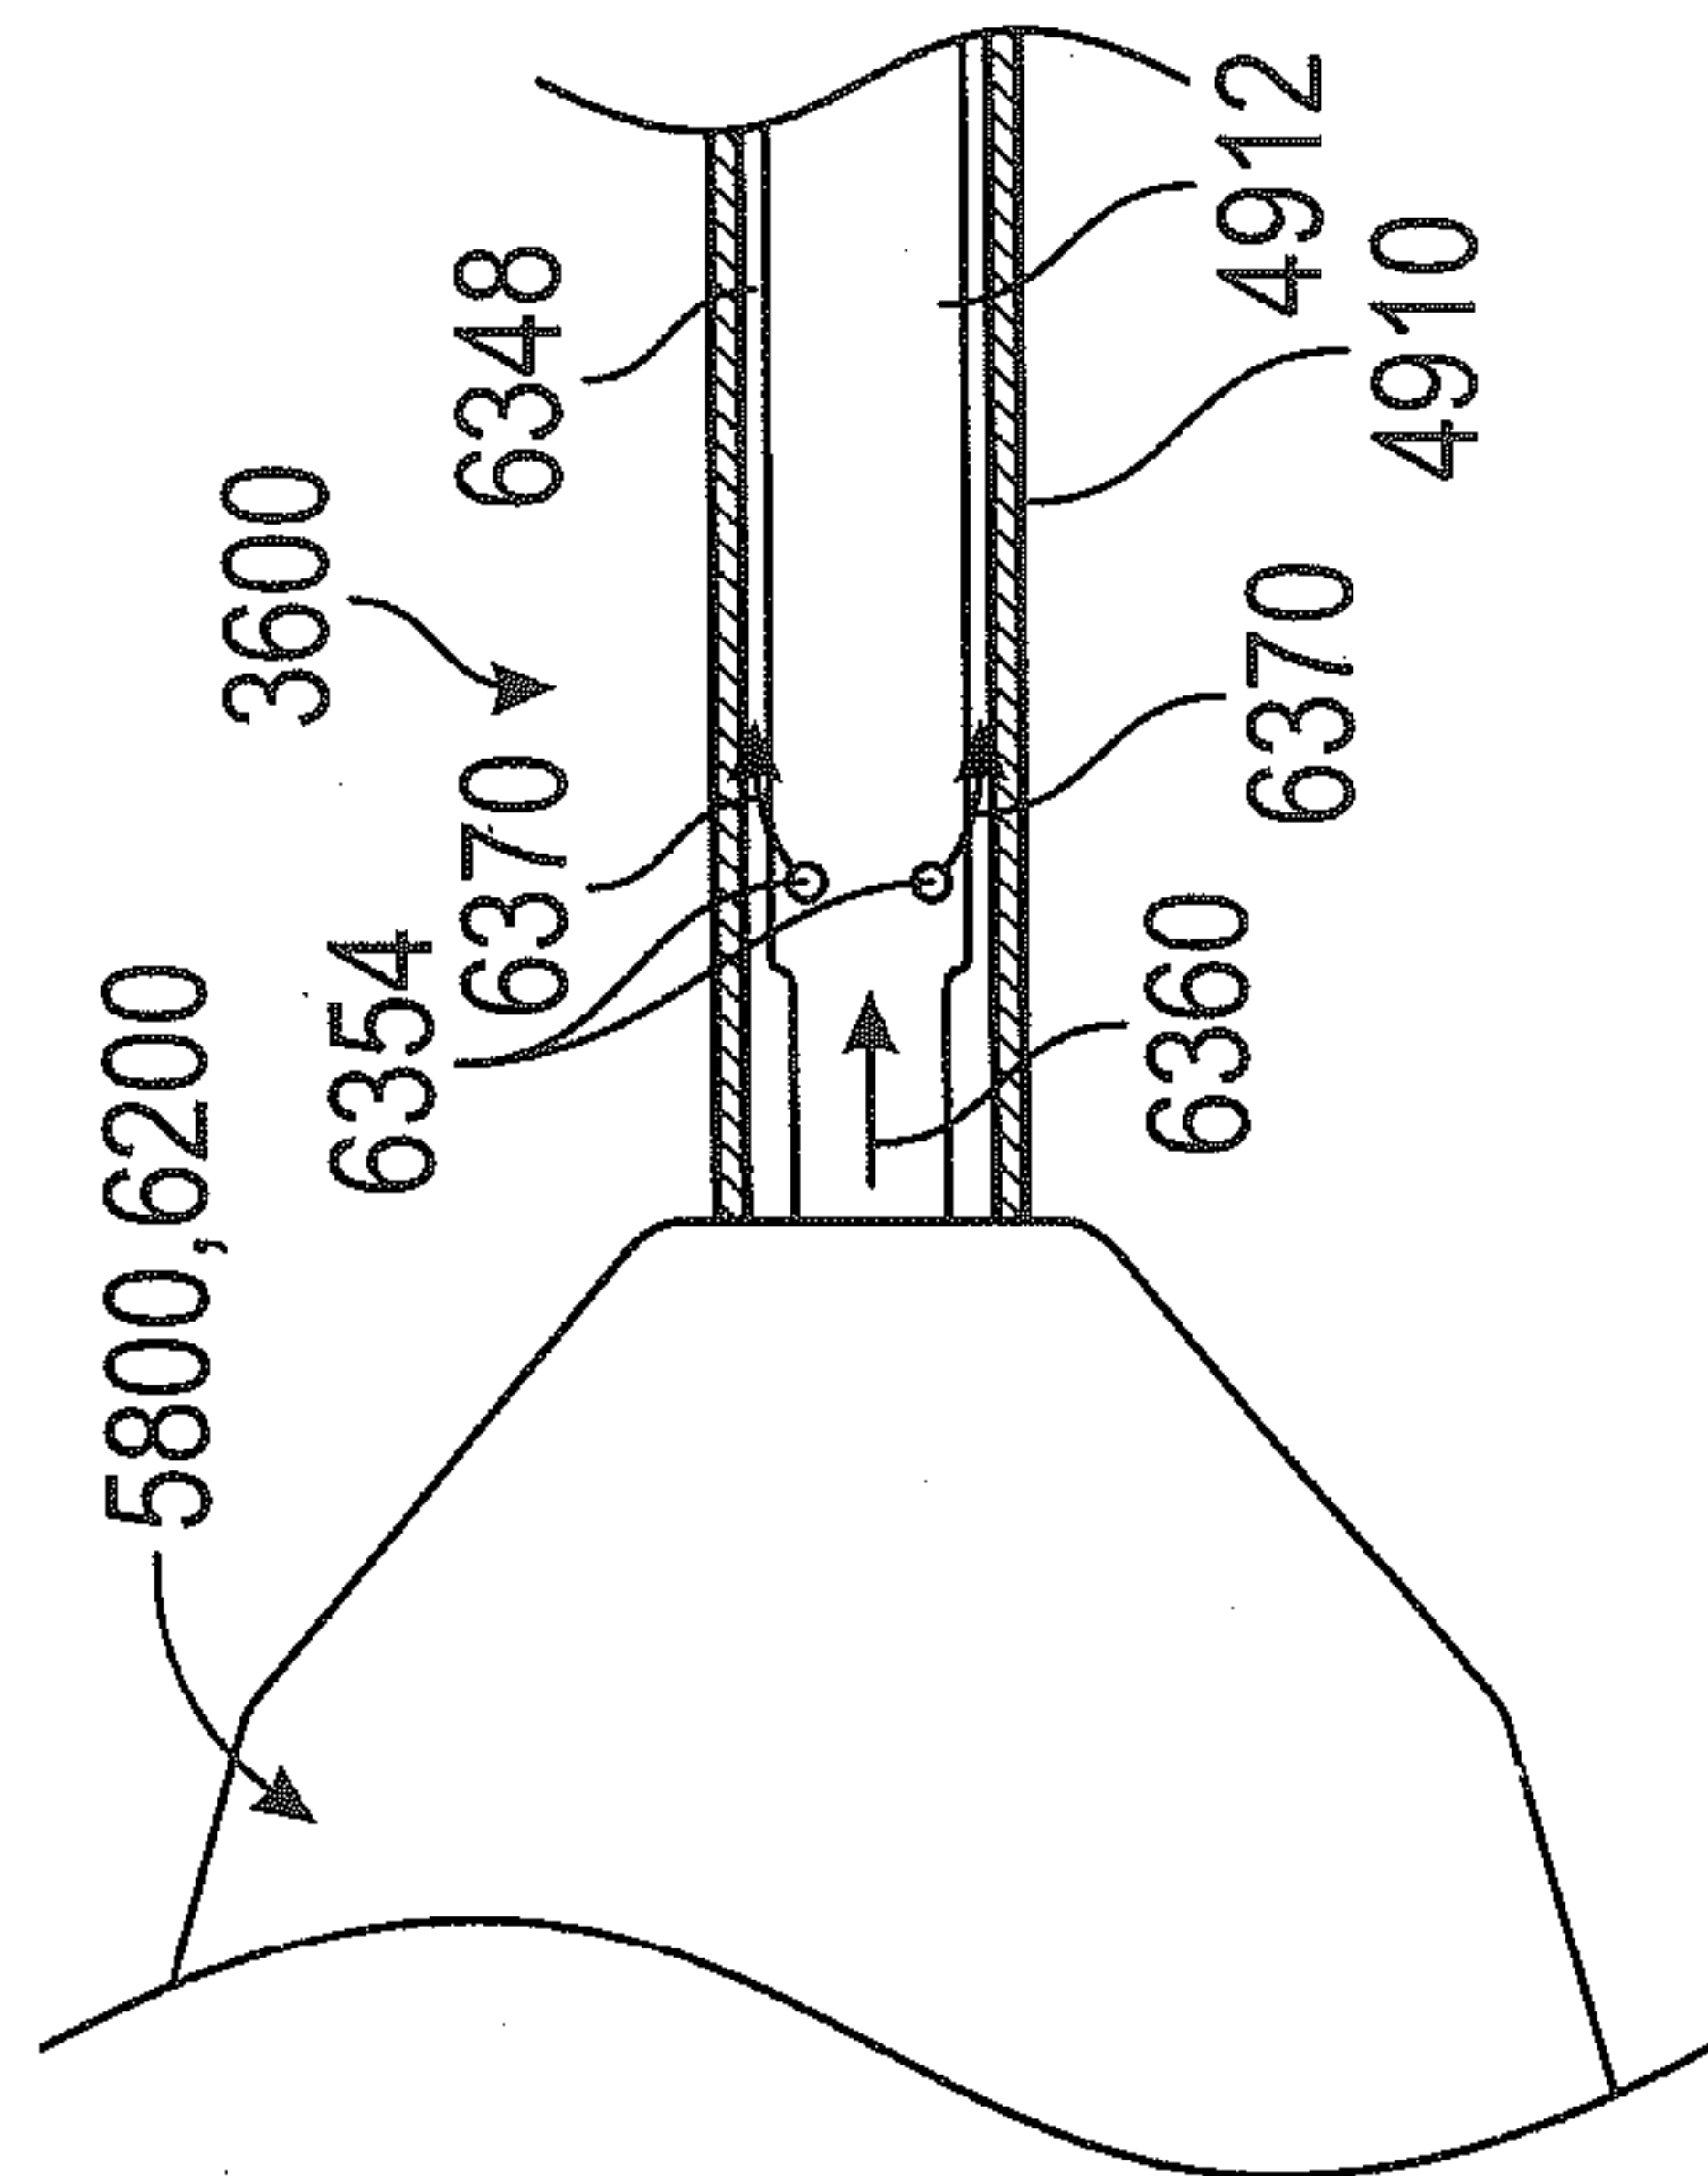


FIG. 63

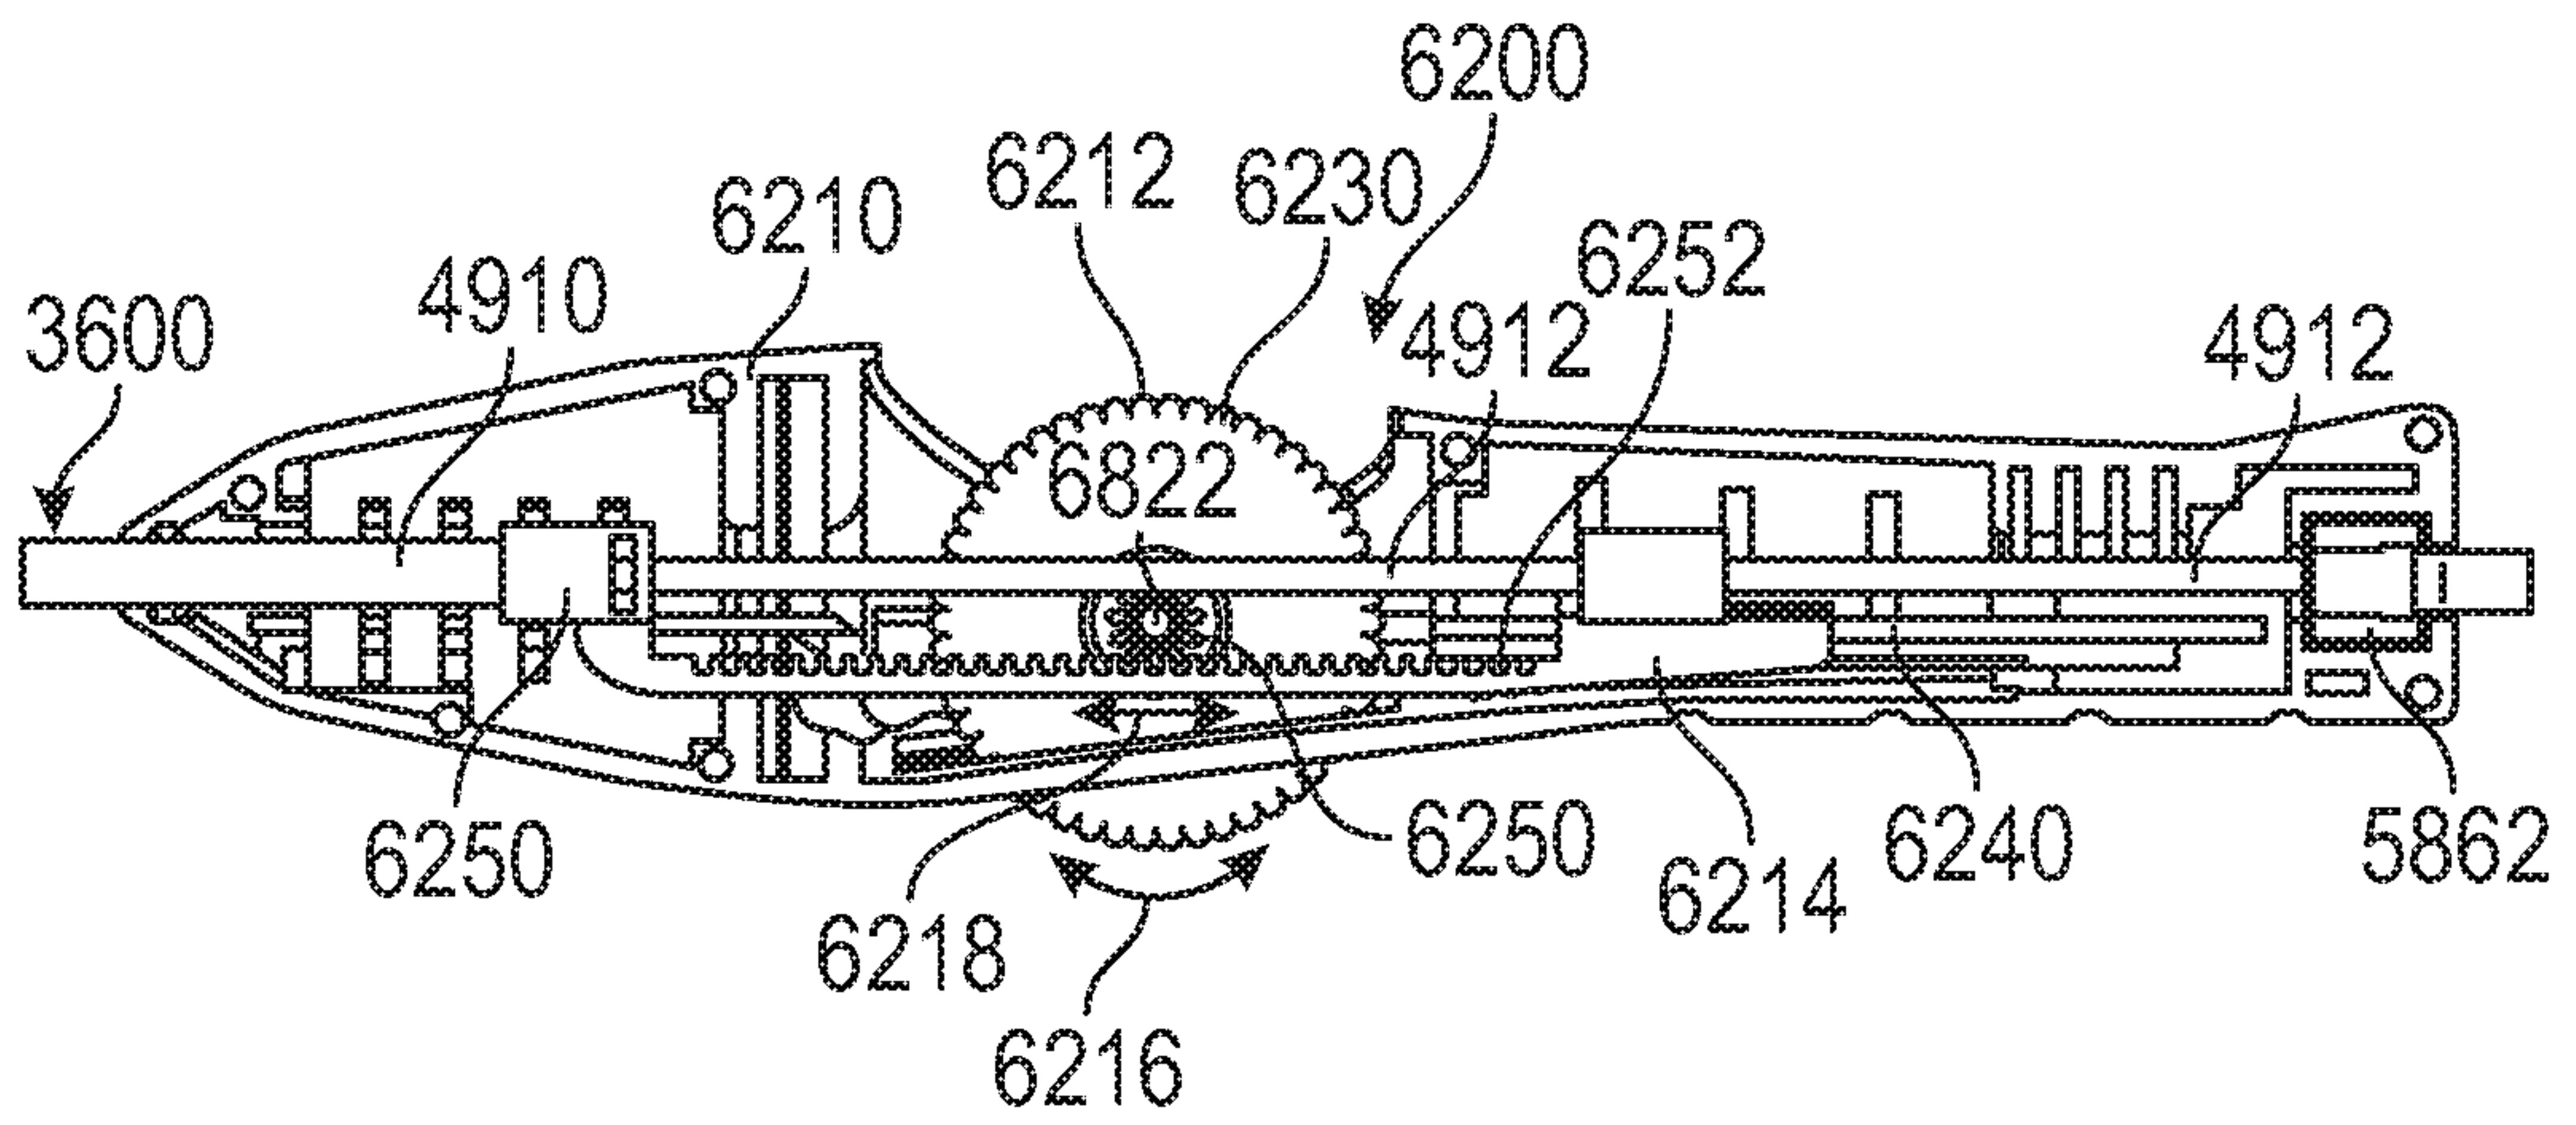


FIG. 64A

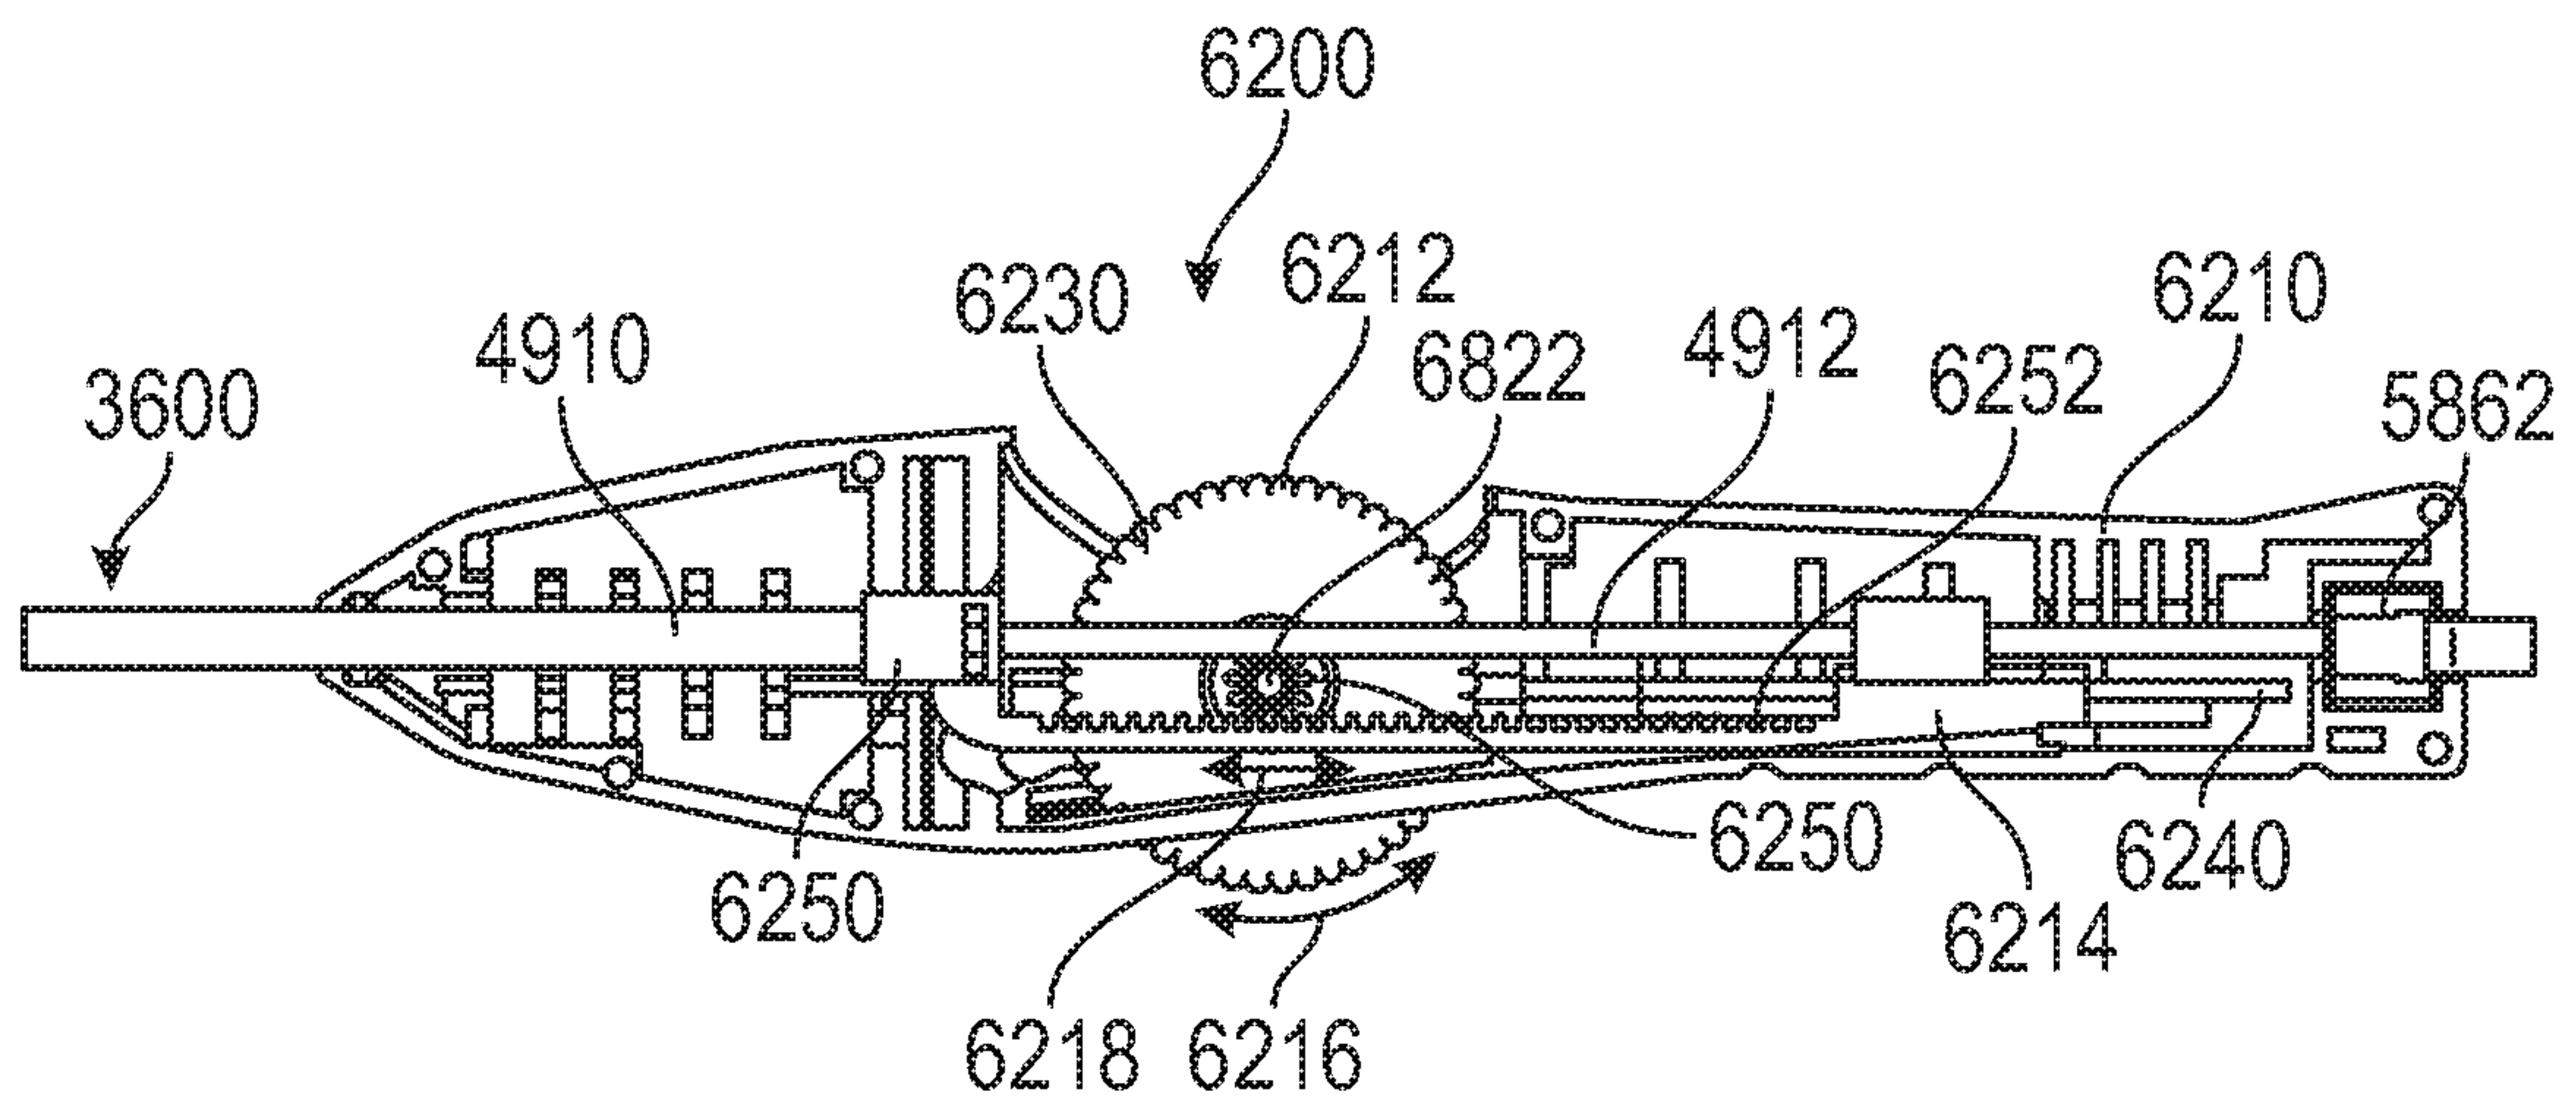


FIG. 64B

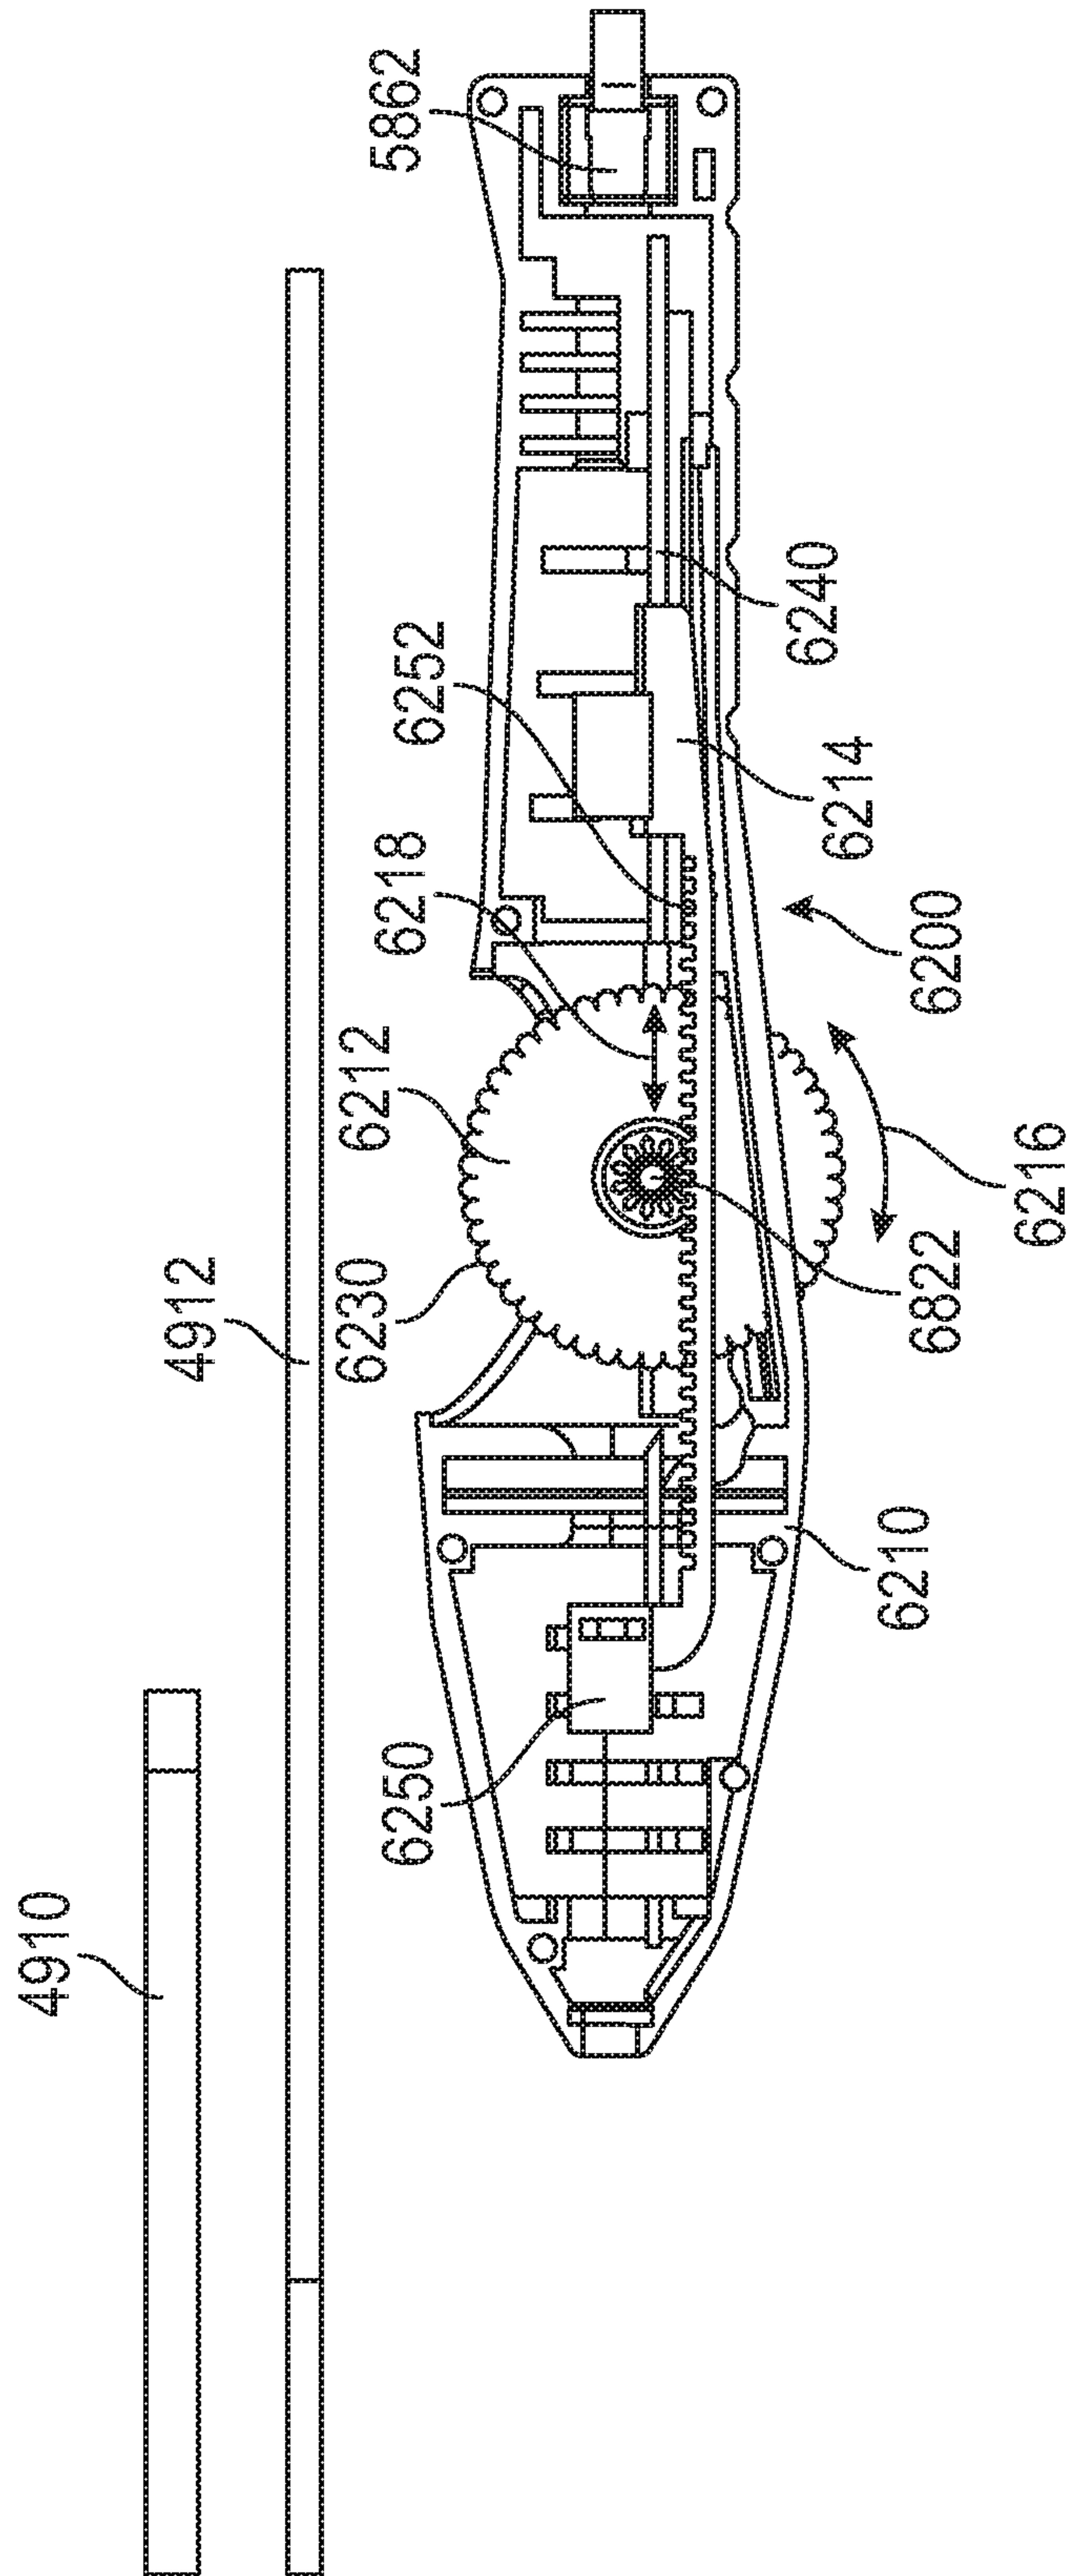


FIG. 65

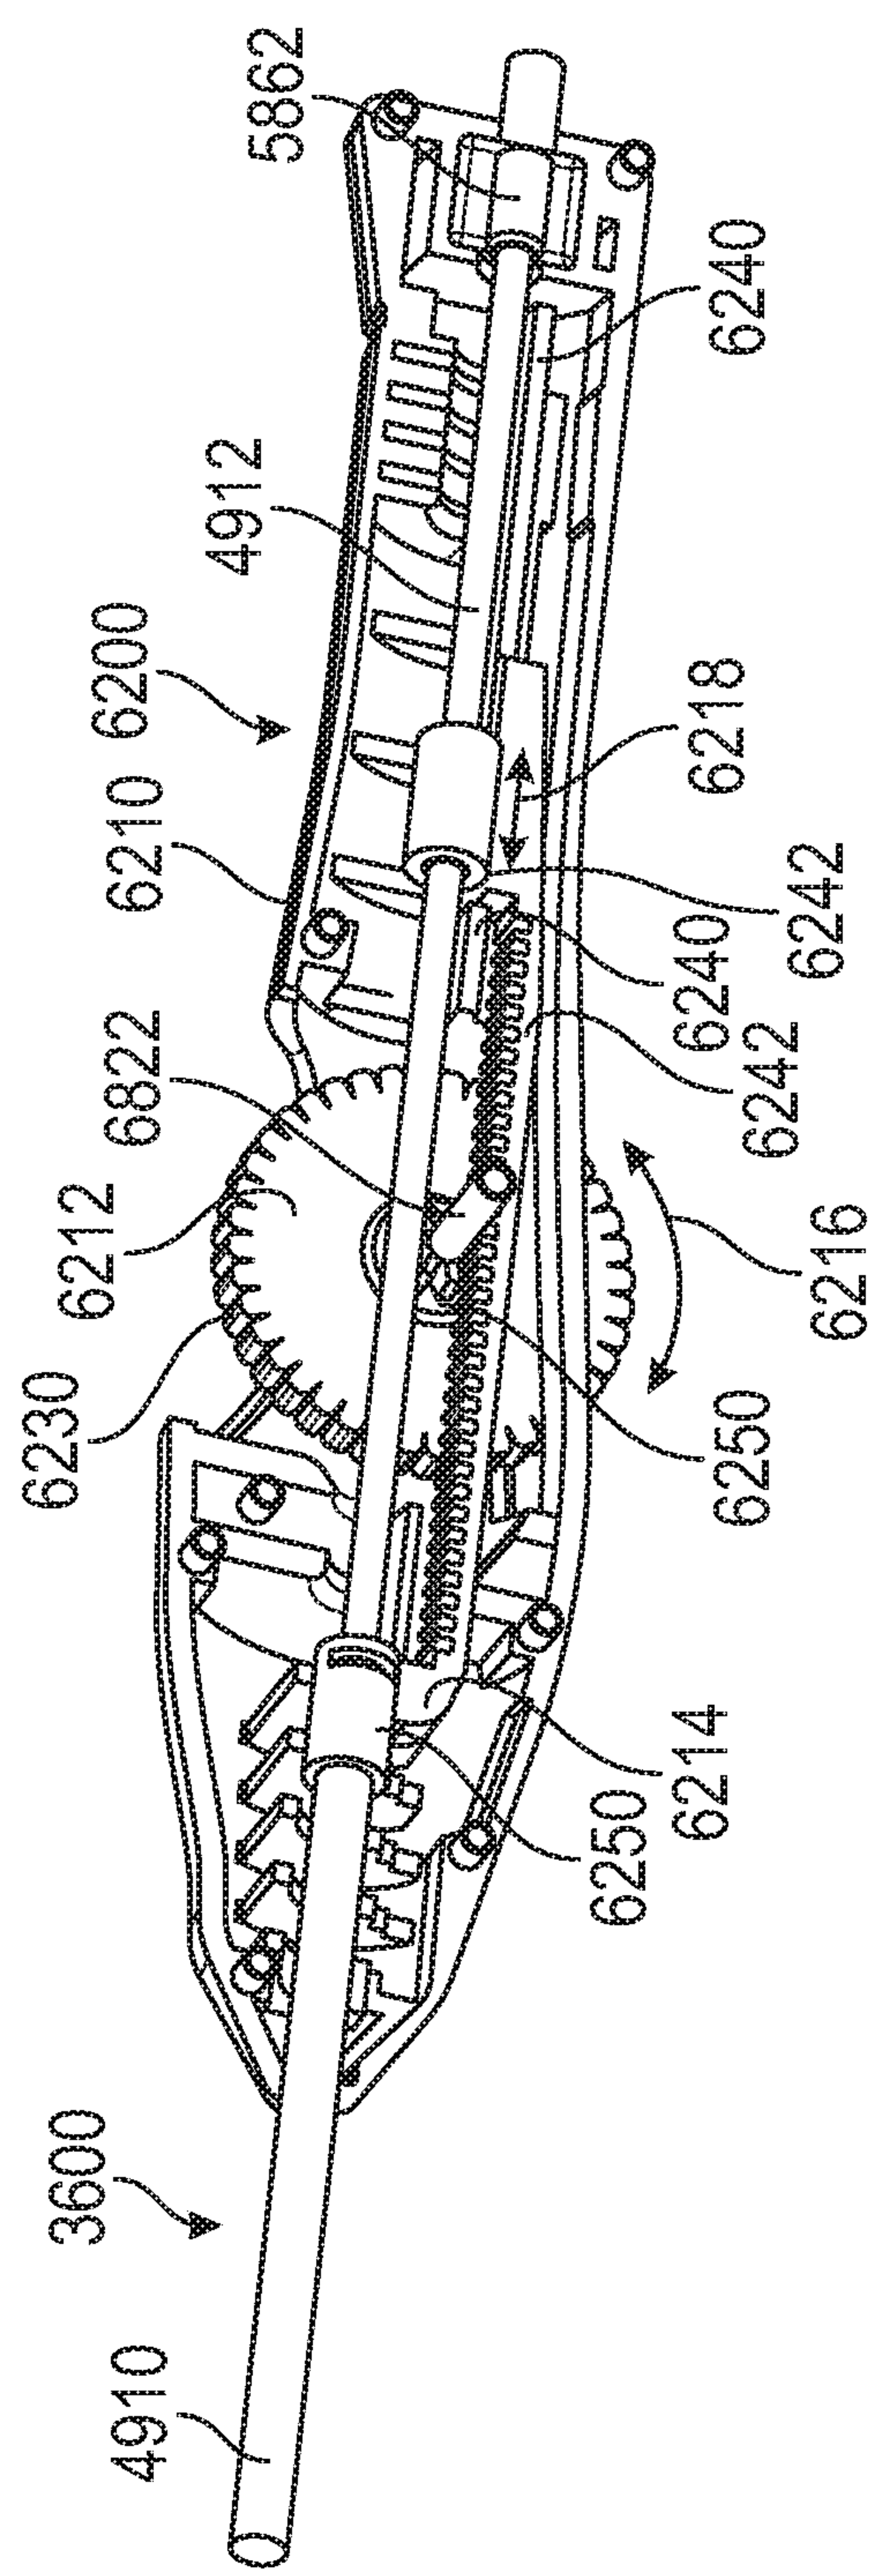


FIG. 66

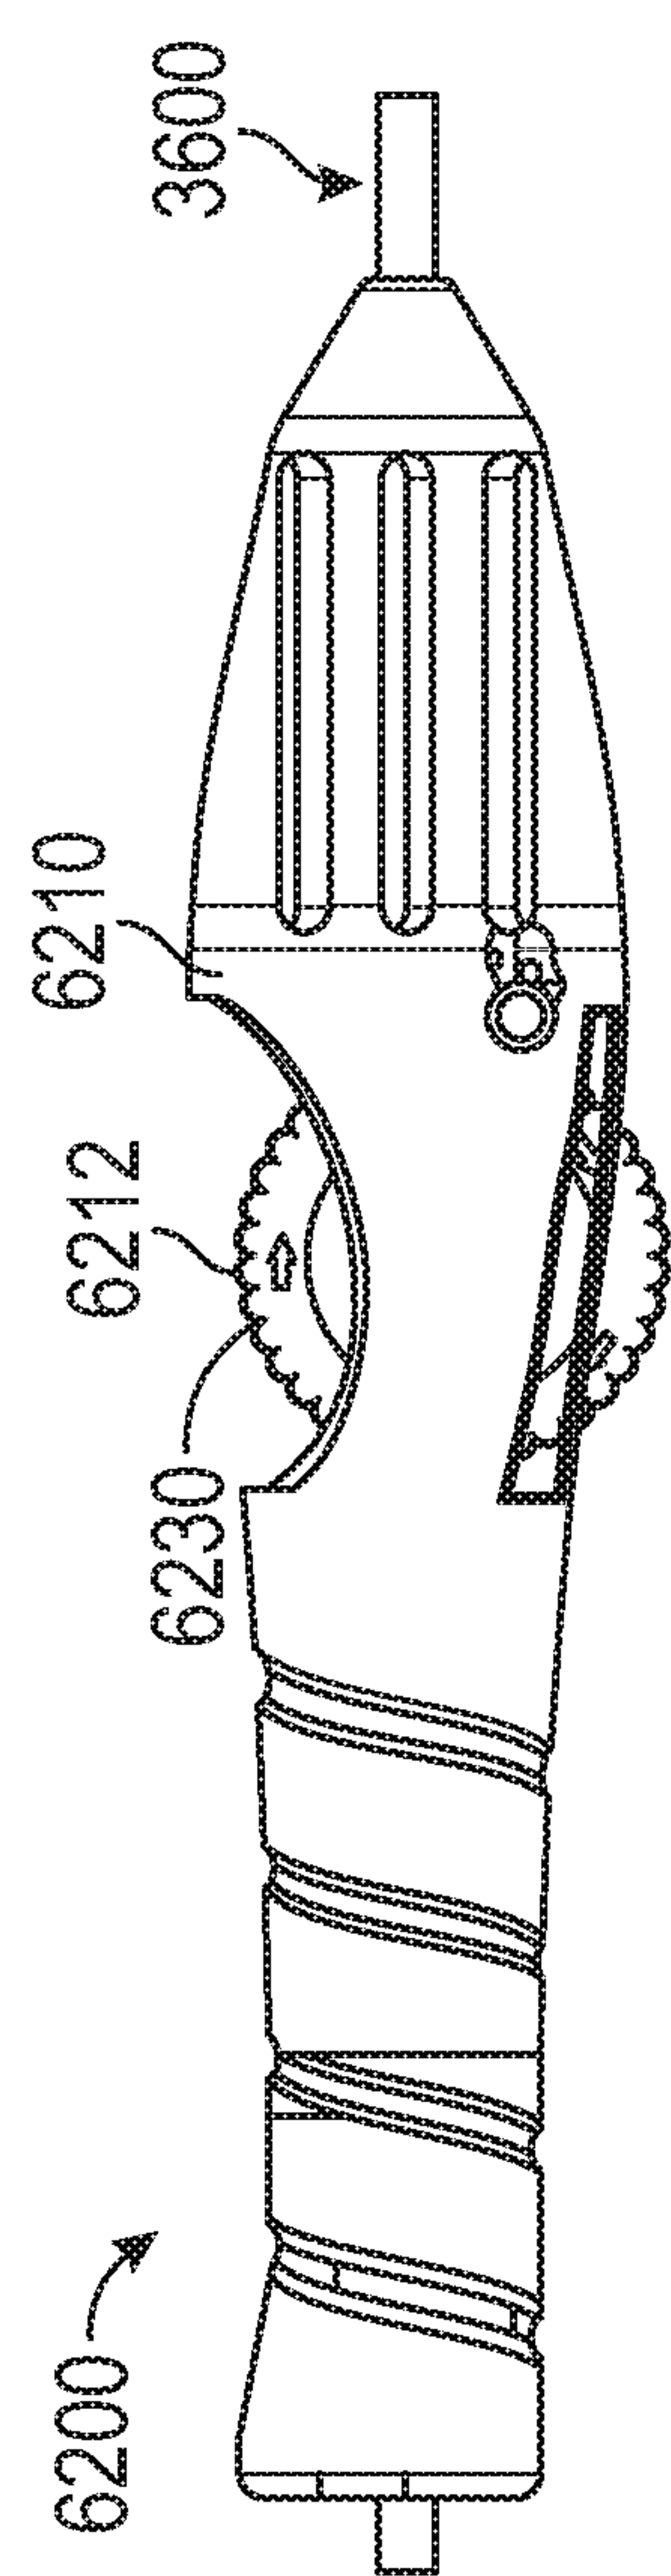


FIG. 67

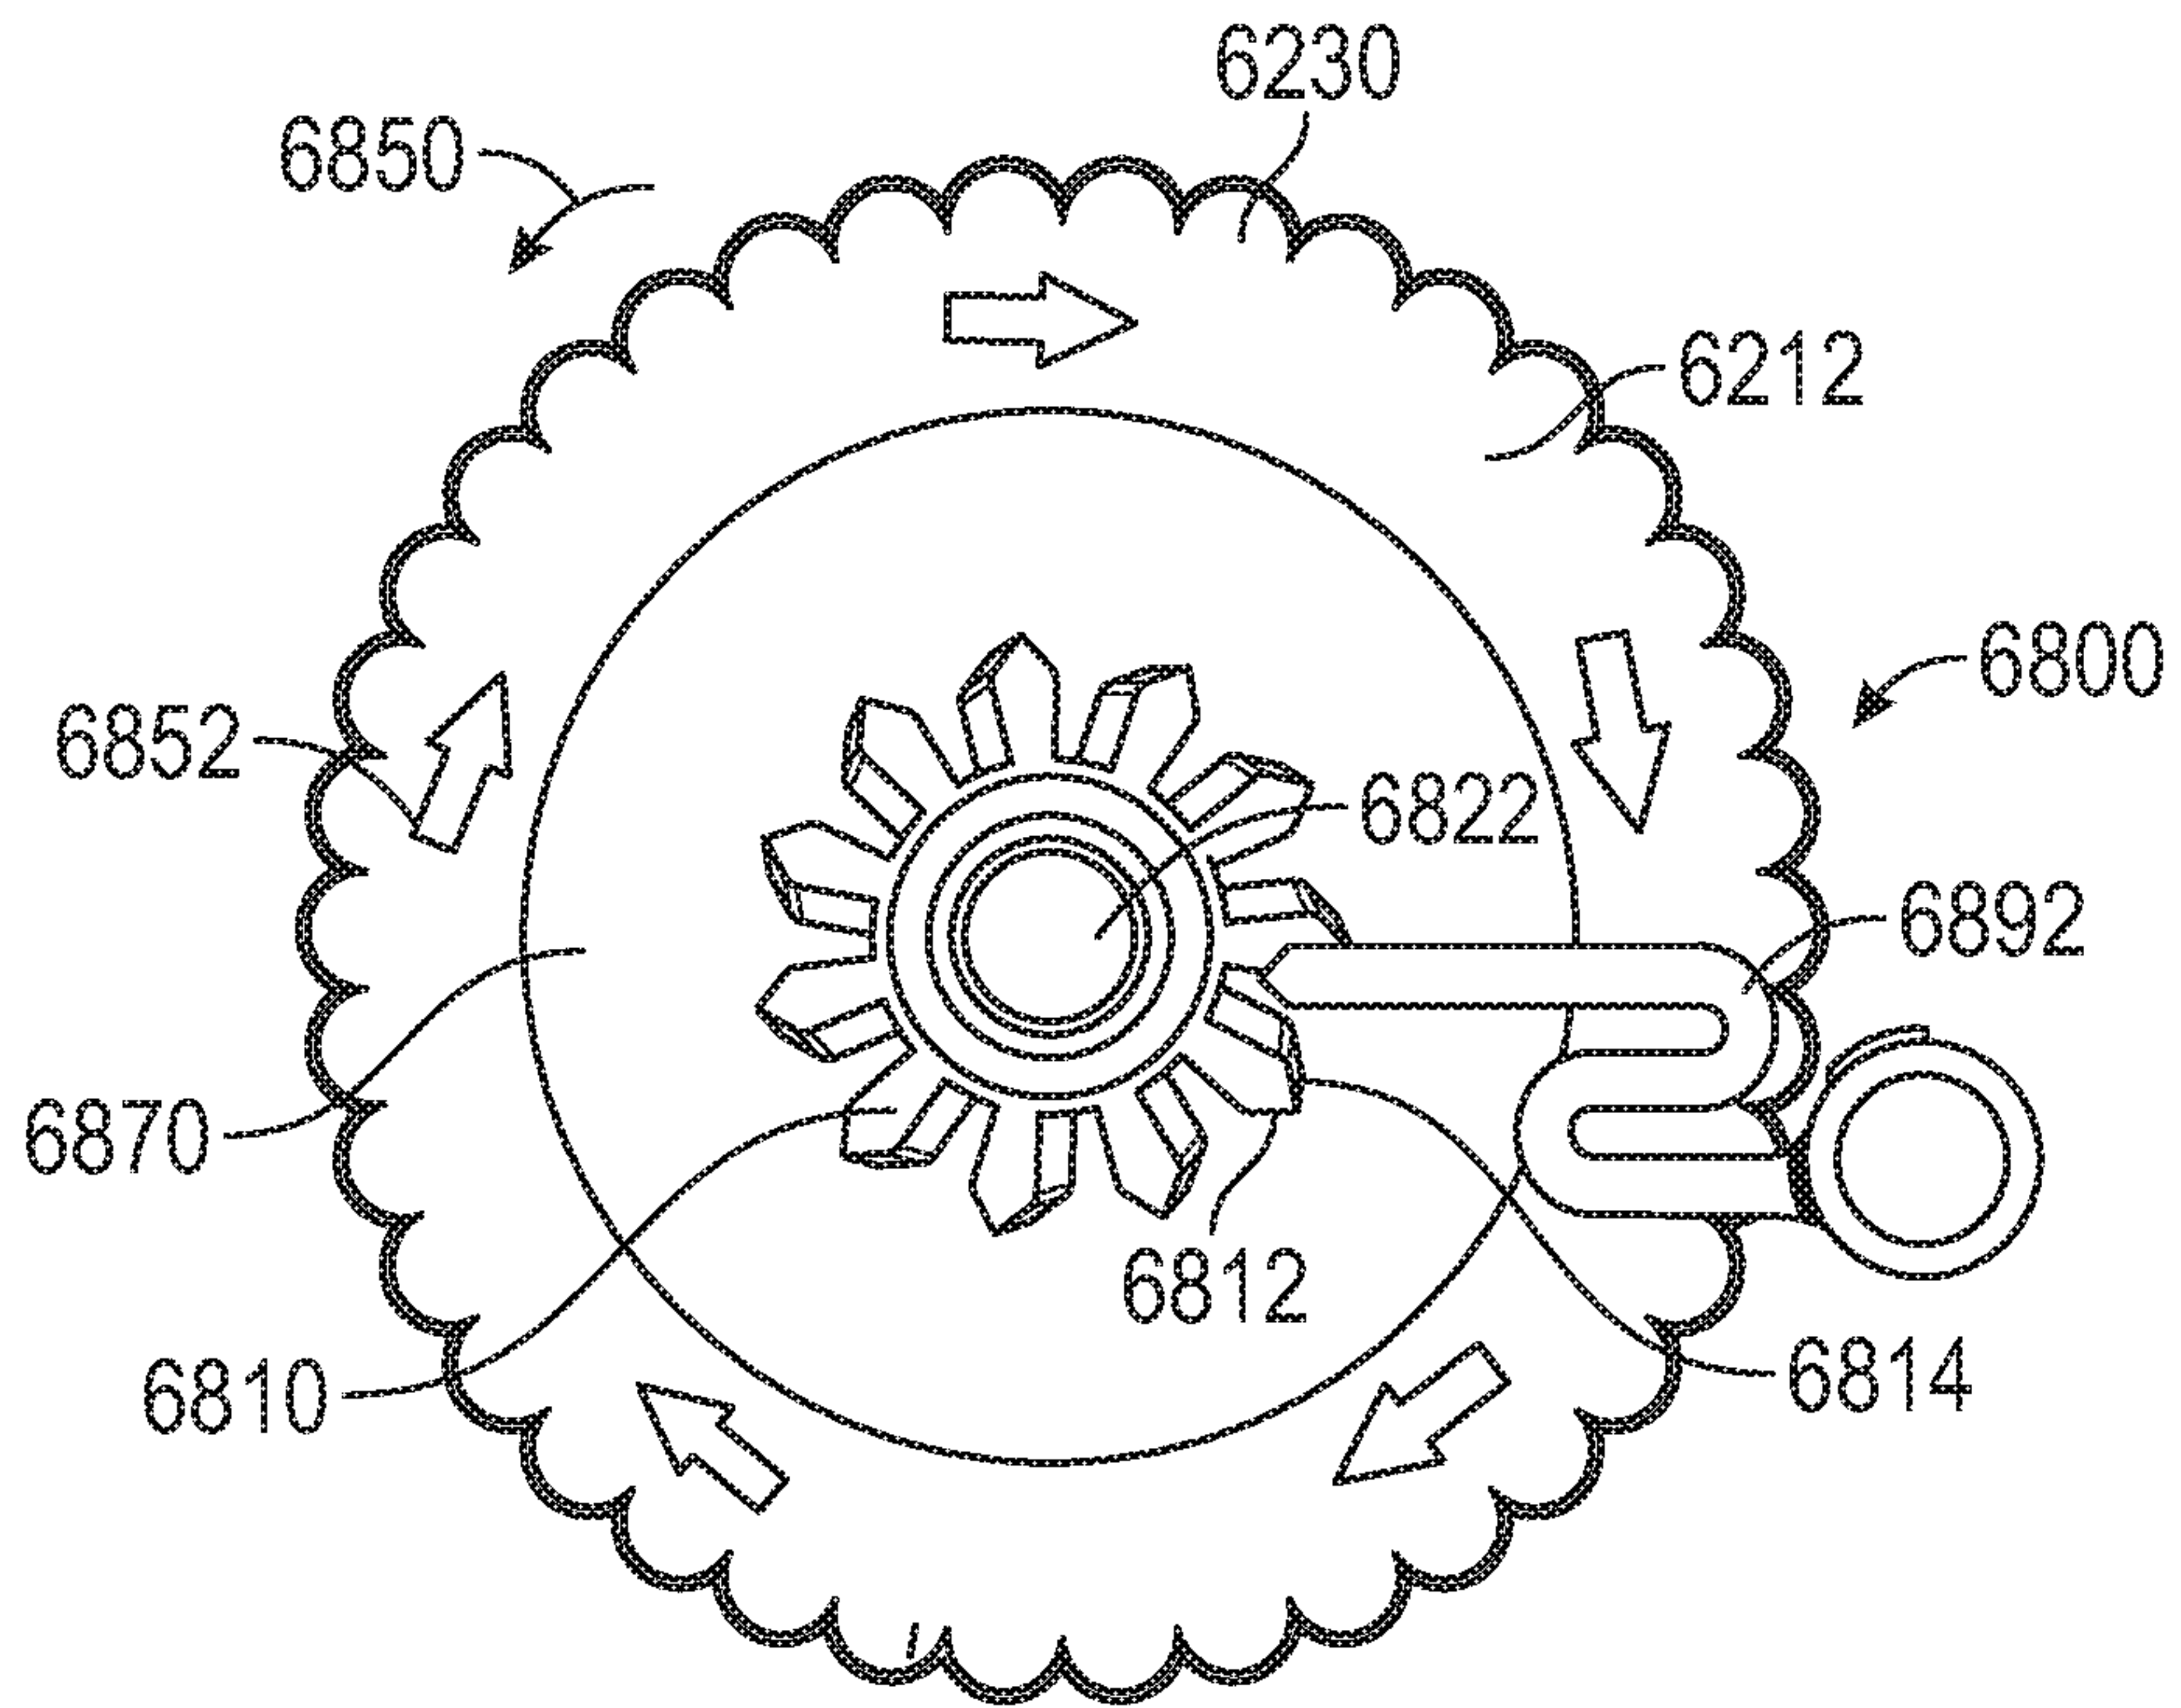


FIG. 68

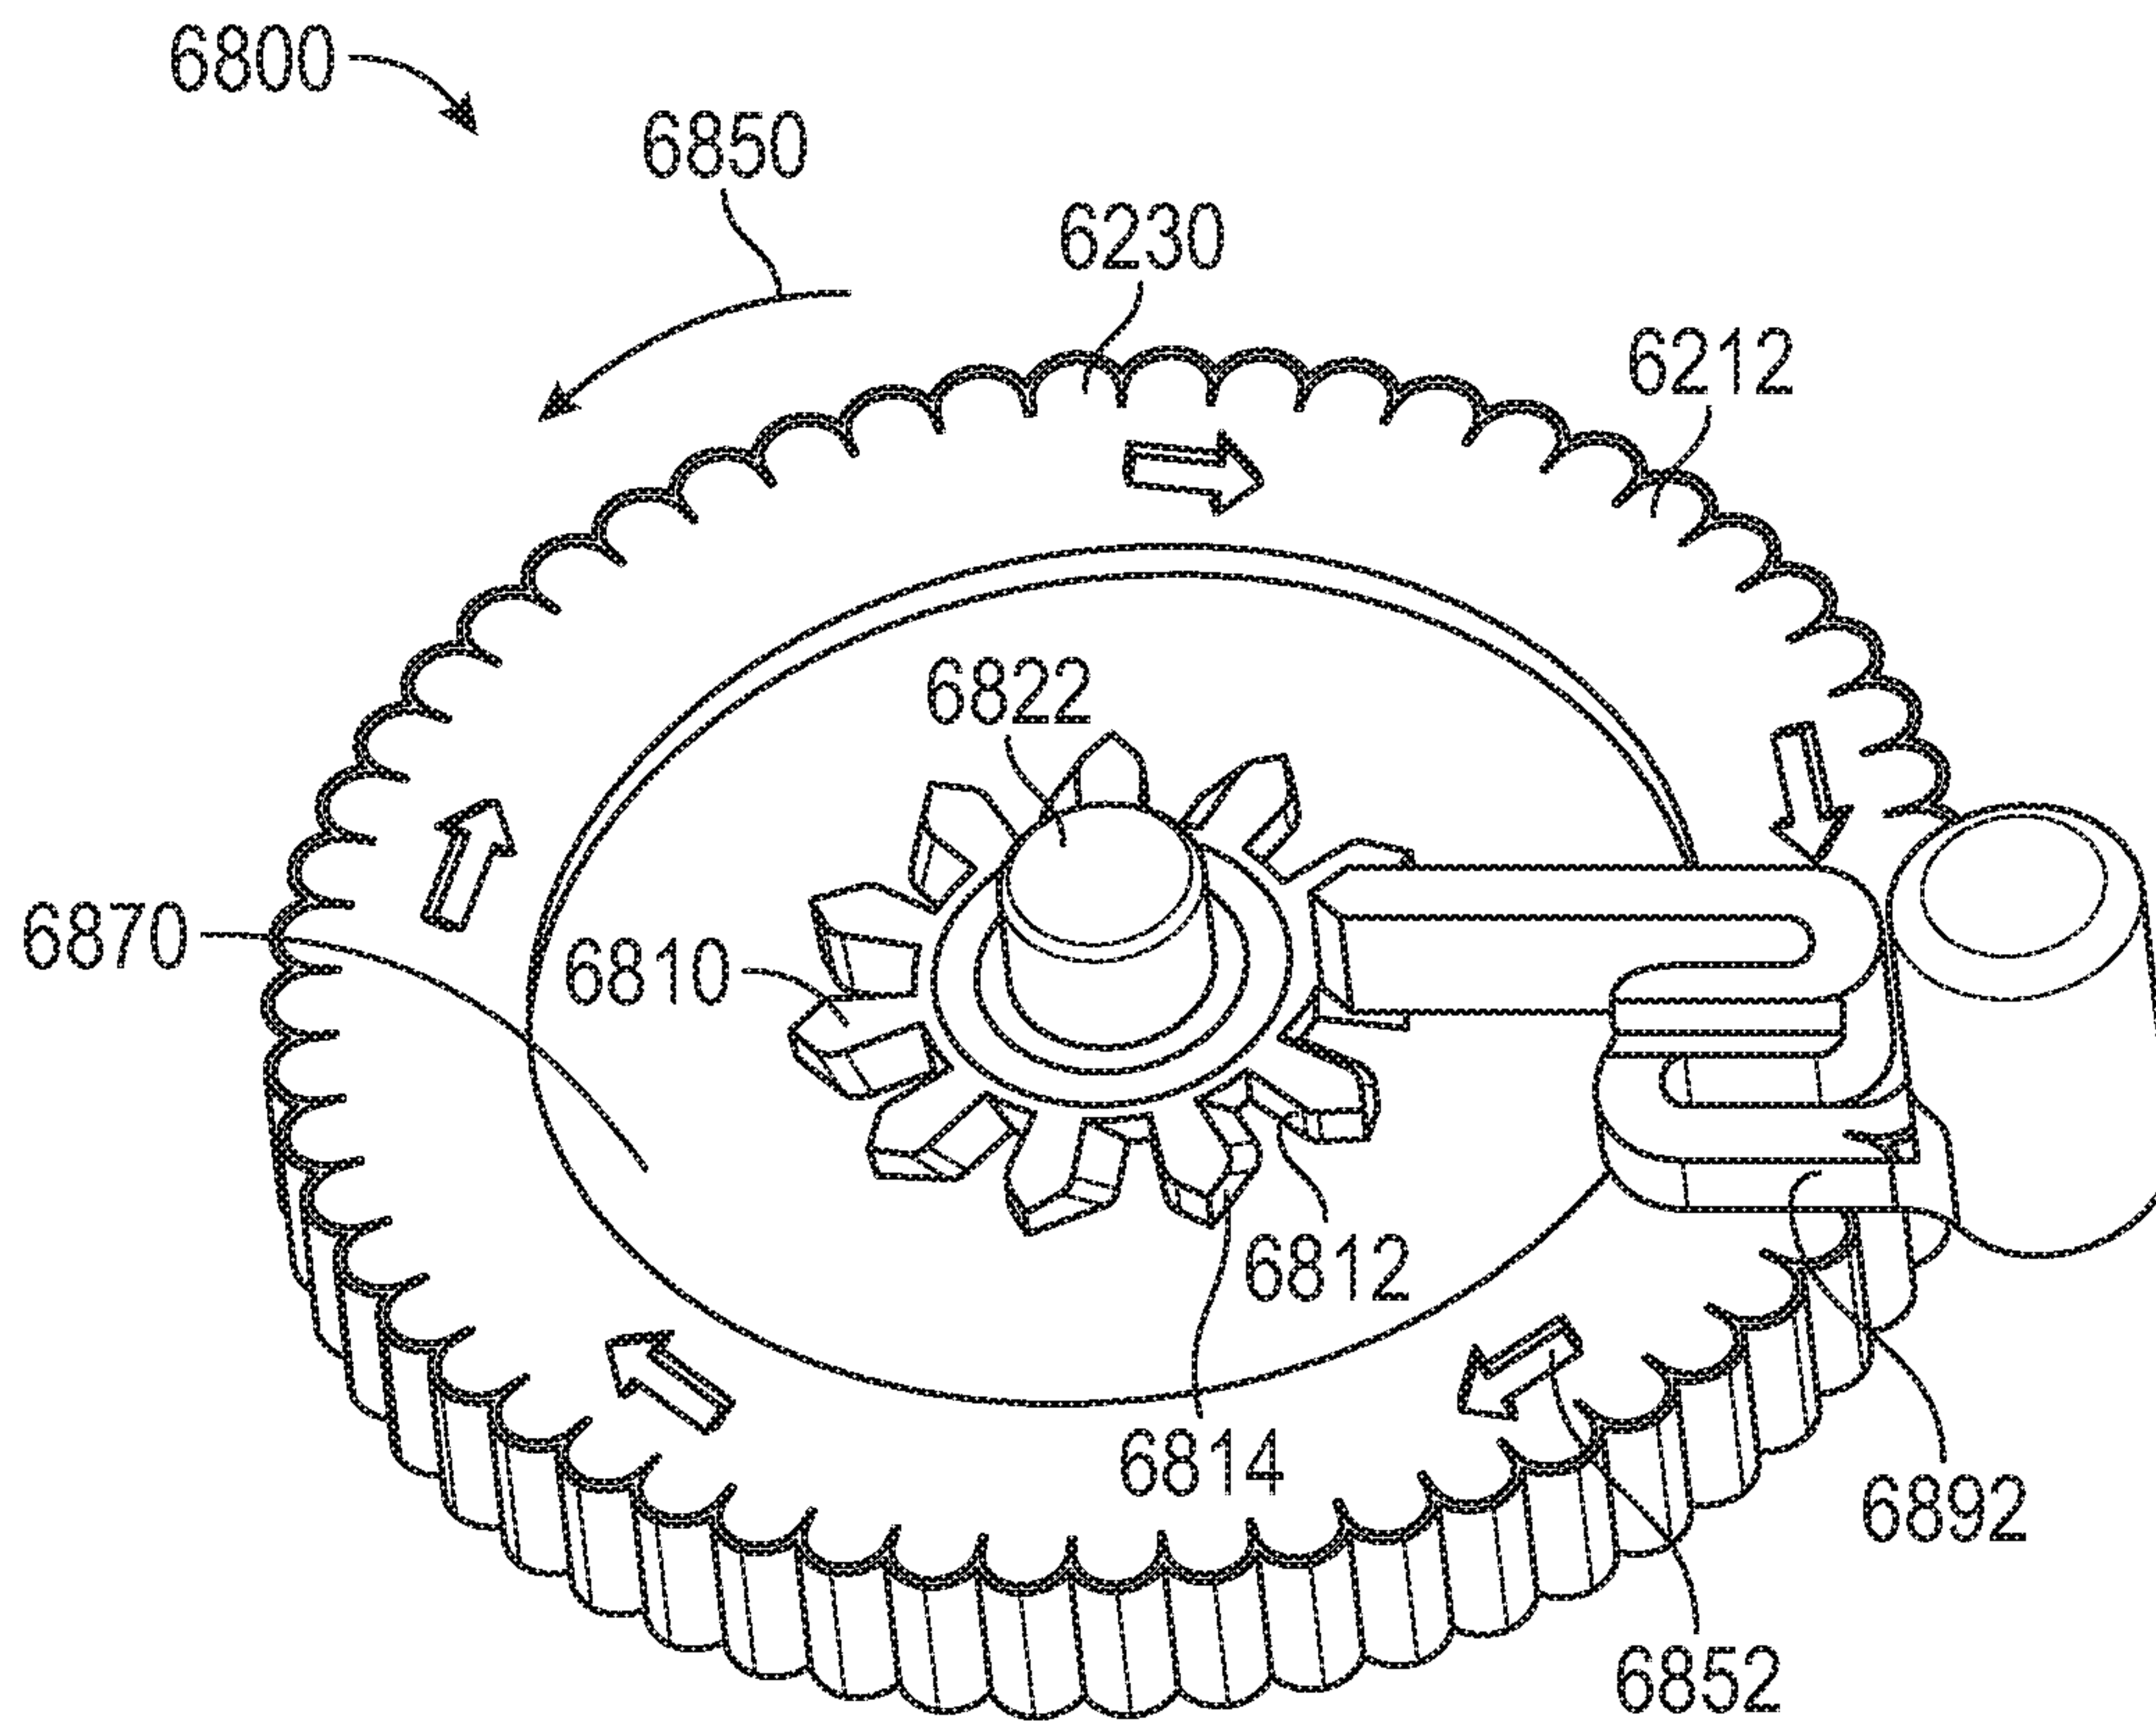


FIG. 69

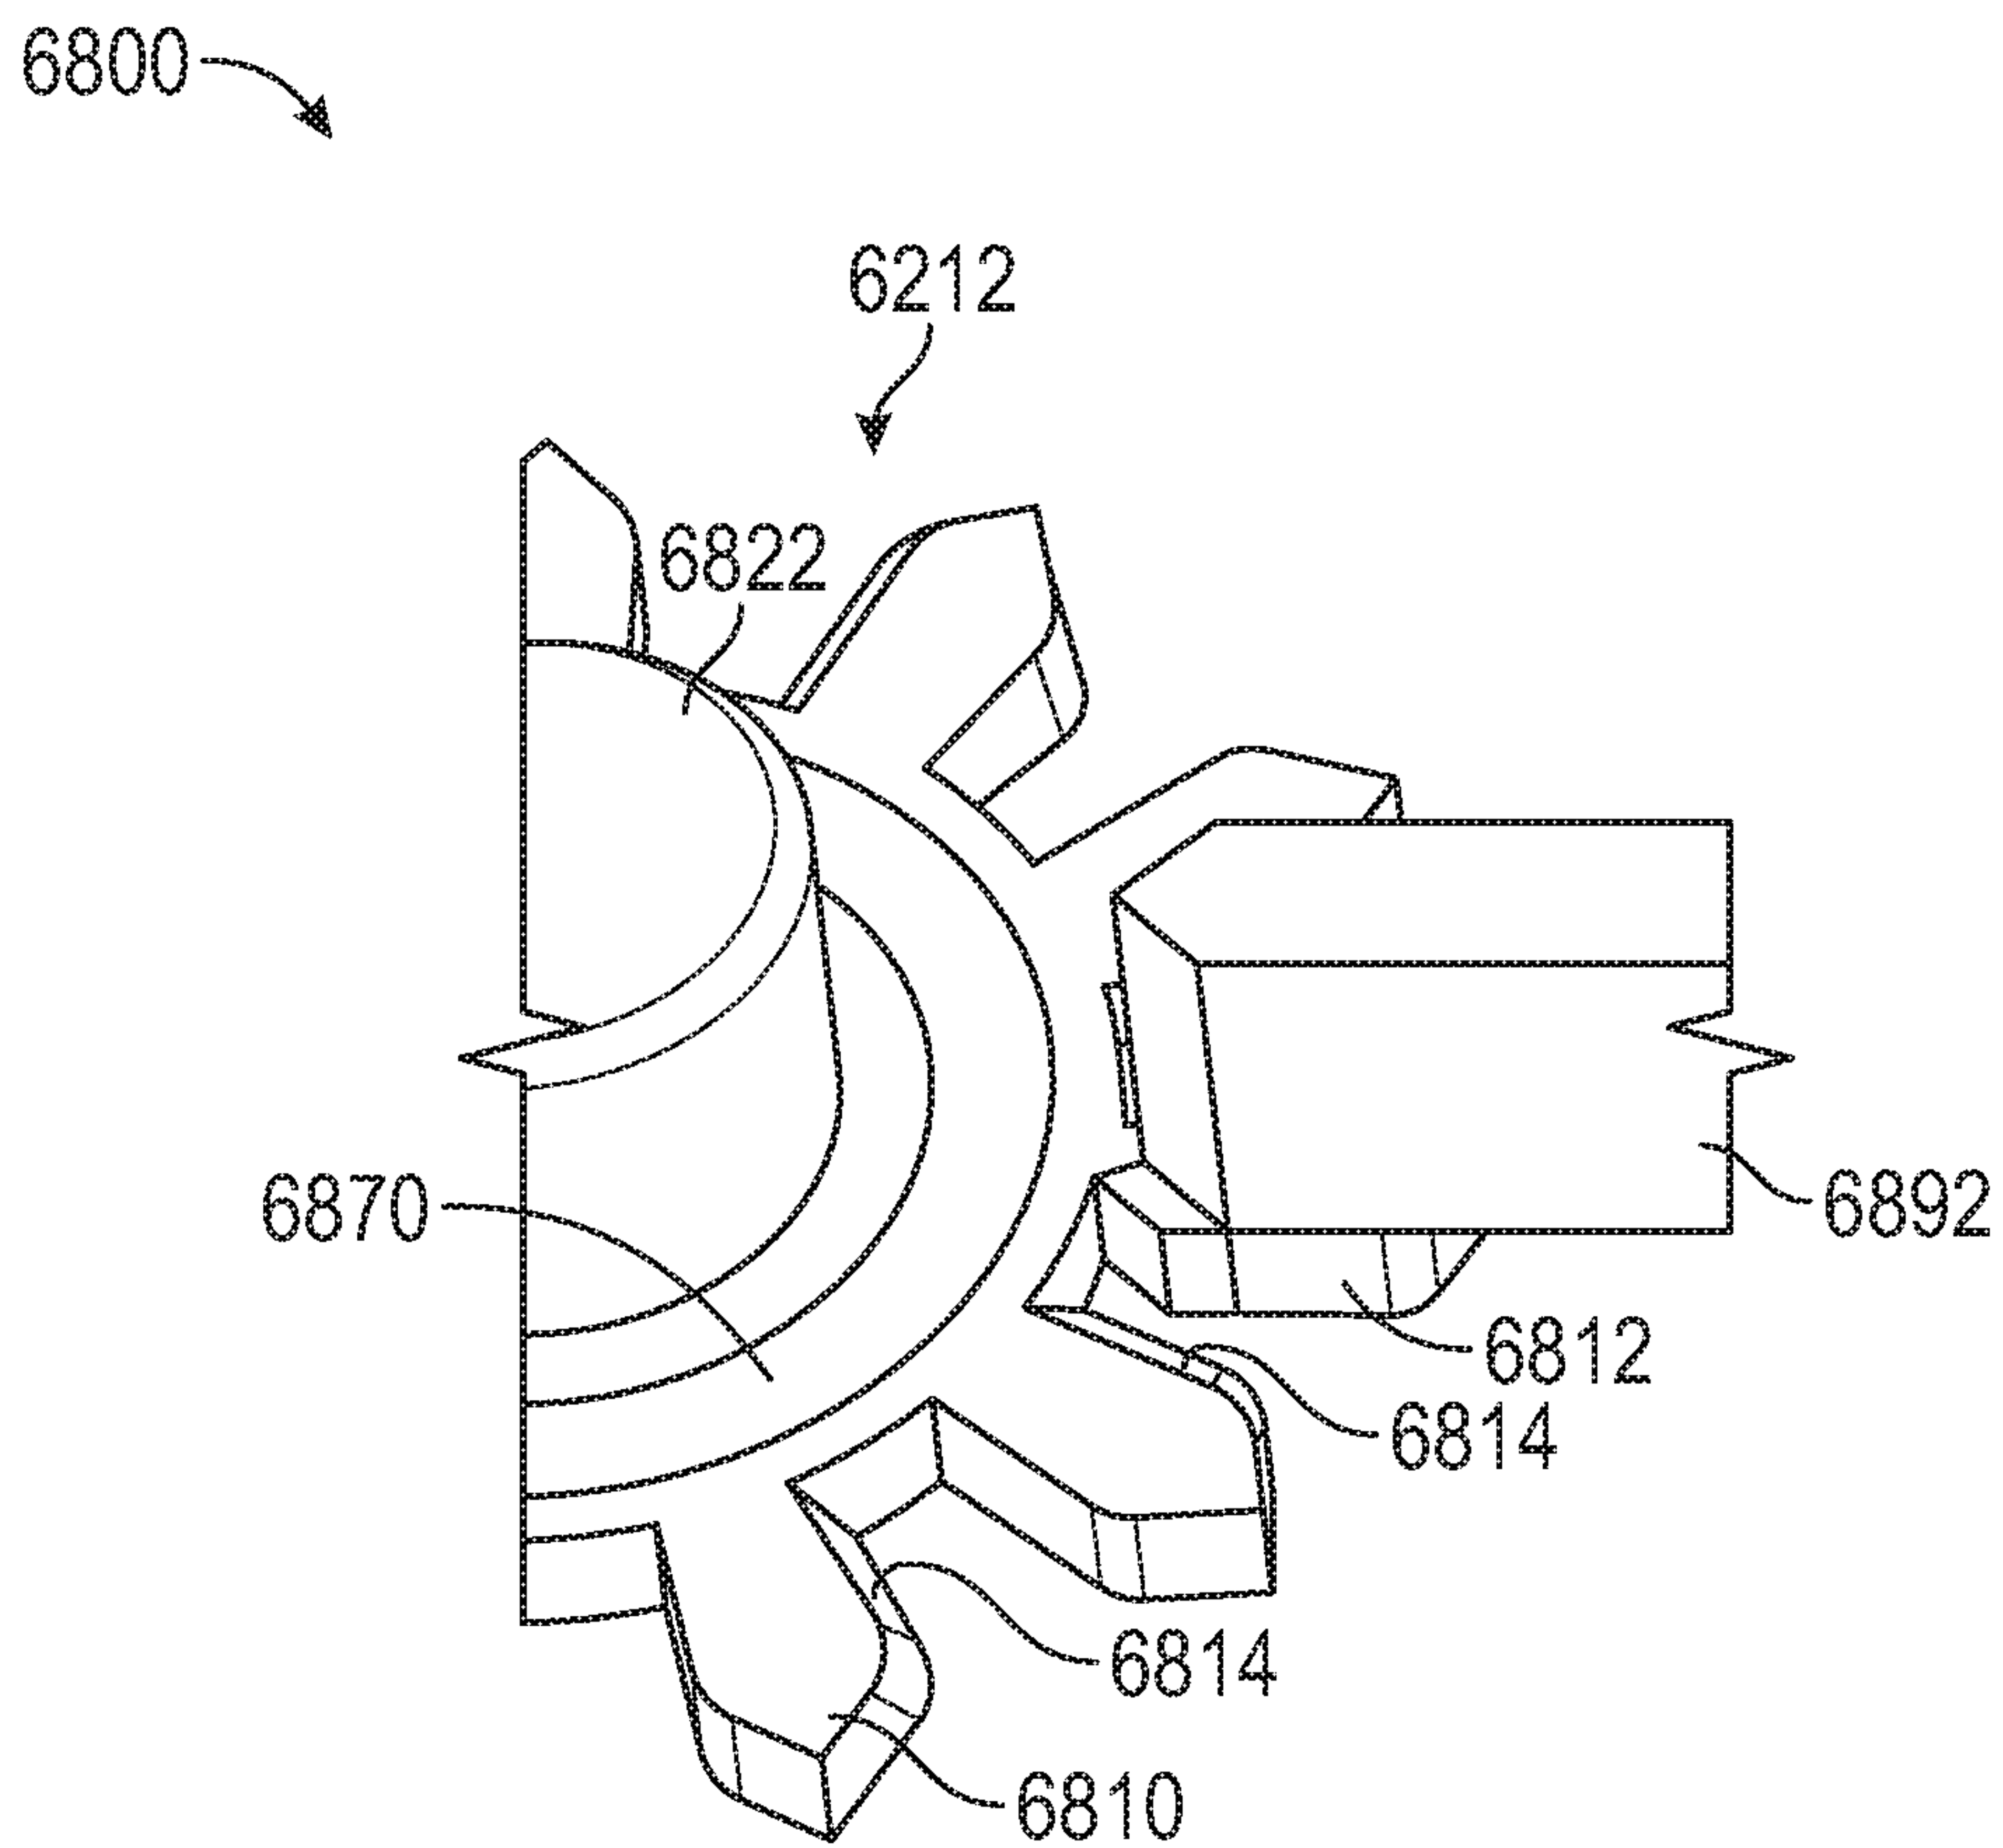


FIG. 70

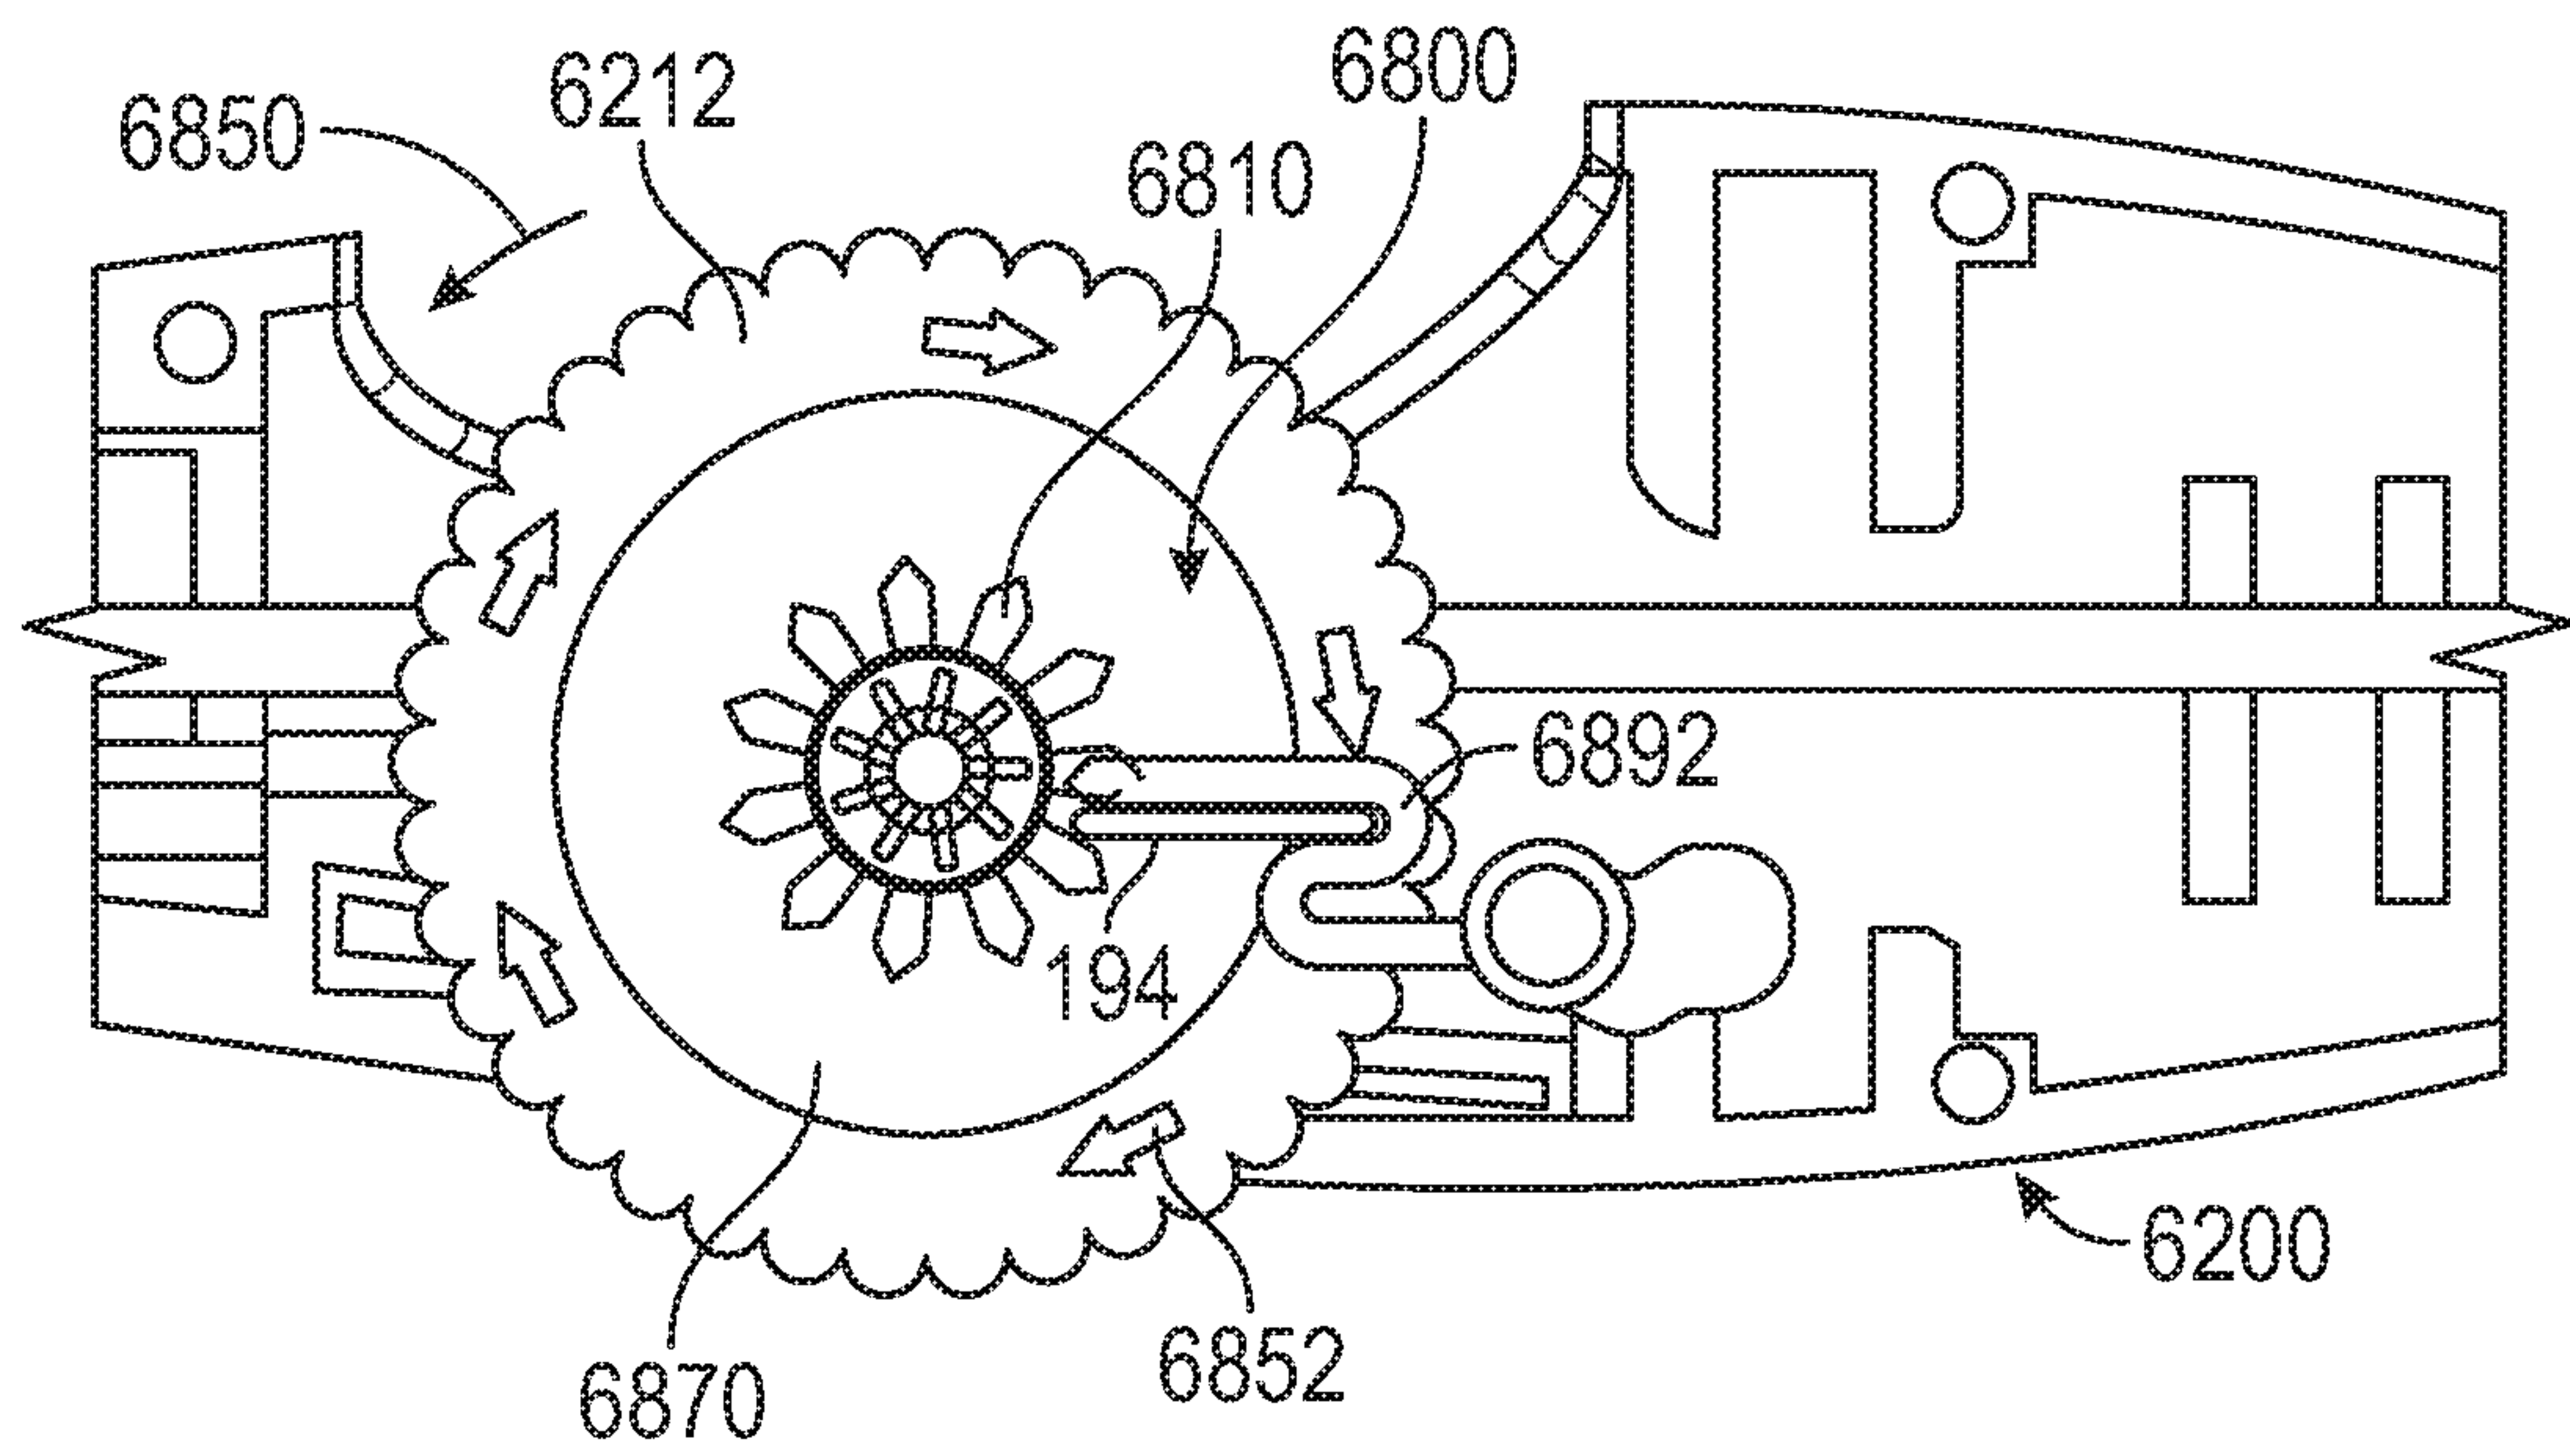


FIG. 71

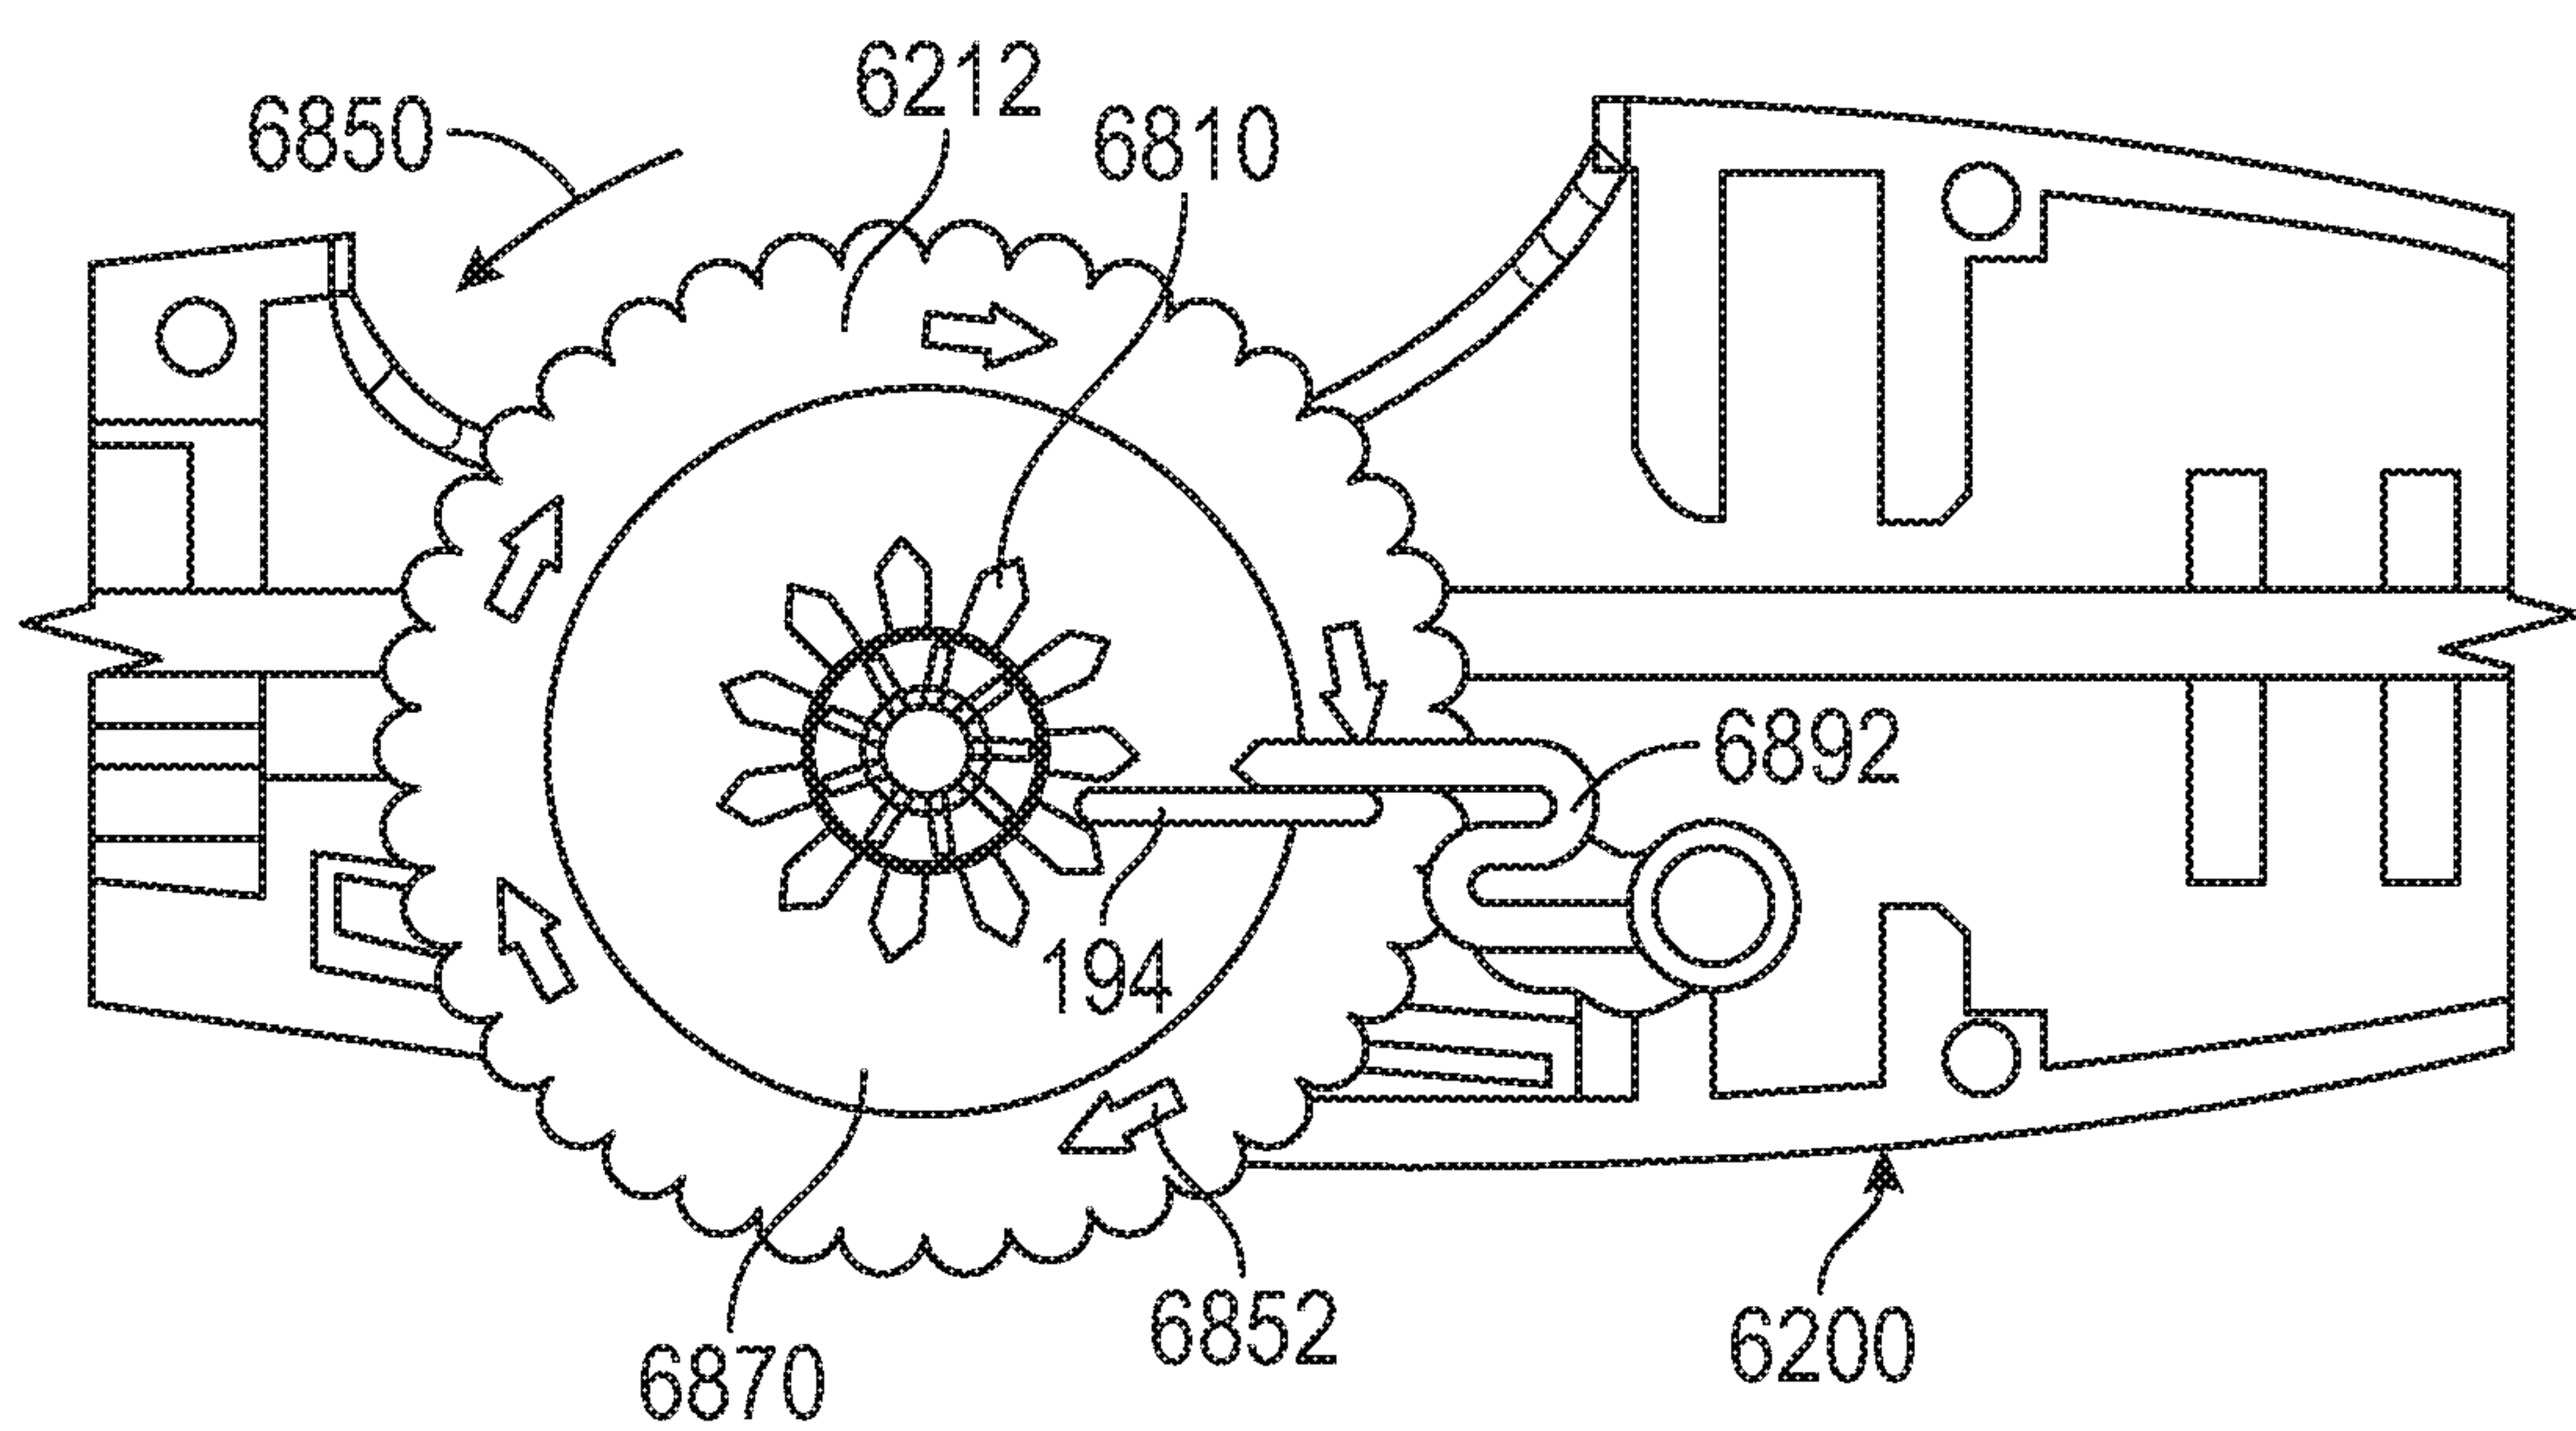


FIG. 72

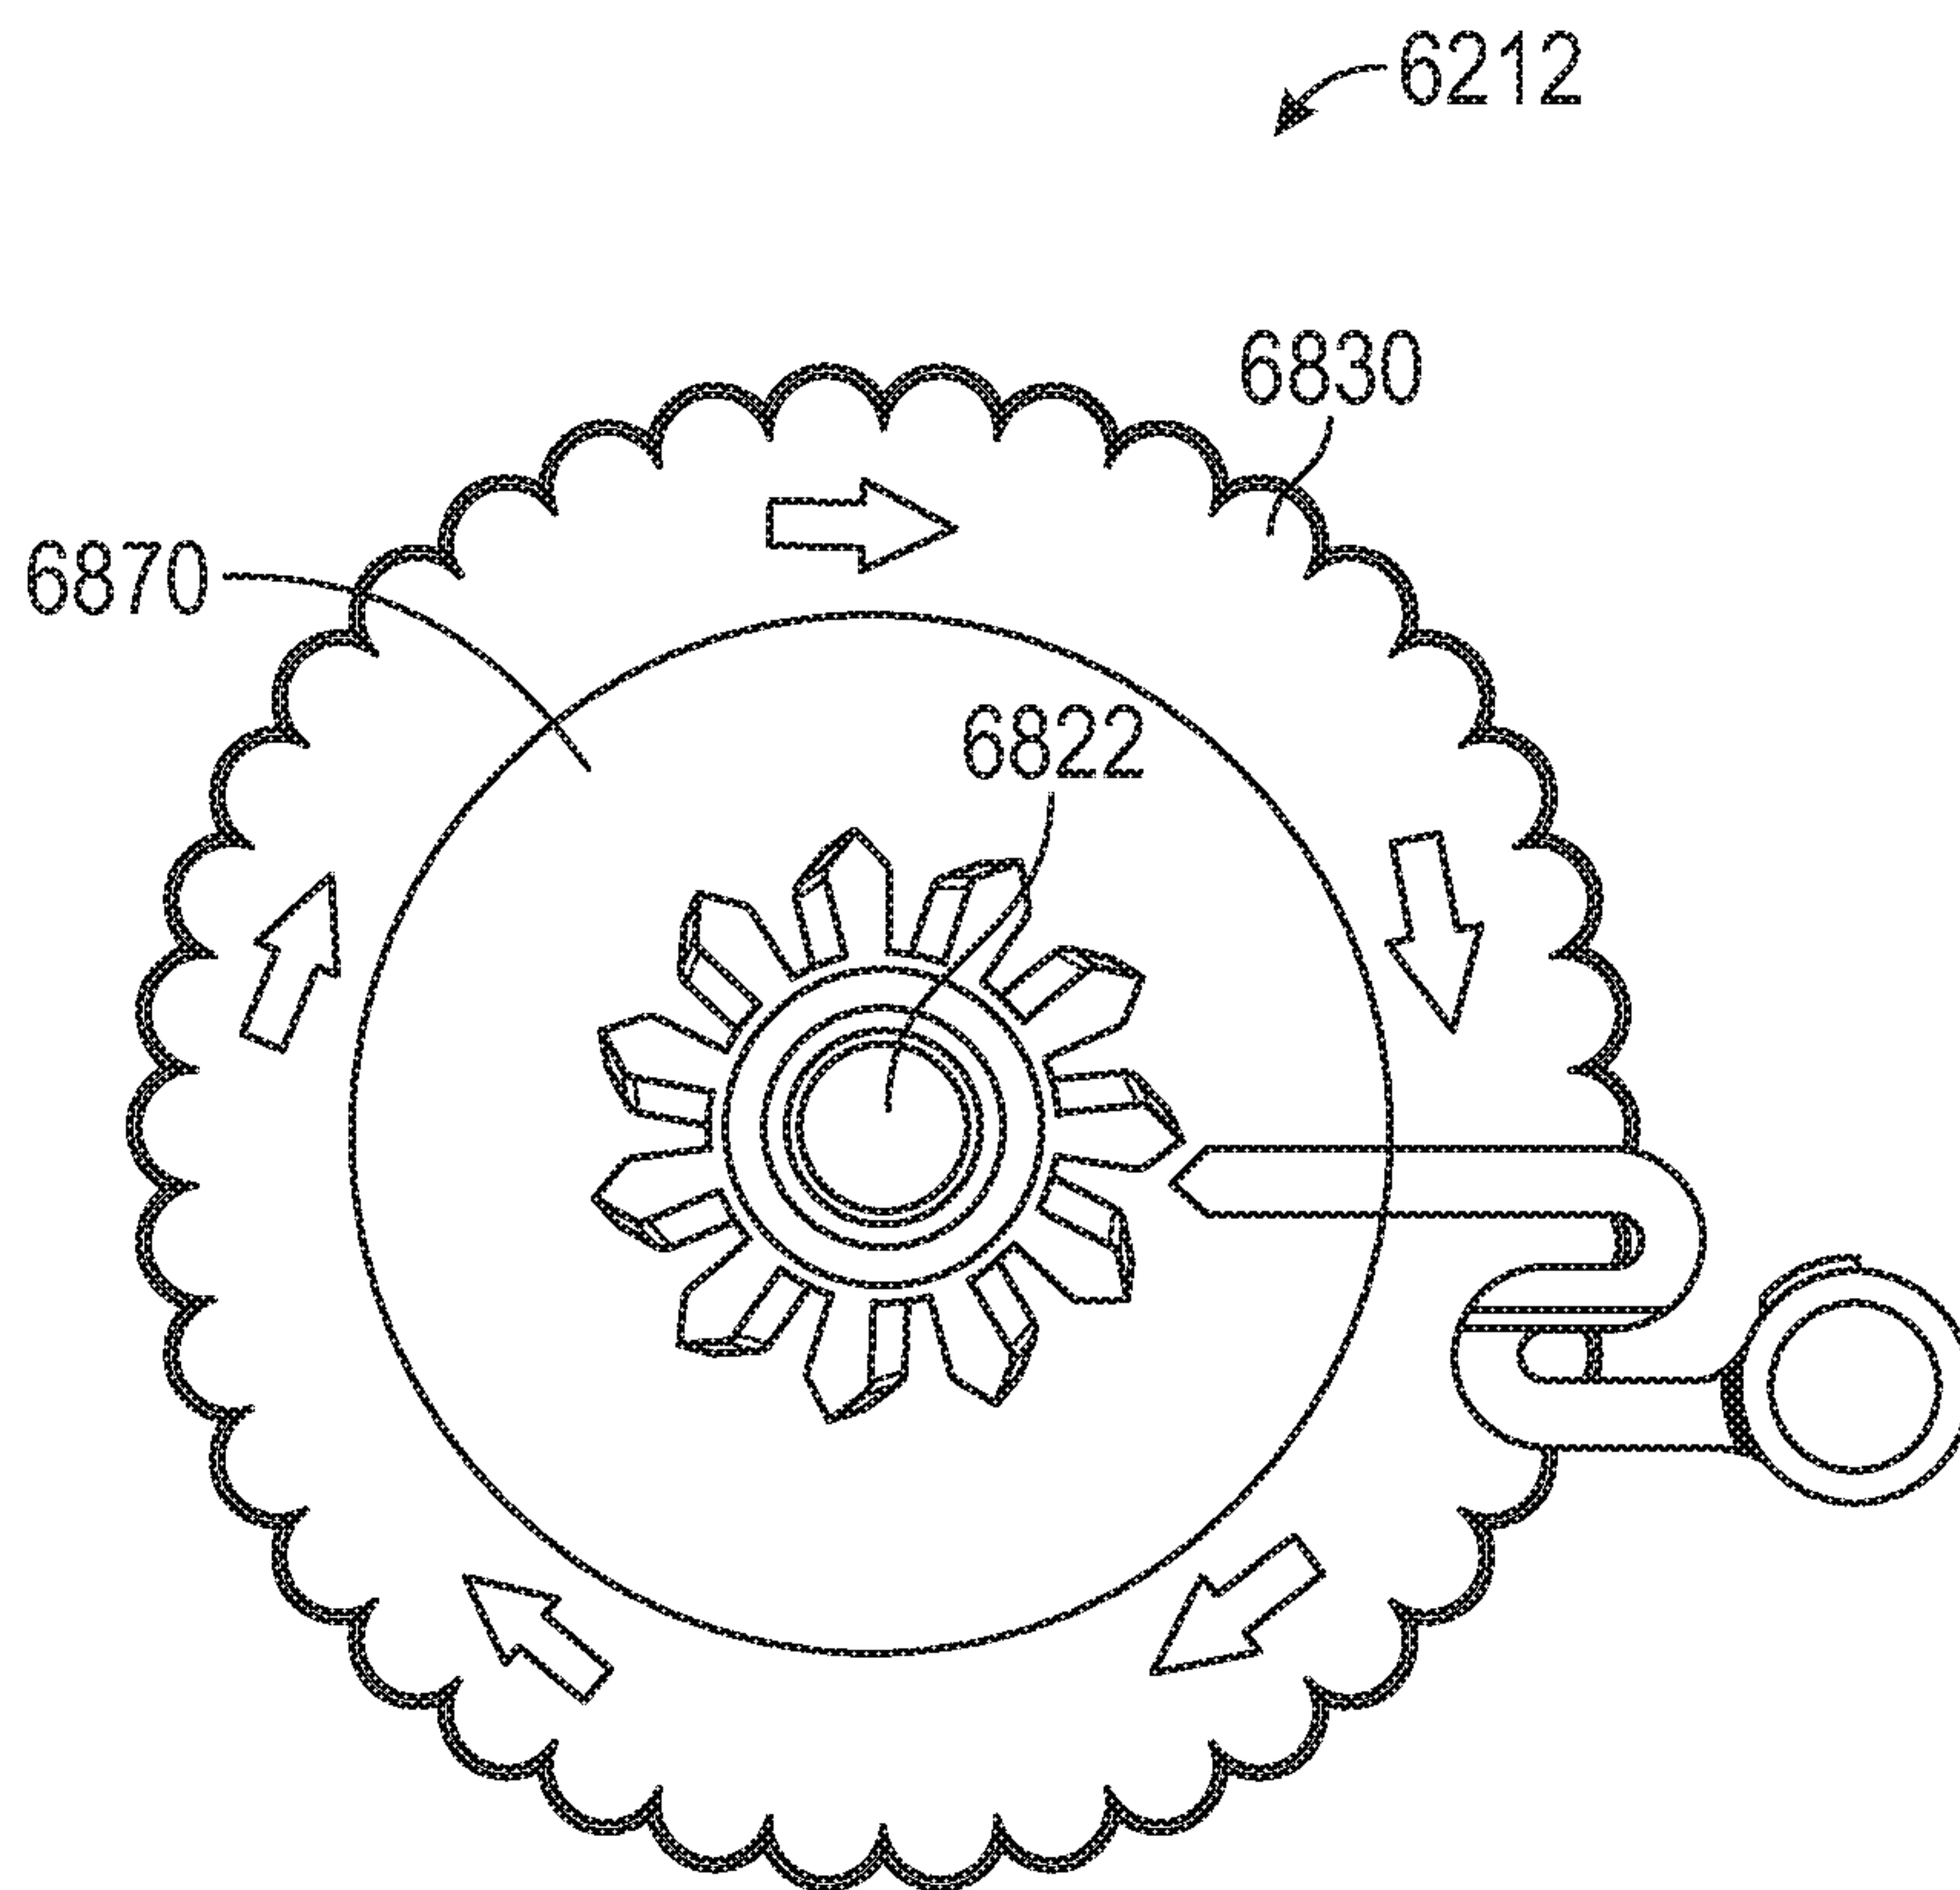


FIG. 73

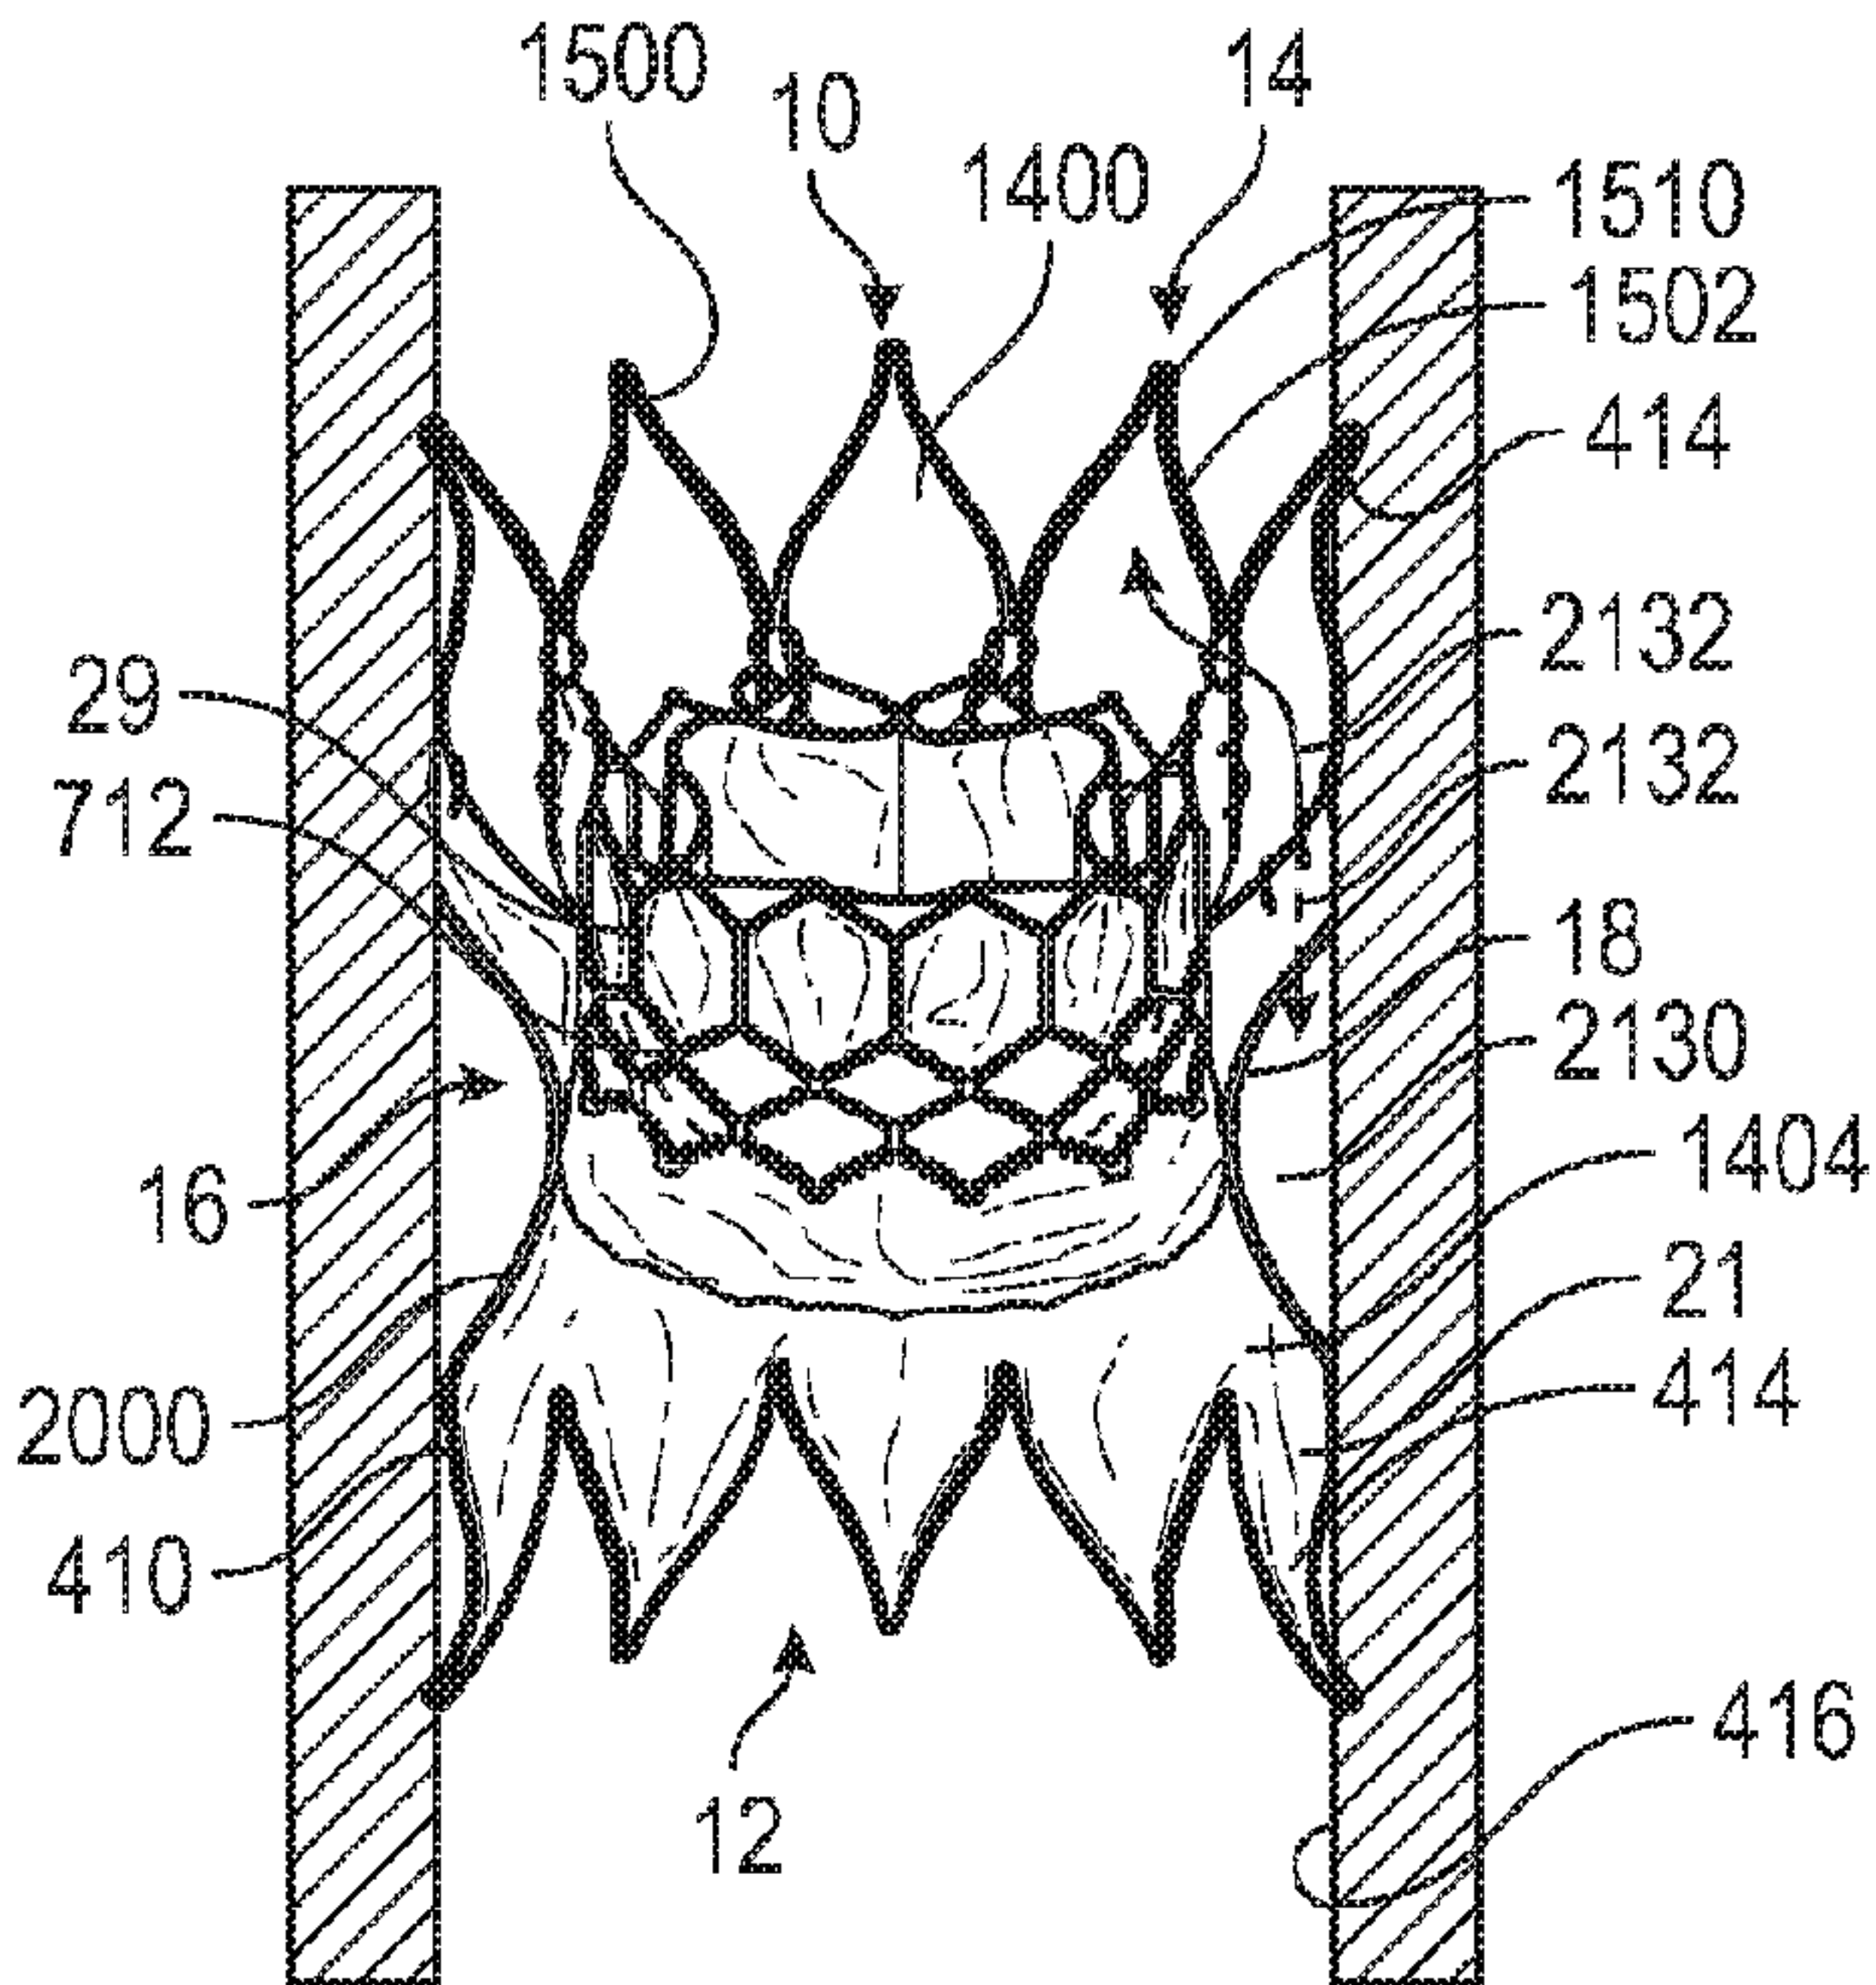


FIG. 22