

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018777 A2

(51) International Patent Classification⁷: **E02D**

(74) Agent: **KLEIN, Richard, M.**; Fay, Sharpe, Fagan, Minnich & McKee, LLP, 1100 Superior Avenue, 7th Floor, Cleveland, OH 44114 (US).

(21) International Application Number:
PCT/US2003/010615

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 8 April 2003 (08.04.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/225,593 22 August 2002 (22.08.2002) US


Published:
— without international search report and to be republished upon receipt of that report

(71) Applicant and

(72) Inventor: **LANKA, Richard, I.** [US/US]; 1790 Enterprise Parkway, Twinsburg, OH 44087 (US).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: SHORING SYSTEM APPARATUS AND METHOD FOR SHORING

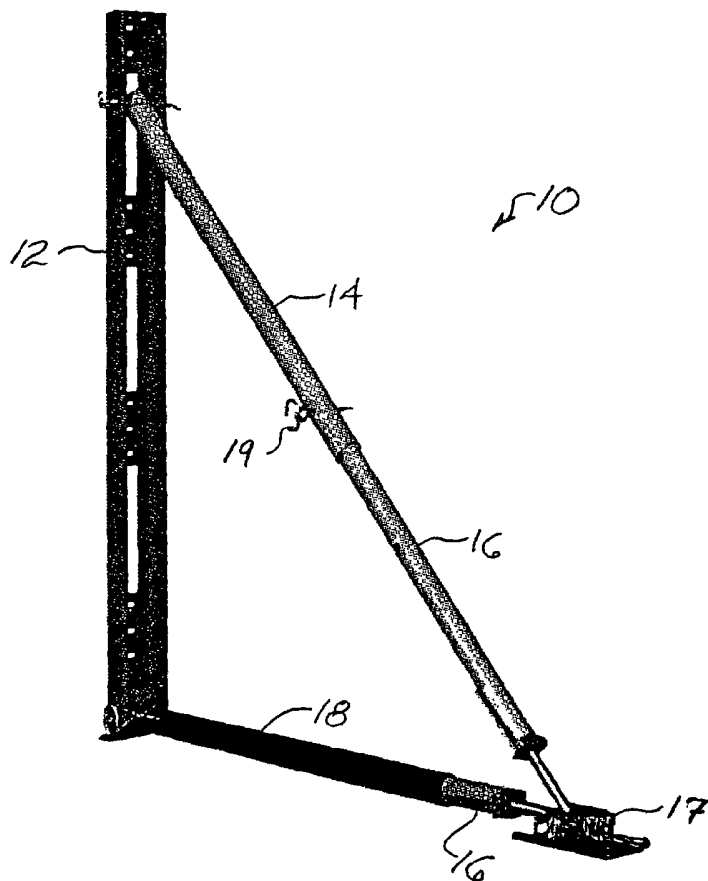

(57) Abstract: A shoring system to support a vertical surface is provided. The shoring system includes a main frame including a first end and a second end and a first member connected to the main frame near the first end. A first length adjuster is disposed in the first member and a second member is connected to the main frame near the second end. A second length adjuster is disposed in the second member and the first length adjuster and the second length adjuster connect to a base plate. A method for shoring a vertical surface is also provided.

SHORING SYSTEM APPARATUS AND METHOD FOR SHORING

CROSS REFERENCE TO RELATED APPLIC

This application claims the benefit of U.S. application Serial No. 60/373,307, filed on April 8, 2002.

FIELD OF THE INVENTION

The present invention relates to the art of shoring systems that are used to stabilize structures. More particularly, the present invention relates to a shoring system for use in stabilizing a vertical portion of a structure.

BACKGROUND OF THE INVENTION

When a catastrophic event, accident or force of nature, such as an earthquake, tornado, hurricane, flood, fire, or snow load occurs, building structures are often weakened. Such weakened structures may suddenly shift or collapse, endangering rescue workers, inspectors or other people in the vicinity. In addition, a shift or collapse may affect other structures that are nearby, either by hitting and directly damaging them or by weakening a common or adjacent foundation.

As a result, it is often necessary to support a weakened structure, commonly termed "shoring," quickly yet securely. The shoring of a vertical surface is often referred to as "raker" shoring. Shoring is a task that is often performed by rescue personnel, who may be engaged in multiple tasks simultaneously, such as extinguishing a fire, attending to victims and shoring a structure. Thus, a raker shoring system must

be capable of being assembled quickly and easily.

It is also necessary for a shoring system to be transported easily, so that the rescue workers can bring the system in a vehicle as close to the accident scene as possible and then hand-carried to the location where it will be assembled. Although a shoring system that is light is easily transported, the system must still be strong to support the heavy load of a building structure for a fairly long period of time (often up to a few weeks or longer).

The surface to be supported is typically held in a substantially vertical position by members that rely upon a proximate horizontal surface, such as the ground, as an anchor point. However, differences in the slope of nearby ground from site to site dictate a system that is adjustable to compensate for the slope differences and still support the structure in a substantially vertical position. The adjustment must be easy and quick to perform to allow the system to properly support the structure before collapse occurs. Because the shoring system will be used to support vertical portions of a variety of structures, from relatively low vertical surfaces to high vertical surfaces, it is also desirable for the system to be adjustable in height.

A shoring system must also be dependable, as it may be used repeatedly throughout its lifetime. As a result, it is often desirable to have the shoring system include components that rely on mechanical force, rather than on pneumatic or hydraulic components.

Raker shoring systems of the prior art often include wood, such as two-by-four (2x4) or four-by-four (4x4) beams and pieces of plywood, that are wedged at an angle between the nearby ground and the vertical surface to be supported. These

systems lack adjustability and are not durable, often being discarded after one shoring use.

It is therefore desirable to develop a shoring system that is strong, durable, adjustable and reusable, yet easy to use.

BRIEF SUMMARY OF THE INVENTION

In an exemplary embodiment of the present invention, a shoring system to support a vertical surface is provided. The shoring system includes a main frame including a first end and a second end and a first member connected to the main frame near the first end. A first length adjuster is disposed in the first member and a second member is connected to the main frame near the second end. A second length adjuster is disposed in the second member and the first length adjuster and the second length adjuster connect to a base plate.

In another exemplary embodiment of the present invention, a shoring system to support a vertical surface is provided. The shoring system includes a first main frame including a first end and a second end and a first member connected to the main frame near the first end. A first length adjuster is disposed in the first member and a second member is connected to the main frame near the second end. A second length adjuster is disposed in the second support member and the first length adjuster and the second length adjuster are connected to a first base plate. A second main frame includes a first end and a second end and the first end is connected to the second end of the first main frame. A third member is connected to the second main frame near the second end and at least one extension is connected to the third

member. A third length adjuster is disposed in one of the at least one extensions connected to the third member. A fourth member is connected to the first base plate and a fourth length adjuster is disposed in the third length adjuster and the fourth length adjuster are connected to the first base plate.

In yet another exemplary embodiment of the present invention, a shoring system to support a vertical surface is provided. The shoring system includes a first raker support, including a main frame including a first end and a second end, a first member connected to the main frame near the first end, a first length adjuster disposed in the first member, a second member connected to the main frame near the second end, a second length adjuster disposed in the second member, and the first length adjuster and the second length adjuster are connected to the base plate. A second raker support includes a main frame including a first end and a second end, a first member connected to the main frame near the first end, a first length adjuster disposed in the first member, a second member connected to the main frame near the second end, a second length adjuster disposed in the second member, and the first length adjuster and the second length adjuster are connected to a base plate. Cross braces extend between the first raker support and the second raker support and securing means connect the cross braces to each of the first raker support and the second raker support.

In still another exemplary embodiment of the present invention, a method for shoring a vertical surface is provided. The method includes the steps of placing a first main frame including a first end and a second end against a vertical surface, connecting a first member to the first end of the first main frame, connecting a second

member to the second end of the first main frame, inserting a first adjuster leg into the first member, securing the first adjuster leg in the first member, inserting a second adjuster leg into the second member, securing the second adjuster leg in the second member, providing a base plate, connecting the first adjuster leg to the base plate, and connecting the second adjuster leg to the base plate.

There are other objects and features of the invention, which will be apparent from the following description and claims.

BRIEF DESCRIPTION OF THE FIGURES

The following is a brief description of the drawings, which are presented for the purpose of illustrating the invention and not for the purpose of limiting the same, and wherein:

FIG. 1 is a perspective view of an assembled embodiment of the invention;

FIG. 2 is a perspective view of a component of the embodiment of FIG. 1;

FIG. 3 is a perspective view of another component of the embodiment of FIG. 1;

FIG. 4 is a side view of yet another component of the embodiment of FIG. 1;

FIG. 5 is a side view, partially in section, of a portion of the component shown in FIG. 4;

FIG. 6 is a side view of still another component of the embodiment of FIG. 1;

FIG. 7 is a perspective view of yet another component of the embodiment of FIG. 1;

FIG. 8 is a perspective view of another embodiment of the invention;

FIG. 9 is a perspective view of another assembled embodiment of the invention in use;

FIG. 10 is a front view of a portion of a component of the embodiment of the invention shown in FIG. 9;

FIG. 11 is a front view of another component of the embodiment of the invention shown in FIG. 10;

FIG. 12 is a side view of the component of FIG. 11 along line F12-F12;

FIG. 13 is a perspective view of the components of FIGS. 10 and 11 in use;

FIG. 14 is a perspective view of a component of still another embodiment of the invention;

FIG. 15 is a front view of several components of the present invention folded for storage and/or transport; and

FIG. 16 is a side view of the several components of FIG. 15.

DETAILED DESCRIPTION OF THE INVENTION

Referring now to the drawings, wherein the showings are for purposes of illustrating preferred embodiments of the invention and not for the purpose of particularly limiting the same, FIG. 1 illustrates a raker shoring system **10** to support a

vertical structure. A main frame **12** is connected to a support leg **14**. The support leg **14** receives an adjuster leg **16** that in turn connects to a base plate **17**. The main frame **12** also connects to an extension **18** that receives a support leg **14** which also connects to the base plate **17**. The connections may be facilitated by pins **19** or other similar means, such as bolts. It is to be noted that the support leg **14** and the extension **18** may be interchangeable.

In this manner, the components of the shoring system **10** form a triangular support structure, where the main frame **12** is placed against the vertical surface to be supported and the base plate **17** is secured to a generally horizontal surface. The use of pins **19** for the connections allows the support leg **14** and the extension **18** to pivot so that the base plate **17** may be secured to horizontal surfaces of differing levels.

Turning now to FIG. 2, the main frame **12** includes a planar surface **20** that is typically placed against the vertical surface to be supported. Extending from the planar surface **20** are parallel first **22** and second **24** sides and a first end **26** and second end **28**. At the first end **26**, flanges **30** may be present which allow multiple main frames **12** to be fastened together. The planar surface **20**, first side **22**, second side **24**, first end **26** and second end **28** cooperate to define a channel **32** where the support leg **14** and extension **18** may be received. The first **22** and second **24** sides define orifices **34** that may receive pins, bolts or other fasteners **19** (FIG. 1) to secure the support leg **14** and/or the extension **18** to the main frame **12**.

With reference to FIG. 3, the support leg **14** may include a cylindrical configuration having a first end **36** and a second end **38**. Shoulders **40** may be included

near the first end **36** to allow the support leg **14** to fit relatively close between the sides **22** and **24** of the main frame **12** (FIG. 2), thereby allowing the support leg **14** to shift along the length of a pin when the main frame **12**. The support leg **14** may define multiple sets of orifices **44** through which pins or fasteners **19** (FIG. 1) to be inserted in order to secure the support tube **14** to the main frame **12**, or to secure other items to the support tube **12**, as will be shown below. The support tube **14** also defines an inner diameter **46** to receive the adjuster leg **16** (FIG. 1).

As illustrated in FIGS. 4 and 5, the adjuster leg **16** includes a body **48** having an outer diameter that is slightly less than the inner diameter **46** of the support leg **14** (FIG. 3), thereby allowing the adjuster leg **16** to slide inside of the support leg **14**. The adjuster leg **16** includes a first end **50** and a second end **52**. The first end **50** is typically inserted into the support leg **14**, while a tapped end cap **54** at the second end **52** prevents the adjuster leg **16** from sliding completely within the support leg **14**.

The body **48** of the adjuster leg **16** defines multiple sets of orifices **56** that at least partially correspond to some of the orifices **44** that are defined in the support leg **14** to provide length adjustment. In this manner, a desired set of orifices **54** in the adjuster leg **16** may be aligned with a set of orifices **44** in the support leg **14** and a pin or other fastener **19** (FIG.1) may be inserted through the aligned sets of orifices **44** and **54** to secure the adjuster leg **16** to the support leg **14** in a position that creates a desired overall length.

For fine adjustment of the length of the adjuster leg **16**, a screw **58** engages the tapped end cap **54**. The screw **58** terminates in a socket **60** that receives

a pin or other fastener **19** (FIG. 1), thereby allowing the adjuster leg **16** to be removably secured to the base plate **17**. Handles **62** are attached to the tapped end cap **54** and allow the tapped end cap **54** to be rotated relative to the support leg **14** with **58** to move in or out of the adjuster body **48**. Thus, once the adjuster body **48** is attached to the support leg **14** at one end and near the base plate **17** at the other, the handles **62** may be turned to provide fine adjustment.

Turning to FIG. 6, the extension **18** is generally of an outer dimension approximate to that of the support leg **14**, but also includes a shoulder **66** that is of a dimension that allows the shoulder **66** to slide inside of the support leg **14** or another extension, as will be described below. A first set of orifices **68** may be defined in the shoulder **66** to allow a pin or other fastener **19** (FIG. 1) to secure the extension **18** to the main frame **12** (as shown in FIG. 1).

A second set of orifices **70** may be defined in the shoulder **66** and align with a set of orifices **44** in the support leg **14**, allowing a pin or other fastener **19** to secure the extension **18** to the support leg **14**, also to be described below. A third set of orifices **72** may be defined in the extension **18** that align with a desired set of orifices **54** in the adjuster leg **16**, allowing an adjustable connection between the extension **18** and the adjuster **16** that is substantially similar to that described above for the support leg **14** and the adjuster leg **16**. The locations of the orifices **68**, **70** and **72** may shift or change according to specific design requirements. For example, only one set of the first two sets of orifices **68** and **70** may be present for some applications, thereby shifting along the shoulder **66** as design considerations dictate.

With reference to FIG. 7, the base plate **17** facilitates the interconnection of the support members and allows them to be independent. The base plate **17** includes a bottom plate **74** that contacts the vertical flanges **76** and **78** and extend in a direction normal to the bottom plate. The flanges **76** and **78** are spaced apart and define orifices **80** that align with the socket **60** of each adjuster legs **16**, allowing the adjuster legs **16** to be pinned to the base plate **17**. The bottom plate also defines orifices **82** that allow it to be anchored to the ground or other stable horizontal surface.

As FIG. 8 illustrates, when a high vertical surface must be supported, an extended shoring system **84** may be used. The main frame **12** includes flanges **30** to allow a second main frame **86** to be bolted or fastened to the original main frame **12**. A second support leg **88** is pivotally connected to the second main frame **86** and at least one second extension **90** is inserted into the second support leg **88**. The shoulder (not shown) of the second extension **90** is inserted in the inner diameter of the second support leg **88** and the second extension **90** is pinned in place.

As illustrated, two second extensions **90** may be used in series to provide an adequate length to support the second main frame **86**. A second adjuster leg **92** is inserted into the last extension **90**, and pinned into place, as described above. An additional horizontal extension **94** is pinned in between the flanges **76** and **78** of the base plate **17**, which may include about three sets of orifices **80**. The additional horizontal extension **94** receives an additional horizontal adjuster leg **96**, which is pinned in place. The sockets of the second adjuster leg **92** and the additional horizontal

extension leg **96** are pinned or otherwise secured to a second base plate **98**, which may be anchored to the ground or horizontal support.

In this manner, an extended shoring system may allow substantially high vertical surfaces to be supported. Through modular components, an overall extension of height may be accomplished to adapt the system to the height needed to support a weakened structure.

The above-described shoring system **10** thus provides a strong, adjustable structure of modular components for easy storage and transport. Furthermore, the system **10** is easily assembled and adjusted. Accordingly, a method of supporting a vertical surface or structure with the shoring system **10** is disclosed by the above figures.

A first main frame **12** is placed substantially against the vertical surface to be supported. The first end **36** of the support leg **12** is placed into the channel **32** of the main frame **12** and the shoulders **40** of the support leg **12** are aligned with orifices **34** near the first end **26** of the main frame **12** and secured with a pin or other fastener **19**. The shoulder **66** of the extension **18** is placed into the channel **32** of the first main frame **12** and the orifices **68** in the shoulder **66** are aligned with orifices **34** near the second end **28** of the first main frame **12** and secured with a pin or other fastener **19**.

The first end **50** of a first adjuster leg **16** is placed in the second end **38** of the support leg **14** and a set of orifices **54** in the first adjuster leg **16** is aligned with the orifices **44** in the support leg **14** to create a desired overall length, whereupon a pin **19** is inserted through the orifices **44** and **54** to secure the first adjuster leg **16** to the

support leg **14**. The first end **50** of a second adjuster leg **16** is placed in the extension **18** and a set of orifices **54** in the second adjuster leg **16** is aligned with the orifices **72** in the extension **18** to create a desired overall length. A pin **19** is inserted through the orifices **72** and **54** to secure the second adjuster leg **16** to the extension **18**.

The base plate **17** is placed so that the sockets **60** of both adjuster legs **16** are in between the flanges **76** and **78** of the base plate **17**. The sockets **60** are aligned with orifices **80** that are defined in the flanges **76** and **78** and pins **19** are inserted through the sockets **60** and the orifices **80** to secure the adjuster legs **16** to the base plate **17**.

It is to be noted that the main frame **12** may be raised or lowered to a suitable area on the surface to be supported and then secured to the surface, and the base plate **17** may also be raised or lowered to a suitable surface to which it may be secured. This flexibility in adjustment is facilitated by the pin connections. Further adjustment is provided by turning the handles **62** on the adjuster legs **16** or realigning and re-pinning the orifices **54** in the adjuster legs **16**, or both.

The method also includes the use of the extended shoring system **84**, which involves placement of the additional main frame **88**, extensions **90** and **94**, adjuster legs **92** and **96** and base plate **98** as described above.

The steps of the method of using the shoring system **10** and **84** may be performed in alternate ways. For example, the adjuster leg **16** may be inserted into the support leg **14** and then the support leg **14** may be pinned to the main frame **12**. In addition, some components are interchangeable for some functions. For example, the

support leg **14** may be used in the place of the extension **18**, or the extension **18** may be used in the place of the support leg **14**.

The components of the system **10** and **84** may also be color-coded for easy recognition. For example, the main frame **12** may be red, the support leg **14** gray and the extension **18** blue.

Turning now to FIG. 9, it may be desirable to use multiple shoring systems **84** to support a vertical surface across an extended length. These systems **84** may be placed independently, i.e., without interconnection to one another, or they may be connected to one another to provide increased stability. When the systems **84** are interconnected, cross braces **100** may be used. The cross braces **100** are connected at one end to one shoring system **84** and at the opposite end to a separate shoring system **84**.

With reference to FIG. 10, a cross brace **100** may include a bracket **102** that defines a channel **104** that may receive a support leg **14**, an adjuster leg **16** or an extension **18**. The bracket **102** also defines orifices **106** that allow a pin or other fastener to secure the cross brace **100** to the support leg **14**, adjuster leg **16** or extension **18** to which it connects.

With reference to FIGS. 11-13, a clamp **108** may also be included to secure the cross brace **100** to the support leg, **14**, adjuster leg **16** or extension **18**. The clamp **108** may provide more flexibility as to the location and orientation of the connection of the cross brace **100**. The clamp **108** includes a body **110** that is pivotally connected to a securing member **112** at a hinge point **114**. The securing member **112**

is pivoted away from the body **110** to allow the clamp **108** to engage the desired support leg **14**, adjuster leg **16** or extension **18**. When the desired leg or extension **14**, **16** or **18** is engaged, the securing member **112** is closed about the leg or extension **14**, **16** or **18**, thereby causing the clamp **108** to substantially surround a section of the leg or extension **14**, **16** or **18**. Fastening means, such as a threaded pin **116** and nut (not shown) may secure the clamp **108** in a closed position.

A first pivotable connector **118** and a second pivotable connector **120** are connected to the body **110** and define respective orifices **122** and **124** to receive pins. The pivotable connectors **118** and **120** engage the channel **104** defined by the bracket **102** of the cross brace **100**. The orifices **122** and **124** defined in the pivotable connectors **118** and **120** align with orifices **106** defined in the bracket **102**, allowing a pin to secure the pivotable connectors **118** and **120** to a respective cross brace **100**.

Two different cross braces may be used, with each one having a bracket **102** as described. One cross brace may be of a different diameter than the other, to allow the smaller brace to slide inside the other and be adjustably pinned. In this manner, an adjustable assembly including two cross braces may have a bracket **102** at either end.

As FIG. 14 shows, a pressure gauge **126** may be included in the shoring system **10**. The pressure gauge **126** includes a collar **128** that receives the screw **58** of the adjuster leg **16**. The screw **58** extends into the body **130** of the pressure gauge **126** and into a sealed cavity (not shown) defined therein. At least part of the pressure exerted by the supported surface is transferred via the main frame (not shown), down

the support leg **14**, down the adjuster leg **16** and down the screw **58** into the sealed cavity **130**. The pressure is shown by the indicator **132**, which is in contact with the sealed cavity. Thus, the pressure gauge **126** allows the pressure exerted by the supported surface to be monitored for changes as well as magnitude.

Turning to FIGS. 15 and 16, the ability of the components of the system to be folded into compact units for transport and storage when the main frame **12** is used is shown. The adjuster leg **16** slides into the support leg **14**, which may be pivotally connected to the main frame **12**. The support leg **14** and adjuster leg **16** may be folded or placed in the channel **32** defined by the main frame **12**, wherein the assembly is contained within the walls of the main frame **12**. The base plate **17** may then flip up and hook onto the main frame **12** to be secured to the main frame **12** and hold the adjuster leg **16** and the support leg **14** in place.

The invention has been described with reference to preferred embodiments. Obviously, modifications and alterations will occur to others upon reading and understanding the preceding detailed description. It is intended that the invention be construed as including all such modifications and alterations insofar as they come within the scope of the appended claims or the equivalents thereof.

WHAT IS CLAIMED IS:

1. A shoring system to support a vertical surface, comprising:
a main frame including a first end and a second end;
a first member connected to the main frame near the first end;
a first length adjuster disposed in the first member;
a second member connected to the main frame near the second end;
a second length adjuster disposed in the second member; and
a base plate, wherein the first length adjuster and the second length adjuster connect to the base plate.
2. The shoring system of claim 1, wherein at least one of the first and second members comprises a support leg.
3. The shoring system of claim 1, wherein at least one of the first and second members comprises an extension.
4. The shoring system of claim 1, wherein at least one of the connections is removable.
5. The shoring system of claim 4, wherein the at least one connection includes a pin.

6. The shoring system of claim 1, wherein at least one of the first and second length adjusters includes an adjustable screw.

7. The shoring system of claim 1, further comprising a pressure gauge connected to at least one of the first and second length adjusters.

8. The shoring system of claim 1, wherein one of the first and second members is capable of being selectively rotated into the main frame for storage.

9. The shoring system of claim 8, wherein the base plate secures the member in the main frame.

10. A shoring system to support a vertical surface, comprising:
a first main frame including a first end and a second end;
a first member connected to the main frame near the first end;
a first length adjuster disposed in the first member;
a second member connected to the main frame near the second end;
a second length adjuster disposed in the second support member;
a first base plate, wherein the first length adjuster and the second length adjuster connect to the base plate;
a second main frame including a first end and a second end, wherein the first end is connected to the second end of the first main frame;
a third member connected to the second main frame near the second end;

at least one extension connected to the third member;
a third length adjuster disposed in one of the at least one extensions connected to the third member;
a fourth member is connected to the first base plate;
a fourth length adjuster disposed in the fourth member; and
a second base plate, wherein the third length adjuster and the fourth length adjuster connect to the base plate.

11. The shoring system of claim 10, wherein at least one of the first, second, third and fourth members comprises a support leg.

12. The shoring system of claim 10, wherein at least one of the first, second, third and fourth members comprises an extension.

13. The shoring system of claim 10, wherein the at least one connection includes a pin.

14. A shoring system to support a vertical surface, comprising:

(a) a first raker support, including:

a main frame including a first end and a second end;
a first member connected to the main frame near the first end;
a first length adjuster disposed in the first member;
a second member connected to the main frame near the second

end;

a second length adjuster disposed in the second member; and

a base plate, wherein the first length adjuster and the second length adjuster connect to the base plate;

(b) a second raker support, including:

a main frame including a first end and a second end;

a first member connected to the main frame near the first end;

a first length adjuster disposed in the first member;

a second member connected to the main frame near the second

end;

a second length adjuster disposed in the second member; and

a base plate, wherein the first length adjuster and the second length adjuster connect to the base plate;

(c) cross braces extending between the first raker support and the second raker support; and

(d) securing means to connect the cross braces to each of the first raker support and the second raker support.

15. The shoring system of claim 14, wherein the securing means includes a bracket.

16. The shoring system of claim 14, wherein the securing means includes a clamp.

17. A method for shoring a vertical surface, comprising the steps of:
placing a first main frame including a first end and a second end against a vertical surface;

connecting a first member to the first end of the first main frame;
connecting a second member to the second end of the first main frame;
inserting a first adjuster leg into the first member;
securing the first adjuster leg in the first member;
inserting a second adjuster leg into the second member;
securing the second adjuster leg in the second member;
providing a base plate;
connecting the first adjuster leg to the base plate; and
connecting the second adjuster leg to the base plate.


18. The method for shoring a vertical surface of claim 17, further comprising the steps of:


adjusting the length of the first adjuster leg; and
adjusting the length of the second adjuster leg.



19. The method for shoring a vertical surface of claim 17, wherein at least one of the first and second members is one of a support leg and an extension.



20. The method for shoring a vertical surface of claim 17, wherein at


least one of the connections includes a pin.

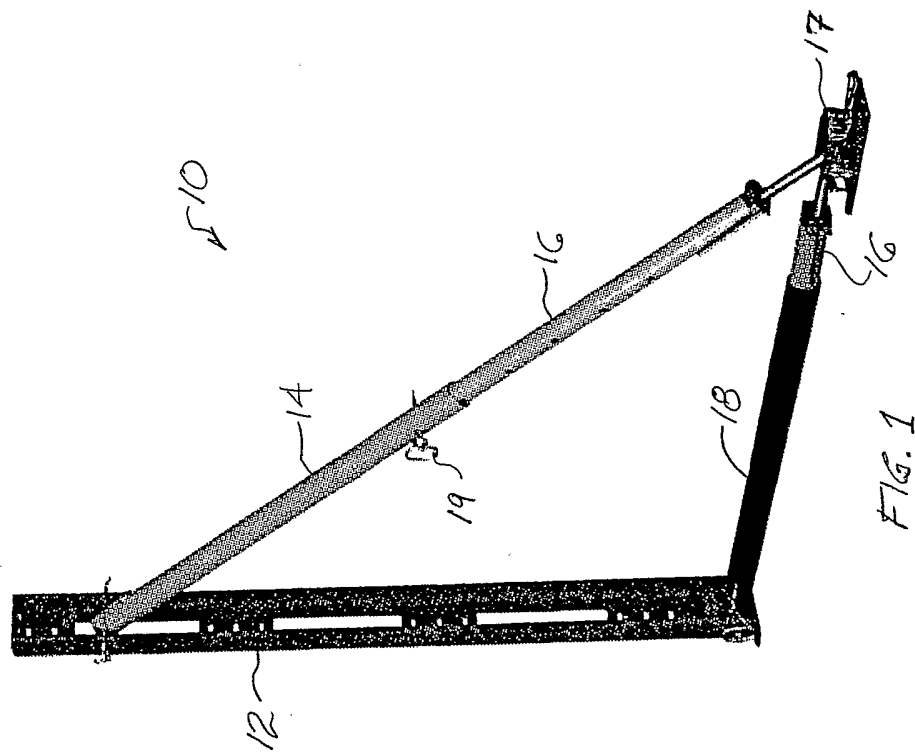


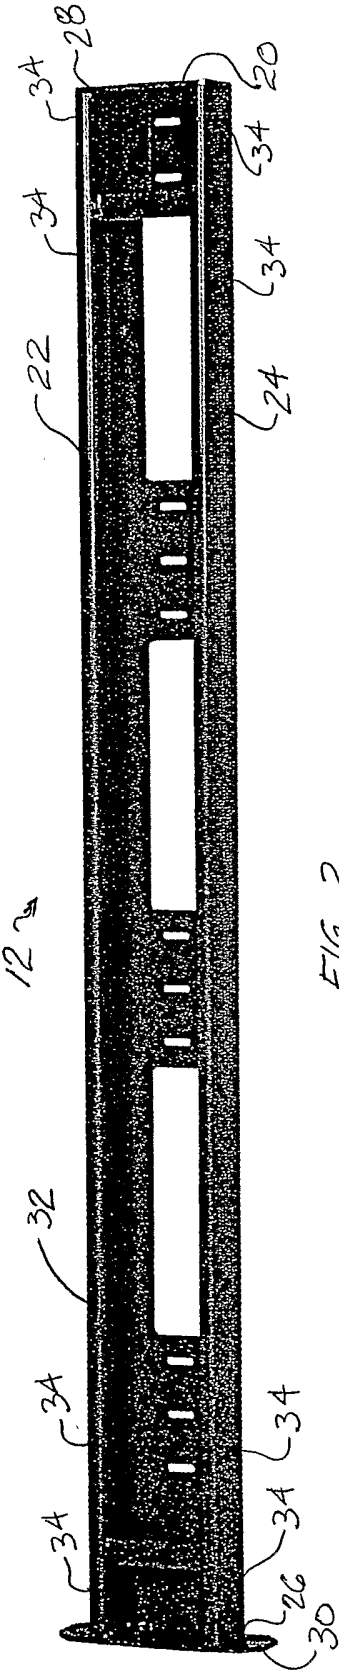

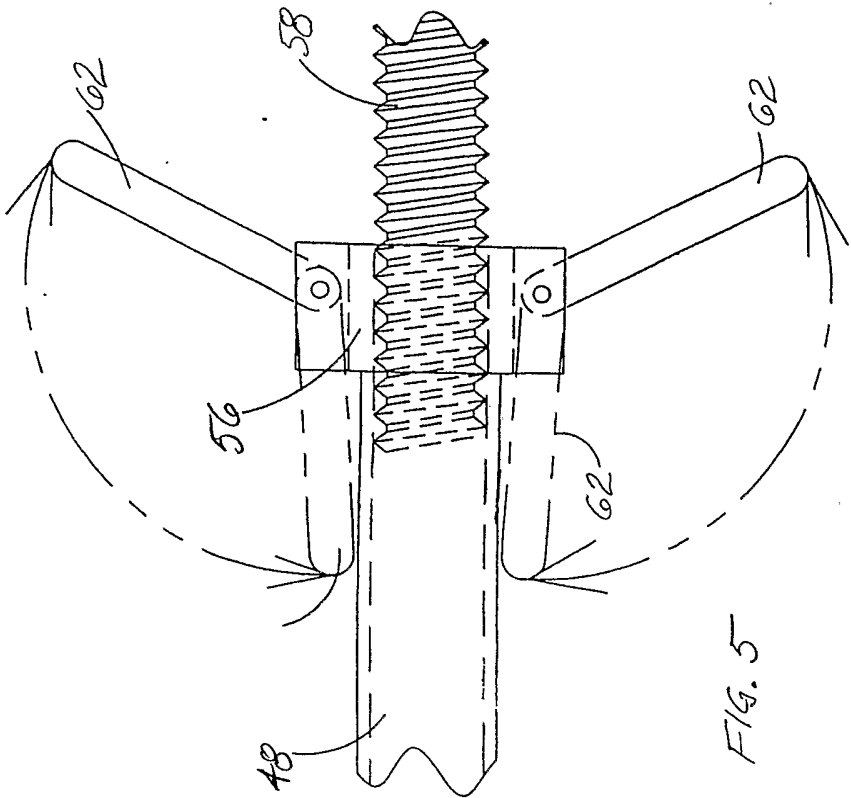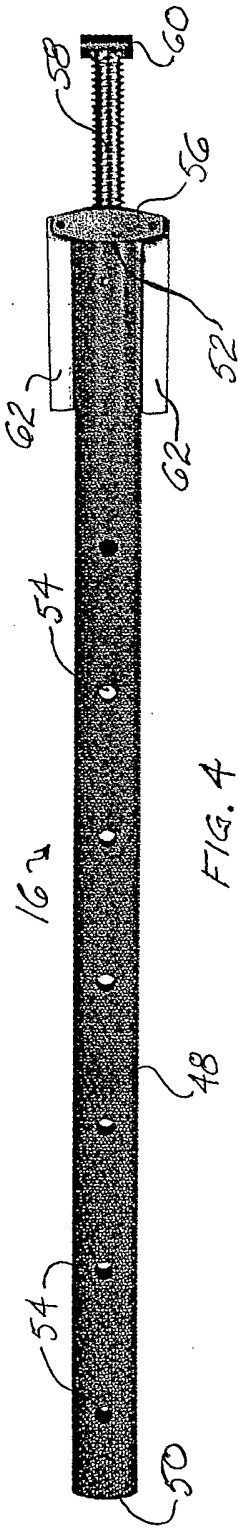

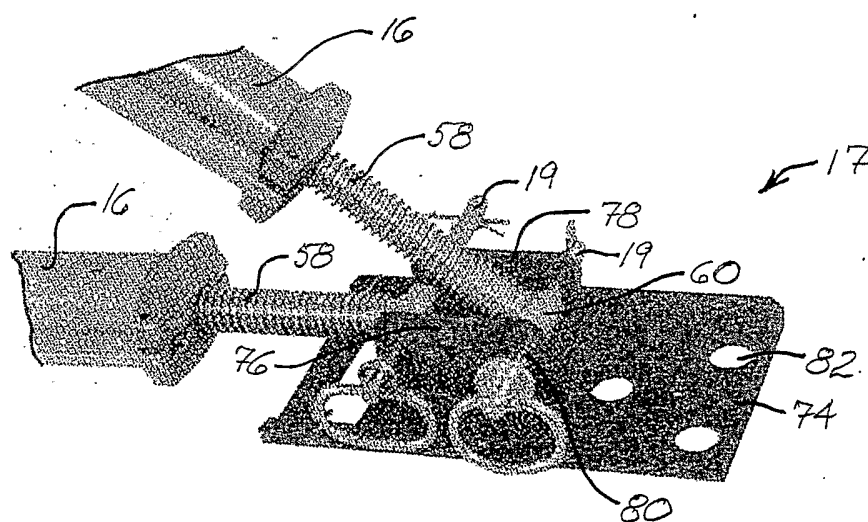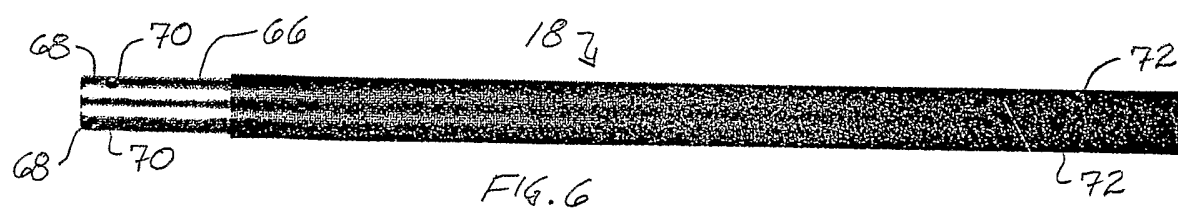

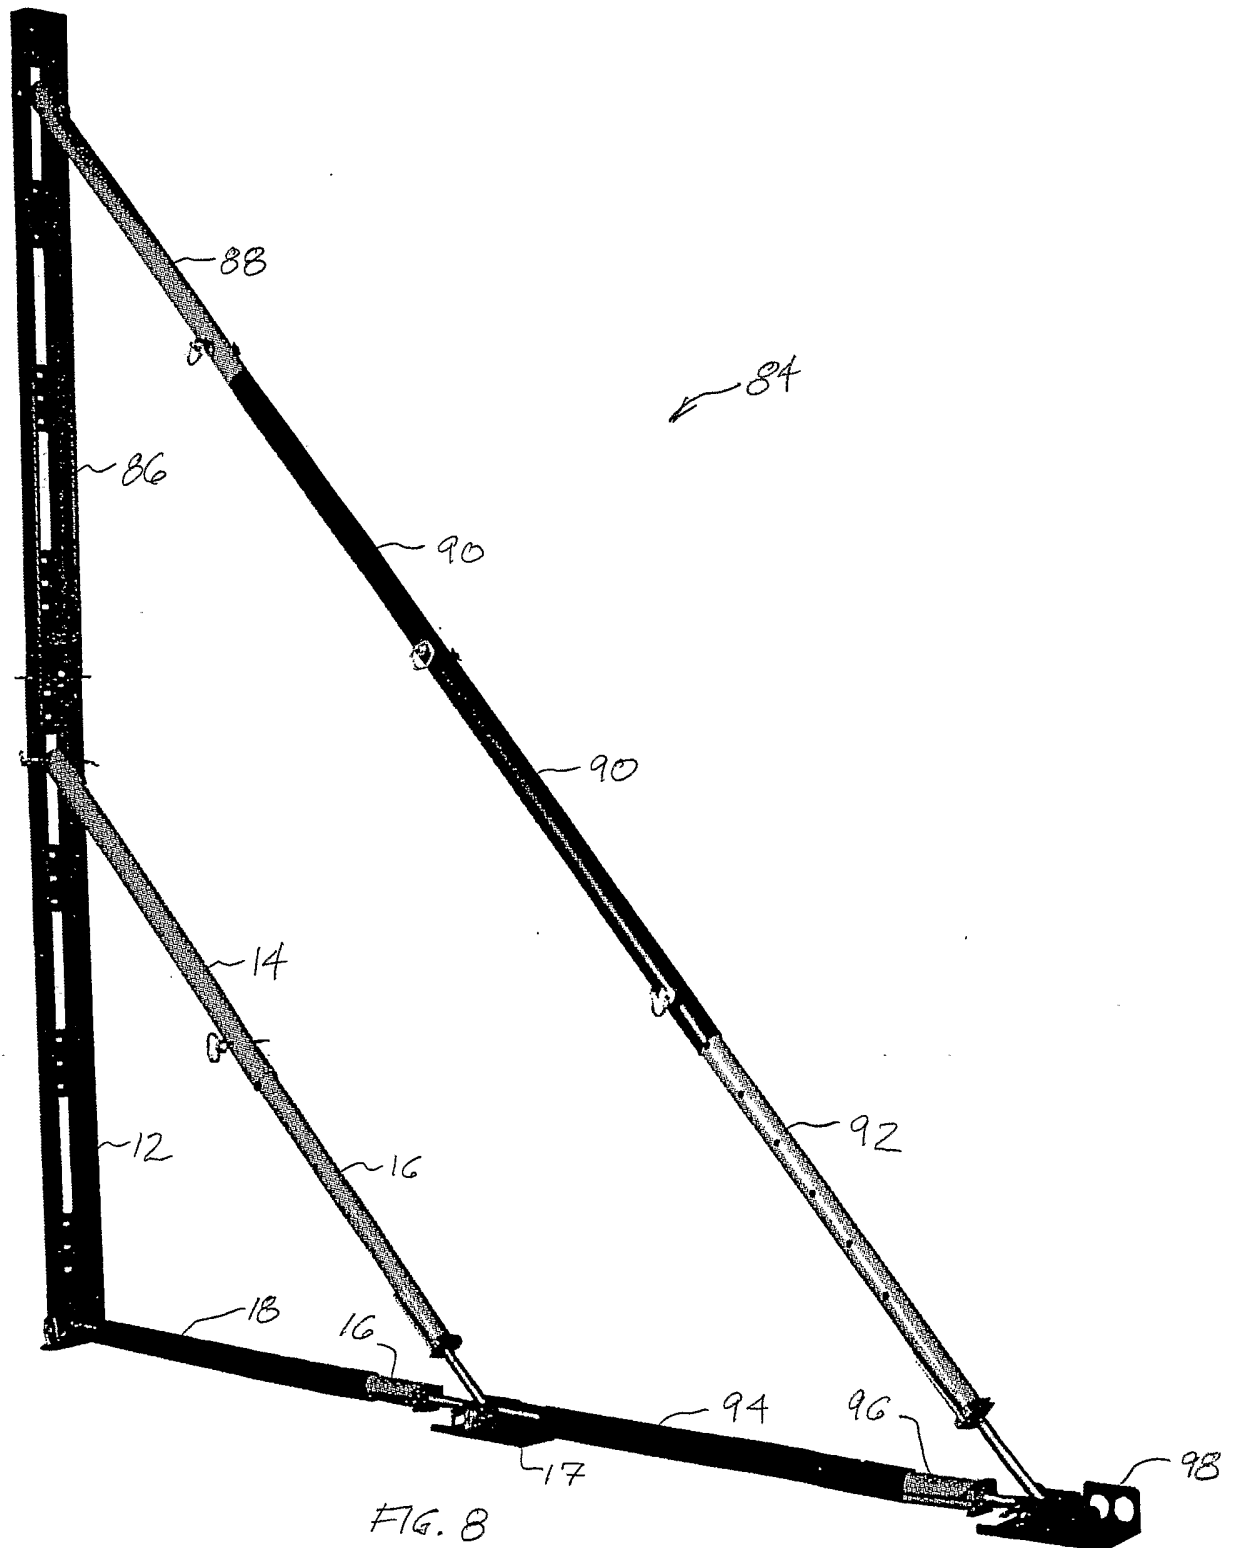

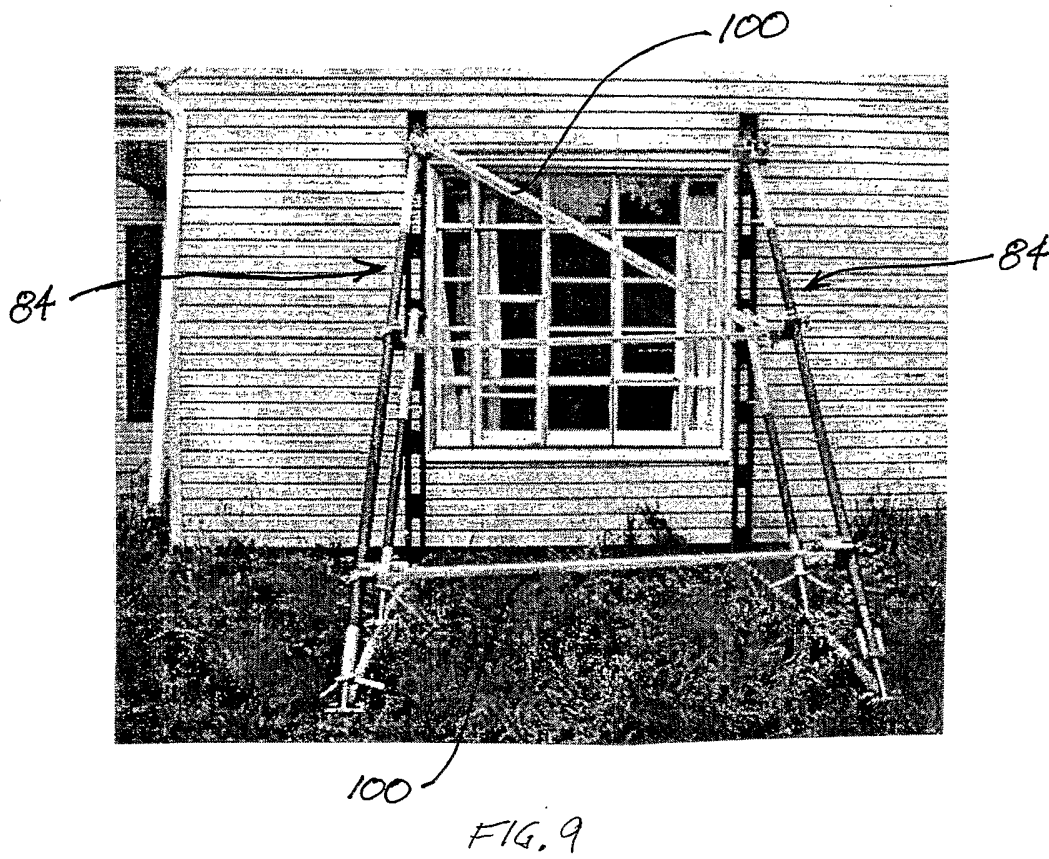

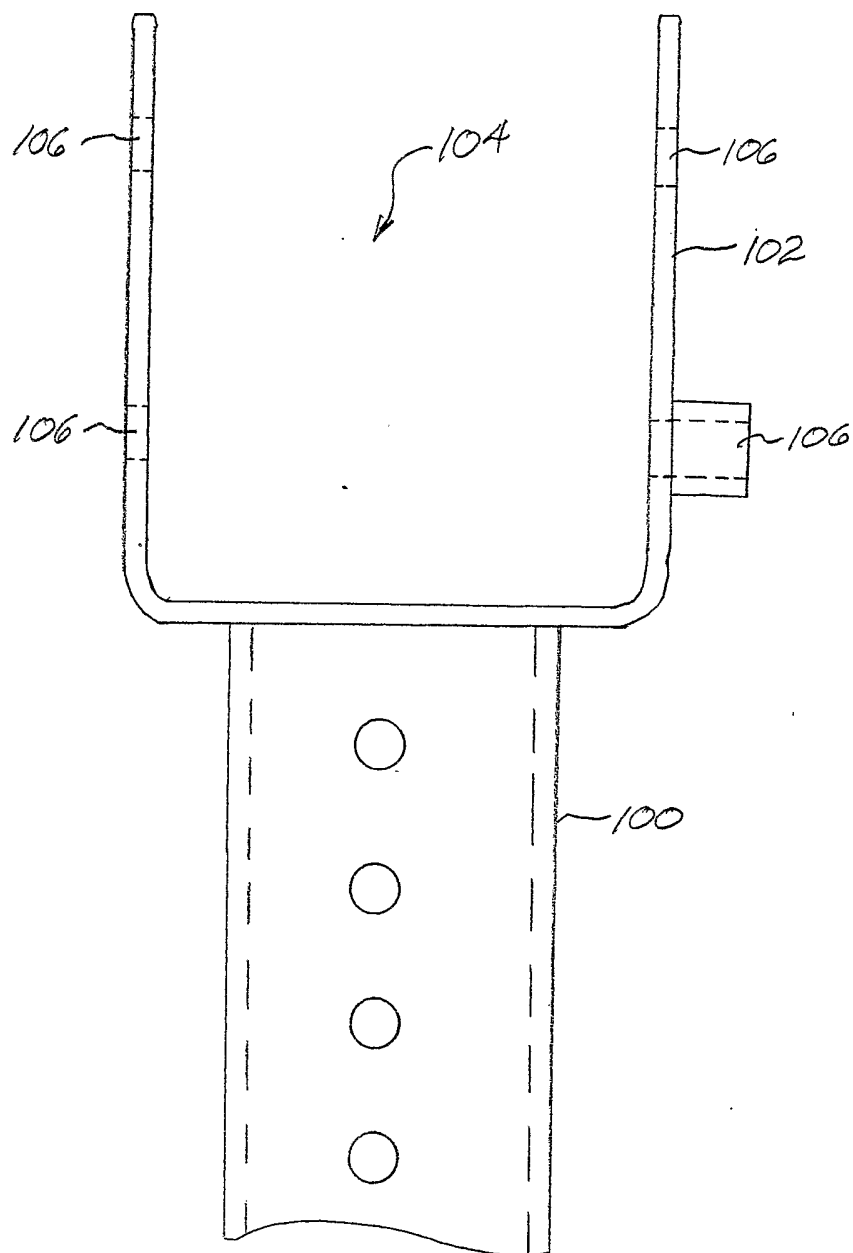


FIG. 10

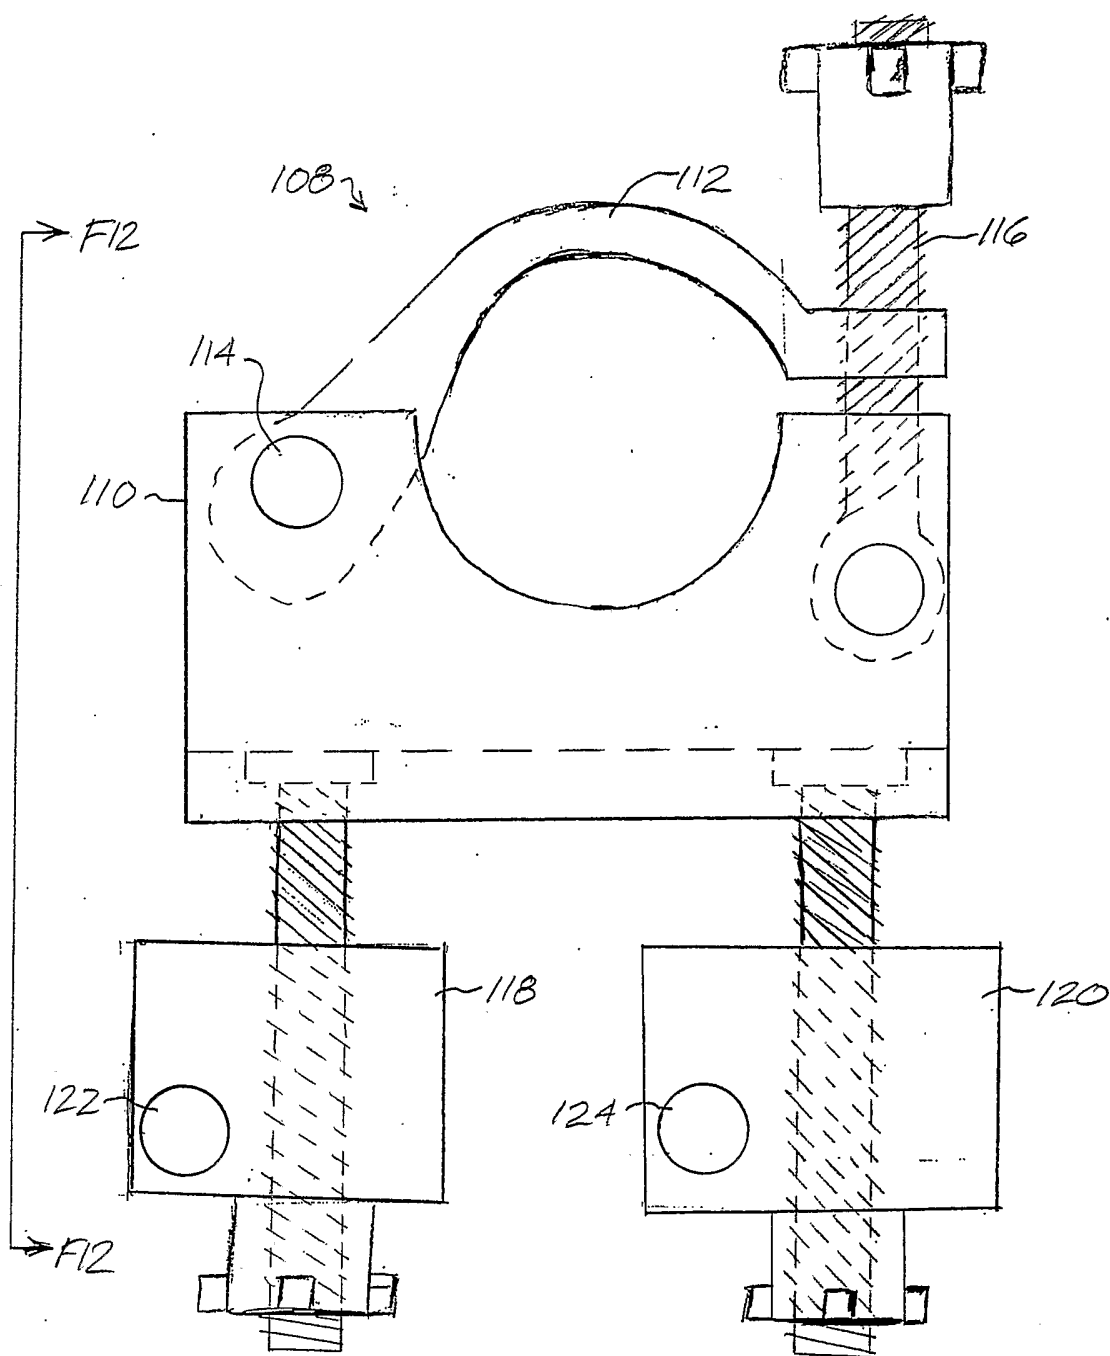


FIG. 11

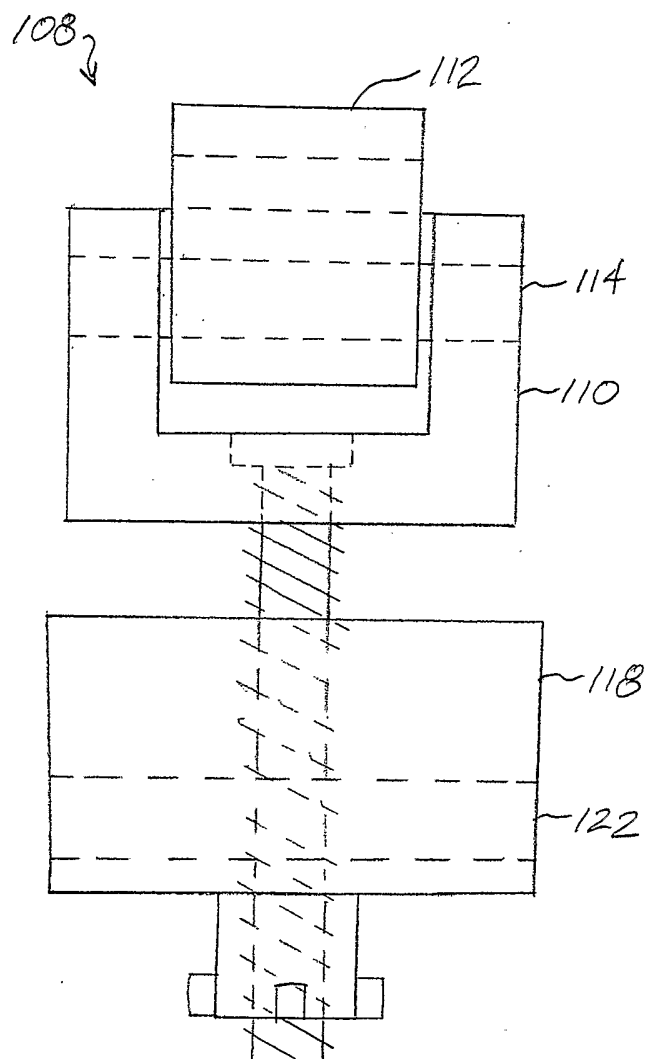
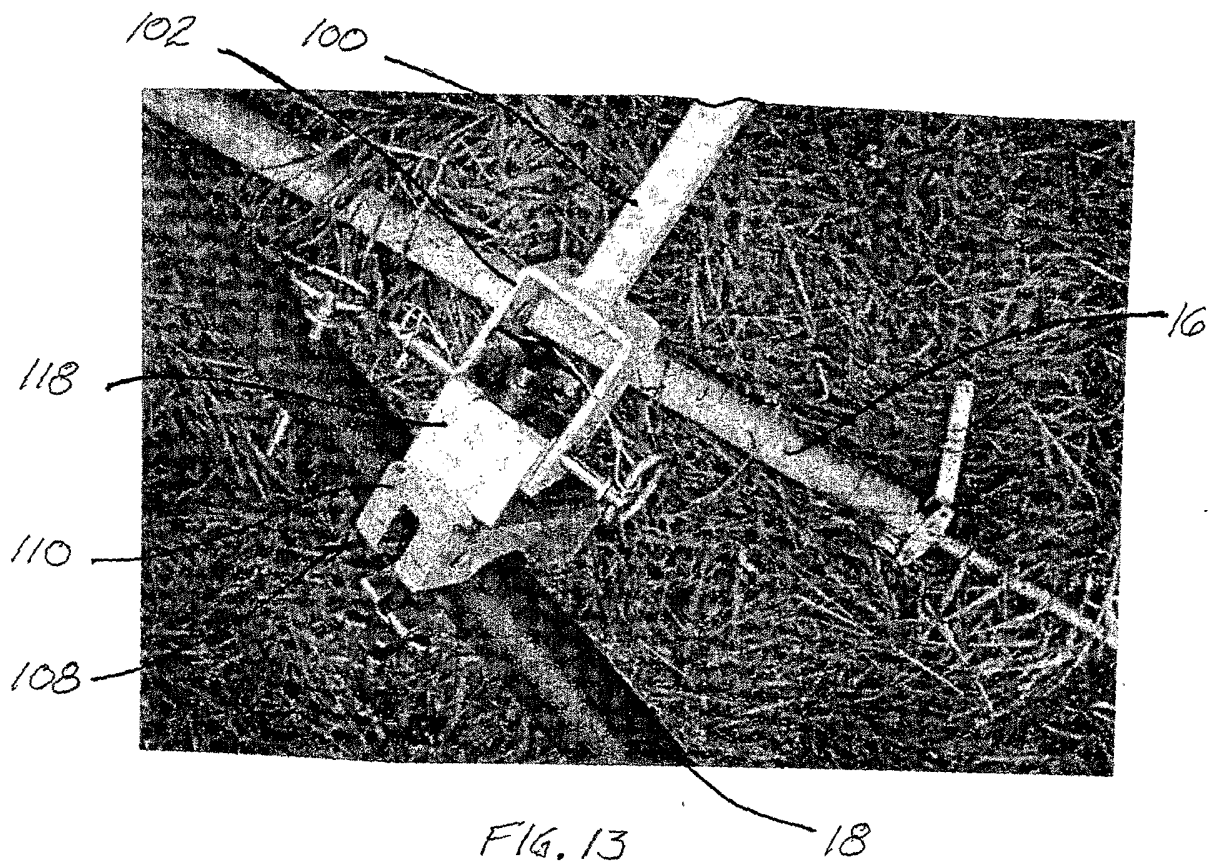


FIG. 12



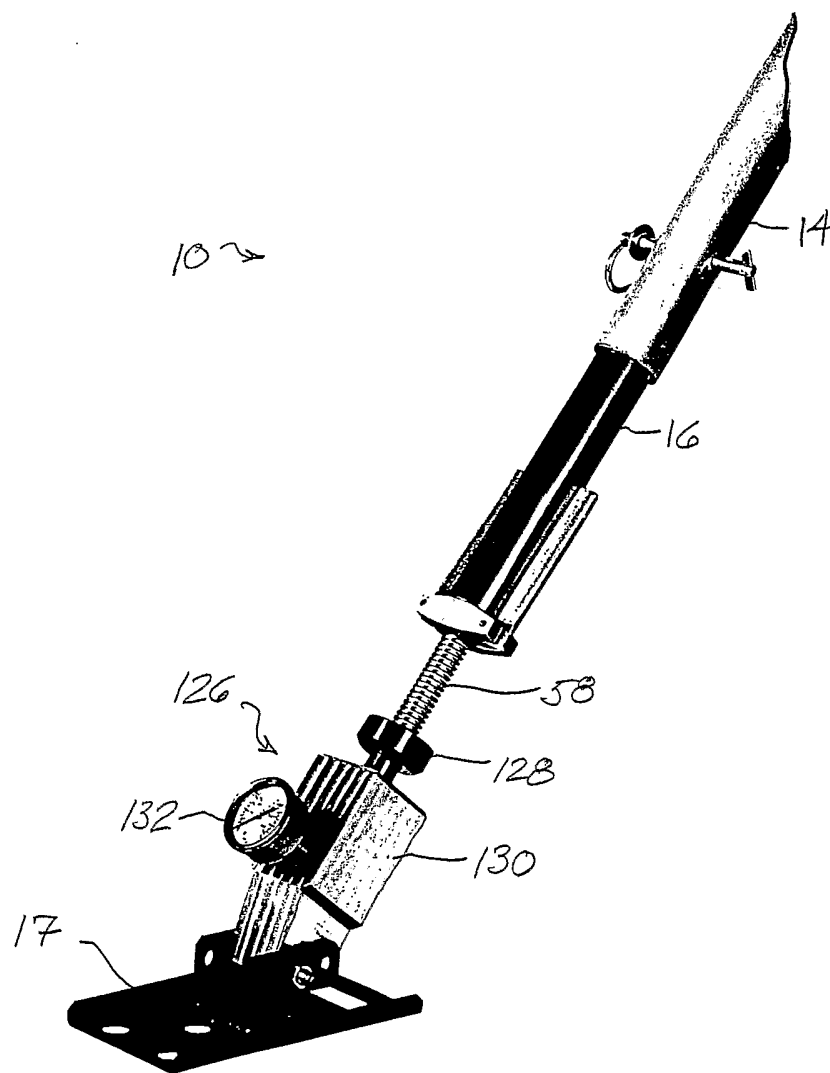


FIG. 14

