



- (51) International Patent Classification:
E21B 17/02 (2006.01) *E21B 17/18* (2006.01)
- (21) International Application Number:
PCT/EP2012/057802
- (22) International Filing Date:
27 April 2012 (27.04.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11164298.9 29 April 2011 (29.04.2011) EP
- (71) Applicant (for all designated States except US): **WELL-TEC A/S** [DK/DK]; Gydevang 25, DK-3450 Allerød (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HALLUNDBÆK, Jørgen** [DK/DK]; Haregabsvej 15, Esbønderup Skovhuse, DK-3230 Græsted (DK).
- (74) Agent: **HOFFMANN DRAGSTED A/S**; Rådhuspladsen 16, DK-1550 København V (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

(54) Title: A TOOL STRING

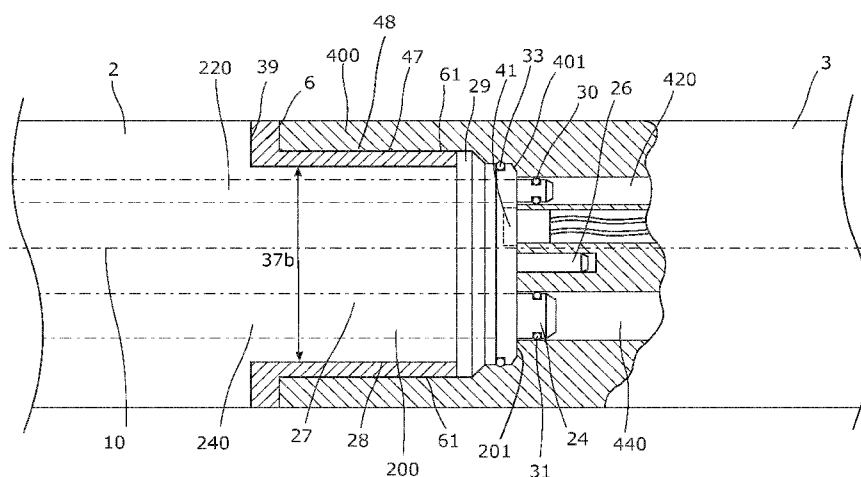


Fig. 2

(57) Abstract: The present invention relates to a tool string for being suspended in a well, the tool string extending in a longitudinal direction and comprising a first string part and a second string part, each having a centre axis and comprising; an electrical connection in a first end and a fluid channel extending at least partly through the string part. Furthermore, the tool string comprises a connecting element rotatably connected to one string part and adapted to be threadably connected to a threaded portion of the other string part to join the electrical connections of the first and second string parts. Furthermore, the present invention relates to a method for assembling two string parts of a tool string by rotating a connecting element.

A TOOL STRING

Field of the invention

The present invention relates to a tool string for being suspended in a well, the tool string extending in a longitudinal direction and comprising a first string part
5 and a second string part, each having a centre axis and comprising; an electrical connection in a first end, and a fluid channel extending at least partly through the string part. Furthermore, the present invention relates to a method for assembling two string parts of a tool string.

10 Background art

The extraction rate from hydrocarbon-producing wells and the surrounding formations is becoming increasingly important due to decreasing oil reserves. Therefore, increasingly advanced tools are being developed and deployed in the
15 search for and extraction of oil and gas. Tools deployed downhole in a well are often assembled or joined in a tool string comprising multiple tools, such as driving tools for driving the tool string forward in inclining sections of the well and/or operational tools for performing various operations downhole.

20 Various principles for joining pipe sections for use in a drill string of a casing are known from the prior art. Such pipe couplings may provide a fluid-tight coupling between pipe sections and may also comprise an electrical coupling for transferring electrical power. However, known couplings do not provide the necessary connection between advanced tools and tool parts. Present downhole
25 tools, such as a downhole tractor, require a supply of both electrical power and hydraulic fluid in order to operate. A need has therefore arisen for a coupling between different tool string parts, wherein both fluid and electrical power can be transferred. Some downhole tools may require several separate fluid channels running between different parts of the tool string. The coupling has to be robust
30 and capable of withstanding considerable tensile forces and twisting during deployment downhole. At the same time, the coupling has to be relatively easy and fast to assemble.

Summary of the invention

It is an object of the present invention to wholly or partly overcome the above disadvantages and drawbacks of the prior art. More specifically, it is an object to
5 provide an improved tool string, wherein electrical power and fluid(s) can be transferred from one part of the tool string to another. Further, it is an object to provide a connection between two string parts, wherein fluid channels in each of the string parts are brought into fluid communication and wiring in each of the string parts are connected.

10

The above objects, together with numerous other objects, advantages, and features, which will become evident from the below description, are accomplished by a solution in accordance with the present invention by a tool string for being suspended in a well, the tool string extending in a longitudinal direction and
15 comprising:

- a first string part and a second string part, each having a centre axis and comprising;
 - an electrical connection in a first end, and
 - a fluid channel extending at least partly through the string part, and
- 20 - a connecting element rotatably connected to one string part and adapted to be threadably connected to a threaded portion of the other string part, to join the electrical connections of the first and second string parts;
wherein one of the string parts comprises a pipe connection extending in the longitudinal direction from the first end and into the fluid channel of the other
25 string part when the string parts are mutually connected by the connecting element, the pipe connection being arranged eccentrically in relation to the centre axis for preventing mutual rotation of the string parts.

Hereby, a connection for transferring both electrical power and fluid between two
30 string parts of a tool string may be provided. The connection has the necessary rigidity to provide and maintain a fluid-tight seal between the fluid channels of the first and second string parts. Furthermore, the electrical wires are not twisted or bent.

35 In one embodiment, one of the string parts may comprise at least two pipe connections.

In another embodiment, one of the string parts may comprise a guide pin and the other string part may comprise a hole for receiving the guide pin when the string parts are mutually connected by the connecting element.

- 5 Further, the connecting element may comprise two connectable collar elements adapted to be mutually connected around a section of one of the string parts.

Moreover, the connecting element may comprise an outer threaded portion.

- 10 Also, the connecting element may be arranged around a protrusion of one of the string parts, having a reduced diameter compared to a maximum diameter of the string part.

- 15 Additionally, the connecting element may be arranged in a recess of one of the string parts, whereby the connecting element is prevented from substantially moving in the longitudinal direction.

- Furthermore, the connecting element may be prevented from substantially moving in the longitudinal direction towards the first end by a protruding part of
20 the string part having an increased outer diameter.

Said connecting element may have an outer diameter being equal to or less than an outer diameter of the tool string.

- 25 Also, the connecting element may have an outer diameter being equal to or less than a minimum outer diameter of the tool string.

- In one embodiment, the pipe connection may comprise a circumferential sealing element adapted to provide a fluid-tight seal between the pipe connection and
30 the corresponding fluid channel into which it extends.

- In addition, one of the string parts may comprise a circumferential sealing element adapted to provide a fluid-tight seal between the first and second string parts.

35

In one embodiment, one of the string parts may be a driving unit for propelling the tool string in the well.

The present invention furthermore relates to a method for assembling two string parts of a tool string, the method comprising the steps of:

- moving a first end of a first string part towards a first end of a second string part,
- 5 - arranging a guide pin of one of the string parts in a hole in another string part,
- connecting a threaded portion of a connecting element rotatably connected to one of the string parts with a threaded portion of the other string part, and
- rotating the connecting element to join electrical connections of the first and second string parts and to force a pipe connection of one string part into a hole in
- 10 fluid communication with a fluid channel of the other string part.

Brief description of the drawings

The invention and its many advantages will be described in more detail below
15 with reference to the accompanying schematic drawings, which for the purpose of illustration show some non-limiting embodiments and in which

Fig. 1 shows a tool string being suspended in a well,

20 Fig. 2 shows the ends of two string parts in an assembled state being connected by a connecting element,

Figs. 3a and 3b show layouts of the end faces of two string parts adapted to be assembled,

25

Fig. 4 shows a connecting element comprising two connectable collar elements, and

Fig. 5 shows a tool string comprising a downhole tractor having wheel sections.

30

All the figures are highly schematic and not necessarily to scale, and they show only those parts which are necessary in order to elucidate the invention, other parts being omitted or merely suggested.

35

Detailed description of the invention

Fig. 1 shows a tool string 1 being suspended in a well 4 from a wireline 5. The tool string 1 may also be suspended using coiled tubing or by being part of a drill string. The shown well comprises a casing 14, but the tool string 1 may also be used in an uncased well.

The tool string 1 extends in a longitudinal direction and comprises at least a first tool string part 2 and a second tool string part 3. A first end 200 of the first string part 2 and a first end 400 of the second string part 3 are connected via a connecting element 6 arranged between the two string parts 2, 3 in the longitudinal direction. The dotted lines in Fig. 1 illustrate how part of the first end 200 of the first string part extends through the connecting element 6 and into the first end 400 of the second string part.

15

Referring to Fig. 2, the connection shown in Fig. 1 between the first string part 2 and the second string part 3 will be described in further detail below. For the purpose of clarity, the connecting element 6 and part of the second string part 3 have been cut through and are shown in a cross-sectional view.

20

The string parts 2, 3 and the connecting element 6 each have a circular cross-section. In the first end 200, the first string part 2 comprises a protrusion 27 having a reduced diameter 37b. The protrusion 27 extends between a face 39 of the first string part and an end face 201. Towards the end face 201, the protrusion 27 comprises a circumferential projecting flange 29. Together with the face 39, the projecting flange 29 defines a recess 28 encircling the protrusion 27. At the end face 201, a plurality of pipe connections 22, 23, 24 and a guide pin 26 extend. Further, an electrical connection, such as a plug 21, is provided in the end face 201, and a circumferential seal 33 is arranged around the protrusion 27 adjacent the end face 201. Each of the pipe connections extends in the longitudinal direction 10 from the end face 201 towards a tapered free end. At a distance from the tapered end, a circumferential seal 30, 31 is arranged around each of the pipe connections. The guide pin 26 also extends in the longitudinal direction from the end face 201 towards a tapered free end. The connecting element 6 is provided around the protrusion 27 in a recess 28 of the reduced diameter. . The connecting element 6 is comprised by two connectable collar elements 601, 602, as shown in Fig. 4. During assembly, the two collar elements

601, 602 are arranged in the recess 28 around the protrusion 27 and are connected by bolts 62. The connecting element 6 is thereby rotatably connected to the first string part 2 and restricted from moving in the longitudinal direction by the face 39 and the projecting flange 29. The connecting element 6 comprises
5 an outer threaded portion 61 adapted to be connected to a threaded portion 48 of the second string part 3, as shown in Fig. 2. It is obvious to the person skilled in the art that the connecting element may be designed in a number of other ways without departing from the essence of the invention. Providing a rotatably connected connecting element 6 may be achieved in a number of different ways
10 known to the skilled person, such as by applying a swivel connection, a ball and socket joint or other types of connections connecting two separate objects while allowing mutual rotation.

In the first end 400, the second string part 3 comprises a bore 47 adapted to
15 receive the protrusion 27 of the first string part 2 and the connecting element 6. The bore is encircled by a threaded portion 48 of the second string part 3 adapted to be connected to the threaded portion 61 of the connecting element 6. At one end, the bore 47 is delimited by a face 401 comprising a plurality of holes 42, 43, 44 adapted to receive the pipe connections 22, 23, 24, as shown in Figs.
20 3a and 3b. The face 401 further comprises a hole 46 adapted to receive the guide pin 26 and an electrical connection, such as a socket 41, adapted to be connected to the plug 21, as shown in Fig. 3a and Fig. 3b.

An approximated layout of the protruding pipe connections 22, 23, 24, guide pin
25 26 and plug 21 is shown in Fig. 3a, and a layout of the matching holes 42, 43, 44 and socket 41 is shown in Fig. 3b. The pipe connections 22, 23, 24 are fluidly connected to respective fluid channels 220, 240 in the first string part, and the holes 42, 43, 44 are in fluid communication with respective fluid channels 420, 440 in the second string part 3. By arranging the pipe connections 22, 23, 24 in
30 the respective holes 42, 43, 44, the fluid channels 220, 240 of the first string part are brought into fluid communication with the fluid channels of the second string part. In a similar manner, the plug 21 and the socket 41 provide an electrical connection between the first and second string parts.

35 As shown in Figs. 3a and 3b, the pipe connections 22, 23, 24 of the first string part 2 and the respective holes 42, 43, 44 in the second string part 3 are arranged eccentrically in relation to a centre axis 10. By at least one of the pipe

connections 22, 23, 24 being arranged eccentrically at a distance from the centre axis, the first and second string parts 2, 3 are prevented from mutually rotating around the centre axis 10. The one or more pipe connections thus have the additional functionality of fixating the string parts in relation to one another, both
5 during assembly of the string parts and use of the tool string downhole.

The guide pin 26 extends further away from the end face 201 than the pipe connections. During assembly of the first and second string parts, the guide pin 26 is thus inserted into the hole 46 to control the assembly process and prevent
10 damage caused by the string parts being rotated or angled in relation to one another. The plug and socket and the pipe connections may be bent or destroyed if the string parts are not properly aligned during assembly and disassembly. When the guide pin 26 is at least partially arranged in the hole 46, the two string parts are kept substantially parallel relative to each other. By having a guide pin,
15 the first and second string parts are prevented from tilting slightly in the connection therebetween. Such slight tilting in the connection itself may result in the pipe connections leaking, either because the pipe connection being an integral part of the one end of the string parts has been bent and thus slightly separated, forming a fracture, or because the pipe connection as a separate part
20 has tilted in the holes.

The pipe connections may be integral parts of one of the string parts or they may be separate pipes. One pipe connection may be arranged in one string part and another pipe connection in the other so that, when joining the string parts, the
25 pipe connections function as guides during the assembly process.

The connecting element 6 is arranged in the recess 28 of the first string part, and in Fig. 2, the first string part 2 also comprises the pipe connection and the pin. However, the connecting element 6 may be arranged in the recess of the first
30 string part, and the pipe connection and the pin may be arranged in the second string part 3.

Fig. 5 shows a downhole tractor 81 being part of a tool string 1, wherein two string parts 2, 3 are assembled using the connecting element 6 described above.
35 The downhole tractor is suspended from and powered through a wireline 5 connected with the downhole tractor through a top connector 71. The downhole tractor 81 comprises an electronics section 72, an electrical motor 73, a hydraulic

- pump 74 and two wheel sections 80 driven by hydraulics. The wheel sections are in fluid communication with the hydraulic pump 74 and may also be denoted as driving units 80 for propelling the downhole tractor and the tool string in the well. The downhole tractor may be connected to one or more operational downhole tools 75 also being part of the tool string 1. Such operational tools could be a stoker tool providing an axial force in one or more strokes, a key tool opening or closing valves in the well, positioning tools such as a casing collar locator (CCL), a milling tool, a drilling tool, etc.
- 10 The connection between two string parts 2, 3, e.g. two wheel sections 80 of a downhole tractor, may be used for transferring fluid(s) and/or electrical power. Electrical power may be transferred from the wireline 5 to the first string part and via the plug 21 and socket 41 to the subsequent string part. The pipe connection 22 may be used for connecting fluid channels providing a pressurised fluid from the hydraulic pump 74 to the wheel sections for projecting pivotally mounted wheel arms 76. The pipe connection 24 may be used for connecting fluid channels providing a pressurised fluid from the hydraulic pump 74 to the wheel sections for rotating wheels 77 mounted at the wheel arms 76 in a clockwise direction. The pipe connection 23 may be used for connecting fluid channels providing a pressurised fluid from the hydraulic pump 74 to the wheel sections for rotating wheels 77 mounted at the wheel arms 76 in a counterclockwise direction. The pipe connection 25 and the hole 45 may be used for connecting fluid channels providing a return channel for fluid supplied to the wheel sections.
- 25 By fluid or well fluid is meant any kind of fluid that may be present in oil or gas wells downhole, such as natural gas, oil, oil mud, crude oil, water, etc. By gas is meant any kind of gas composition present in a well, completion, or open hole, and by oil is meant any kind of oil composition, such as crude oil, an oil-containing fluid, etc. Gas, oil, and water fluids may thus all comprise other elements or substances than gas, oil, and/or water, respectively.
- 30 By rotatably connected is meant that a first rotatable object is connected to a second object so that the first object may rotate while being connected to the second object and the connection between the first and the second object is maintained during rotation of the first object in relation to the second object. By a casing is meant any kind of pipe, tubing, tubular, liner, string etc. used downhole in relation to oil or natural gas production.

In the event that the tools are not submergible all the way into the casing, a downhole tractor can be used to push the tools all the way into position in the well. A downhole tractor is any kind of driving tool capable of pushing or pulling
5 tools in a well downhole, such as a Well Tractor®.

Although the invention has been described in the above in connection with preferred embodiments of the invention, it will be evident for a person skilled in the art that several modifications are conceivable without departing from the
10 invention as defined by the following claims.

Claims

1. A tool string (1) for being suspended in a well (4), the tool string extending in a longitudinal direction and comprising:
 - 5 - a first string part (2) and a second string part (3), each having a centre axis (10) and comprising;
 - an electrical connection (21, 41) in a first end (200, 400), and
 - a fluid channel (220, 240, 420, 440) extending at least partly through the string part, and
 - 10 - a connecting element (6) rotatably connected to one string part and adapted to be threadably connected to a threaded portion (48) of the other string part in order to join the electrical connections of the first and second string parts;
wherein one of the string parts comprises a pipe connection (22, 23, 24) extending in the longitudinal direction from the first end and into the fluid
 - 15 channel of the other string part when the string parts are mutually connected by the connecting element, the pipe connection being arranged eccentrically in relation to the centre axis for preventing mutual rotation of the string parts.
2. A tool string according to claim 1, wherein one of the string parts comprises
20 at least two pipe connections (22, 23, 24).
3. A tool string according to claim 1 or 2, wherein one of the string parts comprises a guide pin (26) and the other string part comprises a hole (46) for receiving the guide pin when the string parts are mutually connected by the
25 connecting element.
4. A tool string according to any of the preceding claims, wherein the connecting element comprises two connectable collar elements (601, 602) adapted to be mutually connected around a section (27) of one of the string
30 parts.
5. A tool string according to any of the preceding claims, wherein the connecting element comprises an outer threaded portion (61).
- 35 6. A tool string according to any of the preceding claims, wherein the connecting element is arranged around a protrusion (27) of one of the string

parts having a reduced diameter (37b) compared to a maximum diameter of the string part.

7. A tool string according to any of the preceding claims, wherein the
5 connecting element is arranged in a recess (28) of one of the string parts, whereby the connecting element is prevented from substantially moving in the longitudinal direction.

8. A tool string according to any of the preceding claims, wherein the
10 connecting element is prevented from substantially moving in the longitudinal direction towards the first end by a protruding part (29) of the string part having an increased outer diameter.

9. A tool string according to any of the preceding claims, wherein the
15 connecting element has an outer diameter (66) being equal to or less than an outer diameter (37a) of the tool string.

10. A tool string according to any of the preceding claims, wherein the pipe
connection comprises a circumferential sealing element (30, 31) adapted to
20 provide a fluid-tight seal between the pipe connection and the corresponding fluid channel (420, 440) into which it extends.

11. A tool string according to any of the preceding claims, wherein one of the
string parts comprises a circumferential sealing element (33) adapted to provide
25 a fluid-tight seal between the first and second string parts.

12. A tool string according to any of the preceding claims, wherein one of the
string parts is a driving unit (80) for propelling the tool string in the well.

30 13. A method for assembling two string parts (2, 4) of a tool string (1), the method comprising the steps of:
- moving a first end (200) of a first string part (2) towards a first end (400) of a second string part (3),
- arranging a guide pin (26) of one of the string parts in a hole (46) in another
35 string part,

- connecting a threaded portion (61) of a connecting element (6) rotatably connected to one of the string parts with a threaded portion (48) of the other string part, and
 - rotating the connecting element to join electrical connections of the first and
- 5 second string parts and to force a pipe connection (22, 23, 24) of one string part into a hole (42, 43, 44) in fluid communication with a fluid channel (420, 440) of the other string part.

1/5

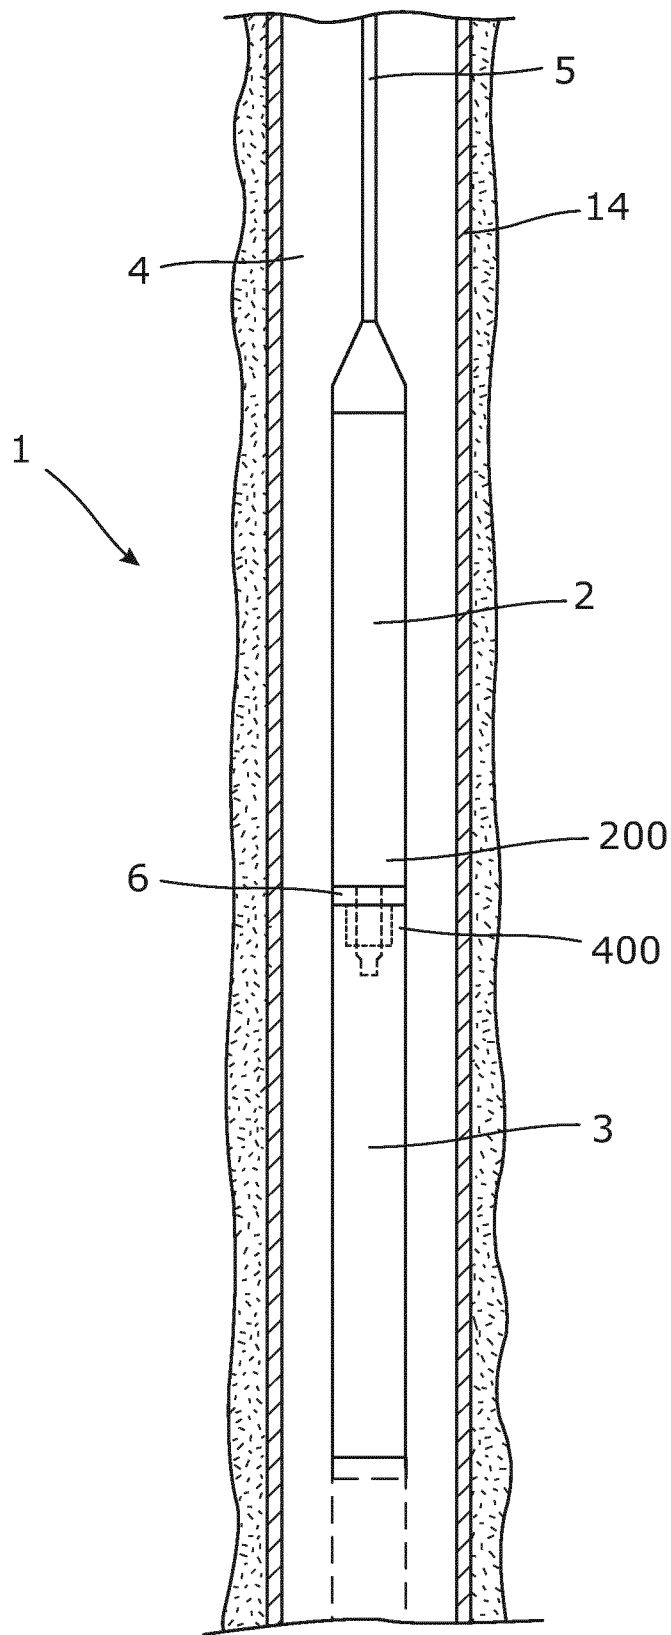


Fig. 1



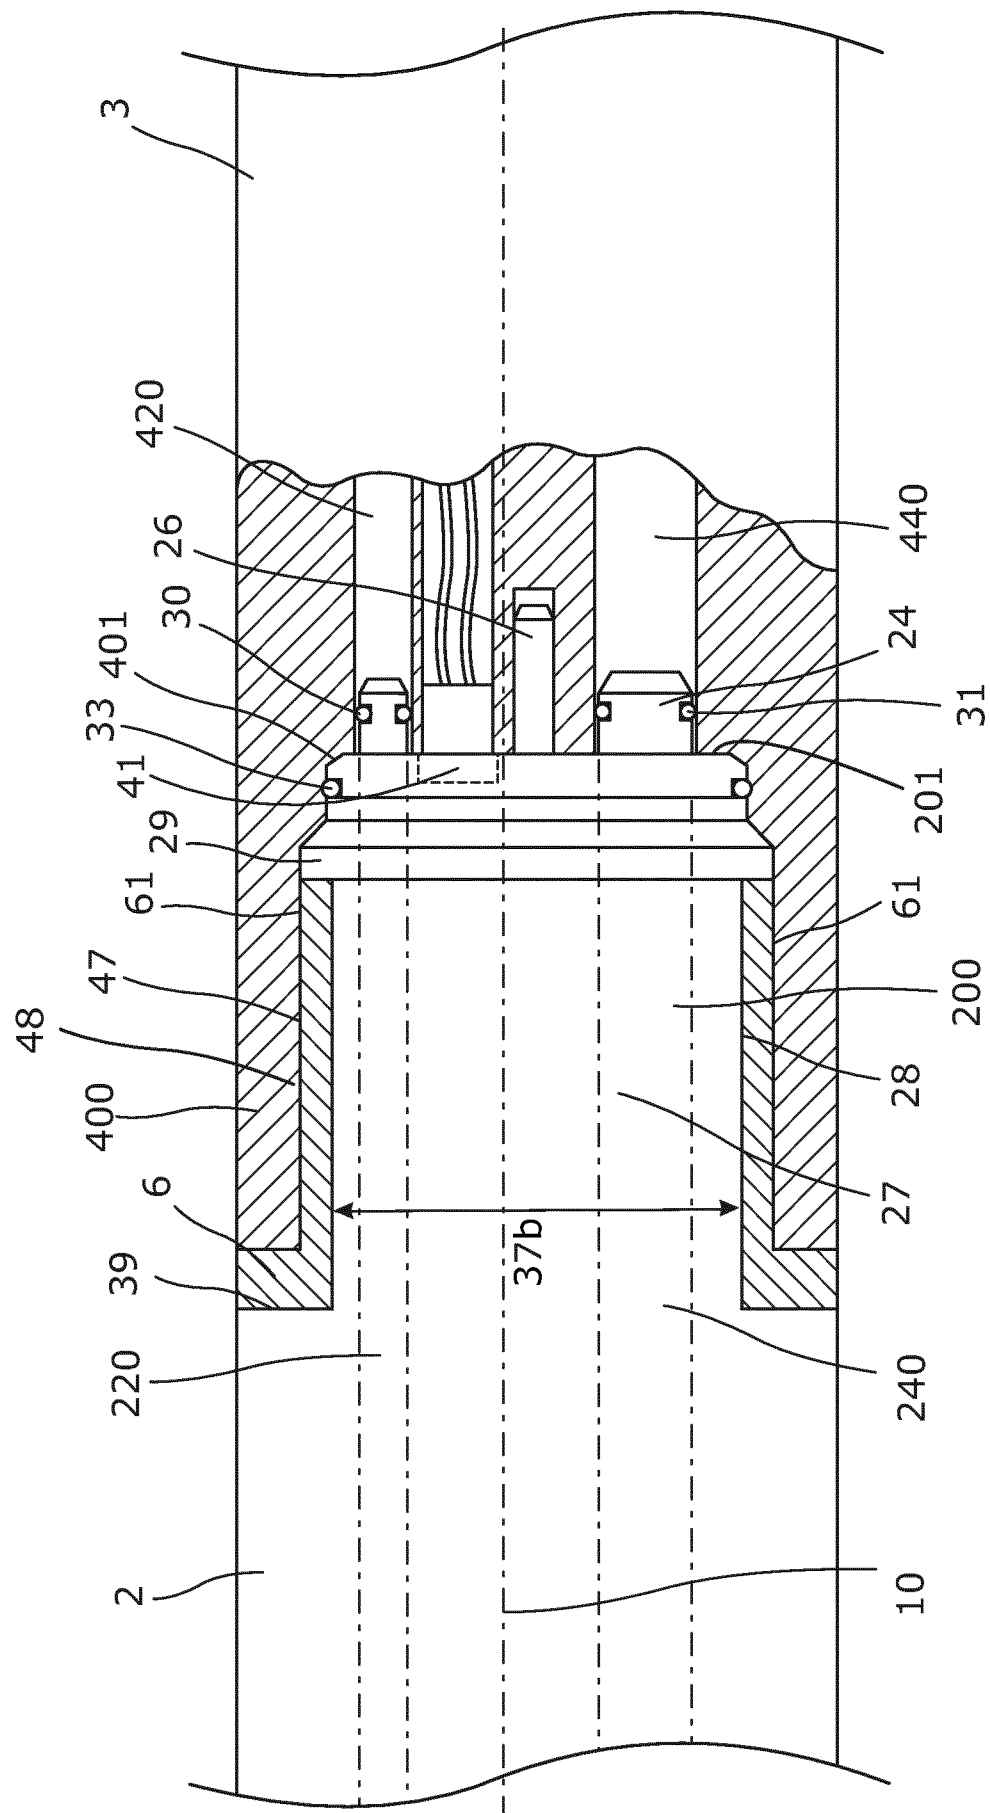


Fig. 2

3/5

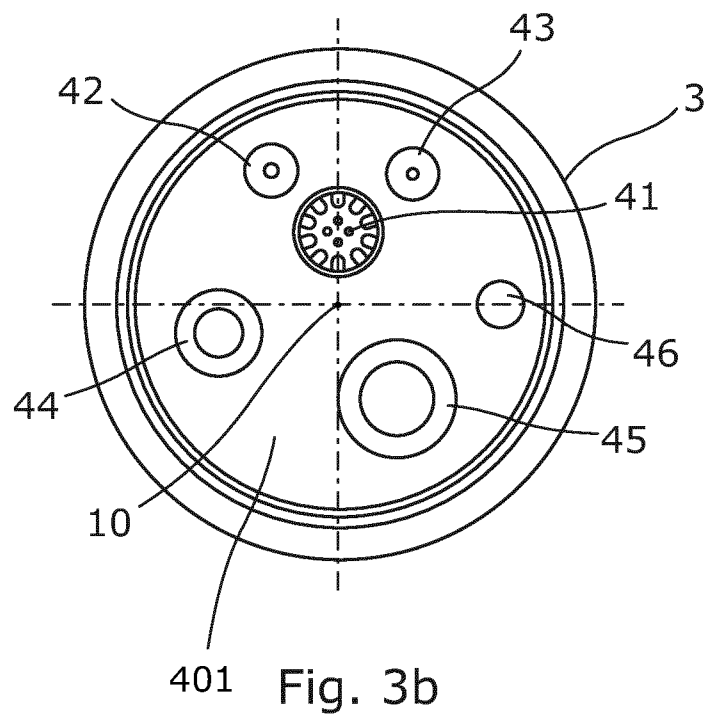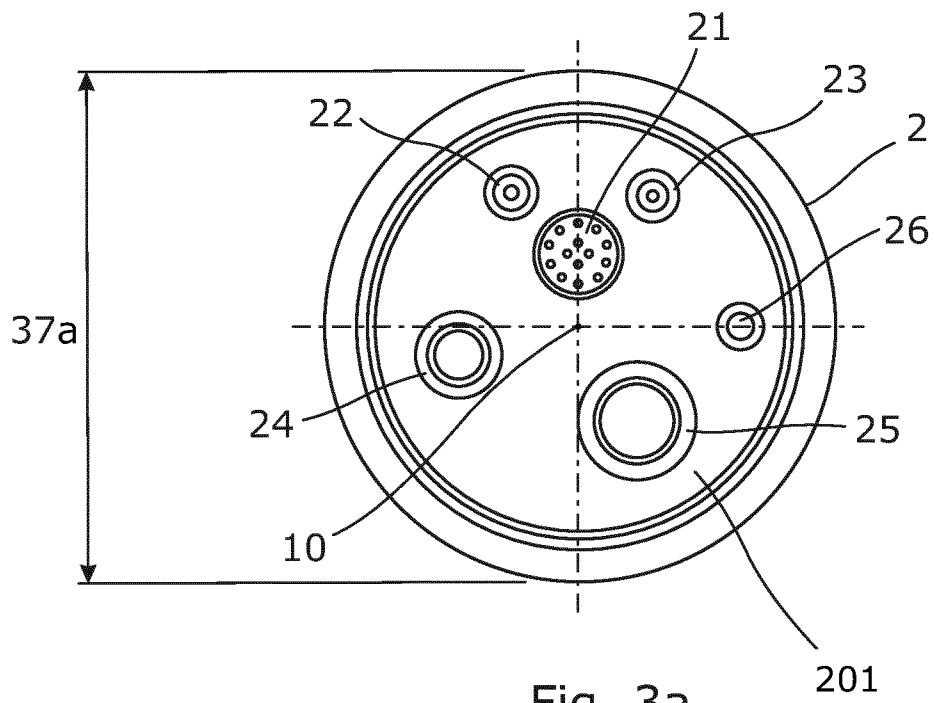

4/5

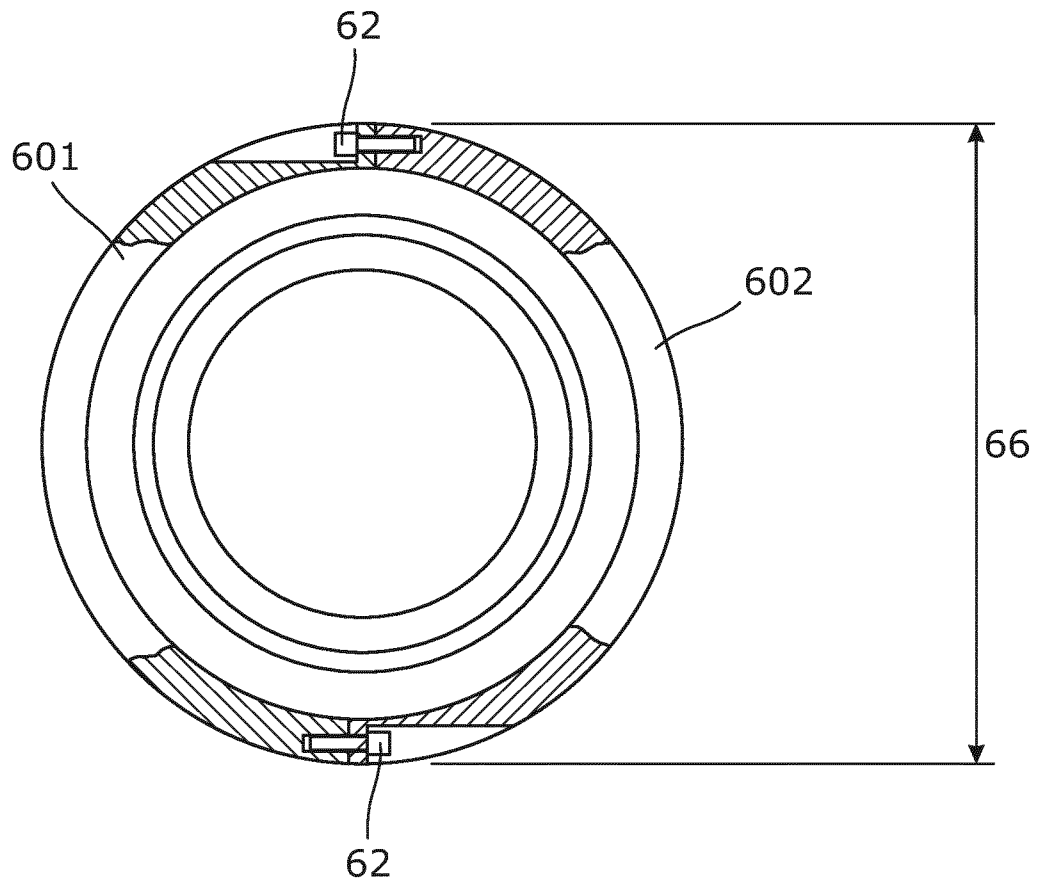


Fig. 4

5/5

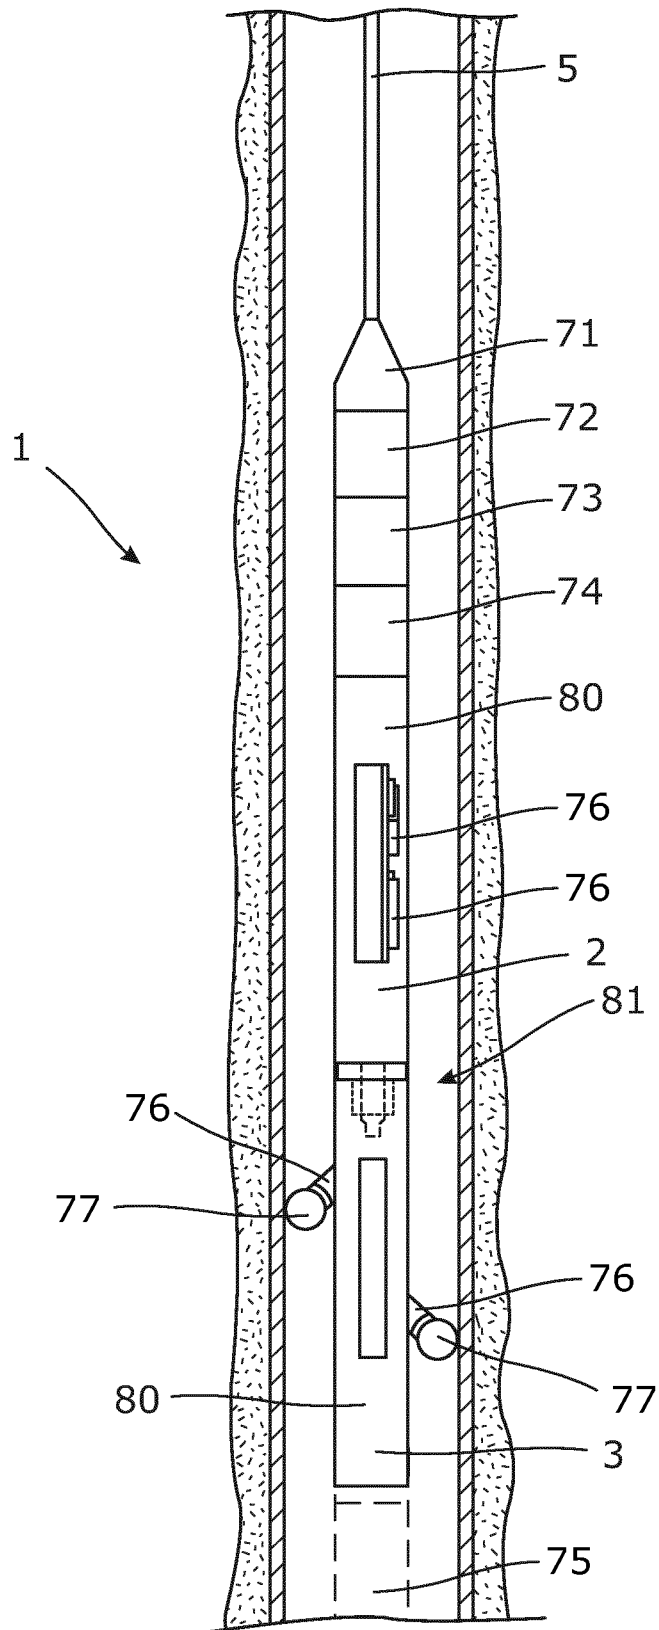


Fig. 5

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2012/057802

A. CLASSIFICATION OF SUBJECT MATTER
INV. E21B17/02 E21B17/18
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009/229817 A1 (PARTOUCHE ASHERS [US]) 17 September 2009 (2009-09-17) page 4, paragraph 52 - page 5, paragraph 60; figures 3,4 -----	1-13
A	US 2009/195250 A1 (WELSHANS DAVID [US] ET AL) 6 August 2009 (2009-08-06) page 5, paragraph 54 - paragraph 61; figure 8 -----	1-13
A	WO 2010/122342 A1 (ARTIFICIAL LIFT COMPANY LTD [GB]; HEAD PHILIP [GB]) 28 October 2010 (2010-10-28) the whole document -----	1-13
A	US 2007/275585 A1 (GRIFFITHS NEIL [NL]) 29 November 2007 (2007-11-29) the whole document -----	1-13



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 May 2012

Date of mailing of the international search report

06/06/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Morrish, Susan

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2012/057802

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2009229817 A1	17-09-2009	CA 2549113 A1	15-12-2006
		CA 2689858 A1	15-12-2006
		CN 1880723 A	20-12-2006
		CN 101240694 A	13-08-2008
		DE 102006027545 A1	11-01-2007
		FR 2887286 A1	22-12-2006
		FR 2914005 A1	26-09-2008
		GB 2427214 A	20-12-2006
		GB 2444372 A	04-06-2008
		US 2006283606 A1	21-12-2006
		US 2009229817 A1	17-09-2009
US 2009195250 A1	06-08-2009	AU 2007257804 A1	21-12-2007
		BR PI0712334 A2	31-01-2012
		CA 2651054 A1	21-12-2007
		CN 101466915 A	24-06-2009
		EP 2027365 A2	25-02-2009
		US 2009195250 A1	06-08-2009
		WO 2007146801 A2	21-12-2007
WO 2010122342 A1	28-10-2010	CA 2759436 A1	28-10-2010
		WO 2010122342 A1	28-10-2010
US 2007275585 A1	29-11-2007	AU 2004282358 A1	28-04-2005
		BR PI0414977 A	07-11-2006
		CA 2540972 A1	28-04-2005
		CN 1863982 A	15-11-2006
		GB 2422168 A	19-07-2006
		US 2007275585 A1	29-11-2007
		WO 2005038190 A1	28-04-2005