




(86) Date de dépôt PCT/PCT Filing Date: 2003/07/10
(87) Date publication PCT/PCT Publication Date: 2004/03/04
(45) Date de délivrance/Issue Date: 2010/11/16
(85) Entrée phase nationale/National Entry: 2005/02/08
(86) N° demande PCT/PCT Application No.: EP 2003/007463
(87) N° publication PCT/PCT Publication No.: 2004/018129
(30) Priorité/Priority: 2002/08/08 (DE102 36 367.6)

(51) Cl.Int./Int.Cl. *B22D 11/12* (2006.01)
(72) Inventeurs/Inventors:
ZAJBER, ADOLF-GUSTAV, DE;
BEYER-STEINHAUER, HOLGER, DE;
GEERKENS, CHRISTIAN, DE;
WEYER, AXEL, DE
(73) Propriétaire/Owner:
SMS SIEMAG AKTIENGESELLSCHAFT, DE
(74) Agent: RICHES, MCKENZIE & HERBERT LLP

(54) Titre : PROCEDE ET DISPOSITIF DE REGLAGE DYNAMIQUE DE SEGMENTS DE ROULEAU SOUTENANT
ET/OU GUIDANT DES DEUX COTES UNE BARRE DE COULEE EN METAL, NOTAMMENT EN ACIER
(54) Title: METHOD AND DEVICE FOR DYNAMICALLY RESTING ROLLER SEGMENTS THAT SUPPORT AND/OR
GUIDE BOTH SIDES OF A CAST BAR MADE OF METAL, PARTICULARLY STEEL

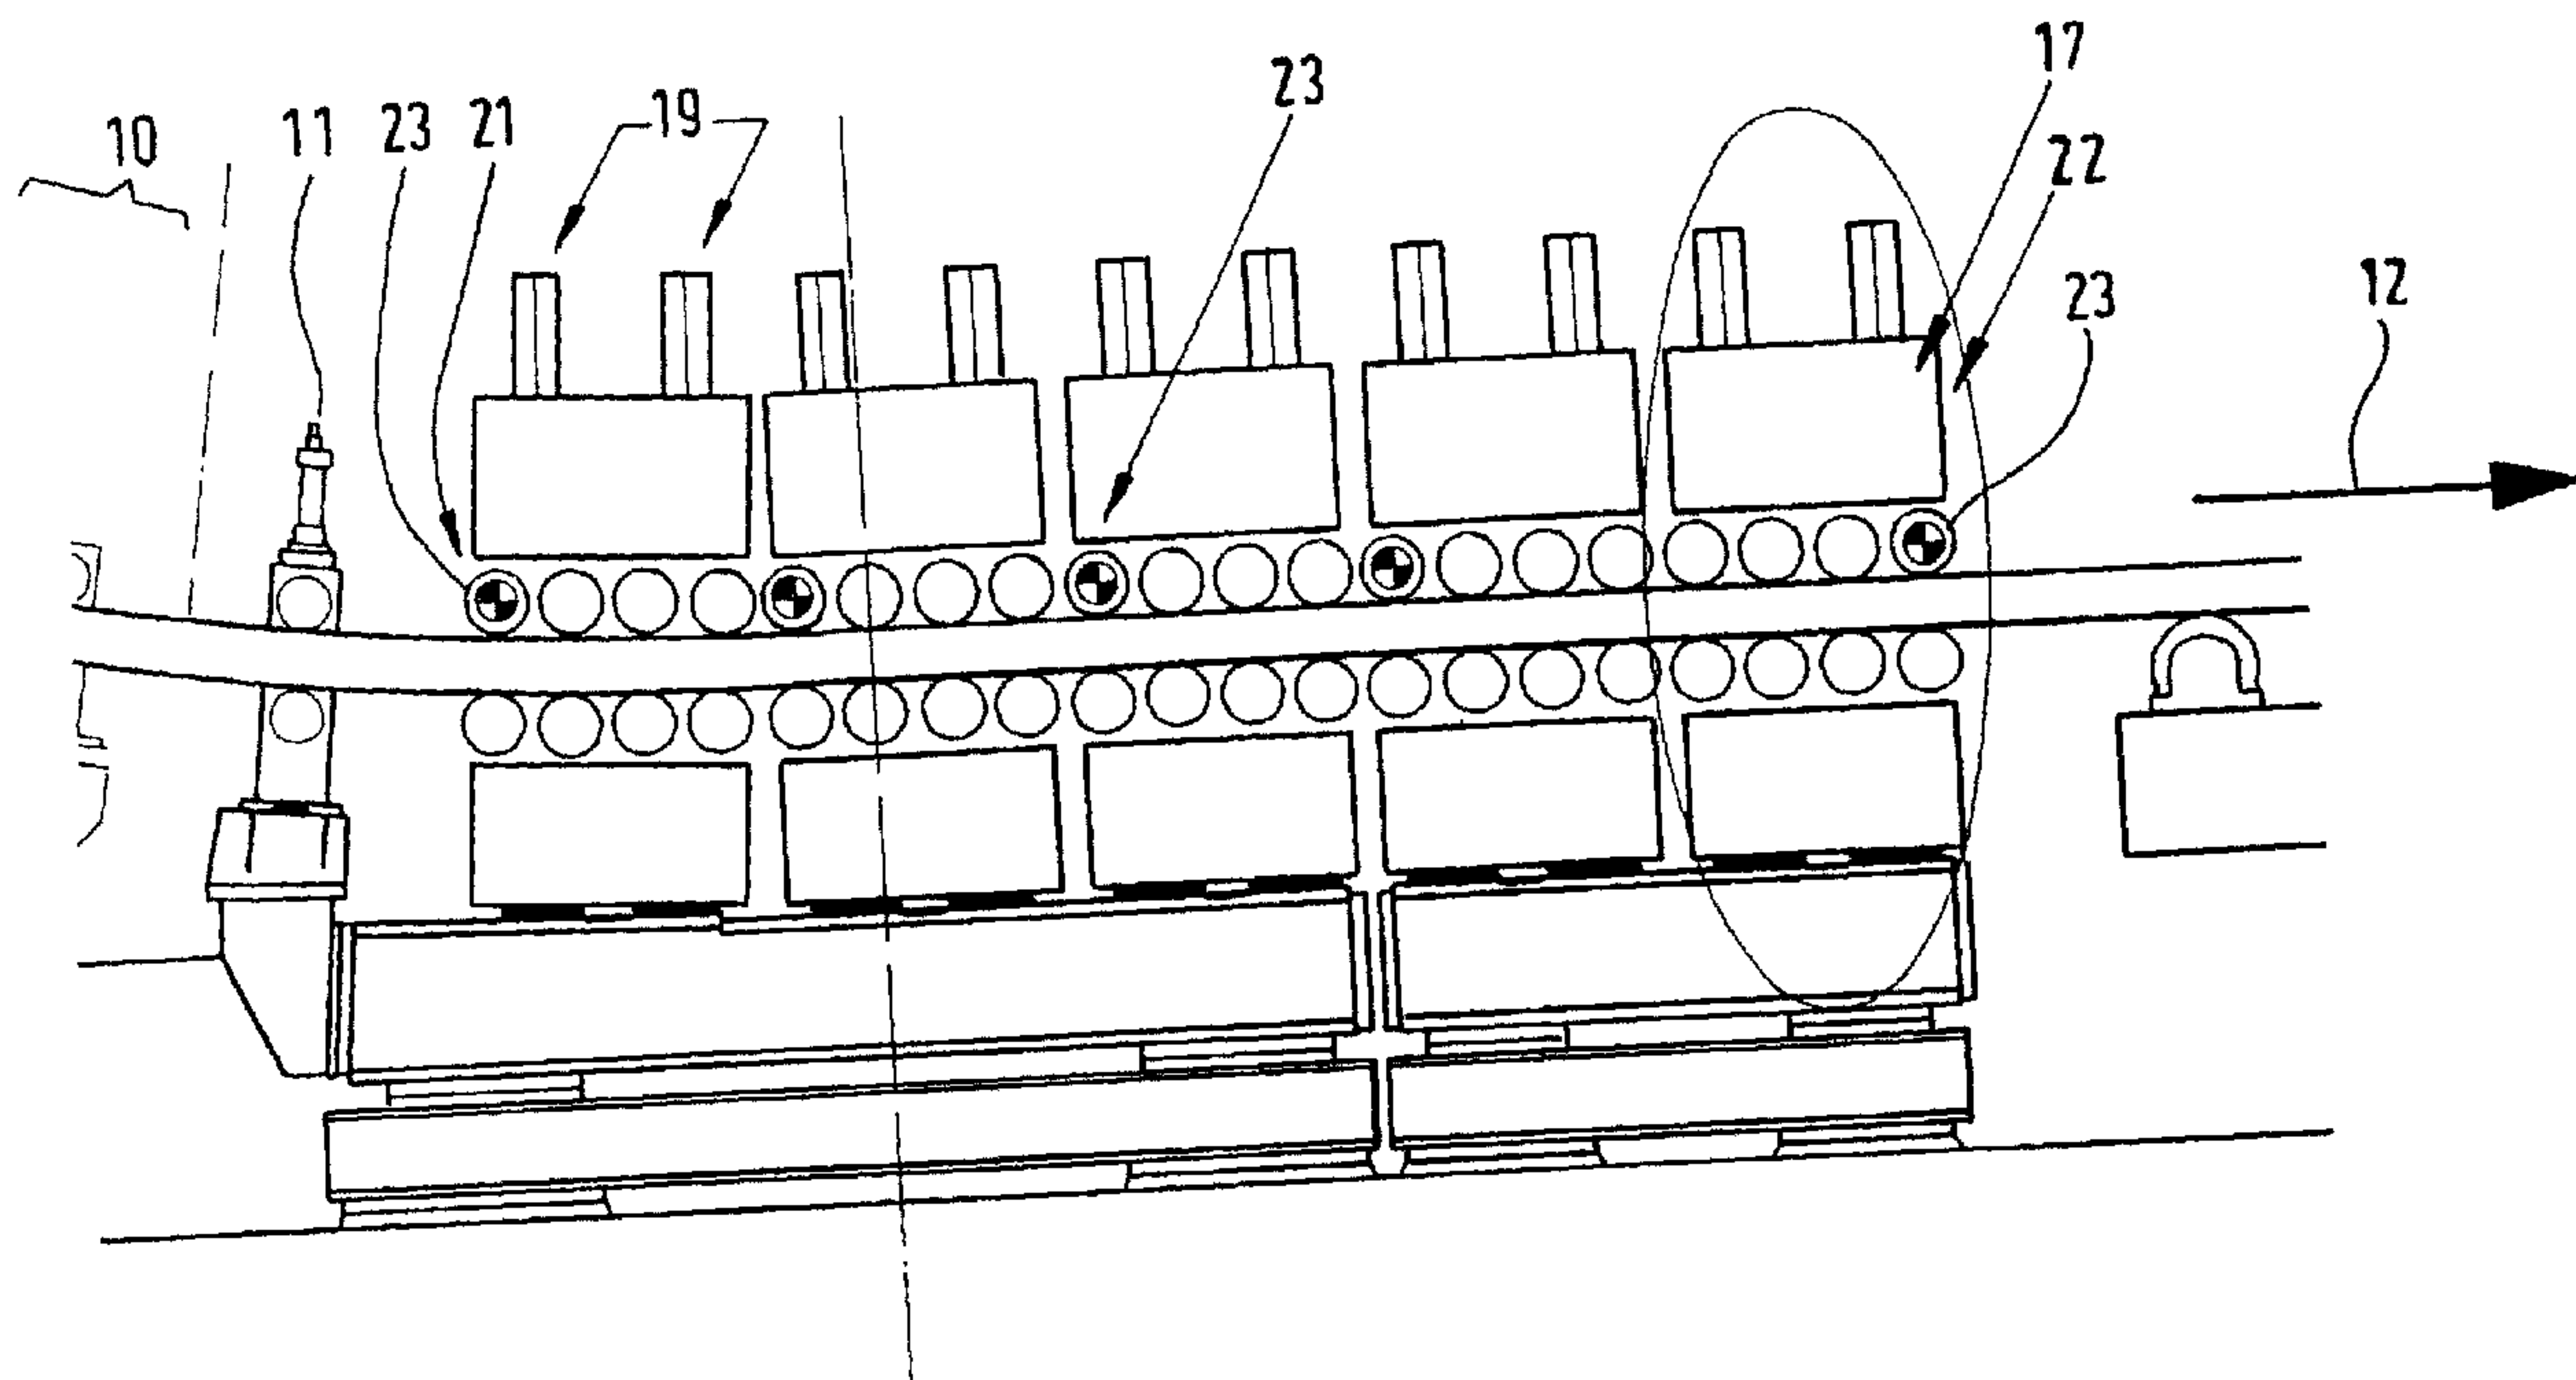

(57) **Abrégé/Abstract:**

Disclosed are a method and a continuous casting device for dynamically placing roller segments (13 to 17) against a cast bar (4) made of metal, particularly steel. The inventive continuous casting device comprises pairs of rollers (18) which are placed against each other in a position-controlled and pressure-controlled manner by means of piston-cylinder units (19), the hydraulic pressure being switched from position-controlled operation to pressure-controlled operation when a threshold pressure is reached. In order to extend the range of applications of the inventive method, said method is applied to roller segments (13 to 17) of continuous bloom and billet casting devices, said roller segments (13 to 17) being arranged in the cold bar zone, hot bar zone, or soft reduction zone.



(12) NACH DEM VERTRAG ÜBER DIE INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES
PATENTWESENS (PCT) VERÖFFENTLICHTE INTERNATIONALE ANMELDUNG(19) Weltorganisation für geistiges Eigentum
Internationales Büro(43) Internationales Veröffentlichungsdatum
4. März 2004 (04.03.2004)

PCT


(10) Internationale Veröffentlichungsnummer
WO 2004/018129 A1

- (51) Internationale Patentklassifikation⁷: **B22D 11/12** (72) Erfinder; und
(21) Internationales Aktenzeichen: PCT/EP2003/007463 (75) Erfinder/Anmelder (*nur für US*): **ZAJBER, Adolf-Gustav** [DE/DE]; Gartenstrasse 7, 40764 Langenfeld (DE). **BEYER-STEINHAUER, Holger** [DE/DE]; Am Freistein 127, 40822 Mettmann (DE). **GEERKENS, Christian** [DE/DE]; Garzweiler Allee 23, 41363 Jüchen (DE). **WEYER, Axel** [DE/DE]; Nachtigallenweg 47, 42349 Wuppertal (DE).
- (22) Internationales Anmeldedatum:
10. Juli 2003 (10.07.2003)
- (25) Einreichungssprache: Deutsch
- (26) Veröffentlichungssprache: Deutsch
- (30) Angaben zur Priorität:
102 36 367.6 8. August 2002 (08.08.2002) DE
- (71) Anmelder (*für alle Bestimmungsstaaten mit Ausnahme von US*): **SMS DEMAG AKTIENGESELLSCHAFT** [DE/DE]; Eduard Schloemann-Strasse 4, 40237 Düsseldorf (DE).
- (81) Bestimmungsstaaten (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,

[Fortsetzung auf der nächsten Seite]

(54) Title: METHOD AND DEVICE FOR DYNAMICALLY RESTING ROLLER SEGMENTS THAT SUPPORT AND/OR GUIDE BOTH SIDES OF A CAST BAR MADE OF METAL, PARTICULARLY STEEL

(54) Bezeichnung: VERFAHREN UND VORRICHTUNG ZUM DYNAMISCHEN ANSTELLEN VON EINEN GIESSSTRANG AUS METALL, INSBESONDERE AUS STAHL, BEIDSEITIG STÜTZENDEN UND/ODER FÜHRENDEN ROLLENSEGMENTEN

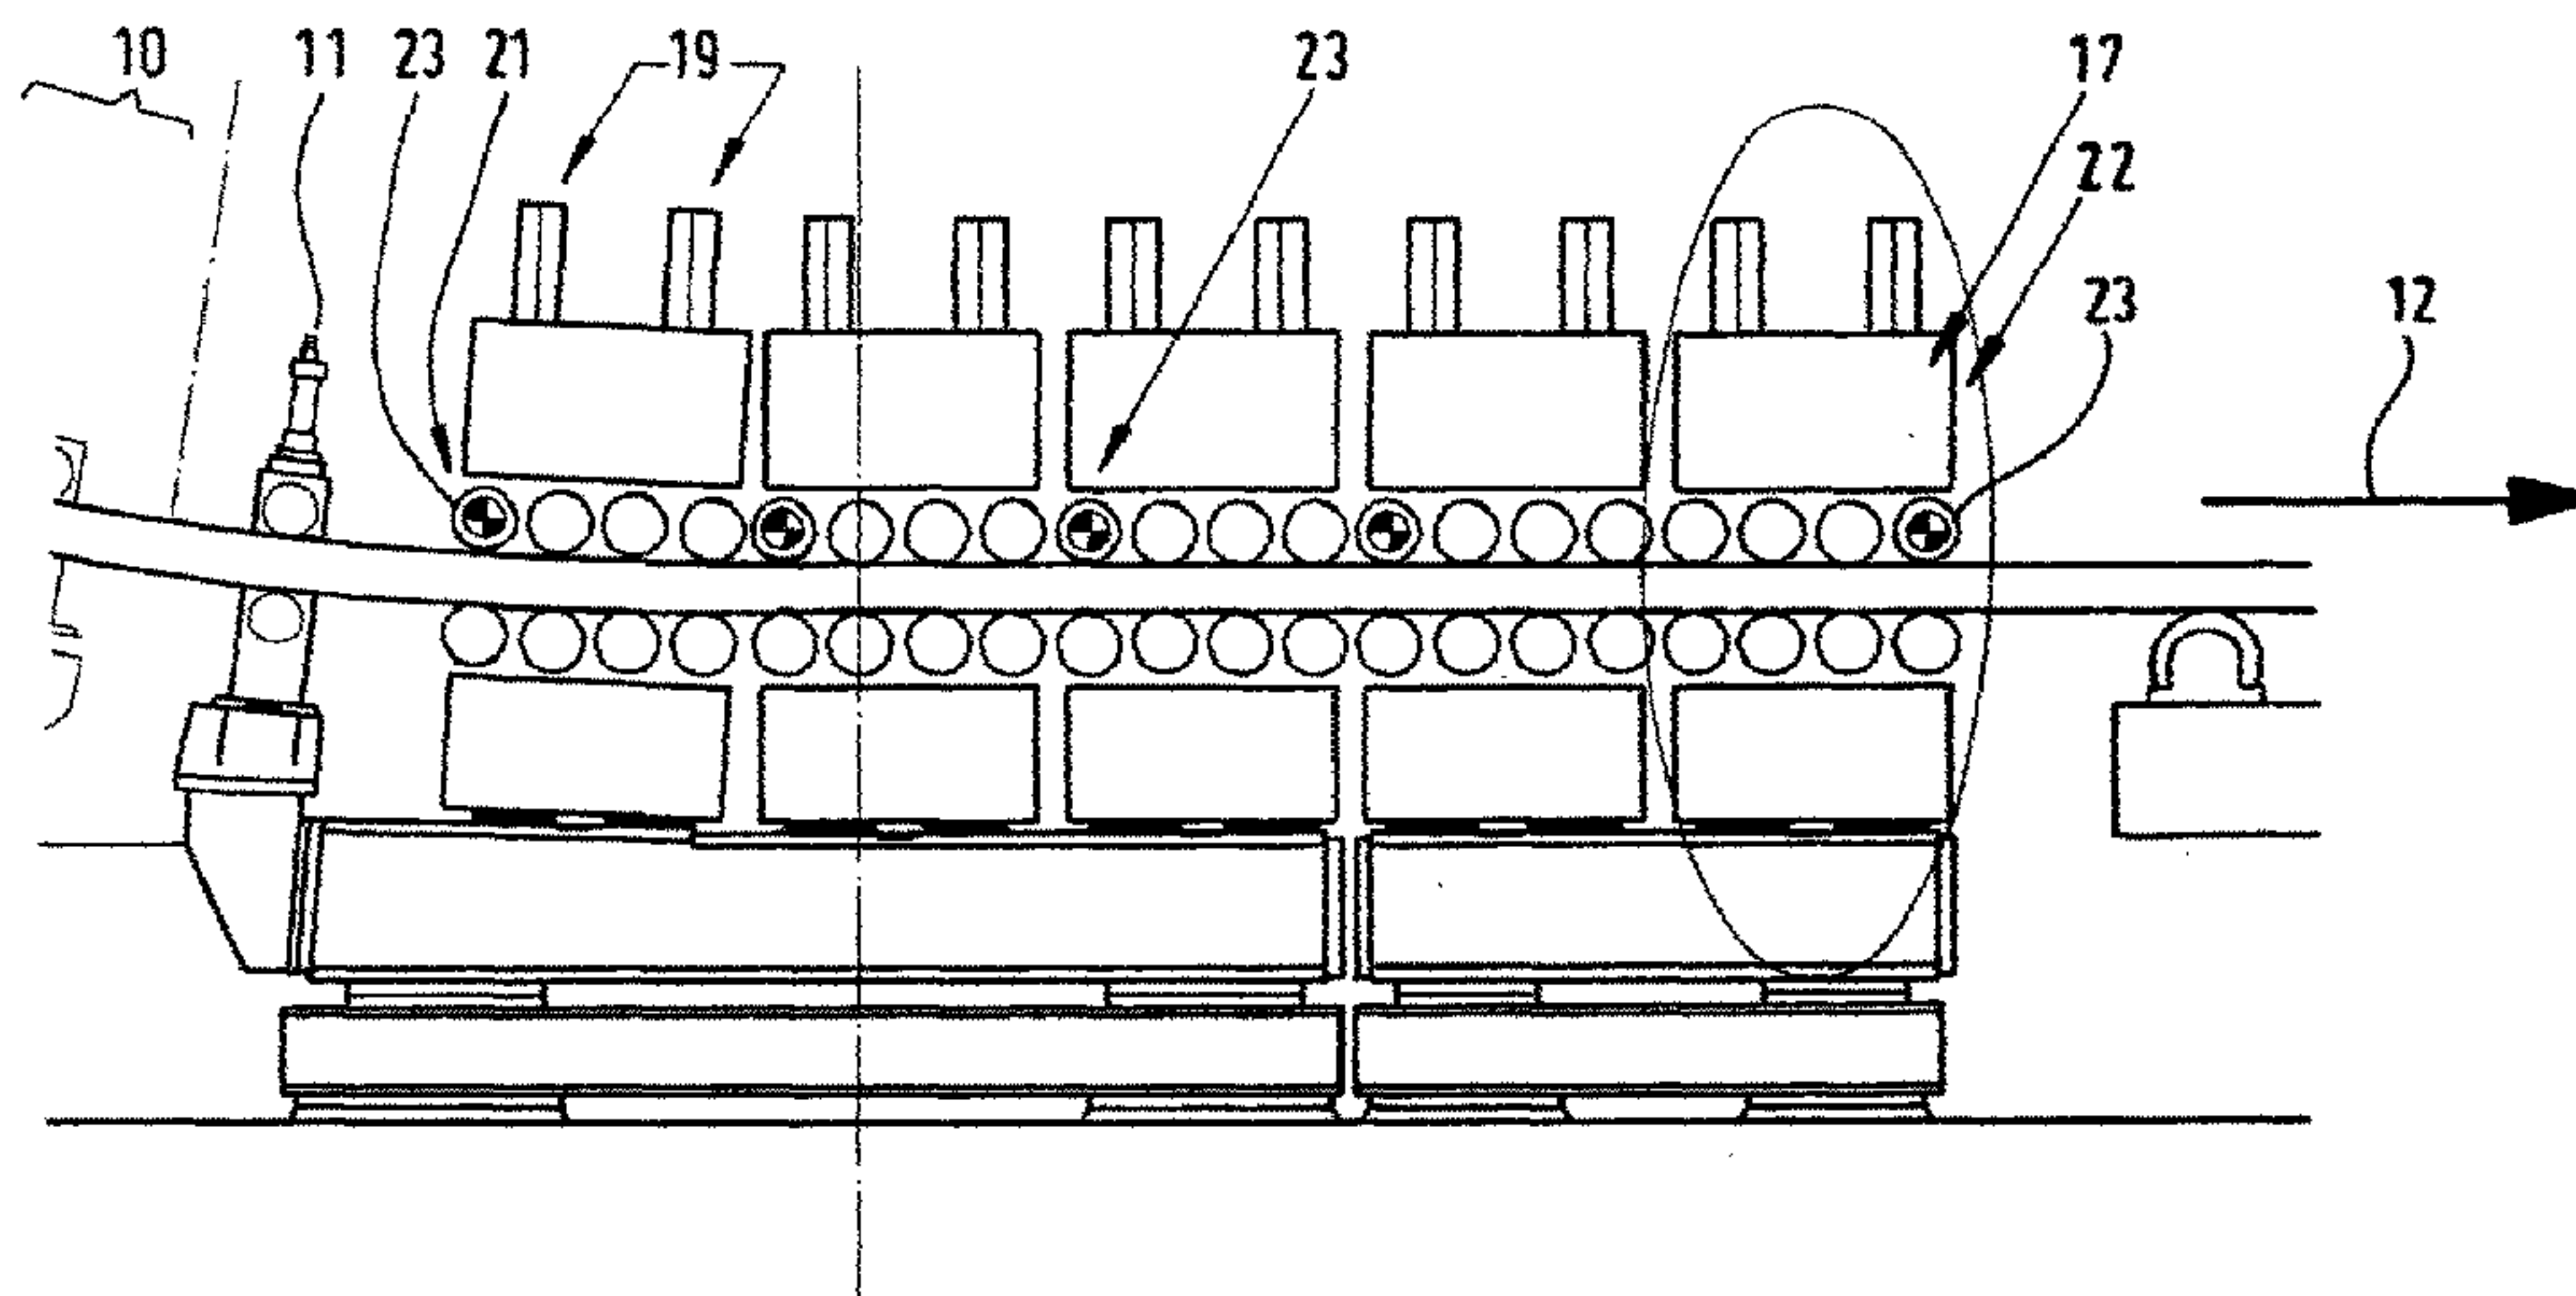

(57) Abstract: Disclosed are a method and a continuous casting device for dynamically placing roller segments (13 to 17) against a cast bar (4) made of metal, particularly steel. The inventive continuous casting device comprises pairs of rollers (18) which are placed against each other in a position-controlled and pressure-controlled manner by means of piston-cylinder units (19), the hydraulic pressure being switched from position-controlled operation to pressure-controlled operation when a threshold pressure is reached. In order to extend the range of applications of the inventive method, said method is applied to roller segments (13 to 17) of continuous bloom and billet casting devices, said roller segments (13 to 17) being arranged in the cold bar zone, hot bar zone, or soft reduction zone.

[Fortsetzung auf der nächsten Seite]

WO 2004/018129 A1

WO 2004/018129 A1

RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

Veröffentlicht:

— *mit internationalem Recherchenbericht*

(84) Bestimmungsstaaten (regional): ARIPO-Patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI-Patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Zur Erklärung der Zweibuchstaben-Codes und der anderen Abkürzungen wird auf die Erklärungen ("Guidance Notes on Codes and Abbreviations") am Anfang jeder regulären Ausgabe der PCT-Gazette verwiesen.

(57) Zusammenfassung: Ein Verfahren und eine Stranggiessvorrichtung dienen zum dynamischen Anstellen von Rollensegmenten (13 bis 17) an den Giessstrang (4) aus Metall, insbesondere aus Stahl, mit Rollenpaaren (18), die mittels Kolben-Zylinder-Einheiten (19) sowohl positionsgeregelt als auch druckgeregelt gegeneinander angestellt werden und der Hydraulikdruck von positions- auf druckgeregelt Betrieb bei Erreichen eines Grenzwertdrucks umgestellt wird. Um den Anwendungsbereich des Verfahrens zu erweitern, wird die Anwendung auf Rollensegmente (13 bis 17) von Vorblock- und Knüppel-Stranggiessvorrichtung vorgeschlagen, wobei die Rollensegmente (13 bis 17) im Kaltstrang-, Warmstrang- und/oder im Soft-Reduktions-Bereich vorgesehen werden.

TRANSLATION (HM-614PCT-original) :

WO 2004/018,129 A1

PCT/EP2003/007,463

**Method and Device for Dynamically Resting Roller Segments That Support
and/or Guide Both Sides of a Cast Bar Made of Metal, Particularly Steel**

The invention concerns a method and a continuous casting device for the dynamic adjustment of roller segments that support and/or guide both sides of a continuously cast strand made of metal, especially steel, with at least two successive pairs of rollers, which are adjusted relative to each other by piston-cylinder units, which are acted upon with both position control and pressure control, and the pairs of rollers are then adjusted to the continuously cast strand by position control, and the hydraulic pressure is switched from position-controlled operation to pressure-controlled operation when the hydraulic pressure in a piston-cylinder unit reaches a predetermined value.

A method of this type is described in EP 1 062 066 B1. The method was previously used on driver stands of bloom and billet

continuous casting machines, in which the hydraulic piston-cylinder units are position-controlled and pressure-controlled. However, the method found no acceptance in other operations, except for slab and thin-slab continuous casting machines.

The objective of the invention is to expand the previous objective, which was to develop an adjustment method that would avoid damage of the roller segments due to excessive forces and to eliminate bulging of the continuously cast strand as far as possible, by making the method accessible to a larger number of types of continuous casting operations.

In accordance with the invention, this objective is achieved by applying the method to roller segments of continuous bloom and billet casting machines, such that the roller segments are installed in the cold bar zone, the hot bar zone, and/or the soft reduction zone. This allows gentle adjustment of roller segments that is adapted to the given type of operation, even in the case of continuously cast bloom and billet cross sections.

In an advantageous refinement, integrated, driven rollers arranged on the segment entrance side and/or on the segment exit side of swiveling and/or parallel-adjustable roller segments are switched from position-controlled operation to pressure-

controlled operation, depending on the phase of the process. This guarantees force or pressure states individually adjusted to the given type of operation.

A continuous casting device for casting continuous bloom or billet sections has a containment roll stand, which is arranged after the continuous casting mold, and a bending-straightening unit.

In accordance with the invention, the process-engineering objective of expanding the method to a larger number of different types of operations is achieved with respect to the equipment by arranging a device at least partially in front of the bending-straightening unit or completely behind the bending-straightening unit, with several hydraulically operated piston-cylinder units with position-controlled or pressure-controlled, adjustable roller segments, each of which has at least one driven roller.

In accordance with other features of the invention, power is transmitted to the continuously cast strand by providing the driven rollers on the segment entrance side and/or on the segment exit side. In this way, with appropriate angular positioning of a roller segment also provided, force is

intensively transmitted to the continuously cast strand or the cold bar.

In accordance with other features of the invention, the drives for the driven rollers are designed in such a way that the drive motor for a driven roller is arranged, together with a transfer case, on one side of the segment frame with a vertical drive shaft orientation. In this way the power transmission is direct, and the accessibility of the motors is advantageously simple.

The hydraulic piston-cylinder units and the drive motors for driven rollers are each operated in such a way that the adjustment and automatic regulation concept for the dynamic adjustment is divided into automatic segment control and basic automation.

In this regard the open-loop and/or closed-loop control is further designed in such a way that the automatic segment control comprises at least the given operation strategy, roll spring compensation, a maximum force regulator, a minimum force regulator, and a positioning system. The hydraulic piston-cylinder units optimally adjust the guiding and conveying force for the hot bar, the cold bar (starting bar), and the soft

reduction.

Furthermore, in accordance with other features of the invention, the basic automation system comprises at least the given type of operation, a torque controller, and a speed controller. Each driven roller is adjusted to its optimum speed or optimum torque in this way.

In addition, the automatic control of the process is advantageously designed by providing each piston-cylinder unit with two pressure sensors spaced some distance apart for different piston positions and a position sensor for the piston of a piston-cylinder unit. The pressure sensors and position sensor are connected with the automatic segment control system.

Finally, the closed-loop and/or open-loop control is completed by providing for communication between the drive motor for the driven roller and the basic automation system.

Accordingly, in one aspect, the present invention resides in a method for the dynamic adjustment of roller segments (13 to 17) that support and/or guide both sides of a continuously cast strand (4) made of metal in a continuous bloom and billet casting machine having at least two successive pairs of rollers (18), the roller segments (13 to 17) being installed in each of a cold bar zone, a hot bar zone, and a soft reduction zone, and including a rotationally driven roller installed on at least one of a segment entrance side and a segment exit side, a single piston-cylinder unit (19) provided on the segment entrance side and a single piston-cylinder unit provided on the segment exit side, and an adjustment and automatic control concept (31) for dynamic adjustment divided into an automatic segment control system (32), and a basic automation system (33); the method comprising the steps of: adjusting the pairs of rollers relative to each other with the piston-cylinder units (19), which are acted upon with both position

control and pressure control; subsequently adjusting the pairs of rollers (18) to the continuously cast strand (4) by the position control; switching hydraulic pressure from position-controlled operation to pressure-controlled operation when the hydraulic pressure in a selected said piston-cylinder unit (19) reaches a predetermined value; and operating the roller segments by controlling and adjusting the piston-cylinder units with the automatic segment control system (32) and controlling the driven rollers with the basic automation system (33), wherein in the soft reduction zone the rollers are operated on a cast billet while the billet is in a semi-solid state.

In another aspect, the present invention resides in a continuous casting device for casting continuous bloom or billet sections, with a containment roll stand (5), which is arranged after a continuous casting mold (2), and with a bending-straightening unit (11), wherein the device is arranged at least partially in front of the bending-straightening unit (11) or completely behind the bending-straightening unit (11), said device including a plurality of hydraulically operated piston-cylinder units (19) with position-controlled or pressure-controlled, adjustable roller segments (13 to 17), each of the adjustable roller segments having at least two successive pairs of rollers and including at least one driven roller (23) installed on at least one of a segment entrance side and a segment exit side, a single first said piston-cylinder unit provided on the segment entrance side and a single second said piston unit provides on the segment exit side, the roller segments being positioned in each of a cold bar zone, a hot bar zone and a soft reduction zone for operation on a cast billet section while said billet section is in a semi-solid state and further including an adjustment and automatic control concept (31) for dynamic adjustment divided into an automatic segment control system (32) operable to control and adjust the roll-

segments with the piston-cylinder units and a basic automation system (33) operable to control the driven rollers.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings show embodiments of the continuous casting device, which is described in greater detail below and on the basis of which the method of the invention is also described.

-- Figure 1 shows a side view of a continuous casting device for bloom and billet section.

-- Figure 2 shows a section of the strand guide segments.

-- Figure 3 shows a perspective view of the strand guide segments in segmental construction.

-- Figure 4 shows a functional block diagram of the adjustment-control concept connected to a hot bar conveyance system.

-- Figure 5 shows the adjustment-control concept for the cold bar conveyance system.

-- Figure 6 shows the adjustment-control concept for a soft reduction zone.

Molten steel flows from a tundish 1 into a cooled continuous casting mold 2, which is oscillated by an oscillation unit 3 to produce shell solidification of the continuously cast strand 4 leaving the continuous casting mold 2 and prevent sticking. The continuously cast strand 4, which is liquid on the inside and is guided in containment roll stands 5 passes in succession through cooling zones 6, 7, 8, 9, and 10 and then enters a bending-straightening unit 11. Moving in the direction of strand movement 12, the continuously cast strand 4, which has now cooled further, enters roller segments 13, 14, 15, 16, and 17 (Figure 1).

Each roller segment 13 to 17 has at least two pairs of

rollers 18. Each roller segment 13 to 17 is equipped with a pair of piston-cylinder units 19, which, however, are successively arranged on a center line within a roller segment 13 to 17 and adjust only an upper part of the corresponding roller segment, while the lower part is rigidly mounted on the segment frame 13a (to 17a).

The roller segments 13 to 17, which lie opposite each other in pairs, are adjusted towards each other by the piston-cylinder units 19 under automatic control, and this adjustment is made with both position control and pressure control. In this regard, the pairs of rollers 18 are first set on the continuously cast strand 4 by position control. The contact force is switched from position-controlled operation to pressure-controlled operation as soon as the hydraulic pressure in a piston-cylinder unit 19 has reached a predetermined value.

The method is applied to the roller segments 13 to 17 of bloom and billet continuous casting devices 20, said roller segments 13 to 17 being arranged in the cold bar zone, hot bar zone, and/or soft reduction zone. On the segment entrance side 21 and/or on the segment exit side 22 of the swiveling or parallel-adjustable roller segments, driven rollers 23

integrated in the given segment can be switched from the position-controlled operation to the pressure-controlled operation in the piston-cylinder units 19, depending on the phase of the process or on the type of operation.

The continuous casting device with the containment roll stand 5, which is arranged after the continuous casting mold 2, and with the bending-straightening unit 11 then has several roller segments 13 to 17, which carry the driven rollers 23 and the piston-cylinder units 19 (Figure 2)..

Each roller segment 13 to 17 has the piston-cylinder unit 19 on an upper roller conveyor 24, which lies opposite a lower, fixed roller conveyor 25. On one side 26, a drive motor 29 with transfer case 30 is arranged with a vertical drive shaft orientation (Figure 3).

Figures 4, 5, and 6 show an adjustment and automatic control concept 31. From the standpoint of automatic control engineering, the concept is divided into automatic segment control 32 and basic automation 33. The automatic segment control 32 comprises the given type of operation 34, roll spring compensation 35, a maximum force regulator 36, a minimum force regulator 37, and a positioning system 38.

The basic automation system 33 comprises at least the given type of operation 34, a torque controller 39, and a speed controller 40.

Pressure sensors 41 spaced some distance apart for piston positions and a position sensor 42 for the piston 43 of a piston-cylinder unit 19 are provided on each piston-cylinder unit 19. The pressure sensors and position sensor are connected with the automatic segment control system.

The drive motor 29 for a driven roller 23 communicates with the basic automation system 33 (Figure 4).

Figure 5 shows the transmission of power to a cold bar 44, which is moved in the run-in and runout directions 45.

Figure 6 shows a suitable angular position for a soft reduction of the continuously cast strand 4, the cross section of which has not yet fully solidified.

TRANSLATION (HM-614PCT-amended pages) :

WO 2004/018,129 A1

PCT/EP2003/007,463

List of Reference Numbers

- 1 tundish
- 2 continuous casting mold
- 3 oscillation unit
- 4 continuously cast strand
- 5 containment roll stand
- 6 cooling zone I
- 7 cooling zone II + III
- 8 cooling zone IV
- 9 cooling zone V
- 10 cooling zone VI
- 11 bending-straightening unit
- 12 direction of strand movement
- 13 roller segment
- 13a upper frame of segment
- 14 roller segment
- 15 roller segment
- 16 roller segment

- 17. roller segment
- 18 pair of rollers
- 19 piston-cylinder unit
- 20 bloom and billet continuous casting device
- 21 segment entrance side
- 22 segment exit side
- 23 driven roller
- 24 upper roller conveyor
- 25 lower roller conveyor
- 26 side of the segment frame
- 27 segment frame
- 28 drive shaft orientation
- 29 drive motor
- 30 transfer case
- 31 adjustment and automatic control concept
- 32 automatic segment control system
- 33 basic automation system
- 34 type of operation
- 35 roll spring compensation
- 36 maximum force regulator
- 37 minimum force regulator
- 38 positioning system

- 39 torque controller
- 40 speed controller
- 41 pressure sensor
- 42 position sensor
- 43 piston
- 44 cold bar
- 45 run-in and runout directions

We claim:

1. Method for the dynamic adjustment of roller segments (13 to 17) that support and/or guide both sides of a continuously cast strand (4) made of metal in a continuous bloom and billet casting machine having at least two successive pairs of rollers (18), the roller segments (13 to 17) being installed in each of a cold bar zone, a hot bar zone, and a soft reduction zone, and including a rotationally driven roller installed on at least one of a segment entrance side and a segment exit side, a single piston-cylinder unit (19) provided on the segment entrance side and a single piston-cylinder unit provided on the segment exit side, and an adjustment and automatic control concept (31) for dynamic adjustment divided into an automatic segment control system (32), and a basic automation system (33); the method comprising the steps of: adjusting the pairs of rollers relative to each other with the piston-cylinder units (19), which are acted upon with both position control and pressure control; subsequently adjusting the pairs of rollers (18) to the continuously cast strand (4) by the position control; switching hydraulic pressure from position-controlled operation to pressure-controlled operation when the hydraulic pressure in a selected said piston-cylinder unit (19) reaches a predetermined value; and operating the roller segments by controlling and adjusting the piston-cylinder units with the automatic segment control system (32) and controlling the driven rollers with the basic automation system (33), wherein in the soft

reduction zone the rollers are operated on a cast billet while the billet is in a semi-solid state.

2. Method in accordance with Claim 1, wherein the roller segments comprise at least one of a swivelling and a parallel adjustable roller segments, said method comprising switching the rotationally driven rollers (23) arranged on at least one of the segment entrance side (21) swivelling and parallel-adjustable roller segments (13 to 17) from position-controlled operation to pressure-controlled operation, depending on the phase of the process.

3. Continuous casting device for casting continuous bloom or billet sections, with a containment roll stand (5), which is arranged after a continuous casting mold (2), and with a bending-straightening unit (11), wherein the device is arranged at least partially in front of the bending-straightening unit (11) or completely behind the bending-straightening unit (11), said device including a plurality of hydraulically operated piston-cylinder units (19) with position-controlled or pressure-controlled, adjustable roller segments (13 to 17), each of the adjustable roller segments having at least two successive pairs of rollers and including at least one driven roller (23) installed on at least one of a segment entrance side and a segment exit side, a single first said piston-cylinder unit provided on the segment entrance side and a single second said piston unit provides on the segment exit side,

the roller segments being positioned in each of a cold bar zone, a hot bar zone and a soft reduction zone for operation on a cast billet section while said billet section is in a semi-solid state and further including an adjustment and automatic control concept (31) for dynamic adjustment divided into an automatic segment control system (32) operable to control and adjust the roll-segments with the piston-cylinder units and a basic automation system (33) operable to control the driven rollers.

4. Continuous casting device in accordance with Claim 3, including a drive motor (31) for at least one said rotationally driven roller (23) is arranged, together with a transfer case (30), on one side (26) of a segment frame (27) with a vertical drive shaft orientation (28).

5. Continuous casting device in accordance with Claim 3 or Claim 4, wherein the automatic segment control system (32) comprises at least a given operation strategy (34, 39, 40), roll spring compensation (35), a maximum force regulator (36), a minimum force regulator (37), and a positioning system (38).

6. Continuous casting device in accordance with any one of Claims 3 to 5, wherein the basic automation system 33 comprises at least a given type of operation (34), a torque controller (39) and a speed controller (40).

7. Continuous casting device in accordance with any one of Claims 3 to 6, wherein two pressure sensors (41) are spaced some distance apart for different piston positions and a position sensor (42) for a piston (43) of an associated piston-cylinder unit (19) are provided on each piston-cylinder unit (19) and are connected with the automatic segment control system (32).

8. Continuous casting device in accordance with any one of Claims 3 to 7, wherein a drive motor (29) for the driven roller (23) communicates with the basic automation system (33).

