



(22) Date de dépôt/Filing Date: 2001/08/10

(41) Mise à la disp. pub./Open to Public Insp.: 2002/03/29

(30) Priorité/Priority: 2000/09/29 (09/675,597) US

(51) Cl.Int.⁷/Int.Cl.⁷ H04M 3/493


(71) Demandeur/Applicant:
ROCKWELL ELECTRONIC COMMERCE CORP., US

(72) Inventeurs/Inventors:
FUNCK, DAVID, US;
JAMES, ERIC, US

(74) Agent: GOWLING LAFLEUR HENDERSON LLP

(54) Titre : SYSTEME ET METHODE D'UTILISATION D'UN TELEPHONE POUR ACCEDER A DE L'INFORMATION
DANS UN CENTRE D'APPEL

(54) Title: SYSTEM AND METHOD FOR USING A PHONE TO ACCESS INFORMATION IN A CALL CENTER

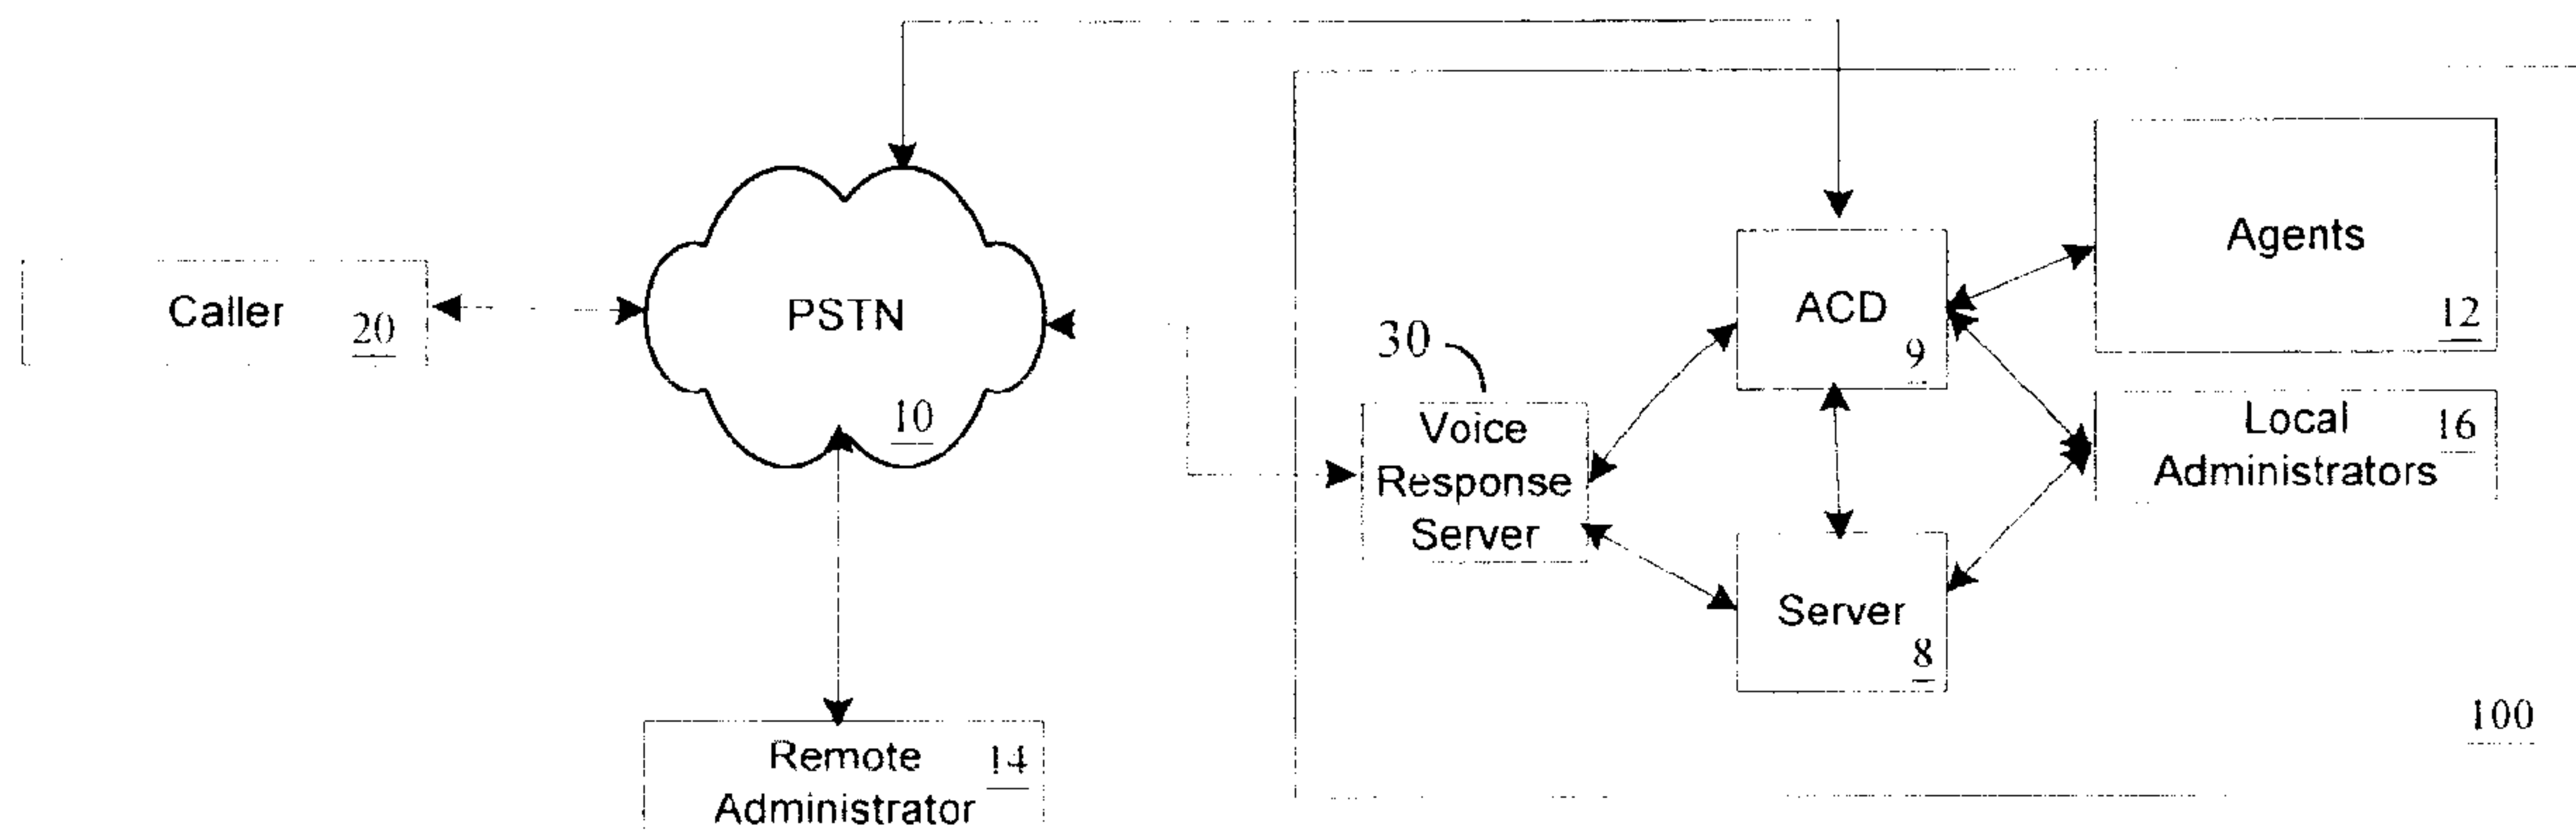

(57) **Abrégé/Abstract:**

A system and method of using voice to access information in a call center is disclosed. Providing a voice response server to handle requests from local and remote administrators allows a call center to be managed even when administrators are physically distant from the call center. The voice response server may adhere to VoiceXML to process requests for call center information from administrators.



Abstract

A system and method of using voice to access information in a call center is disclosed. Providing
5 a voice response server to handle requests from local and remote administrators allows a call center to be managed even when administrators are physically distant from the call center. The voice response server may adhere to VoiceXML to process requests for
10 call center information from administrators.

SYSTEM AND METHOD OF USING A PHONE TO ACCESS
INFORMATION IN A CALL CENTER

5

Field of the Invention

This invention relates to communications systems and, more particularly, to administration of call centers using voice access.

10

Background of the Invention

Call centers are typically used as a means of distributing customer contacts such as facsimiles, e-
15 mails, video, internet voice, telephone calls, etc. among a group of call center agents of an organization. As customer contacts are directed to the organization from the public switched telephone network (PSTN) or other communication networks, an
20 automatic call distributor (ACD) directs the customer contacts to its call center agents based upon some algorithm. For example, the ACD may recognize a telephone call target based upon an identity of an incoming trunk line and route the call accordingly.

25 Call center administrators manage and ensure the proper performance of the call center. To manage the call center efficiently, it is important for the call center administrator to have access to the call center wherever the administrator is. For example,
30 if the administrator is called away to another building, it is important for the administrator to be able to check the performance, configuration and attributes of the call center while the administrator is away. Further, administrators who must travel are
35 often away from the call center that they manage and

thus require access to the call center to determine whether the call center is properly functioning.

Currently, an administrator who is away from the call center has two options: 1) call a person who is
5 in charge and ask that person for a status of the call center or 2) dial in to the call center by using a portable computer and checking the status of the call center.

The first solution requires that the
10 administrator depend upon another person to get required information. This solution may not be optimal if the person answering the telephone call is not well skilled or trustworthy. The second solution is also not optimal, as it requires the companies
15 that use call centers to purchase a portable computer and modem for every administrator in the company. In a large company with many call centers, this solution requires many portable computers. Further, the administrator must be able to locate a telephone line
20 for which the administrator may be able to dial up to connect to the call center. Finding a telephone line to which the administrator may connect the portable computer may be difficult if the administrator is in a location that does not have such access, such as
25 travelling in a car. Further, this solution requires the company to install the appropriate number of dial up lines so that administrators are not disconnected or put on hold because the dial up lines are unavailable. Both solutions are less than optimal.
30 As a consequence, the performance of the call center may degrade or be impaired when an administrator is away.

Accordingly, a need exists for a better way of allowing the call center administrator to access the call center when the administrator is physically remote from the call center.

5

Summary

The present invention, accordingly, provides a system and method of using a phone to provide call center administrators access to information in a call center that overcomes or reduces the disadvantageous and limitations associated with prior methods and systems. Illustrated embodiments reduce the disadvantage of not having access to a call center when physically distant from the call center.

15

Brief Description of the Drawings

The foregoing advantageous features of the invention will be explained in greater detail and others will be made apparent from the detailed description of the preferred embodiment of the present invention which is given with reference to the several figures of the drawing, in which:

FIG. 1 illustrates a simplified functional block diagram of a call center in accordance with an illustrated embodiment of the invention.

25

FIG. 2 illustrates a simplified functional block diagram of an alternative embodiment of a call center in accordance with an illustrated embodiment of the invention.

30

FIG. 3 illustrates a simplified functional block diagram of an exemplary embodiment of a call center in accordance with an illustrated embodiment of the invention.

FIG. 4 illustrates a simplified functional block diagram of a voice response server of a call center.

FIG. 5 is a simplified flow diagram of the method used by the system of FIG. 4.

5

Detailed Description

Shown in Fig. 1 is a call center 100 shown in a context of use. The call center 100 includes a number of agents 12, administrators (14, 16), an automatic
10 call distributor 9, a call center command server (3CS) 8, and a voice response server 30. The call center 100 functions to selectively and automatically interconnect customer contacts such as a caller 20 calling through the public switched telephone network
15 (PSTN) 10 to one of the agents 12 in the call center 100. Although the call center 100 is described with reference to an automatic call distributor (ACD), a PBX or centrex system may also be used in place of the ACD. Further, implementing a call center with any
20 of these switching systems is considered to be equivalent and variations will not be discussed further. For a more detailed discussion of automatic call distributors, reference may be made to U.S. Pat. No. 5,268,903 to Jones et al. entitled "Multichannel
25 Telephonic Switching Network With Different Signaling Formats and Connect/PBX Treatment Selectable For Each Channel", issued December 7, 1993; U.S. Pat. No. 5,140,611 to Jones et al. entitled "Pulse Modulated Self-Clocking and Self-Synchronizing Data
30 Transmission and Method for a Telephonic Communication Switching System", issued Aug. 8, 1992 and U.S. Pat. No. 5,127,004 to Lenihan et al. entitled "Tone and Announcement Message Code

Generator for a Telephonic Switching System and Method", issued Jun. 30, 1992 which are hereby incorporated by reference.

Further, although the present invention is
5 described in reference to the PSTN 10, a packet-switched voice network or other equivalent network where customer contacts are relayed to a call center 100 may be used. For example, where voice calls are transmitted over a global network, such as the
10 Internet using Internet Protocol (IP) a packet-switched communications network may be used to implement the system of transmitting the call.

In addition to the agents 12, the call center also includes administrators 14, 16. Local
15 administrators 14 are people who are responsible for the management of the call center and are physically at the call center 100. Remote administrators are also responsible for the management of the call center 100 but are not physically at the call center
20 100. The administrators' 14, 16 responsibilities include, for example, configuring and monitoring call center entities, viewing call center statistics, editing telephony files, and activating call center schedules. In an exemplary embodiment, the call
25 center information that is managed by administrators 14, 16 is summarized in the following table.

Staff	Automatic Number Identification	Message Display Unit
Agent Schedule	Trunk Group	Real-Time Display
Schedule Adherence	Route Class	Display Message Command
Threshold Groups	Route	Activate Announcement Command
Night/Day	Route List/Route List Entry	Delayed or Scheduled Change Activation
Service/Center	Network Number	Retrieve Directory Numbers
Open/Close	Announcement	Custom Timing Profile
Override	Receiver Group	Digital Signal Processing Type
Application Vector	Function Type	Digital Audio Service Type
Agent Group	Intercept (Class) Table	Equipment
Agent Information Group	Call by Call Service Table	Serial Data Port
Class of Service	Permanent & NSC Port Table/Device/T0/T0T/Trunk Group Member	T1
Speed Code	Automatic Call	Devices T0/T0T/TGM Configuration
Transaction Code	Handlers - VRU, Fax, and Voice Mail Objects	Retrieve Events
Application	Telescripts and Telescript Versions	Copy Memory
Application Detailed Schedule	Application Overflow Statistics	Voice Mail
Message Queue	Alarm	
Security User		
System/System Model/Header		
Dialed Number Identification Service		

The call center 100 includes a voice response server 30 that functions to provide access to the call center information summarized above. The voice response server 30 accepts an administrator's input such as character, audio and speech and retrieves the information from the call center. As shown in the example of FIG. 4, the voice response server 30 includes a call manager 32, VXML interpreter 36, and network interface 38.

The call manager 32 functions to interface with either a local or remote administrator 14, 16. The call manager 32 accepts character, audio, and speech

input from the administrators 14, 16 to perform call connection services and process speech. Further, the call manager performs text to speech translation and automatic speech recognition processing. The call manager 32 accepts character input that includes dual-tone multi-frequency (DTMF) and speech information. In response to an administrator's input, the voice response server 30 outputs call center 100 information to the administrator (14 or 16). The output from the voice response server 30 to an administrator 14, 16 may also be character, audio and speech, such as synthesized speech and digitized audio. The call manager 32 may perform text to speech translation to aurally output information to administrators 14, 16. For example, an administrator (14 or 16) may speak a request to hear the call log.

The call manager 32 accepts the speech command and performs speech recognition on the speech input to translate the request into a command to be executed in the call center computers. Once the call log information is retrieved from the call center, the call manager 32 performs text to speech translation to aurally give the call log information to the administrator.

In an illustrative embodiment, the call manager 32 includes speech recognition software such as IBM's ViaVoice. Speech recognition software is used to perform translation of the input speech so that the voice response server may understand the requested command. Any alternative speech recognition software suitable for recognizing the speech of administrators 14, 16 may also be used. The call manager also includes speech synthesis software to perform

translation of text into speech. Any suitable speech recognition software may be used to perform this function.

In the exemplary embodiment in FIG. 4, the VXML interpreter 36 functions to translate information between an administrator (14 or 16) and the ACD 9 or 3CS server 8. Specifically, the VXML interpreter 36 interfaces to the call manager 32 and network interface 38 to translate information between an administrator 14, 16 and the computers in the call center, such as ACD 9 or 3CS server 8. After input processing is performed by the call manager 32, the input command is processed by the VXML interpreter 36 into an ACD or 3CS server command to be executed in the call center. The VXML interpreter 36 implements Voice eXtensible Markup Language (VoiceXML), a specification developed by an industry organization which is a standard for providing Internet services via voice interfaces, such as the telephone. In the above example, the VXML interpreter 36 receives a VoiceXML command to hear the call log and translates the VoiceXML command into to a command which is executed to retrieve the call log from the 3CS server 8.

The network interface 38 functions to manage the transmission and receipt of data between the voice response server 30 and the ACD 9 and 3CS server 8. The network interface 38 receives commands to be executed on the ACD 9 or 3CS server 8 and translates the commands into data packets. Further, network interface 38 receives data packets from ACD 9 or 3CS server 8 and translates the data packet into information for the VXML interpreter 36. If the

voice response server 30 is connected to the ACD 9 by an Ethernet connection, then the network interface 38 functions to manage Ethernet data packets.

Alternatively, the connection may be any equivalent
5 local area network, wide area network, Intranet, Internet, or extranet connection.

In an exemplary embodiment, a Windows NT 4.0 server utilizing dual Pentium processors with minimum clock speeds of 200 MHz with 128 MB of RAM may be
10 regarded as the type of voice response server 30 contemplated herein. Equivalent processors and equivalent operating systems may also be used. Further, the voice response server 30 includes analog voice ports to support wireless or wireline telephony
15 connections. For example, remote administrator 16 may connect to the voice server 30 by communications devices including a telephone, cell phone, personal digital assistant and laptop computer.

In an exemplary embodiment, the call center 100
20 includes 3CS computer 8 that functions to provide the voice response server 30 with information from the ACD 9. The 3CS computer 8 provides access to configuration, real time and call control information for the agents, agent groups, call center
25 applications, and ACD 9 objects. For example, the 3CS computer 8 may relay statistics and performance information to the voice response server 30. The 3CS computer 8 also provides administrative features including viewing equipment configurations,
30 reconfiguring equipment attributes, and editing software applications.

In an exemplary embodiment, the functionality provided by the voice response server 30 is separate

from the 3CS computer 8. However, the functionality may be combined into one computer system as shown in FIG. 2. Further, although the call center described includes one ACD and one 3CS computer 8, the call
5 center may include a plurality of ACDs and a plurality of 3CS computers. For example, a company that requires a number of agents will typically utilize four or five ACDs and 3CS computers in one call center as shown in FIG. 3.

10 In accordance with an embodiment of the present invention, a method of using a telephone to access information in a call center is provided which includes the steps of: (a) connecting to a voice response server (Block 32), (b) processing telephone
15 requests (Block 34), and (c) responding to telephone requests (Block 36).

The step of connecting (Block 32) functions to interface with either a local or remote administrator 14, 16. The connection process includes verifying
20 that authorized administrators 14, 16 are accessing the call center 100. Checking login names with associated password information may perform verification. If an authorized administrator 14, 16 does not provide an appropriate password, then access
25 will be denied. In an illustrative embodiment of the invention, authentication of administrators 14, 16 may be performed within the voice response server 30.

The step of connecting (Block 32) also includes provide a telephony interface to administrators 14,
30 16. The telephony interface may accept character, audio, and speech input from administrators 14, 16 to perform connection services and process input received. Further, the step of connecting (Block 32)

may also perform text to speech translation and automatic speech recognition processing. The step of connecting further includes the step of accepting character input such as DTML and speech information.

5 The step of processing (Block 34) functions to translate administrator's 14, 16 input to a requested command and execute the command in the computers in the call center. For example, an administrator 14, 16 may speak a request to hear the number of call
10 center agents. The step of processing (Block 34) accepts the speech command and performs speech recognition on the speech input to translate the request into a command to be executed in the call center computers.

15 The step of responding (Block 36) functions to give administrators 14, 16 the results of the processing step (Block 34). The step of responding further includes the step of performing text to speech translation to aurally present information to
20 administrators 14, 16. In the example above, the step of responding (Block 36) aurally presents the number of call center agents in the call center to the administrator 14, 16.

 In an illustrative embodiment, the method of
25 FIG. 5 adheres to the VoiceXML standard. The results from the step of connecting (Block 32) and results to the step of responding (Block 36) adhere to the VoiceXML standard.

 An embodiment of the present invention may
30 employ learning as a method of increasing efficiency in retrieving call center information. The method recognizes and learns overtime a pattern of regularly used access commands. For example, the user

regularly accesses the call log. Thus, when the user logs into the call center, the method may automatically present call log information to the user. The ability to predict familiarity and
5 unfamiliarity allows an embodiment of the present invention to be more useful.

Another embodiment of the present invention may allow an experienced user to retrieve information quickly. An experienced user may "barge in" to
10 retrieve information from the call center. Barge in means to interrupt the presentation of requesting information during the connection process to retrieve call center information quickly. For example, the voice response server may present a welcome message,
15 such as "Welcome to call center #5467 in Wooddale, Illinois." Before the voice response server finishes presenting the welcome message, the administrator 14, 16 may barge in with a request for message queue information.

20 A specific embodiment of a system and method of using voice to access information in a call center according to the present invention has been described for the purpose of illustrating the manner in which the invention is made and used. It should be
25 understood that the implementation of other variations and modifications of the invention and its various aspects will be apparent to one skilled in the art, and that the invention is not limited by the specific embodiments described. Therefore, it is
30 contemplated to cover the present invention, any and all modifications, variations, or equivalents that

fall within the true spirit and scope of the
basic underlying principles disclosed and claimed
herein.

CLAIMS

1. A method of using voice to access call center information in a call center comprising the steps of:
connecting to a voice response server;
5 processing telephone requests for call center information; and
responding to the telephone requests.
- 10 2. The method of claim 1 wherein the step of connecting further comprises the step of interfacing with a telephony server to receive telephony input from a remote administrator.
- 15 3. The method of claim 1 wherein the step of connecting to a voice response server further comprises the step of authenticating users of the voice response server.
- 20 4. The method of claim 3 wherein the step of authenticating is performed by matching login names with passwords.
5. The method of claim 1 wherein the step of
25 processing further comprises translating an administrator's input into a command recognized by a computer in the call center.
6. The method of claim 5 wherein the computer
30 includes an automatic call distributor and call center command server.

7. The method of claim 1 wherein the step of processing adheres to the VoiceXML standard.
processing further comprises the step of using speech recognition to translate an administrator's input
5 into a command recognized by a computer in the call center.

8. The method of claim 1 wherein the step of responding further comprises the step of performing
10 text to speech translation to aurally present information to administrators.

9. The method of claim 1 wherein the step of processing adheres to VoiceXML.

15

10. The method of claim 1 wherein the step of processing employs learning to provide a response to the telephone requests.

20 11. The method of claim 1 wherein the step of processing is interrupted by a barge in request.

12. A system for using voice to access call center information in a call center comprising:

25 means for connecting to a voice response server,
means for processing telephone requests for call center information, and
means for responding to the telephone requests.

30 13. The system of claim 12 wherein the means for connecting includes a programmable computer configured to accept telephony requests.

14. The system of claim 12 wherein the means for processing includes a voice response server comprising a programmable computer.

5 15. The system of claim 12 wherein the means for responding includes a programmable computer.

16. A system for using voice to access call center information in a call center comprising:

10 a call manager which provides call center information,
a VXML interpreter, and
a network interface.

15 17. The system of claim 16 wherein the call manager is a programmable computer which interfaces to a telephony server to receive telephone input from a remote administrator.

20 18. The system of claim 17 wherein the call manager further comprises a telephony interface for receiving telephony input from a remote administrator.

19. The system of claim 17 wherein the call manager
25 includes a database for authenticating users of the system.

20. The system of claim 17 wherein the call manager includes a translator for performing speech to text
30 conversion.

21. The system of claim 17 wherein the VoiceXML interpreter includes a programmable computer for translating telephony requests to VoiceXML commands.
- 5 22. The system of claim 17 wherein the VoiceXML interpreter includes a translator for rendering VoiceXML commands into automatic call distributor commands.
- 10 23. The system of claim 17 wherein the VoiceXML interpreter includes a translator for rendering VoiceXML commands into call center command server commands.
- 15 24. The system of claim 17 wherein the network interface includes local area network, Internet, extranet, and wireless network software.
- 20 25. The system of claim 17 wherein the network interface includes a programmable computer for translating VoiceXML commands into data packets for a local area network.
- 25 26. The system of claim 17 wherein the network interface includes computer hardware which retrieves data from a local area network and translates the data into VoiceXML commands.

FIG. 1

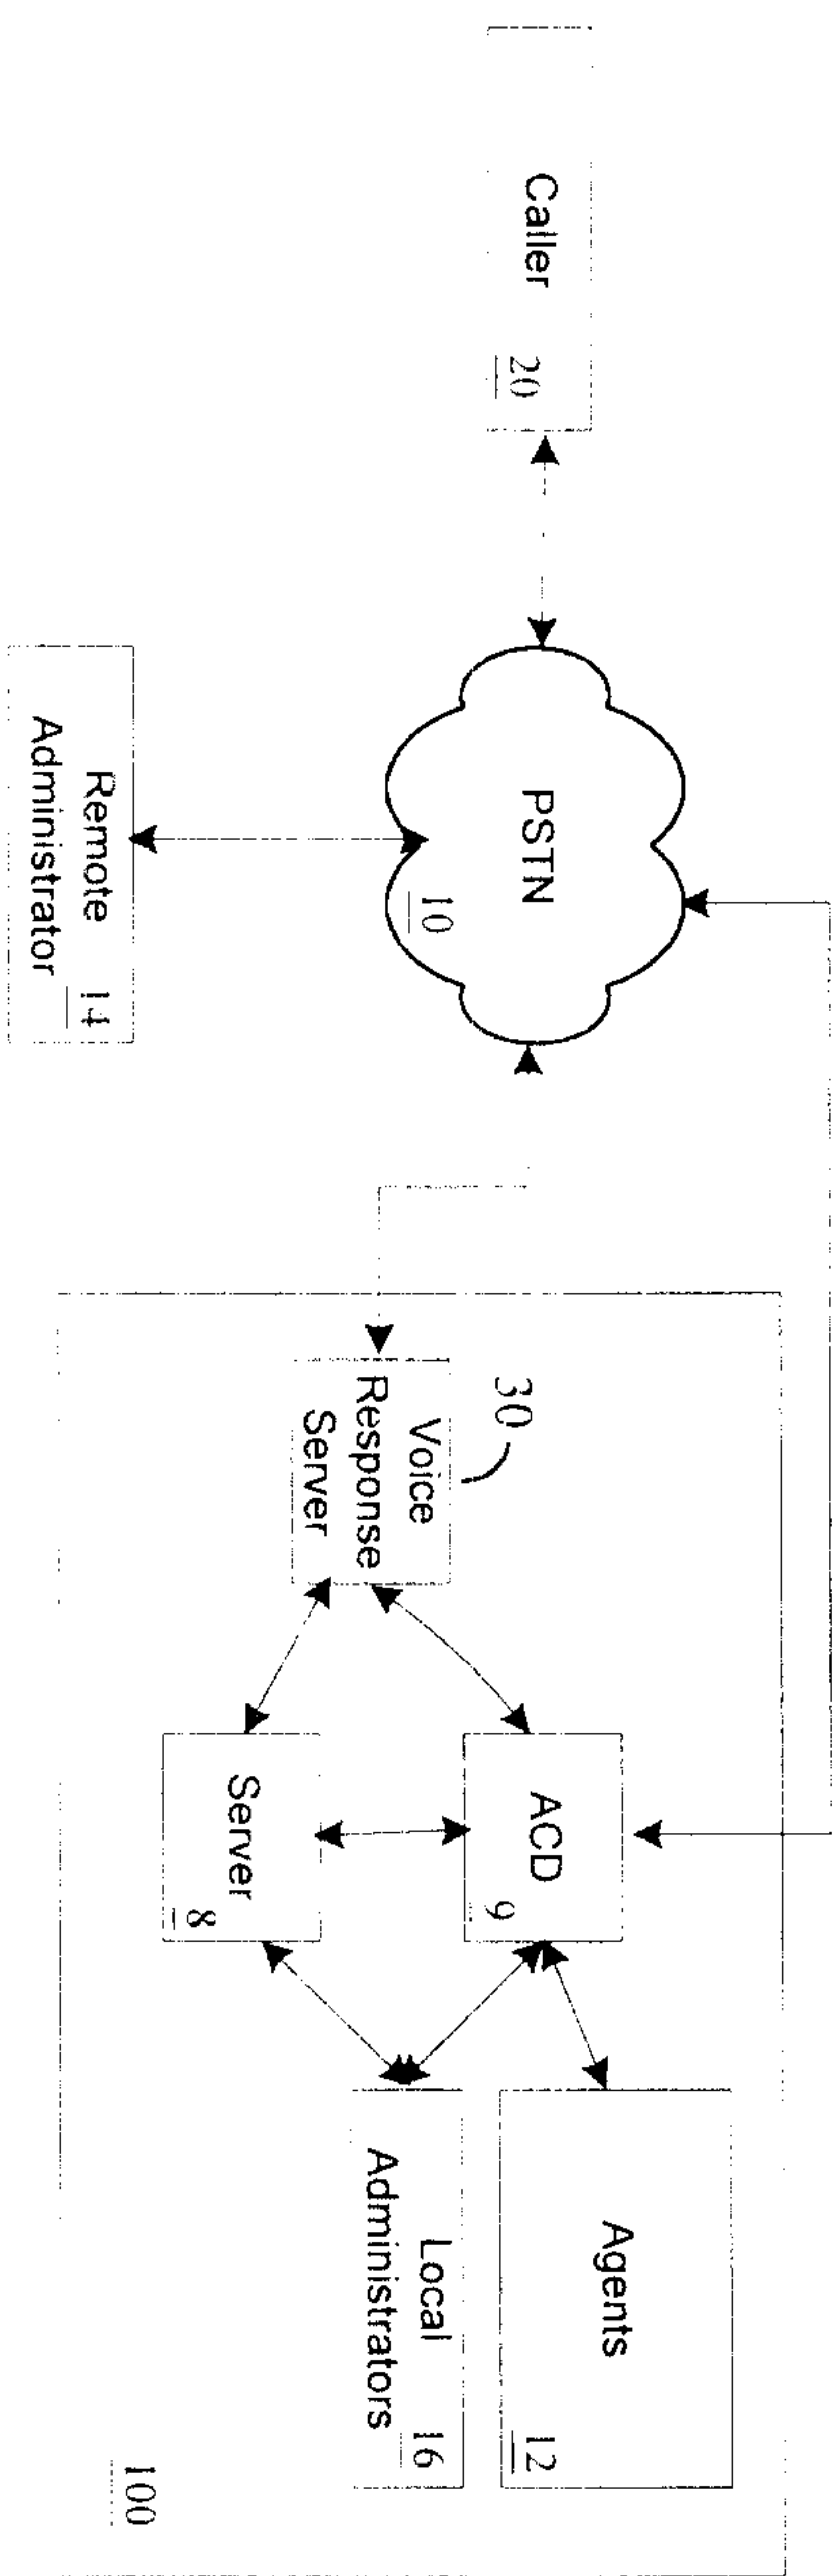


FIG. 2

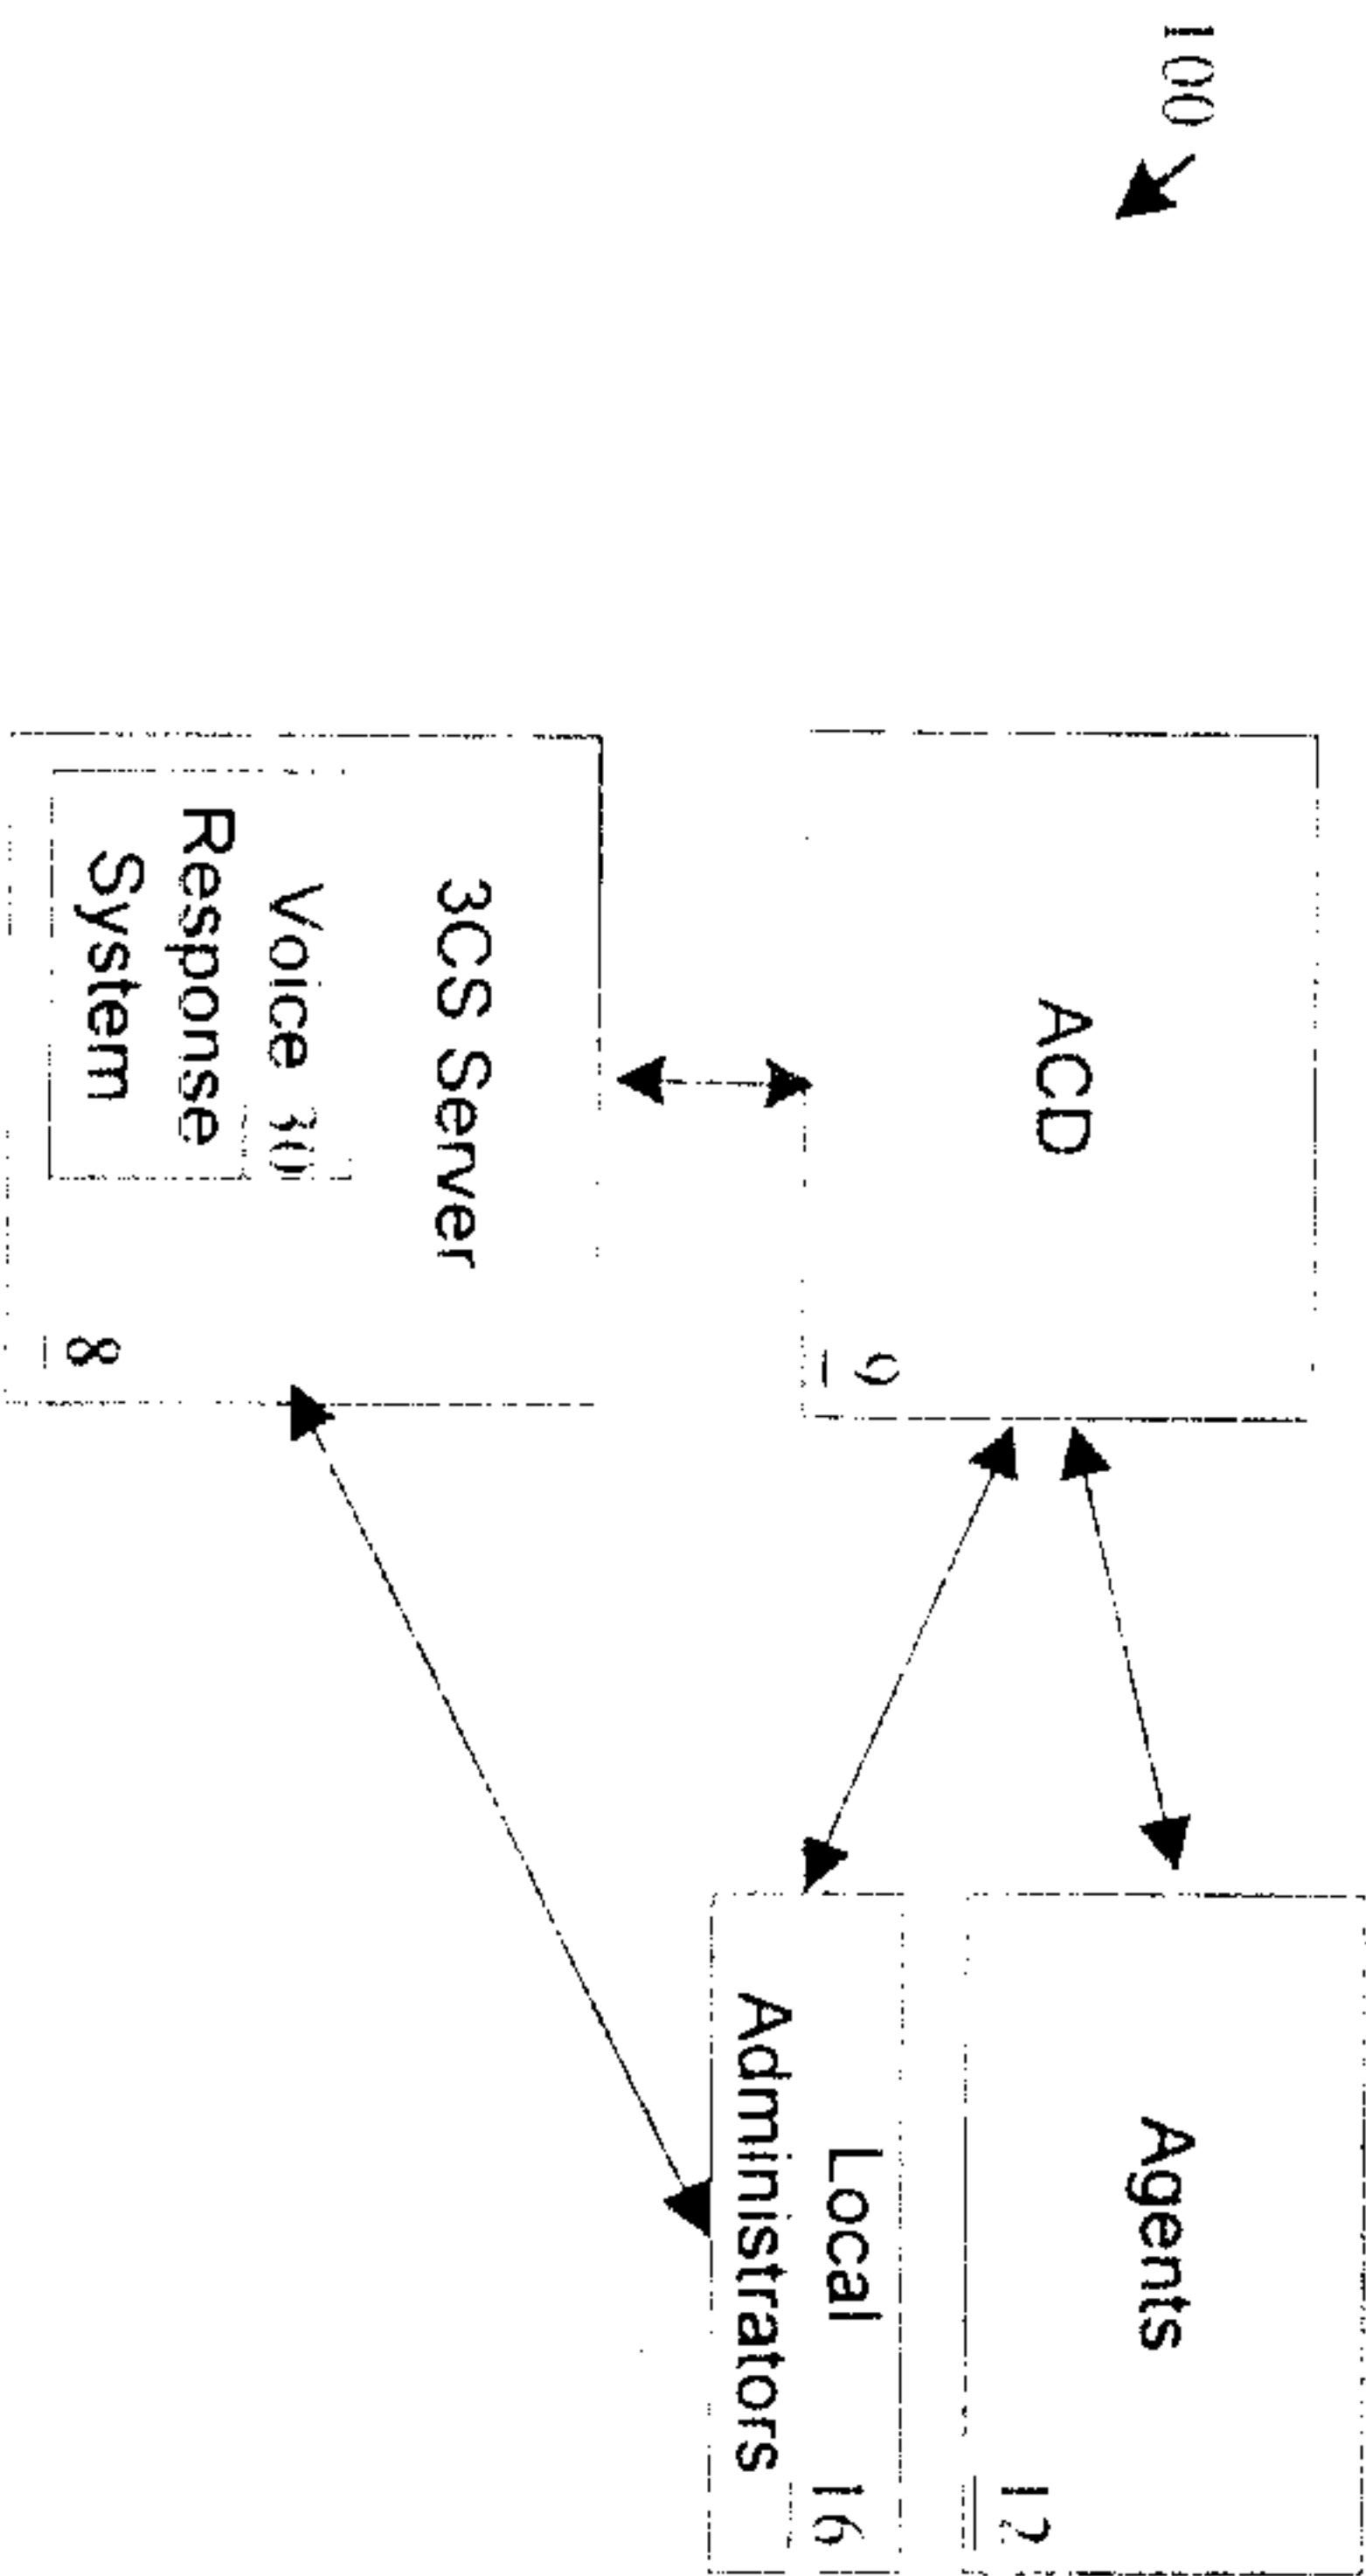


FIG. 3

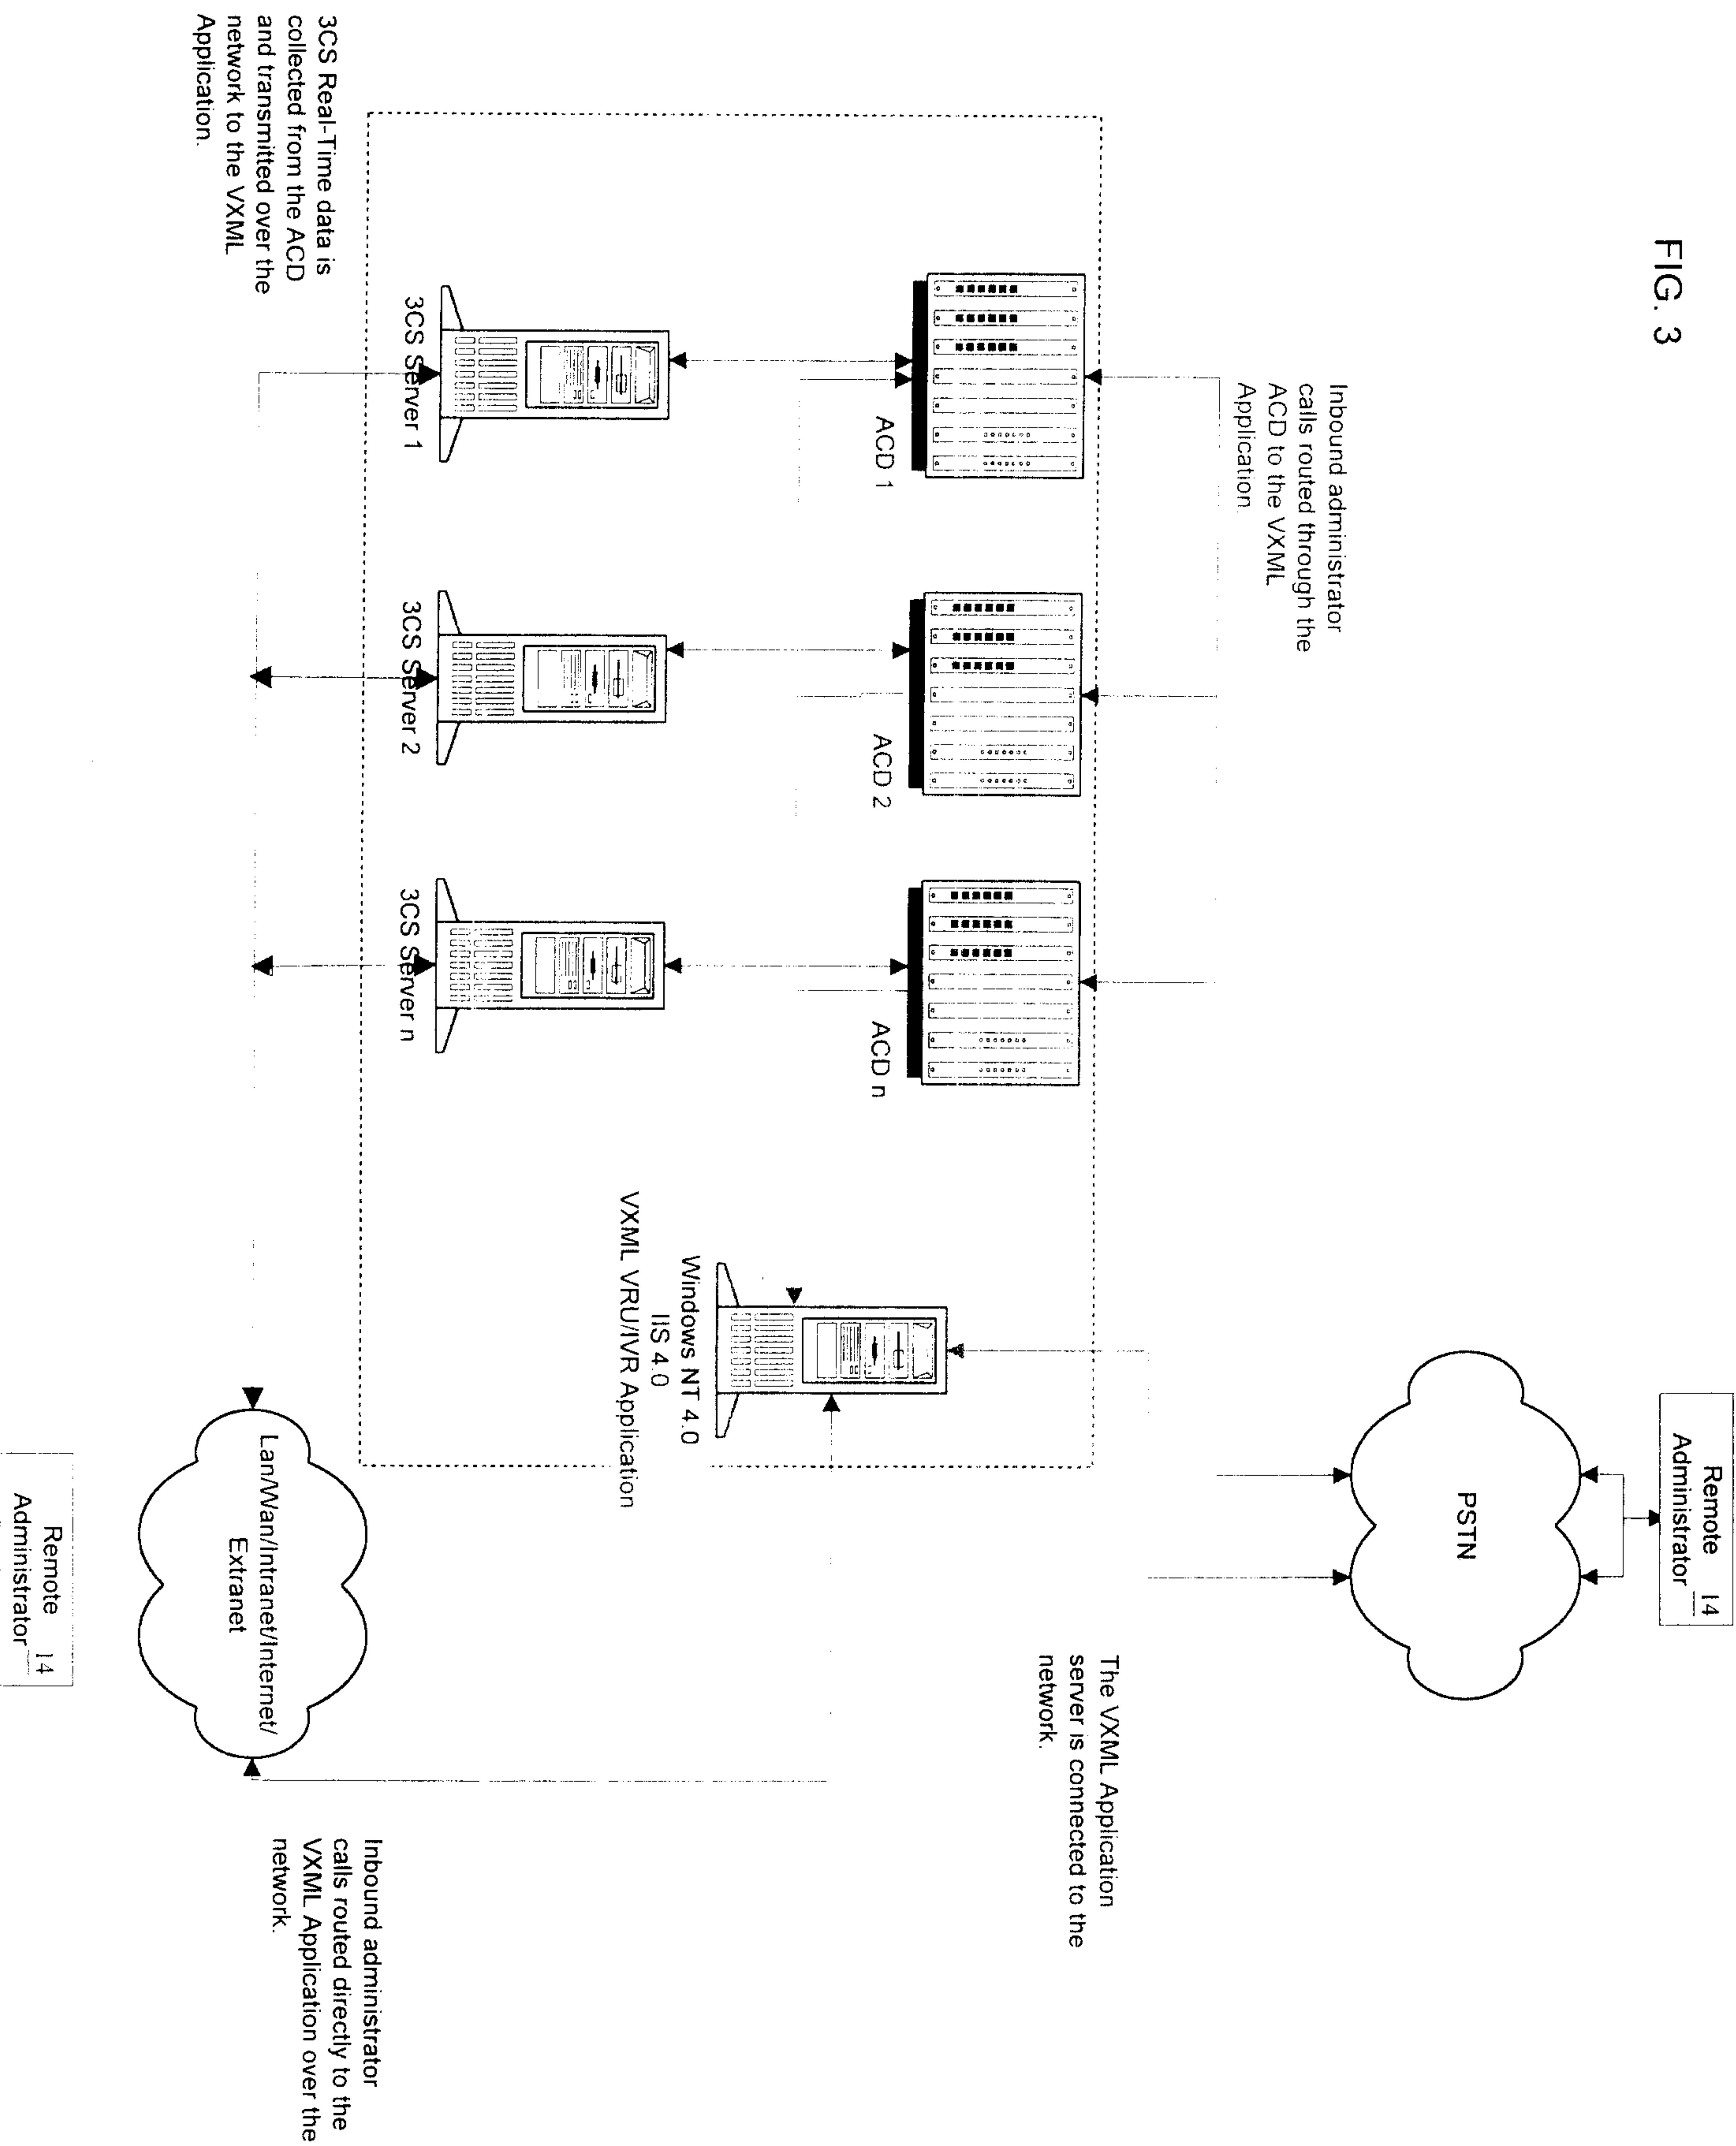


FIG. 4

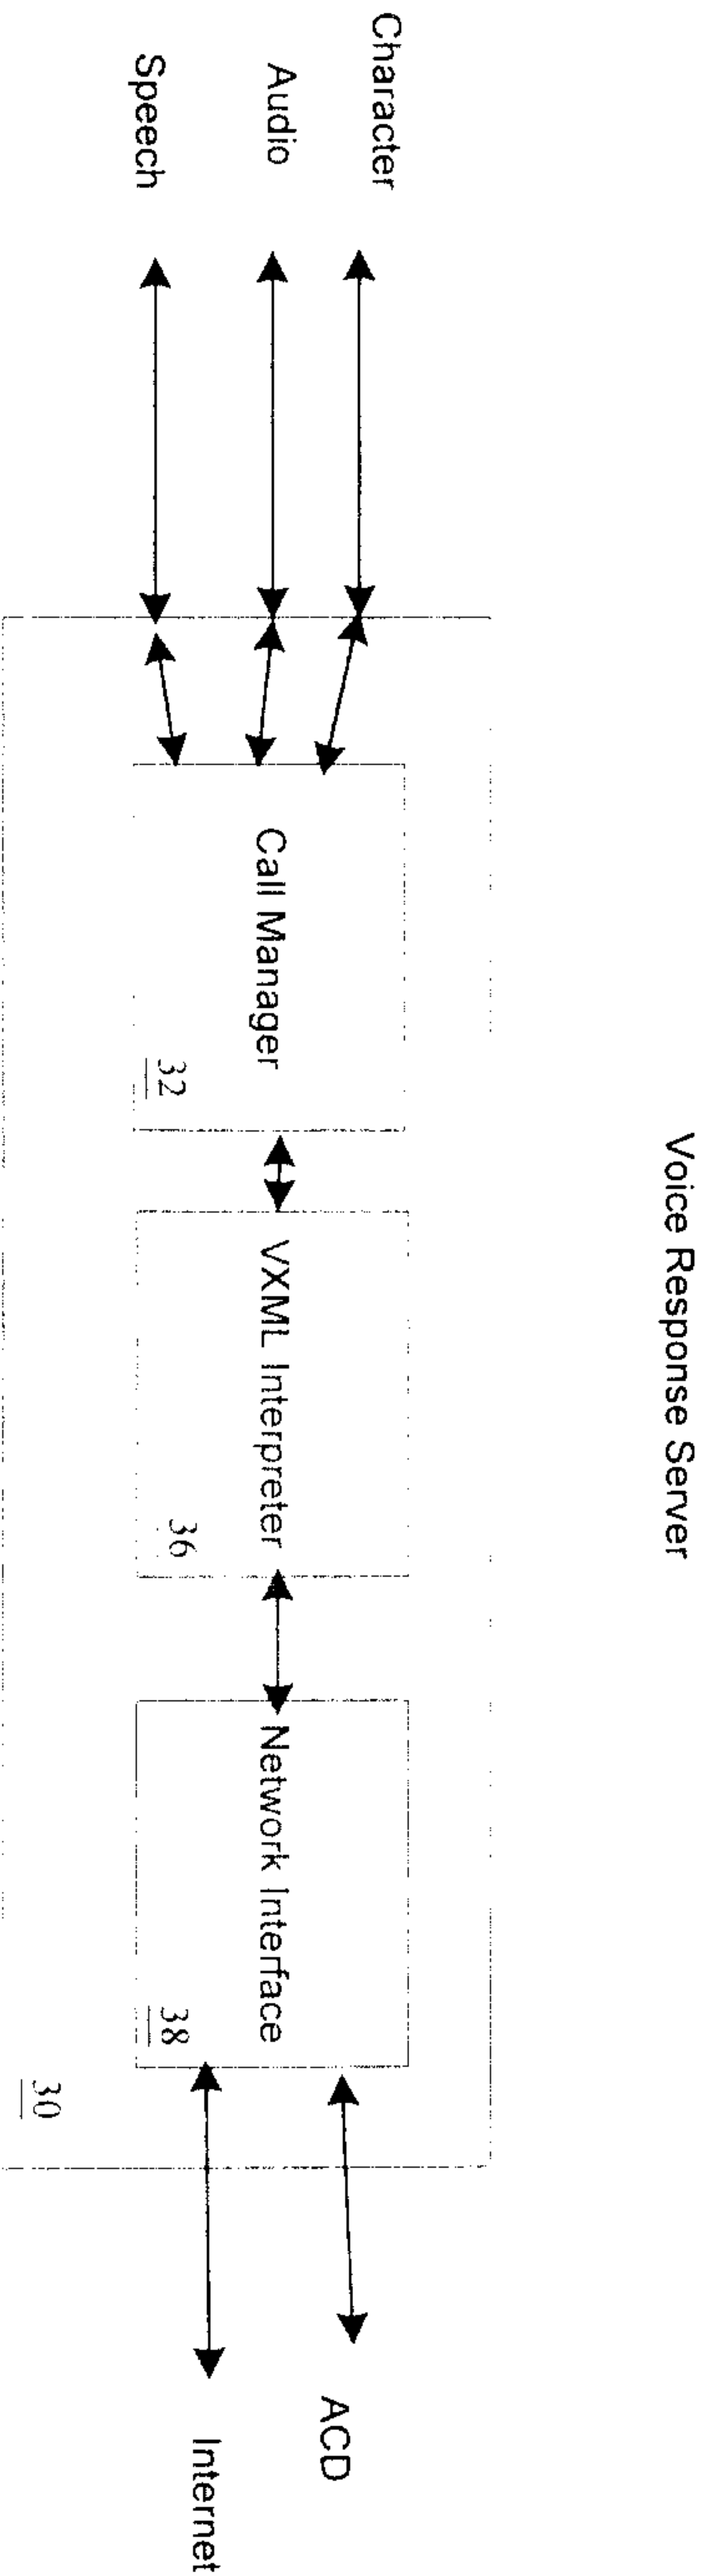


FIG. 5

