



(12) PATENT ABRIDGMENT (11) Document No. AU-B-86853/91
(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 641053

- (54) Title
INK COMPOSITION AND PROCESS FOR PRODUCING A LITHOGRAPHIC PRINTING PLATE USING THE SAME
- (51)⁵ International Patent Classification(s)
C09D 011/02 G03F 007/022
- (21) Application No. : **86853/91** (22) Application Date : **29.10.91**
- (30) Priority Data
- (31) Number (32) Date (33) Country
2-296516 31.10.90 JP JAPAN
- (43) Publication Date : **07.05.92**
- (44) Publication Date of Accepted Application : **09.09.93**
- (71) Applicant(s)
NIPPON PAINT CO., LTD.
- (72) Inventor(s)
TAKAKAZU HASE; SEIJI ARIMATSU; KOICHI KIMOTO
- (74) Attorney or Agent
DAVIES COLLISON CAVE , 1 Little Collins Street, MELBOURNE VIC 3000
- (56) Prior Art Documents
US 4923515
- (57) Claim

1. An aqueous ink composition having a surface tension of 30 to 35 dyn/cm, comprising;
- (a) a dye having an absorption wave length ^{in the range of} ~~within~~ 200 to 800 nm ~~in the photosensitive wave length range of a positive type photosensitive plate,~~
- (b) an evaporation controlling agent, and
- (c) a surfactant.
7. A process for producing a lithographic printing plate, comprising;
- (i) printing an aqueous ink composition on a positive type photosensitive plate by ink-jet printing, wherein said ink composition has a surface tension of 30 to ^{and} 35 dyn/cm, ^{in the range of} comprises;
- (a) a dye having an absorption wave length ^{in the range of} ~~within~~ 200 to 800 nm, ~~in the photosensitive wave length range of a positive type photosensitive plate,~~

(b) an evaporation controlling agent, and
(c) a surfactant,
(ii) exposing the printed plate to light, followed
by developing.

12. The process according to Claim 7 wherein said dye (a) is present in an amount of 1 to 20 % by weight, said evaporation controlling agent (b) is present in an amount of 5 to 40 % by weight and said surfactant (c) is present in an amount of 0.1 to 5 % by weight; % by weight being based on the total composition weight.

641053

AUSTRALIA
PATENTS ACT 1990
COMPLETE SPECIFICATION

NAME OF APPLICANT(S):

Nippon Paint Co., Ltd.

ADDRESS FOR SERVICE:

DAVIES & COLLISON

Patent Attorneys

1 Little Collins Street, Melbourne, 3000.

INVENTION TITLE:

Ink composition and process for producing a lithographic printing plate using the same

The following statement is a full description of this invention, including the best method of performing it known to me/us:-

FIELD OF THE INVENTION

The present invention relates to an ink composition
5 and a process for producing a lithographic printing plate
using the same. More particularly, the present invention
relates to a direct platemaking system for offset printing
wherein lithographic printing plates are prepared directly
by ink-jet printing from digital information in a computer
10 or a facsimile machine without using a positive film, and an
aqueous ink composition therefor.

BACKGROUND OF THE INVENTION

Offset printing using lithographic printing plates
is used in various printing areas, such as newspaper
15 printing, commercial printing and the like, because print
quality is superior to other printing processes. Most of
the lithographic printing plates for offset printing are
photosensitized plates (PS plates) having a photosensitive
layer on a substrate and are classified into two types. One
20 is a negative type wherein a portion exposed to light is
cured, and the other is a positive type wherein a portion
exposed to light is developed or eluted. The positive type
one is mainly used for high quality color printing of for
example posters, because the printing qualities are better
25 than the negative type one.

On the other hand, computer technique has been
remarkably developed in these days and a direct platemaking

system has been proposed in which lithographic printing plates are made directly from the digital information output from computers or facsimile machines without using a positive or negative film.

5 In the direct platemaking system, a laser platemaking is known to the art. The laser platemaking is a scanning exposure process wherein a laser light is scanned on a photosensitive plate, such as a wipe-on plate, a PS plate and an electrophotographic plate, according to the
10 digital information to form a printing plate without a positive or negative film. The photosensitive plate to be exposed to laser light does not have sufficient sensitivity and therefore the laser light has to have a high output power, so as to make the system cost-up. Also, the system
15 needs complicated optical means for conducting the laser light, and driving means for scanning the whole surface of the photosensitive plate, so that the apparatus is made large.

 An ink-jet platemaking is also known to the art.
20 For example, Japanese Kokai Publication 56-113456 discloses a process wherein a photocurable silicone oil is printed by ink-jet printing to form a non-image area. Japanese Kokai Publication 64-27953 discloses a process wherein a hydrophobic material, which is solid at room temperature and
25 melts at an elevated temperature, is printed by an ink-jet process using a thermal head on the plate to form an image area. Also, Japanese Kokai Publication 51-84303 discloses

four processes wherein a silicone is printed by an ink-jet process, or wherein a catalyst for curing the silicone is printed on the silicone layer, or wherein a photopolymerizable ink receptor which can be bound with the silicone is printed thereon, or wherein light absorbing liquid is printed on the photocurable silicone layer. In the former two processes, the printed portion is a non-image portion and the latter two processes, the printed portion is an image portion.

10 The process of Japanese Kokai Publication 56-113456 is not good in economical viewpoints, because a large amount of silicone oil is printed as the non-image portion which is larger than the image portion. The resolution is also poor because printed portion by silicone oil is a non-image
15 portion. In the process of Japanese Kokai Publication 64-27953, the hydrophobic ink material should be liquid at an elevated temperature whose viscosity is low enough to be used for ink-jet printing, and, as the result, solidified image area at room temperature is not strong enough to make
20 many copies in printing. Also in the process of Japanese Kokai Publication 51-84303, the plate material to be printed and the ink to form image area should be specific and therefore the process is not good for practical use.

SUMMARY OF THE INVENTION

25 The present invention provides a process for producing a lithographic printing plate which has excellent printing durability by way of ink-jet printing, and an

aqueous ink composition therefor. The aqueous ink composition of the present invention has a surface tension of 30 to 35 dyn/cm, and comprises (a) a dye having an absorption wave length ^{in the range of} ~~within~~ 200 to 800 nm ~~in the~~

5 ~~photosensitive wave length range of a positive type photosensitive plate~~, (b) an evaporation controlling agent, and (c) a surfactant.

The present invention also provides a process for producing a lithographic printing plate which comprises
10 printing the above mentioned aqueous ink composition on a positive type photosensitive plate by ink-jet printing, and then exposing the printed plate to light, followed by developing.

DETAILED DESCRIPTION OF THE INVENTION

15 The aqueous ink composition of the present invention is functioned as a mask film on the photosensitive plate and therefore should absorb a light having the wave length range in which the positive type photosensitive plate will be photosensitive. The dye (a) therefore has to have
20 an absorption wave length in the wave length range in which the plate will be photosensitive. Preferred dyes (a) are water soluble or water dispersible and the light absorption should be high enough to patternize the photosensitive plate, especially having an average light absorbance of 500
25 within the photosensitive wave length range of the photosensitive plate. For example, when the photosensitive plate is prepared from naphthoquinonediazide and a novolac



resin so as to have a photosensitive wave length range of 350 to 430 nm and exposed to a metal halide lamp, preferred dyes are Cathieon Black BXH (C.I. Acid Black 119), Sunchromine Black ET conc. (C.I. Mordant Black II), Direct
5 Black BH, Sumilight Supra Yellow 2GL (C.I. Direct Yellow 39), Kayacyl Yellow GG (C.I. Acid Yellow 17), Procion Brill Yellow GG (C.I. Reactive Yellow 2), a mixture thereof and the like.

The evaporation controlling agent (b) of the
10 present invention inhibits the evaporation of the solvents (e.g. water) of the ink composition to prevent nozzle plugging. Examples of the evaporation controlling agents are polyhydric alcohols, such as dihydric alcohols (e.g. ethylene glycol, diethylene glycol, triethylene glycol,
15 tetraethylene glycol, propylene glycol, dipropylene glycol and polyethylene glycol), trihydric alcohols (e.g. glycerol and trimethylolpropane); a mixture thereof; and the like.

The surfactant (c) of the present invention controls a surface tension of the ink composition in order
20 to prevent repelling and spreading of the ink composition on the photosensitive plate. It also prevents the photosensitive layer on the plate from dissolving with the ink composition. The surfactant (c) is not limited as long as the surface tension of the ink composition is adjusted to
25 30 to 35 dyn/cm, preferably 31 to 34 dyn/cm, and can be anionic, cationic or nonionic. If the ink-jet printing is conducted by a continuous jetting type, the surfactant (c)

is preferably nonionic because the ink is electrostatically charged at the nozzle tip and changes direction in an electric field. The surfactant may preferably have an HLB value of 12 to 14. Typical examples of the surfactants (c) are a polyethyleneglycol alkylphenyl ether, such as polyethyleneglycol nonylphenyl ether and polyethyleneglycol lauryl ether; an aliphatic acid diethanol amide; a sodium alkyl naphthalene sulfonate; polyethyleneglycol nonylphenyl ether sulfate; polyethyleneglycol lauryl ether sulfuric acid triethanol amine; a phosphoric acid ester of polyethyleneglycol alkyl ether or polyethyleneglycol alkyl phenyl ether; a mixture thereof; and the like.

The aqueous medium of the ink composition is mainly deionized water. An organic solvent, such as alcohols may added thereto.

The aqueous ink composition of the present invention may contain other components, such as a buffering agent, a solubilizing agent, a defoaming agent, a bactericide, a stainproofing agent, a mildewcide and the like.

In the aqueous ink composition, the dye (a) may be present in an amount of 1 to 20 % by weight, preferably 3 to 10 % by weight, based on the total amount of the composition. Amounts of more than 20 % by weight may generate agglomerates and the like. The evaporation controlling agent (b) may be present in an amount of 5 to 40 % by weight, preferably 10 to 20 % by weight based on the

total composition weight. If the agent is more than 40 % by weight, the ink composition may dissolve the photosensitive layer of the plate. The surfactant (c) may be present in an amount of 0.1 to 5 % by weight, preferably 0.5 to 3 % by weight, based on the total composition weight. Amounts of more than 5 % by weight do not provide the technical effects of it in proportion to the amount.

The ink composition may be prepared by mixing the above mentioned components. The composition is required to have a surface tension of 30 to 35 dyn/cm. If it is less than 30 dyn/cm, repelling may occur. If it is more than 35 dyn/cm, spreading may occur.

In the process of the present invention, the ink composition obtained above is printed on the positive type photosensitive plate by way of ink-jet printing. The positive type photosensitive plate can be anyone which is commercially available. For example, the plate may be prepared by coating a photosensitive resin composition comprising naphthoquinonediazide and a novolac resin on a substrate. Examples of the substrates are paper, plastics, aluminum and the like. These photosensitive plates are commercially available for commercial printing and newspaper printing and have sufficient sensitivity, resolution and printing durability.

The ink-jet printing is a process wherein an ink is dropwise transferred onto the positive type photosensitive plate in accordance to electric signal of information

pattern to be printed. The ink-jet printing is disclosed in
US Patents 3,465,350, 3,465,351, 3,805,273, 3,832,579,
3,673,601, 3,683,212, 3,582,954, 3,060,429, 3,747,120, UK
Patent 1,042,308 and the like. An ink-jet printing
5 apparatus is also commercially available, for example Ink-
jet Printer HG-800 available from Seiko Epson Co., Ltd and
the like.

The printed photosensitive plate is then exposed to
light. The light sources emit light having a emission wave
10 length within the photosensitive wave range of the
photosensitive plate. Typical examples of the light sources
are a metal halide lamp, a high pressure mercury lamp and
the like.

After exposing to light, the plate is developed to
15 remove the exposed portion with a developer. The developed
plate may be subjected to general treatments, such as
finishing and the like, to obtain a lithographic printing
plate.

In the process of the present invention, the images
20 are printed out by ink-jet printing. Thus, printing is
rapidly conducted and the apparatus can be made compact
because complicated light systems are not needed.
Platemaking cost is therefore reduced and its maintenance
becomes easy.

25 The ink composition of the present invention makes
it possible to directly conduct platemaking from digital
information output from computers or facsimiles without a

positive film.

In the process of the present invention, the conventional positive type photosensitive plates are usable and therefore good sensitivity and resolution are expected. Also, the resulting printing plates also have excellent printing durability.

The ink composition of the present invention does not have problems of repelling and spreading when printed and therefore printing qualities are good.

10

BRIEF EXPLANATIONS OF THE DRAWINGS

Fig.1 is a graph showing relations between the surface tension of the ink composition and the quality of the printed images.

15

Fig.2 is a graph showing the change of the remaining ink amount when an amount of the evaporation controlling agent (i.e. ethylene glycol) is changed. No. 1, 2, 3 and 4 represent Examples 25-27 and Comparative Example 11, respectively.

EXAMPLES

20

The present invention is illustrated by the following examples which, however, are not to be construed as limiting the present invention to their details.

Examples 1 to 15

The dyes listed in Table 1 was employed and an aqueous ink composition was prepared from the following ingredients.

Ingredients

Parts by weight

	Glycerol	20.0
	Deionized water	80.0
	Polyethyleneglycol nonyl phenyl ether	2.0
5	Dye listed in Table 1	2.0
	Total	104.0

The obtained ink composition was charged in an ink-jet printer available from Seiko Epson Co., Ltd. as Ink-jet Printer HG-800, and printed on a positive type
10 photosensitive plate available from Nippon Seihaku Co., Ltd. as Esperl. It was then exposed to a metal halide lamp having an output of 3 KW, and developed with a developer. The image quality of the obtained printing plate was evaluated and the result is shown in Table 1.

15 Example 16 and Comparative Example 1

An ink was prepared as generally described in Example 1, with the exception that the dye was not formulated (Comparative Example 1) or 5 parts by weight of the dye (Kayacyl Yellow GG) was employed. The same printing
20 test was conducted and the result is also shown in Table 1.

Table 1

Example number	Dye name	Amount (parts)	Printed image quality ¹	
			50 mJ/cm	100 mJ/cm
1	Sumilight Supra Yellow 2GL	2	4	2
2	Sunchromine Black ET conc.	2	4	1
3	Sumilan Black WA	2	3	1
4	Direct Black BH	2	5	1
5	Japanol Fast Black D conc.	2	-	-
6	Sumiacryl Black G	2	-	-
7	Procion Brill Yellow H-5G	2	5	1
8	Sumiacryl Black AP	2	3	1
9	Nigrosine	2	2	1
10	Cathion Black BXH	2	4	1
11	Opal Black new conc.	2	-	-
12	Opal Black GNH	2	1	1
13	Cathion Black ABH	2	-	-
14	Malachite Green	2	4	2
15	Kayacyl Yellow GG	2	4	4
16	Kayacyl Yellow GG	5	5	5
Comp. Ex. 1	Nothing	0	0	0

- ¹ Evaluation of printed images; 0 shows nothing remaining.
 1 shows almost disappearing. 2 shows quite thin.
 3 shows slightly thin. 4 shows good or slight thin.
 5 shows good.

29090

75 07 83

Examples 17 to 24 and Comparative Example 2 to 9

The surfactant listed in Table 2 was employed and an aqueous ink composition was prepared from the following ingredients and the surface tension is also shown in Table

5 2.

<u>Ingredients</u>	<u>Parts by weight</u>
Glycerol	20.0
Deionized water	80.0
Surfactant listed in Table 2	2.0
Kayacyl Yellow GG	2.0
Total	104.0

10

15

20

The obtained ink composition was printed and developed as generally described in Example 1 and the image quality of the obtained printing plate was evaluated and the result is shown in Table 2. The relation of surface tension and printed image quality is also shown in Fig.1. As is apparent from Fig.1, the ink compositions within the claimed surface tension range have good properties in repelling and spreading and also provide excellent image quality.


Comparative Example 10

25

An ink was prepared as generally described in Example 1, with the exception that an aqueous ink for ink-jet printing, which had the surface tension as shown in Table 2, was employed. The same printing test was conducted and the result is also shown in Table 2.

Table 2

Example number	Surfactant	Surface tension ¹ dyn/cm	Printed image quality ²
17	Polyethyleneglycol lauryl ether (ET 143) HLB=14	30.8	4
18	Polyethyleneglycol lauryl ether (Emulgen 109P) HLB=13	33	5
19	Aliphatic acid diethanolamide (Dianol 300)	30.1	5
20	Sodium alkylnaphthalenesulfonate (Pelex NBL)	33.8	5
21	Polyethyleneglycol nonyl phenyl ether sulfate (Newcol 560SN)	32.4	4
22	Polyethyleneglycol lauryl ether sulfuring triethanolamine (Sundit ET)	34	6
23	Polyethyleneglycol alkyl ether phosphate (GAFAC LO-529)	33.1	7
24	Polyethyleneglycol lauryl phenyl ether (EA120) HLB=12	33.5	7
Comp. Ex.			
2	Polyethyleneglycol lauryl ether (ET83) HLB=8	24.7	1
3	Polyethyleneglycol alkyl phenyl ether (Emuldit 16) HLB=18	48.4	9
4	N-polyethyleneglycolalkylamine (Amiradine D)	46	8
5	Sodium dialkylsulfosuccinate (Pelex OTP)	26	1
6	Sodium dialkylsulfosuccinate (Pelex TR)	26.7	1
7	Sodium polyethyleneglycol alkyl phenyl ether phosphate (Revenol WZ)	45.1	8
8	Sodium laurylsulfate (Emul O)	37.2	10
9	Polyethyleneglycol alkyl ether phosphate (GAFAC RD-720)	36.7	8
10	Aqueous ink for ink-jet printers (commercially available)	61.4	9



1 Surface tension was determined by Dynometer (platinum ring method, pulling out rate = 1.5 mm/min).

2 Printed image quality is shown as 10 levels. The smaller the number, the worse the repelling. The larger the number, the worse the spreading. The 4-7 levels are acceptable.

5 Examples 25 to 27 and Comparative Example 11

The ethylene glycol of the amount listed in Table 1 was employed as the evaporation controlling agent and an aqueous ink composition was prepared from the following ingredients.

10	<u>Ingredients</u>	<u>Parts by weight</u>
	Ethylene glycol	X
	Deionized water	80.0
	Polyethyleneglycol nonyl phenyl ether	2.0
	Kayacyl Yellow GG	2.0
15	Total	84.0+X

The drying characteristics of the ink composition were evaluated by changing the amount of ethylene glycol and the result is shown in Table 3 and Fig.2. The drying characteristics were determined by the change of weight of the ink composition. As is apparent from the result, the ink composition with an evaporation controlling agent has good drying characteristics.

Table 3

		Examples			Comp. Ex.
		25	26	27	11
5	Amount of ethylene glycol (parts by weight)	5	10	20	0
	Ink	0	100	100	100
	weight	26 hours	90	93	88
	with	50 hours	85	90	88
	time	74 hours	68	71	79
		115 hours	14	30	45

10

15

20

25

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. An aqueous ink composition having a surface tension of 30 to 35 dyn/cm, comprising;

(a) a dye having an absorption wave length ^{in the range of} ~~200 to 800 nm in the photosensitive wave length range of a~~
5 ~~positive type photosensitive plate,~~

(b) an evaporation controlling agent, and

(c) a surfactant.

2. The aqueous ink composition according to Claim
10 1 wherein said dye (a) is water soluble or water dispersible and has an average light absorbance of 500 within the photosensitive wave length range of said plate.

3. The aqueous ink composition according to Claim
15 1 wherein said dye (a), when the photosensitive plate is prepared from naphthoquinonediazide and a novolac resin so as to have a photosensitive wave length range of 350 to 430 nm and exposed to a metal halide lamp, are selected from the group consisting of C.I. Acid Black 119, C.I. Mordant Black II, C.I. Direct Yellow 39, C.I. Acid Yellow 17, C.I.
20 Reactive Yellow 2 and a mixture thereof.

4. The aqueous ink composition according to Claim 1 wherein said evaporation controlling agent (b) includes polyhydric alcohols.

5. The aqueous ink composition according to Claim
25 1 wherein said surfactant (c) has an HLB value of 12 to 14.

6. The aqueous ink composition according to Claim 1 wherein said dye (a) is present in an amount of 1 to 20 %



by weight, said evaporation controlling agent (b) is present in an amount of 5 to 40 % by weight and said surfactant (c) is present in an amount of 0.1 to 5 % by weight; % by weight being based on the total composition weight.

5 7. A process for producing a lithographic printing plate, comprising;

(i) printing an aqueous ink composition on a positive type photosensitive plate by ink-jet printing, wherein said ink composition has a surface tension of 30 to 35 dyn/cm, ^{and} comprises;

(a) a dye having an absorption wave length ^{in the range of} ~~within~~ 200 to 800 nm, ~~in the photosensitive wave length range of a positive type photosensitive plate,~~

(b) an evaporation controlling agent, and

15 (c) a surfactant,

(ii) exposing the printed plate to light, followed by developing.

8. The process according to Claim 7 wherein said dye (a) is water soluble or water dispersible and has an average light absorbance of 500 within the photosensitive wave length range of said plate.

9. The process according to Claim 7 wherein said dye (a), when the photosensitive plate is prepared from naphthoquinonediazide and a novolac resin so as to have a photosensitive wave length range of 350 to 430 nm and exposed to a metal halide lamp, are selected from the group consisting of C.I. Acid Black 119, C.I. Mordant Black II,



C.I. Direct Yellow 39, C.I. Acid Yellow 17, C.I. Reactive Yellow 2) and a mixture thereof.

10. The process according to Claim 7 wherein said evaporation controlling agent (b) includes polyhydric
5 alcohols.

11. The process according to Claim 7 wherein said surfactant (c) has an HLB value of 12 to 14.

12. The process according to Claim 7 wherein said dye (a) is present in an amount of 1 to 20 % by weight, said
10 evaporation controlling agent (b) is present in an amount of 5 to 40 % by weight and said surfactant (c) is present in an amount of 0.1 to 5 % by weight; % by weight being based on the total composition weight.

13. The process according to Claim 7 wherein said
15 plate is prepared by coating a photosensitive composition comprising naphthoquinonediazide and a novolac resin on a substrate.

20

25

ABSTRACT OF THE DISCLOSURE

The present invention provides a process for producing a lithographic printing plate which has excellent printing durability by way of ink-jet printing, and an aqueous ink composition therefor. The aqueous ink composition of the present invention has a surface tension of 30 to 35 dyn/cm, and comprises (a) a dye having an absorption wave length within 200 to 800 nm in the photosensitive wave length range of a positive type photosensitive plate, (b) an evaporation controlling agent, and (c) a surfactant.

The present invention also provides a process for producing a lithographic printing plate which comprises printing the above mentioned aqueous ink composition on a positive type photosensitive plate by ink-jet printing, and then exposing the printed plate to light, followed by developing.

Fig. 1

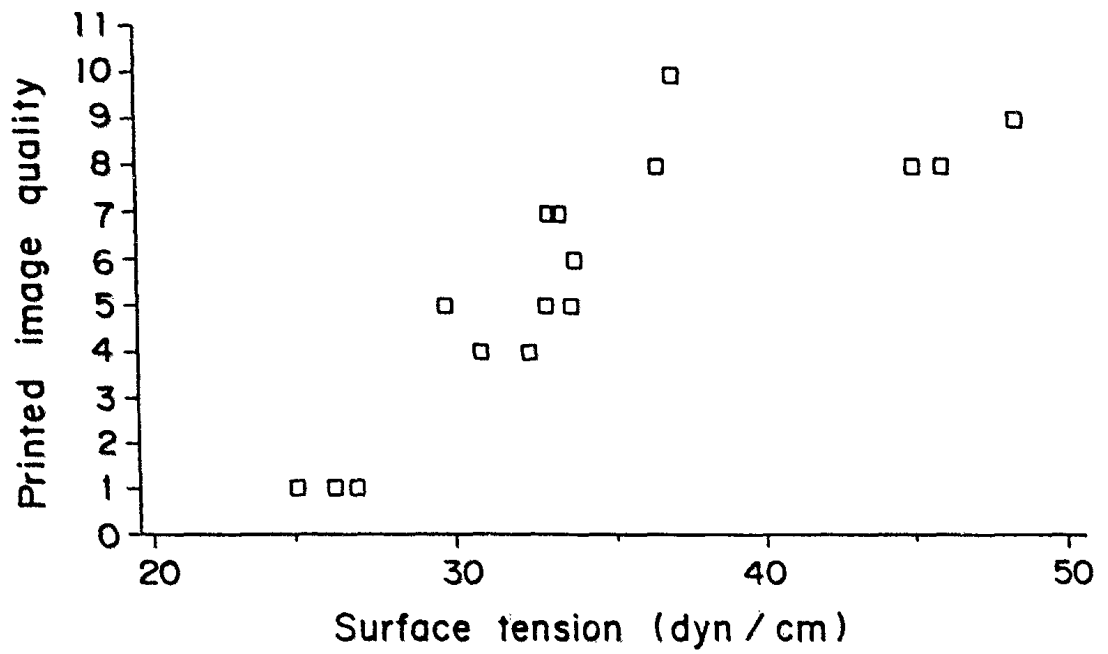


Fig. 2

