




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: A61B 17/60	A1	(11) International Publication Number: WO 95/22291 (43) International Publication Date: 24 August 1995 (24.08.95)
(21) International Application Number: PCT/IB95/00095 (22) International Filing Date: 13 February 1995 (13.02.95) (30) Priority Data: 08/198,986 18 February 1994 (18.02.94) US (71) Applicant: SOFAMOR, S.N.C. [FR/FR]; 158, rue de l'Eglise, Boîte postale 4, F-62180 Rang-du-Fliers (FR). (72) Inventors: LOGROSCINO, Carlo; Piazza Madonna del Cenacolo, 4, I-00136 Roma (IT). BANCEL, Philippe; 7, rue Faustin-Elie, F-75016 Paris (FR). GOUBE, Michel; 38, Résidence Les Bécots, Avenue Foch, F-62152 Hardelet (FR). JEROME, Pierre; 36, avenue Jean-Moulin, F-75014 Paris (FR). MARIENNE, Jean-Luc; 25, rue Gabriel-Péri, F-62600 Berck-sur-Mer (FR). (74) Agents: MARTIN, Jean-Paul et al.; Cabinet Lavoix, 2, place d'Estienne-d'Orves, F-75441 Paris Cédex 09 (FR).		(81) Designated States: AU, CA, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>

(54) Title: OCCIPITO-CERVICAL OSTEOSYNTHESIS INSTRUMENTATION**(57) Abstract**

The instrumentation comprises two separate similar parts, namely a right part (1) and a left part (2), each formed by a cervical rod (3) having asperities and an elongate occipital plate (5) forming one piece with the rod and extending it toward the occiput (6) in the position of use, and adjustable means for anchoring the rod to the vertebrae and the plate to the occiput. Each part is so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection. Each rod (3) has two rectilinear sections making therebetween an angle of between about 70 and 90°, one of the sections being connected to the occipital plate (5), which is bent so as to correspond to the curvature of the occipital shell. The invention permits conveniently adapting the distance between the rods (3) to the anatomy of the patient and reduces the overall size of the instrumentation, which enables projections under the skin of the occiput to be considerably reduced.

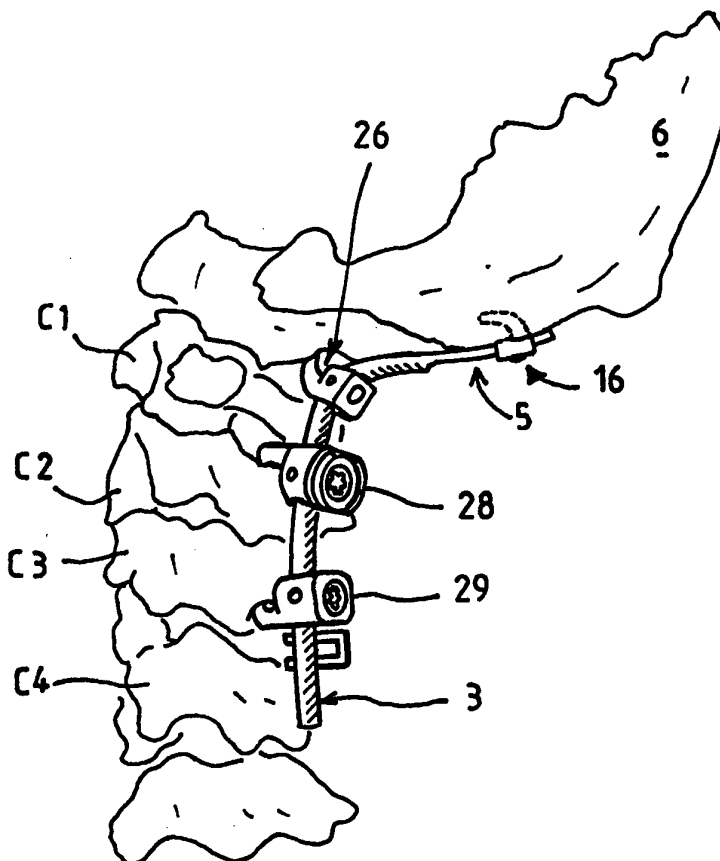

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

OCCIPITO-CERVICAL OSTEOSYNTHESIS INSTRUMENTATION

The present invention relates to an occipito-cervical osteosynthesis instrumentation and a hook adapted to be part of this instrumentation.

5 It is known that in the orthopaedic surgery of the cervical spine, when an instrumentation is required to realize an occipito-cervical artrodesis, the surgeon usually employs an instrumentation composed of plates and screws. There has thus been put on the market an assembly
10 having the general shape of a horseshoe consisting of two rods in one piece with a curved connection plate, the rods being knurled and disposed in the cervical part, while the curved plate is in the occipital part. The fastening to the cervical vertebrae is achieved by thoracic and
15 pediatric laminar hooks, whereas the connection of the plate to the occiput is achieved by a plurality of screws.

This device has a drawback in that it cannot be shaped in a satisfactory manner to the anatomical configuration of the patient, above all in the cervical part. Indeed, it is
20 difficult to adapt the distance between the two rods in the cervical part while achieving an appropriate bending of the incurvate connection plate.

Further, in the orthopaedic surgery of the cervical segment, pathologies are encountered concerning the upper
25 cervical vertebrae Atlas (C1) and Axis (C2). Among these pathologies there are essentially the degenerative pathology (cerviarthrosis) and the tumoral traumatic

pathology. When an instrumentation is employed by the posterior approach, it is composed of either rods or plates, their common purpose being to isolate the pathological segment by connecting the occiput to the sound
5 subjacent vertebrae. Thus various instrumentation rods, frames and plates are known, for example the Cotrel Dubousset rod, the Privat plate, the Roy Camille plate, etc. The means for connecting these various plates to the bone (occiput or vertebrae) comprise the following
10 elements:

- a) articular screws (inserted in the articular massives) and occipital screws,
- b) occipital screws and laminar hooks bearing against the vertebrae,
- 15 c) metal wires constituting a bone lacing.

The screwed plates provide a solid occipito-cervical connection, but have some drawbacks: indeed, some are difficult to bend to the required curvature and have a fixed distance between the two rods of the cervical part.
20 Others have a connection with the bone such as lacing, which is incompatible with laminectomies and lacks solidity, and are difficult to place in position.

Further, certain hooks employed in the prior instrumentations create, owing to the height of their head,
25 a projection under the skin of the occiput of the patient which of course is better to eliminate.

It is also known from the French patent application

92 01 913 (2 687 561) to provide an occipito-cervical device in which the two cervical rods are extended by incurvate plates connected at their ends by a transverse connection plate. The assembly is fixed to the occiput by
5 means of screws extending through openings in the connection plate, which permits a certain adjustment to the desired conformation.

However, here again, the possibilities of an anatomical adaptation are in fact limited, although this device
10 affords the possibility of adjustment relative to the preceding device.

An object of the invention is to provide an occipito-cervical instrumentation which is arranged in such manner as to enable it to be better adaptable to the occipito-cervical anatomy of the patient, and which largely reduces
15 projections under the skin.

According to the invention, the occipito-cervical instrumentation comprises:

a) two separate similar parts, namely a right and a
20 left part, each formed by a cervical rod having asperities and an elongate occipital plate which forms one piece with said rod and extends said rod toward the occiput in the position of use,

b) adjustable means for anchoring the rod to the
25 vertebrae and the plate to the occiput,

c) each part being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection.

Thus, in this assembly, the ends of the two occipital plates are not interconnected, which permits easily shaping them to the occipital anatomy of the patient, in the same way as the rods having asperities with which they
5 respectively form one piece. The invention therefore affords the surgeon an improved flexibility and greater facility of adaptation of the assembly to the anatomical particularities of the patient.

This instrumentation may be advantageously completed by
10 a transverse connection device which is positioned, either at the cervical level, or at the base of the occiput, by interconnecting the rods having asperities.

According to one embodiment of the invention, each rod has two substantially rectilinear sections making
15 therebetween an angle of between about 70 and 90°, with a small angulation radius, one of the sections being shorter than the other and connected to the occipital plate, which is so bent as to correspond to the curvature of the occipital shell, the shortest rod section extending along
20 the base of the occiput in the position of use.

A "small" radius is intended to mean for example a radius of about 4 mm.

This feature of an angulation with a small radius provides the possibility of achieving very short assemblies
25 (C0-C1-C2, C0 being the occiput). Such assemblies therefore preserve the subjacent vertebra C3 and the following, which limits the surgical wound, avoids damaging

the subjacent ligamentary complexes, and allows the patient maximum mobility which he would no longer have if the assembly had involved the vertebra C3 and the following vertebrae.

5 According to one feature of the invention, an oblong opening and a circular opening are formed in each elongate occipital plate and adapted to receive hooks and/or screws for fixing the plate to the occiput, it being possible to fix the hooks in different positions in the oblong
10 openings.

In an alternative embodiment, the circular opening and the oblong opening may be replaced by three circular openings.

According to another feature of the invention, said
15 adjustable anchoring means comprise, for each occipital plate, a hook having a laminar portion adapted to the shape of the occipito-cervical lamina, and a body which has a small height relative to its width and in which is provided a groove for receiving and guiding an occipital
20 plate, a tapped hole being provided in said body in facing relation to the oblong opening or to the circular opening of the plate for receiving a screw fixing the plate to the hook.

The head of the screw has a shape corresponding to a
25 spotfacing formed around the periphery of the oblong opening and can in this way be made flush with the end surface of the hook and with the surface of the plate.

The small thickness of the body of the hook achieved by means of this configuration reduces the overall size of the device and consequently in large part eliminates the projection under the skin created by certain screws in prior instrumentations (screws having a U-shaped open body and an internally threaded plug or a screw having a closed body).

Further features and advantages of the invention will be apparent from the following description, with reference to the accompanying drawings which illustrate several embodiments of the invention by way of non-limitative examples.

In the drawings:

Fig. 1 is a longitudinal elevational view of a cervical rod having asperities extended by an occipital plate before the bending of the rod and representing a first embodiment of the invention.

Fig. 2 is a longitudinal elevational view of the rod-plate shown in Fig. 1 in another direction.

Fig. 3 is a side elevational view of the rod-plate shown in Figs. 1 and 2, after its occipital part has been bent.

Fig. 4 is a half-sectional and half-elevational detail view of an opening in the occipital plate shown in Figs. 1 to 3.

Fig. 5 is a half-sectional and half-elevational view to a larger scale of an embodiment of an occipital hook with which the plate shown in Figs. 1 to 4 may be equipped for

connecting it to the occiput.

Fig. 6 is a side elevational view of the laminar hook shown in Fig. 5.

Fig. 7 is a top plan view of the occipital hook shown in Figs. 5 and 6.

Fig. 8 is an elevational view to a smaller scale of an embodiment of the occipito-cervical instrumentation according to the invention, mounted on the first cervical vertebrae and on the occiput of a patient.

Fig. 9 is a side elevational view of the instrumentation, of the cervical vertebrae and of the occiput shown in Fig. 8.

Fig. 10 is an elevational view to a smaller scale of the rod-plate shown in Fig. 3, the cervical rod being provided with two laminar hooks for fixing it to the cervical vertebrae.

Fig. 11 is a view similar to Fig. 10 of the cervical rod provided with articular screws for fixing to the vertebrae.

Fig. 12 is an elevational view of a second embodiment of the instrumentation according to the invention mounted on the first cervical vertebrae and on the occiput of a patient.

Fig. 13 is a partial side elevational view of a third embodiment of the instrumentation according to the invention in which the occipital part is fixed to the occiput by hooks.

Figs. 14 and 15 are partial side elevational views similar to Fig. 13 of two other embodiments of the instrumentation according to the invention.

Fig. 16 is a partial elevational of an alternative
5 embodiment of the rod-plate shown in Fig. 1.

The occipito-cervical osteosynthesis instrumentation shown in Figs. 1 to 9 comprises two separate parts, namely a left part 1 and a right part 2 respectively (Figs. 8 and 9 being views of the back of the patient), which are
10 identical as manufactured. Each part is formed by a cervical rod 3 having asperities 4, such as knurling or diamond points, and an elongate occipital plate 5. The latter forms one piece with the rod 1 (2) and extends it toward the occiput 6 in the position of use.

15 The instrumentation further comprises adjustable means for anchoring the rod 1, 2 to the vertebrae C1, C2, C3 and the plate 5 to the occiput 6, each part 1 and 2 being so angulated and shaped as to be adapted to the anatomy of the occipito-cervical connection. Thus, in the illustrated
20 embodiment, each rod 1, 2 consists of two substantially rectilinear sections 7 and 8 making therebetween an angle A of between about 70° and 90° (Fig. 3). The occipital section 8 of the rod has a length much shorter than that of the cervical section 7 of the rod and is connected to the
25 occipital plate 5. The latter is so bent as to have the shape 5a (Fig. 3) to enable it to correspond to the curvature of the occipital shell. The rod section 8

connected to the plate 5 is adapted to extend along the base of the occiput 6 in the position of use.

Formed in each elongate plate 5 are an oblong opening 9 and a circular opening 11, the latter being provided in the vicinity of the junction between the plate 5 and the end portion 8 of the rod 3. Chamfers 12, 13 are machined around the openings 9 and 11 respectively.

The occipital plate 5 is connected to the adjacent section 8 of the rod 3 in a continuous manner by a junction portion 14 adjacent to the occipital bone 6 and by rounded fillets 15 on the opposite side. Thus, any change in level between the rod 3 and the plate 5 adjacent to the occiput is avoided.

Figs. 5 to 7 show a laminar hook 16 which comprises a laminar or plate portion 17 whose curvature is adapted to the thickness of the occipito-cervical shell, and a body 18 whose height h is small relative to its width L (Fig. 5). Arranged in the body 18 is a groove 19 receiving and guiding an occipital plate 5. The groove 19 is delimited by two parallel branches 21 of the body 18 defining with its bottom 20 a U-shaped channel which is shallow relative to its width. A tapped hole 22 is provided in the body 18 and opens out onto the bottom 20, and is in facing relation to the oblong opening 9 when the plate 5 is inserted between the branches 19 of the U. The plate 5 is fixed to the hook 16 by a screw 24 whose head 24a is so shaped and dimensioned that its periphery corresponds to the

spotfacing 12 around the oblong opening 9 and also corresponds to the spotfacing 12 around the opening 11.

Consequently, the size of the head 24a may be reduced to such a thickness that its surface is flush with the surface of the plate 5 and with transverse end surfaces of the branches 21 of the body 18. A large reduction in the overall thickness of the system for assembling and anchoring in the bone results as compared to that possible with the aforementioned prior screws.

Thus, the screws 24 may be inserted both in the oblong openings 9 and in the circular openings 11 and in each case bear against the respective spotfacings 12, 11 owing to the corresponding shape of their heads.

An embodiment of a complete instrumentation, mounted on a cervical segment C1-C3 and on the occiput 6 is shown in Figs. 8 and 9.

Hooks 16, whose laminar or plate portions 17 are inserted in openings formed in the occiput 6, are fixed to the respective plates 5 by screws 24. Other hooks 26 having a closed body are mounted on the rod sections 7 just before the bend that the rod sections 7 form with the terminal sections 8, the laminar portions of the hooks 26 extending into the foramen opening 27 at the base of the occiput 6 against which they bear. Screws fix the hooks 26 to the rods 3 in the known manner.

In the region of the cervical vertebrae C2, C3, the latter are fixed to the rods 3 by means of hooks 28 having

an open body and a threaded internal plug (vertebra C2) and laminar hooks 29 having a closed body (vertebra C3), a transverse connection device 31 between the two rods 3 completing the instrumentation in the region of the
5 vertebra C4. Such a transverse connection device is of known type and needs no detailed description.

Mounting the occipital hook 16 requires no specific instrumentation. The surgeon forms an opening in the occipital bone 6 (trepanation) so as to be able to insert
10 the laminar portion 17 of the hook. This operation is carried out on both sides of the median line of the occiput 6 so as to permit mounting two plates 5. The bent plate 5a is then mounted in the groove 19 and fixed by a screw 24 to the hook 16. An accessory permits moving the occipital
15 hook 16 toward the foramen hook 26 (the laminar portion of which is inserted in the foramen opening 27).

Figs. 10 to 15 shown various types of the fixing of each part 1, 2 of the instrumentation to the cervical vertebrae and to the occiput 6. In Fig. 10, the cervical
20 part 7 of the rod 3 is provided with two cervical laminar hooks 32 of a known type which is open or closed. In Fig. 11, the same cervical part 7 of the rod 3 is provided with two articular screws 33 having a cortical thread adapted to the articular massive parts of the cervical vertebrae. The
25 screws 33 penetrate these massive parts with a given inclination relative to the rod 3 and are connected by a connector 34 to the rod 3 in the known manner. The latter

may be bent.

In the embodiments shown in Figs. 10 and 11, the rods 3 may be long enough to reach the thoracic vertebra T2.

The instrumentation shown in Fig. 12 comprises for each
5 part 1 and 2 three screws 24 for fixing the occipital plates 5 to the occiput 6, two of these screws 24 being inserted in each oblong opening 9. At the level of the foramen 27, the instrumentation comprises a transverse connection device 35 between the rods 3, this device being
10 constituted by a transverse rod 36 and two cervical hooks 37 for securing the latter to the rod 36. Cervical hooks 38 complete the instrumentation in the region of the cervical vertebrae C1 and C2.

In Fig. 13, the occipital plate 5 is secured to the
15 occiput 6 by means of two laminar hooks, namely a first cervical hook 39, which is open or closed, has a large groove and is mounted on the section 8 having asperities of the rod 3, its laminar portion being disposed in the foramen opening 27, and an occipital hook 16.

20 The laminar or plate portion 17 of the hook 16 is engaged by the surgeon between the inner table 6a of the occiput 6 and the dura-mater 40. The hook 16 is fixed to the plate 5 by means of a screw 24.

Fig. 14 shows an alternative embodiment in which the
25 occipital hook 16 is replaced by three screws 24 two of which are engaged in the oblong opening 9, the third being inserted in the circular opening 11 of the plate 5. As in

13

the assembly shown in Fig. 13, a cervical hook 39 is engaged on the end part 8 of the rod 3 having asperities in the region of the foramen opening 27.

5 Lastly, the alternative embodiment shown in Fig. 15 differs from that shown in Fig. 14 in that the cervical hook 39 is eliminated, the plate 5 being fixed to the occiput 6 solely by the three screws 24.

The alternative embodiment shown in Fig. 16 comprises three circular openings 11 in the plate 5 which may be
10 provided with screws 24 or hooks.

The rod 3 having asperities and the plate 5 are both bendable, provided this remains within the limits imposed by the elongation of the material and care is taken to avoid any initiation of a crack.

15 In addition to the advantages already mentioned, the instrumentation according to the invention has other advantages: thus, the fact that it has two rods and not a plate in one piece, on one hand permits an easier differentiated bending of each rod having asperities and,
20 on the other hand, facilitates the adaptation to the considered specific mounting of the distance between the two rods 3. The transverse connection device 31 or 35 supports and reinforces the assembly, either in the cervical part or in the occipital part, or in both these
25 regions.

Further, the two rods 3 may be employed indifferently in the left part and the right part of the occiput, since

they are initially identical as manufactured, which affords the surgeon an additional facility.

Moreover, the presence of the rod section 8 in the occipital part and therefore its connection in the
5 occipital part (and not in the cervical part), not only improves the performance as concerns fatigue of the part 1 or 2 of the instrumentation, but also enables the surgeon to employ either hooks or screws, or both, in the occipital part.

10 The advantages of the instrumentation according to the invention, explained hereinbefore, may be stated briefly as follows: bendability, variable distance between the two rods 3 having asperities, indifferent utilization of hooks and screws for the same type of mounting, reduced overall
15 size which considerably reduces projections under the skin of the occiput, possibility of placing a transverse connection device in the cervical and occipital part, covering of the instrumentation from the segment C0 to T2, and possibility of a very short assembly C0-C1-C2.

WHAT IS CLAIMED IS:

1. Occipito-cervical osteosynthesis instrumentation characterized in that it comprises in combination:

5 a) two separate parts, namely a right part and a left part, each formed by a cervical rod having asperities and an elongate occipital plate forming one piece with said rod and extending it toward the occiput in the position of use,

b) adjustable means for anchoring each rod to the vertebrae and the respective plate to the occiput,

10 c) each part being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection.

2. Instrumentation according to claim 1, wherein each rod has two substantially rectilinear sections making therebetween an angle of between substantially 70 and 90°,
15 one of said sections being shorter than the other and connected to said occipital plate which is so bent as to correspond to the curvature of the occipital shell, the shortest rod section extending along the base of the occiput in the position of use.

20 3. Instrumentation according to claim 1, comprising an oblong opening and a circular opening formed in each elongate plate for receiving elements selected from the group consisting of hooks and screws for fixing said plate to the occiput, it being possible to fix said elements in
25 different positions in said oblong openings.

4. Instrumentation according to claim 3, wherein said adjustable anchoring means comprise, for each of said

occipital plates, a hook comprising a laminar portion adapted to the occipito-cervical lamina, and a body having a small height relative to the width of said body, a groove in said body for receiving and guiding a respective
5 occipital plate, and a tapped hole in said body in facing relation to said oblong opening or to said circular opening of said plate as the case may be for receiving a screw for fixing said plate to said hook.

5. Instrumentation according to claim 1, comprising a
10 plurality of openings in said plate for receiving screws for fixing said plate to the occiput.

6. Instrumentation according to claim 5, comprising three of said openings.

7. Instrumentation according to claim 2, wherein said
15 adjustable anchoring means comprise hooks having a laminar portion adapted to be inserted at the base of the occipital bone in a foramen opening, said hooks being mounted on said section of said rod which is connected to said occipital plate.

20 8. Instrumentation according to claim 1, wherein said occipital plate is connect to said rod in a continuous manner on a side adjacent to the occipital bone and by fillets on the opposite side of said plate.

9. Instrumentation according to claim 1, wherein said
25 adjustable anchoring means for anchoring each rod to the cervical vertebrae comprise laminar hooks of a type selected from the group consisting of hooks of open type

and hooks of closed type.

10. Instrumentation according to claim 1, wherein said adjustable anchoring means for anchoring each rod to the cervical vertebrae comprise articular screws having a cortical thread adapted to articular massive parts of said cervical vertebrae, and connectors for connecting said screws to the respective rod.

11. Instrumentation according to claim 2, comprising a transverse connection device between said rod sections connected to the cervical vertebrae.

12. Instrumentation according to claim 2, comprising a transverse connection device between said rod sections connected to the occiput.

13. Instrumentation according to claim 4, comprising around said oblong and circular openings of said occipital plates spotfacings for the bearing of heads of corresponding shape of said screws for fixing said plates to said hooks, said heads being so dimensioned as to be flush with the surface of said plates and with end surfaces of said bodies of said hooks.

14. Method for mounting an occipito-cervical instrumentation comprising two separate similar parts each formed by a cervical rod having asperities and an elongate occipital plate which forms one piece with said rod, an oblong opening and a circular opening in each plate, each part being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection, and means

for fixing said two parts to the cervical vertebrae and to the occiput,

said method comprising:

a) forming in the occipital bone two openings adapted
5 to receive plate-fixing hooks;

b) inserting laminar portions of said hooks in said openings formed in said occipital bone, placing a pre-bent plate of each part in the respective hook, and fixing the assembly by means of screws;

10 c) fixing said cervical rods to the vertebrae by said means selected from the group consisting of hooks and screws connected to said rods by connectors.

15 15. Method for mounting an occipito-cervical instrumentation comprising two separate similar parts each formed by a cervical rod having asperities and an elongate occipital plate which forms one piece with said rod, an oblong opening and a circular opening in each plate, each part being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection, and means
20 for fixing said two parts to the cervical vertebrae and to the occiput,

said method comprising:

a) forming at least two openings in the occipital bone on each side of a median line of the occiput;

25 b) mounting said two parts in such manner that said plates thereof have their oblong opening and their circular opening in facing relation to the respective openings in

the occipital bone;

c) inserting screws in said openings of said plate and screwing said screws in the occipital bone;

d) completing the fixing of each of said parts to the
5 cervical vertebrae by means selected from the group consisting of hooks and screws.

16. Method for mounting an occipito-cervical instrumentation comprising two separate similar parts each formed by a cervical rod having asperities and an elongate
10 occipital plate which forms one piece with said rod, each of said parts being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection, and means for fixing said two parts to the cervical vertebrae and to the occiput,

15 said method comprising:

a) forming at least two openings in the occipital bone on each side of a median line of the occiput;

b) mounting said two parts in such manner that the plates thereof have their oblong opening and their circular
20 opening in facing relation to said openings in the occipital bone;

c) inserting screws in said openings of said plate and screwing said screws in the occipital bone.




17. Method for mounting an occipito-cervical
25 instrumentation, comprising two separate similar parts each formed by a cervical rod having asperities and an elongate occipital plate which forms one piece with said rod, three

circular openings formed in said plate, each part being so preangulated and shaped as to be adapted to the anatomy of the occipito-cervical connection, and means for fixing said two parts to the cervical vertebrae and to the occiput,

5 said method comprising:

 a) providing at least two openings in the occipital bone on each side of a median line of the occiput;

 b) placing said two parts in such manner that said plates thereof have their circular openings in facing
10 relation to said openings provided in said occipital bone, inserting screws in said openings of said plate, screwing said screws in said occipital bone, and completing the fixing of each of said parts to the cervical vertebrae by means selected from the group consisting of hooks and
15 screws.

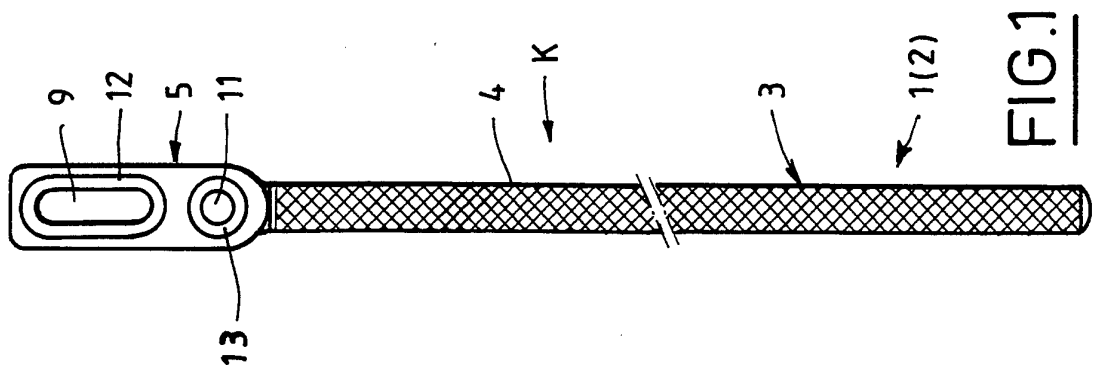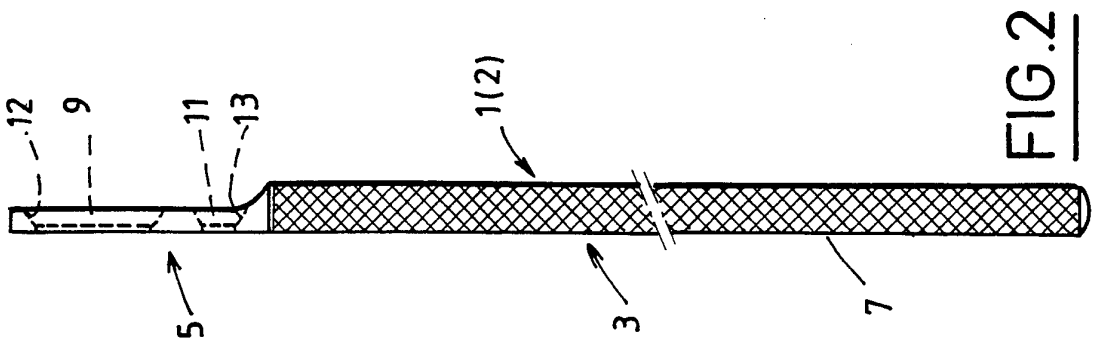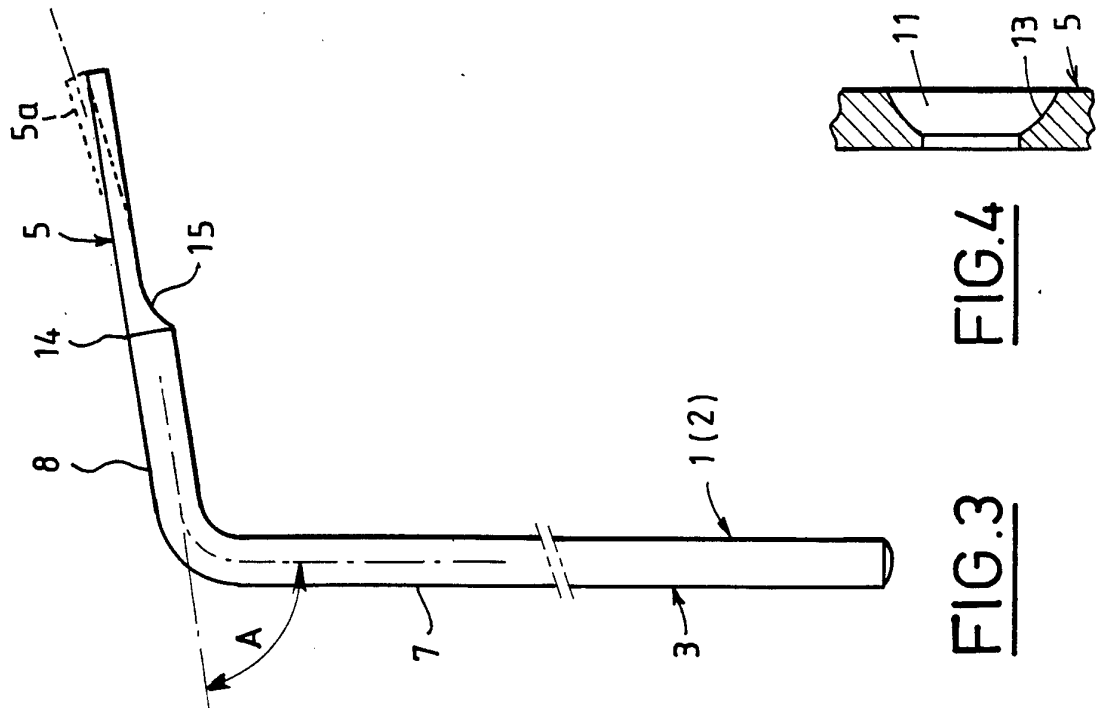

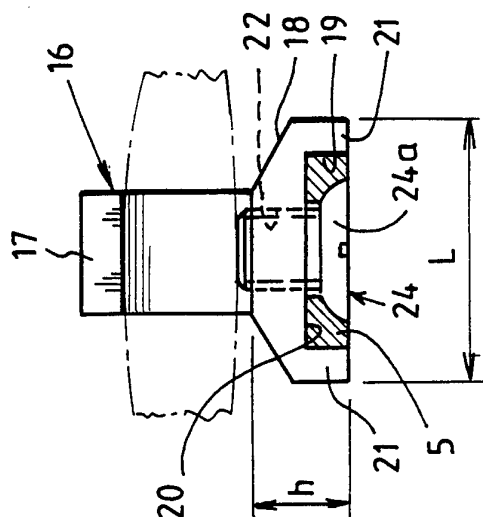


FIG. 5

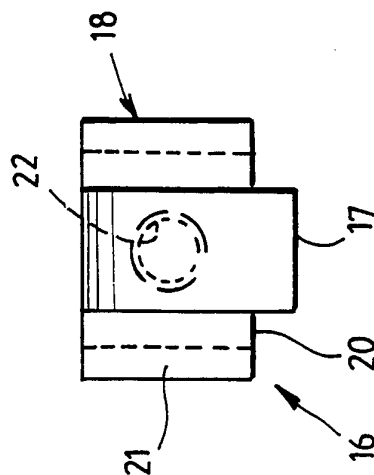


FIG. 7

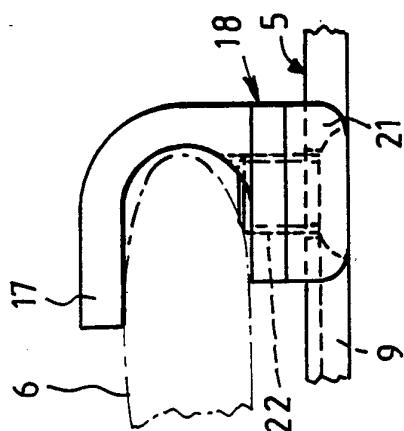


FIG. 6

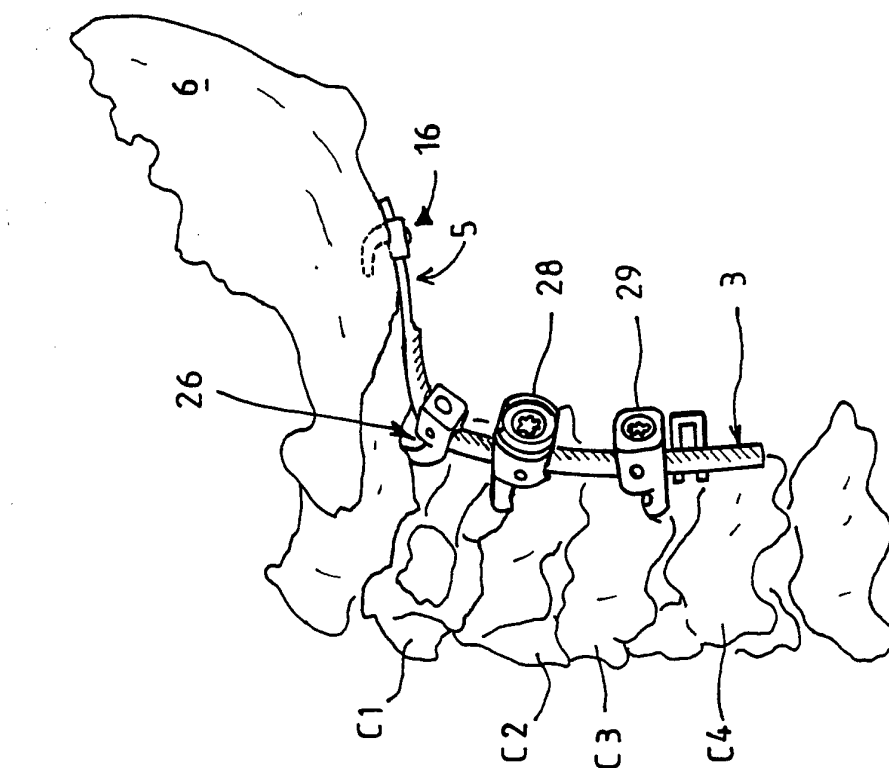


FIG. 9

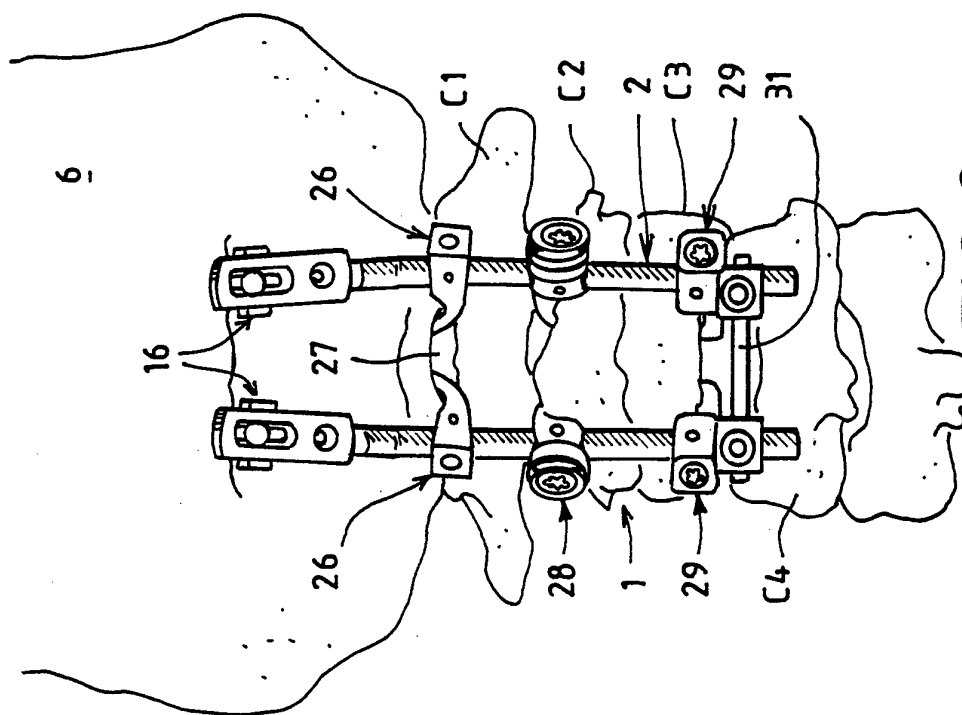


FIG. 8

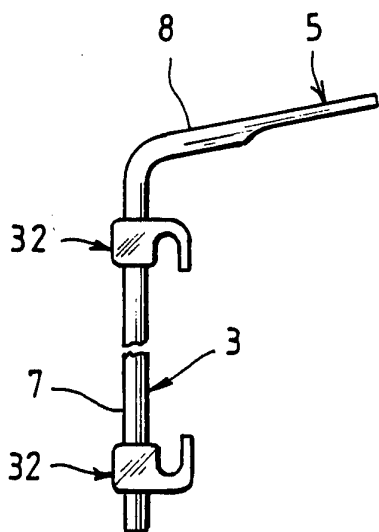


FIG. 10

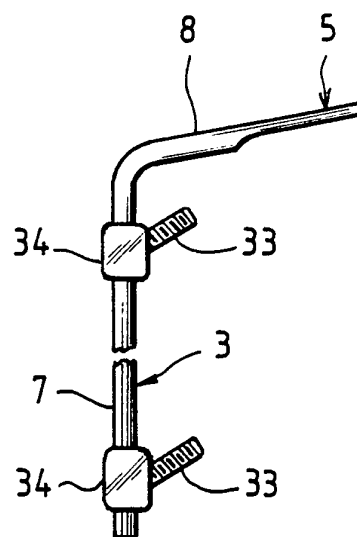


FIG. 11

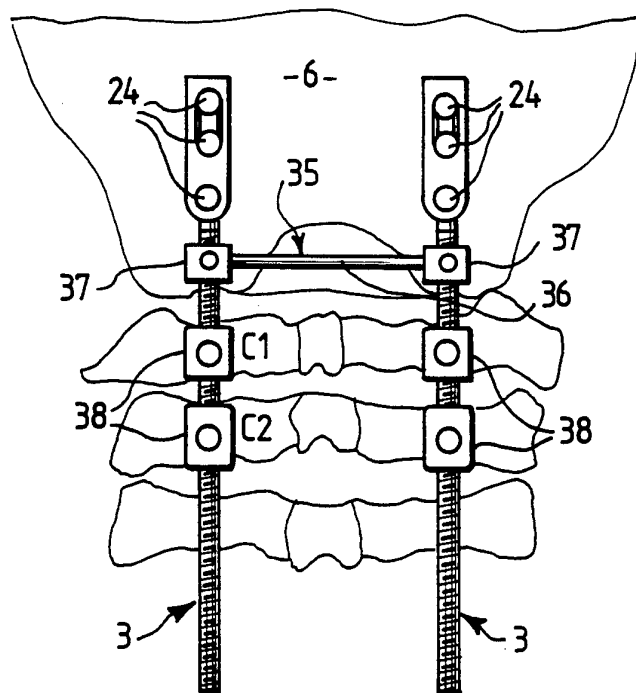


FIG. 12

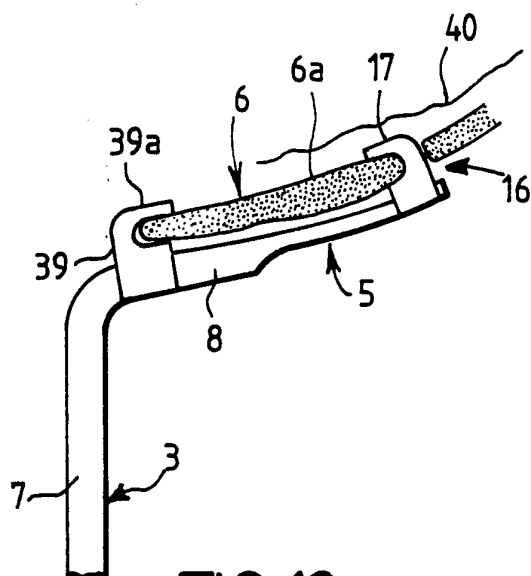


FIG. 13

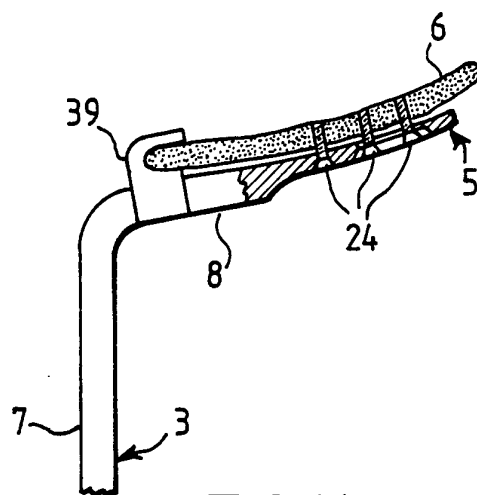


FIG. 14

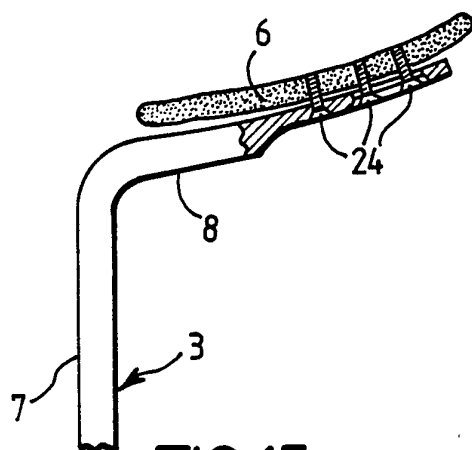


FIG. 15

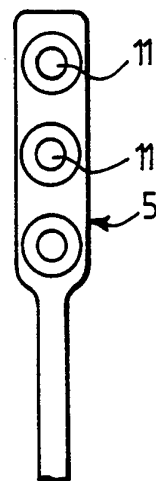


FIG. 16

INTERNATIONAL SEARCH REPORT

Internat Application No
PCT/IB 95/00095

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 A61B17/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR,A,2 687 561 (JBS) 27 August 1993 cited in the application	1,5,6, 9-13
Y	see the whole document ---	2,3,7,8
Y	EP,A,0 301 489 (ACROMED CORPORATION) 1 February 1989 see abstract; figures see column 4, line 48-58 ---	2,3,7,8
A	FR,A,2 692 471 (ROUSSOULY) 24 December 1993 see abstract; figure 1 -----	4

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 May 1995

Date of mailing of the international search report

24.05.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Steenbakker, J

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 95/00095

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 14-17
because they relate to subject matter not required to be searched by this Authority, namely:
PCT Rule 39.1(iv) Method for treatm. of the hum. or anim. body by surgery
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

Internat. Application No

PCT/IB 95/00095

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
FR-A-2687561	27-08-93	JP-A-	6007371	18-01-94
		US-A-	5360429	01-11-94
EP-A-0301489	01-02-89	US-A-	4887595	19-12-89
		CA-A-	1319059	15-06-93
		DE-A-	3874042	01-10-92
		JP-A-	1121046	12-05-89
FR-A-2692471	24-12-93	AU-B-	4333093	24-01-94
		CA-A-	2137374	06-01-94
		EP-A-	0645986	05-04-95
		WO-A-	9400062	06-01-94