



- (51) **International Patent Classification:**
G08B 21/24 (2006.01) *G08B 13/22* (2006.01)
- (21) **International Application Number:**
PCT/US2012/022631
- (22) **International Filing Date:**
26 January 2012 (26.01.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/436,235 26 January 2011 (26.01.2011) US
13/357,959 25 January 2012 (25.01.2012) US
- (71) **Applicant (for all designated States except US):** INVUE SECURITY PRODUCTS INC. [US/US]; 15015 Lancaster Highway, Charlotte, North Carolina 28277 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** BERGLUND, David N. [US/US]; 9132 Fishers Pond Drive, Apartment B1, Charlotte, North Carolina 28277 (US). HOOKS, Larry K., Jr. [US/US]; 2209 Minstrels Way, Fort Mill, South Carolina 29707 (US). ROBERTS, John F. [US/US]; 12546 Autumn Blaze Drive, Charlotte, North Carolina 28278 (US). JOHNSTON, Michael R. [US/US]; 8003 Avanti Drive, Waxhaw, North Carolina 28173 (US).

(74) **Agent:** CHRISTOPHER C. DREMANN, P.C.; 15015 Lancaster Highway, Charlotte, North Carolina 28277 (US).

(81) **Designated States** (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.


(84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

[Continued on next page]

(54) **Title:** MERCHANDISE DISPLAY SECURITY DEVICE INCLUDING REMOVABLE AND MOVABLE CABLE COLLECTION TUBE

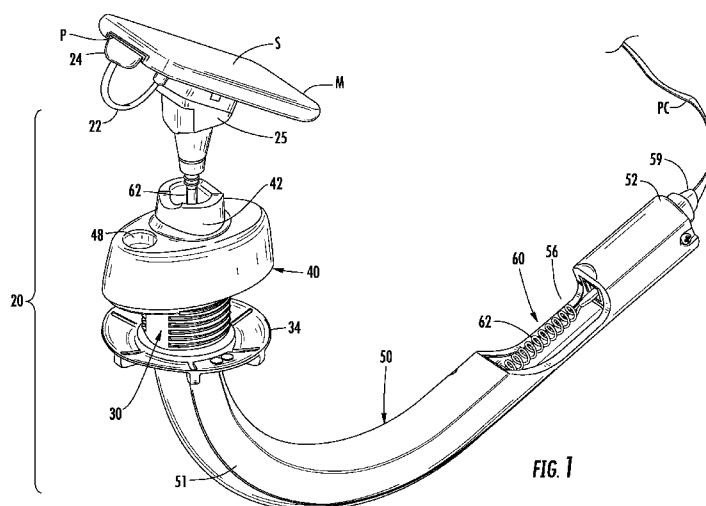

(57) **Abstract:** A merchandise display security device (20) for displaying and protecting an article of merchandise (M) includes a mounting element (30) adapted to be mounted on a support surface (SS) with the mounting element defining an opening (33) over a hole (H) formed through the support surface. A base (40) having a cable collection tube (50) is configured to be received within the opening of the mounting element and passed through the hole to a location beneath the support surface. The base is releasably attached to the mounting element so that the base can be detached from the mounting element and the collection tube passed through the hole to provide access to the collection tube above the support surface. The collection tube may be rotatably disposed on the base so that the cable collection tube can be positioned at any desired angular location beneath the support surface relative to the base.



Published:

- *without international search report and to be republished
upon receipt of that report (Rule 48.2(g))*

MERCHANDISE DISPLAY SECURITY DEVICE INCLUDING REMOVABLE AND MOVABLE CABLE COLLECTION TUBE

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] This International application claims the benefit of United States Provisional Application No. 61/436,235 filed on January 26, 2011, and United States Non-provisional Application No. 13/357,959 filed on January 25, 2012, the disclosure of each of which is incorporated herein in its entirety.

FIELD OF THE INVENTION

[0002] This invention relates generally to merchandise display security systems for displaying and protecting an article of merchandise from theft. More particularly, the invention is a merchandise display security device including a removable and movable cable collection tube. In an exemplary embodiment, a merchandise display security device includes a mounting element and a base having a cable collection tube wherein the base is releasably attachable to and detachable from the mounting element so that the cable collection tube is removable from the mounting element. In another exemplary embodiment, the cable collection tube is movably disposed on the base so that the cable collection tube may be positioned at any desired orientation relative to the mounting element and the base.

BACKGROUND OF THE INVENTION

[0003] Retailers routinely display handheld electronic merchandise, such as mobile (e.g. cellular) telephones, gaming consoles, personal data assistants (PDAs), global positioning system (GPS) devices, e-readers, tablets, media players, digital video recorders (DVRs), cameras and the like, for customers to examine before making a purchase. In some instances, the retailer desires the handheld electronic merchandise to be provided with electrical power so that a potential purchaser can evaluate the operation and features of the merchandise as well. At the same time, the retailer does not want the article of merchandise being displayed to be stolen or removed from

the display by an unauthorized person. Accordingly, the article of merchandise is attached to a merchandise display security device that protects the article of merchandise from theft and unauthorized removal from the display. The merchandise display security device typically includes a sensor to which the article of merchandise is attached that indicates whether the article of merchandise has been separated (i.e. detached) from the sensor. In the event that the article of merchandise is detached from the sensor, an audible and/or visible alarm is activated to alert store personnel to a possible attempted theft or unauthorized removal of the merchandise from the display.

[0004] Merchandise display security systems for displaying and protecting an article of merchandise are known. Some of the known systems include a merchandise display security device that is mounted entirely above the support surface of the display, for example a display counter or shelf. Such “stand-alone” security devices typically include at least one electrical sense cord that extends between a base of the security device and a sensor that is removably supported on the base. The base is also commonly referred to as a display stand. Each stand-alone security device typically also includes at least one power cord that extends between and electrically connects the display stand and an external source of power, such as an electrical outlet or power transformer. The security devices may further include a power adapter cord, also commonly referred to as a pigtail, extending between and electrically connecting the sensor and the article of merchandise attached to the sensor. As a result, the multitude of cords of adjacent merchandise display security devices can become entangled with one another. Regardless, the excess cords detract from the aesthetics of the display and take up valuable counter or shelf space that could otherwise be utilized to display additional merchandise.

[0005] Other of the known merchandise display security systems include a security device that is partially mounted on the support surface of the display, for example on a display counter or shelf, above a closed cabinet or concealed enclosure. The remainder of the security device is located within

the cabinet or enclosure so as to be inaccessible to customers, while remaining accessible to authorized personnel of the retail store for installation, removal, replacement or reconfiguration of the display. Placement of at least a portion of the merchandise display security devices within a cabinet or enclosure below the support surface of the display reduces the number of cords located above the support surface and restricts access to the vulnerable components of the security devices to authorized store personnel. However, the amount of available space beneath the support surface of the display is typically limited. As a result, it is oftentimes difficult, and consequently time consuming, for store personnel to assemble and disassemble the merchandise display security devices for installation, removal, replacement or reconfiguration of the display. Furthermore, the limited amount of space beneath the support surface of the display may prevent components of the security device located beneath the support surface from being positioned in a desirable orientation relative to components of the security device located above the support surface.

[0006] United States Patent No. 7,744,404 B1 issued to Henson et al. and assigned to Merchandising Technologies, Inc. of Hillsboro, Oregon, USA discloses a merchandise display security system that includes a cable retraction mechanism for displaying merchandise mounted on a movable display post. The cable retraction mechanism includes a cable assembly and a coaxial housing having a movable shuttle that is coupled to one end of the cable assembly. The other end of the cable assembly is coupled to a sensor configured to be attached to a product to be displayed at the retail location. The cable assembly comprises an electrical cable having a coiled or otherwise elastic section. Reciprocating motion of the shuttle relative to the housing facilitates extension and retraction of the cable assembly independent of the extension and retraction, respectively, of the coiled or elastic section. The cable retraction mechanism has an internally threaded coupling that is secured on an externally threaded mounting element of a base or display stand beneath a support surface (e.g., display counter or shelf) at the retail location. As a result, the housing and the shuttle of the cable retraction mechanism cannot be accessed or removed from above the

support surface of the display. Accordingly, it is both difficult and time consuming for authorized store personnel to install, remove, replace or reconfigure the display.

[0007] United States Patent No. 7,724,135 B2 issued to Rapp et al. and assigned to Checkpoint Systems, Inc. of Thorofare, New Jersey, USA discloses another merchandise display security system for displaying an item (e.g. merchandise). The Rapp et al. system includes a tether having a first end and a second end that extends through a hole formed in a display shelf. The first end of the tether is secured to a mount for connection to the item above the display shelf and the second end is secured beneath the display shelf. A helical coil cable is wrapped around the tether and extends through the hole in the display shelf to provide an electrical path to the item from a cable reel and/or control unit located beneath the display shelf. The tether and helical coil cable are encased coaxially within an elongate, rigid housing that is secured to the underside of the display shelf. As such, the housing is not accessible or removable from above the display shelf. In addition, the rigid housing prevents the cable reel and/or control unit from being conveniently located at any desired orientation beneath the display shelf relative to the mount positioned above the display shelf.

[0008] Accordingly, there exists a need for an improved merchandise display security system for displaying and protecting an article of merchandise from theft. There exists a further, and more specific, need for a merchandise display security device including a removable and movable cable collection tube. There exists a particular need for a merchandise display security device including a mounting element and a base having a cable collection tube wherein the base is detachable from the mounting element so that the cable collection tube is removable from the mounting element. In this manner, the cable collection tube is removable and accessible from above a support surface of a display. There exists another particular need for a merchandise display security device including a mounting element and a base having a cable collection tube wherein the cable collection tube is movable relative to the base. In this manner, the cable collection tube may be located beneath a

support surface of a display and positioned at any desirable orientation relative to the mounting element and the base located above the support surface of the display.

BRIEF DESCRIPTION OF THE DRAWINGS

[0009] FIG. 1 is a perspective view of an exemplary embodiment of a merchandise display security device for displaying and protecting an article of merchandise according to the present invention showing a handheld electronic article of merchandise attached to the security device.

[0010] FIG. 2 is an elevation view of the merchandise display security device of FIG. 1 shown with the handheld electronic article of merchandise detached from the security device.

[0011] FIG. 3 is a perspective view of the mounting element of the merchandise display security device of FIG. 1 mounted over a hole formed through a support surface of a display.

[0012] FIG. 4 is a partial section view of the merchandise display security device of FIG. 1 shown with a base having a cable collection tube inserted in the hole formed through the support surface of the display and attached to the mounting element with the cable collection tube positioned beneath the support surface at a desirable orientation relative to the base and the mounting element.

[0013] FIG. 5 is an elevation view of the merchandise display security device shown with the mounting element of FIG. 3 mounted on the support surface of the display and the base having a cable collection tube being removed from the hole formed through the support surface of the display.

DETAILED DESCRIPTION OF EXEMPLARY EMBODIMENTS

[0014] Referring now to the accompanying drawing figures wherein like reference numerals denote like elements throughout the various views, one or more exemplary embodiments of a merchandise display security system for displaying and protecting an article of merchandise are shown. More

particularly, each exemplary embodiment is a merchandise display security device, indicated generally by reference character **20**, for monitoring whether an article of merchandise, indicated generally by reference character **M** (FIG. 1 and FIG. 4), is attached to the security device. As shown and described herein, the merchandise display security device **20** includes electronics for monitoring a proximity sensor in contact with the article of merchandise **M** and for activating an alarm in the event that the article of merchandise is separated (i.e. detached) from the security device. If desired, a merchandise display security device **20** according to the invention may also provide electrical power to the article of merchandise **M** so that a potential purchaser may evaluate the merchandise in a powered state without relying solely on power provided by the internal battery of the merchandise. Thus, the present invention is equally applicable to any merchandise display stand, module, pedestal or the like that permits a potential purchaser to examine an article of merchandise in an unpowered state or to operate an article of merchandise in a powered state. An objective of the present invention is to provide a stand-alone merchandise display security device that reduces the number of cords located above a support surface of a display, such as a tabletop, counter, shelf or the like. Another objective of the present invention is to provide such a security device including a mounting element and a base having a cable collection tube disposed beneath the support surface of the display wherein the base can be detached from the mounting element so that cable collection tube can be removed and accessed from above the support surface. Still another objective of the present invention is to provide such a security device wherein the cable collection tube is movably mounted on the base so that the cable collection tube may be positioned beneath the support surface at a desired orientation relative to the mounting element and the base.

[0015] FIGS. 1 and 2 show a merchandise display security device **20** for displaying and protecting an article of merchandise **M** from theft or unauthorized removal from a display, for example a tabletop, counter, shelf or the like, located in a retail store. The article of merchandise **M** is typically a display model or sample of handheld electronic merchandise, such as a mobile (e.g. cellular) telephone, gaming console, personal data assistant

(PDA), global positioning system (GPS) device, e-reader, tablet, media player, digital video recorder (DVR), handheld camera and the like, for customers to examine. The article of merchandise **M** is attached to the merchandise display security device **20** and may be displayed in a powered state so that potential purchasers are able to evaluate the operation and features of the merchandise when making a decision whether to purchase the item. In the exemplary embodiment shown in FIG. 1, the article of merchandise **M** is a conventional cellular type mobile telephone having a display screen **S** and a power input port **P** for receiving a power cord, for example an AC/DC transformer commonly referred to as a “charger,” electrically connected to an external power source. The power cord has a known type of electrical connector at one end configured for electrical connection to the power input port **P**. In the conventional example illustrated herein, the power input port **P** is a female jack configured to receive a male plug, such as a USB jack and complementary USB plug. In addition, the article of merchandise **M** may be provided with an internal battery that is recharged through the power cord by the external power source in a known manner.

[0016] As shown herein, the merchandise display security device **20** includes an optional power adapter cord **22** that replaces the conventional power cord to provide electrical power to the article of merchandise **M** while the merchandise is on display. The power adapter cord **22** has a connector plug **24** at one end configured to be received within a complementary connector jack at the power input port **P** of the cellular telephone. However, the present invention is intended to be construed broadly to include any type of standard or custom connector interface now known or hereafter devised. It is only necessary that the power adapter cord **22** has an appropriate interface at one end to electrically connect the power adapter cord to the article of merchandise **M** being displayed on the merchandise display security device **20**. In the exemplary embodiments shown herein, the other end of the power adapter cord **22** is “hard-wired” directly into a sensor **25** to which the article of merchandise **M** is attached. Alternatively, the other end of the power adapter cord **22** may be provided with a connector interface (not shown) configured for electrically connecting the power adapter cord to the sensor **25** of the

merchandise display security device **20**. In this manner, the power adapter cord **22** may be easily and quickly disconnected and discarded, or replaced with another power adapter cord appropriate for a different type or model of handheld electronic merchandise.

[0017] The merchandise display security device **20** comprises a mounting element **30** and a base **40** for removably supporting the sensor **25** and the article of merchandise **M** thereon in a display orientation. The base **40** has a cable collection tube **50** configured to receive, contain and retain therein a cable assembly **60** that electrically connects the sensor **25** and, consequently, the article of merchandise **M**, to an external power source through an optional power cord **PC** provided at a free end **52** of the cable collection tube. In the event it is not necessary or desired to provide electrical power to the article of merchandise **M**, the power cord **PC** may be omitted altogether since electrical power for the merchandise display security device **20** itself may be provided by an internal battery **54** (FIG. 2) disposed within the cable collection tube **50** as shown, or disposed within base **40**. Alternatively, the merchandise display security device **20** and/or the article or merchandise **M** may be powered by the external power source through the power cord **PC** and the internal battery **54** omitted, or alternatively, retained for the purpose of providing back-up electrical power in the event of a power outage. Regardless, the cable assembly **60** comprises a length of an elastic or otherwise extensible electrical cable **62** that is contained within the cable collection tube **50** between the sensor **25** and an electrical circuit board (also referred to herein generically as “electronics”) **55** disposed adjacent the free end **52** of the cable collection tube. As shown herein, the electrical cable **62** is a helical coil cable similar to a conventional telephone handset cord comprising an outer sheath made of an insulating material surrounding a plurality of conductors for a purpose to be described hereafter.

[0018] The configuration, and more particularly, the geometry of the cable collection tube **50** permits the cable **62** to be extended therefrom and retracted therein without kinking and without causing significant wear to the outer sheath. As such, the cable collection tube **50** protects the cable **62**

when the sensor **25** and the article of merchandise **M** are removed from the display orientation on a pedestal portion **42** of the base **40** by a potential purchaser to evaluate the operation and features of the merchandise. In particular, one end of the cable **62** comprises a connector **64** (FIG. 2), for example a modular (RJ) telephone plug, configured to electrically connect the conductors of the cable to the electronics **55** adjacent the free end **52** of the cable collection tube. As shown, the other end of the cable **62** is “hard-wired” into the sensor **25**. However, if desired, the other end of the cable **62** may comprise a connector, for example likewise a modular (RJ) telephone plug, configured to electrically connect the conductors of the cable to electronics disposed within the sensor **25**. In the latter instance, the cable assembly **60** may be replaced without the need to detach the article of merchandise **M** from the sensor **25** in the event that cable **62** fails or becomes damaged. As such, the cable collection tube **50** may have a partial opening, recess or cutout **56** formed therein adjacent the electronics **55** for providing access to disconnect the connector **64** of the cable **62**.

[0019] As shown herein, the cable collection tube **50** comprises an elongate, substantially cylindrical, substantially rigid, arcuate body **51** that is generally hollow to form an internal cavity sized sufficiently to house at least a portion of the cable **62** and the connector **64** of the cable assembly **60**. As previously mentioned, an internal battery **54** and electronics **55** are housed within the cable collection tube **50** adjacent free end **52**. The cable collection tube **50** terminates at the free end **52** in a connector **58** that is configured to receive a mating connector **59** on the free end of the power cord **PC** from the external power source. As previously mentioned, a cutout **56** may be formed in the body **51** adjacent the electronics **55** to provide access to the connector **64** on the cable **62** of the cable assembly **60**. As such, a connector (not shown), for example a modular (RJ) telephone jack, is provided on the body **51** of the cable collection tube **50** or the circuit board **55** for receiving the connector **64** on the cable **62** of the cable assembly **60**. At the opposite end of the cable collection tube **50**, the body **51** is movably mounted on the base **40**. More particularly, the body **51** of the cable collection tube **50** is rotatably mounted on the base **40** so that the cable collection tube may be positioned at

any desired angular location about the base along a circumference defined by the radial distance between the central location at which the cable collection tube is attached to the base and the free end **52** of the body of the cable collection tube. If desired, the base **40** and/or the body **51** of the cable collection tube **50** may be provided with a mechanical stop to limit rotation of the cable collection tube relative to the base within a predetermined total amount of rotation, for example about three hundred fifty-five degrees (355°), so that the cable assembly **60** and/or the power cord **PC** does not become excessively twisted.

[0020] The mounting element **30** comprises a generally cylindrical, hollow body **31** (FIG. 2) having a mounting flange **32** at an upper end. The body **31** of the mounting element **30** is sized and shaped to receive the cable collection tube **50** coaxially within an opening **33** formed through the body and the mounting flange **32** of the mounting element. Body **31** is externally-threaded to receive an internally-threaded retaining flange **34** that secures the mounting element **30** on a support surface, such as a tabletop, counter, shelf or the like, of a display located in a retail store. As will be described in greater detail with reference to FIG. 3, the mounting element **30** is adapted to be inserted within a hole formed through a support surface of a display and to be secured thereon by mounting flange **32** and retaining flange **34** with the mounting flange of the mounting element configured to engage and releasably retain the base **40** in a desired display orientation above the support surface.

[0021] The base **40** comprises a body **41** having an upwardly extending pedestal portion **42** for removably supporting the sensor **25** and the article of merchandise **M** in the desired display orientation above the support surface. If desired, the pedestal portion **42** and the sensor **25** may be formed with opposing geometry, or alternatively, provided with one or more magnets for aligning the sensor and the article of merchandise **M** in the desired display orientation. The body **41** of the base **40** is generally hollow and defines an internal compartment sized sufficiently to pass the cable **62** of the cable assembly **60** therethrough, and to house an electrical circuit board (also referred to herein generically as “electronics”) **45**. Electronics **45** are

electrically connected to electronics **55** by an electrical cable or conduit **44** (FIG. 2) comprising at least a pair of conductors. Electrical cable or conduit **44** may be disposed on the inside or the outside of the body **51** of the collection tube **50**, but more preferably, is disposed within the body of the collection tube to protect the conductors extending between electronics **45** and electronics **55**. As previously mentioned, electronics **55** are electrically connected to the sensor **25** by conductors disposed within cable **62**. As such, electronics **45** may operate to monitor the state of a sensor switch **26** (FIG. 2), for example a conventional proximity or limit switch, provided on the sensor **25** through cable **62** and electronics **55** to activate an audible and/or visible alarm in the event that article of merchandise **M** is separated from the sensor. As shown, base **40** further comprises a sensor switch **46**, for example a conventional proximity or limit switch, provided on the underside of body **41** that extends through an aperture formed in the mounting flange **32** of the mounting element **30** when the base is engaged with the mounting element. Sensor switch **46** is electrically connected to electronics **45**, which operate to monitor the state of the switch and to activate an audible and/or visible alarm in the event that base **40** is separated from the support surface of the display. Base **40** may also comprise a communication port **48** (FIG.1) for permitting communication with electronics **45** to arm and disarm the alarm so that an authorized person can separate (i.e. detach) the article of merchandise **M** from the sensor **25**, or separate (i.e. remove) the base and the cable collection tube **50** from the support surface of the display, as will be described hereafter.

[0022] FIG. 3 shows the mounting flange **32** of the mounting element **30** mounted on a support surface **SS**, for example a tabletop, counter, shelf or the like, of a display **D** located in a retail store. The mounting element **30** defines an opening **33** through the mounting flange **32** and is mounted on the support surface **SS** of the display **D** such that the opening is disposed over a hole **H** formed through the support surface with the body **31** of the mounting element extending downwardly through the hole. FIG. 4 is a partial section view showing the base **40** having cable collection tube **50** installed thereon with sensor **25** and cable assembly **60** disposed within the base and the

collection tube. Base **40**, along with collection tube **50**, sensor **25** and cable assembly **60**, is disposed through hole **H** formed in support surface **SS** of display **D**. As will be readily understood and appreciated by those skilled in the art, cable assembly **60** and sensor **25** are previously installed into base **40** and cable collection tube **50** by feeding the connector **64** of the cable assembly downwardly through the generally hollow body **41** of the base and the generally hollow body **51** of the cable collection tube and thereafter electrically connecting connector **64** to electronics **55**. If utilized, the power cord **PC** may be electrically connected to the electronics **55** of the cable collection tube **50** via connector jack **58** and connector plug **59** before or after the base **40**, cable collection tube **50**, sensor **25** and cable assembly **60** are inserted through the hole **H** in the support surface **SS**. If power cord **PC** is connected afterwards, authorized store personnel would have to access the connector jack **58** at the free end **52** of the cable collection tube **50** beneath the support surface **SS** only upon initial installation of the merchandise display security device **20**. Thereafter, the connector jack **58** could be accessed by removing the base **40** and collection tube **50** through the hole **H** in support surface **SS** of display **D**. Retaining flange **34** is threaded onto body **31** of mounting element **30** from beneath the support surface **SS** of the display **D** to secure the mounting flange **32** against the support surface with the body of the mounting element extending downwardly through the hole **H**.

[0023] As best shown in FIG. 3, mounting flange **32** is provided with a pair of circumferentially spaced, laterally opposed recesses **35** for receiving resilient engaging features provided on the base **40**. As best shown in FIG. 4, base **40** comprises a pair of laterally opposed resilient locking legs **36** for engaging the recesses **35** formed in the mounting flange **32**. Each locking leg **36** depends in a cantilever fashion from the base **40** and is provided with a protrusion **37** that rests against the inner surface of the body **41** of the base in a relaxed, or unbiased, position. The body **41** of base **40**, and more particularly, opposite sidewalls **43** of the base are sufficiently elastic and deformable such that a force flexing the sidewalls inwardly causes the locking legs **36** to move from an unbiased position in engagement with the mounting flange **32** to a biased position out of engagement with the mounting flange.

As illustrated in FIG. 5, base **40** and cable collection tube **50** with sensor **25** and cable assembly **60** contained therein may be withdrawn through the hole **H** formed in the support surface **SS** of display **D**. In this manner, the base **40**, cable collection tube **50**, sensor **25** and cable assembly **60** of the merchandise display security device **20** may be readily removed from the mounting element **30** after installation and accessed from above the support surface **SS** of the display **D** for repair or replacement. Furthermore, the same or a different merchandise display security device **20** (except for the mounting element **30**) may be installed at the same location on the support surface **SS** of the display **D** without the need to access any of the components from beneath the support surface. As will be readily understood and appreciated by those skilled in the art, connector plug **59** of power cord **PC** may be disconnected from connector jack **58** at the free end **52** of collection tube **50** and reconnected to the same or a different collection tube as long as the power cord has sufficient length to be withdraw through the hole **H** in the support surface **SS** of the display **D**. Thus, the merchandise display security device **20** of the present invention provides for rapid and easy interchangeability and reconfiguration of the merchandise display. Although recesses **35** on mounting element **30** and locking legs **36** on base **40** are shown and described herein for releasably attaching and detaching the base, it should be noted that any connection means suitable for removably attaching the base to the mounting element may be utilized without departing from the spirit and intended scope of the invention. For example, base **40** may be removably attached and releasably detached from the mounting element by a threaded mechanical connection, a bayonet type mechanical connection, tamper-proof mechanical fasteners, a ball and detent mechanical connection with or without a magnet and a magnetically attractable component, a vacuum fitting over the mounting element, or any other suitable releasable and removable connection.

[0024] As previously mentioned, the cable collection tube **50** is movably, and more preferably, rotatably coupled to the base **40**. Furthermore, a mechanical stop **47**, **57** (FIG. 5) may be provided on the base and the cable collection tube, respectively, to limit rotation of the cable collection tube

relative to the body to, for example, about three hundred fifty-five degrees (355°) so that the cable assembly **60** is not twisted excessively absent a swivel, detangler or other component for reducing torsion forces applied to the cable **62**. At the same time, the cable collection tube **50** may be positioned beneath the support surface **SS** of the display **D** at any desired angular location relative to the mounting element **30** and the base **40**. In this manner, a plurality of the merchandise display security devices **20** may be installed utilizing the available space beneath the support surface **SS** in an economical fashion, thereby maximizing the number of security devices on the display **D**. It should be further noted that the body **51** of the cable collection tube **50** is intentionally formed with an arcuate shape that both limits the amount of vertical space beneath the support surface required for installation of the merchandise display security device **20** and facilitates insertion and removal of the cable collection tube through the mounting element **30** disposed within the hole **H** of the display **D**.

[0025] The foregoing has described one or more exemplary embodiments of a merchandise display security device for displaying and protecting an article of merchandise on a support surface, for example a tabletop, counter, shelf or the like, of a display located in a retail store. The merchandise display security device includes a mounting element and a base having a movable cable collection tube that is releasably attachable to and detachable from the mounting element. The base is detached from the mounting element so that the cable collection tube, along with a sensor and a cable assembly electrically connected to the base through the cable collection tube, is removable and accessible from above the support surface of the display. As a result, the cable assembly may be repaired or replaced, or alternatively, the base, cable collection tube, sensor and cable assembly may be removed to reconfigure the display after initial installation without the need for authorized store personnel to access the merchandise display security device from beneath the support surface. Furthermore, the cable collection tube is movably disposed on the base so that the cable collection tube may be positioned beneath the support surface of the display at any desired angular location relative to the mounting element and the base.

[0026] Exemplary embodiments of a merchandise display security device including at least the aforementioned features have been shown and described herein for purposes of illustrating and enabling the best mode of the invention. Those of ordinary skill in the art, however, will readily understand and appreciate that numerous variations and modifications of the invention may be made without departing from the spirit and scope of the invention. Accordingly, all such variations and modifications are intended to be encompassed by the appended claims.

That which is claimed is:

1. A merchandise display security device (20) for displaying and protecting an article of merchandise (M) comprising:

a mounting element (30) adapted to be mounted on a support surface (SS) with the mounting element defining an opening (33) over a hole (H) formed through the support surface; and

a base (40) having a cable collection tube (50) configured to be received within the opening of the mounting element and passed through the hole of the support surface to a location beneath the support surface, the base being releasably attached to the mounting element so that the base can be detached from the mounting element and the collection tube passed through the hole of the support surface from the location beneath the support surface so as to provide access to the collection tube above the support surface.

2. A security device (20) according to claim 1, wherein the collection tube (50) comprises a generally hollow body (51) for receiving a cable assembly (60) that extends between a sensor (25) configured to be removably supported on the base (40) and a free end (52) of the collection tube.

3. A security device (20) according to claim 2, wherein the cable assembly (60) comprises an elastic cable (62) containing at least a pair of conductors that electrically connect the cable assembly to the sensor (25) and the cable is extensible and retractable relative to the collection tube (50).

4. A security device (20) according to claim 3, wherein the cable (62) is a helical coil cable.

5. A security device (20) according to claim 3, wherein the conductors of the cable (62) electrically connect the cable assembly (60) to electronics (55) disposed within the collection tube (50).

6. A security device (20) according to claim 5, wherein the base (40) comprises a generally hollow body (41) for housing electronics (45) and wherein an electrical conduit (44) containing at least a pair of conductors extends between the base and the collection tube (50) to electrically connect the electronics housed within the base with the electronics (55) disposed within the collection tube.

7. A security device (20) according to claim 6, wherein the sensor (25) comprises a sensor switch (26) for engaging the article of merchandise (M) that is electrically connected to the conductors of the cable (62) of the cable assembly (60) so that the sensor switch is electrically connected to the electronics (55) disposed within the collection tube (50) through the cable assembly and is electrically connected to the electronics (45) housed within the base (40) through the conductors of the electrical conduit (44).

8. A security device (20) according to claim 7, wherein at least one of the electronics (45) housed within the base (40) and the electronics (55) disposed within the collection tube (50) activates an alarm if the sensor switch (26) of the sensor (25) is armed and the article of merchandise (M) is separated from the sensor.

9. A security device (20) according to claim 7, wherein the base (40) comprises a sensor switch (46) for engaging the support surface (SS) that is

electrically connected to the electronics (45) housed within the base (40) and wherein at least one of the electronics housed within the base and the electronics (55) disposed within the collection tube (50) activates an alarm if the sensor switch of the base is armed and the base is separated from the support surface.

10. A security device (20) according to claim 1, wherein the base (40) comprises at least one resilient locking leg (36) and wherein the mounting element (30) has at least one recess (35) for engaging the locking leg of the base to releasably attach the base to the mounting element.

11. A merchandise display security device (20) for displaying and protecting an article of merchandise (M) comprising:

a mounting element (30) adapted to be mounted on a support surface (SS) with the mounting element defining an opening (33) over a hole (H) formed through the support surface; and


a base (40) having a cable collection tube (50) configured to be received within the opening of the mounting element and passed through the hole of the support surface to a location beneath the support surface, the collection tube being rotatably disposed on the base so that the cable collection tube can be positioned at any desired angular location beneath the support surface relative to the base.

12. A security device (20) according to claim 11, wherein the collection tube (50) comprises a generally hollow body (51) for receiving a cable assembly (60) that extends between a sensor (25) configured to be removably supported on the base (40) and a free end (52) of the collection tube.

13. A security device (20) according to claim 12, wherein the cable assembly (60) comprises an extensible and retractable cable (62) containing at least a pair of conductors that electrically connect the cable assembly to the sensor (25).

14. A security device (20) according to claim 13, wherein the cable (62) is a helical coil cable.

1/5

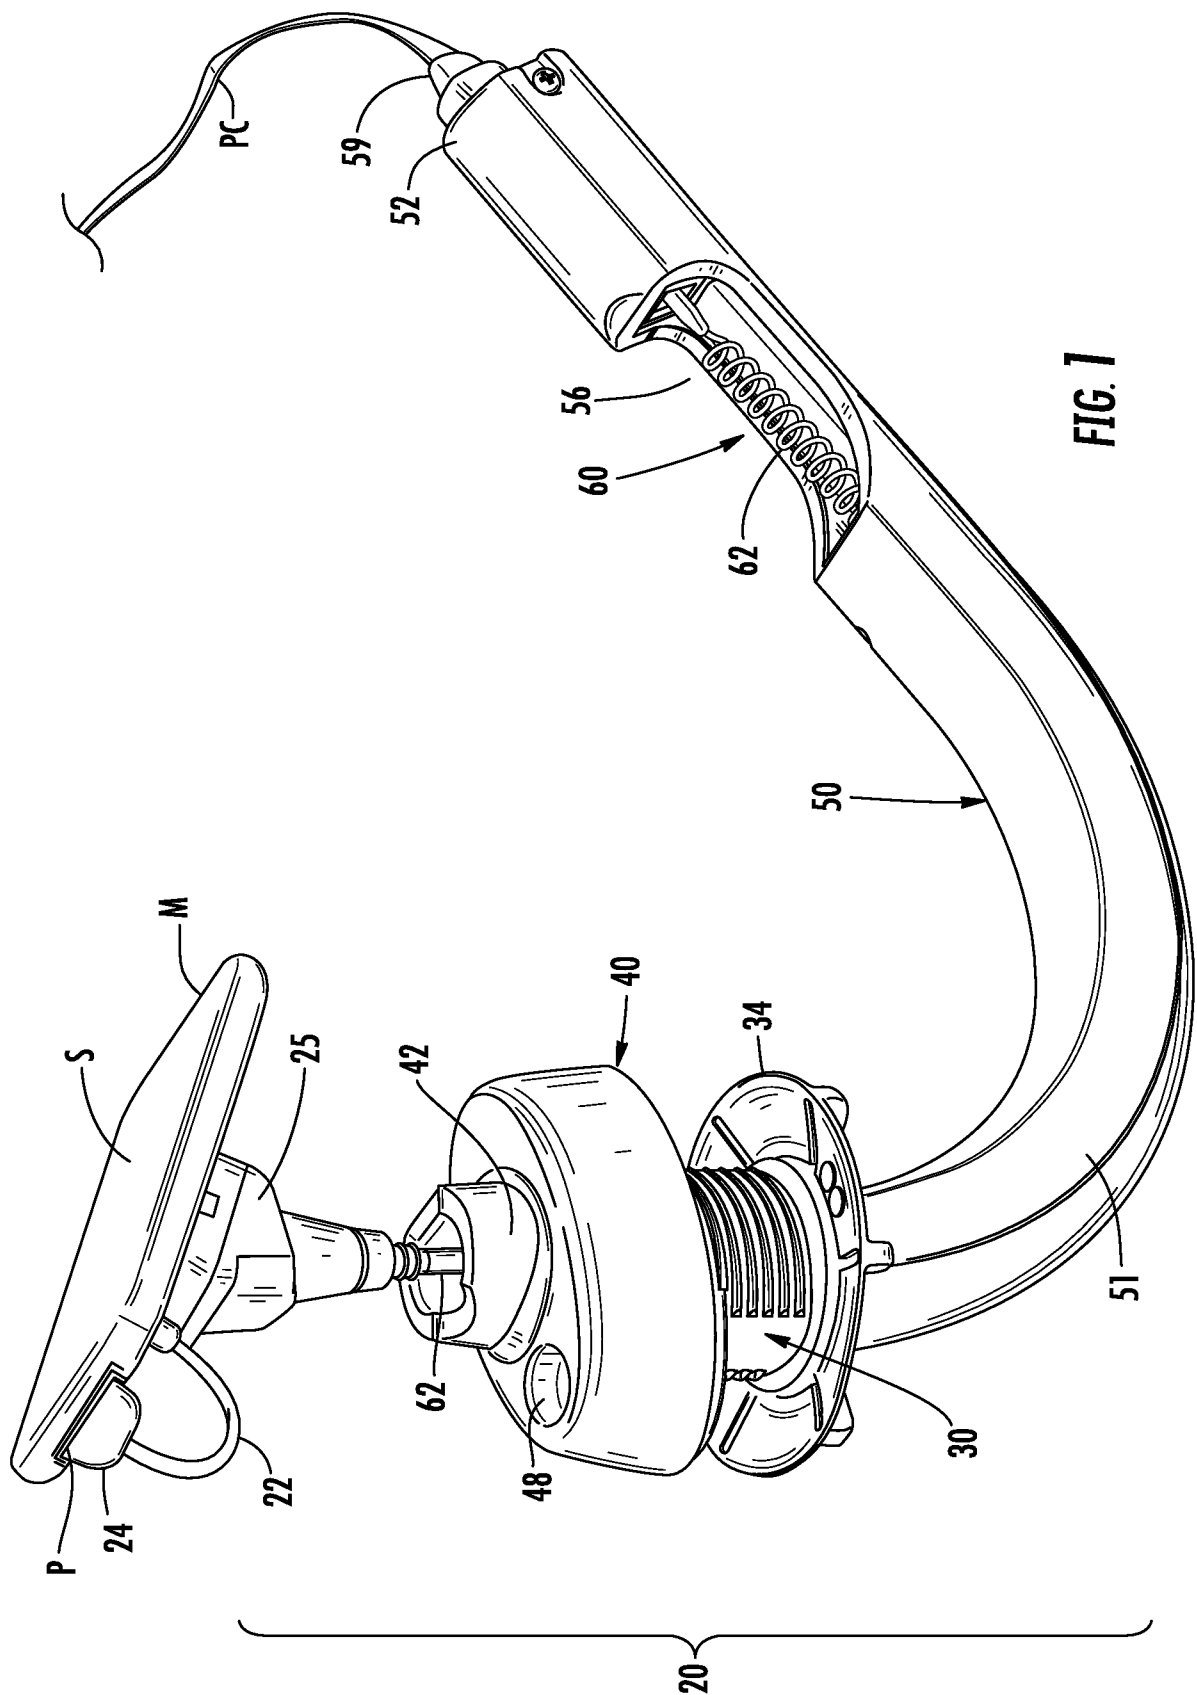

2/5


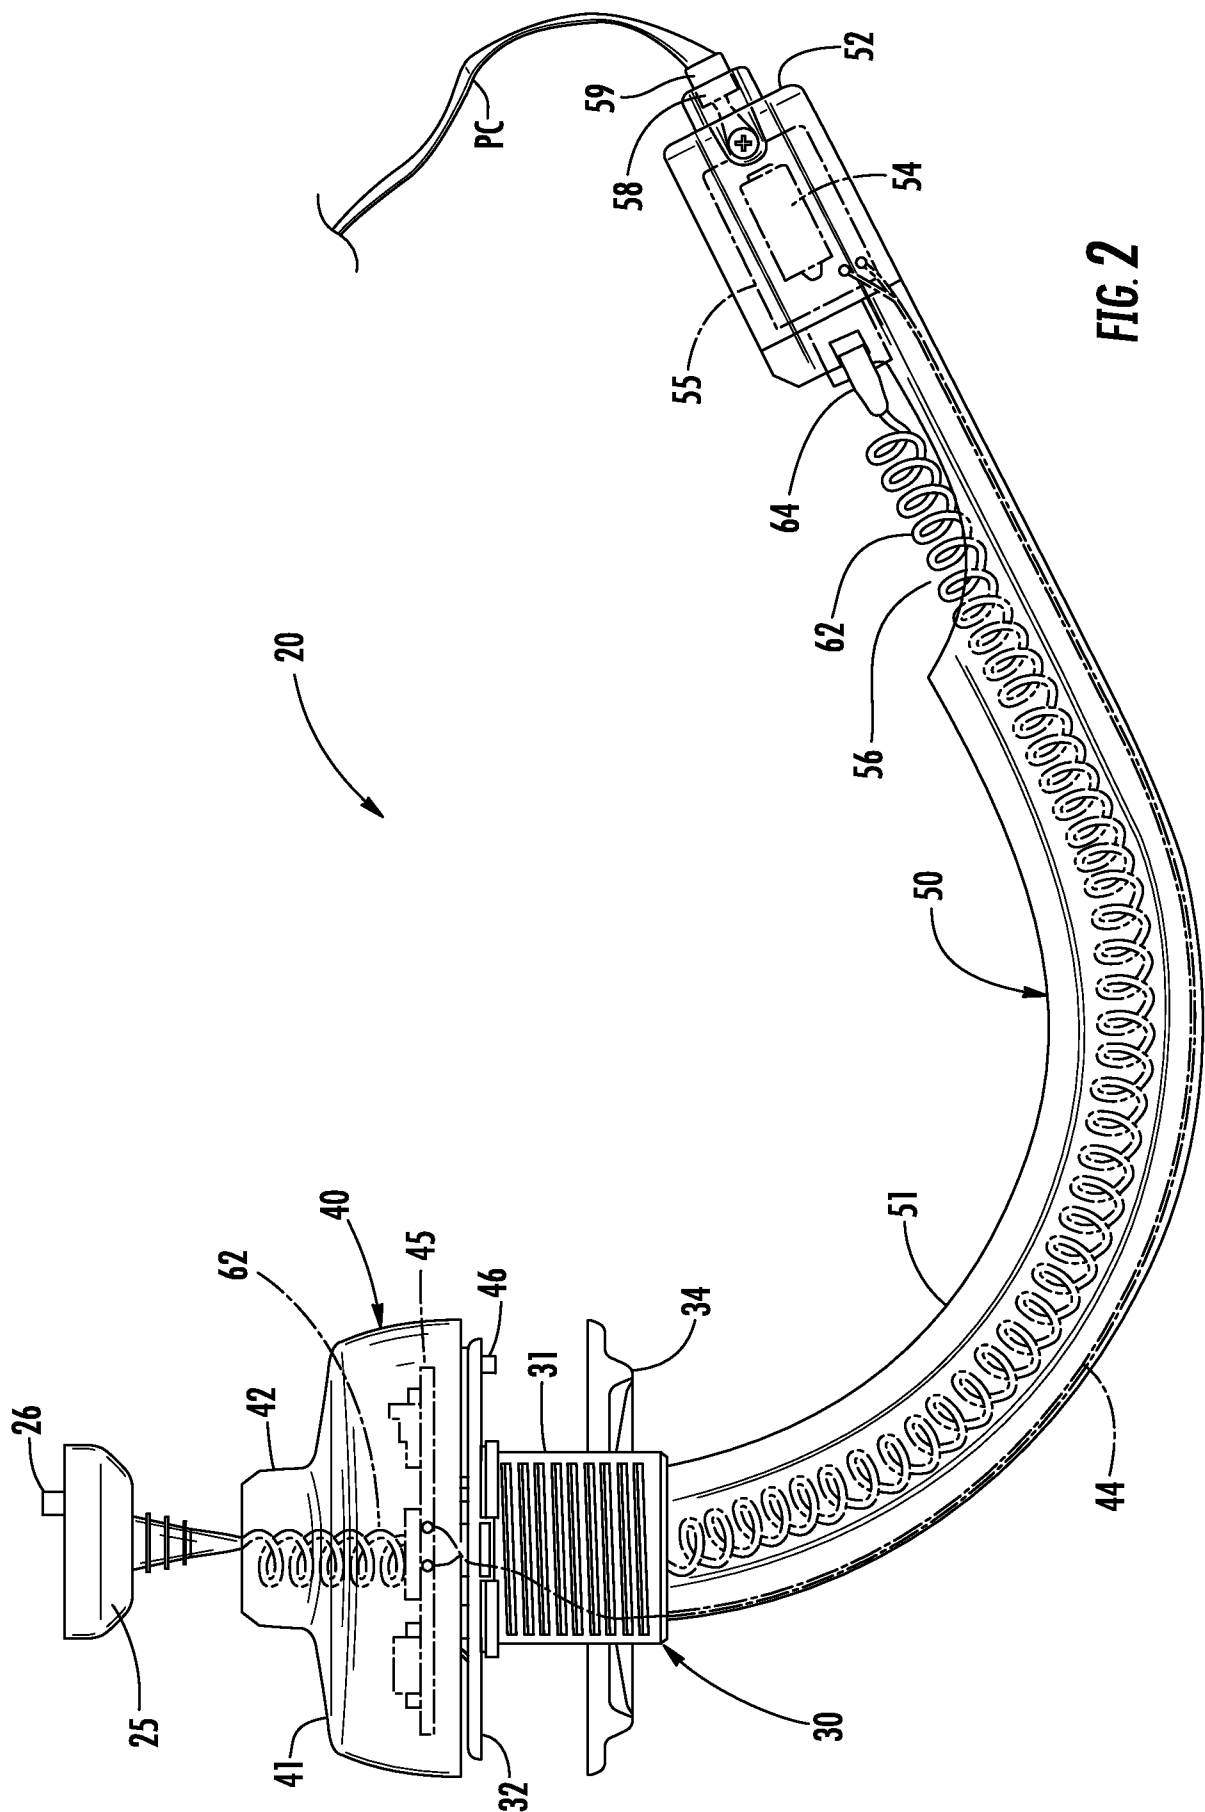


FIG. 2

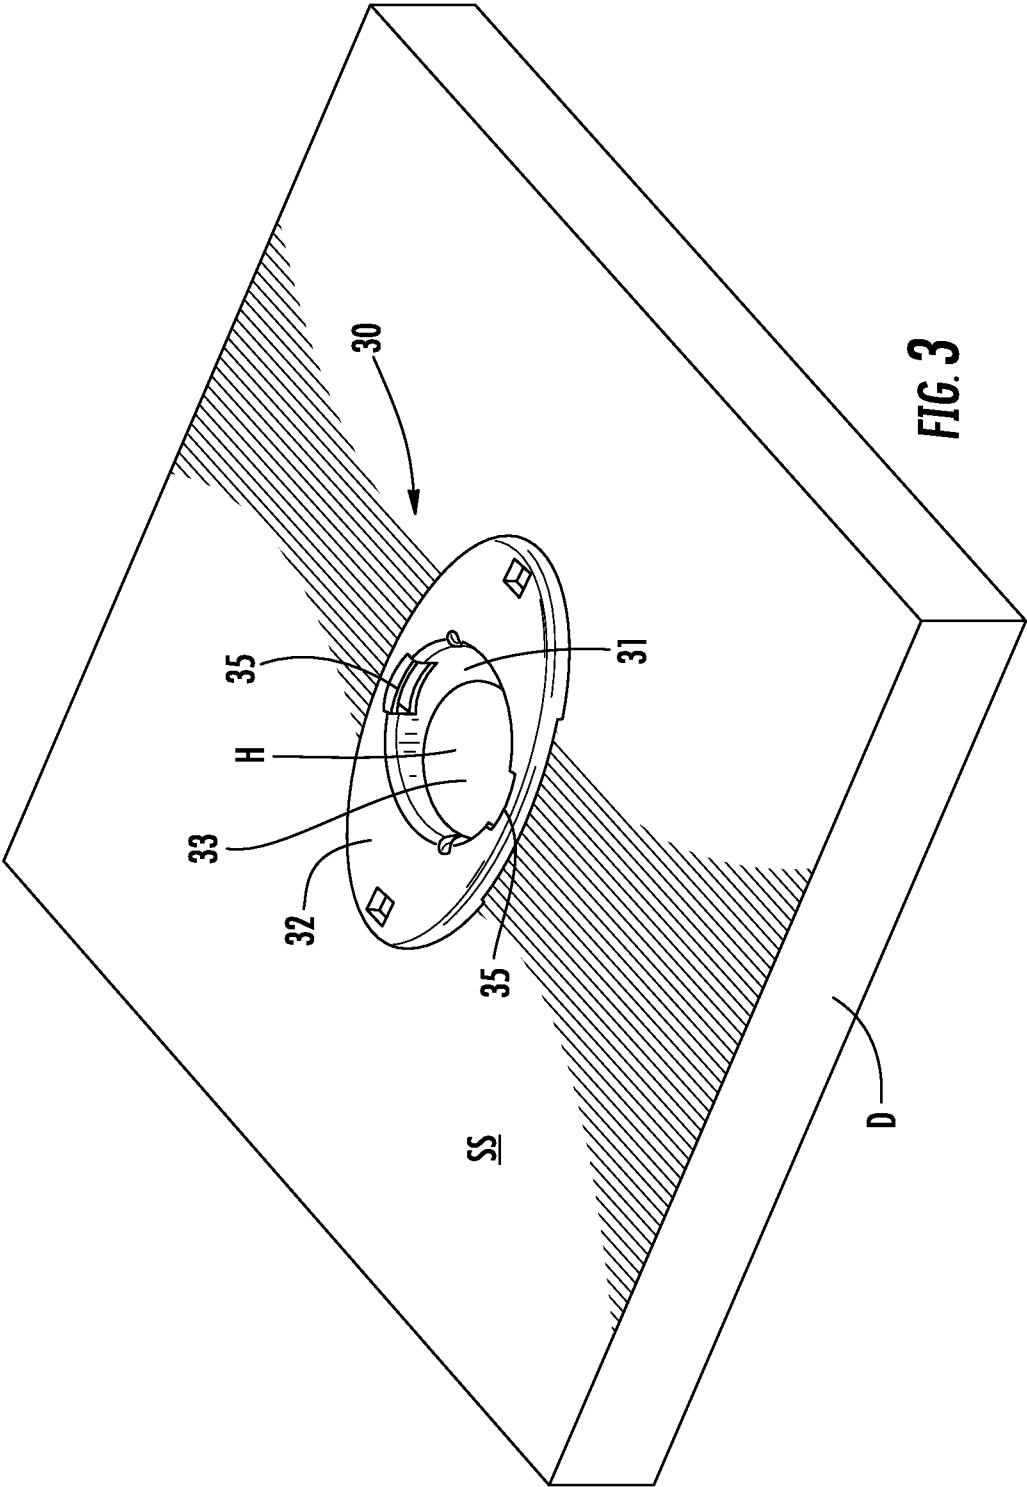

4/5

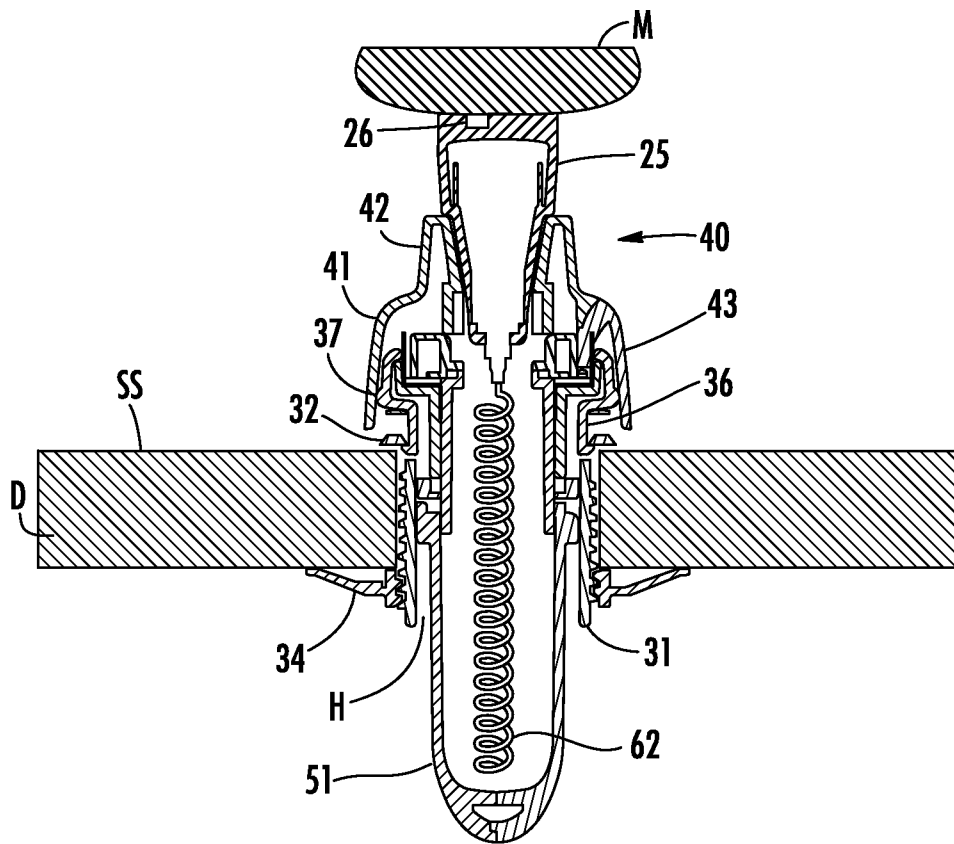


FIG. 4

5/5

