



US 20060050791A1

(19) **United States**

(12) **Patent Application Publication**
Shiiyama

(10) **Pub. No.: US 2006/0050791 A1**
(43) **Pub. Date: Mar. 9, 2006**

(54) **SCENE CHANGE DETECTION METHOD USING TWO-DIMENSIONAL DP MATCHING, AND IMAGE PROCESSING APPARATUS FOR IMPLEMENTING THE METHOD**

Publication Classification

(75) Inventor: **Hiroataka Shiiyama, Machida-shi (JP)**

- (51) **Int. Cl.**
 - H04N 11/04* (2006.01)
 - H04N 5/14* (2006.01)
 - H04N 7/12* (2006.01)
 - H04N 9/64* (2006.01)
 - H04B 1/66* (2006.01)
 - H04N 11/02* (2006.01)
- (52) **U.S. Cl.** **375/240.24; 348/700**

Correspondence Address:
FITZPATRICK CELLA HARPER & SCINTO
30 ROCKEFELLER PLAZA
NEW YORK, NY 10112 (US)

(73) Assignee: **CANON KABUSHIKI KAISHA, Ohta-ku (JP)**

(57) **ABSTRACT**

(21) Appl. No.: **11/247,330**

There is provided a scene change detection method which is independent from an encoder of a file, and can assure high real-time performance and effective, quick processes, and an image processing apparatus that can implement the method. Frame image data is extracted from moving image data (S11), the frame image data is segmented into a plurality of blocks (S12), labels are assigned in accordance with feature amounts acquired in units of blocks (S13), a sequential label set is generated by arranging the assigned labels in a predetermined block order (S14), similarities between the generated sequential label set and sequential label sets of a previous frame image data group are computed by two-dimensional DP matching and a scene change frame in the moving image is detected from a computed similarity group (S15, S16), and the detected scene change frame information is stored in correspondence with the frame image data.

(22) Filed: **Oct. 12, 2005**

Related U.S. Application Data

(62) Division of application No. 09/503,477, filed on Feb. 14, 2000, now Pat. No. 6,977,963.

Foreign Application Priority Data

Feb. 15, 1999 (JP) 11-036524

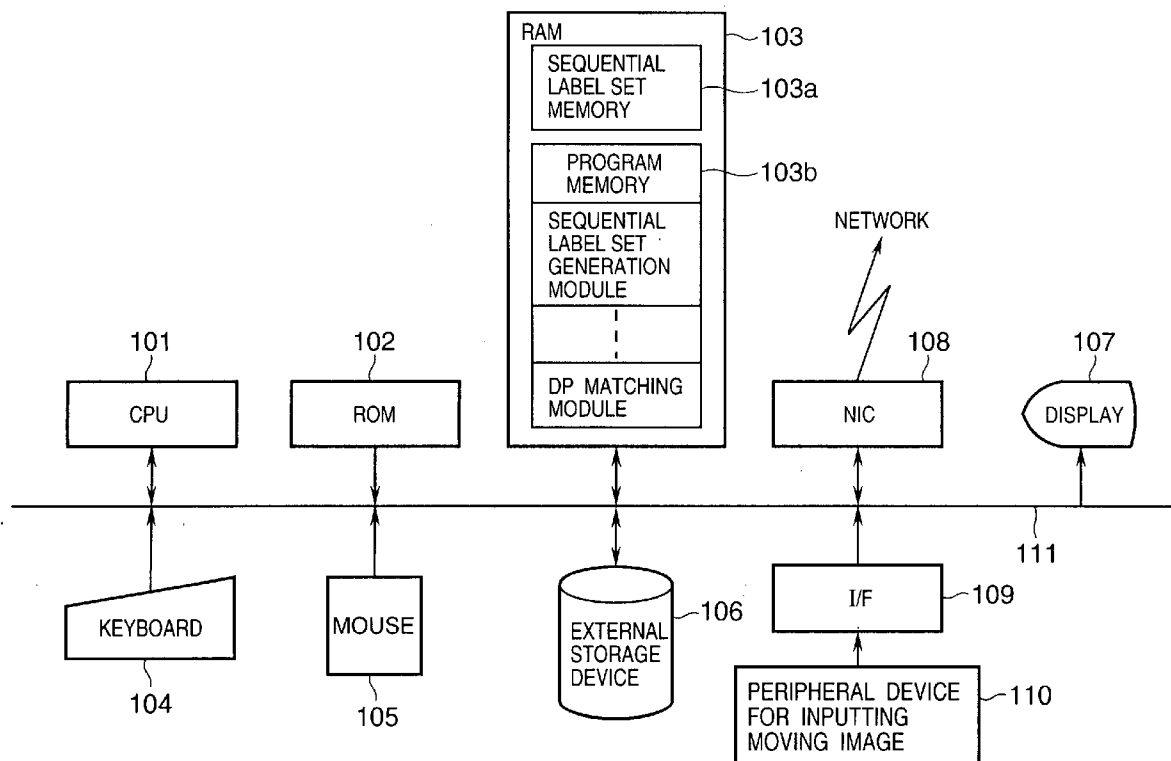


FIG. 1

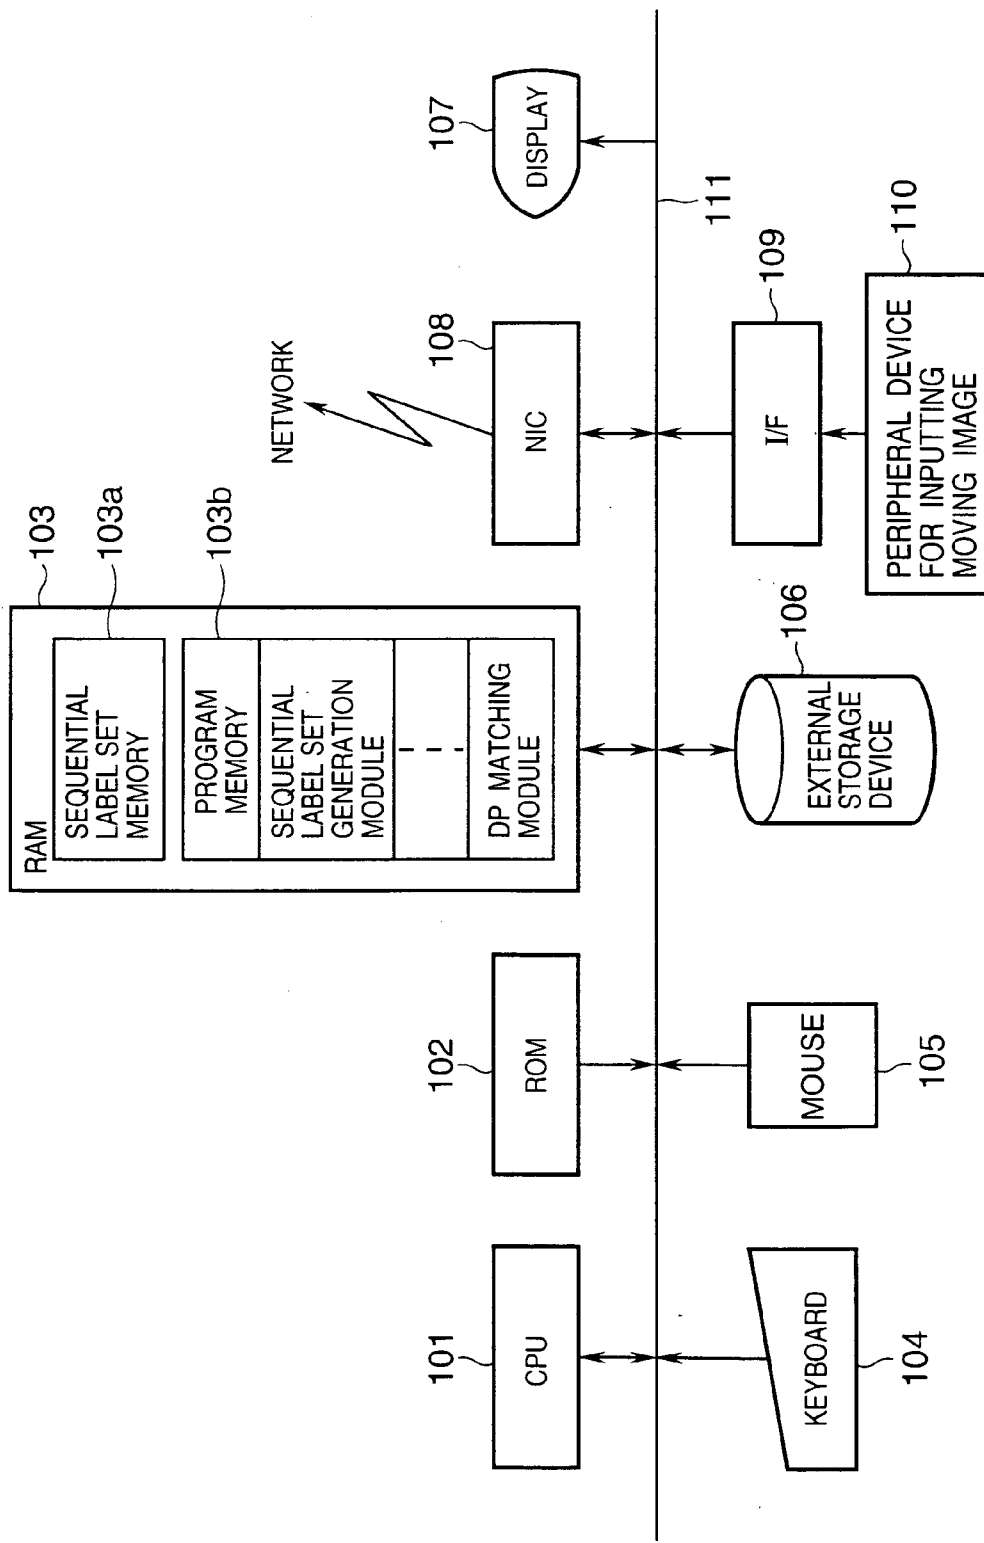


FIG. 2

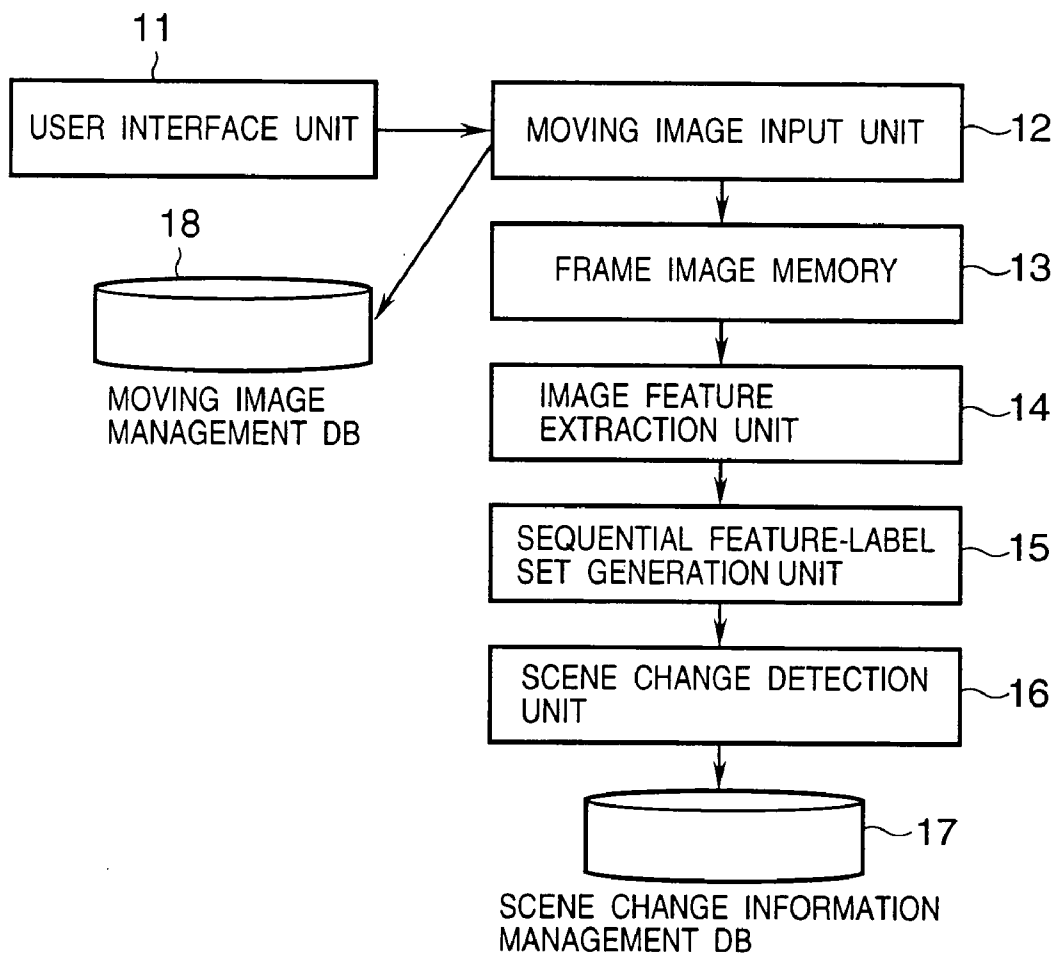


FIG. 3

112

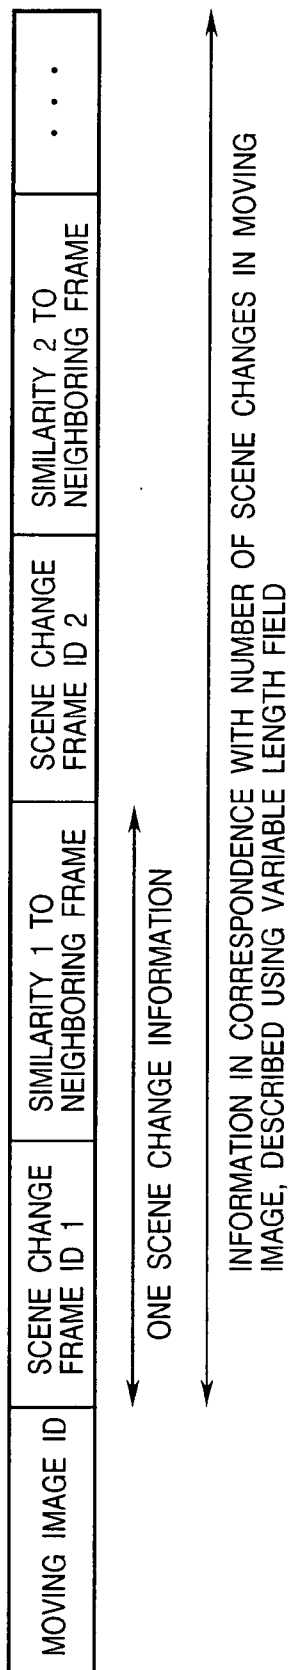


FIG. 4

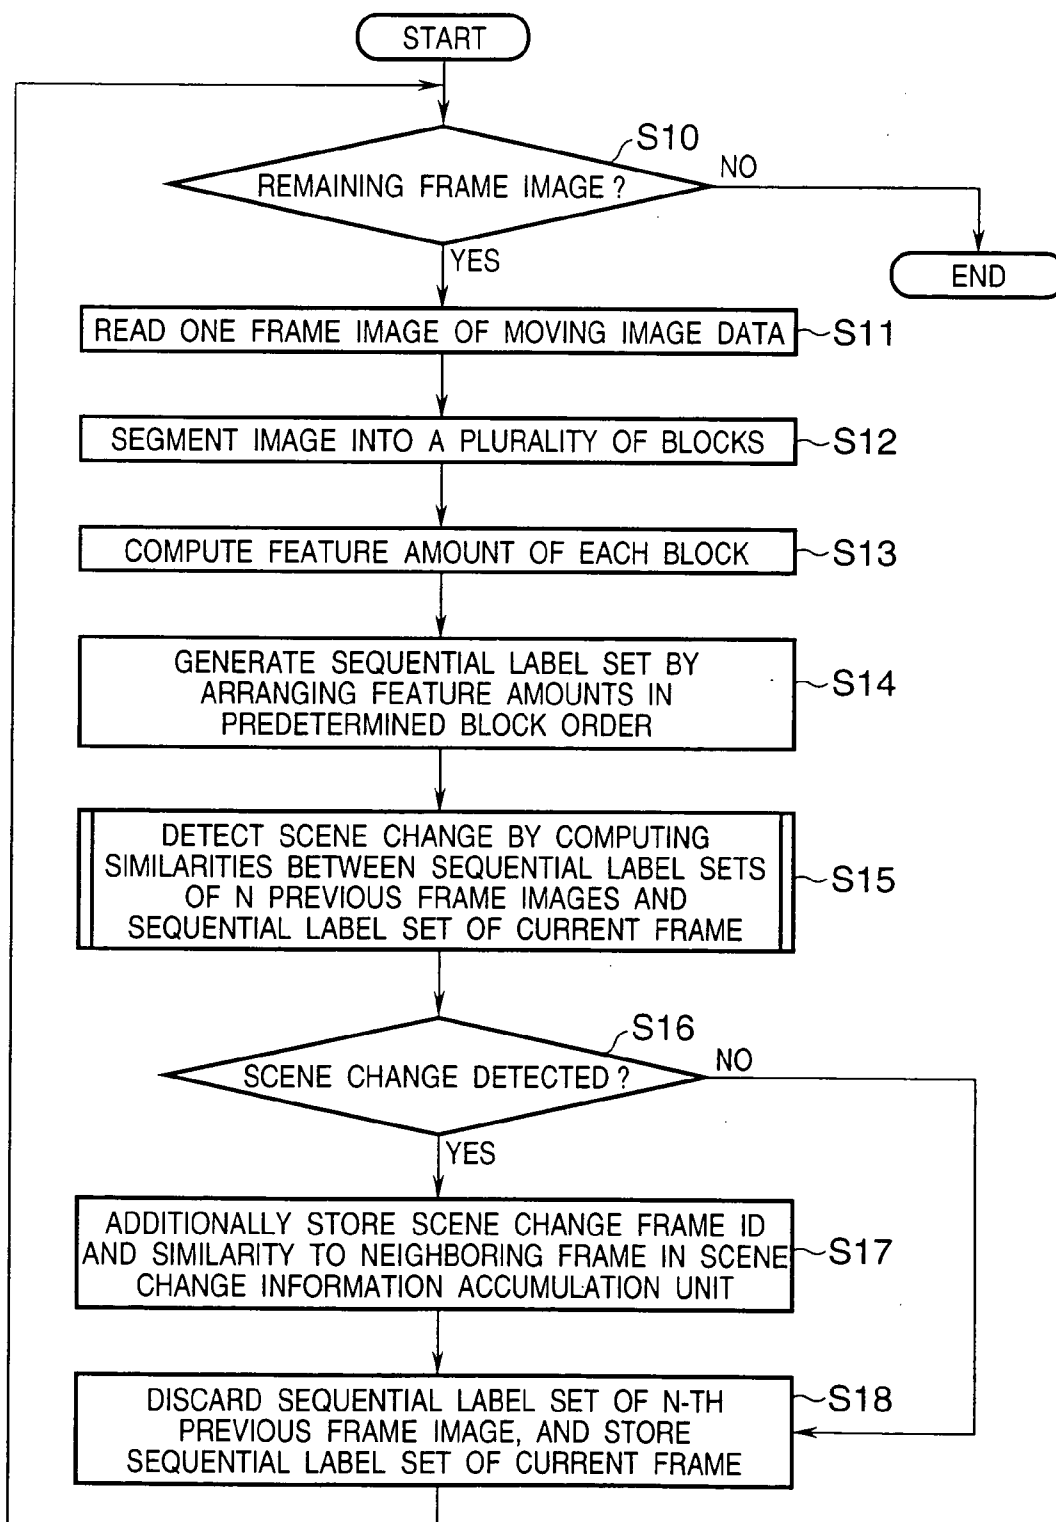


FIG. 5

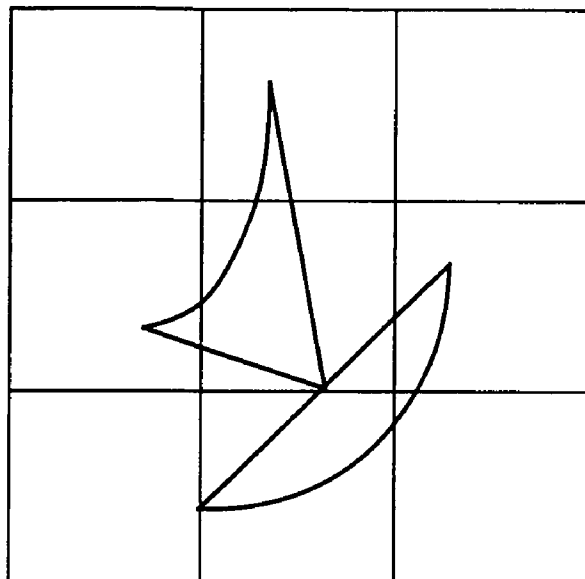


FIG. 6

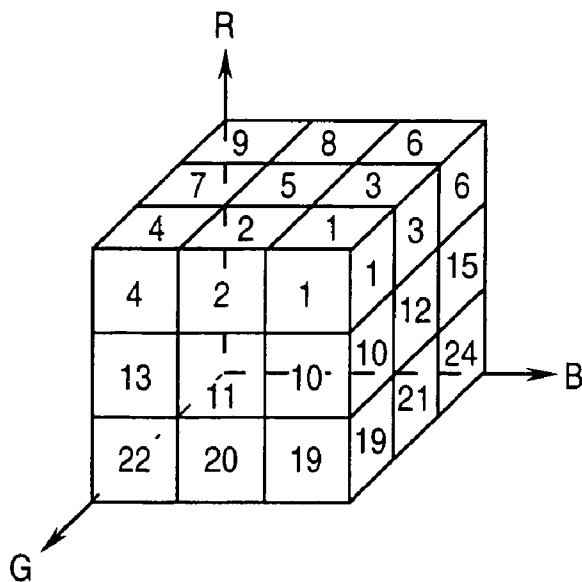


FIG. 7A

1	2	3
4	5	6
7	8	9

FIG. 7B

3	2	1
6	5	4
9	8	7

FIG. 7C

7	8	9
4	5	6
1	2	3

FIG. 7D

9	8	7
6	5	4
3	2	1

FIG. 8

113



MOVING IMAGE ID	FILE NAME OF FULL-PATH MOVING IMAGE	ANOTHER ATTRIBUTE	...
-----------------	-------------------------------------	-------------------	-----

FIG. 9

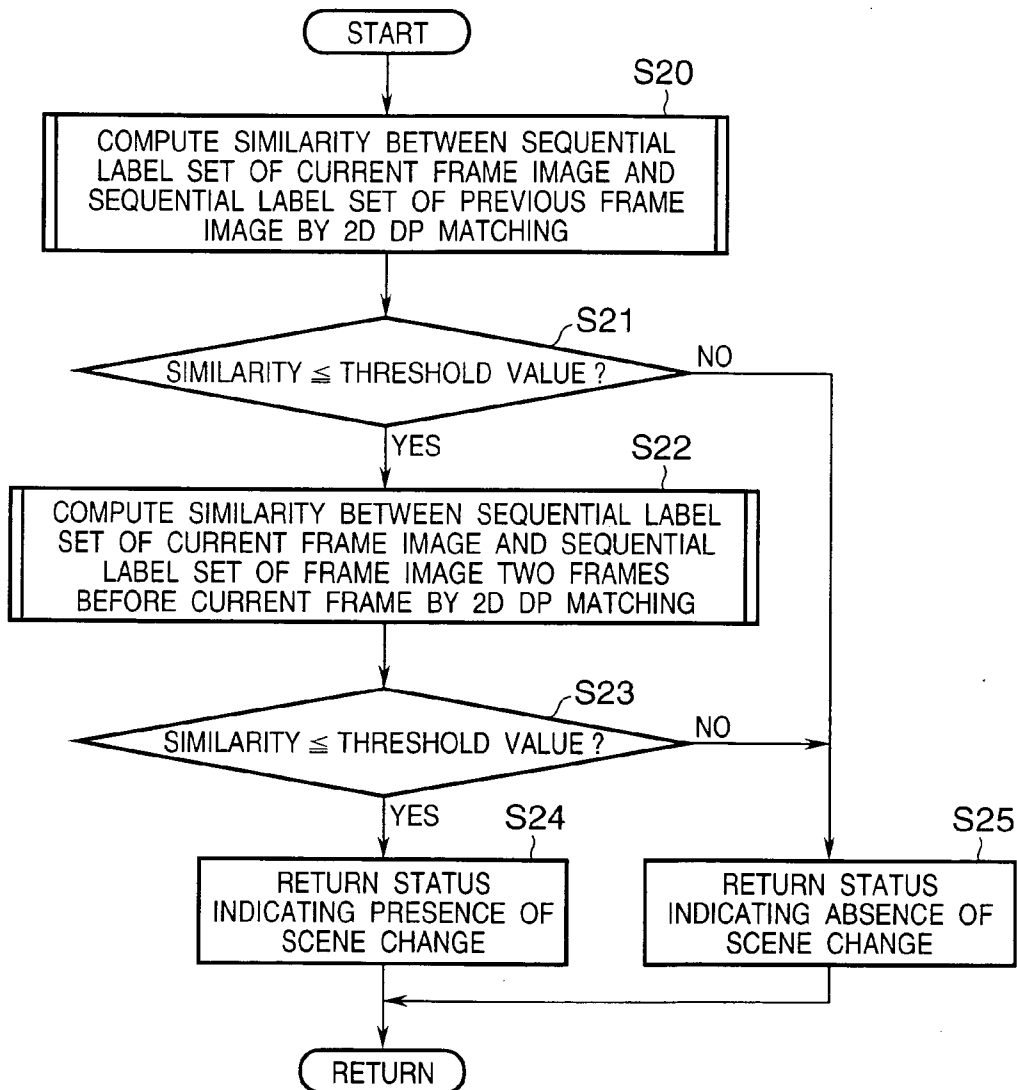


FIG. 11

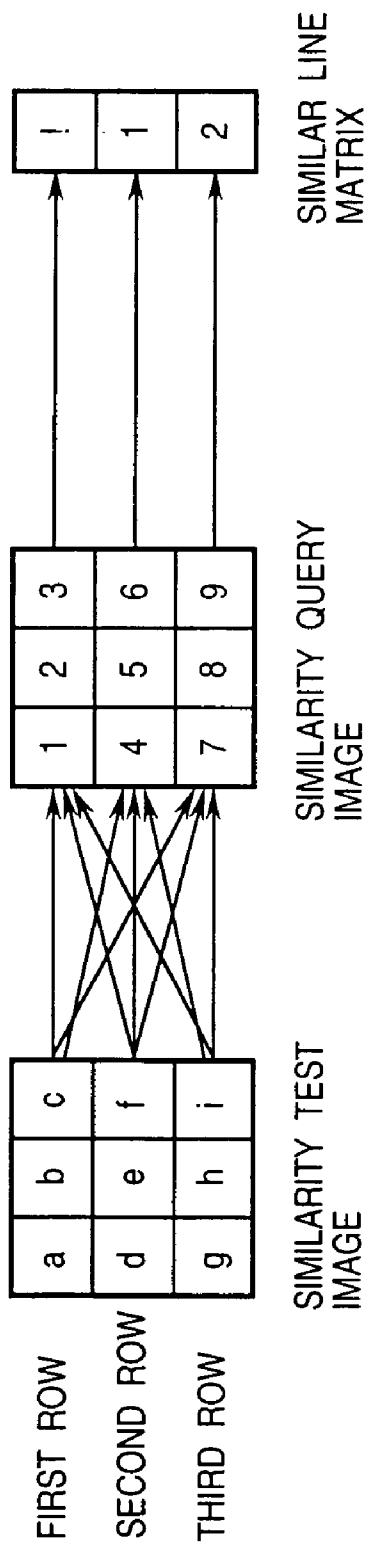


FIG. 12

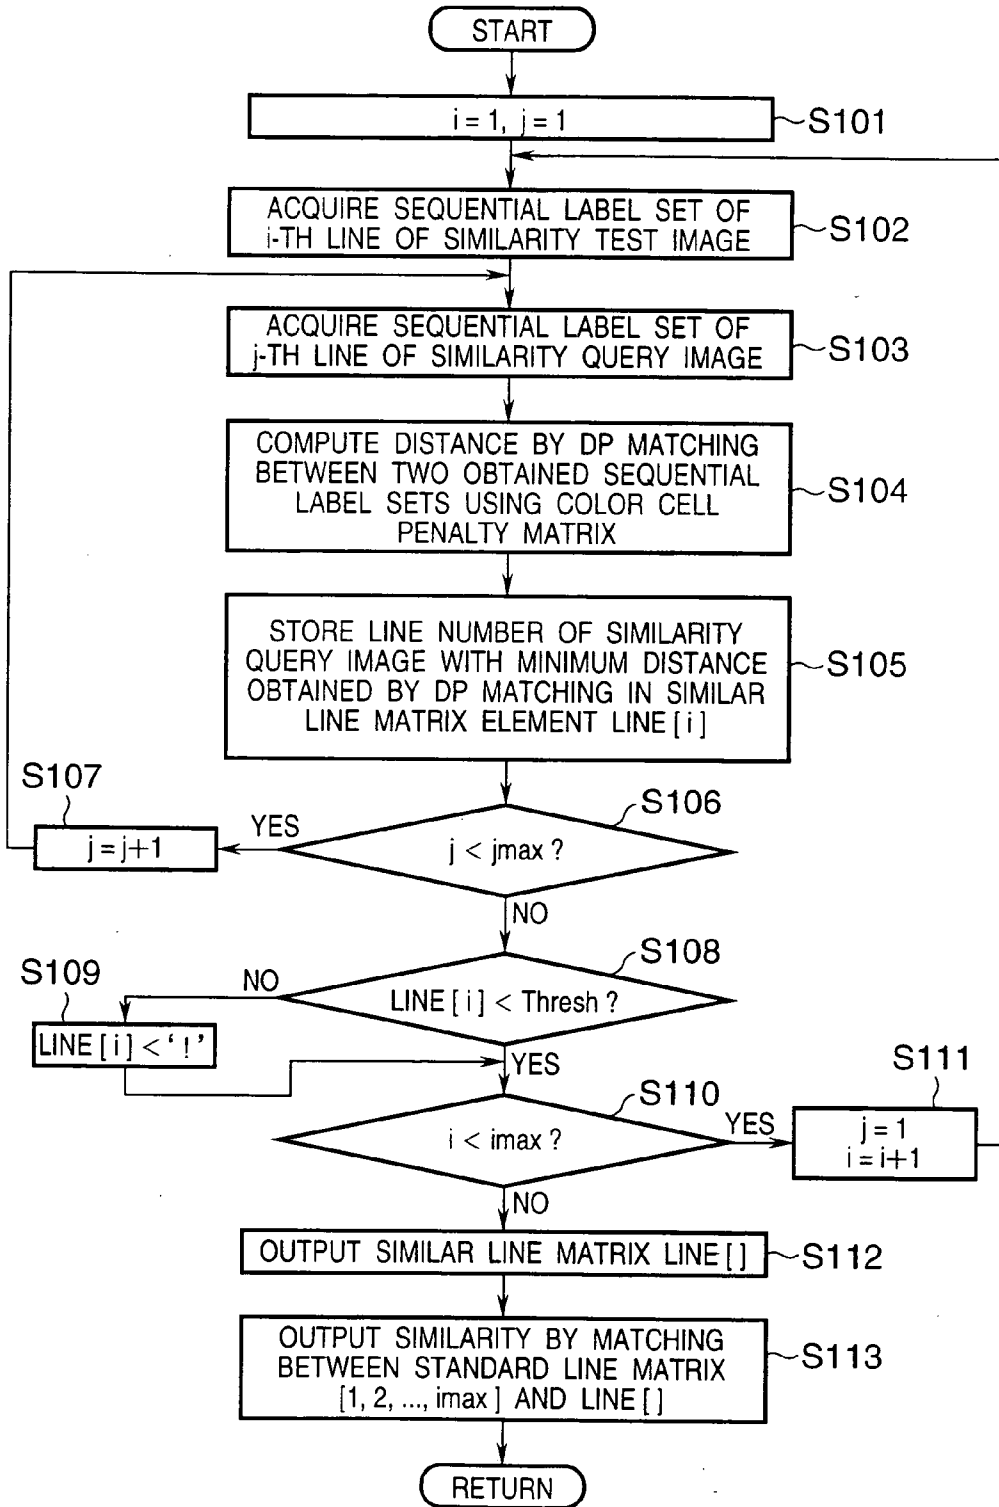


FIG. 13


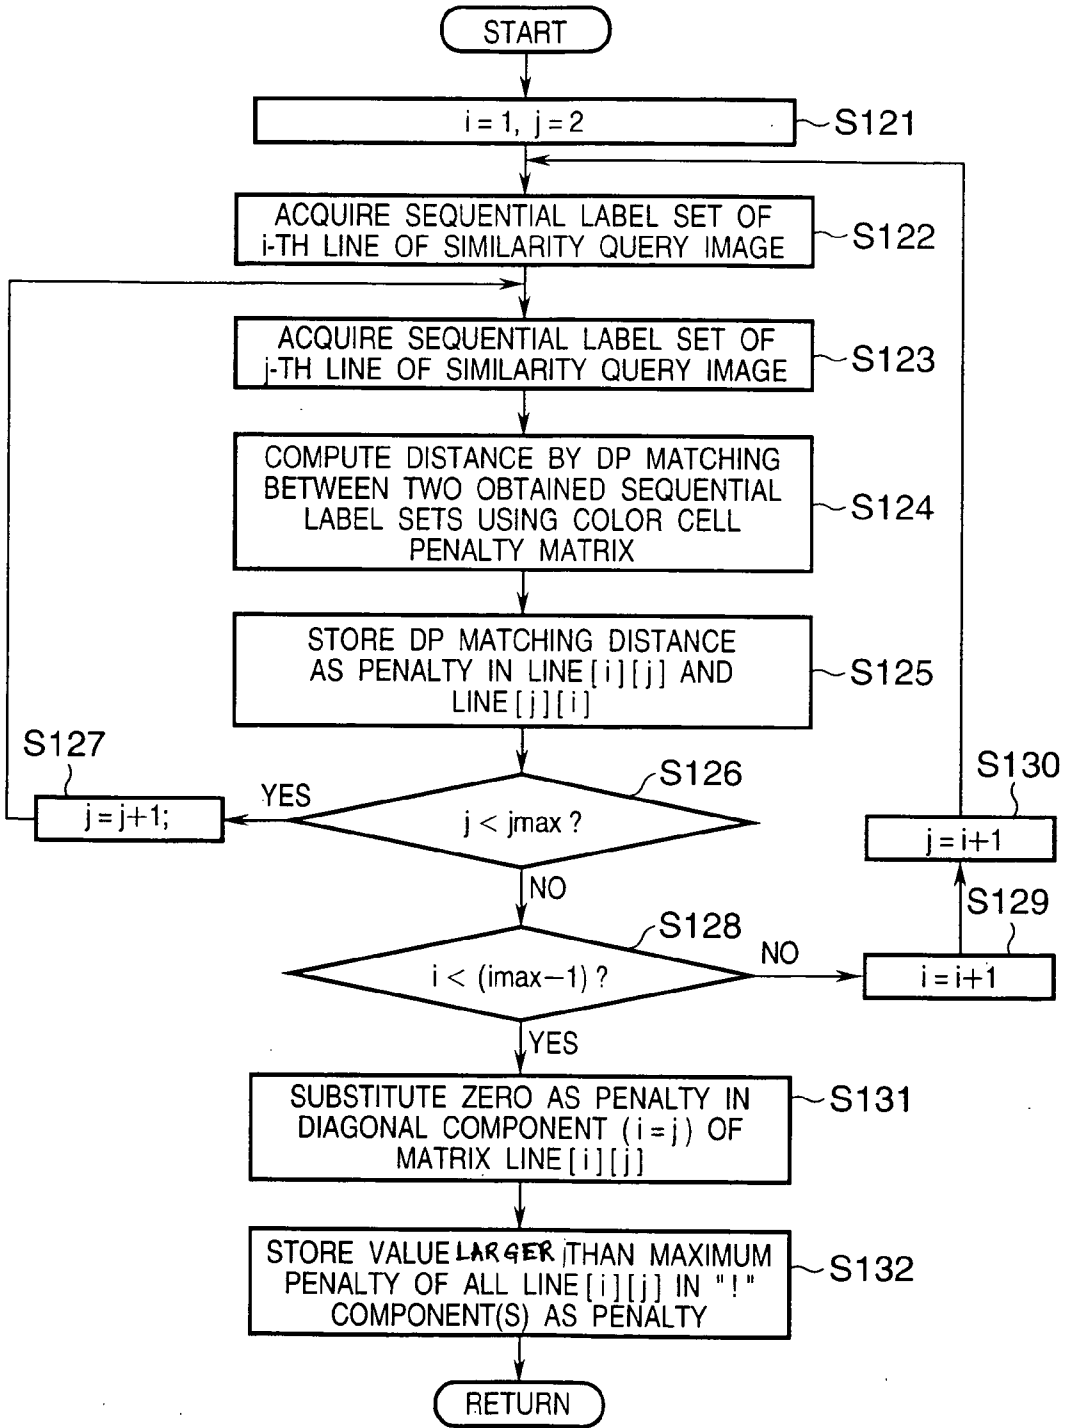


FIG. 14

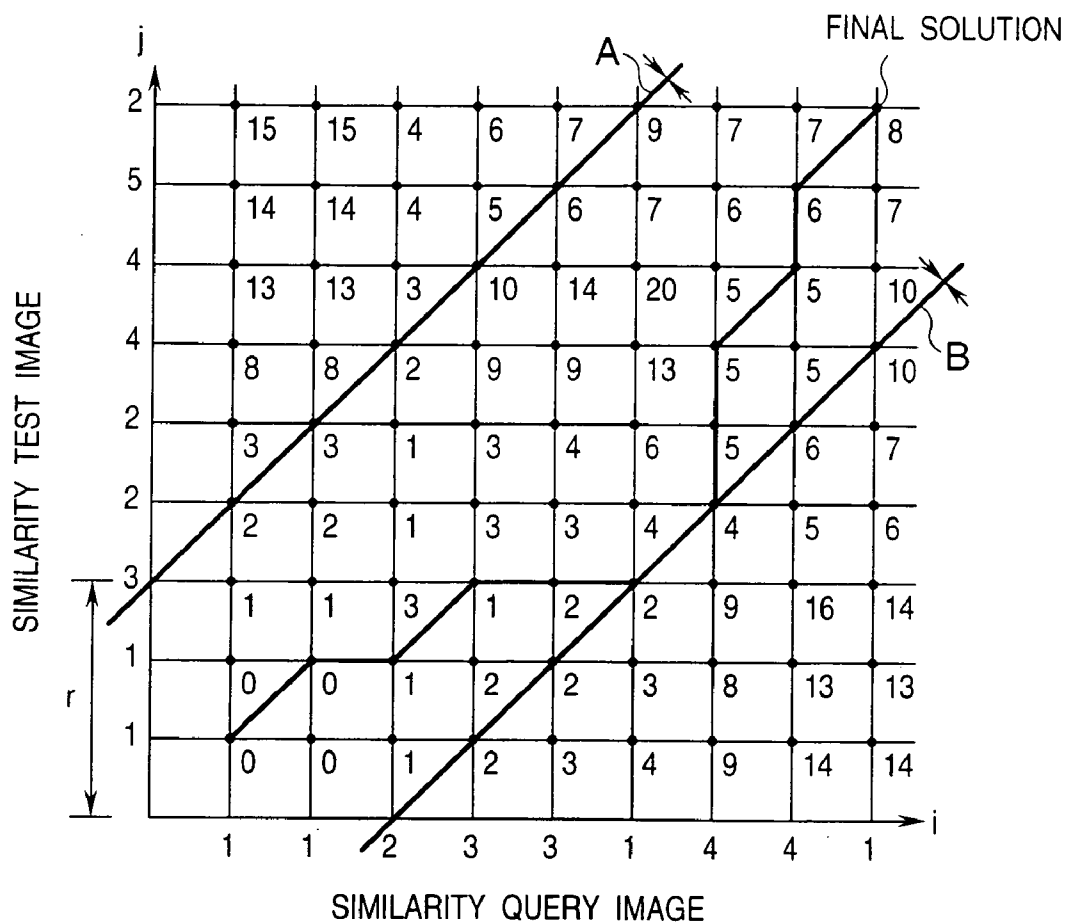

**SCENE CHANGE DETECTION METHOD USING
TWO-DIMENSIONAL DP MATCHING, AND
IMAGE PROCESSING APPARATUS FOR
IMPLEMENTING THE METHOD**

FIELD OF THE INVENTION

[0001] The present invention relates to a scene change detection method for detecting a change in moving image scene (a so-called scene change) from a moving image, and an image processing apparatus for implementing the method.

BACKGROUND OF THE INVENTION

[0002] As conventional methods of extracting a scene change from a moving image, a method of computing changes in histogram of colors of frames that form the moving image, and detecting an evaluation value by executing some threshold value process, a method using motion vector information which is used in MPEG2 or the like, and the like have been proposed.

[0003] The method using the histograms has merits such as low computation cost, high-speed processing, and high real-time performance, but has the following demerits. That is, a scene change cannot be detected from scenes having similar histograms, or scene changes are excessively detected due to an abrupt deformation or rotation of an object.

[0004] On the other hand, the method using a motion vector can assure high precision, and can also be used in other applications such as object extraction and the like, but requires much time for computations, resulting in poor real-time performance. Even when motion vector information is extracted from data encoded by MPEG2 and motion vector computations are omitted, since the precision of these motion vector computations depends on the performance of an encoder, high performance cannot always be guaranteed for all MPEG2 files.

SUMMARY OF THE INVENTION

[0005] The present invention has been made in consideration of the aforementioned problems, and has as its object to provide a scene change detection method which considers color and composition, and an image processing apparatus for implementing the method.

[0006] It is another object of the present invention to provide a scene change detection method which is independent from an encoder of a file, and can assure high real-time performance and effective, quick processes, and an image processing apparatus that can implement the method.

[0007] In order to achieve the above objects, an image processing apparatus according to the present invention, comprises: labeling means for extracting frame image data from moving image data, segmenting the frame image data into blocks, and assigning labels in accordance with feature amounts acquired in units of blocks; label sequence generation means for generating a label sequence by arranging the labels assigned by the labeling means in a predetermined block order; label sequence accumulation means for accumulating the label sequence generated by the label sequence generation means in correspondence with the frame image data; similarity computation means for computing similarities

between the generated label sequence and label sequences of a previous frame image data group; scene change detection means for detecting a scene change frame in the moving image from a computed similarity group; and scene change storage means for storing the detected scene change frame information in correspondence with the frame image data.

[0008] In order to achieve the above objects, a scene change detection method according to the present invention comprises the steps of: extracting frame image data from moving image data, segmenting the frame image data into blocks, and assigning labels in accordance with feature amounts acquired in units of blocks; generating a label sequence by arranging the assigned labels in a predetermined block order; computing similarities between the generated label sequence and label sequences of a previous frame image data group; and detecting a scene change frame in the moving image from a computed similarity group.

[0009] In order to achieve the above objects, a storage medium stores a control program for making a computer execute scene change detection, and the control program includes: the step of extracting frame image data from moving image data, segmenting the frame image data into blocks, and assigning labels in accordance with feature amounts acquired in units of blocks; the step of generating a label sequence by arranging the assigned labels in a predetermined block order; the step of computing similarities between the generated label sequence and label sequences of a previous frame image data group; and the step of detecting a scene change frame in the moving image from a computed similarity group.

[0010] Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] The accompanying drawings, which are incorporated in and constitute a part of the specification, illustrate embodiments of the invention and, together with the description, serve to explain the principles of the invention.

[0012] **FIG. 1** is a block diagram showing an example of the arrangement of an image processing apparatus having a scene change detection function according to an embodiment of the present invention;

[0013] **FIG. 2** is a block diagram showing an example of the arrangement of the scene change detection function according to the embodiment of the present invention;

[0014] **FIG. 3** is a view for explaining the storage state of scene change information in a scene change information accumulation/management DB according to the embodiment of the present invention;

[0015] **FIG. 4** is a flow chart showing the sequence of a scene change information generation process according to the embodiment of the present invention;

[0016] **FIG. 5** shows an example of an image segmented into blocks according to the embodiment of the present invention;

[0017] FIG. 6 is a view for explaining a multi-dimensional feature amount space according to the embodiment of the present invention;

[0018] FIGS. 7A to 7D are views for explaining examples of block orders used upon generating a sequential label set according to the embodiment of the present invention;

[0019] FIG. 8 is a view for explaining the storage format of moving image data file information in a moving image management database according to the embodiment of the present invention;

[0020] FIG. 9 is a flow chart showing the detailed sequence of a scene change detection process in FIG. 4 according to the embodiment of the present invention;

[0021] FIG. 10 shows an example of a penalty matrix among labels used upon computing similarity by comparing label matrices according to the embodiment of the present invention;

[0022] FIG. 11 is a view for explaining a similarity computation process according to the embodiment of the present invention;

[0023] FIG. 12 is a flow chart for explaining the sequence of similarity computation using two-dimensional DP matching according to the embodiment of the present invention;

[0024] FIG. 13 is a flow chart showing the sequence for setting a dynamic penalty value according to the embodiment of the present invention; and

[0025] FIG. 14 is a view for explaining adjustment of a matching window in DP matching according to the embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

Example of Arrangement of Image Processing Apparatus of This Embodiment

[0027] FIG. 1 is a block diagram showing an example of the arrangement of an image processing apparatus having a scene change detection function according to an embodiment of the present invention.

[0028] Referring to FIG. 1, reference numeral 101 denotes a CPU which executes various kinds of computation and control in a scene change detection apparatus of this embodiment. Reference numeral 102 denotes a ROM which stores a boot program executed upon starting up the apparatus, and various permanent data. Reference numeral 103 denotes a RAM which stores control programs to be processed by the CPU 101, and provides a work area used when the CPU 101 executes various kinds of control. For example, the RAM 103 has a sequential label set memory 103a for storing a sequential label set of a plurality of frames of a moving image, and a program memory 103b including a sequential label set generation module, DP matching module, and the like, and is also used as a frame image memory (to be described later). Reference numeral 104 denotes a keyboard; and 105, a mouse, which provide various input operation environments for the user.

[0029] Reference numeral 106 denotes an external storage device which comprises a hard disk, floppy disk, CD-ROM, or the like, and stores, e.g., a moving image management database (to be described later). Reference numeral 108 denotes a network interface which allows communications with devices on a network. Reference numeral 109 denotes an interface; and 110, a peripheral device for inputting a moving image. Reference numeral 111 denotes a bus for connecting the aforementioned components.

[0030] Note that the external storage device 106 in the above arrangement may use the one connected on the network. Also, the peripheral device 110 for inputting a moving image indicates various devices for inputting a moving image such as a video deck, video player, television tuner, and the like in addition to a video camera. Furthermore, the control programs in the RAM 103 may be loaded from the external storage device 106, peripheral device 110, or network, and may be executed.

[0031] FIG. 2 is a block diagram showing the arrangement of a scene change detection function of the image processing apparatus of this embodiment.

[0032] Referring to FIG. 2, reference numeral 11 denotes a user interface unit which detects various operation inputs from the user using a display 107, and the keyboard 104 and mouse 105. Reference numeral 12 denotes a moving image input unit for capturing frames of a moving image via the peripheral device 110 for inputting a moving image. Reference numeral 13 denotes a frame image memory for storing frame image data captured by the moving image input unit 12 in a predetermined area of the RAM 103.

[0033] Reference numeral 14 denotes an image feature amount extraction unit for extracting feature amounts from images stored in the frame image memory 13 in the sequence to be described later. Reference numeral 15 denotes a sequential feature-label set generation unit for generating a sequential label set on the basis of feature amounts extracted by the feature amount extraction unit 14. Reference numeral 16 denotes a scene detection unit by means of pattern matching, which detects a scene change frame by computing similarities between the generated sequential label set and a group of sequential label sets of N neighboring or adjacent frame images stored in a predetermined area of the RAM 103, and performing a threshold value comparison process of the computed similarities. Then, the unit 16 discards a sequential label set of the oldest frame image stored in the RAM 103 and stores a sequential label set of the current frame image in the FIFO (First In, First Out) principle.

[0034] Reference numeral 17 denotes a scene change information accumulation unit which stores and accumulates information indicating a frame corresponding to a scene change point of moving image data obtained by the moving image input unit 12 and the like.

[0035] FIG. 3 is a view for explaining the storage state of scene change information in the scene change information accumulation unit 17.

[0036] Image frames in moving image data are assigned unit image frame IDs in that moving image, and the scene change information accumulation unit 17 holds scene change information 112 in the form of an image frame ID from which a new scene starts.

[0037] Reference numeral **18** denotes a moving image management database (to be referred to as a moving image management DB hereinafter), which manages moving image data **113** and the scene change information stored in the scene change information accumulation unit **17** in correspondence with each other in the data format shown in **FIG. 8**.

[0038] A scene change detection process will be described in detail below.

[0039] Frame images are extracted in turn from a moving image, each of these frame images is segmented into a plurality of blocks, and labels are assigned in accordance with feature amounts acquired in units of blocks. A sequential label set is generated by arranging the assigned labels on the basis of a predetermined block order, and generated sequential label sets for N previous frames are stored in the memory. At this time, the sequential label set of the current frame is compared with those of previous frames stored in the memory, and the presence/absence of a scene change is determined based on the comparison result.

Operation Example of Image Processing Apparatus of This Embodiment

[0040] An example of the operation of the image processing apparatus of this embodiment with the above arrangement will be described below. Note that the example to be described below adopts three colors, i.e., red (R), green (G), and blue (B) as image feature amounts that pay attention to colors, and will be explained using processes in a three-dimensional color space.

(Process for Obtaining Sequential Label Set from Frame)

[0041] A process for generating a sequential label set by extracting one frame image from a moving image, and segmenting the frame image into a plurality of blocks, assigning labels in accordance with feature amounts acquired in units of blocks, and arranging the assigned labels on the basis of a predetermined block order will be explained below.

[0042] **FIG. 4** is a flow chart showing the sequence of the process for obtaining a sequential label set from a frame according to this embodiment.

[0043] When a moving image file to be subjected to scene change detection is designated via the user interface unit **11**, processes in steps **S11** to **S18** are repeated until it is determined in step **S10** that the remaining frame images are present.

[0044] In step **S11**, one frame image is read out by seeking the moving image file, and is held in the frame image memory **13**. In step **S12**, the held image is segmented into a plurality of blocks. In this embodiment, the image is segmented into a plurality of vertical and horizontal blocks. **FIG. 5** shows an example of an image segmented into blocks according to this embodiment. As shown in **FIG. 5**, in this embodiment the image is segmented into a total of nine (3x3) blocks. In step **S13**, feature amounts of the segmented blocks are computed, and the obtained feature amounts are labeled in the following sequence.

[0045] **FIG. 6** is a view for explaining a multi-dimensional feature amount space according to this embodiment.

[0046] As shown in **FIG. 6**, the multi-dimensional feature amount space (RGB color space) is segmented into a plurality of blocks (color blocks), i.e., cells (color cells), and unique labels are assigned as serial numbers to the individual cells (color cells). The reason why the multi-dimensional feature amount space (RGB color space) is segmented into a plurality of blocks is to absorb delicate feature amount (color) differences.

[0047] In step **S13**, a predetermined image feature amount extraction computation process is done for each segmented block obtained in step **S12** to obtain a cell on the multi-dimensional feature amount space to which that block belongs, thus obtaining a corresponding label. This process is done for all the blocks. That is, in the image feature amount extraction computation process of this embodiment, computation process is done to determine which color cells all pixels in each segmented block belong to respectively, and the label of color cell with the highest frequency of occurrence is determined to be a parameter label (color label) of that segmented image block. This process is done for all the blocks.

[0048] After parameter labels are assigned to the individual blocks, the parameter labels assigned to the blocks are arranged in a predetermined block order to generate a parameter sequential label set (to be referred to as a sequential label set hereinafter) in step **S14**.

[0049] **FIGS. 7A** to **7D** are views for explaining examples of block orders used upon generating a sequential label set. The parameter labels are arranged in ascending order of numerals in boxes of the segmented image blocks shown in each of **FIGS. 7A** to **7D** to generate a sequential label set.

[0050] Note that scan methods that can be applied to this embodiment include, for example:

[0051] horizontal scans (e.g., scan methods for making a left-to-right scan from up to down: **FIG. 7A**, making a left-to-right scan from down to up: **FIG. 7C**, making a right-to-left scan from up to down: **FIG. 7B**, making a right-to-left scan from down to up: **FIG. 7D**, and so forth are available); and

[0052] vertical scans (e.g., scan methods for making an up-to-down scan from left to right, making an up-to-down scan from right to left, making a down-to-up scan from left to right, making a down-to-up scan from right to left, and so forth are available (none of these methods are shown)). However, the present invention is not limited to such specific methods.

[0053] This embodiment adopts a scan method which satisfies the following conditions.

[0054] (1) Since label matrices are time-serially compared, it is not preferable to reverse this order. Hence, all images must be scanned by a predetermined scan method to obtain label matrices.

[0055] (2) Nearby blocks are preferably located at near positions in a sequential label set.

[0056] (3) Matching can be made more easily as the labels of blocks that correspond to an object of interest appear as quickly as possible, and continuously appear for a long period of time.

[0057] (4) Even when an object has moved or camera angle has changed, an arrangement of labels is prevented from changing drastically.

[0058] This embodiment adopts a scan method for making a horizontal scan from left to right, up to down, as shown in FIG. 7A.

(Process for Detecting Scene Change)

[0059] Sequential label sets for N previous frames, which are obtained in the above sequence, are accumulated on the memory, and a scene change is detected in step S15 by comparing sequential label sets of N previous frames and a sequential label set of the current frame. Assume that the minimum value of N is 2.

[0060] An example for detecting a scene change from a sequential label set of this embodiment will be explained below using the flow chart in FIG. 9 that shows details of step S15, taking as an example a method for detecting scene changes from a moving image obtained by connecting frames including quite different scenes. Even the moving image obtained by connecting frames including quite different scenes includes errors such as omission of a frame upon editing, a sudden change in brightness in only one frame upon, e.g., emission of flash light of a camera, and the like, and it is important to prevent operation errors (excessive detection of scene changes) against such moving image.

[0061] In step S20, the similarity between a sequential label set obtained from the current frame image and that obtained from the immediately preceding frame image is computed by a method to be described later. In step S21, the similarity is compared with a threshold value. If the similarity is larger than the threshold value, status indicating the absence of status change is returned in step S25, and the flow returns to the main routine. To supplement, the flow then returns to FIG. 4 and advances from step S16 to step S18 to store the sequential label set of the current frame image in the RAM. After that the flow returns to step S10 to proceed with the process for capturing a new frame image in step S11 and the subsequent steps.

[0062] If it is determined in step S21 that the similarity is equal to or smaller than the threshold value, the sequential label set obtained from the current frame image is compared with that obtained from a frame image two frames before the current frame image, which was obtained and stored in the RAM previously, in step S22, and if it is determined in step S23 that the similarity between these two sequential label sets is equal to or smaller than the threshold value, status indicating the presence of scene change is returned. If it is determined in step S23 that the similarity is larger than the threshold value, it is determined that an edit error or a sudden change in brightness in only one frame upon, e.g., emission of flash light of a camera has occurred, and status indicating the absence of scene change is returned in step S25.

(Process for Computing Similarity)

[0063] A method of computing the similarity between frame images, i.e., comparing two sequential label sets to check if they are similar to each other (to compute their similarity) will be described in detail below. Note that a sequential label set acquired in step S14 will be referred to as a query label matrix of a query frame image hereinafter.

[0064] In order to give a small penalty (of distance) to neighboring cells and a large penalty to cells which are far from each other upon pattern matching between labels, a penalty matrix between labels shown in FIG. 10 is introduced. In step S20 or S22 in step S15, the label matrices are compared in consideration of this penalty matrix, and in this case, two-dimensional DP matching (to be referred to as 2D DP matching hereinafter) to be described below is used.

[0065] FIG. 11 is a view for explaining the similarity computation process according to this embodiment.

[0066] The query sequential label set acquired in step S14 can be arranged, as shown in a center of FIG. 11, in accordance with its scan method. Also, when one of label matrices of frame images for N previous frames, which are stored in the RAM is used as a test sequential label set of a test frame image, that sequential label set can be arranged, as shown in a left of FIG. 11.

[0067] The distances between a label sequence “abc” in the first line of the test sequential label set, and sequential label sets (“123”, “456”, “789”) in the first to third lines of the query sequential label set are computed by DP matching, and the line number of the label sequence that minimizes distance in the query sequential label set is stored at the corresponding position in a similar line matrix (a right of FIG. 11). When the obtained minimum distance is larger than a predetermined threshold value, it is determined that the label sequence of interest of the test sequential label set is similar to none of the lines, and “!” is stored at the corresponding position in the similar line matrix. Even when an image angle has horizontally changed slightly, a similar line can be detected by the aforementioned process owing to the nature of DP matching. By repeating the aforementioned process for all the lines (“def”, “ghi”) in the similarity test image, the similar line matrix in the column direction shown in a right of FIG. 11 can be obtained.

[0068] In a right of FIG. 11, no line similar to “abc” is present in the query sequential label set, and a line similar to “def” is found in the first line of the query sequential label set, and a line similar to “ghi” is found in the second line of the query sequential label set. The similarity between the similar line matrix obtained in this manner, and a standard line matrix (the arrangement of lines in the query frame image, and “123” in this example) is further computed using DP matching, and is output as the similarity between the query and test frame images.

[0069] It is well known that DP matching selects a route in which similarity distance is minimized under a constraint condition of a matching window, as an optimum solution. The constraint condition may be given by a width of a matching window.

[0070] FIG. 12 is a flow chart for explaining the sequence of similarity computation using 2D DP matching according to this embodiment. The process that has been explained with reference to FIG. 11 will be explained in more detail below with reference to the flow chart in FIG. 12. Note that the process shown in this flow chart is executed for different similarity test images in steps S20 and S22.

[0071] In step S101, variable i indicating the line number of the test frame image and variable j indicating the line number of the query frame image are initialized to 1 to both indicate the first line. In step S102, a label sequence of the

i-th line of the test frame image is acquired. For example, in case of **FIG. 11**, if $i=1$, “abc” is acquired. In step **S103**, a sequential label set of the j-th line of the query frame image is acquired. For example, in case of **FIGS. 11A to 11C**, if $j=1$, “123” is acquired.

[0072] In step **S104**, the distance between the two sequential label sets acquired in steps **S102** and **S103** is computed by DP matching using the penalty matrix of color cells described in **FIG. 10**. In step **S105**, if the distance obtained in step **S104** is a minimum value of those obtained so far in association with the i-th line, the line number (j) of interest is stored in a line matrix element $LINE[i]$.

[0073] The aforementioned processes in steps **S103** to **S105** are repeated for all lines of the similarity test image (steps **S106** and **S107**). In this manner, the number of the line with a minimum distance of those included in the query frame image to the sequential label set of the i-th line of the test frame image is stored in $LINE[i]$.

[0074] In step **S108**, $LINE[i]$ obtained by the above process is compared with a predetermined threshold value (Thresh). If $LINE[i]$ is equal to or larger than Thresh, the flow advances to step **S109**, and “!” indicating that the i-th line is similar to none of lines in the query image is stored in $LINE[i]$.

[0075] The aforementioned processes from step **S102** to step **S108** are executed for all the lines in the test frame image (steps **S110** and **S111**) to obtain $LINE[imax]$ of $LINE[i]$, which is output as a similar line matrix $LINE[i]$.

[0076] In step **S113**, DP matching between a standard line matrix $[1, 2, \dots, imax]$ and similar line matrix $LINE[1, 2, \dots, imax]$ is done to compute the distance therebetween. Note that the standard line matrix starts from 1, and increases in unitary increments in the column direction.

[0077] A penalty used in DP matching between the standard line matrix and similar line matrix will be explained below. The present invention proposes a dynamic penalty as penalty setups of DP matching between the similar line matrix and standard line matrix in the column direction. The dynamic penalty dynamically sets a penalty between the line numbers, and the penalty between the line numbers changes depending on images. In this embodiment, sequential label set distances in the horizontal (line) direction of the similarity query image itself are computed, and penalties between lines are obtained based on these distances.

[0078] **FIG. 13** is a flow chart showing the setup sequence of a dynamic penalty value according to this embodiment.

[0079] In step **S121**, variables i and j are respectively set at 1 and 2. A sequential label set of the i-th line of the query frame image is acquired in step **S122**, and a sequential label set of the j-th line of the query frame image is acquired in step **S123**. In step **S124**, DP matching between the sequential label sets of the i- and j-th lines of the query frame image is done using the color penalty matrix to obtain distance. In step **S125**, the DP matching distance obtained in step **S124** is stored in $LINE[i][j]$ as a penalty between the sequential label sets of the i- and j-th lines of the query frame image, and is also stored in $LINE[j][i]$ as a penalty between the sequential label sets of the j- and i-th lines of the query frame image.

[0080] The processes in steps **S123** to **S125** are repeated until the value of variable j reaches j_{max} in step **S126**. As a result, penalty values between the sequential label set of the i-th line, and sequential label sets of the (i+1)-th to (j_{max})-th lines are determined. Then, the processes in steps **S123** to **S126** are repeated until the value of variable i reaches ($i_{max}-1$) in steps **S128**, **S129**, and **S130**. As a result, penalty values determined by the above processes are stored in all $LINE[i][j]$ except for diagonal components of $i=j$.

[0081] In step **S131**, penalty values of the diagonal components of $LINE[i][j]$, which are not determined in the above processes, are determined. In this portion, since $i=j$, i.e., identical sequential label sets are compared, zero distance is obtained and, hence, zero penalty is stored. Also, a penalty for “!” is determined in step **S132**. That is, a penalty for “!” is set to have a value larger by the maximum one of all the penalty values of $LINE[i][j]$ to some extent. If this penalty value is set to be extremely large, the feature of ambiguous search may suffer.

[0082] DP matching in step **S113** is done using penalty among sequential label sets computed for the query frame images in this manner, thus obtaining the similarity between the query frame image and test frame image.

[0083] The aforementioned matching process also has the following feature. If the matrices shown in **FIGS. 11A and 11B** are very similar to each other, a similar line matrix “123” is obtained, and their distance is zero. On the other hand, if a similar line matrix is “!12” or “212”, the test frame image is likely to have deviated downward from the query frame image; if a similar line matrix is “23!” or “233”, the test frame image is likely to have deviated upward from the query frame image. On the other hand, if a similar line matrix is “!3!” or “!13”, the test frame image is likely to be reduced in scale with respect to the query frame image. Likewise, a test frame image obtained by enlarging the query frame image may be detected.

[0084] As described in step **S113** above, by DP matching between the similar line matrix and standard line matrix, vertical deviation can be effectively absorbed. For this reason, the difference between the query frame image and test frame image resulting from the aforementioned upward or downward deviation, enlargement, reduction, or the like can be effectively absorbed, and the similarity between the frame images of a moving image can be satisfactorily determined.

[0085] More specifically, 2 D DP matching of this embodiment allows ambiguity between the label sequences of the neighboring label matrices, and absorbs the influence of position deviations of an image. On the other hand, when the position of an object has changed due to, e.g., a difference in angle, and the position of the object extracted by blocks has changed, the tinctures of blocks may become slightly different, but such differences are absorbed by the aforementioned penalty matrix. In this manner, due to the synergism of 2 D DP matching that allows ambiguity and allowance of ambiguity of feature amounts by means of the penalty matrix according to this embodiment, matching that is less influenced by upper, lower, right, and left deviations, and those caused by enlargement/reduction can be achieved.

[0086] Other merits of the dynamic penalty will be discussed below. For example, when there is a query frame

image of stretched wheat fields, all lines may have similar sequential label sets. On the other hand, if there is also a test frame image of stretched wheat fields, a similar line matrix of this image may store the first line number "1" and may become "111". In such case, all lines of a similarity query image have similar images, and no hit occurs at shorter distances unless the penalty between line numbers is very small. However, when the dynamic penalty is used, the penalty between line numbers becomes small, and a result with high similarity can be obtained.

[0087] In the above embodiment, the similar line matrix is obtained using sequential label sets corresponding to the horizontal block arrangements. Alternatively, a similar line matrix can be obtained using label sequences corresponding to the vertical block arrangements by the same method as described above. Also, both the horizontal and vertical directions may be combined.

[0088] In the above embodiment, color information is selected as an image feature amount. However, the present invention is not limited to such specific image feature amount, and may be practiced by obtaining other image parameters in units of image segmented blocks.

[0089] The level of ambiguity upon comparing a query frame image and test frame image can be desirably set by changing the width of a so-called matching window in DP matching.

[0090] FIG. 14 is a view for explaining a matching window in DP matching. In FIG. 14, line A is given by $J=I+r$, and line B by $J=I-r$. The width of the matching window can be changed by changing the value r . Hence, when the value r is changed upon automatically or manually varying the ambiguity level, similarity computations can be made with a desired ambiguity level (width of the matching window), and such change is effective for scene change detection in a moving image including very quick motions, and that in a movie that considerably suffers camera shake. When the present apparatus is equipped in a movie, the value r is changed in accordance with a mount of shaking detected by a sensor. The user may change the sensitivity of scene change by manually change the value r at the keyboard 104, or the value r may be automatically increased when scene changes are detected too frequently or may be decreased when fewer scene changes are detected.

[0091] In 2 D DP matching in the above embodiment, the width of a matching window in horizontal DP matching and that of a matching window in vertical DP matching may be independently set. Or the two matching windows may be changed at different rates. In this manner, ambiguity levels can be set very flexibly upon similarity computations. For example, when the block order shown in a left of FIG. 7 is used, and the horizontal movement of an object of interest in a query image is to be allowed, the width of the matching window in horizontal DP matching can be increased to increase the ambiguity level in the horizontal direction.

[0092] Referring back to the flow chart in FIG. 4, it is checked in step S16 if a scene change is detected in step S15. If YES in step S16, scene change information is additionally stored in the scene change information accumulation unit by the process in step S17. Finally, sequential label set of N previous frame image is discarded, and the sequential label set of the current frame image is stored in the RAM in step

S18. The flow then returns to the process in step S10 to repeat the processes as long as frame images to be processed remain.

[0093] As described above, a feature amount group (a group of feature amounts obtained by segmenting a feature amount space) is expressed by a single symbol (i.e., labeled), and a distance based on the similarity between labels is given using the 2 D DP matching and the penalty matrix described above. For this reason, since the computation volume of the distance between two image blocks can be greatly reduced, and similar feature amounts can be expressed by identical labels, the similarity between two images can be satisfactorily computed.

[0094] Since (1) the concept of defining distance between labels using the penalty matrix, and (2) 2 D DP matching that can ambiguously move label positions to be compared, and can implement comparison between label matrices to minimize the total distance (maximize similarity) are used, an inter-frame pattern matcher which produces a clearly low inter-frame similarity output in response to appearance of a frame which has absolutely no continuity while absorbing some continuous changes in moving image (e.g., some color differences caused by a change in image angle, and a change in position or deformation of an object upon, e.g., panning of a camera, or a change in image sensing condition such as a light source or the like) in association with neighboring or adjacent image frames, can be implemented.

[0095] Note that the present invention may be applied to either a system constituted by a plurality of devices (e.g., a host computer, an interface device, a reader, a printer, and the like), or an apparatus consisting of a single equipment (e.g., a copying machine, a facsimile apparatus, or the like).

[0096] The objects of the present invention are also achieved by supplying a storage medium, which records a program code of a software program that can implement the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the program code stored in the storage medium by a computer (or a CPU or MPU) of the system or apparatus. In this case, the program code itself read out from the storage medium implements the functions of the above-mentioned embodiments, and the storage medium which stores the program code constitutes the present invention.

[0097] As the storage medium for supplying the program code, for example, a floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, CD-R, magnetic tape, non-volatile memory card, ROM, and the like may be used.

[0098] The functions of the above-mentioned embodiments may be implemented not only by executing the readout program code by the computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

[0099] Furthermore, the functions of the above-mentioned embodiments may be implemented by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit, which is inserted in or connected to the computer, after the program code read out from the storage medium is written in a memory of the extension board or unit.

[0100] When the present invention is applied to the storage medium, the storage medium stores a program including program codes corresponding to the aforementioned flow charts (shown in FIGS. 4, 9, 12, 13, and the like).

[0101] To recapitulate, according to the present invention, scene change detection can be implemented by an inter-frame pattern matcher which produces a clearly low inter-frame similarity output in response to appearance of a frame which has absolutely no continuity while absorbing some continuous changes in moving image (e.g., some color differences caused by a change in image angle, and a change in position or deformation of an object upon, e.g., panning of a camera, or a change in image sensing condition such as a light source or the like) in association with neighboring or adjacent image frames.

[0102] As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the claims.

1-57. (canceled)

58. An image processing apparatus comprising:

extracting means for extracting frame image data from moving image data;

feature amount determination means for determining a feature amount of the frame image data extracted by said extracting means;

feature amount storage means for storing the feature amount determined by said feature amount determination means;

comparison means for comparing the feature amount of the frame image data which is a scene change frame candidate with each of N feature amounts of N frames of image data before the candidate, where N is an integer greater than 1, which have been stored in said feature amount storage means;

scene change detection means for detecting a scene change frame in the moving image data based on a result of comparison by said comparison means; and

scene change storage means for storing information of the detected scene change frame in connection with the moving image data,

wherein said scene change detection means detects a scene change frame candidate as a scene change frame when the feature amount of the candidate is not similar to every N feature amounts of the N frames image data before the candidate.

59. An apparatus according to claim 58, wherein said feature amount determination means divides the frame image data into a plurality of blocks and determines a feature amount for each of the blocks.

60. An apparatus according to claim 59, wherein said comparison means compares between feature amounts using a penalty table.

61. An apparatus according to claim 58, wherein said comparison means compares the feature amount of the frame image data which is a scene change frame candidate with a feature amount of second frame image data, the second frame image data being before first frame image

data, when the feature amount of the candidate is not similar to a feature amount of the first frame image data before the candidate.

62. An apparatus according to claim 58, wherein the information of the detected scene change frame comprises a number of frames or an elapsed time from a top of the moving image data after which the scene change has been detected.

63. An apparatus according to claim 58, wherein said feature amount storage means stores at least N feature amounts.

64. An image processing method comprising the steps of:

extracting frame image data from moving image data;

determining a feature amount of the frame image data extracted in said extracting step;

storing the feature amount determined in said feature amount determination step;

comparing the feature amount of the frame image data which is a scene change frame candidate with each of N feature amounts of N frames of image data before the candidate, where N is an integer greater than 1, which have been stored in said feature amount storing step;

detecting a scene change frame in the moving image data based on a result of comparison in said comparing step; and

storing information of the detected scene change frame in connection with the moving image data,

wherein said scene change detecting step includes detecting a scene change frame candidate as a scene change frame when the feature amount of the candidate is not similar to every N feature amounts of the N frames image data before the candidate.

65. A method according to claim 64, wherein said feature amount determining step includes dividing the frame image data into a plurality of blocks and determining a feature amount for each of the blocks.

66. A method according to claim 65, wherein said comparing step includes comparing between feature amounts using a penalty table.

67. A method according to claim 64, wherein said comparing step includes comparing the feature amount of the frame image data which is a scene change frame candidate with a feature amount of second frame image data, the second frame image data being before first frame image data, when the feature amount of the candidate is not similar to a feature amount of the first frame image data before the candidate.

68. A method according to claim 64, wherein the information of the detected scene change frame comprises a number of frames or an elapsed time from a top of the moving image data after which the scene change has been detected.

69. A method according to claim 64, wherein said feature amount storing step includes storing at least N feature amounts.

70. A computer-readable storage medium, storing a program product to perform an image processing method comprising the steps of:

extracting frame image data from moving image data;
determining a feature amount of the frame image data extracted in said extracting step;
storing the feature amount determined in said feature amount determination step;
comparing the feature amount of the frame image data which is a scene change frame candidate with each of N feature amounts of N frames of image data before the candidate, where N is an integer greater than 1, which have been stored in said feature amount storing step;
detecting a scene change frame in the moving image data based on a result of comparison in said comparing step; and
storing information of the detected scene change frame in connection with the moving image data,
wherein said scene change detecting step includes detecting a scene change frame candidate as a scene change frame when the feature amount of the candidate is not similar to every N feature amounts of the N frames image data before the candidate.

71. A storage medium according to claim 70, wherein said feature amount determinating step includes dividing the

frame image data into a plurality of blocks and determining a feature amount for each of the blocks.

72. A storage medium according to claim 71, wherein said comparing step includes comparing between feature amounts using a penalty table.

73. A storage medium according to claim 70, wherein said comparing step includes comparing the feature amount of the frame image data which is a scene change frame candidate with a feature amount of second frame image data, the second frame image data being before first frame image data, when the feature amount of the candidate is not similar to a feature amount of the first frame image data before the candidate.

74. A storage medium according to claim 71, wherein the information of the detected scene change frame comprises a number of frames or an elapsed time from a top of the moving image data after which the scene change has been detected.

75. A storage medium according to claim 71, wherein said feature amount storing step includes storing at least N feature amounts.

* * * * *