




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B32B 3/02, 3/10, G11B 5/66, 5/70, D06N 7/04, B05D 5/12, C23C 14/00, 14/32, C25B 9/00, 11/00, 13/00	A1	(11) International Publication Number: WO 98/41393 (43) International Publication Date: 24 September 1998 (24.09.98)
(21) International Application Number: PCT/US98/05340 (22) International Filing Date: 18 March 1998 (18.03.98) (30) Priority Data: 60/041,067 18 March 1997 (18.03.97) US (71) Applicant (for all designated States except US): SEAGATE TECHNOLOGY, INC. [US/US]; Intellectual Property Building 14, 920 Disc Drive, Scotts Valley, CA 95066 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): KUO, David, S. [US/US]; 18923 Sydney Circle, Castro Valley, CA 94546 (US). MARCHON, Bruno [US/US]; 1810 Hamilton Avenue, Palo Alto, CA 94303 (US). YAO, Wei, H. [-/US]; 33909 Shylock Drive, Fremont, CA 94555 (US). (74) Agent: NIEBUHR, Frederick, W.; Larkin, Hoffman, Daly & Lindgren, Ltd., 7900 Xerxes Avenue South #1500, Bloomington, MN 55431 (US).		(81) Designated States: CN, DE, GB, JP, KR, SG, US. Published <i>With international search report.</i>
(54) Title: MAGNETIC MEDIA WITH RANDOMLY POSITIONED TEXTURING FEATURES		
(57) Abstract		
<p>A magnetic data storage medium includes a dedicated transducing head contact zone for engaging an air bearing slider, primarily when the disk is stationary. The contact zone is textured with an irregular sequence of spaced apart nodules forming a substantially circumferential, spiral path. The spiral path includes multiple turns that define a uniform radial pitch. The circumferential pitch is irregular, more preferably determined according to pseudo-random function in which the actual spacing intervals vary about a nominal interval, over a range comparable to, but generally less than, the interval. The pseudo-random array can be formed by a texturing process that includes directing a focused laser beam onto the contact zone. The disk is rotated to maintain a constant circumferential speed relative to the laser, and also is translated radially to provide the desired radial pitch. The laser is operated in a continuous wave mode, with an acousto-optic modulator between the laser and disk operated to provide a pseudo-random variance in time intervals between successive laser exposures.</p>		

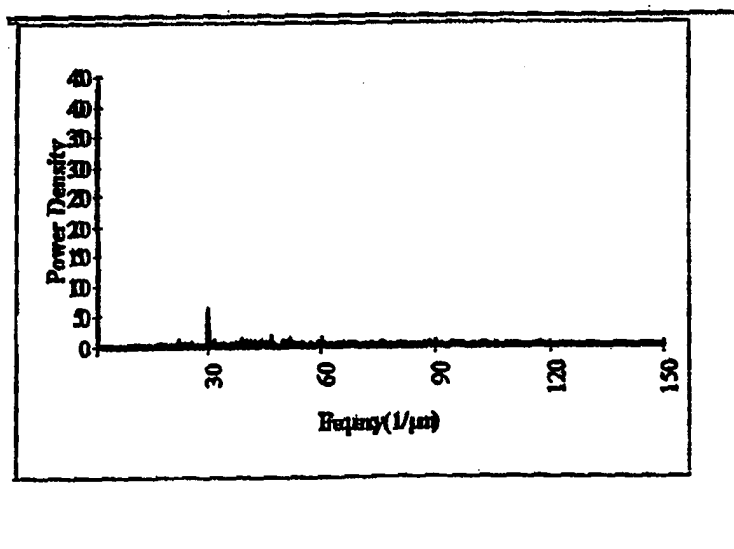

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

MAGNETIC MEDIA WITH RANDOMLY POSITIONED TEXTURING FEATURES

This application claims the benefit of Provisional Application Number 60/041,067 entitled "Pseudo-Random Laser Texture to Reduce Head-Disc Resonance during Take-off, Landing and/or Flying of the Head", filed March 18, 1997.

Background of the Invention

The present invention relates to texturing of magnetic data storage media, and more particularly to the texturing of dedicated transducing head contact zones of such media to minimize system resonance.

Laser texturing of magnetic disks, particularly over areas designed for contact with data transducing heads, is known to reduce friction and improve wear characteristics as compared to mechanically textured disks. Traditional laser texturing involves focusing a laser beam onto a disk substrate surface at multiple locations, forming at each location a depression surrounded by a raised rim as disclosed in U. S. Patent No. 5, 062,021 (Ranjan) and U. S. Patent No. 5,108,781 (Ranjan). An alternative, as disclosed in International Publications No. WO 97/07931 and No. WO 97/43079, is to use a laser beam to form domes or nodules, rather than rims. In some cases, each of the domes is surrounded by a raised rim. The features can have either circular or elliptical profiles.

Collectively, the texturing features form a texture pattern or distribution throughout the head contact zone. A particularly preferred pattern is a spiral, formed by rotating the disk at a controlled angular speed while moving a laser radially with respect to the disk. The laser is pulsed to form the individual texturing features. For example, the disk can be rotated to provide a circumferential speed of about one meter per second. Then, operating the laser at 50,000 pulses per second provides a 20 micron circumferential pitch, i.e. distance between adjacent texturing features. The radial speed of the laser controls the radial pitch or spacing between adjacent turns of the spiral, which also can be about 20 microns.

Although this approach has been highly successful in terms of reducing dynamic friction and improving the wear characteristics of dedicated transducing head contact zones, the regular, repeating pattern of the laser texture features produces strong input excitations based on the fundamental frequency of the circumferential pitch, including higher order harmonics. When the excitation frequencies coincide with natural frequencies of the slider or its gimbal

and support system, resonance occurs which results in a high amplitude acoustic energy signal, which can increase the difficulty of determining the glide avalanche breaking point (a disk/transducing head spacing value) and yield a false indication that the disk has failed a glide test.

In addition to their resonance effects, regularly spaced apart texturing features are thought to cause transducing head disturbances by intermittent contact of texturing-feature peaks with the data transducing head during disk accelerations and decelerations. Also, the texturing features contribute to turbulence in the air bearing that supports the transducing head slider during portions of accelerations and decelerations. At close non-contacting proximity of the head, pressure modulation of the air bearing can induce head resonance.

Several previously proposed media texturing alternatives address these difficulties to a degree. For example, the aforementioned International Publication Number WO 97/43079 includes the observation that mechanically textured disks, as compared to laser textured disks, produce less acoustic energy during head take-off and landing. A noise-reducing texturing alternative is discussed therein; namely, rows of rims connected to one another at their ends, as shown in Figure 15 of the publication. In U. S. Patent Application Serial No. _____ entitled "Low Resonance Texturing of Magnetic Media", filed March 13, 1998, resonance-reducing texturing is disclosed in the form of elongate circumferential ridges, most notably a continuous ridge in the shape of a spiral throughout the transducing head contact region. Although both of these alternatives afford considerable reduction in noise during head take-off and landing, there remains a need for noise-reducing texturing arrangements with substantial spacing between adjacent texturing features. These arrangements frequently are preferred to due to lower manufacturing costs and better potential for producing a uniform roughness throughout the head contact zone.

Therefore, it is an object of the present invention to provide an array of texturing features adapted to impart a desired surface roughness to the dedicated transducing head contact zone of a magnetic recording medium while minimizing undesirable resonant frequency effects.

Another object is to provide a magnetic data storage medium in which a head contact zone has a topography comprised of multiple texturing features in a pseudo-random array with irregular spacing intervals between adjacent texturing features, at least in a selected direction along the storage medium.

A further object is to provide a process for laser texturing a data storage medium by subjecting the storage medium to intermittent exposures according to a pseudo-random sequence of timing intervals between successive exposures, to cause an irregular spacing between adjacent texturizing features.

Yet another object is to provide magnetic data storage media that exhibit the highly favorable dynamic friction and wear characteristics of laser textured media, and further exhibit low resonance interactions with transducing heads and their support structure during head take-offs and landings.

Summary of the Invention

To achieve these and other objects, there is provided a magnetic data storage medium. The medium includes a substrate body formed of a non-magnetizable material and a magnetizable film disposed over the substrate body. The recording medium has a substantially planar surface including a contact region adapted for a surface engagement with a magnetic data transducing head during accelerations and decelerations of the recording medium in a predetermined direction with respect to the transducing head. Multiple texturing features are formed in the contact region. The features protrude outwardly from a nominal surface plane of the substantially planar surface, and cooperate to define a surface roughness of the contact region. The texturing features are spaced apart from one another and arranged to define an irregular spacing between adjacent texturing features in the predetermined direction.

Preferably the texturing features are arranged to preserve a desired density (or permitted range of densities) as well as to provide irregular spacing. To this end, texturing features can be formed in a sequence in which actual intervals between adjacent features vary about a nominal spacing, and further vary about a range (maximum spacing less the minimum spacing) less than the nominal spacing. The nominal spacing can be selected with the desired feature

density in mind. In the most preferred arrangement, spacing intervals occur randomly throughout the permitted range.

Typically the recording medium is a magnetic disk, with an annular contact region. Then, the predetermined direction is circumferential with respect to the disk, and the irregular interval is the circumferential pitch. A pseudo-random texture pattern throughout a head contact region can be formed as a single, spiral sequence of texturing features. The spiral provides essentially circumferential turns, with a selected, preferably constant radial pitch between adjacent turns.

The texturing features preferably are substantially uniform in their degree of extension away from the nominal plane, usually considered in terms of height above a horizontal nominal plane. This imparts a desired uniformity to the surface roughness throughout the contact region. The texturing features, when formed as laser nodules or bumps, are rounded and substantially free of sharp edges, and have heights in the range of about 5-30 nm.

Further in accordance with the invention, there is provided a process for surface texturing a magnetic data storage medium, including:

- a. directing a coherent energy beam toward a magnetic storage medium; and
- b. causing the coherent energy beam to impinge upon a selected surface of the storage medium at a plurality of different locations thereon, altering the topography of the selected surface at each location by forming a texturing feature, while selecting the locations to provide an irregular spacing between adjacent texturing features in at least one predetermined direction along the selected surface.

When the data storage medium is a magnetic disk, texturing involves disk rotation to provide a circumferential velocity, in concert with controlling the rate or frequency of laser exposures. One suitable approach involves rotating the disk to maintain a constant circumferential speed, while varying the timing of laser energy exposure episodes, either by controlling the laser itself or an optical component intermediate to the laser and the disk.

In one preferred texturing arrangement, a laser operated in the CW (continuous wave) mode provides a beam directed through an acousto-optic modulator, controlled by a pseudo-

random pulse generator. The result is a pseudo-random sequence of texturing features that corresponds to the pseudo-random timing of the laser exposures. While other alternatives are conceivable, e.g., randomly varied disk rotation, considerably more precision is possible by varying the laser exposure timing rather than disk movement.

A pulse laser, randomly triggered, can be used in lieu of the CW laser and acousto-optic modulator combination, although it is felt to afford less precision by comparison to the preferred combination.

Thus in accordance with the present invention, the transducing head contact zones of magnetic data storage media can be laser textured to form multiple spaced apart bumps or nodules that provide superior wear and friction characteristics, yet do not produce undesirable resonance effects during the take-offs and landings of transducing heads. A pseudo-random variance in spacing between adjacent texturing features, taken in the direction of medium/head relative movement, is particularly effective in reducing input excitations based on fundamental frequencies and their harmonics resulting in improved media performance.

In the Drawings

For a further appreciation of the above and other features and advantages, reference is made to the following detailed description and to the drawings, in which:

Figure 1 is a plan view of a magnetic data storage disk having a pseudo-random texture array in accordance with the present invention, and a data transducing head supported for generally radial movement relative to the disk;

Figure 2 is an enlarged partial sectional view of the magnetic disk in Figure 1;

Figure 3 is a partial top plan view of a magnetic data storage disk with a texture pattern of discrete nodules according to the traditional laser texturing approach;

Figure 4 is a schematic representation of a surface profile of the contact zone in Figure 3, taken in a circumferential direction;

Figure 5 is a graph showing excitation amplitude as a function of frequency, with respect to the disk of Figure 3;

Figure 6 is an enlarged partial top plan view of the data storage disk shown in Figures 1 and 2, showing the textured head contact zone;

Figure 7 is a schematic representation of a surface profile of the head contact zone in Figure 6, taken in a circumferential direction;

Figure 8 is a chart showing excitation amplitude as a function of frequency, with respect to the head contact zone in Figure 6;

Figure 9 is a diagrammatic view of a texturing system for forming the pseudo-random texture shown in Figure 6;

Figure 10 is a partial top plan view of an alternative data storage disk textured according to the present invention;

Figure 11 is a sectional view of the disk in Figure 10; and

Figure 12 is a diagrammatic view of an alternative embodiment texturing device.

Detailed Description of the Preferred Embodiments

Turning now to the drawings, there is shown in Figures 1 and 2 a medium for reading and recording magnetic data, in particular a magnetic disk 16 rotatable about a vertical axis and having a substantially planar horizontal upper surface 18. A rotary actuator (not shown) carries a transducing head support arm 20 in cantilevered fashion. A magnetic data transducing head 22 (including magnetic transducer and air bearing slider) is mounted to the free end of the support arm, through a suspension 24 which allows gimballing action of the head, i.e., limited vertical travel and rotation about pitch and roll axes. The rotary actuator and the support arm pivot to move head 22 in an arcuate path, generally radially with respect to the disk.

At the center of disk 22 is an opening to accommodate a disk drive spindle 26 used to rotate the disk. Between the opening and an outer circumferential edge 28 of the disk, upper surface 18 is divided into three annular regions or zones: a radially inward zone 30 used for clamping the disk to the spindle; a dedicated transducing head contact zone 32; and a data storage zone 34 that serves as the area for recording and reading the magnetic data.

When the disk is at rest, or rotating at a speed substantially below its normal operating range, head 22 contacts upper surface 18. When the disk rotates at higher speeds, including normal operating range, an air bearing or cushion is formed by air flowing between the head and upper surface 18 in the direction of disk rotation. The air bearing supports the head above the upper surface. Typically the distance between a planar bottom surface 36 of head 22 and upper surface 18, known as the head "flying height," is about 10 microinches (254 nm) or less. Lower flying heights permit a higher density storage of data.

For data recording and reading operations, rotation of the disk and pivoting of the support arm are controlled in concert to selectively position transducing head 22 near desired locations within data zone 34. Following a data operation, the disk is decelerated and support arm 20 is moved radially inward toward contact zone 32. By the time the disk decelerates sufficiently to allow head/disk contact, the head is positioned over the contact zone. Thus, head contact with other regions of the disk surface is avoided. Before the next data operation, the disk is accelerated, initially with head 22 engaged with disk 16 within the contact zone. Support arm 20 is not pivoted until the head is supported by an air bearing, above the contact zone.

Magnetic disk 16 is formed by mechanically finishing an aluminum substrate disk 38 to provide a substantially flat upper surface. Typically a nickel-phosphorous alloy has been plated onto the upper surface of the substrate disk, to provide a non-magnetizable layer 40 with a uniform thickness in the range of about 2-12 microns. Following plating, the exposed upper surface 42 of the Ni-P alloy layer is polished to a roughness of about 0.1 micro inch (2.54 nm) or less.

After mechanical finishing, substrate surface 42, at least along contact zone 32, is laser textured to provide a desired surface roughness. Laser texturing involves melting the substrate disk at and near surface 42, forming texturing features as will be described in greater detail below.

Fabrication of disk 16 involves the application of several layers after texturing. The first of these is a chrome underlayer 44 with a typical thickness of about 10-100 nm. Next is a magnetic thin film recording layer 46, where the data are stored, typically at a thickness of

about 10-50 nm. The final layer is a protective carbon layer 48, in the range of 5-30 nm in thickness. Layers 44, 46 and 48 are substantially uniform in thickness, and thus replicate the texture of substrate surface 42.

Laser texturing involves forming discrete nodules (also called bumps or domes) in the substrate disk at surface 42. The size and shape of the nodules depends on the level of laser beam energy impinging upon surface 42. Typically the nodules are formed in a spiral path, having a circumferential pitch governed by the disk rotational speed and laser pulsing interval during texturing. A radial pitch, i.e., the radial distance between consecutive turns of the spiral path, is determined by disk rotation and the rate of radial shifting of the laser relative to the disk. The result of the traditional laser texturing, as seen in Figure 3, is a disk 47 having a textured head contact zone with a uniform circumferential pitch, i.e., a uniform spacing or distance interval between consecutive nodules 49. The nodules can be formed with a high degree of uniformity in height (distance between the nodule peaks and a nominal surface plane of the disk), typically in the range of about 5-30 nm. This provides a uniform surface roughness, substantially throughout the contact zone. The surface profile view in Figure 4 illustrates circumferential pitch.

This uniformity, however, when coupled with the uniform circumferential pitch, leads to input excitation frequencies that vary linearly with the circumferential speed of the disk relative to the transducing head. During transducing head takeoffs and landings, these input excitation frequencies or their harmonics can coincide with natural resonant frequencies of the transducing head or the head support structure, including the gimbal arrangement that allows adjustments in head orientation about mutually perpendicular pitch and roll axes. The resonance effects are present during glide avalanche measurements, and can provide an erroneous indication that a disk has failed a glide test, and make it difficult to determine the glide avalanche breaking point. The chart in Figure 5, a plot of amplitudes (dB) with respect to frequencies, illustrate high excitation amplitudes at the fundamental frequency and harmonics, with the magnitude of the spikes decreasing at the higher frequencies.

Figure 6 shows an enlarged part of contact zone 32 of disk 16. Nodules 48, actually formed as part of a continuous spiral, appear as a series of horizontal rows that correspond to

the circumferential direction. Accordingly, circumferential pitch is represented by the horizontal distances between adjacent nodules 48. The wide variety and random nature of the spacing intervals is readily apparent. In the example illustrated, a pseudo-random texture has a nominal circumferential pitch of 45 microns, and the radial pitch is 25 microns.

In Figure 7, a surface profile, taken in the circumferential direction along a sequence of nodules, is placed adjacent a scale in microns, to illustrate the irregular nature of between-nodule spacing intervals.

Although the spacing between adjacent nodules is large in comparison to the nodule size (5 micron nodular diameters, for example), the inter-nodule spacing, both circumferentially and radially, is minute in comparison to the dimensions of transducing heads, which are typically expressed in millimeters. Nonetheless, to maintain consistent performance in terms of stiction and dynamic friction, it is desirable to maintain a density of nodules 48 at least similar to the density of nodules 49 in the uniform pitch arrangement shown in Figure 3.

To this end, spacing intervals are varied randomly about a nominal value. According to one example, the nominal circumferential pitch is 50 microns, with spacings varied randomly throughout a range extending from 30 microns to 70 microns, i.e., a 40-micron range. This range, while substantial in comparison to the nominal spacing, is less than the nominal spacing.

The random or otherwise irregular spacing between consecutive nodules substantially reduces the amplitudes of input excitations. As seen from the chart in Figure 8, which can be compared directly to the chart in Figure 5 concerning uniform nodule spacing, random spacing yields a low-amplitude spike at 30 kHz. Otherwise, the frequencies are spread out or smeared, i.e., substantially evenly distributed along a range of frequencies. Thus, randomizing the circumferential spacing effectively minimizes the input excitation.

Figure 9 shows a laser texturing device 50 for forming pseudo-random arrays of texturing features in accordance with the present invention. Device 50 includes an Nd:YVO₄ diode laser 52, operated in the CW (continuous wave) mode. A beam 54 generated by laser 52 is provided to an acousto-optic modulator 56, which is controlled by a random pulse generator 58. The pulse generator consists of an arbitrary wave form generator (Tektronic/Sony AWG 2040) and a pulse generator (HP8116A). Beyond modulator 56,

beam 54 proceeds through beam columnating and focusing optics, represented by lenses 60, 62 and 64. The beam, emerging from lens 64, is focused on surface 42 of disk 16, at a beam impingement area that typically is circular, but alternatively can have an elliptical or otherwise selectively shaped profile. The diameter of the impingement area can vary with the application and optical components involved.

Focusing the laser energy onto the metallic surface of the substrate disk causes highly localized melting at the surface. Although the material resolidifies rapidly, there is sufficient material flow to form a nodule which projects outwardly, or to the left as viewed in Figure 9, from the nominal surface plane.

The desired texture pattern or array is formed by rotating disk 16 using a spindle 66, and radially translating the disk relative to the laser beam, e.g., by a motor 68 operating on a shaft 70 to move a non-rotating portion of spindle 66 upwardly and downwardly as viewed in the figure. To trace the preferred spiral path, disk rotation and radial translation occur simultaneously. The degree of radial translation, with respect to disk rotation, determines the radial pitch or distance between adjacent turns of the spiral path.

A substantial departure from previous systems resides in the manner in which successive exposures of the disk to laser energy, i.e., successive nodule formation episodes, are timed.

Conventional laser texturing involves pulsing the laser at a uniform rate or frequency, e.g., 50,000 pulses per second, while maintaining a constant circumferential disk speed, resulting in a uniform circumferential pitch.

In contrast, modulator 56 is controlled to provide a pseudo-random frequency of nodule forming episodes, in which the actual intervals between successive episodes varies about a nominal interval. For example, the interval between episodes (laser exposures) can vary over a range from 15 micro-seconds to 25 micro-seconds, about a nominal interval of 20 micro-seconds.

The intervals between exposures are controlled by modulator 56. More particularly, as controlled by pulse generator 58, modulator 56 either directs beam 54 through the columnating

and focusing optics, or diverts the beam as indicated at 54(a). Thus, the modulator acts as a shutter, alternatively allowing and preventing laser exposure. This arrangement affords precise control over the timing intervals, and thus enhances the random nature of the variance in time intervals over the permitted range. As mentioned above, a pseudo-random variance in exposures is preferred. This is accomplished by use of a personal computer to program pulse generator 58 for pseudo-random timing.

Figures 10 and 11 illustrate an alternative embodiment data storage medium 72, in particular a glass ceramic substrate 74 provided with a metallic layer 76, e.g., chromium, sputtered or otherwise deposited onto the glass substrate. The metallic layer is exposed to a CW laser beam pulsed by a modulator while the substrate and metallic layer are rotated and translated radially, to form a texture array along a spiral path as previously described. To ensure that the topography is determined by nodule formation rather than by localized microfracturing, metallic layer 76 should have a thickness of at least about 100 nm.

Figure 12 illustrates an alternative embodiment 78 for forming pseudo-random texture patterns. System 78 includes a pulsed diode laser controlled by a trigger signal 82 from a pseudo-random pulse generator (not shown). In response to each trigger, laser 80 generates a beam 84 which proceeds through columnating and focusing optics 86 to a disk 88, which is rotated and radially translated as previously described. This system, although it does not require an acousto-optic modulator, cannot be controlled with the same precision as the system shown in Figure 9.

Regardless of whether the system in Figure 9 or the system in Figure 12 is employed, the preferred approach is to form the sequence of nodules in a spiral path, since the texturing of the entire head contact zone can be completed in one, continuous operation. However, either system can be used to form other pseudo-random arrangements of the texturing features, e.g., a series of concentric rings with a uniform radial pitch and a randomly varied circumferential pitch within the rings.

Thus, in accordance with the present invention, the transducing head contact zones of data storage disks are textured to provide an enhanced surface roughness that improves dynamic friction and wear, yet also virtually eliminates the problem of input excitation

frequencies that yield unduly high acoustic energy signals during the take-off and landing of the head slider. This result is achieved by providing a pseudo-random or otherwise irregular arrays of nodules or other texturizing features, in particular, sequences in which the spacing between adjacent nodules varies in the circumferential direction. The nodules can be arranged in highly random arrays, yet nonetheless preserve the desired densities for favorable stiction and friction characteristics, for considerably enhanced media performance.

What is claimed is:

1. A magnetic data storage medium including:
a substrate body formed of a non-magnetizable material and a magnetizable film deposited over the substrate body, said recording medium having a substantially planar surface including a contact region adapted for surface engagement with a magnetic data transducing head during accelerations and decelerations of the recording medium in a predetermined direction with respect to the transducing head; and
multiple texturing features in the contact region, protruding outwardly from a nominal surface plane of the surface and cooperating, to define a surface roughness of the contact region, wherein the texturing features are spaced apart from one another and arranged to define an irregular spacing between adjacent texturing features in said predetermined direction.
2. The device of storage medium, 1 wherein:
the magnetic recording medium is disk shaped, the contact region is annular, and the predetermined direction is circumferential with respect to the recording medium.
3. The storage medium of claim 1 wherein:
the texturing features are substantially uniform in their height above the nominal plane.
4. The storage medium of claim 1 wherein:
the texturing features have heights above the nominal plane in the range of about 5-30 nm.
5. The storage medium of claim 1 wherein:
the texturing features are rounded and substantially free of sharp edges.
6. The storage medium of claim 2 wherein:
the texture pattern consists essentially of the texturing features formed in a single spiral path, with the spacing between adjacent features along the spiral path randomly varying.



7. The storage medium of claim 2 wherein:
the texture pattern is formed of multiple circumferential rings of the texturing features radially spaced apart from one another, wherein a circumferential spacing between adjacent features in each of the rings is randomly varied.
8. The storage medium of claim 1 wherein:
the texture pattern is comprised of side by side rows of the texturing features, each row extending in the predetermined direction, and wherein the spacing between adjacent texturing features in the predetermined direction is varied about a nominal spacing.
9. The storage medium of claim 1 wherein:
the multiple texturing features are spaced apart from one another according to a pseudo-random variance of said spacing, about a nominal spacing and over a range of spacings, wherein the magnitude of the range is less than a magnitude of the nominal spacing.
10. The storage medium of claim 9 wherein:
said nominal spacing is greater than a nominal size of the texturing features by approximately a factor of ten.
11. A process for surface texturing a magnetic data storage medium, including:
directing a coherent energy beam toward a magnetic data storage medium; and
causing the coherent energy beam to impinge upon a selected surface of the data storage medium at a plurality of locations thereon, altering the topography of the selected surface at each of said locations by forming a texturing feature, selecting said locations to provide an irregular spacing between adjacent texturing features in at least one predetermined direction along the selected surface.
12. The process of claim 11 wherein:
the magnetic data storage medium is disk shaped, the selected surface is annular, and
the predetermined direction is substantially circumferential.




13. A process of claim 11 wherein:
the step of causing the coherent energy beam to impinge upon the selected surface
comprises translating the data storage medium relative to the coherent energy
beam in the predetermined direction.
14. The process of claim 13 wherein:
said translating comprises moving the storage medium at a constant speed, and the
directing of the coherent energy beam comprises selectively diverting the beam
at a randomly varied rate.
15. The process of claim 11 further including:
generating the coherent energy beam in a CW (continuous wave) mode, wherein the
selective diverting of the coherent energy beam comprises directing the beam
through an acousto-optic modulator, and governing the modulator with a
pseudo-random pulse generator.
16. A system for performing surface textures on magnetic data storage media,
including:
means for generating a coherent energy beam;
means for causing the coherent energy beam to impinge upon a selected surface of a
data storage medium at a plurality of locations thereon, to alter the topography
of the selected surface at each of said locations by forming a texturing feature;
and
means for selecting said locations to provide an irregular spacing between adjacent
texturing features in at least one predetermined direction along the selected
surface.
17. The system of claim 16 wherein:
said means for causing the coherent energy beam to impinge upon the selected surface,
comprise a means for translating the data storage medium in the predetermined
direction respective to the coherent energy beam, and means for intermittently
preventing the coherent energy beam from impinging upon the selected surface

during selected times, thereby randomly varying intervals between successive episodes during which the selected surface is exposed to the coherent energy.

18. The system of claim 17 wherein:

the means for intermittently preventing the beam from impinging upon the selected surface comprise an acousto-optic modulator in the path of the beam, and a random signal generator operably coupled to the acousto-optic modulator.

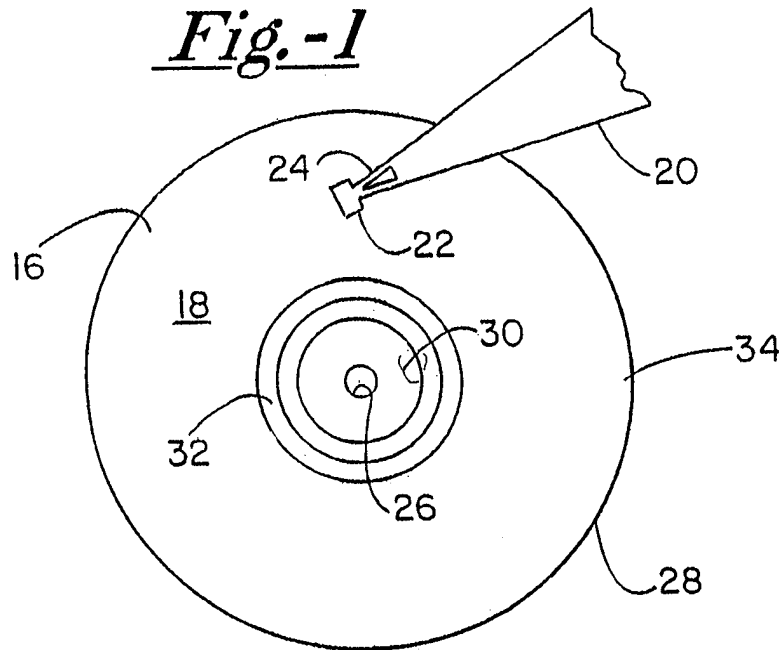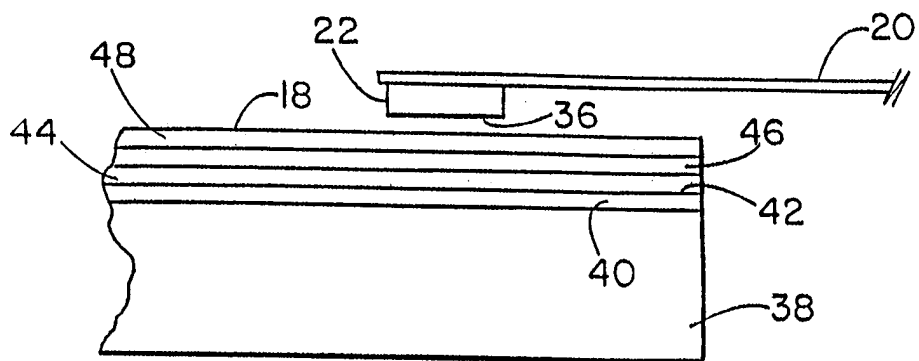Fig.-1*Fig.-2*

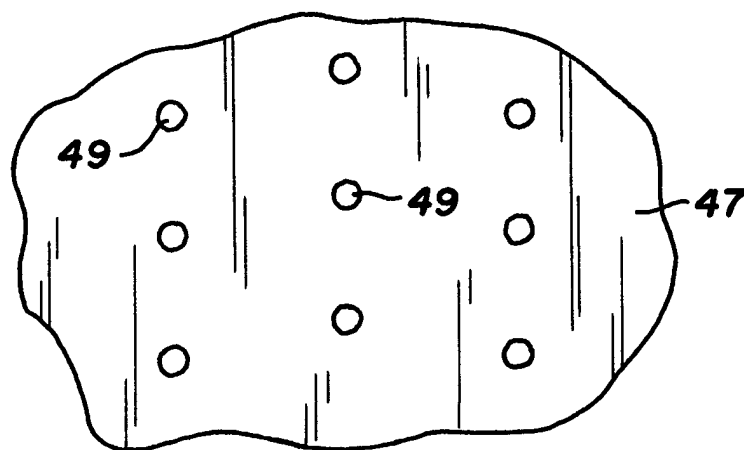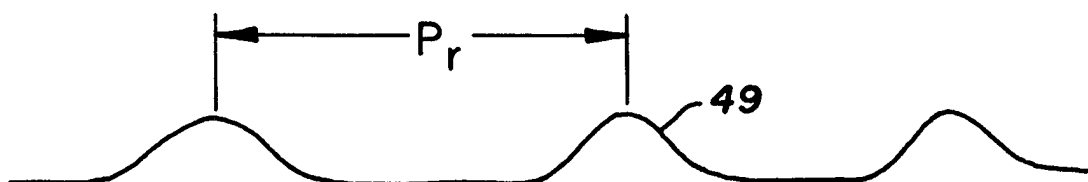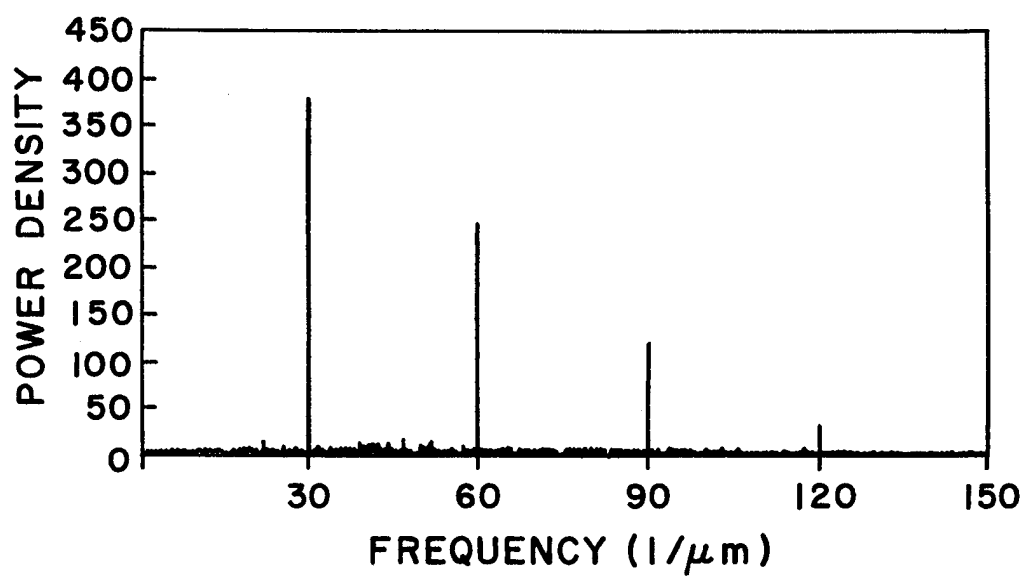**FIG. 3****FIG. 4****FIG. 5**

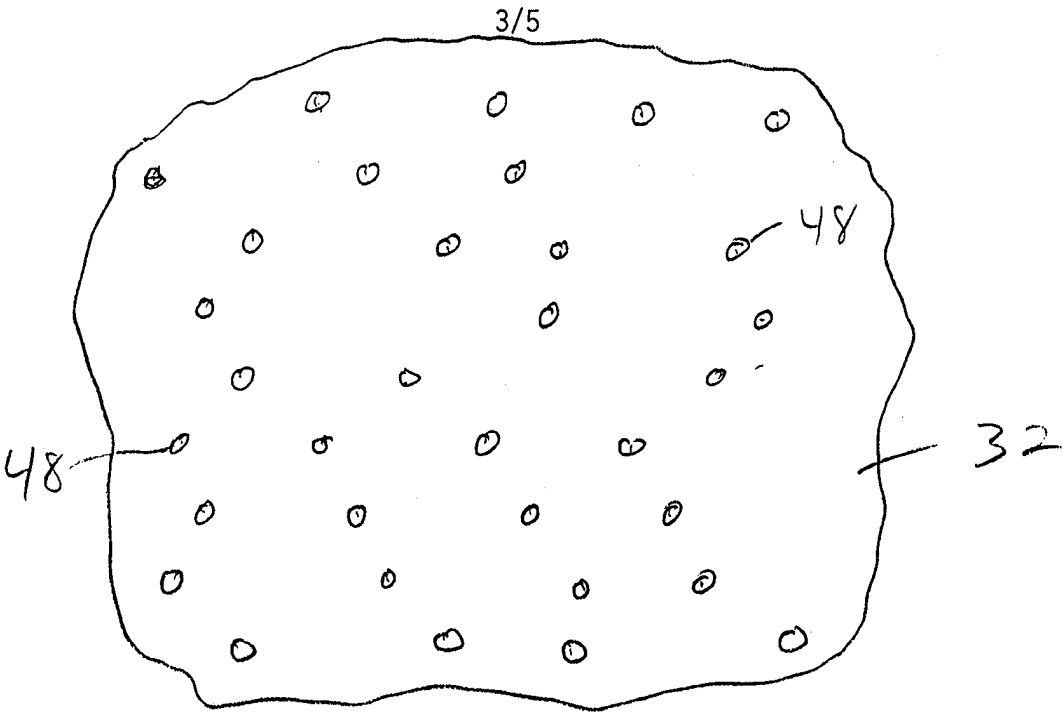


FIG. 6

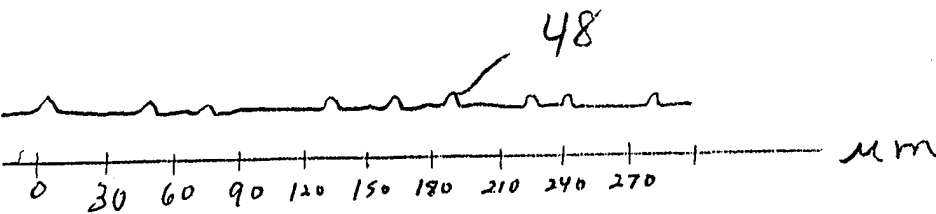


FIG. 7

FIG. 8

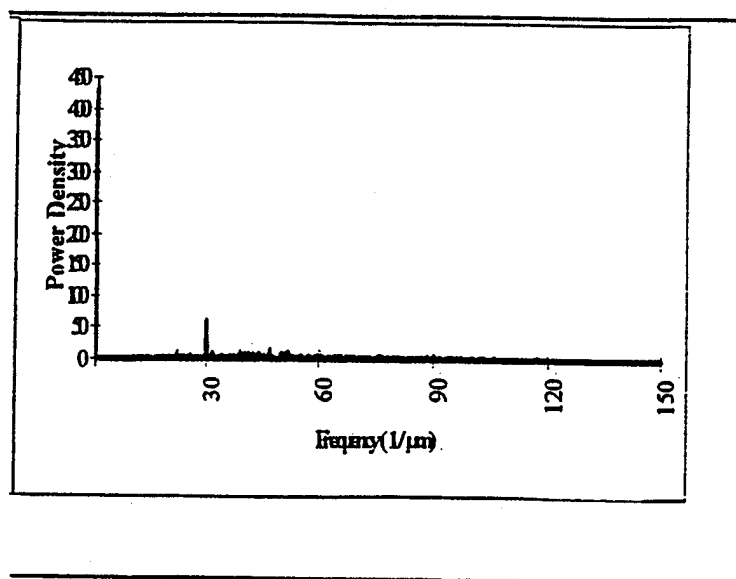


FIG. 9

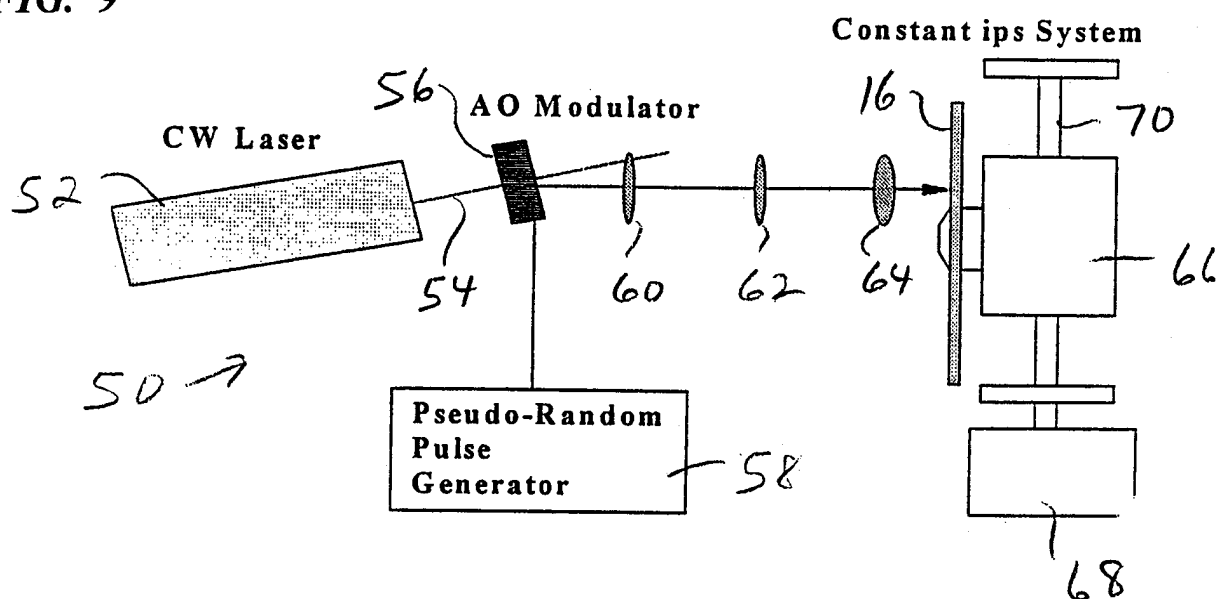
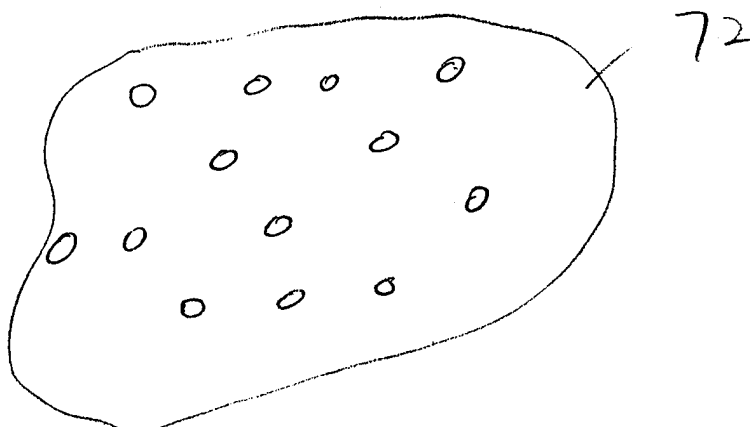


FIG. 10



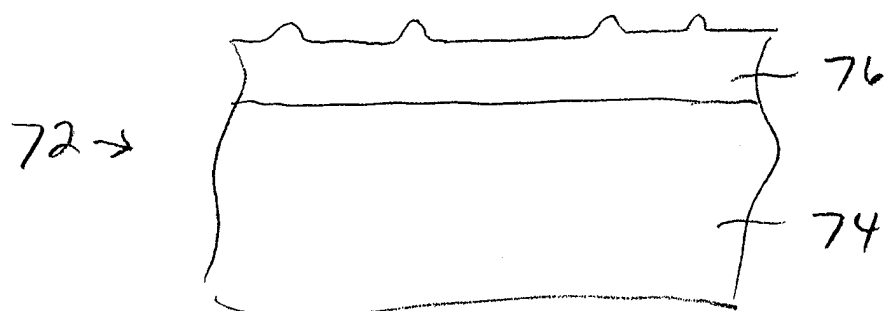


FIG. 11

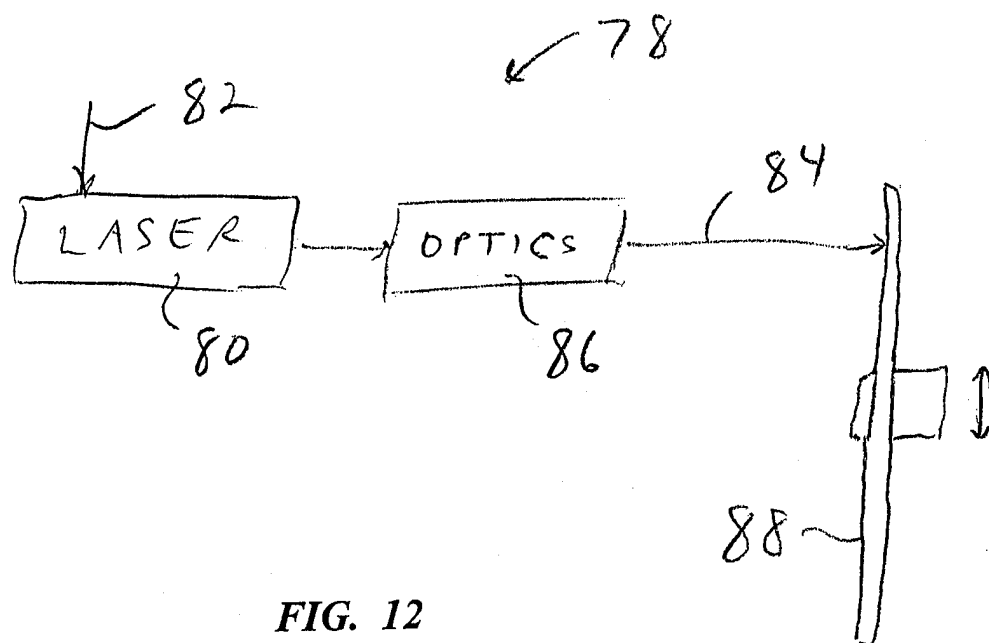


FIG. 12

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/05340

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : Please See Extra Sheet.

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 428/694TR, 694SG, 694BR, 65.3, 141; 427/128, 130; 204/192.34, 192.35, 298.31, 298.36

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X,P	US 5,635,269 A (WEIR et al) 03 June 1997 (03-06-97), column 3, lines 1-67; column 4, lines 1-67; column 5, lines 20-67; column 6, lines 20-67.	1-18
X	US 5,586,040 A (BAUMGART et al) 17 December 1996 (17-12-96), column 2, lines 46-67; column 3, lines 1-34; column 5, lines 30-67; column 6, lines 1-67; column 7, lines 1-54.	1-18
X	US 5,550,696 A (NGUYEN) 27 August 1996 (27-08-96), column 2, lines 46-67; column 3, lines 1-7; column 5, lines 1-67; column 6, lines 1-67; column 7, lines 1-25.	1-18



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & * document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

02 JUNE 1998

Date of mailing of the international search report

23 JUN 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

LESZEK KILIMAN

Telephone No. (703) 308-0651

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/05340

A. CLASSIFICATION OF SUBJECT MATTER:

IPC (6):

B32B 3/02, 3/10; G11B 5/66, 5/70; D06N 7/04; B05D 5/12; C23C 14/00, 14/32; C25B 9/00, 11/00, 13/00

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

428/694TR, 694SG, 694BR, 65.3, 141; 427/128, 130; 204/192.34, 192.35, 298.31, 298.36