



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶ :

B65H 75/14, 54/553

A1

(11) International Publication Number:

WO 96/41762

(43) International Publication Date: 27 December 1996 (27.12.96)

(21) International Application Number: PCT/SE96/00696

(22) International Filing Date: 30 May 1996 (30.05.96)

(30) Priority Data:

9502119-2

12 June 1995 (12.06.95)

SE

(71) Applicant (for all designated States except US): ULVATOR AB [SE/SE]; Norra Stationsgatan 56, 1tr., S-113 33 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): FORSNER, Bo [SE/SE]; Källvägen 1, S-184 51 Österskär (SE).

(74) Agent: LUNDQUIST, Lars-Olof; L-O Lundquist Patentbyrå AB, P.O. Box 80, S-651 03 Karlstad (SE).


(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

With international search report.

In English translation (filed in Swedish).

(54) Title: TOOL FOR A DISPOSABLE DRUM

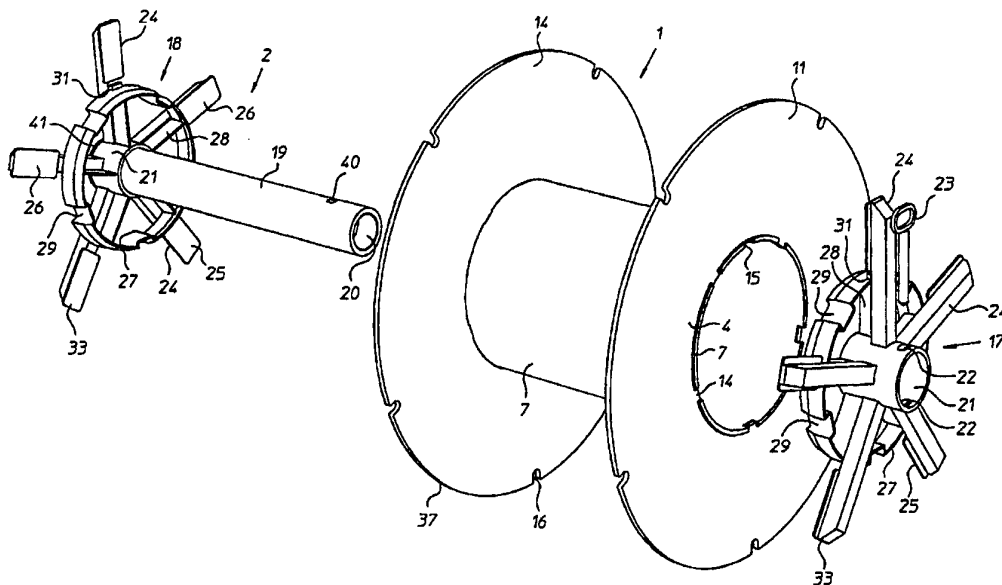

(57) Abstract

A tool for assembly on a drum (1) to form a rotatable unit to be placed in journalling equipment for rotation of the unit, said drum (1) comprising a cylindrical sleeve (7) and two end pieces (11, 12) and designed to carry a coil (5) of a flexible object (6), such as cable, said tool comprising two support and bearing elements (17, 18), each with a hub (21), a plurality of support arms (24) and a concentric support member (27) for centering the drum; and also a connecting member having a shaft (19) extending through the sleeve and said hubs (21), and anchoring means for anchoring the support and bearing elements to the shaft (19) while at the same time securing the sleeve (7) against axial displacement in relation to the shaft. According to the invention, the support arms (24) are arranged to abut the end pieces and have free ends (33) located radially inside the outer circular edge (37) of the end pieces so that the support arms (24) are not in contact with the ground when said unit is resting on the ground by means of the end pieces of the drum.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Tool for a disposable drum

The present invention relates to a tool for detachable assembly on a drum of disposable type to form a rotatable unit to be placed in journalling equipment for rotation of the unit, said drum comprising a cylindrical sleeve and two end pieces which are secured to the sleeve to prevent them from slipping axially towards each other, the drum being designed to carry a coil of a continuous flexible object, comprising cable, line, wire, wire cable, rope, cord, ribbon, chain or the like, said tool comprising two support and bearing elements, each having a hub-forming sleeve, a plurality of support arms rigidly joined to the hub and forming right angle or substantially right angle with the central axis of the hub, and a concentric support member for supporting and centering the drum by means of internal engagement with both end portion of the sleeve; and also a connecting member comprising a shaft arranged to extend through the sleeve and said hubs, and anchoring means for anchoring the support and bearing elements to said shaft while at the same time securing the sleeve against axial displacement in relation to the shaft. The invention also relates to a drum of disposable type for assembly with a tool of the type described, and the combination of drum and tool of the type described.

SE-468 129 (9101042-1) describes a new method of manufacturing, packing, distributing and using a coil of a continuous flexible object, such as a cable, through which method the conventional, returnable wooden drums and the many drawbacks entailed with their use are eliminated, and valuable advantages and plus effects are achieved throughout the chain of handling from producing the coil to uncoiling the cable, etc. on site and even, where relevant, to recovery of a scrap line. Said patent also describes a tool for use with this method, which

tool has two support wheels designed to clamp between
them a sleeve for said coil and designed to be in contact
with the ground when the tool is to be fitted onto an
empty sleeve and on a finished parcel of the coil and
5 after the coil has been produced. In order to give the
coil lateral protection the sleeve is provided with two
protective rings having smaller diameter than said
support wheels so that they do not come into contact with
the ground.

10

The object of the present invention is to produce a tool
for use in the described manner, which is simpler to
handle and simpler to assemble to and dismantle from a
sleeve, as well as having low weight and thus being
15 cheaper to manufacture.

It is also an object of the invention to produce a drum
of disposable type which is simple to manufacture and
which enables the use of a tool to be fitted to the drum
20 to form a rotatable unit that is simpler to manufacture
and simpler and lighter to use.

The tool according to the invention is characterized in
that the support arms are arranged to abut in supporting
25 manner against the end pieces and have free ends located
radially inside the outer circular edge of the end pieces
so that the support arms are not in contact with the
ground when said unit is resting on the ground by means
of the end pieces of the drum.

30

The invention is described in more detail in the
following with reference to the drawings.

Figure 1 shows in perspective a first tool which is
35 particularly suitable for use when coiling a cable, etc.

Figure 2 shows parts of a drum to which the tool in Figure 1 shall be connected.

Figure 3 shows the finished drum.

5

Figure 4 illustrates assembly of the tool on the drum.

Figures 5 and 6 show a longitudinal section through a tensioning device for the tool according to Figure 1, in inactive and active position, respectively.

10

Figure 7 is an end view of the drum and the tool before they have been locked together.

Figures 8, 9 and 10 show different steps in the assembly process with the aid of the tensioning device shown in Figure 5.

15

Figure 11 is a view in perspective of the rotatable unit ready for placing in a coiling equipment.

20

Figure 12 shows the unit according to Figure 11 with a finished coil of cable, etc.

Figure 13 shows the unit with coil according to Figure 12, provided with protective casing and securing bands to form a parcel, and the tensioning device connected to the unit ready for dismantling.

25

Figure 14 shows the finished wrapped parcel of coil when the tool has been dismantled.

30

Figure 15 is a view in perspective of the finished coil parcel according to Figure 14 and a second tool to be fitted onto the coil parcel to form a second rotatable unit for use in the field.

35

Figure 16 shows the rotatable unit ready to be placed in an uncoiling equipment.

Figure 17 shows the rotatable unit from which the
5 protective casing and securing bands have been removed.

Figure 18 shows the rotatable unit after the cable, etc. has been entirely unwound.

10 In Figure 1 a first tool 2 is shown for detachable connection to a drum 1, shown in more detail in Figure 3, in order to produce a rotatable unit 3, shown in more detail in Figure 10. The drum 1 shall carry a coil 5,
15 shown in more detail in Figure 11, of a continuous flexible object 6 comprising cable, line, wire, wire cable, rope, cord, ribbon, hose, chain or the like.

The drum 1 (see Figures 2 and 3) comprises a cylindrical sleeve 7 with parallel end surfaces 8, 9. The drum is
20 axially open, i.e. it has a through-going aperture, and has predetermined length and diameter. The sleeve 7 is shaped with a predetermined number of identically shaped notches 10 spaced uniformly around the periphery and extending axially inwards from the end surfaces 8, 9. In
25 radial direction the notches 10 are through-going, i.e. they extend between the inside and the outside of the sleeve 7. The notches 10 at one end surface 8 are located axially opposite to the notches 10 at the other end surface 9. The drum 1 is also provided with two identical
30 circular end pieces 11, 12, each having a concentric central hole 13 with a diameter equal to or slightly larger than the diameter of the sleeve 7 so that the sleeve can be inserted into the central hole 13 of the end pieces 11, 12 and received therein without clearance
35 and so that the end pieces 11, 12 are centered to the sleeve 7. Within the area of the central hole 13 the end pieces 11, 12 are provided with a predetermined number of

radially inwardly directed protrusions 14 spaced uniformly around the periphery and corresponding in shape to the notches 10 so that the protrusions 14 can be pressed into the notches 10 upon coaxial and parallel displacement of the end pieces 11, 12 towards the sleeve 7. The predetermined number of notches 10 corresponds to the number of protrusions 14 and is at least three. The depth of the notches 10 is equivalent to or somewhat larger than the thickness of the end pieces 11, 12 so that the outside of the end piece will coincide with or lie slightly inside the end surface 8, 9 when the end piece 11, 12 has been pressed to engagement with the sleeve 7 as can be seen more clearly in Figure 3. Another notch 15, the function of which is described below, is provided at each end part of the sleeve 7. Furthermore, each end piece 11, 12 is provided with a plurality of recesses 16 around its peripheral, circular edge 37. These external recesses 16, the function of which is described below, and the protrusions 14, are radially aligned with each other. The arc sections 4 between two protrusions 14 in the end pieces have no connection with the sleeve so that such an arc section 4 can be pressed axially inwards upon application of an external force on the end piece at the centre of the arc section.

The drum 1 is of disposable type. The sleeve 7 consists of cellulosic fibre material such as rolled cardboard and compressed wood fibres, such as chips or shavings. The end pieces 11, 12 also consist of cellulosic fibre material, such as compressed wood fibres and fibreboard discs, such as plywood. An end piece of fibreboard disc has a thickness of at least 12 mm and is chosen depending on the type of object 6 to be coiled. An end piece of pressed wood fibres has a density of 700-950 kg/m³ and a thickness of at least 15 mm and is chosen depending on the type of object 6 to be coiled.

The tool 2 (see Figures 1 and 4) comprises two support and bearing elements 17, 18 and a connecting member therefor. The connecting member comprises a cylindrical shaft 19 with through-hole 20, and an anchoring means.

5 The shaft 19 is designed to carry the two support and bearing elements 17, 18. Each support and bearing element 17, 18 includes a hub-forming cylindrical sleeve 21 designed to receive the shaft 19 without clearance. At least one, 17, of the support and bearing elements is provided at its outer end portion with two diametrically

10 situated holes 22 to receive a locking device, e.g. a locking pin 23. The shaft 19 is provided with two corresponding holes 40 to receive said locking pin 23 when said holes 22 and 40 are aligned with each other.

15 Each support and bearing element 17, 18 has a plurality of support arms 24 which are permanently joined to the hub 21 to form a rigid unit and extend radially from the hub 21, their free ends 33 being situated in a common circle with a radius less than the radius of the end

20 pieces 11, 12, as can be seen in Figure 7. The support arms 24 form right angle to the central axis of the hub 21, but they may alternatively be inclined somewhat inwardly. At their free end portions 36 the support arms 24 are provided with flat support plates 25 having flat

25 support surfaces 26, located in one and the same plane, which form right angles to the shaft 19. Each support and bearing element 17, 18 is provided with an endless support ring 27, concentric with and permanently joined to the support arms 24. The support ring 27 is located on

30 the inner side of the support and bearing element 17, 18 and has predetermined axial dimension. A plurality of spokes 28, corresponding to the number of support arms 24, are arranged between the hub 21 and the ring 27, permanently connected therewith and with the support arms

35 24, in order to reinforce the support ring 27. The spokes 28 take up a considerable share of the load acting on the sleeve 7 during coiling. The support ring 27 is designed

for insertion into the sleeve 7 of the drum in order to support and center the drum 1. To facilitate insertion the leading portion of the support ring 27 is suitably conical, continuing into a cylindrical portion, as shown. Alternatively the entire support ring 27 may be conical. In both cases the largest diameter of the support ring 27 corresponds to the inner diameter of the sleeve ± 2 mm. The axial dimension of the support ring 27 is chosen so that sufficient engagement is obtained with the sleeve 7 to absorb the load from the coil 5 of cable 6, etc., without being damaged or deformed. The support ring 27 has a predetermined number of uniformly distributed notches or recesses 29, open in axial direction and having a depth, i.e. radial extension, sufficient to allow securing bands 30 (see Figure 13) to be quickly and simply threaded through the notches 29 forming axial apertures. The notches 29 are situated between the support arms 24 equidistant from two adjacent support arms 24. The number of notches 29 thus corresponds to the number of support arms 24. A follower boss 31 is rigidly arranged on the inside of one of the support arms 24, immediately outside the support ring 27, i.e. in contact with its outer side and at a distance from the central axis of the tool 2 equal to the radius of the sleeve 7. This follower boss 31 is arranged to be brought into engagement with said additional axial notch 15 located in the end portion of the sleeve 7 midway between two of the notches 10 designed to receive the protrusions 14 of the end piece. The follower boss 31 secures the drum 1 and tool 2 together circumferentially in order to absorb the torque arising when cable, etc. is wound onto or off the drum. Both the support and bearing elements 17, 18 are provided with such a follower boss 31. The follower bosses 31 also help to align the support and bearing elements 17, 18 circumferentially in relation to the drum 1 so that the notches 29 in the support rings 27 will automatically be positioned opposite and radially inside

the protrusions 14 on the end pieces 11, 12 when the follower bosses 31 are axially aligned with the additional notches 15. The number of support arms 24 is at least three, from which it follows that the number of notches 29 is also at least three and equal to the number of support arms 24. The support plates 25 of the support arms 24 are situated within the area of the end pieces 11, 12 to prevent contact with the end surfaces 8, 9 of the sleeve 7, as can be seen in Figures 9 and 11. A stop flange 41 serving as counter-support for the support and bearing element 18 is arranged at the end portion of the shaft 19 facing away from the other end portion provided with holes 40. Said stop flange 41, holes 22 and 40 and locking pin 23 together form an anchoring means for anchoring the support and bearing elements 17, 18 to the shaft 19 and at the same time securing the sleeve 7 against axial displacement in relation to the shaft. The support and bearing elements 17, 18 are situated a predetermined distance d from each other when thus anchored. When the tool is used in a rotatable unit for coiling, the sleeve has no contact with the support and bearing elements 17, 18 and the sleeve is thus secured against axial displacement by means of the end pieces 11, 12, more specifically by the protrusions 14 on the end pieces.

The tool also includes a tensioning device 42 which is intended to be brought into engagement with the end portion of the shaft 19 provided with said holes 40 for the locking pin 23. As can be seen more clearly in Figures 5 and 6, the tensioning device has a cylindrical pressure sleeve 43 which has an inner diameter somewhat larger than the outer diameter of the shaft 19. The pressure sleeve 43 is closed at one end by a wall 44 which offers counter-support to a pressure device 45 in the form of a pneumatic or hydraulic cylinder with its plunger 46 attached in the wall 44 and cylinder 47 in a

yoke 48, the shanks 49 of which extend through openings 50 in the wall 44. A cup-shaped tractive body 51 is slidably arranged in the pressure sleeve 43 and is firmly screwed to the shanks 49 of the yoke. The bottom wall 52 of the tractive body 51, in sliding contact with the inner side of the pressure sleeve 43, is provided with a coaxial, T-shaped locking mechanism 53 with a free radial locking peg 54. At the end (see Figure 8) of the shaft 19 provided with the holes 40 for the locking pin 23 is a fixed counter-support wall 55 with a rectangular, vertical aperture 56 which is somewhat larger than the locking peg 54, allowing the latter to be passed through the aperture 56 when they are aligned with each other with regard to their geometric shapes. 57 denotes a support sleeve joined to the counter-support wall 55, in which support sleeve the tractive body 51 of the tensioning device 42 is received when the tensioning device 42 is moved coaxially in towards the shaft 19. When fully inserted, the rear guiding flange 58 of the tractive body 51 is in contact with the end surfaces of the shaft 19 and support sleeve 57, and the locking peg 54 is located outside the counter-support wall 55. By turning the locking peg 54 90° with the aid of the yoke 48, the locking peg 54 is brought into locking engagement with the counter-support wall 55. Upon activation of the pressure device 45, the plunger 46 presses the pressure sleeve 43 in over the end portion of the shaft until it is brought into contact with the hub 21. Upon continued activation, the hub 21 is then moved inwards so that its holes 22 are aligned coaxially with the holes 40 of the shaft 19, after which the locking pin 23 can be passed through the holes 22 and 40 to locking position. After returning the pressure sleeve 43 to its original position and deactivating the pressure device 45, the tensioning device is removed and the rotatable unit 3 is ready to be placed in a coiling machine. When the coil 5 has been produced and the tool 2 is to be removed from the

finished coil parcel 32, the tensioning device 42 is again connected to the shaft 19 to enable removal of the locking pin 23 which is clamped with a considerable force derived from the coil 5 and transmitted via the end pieces 11, 12 and support and bearing elements 17, 18 to the shaft 19 via the locking pin 23. When the tensioning device 42 is activated the pressure sleeve 43 presses against the hub 21 with sufficient force to overcome the force exerted on the support and bearing elements by the coil 5, so that the holes 22 and 40 of the hub 21 and shaft 19 are aligned axially with each other, after which the locking pin 23 can be lifted up. In the starting position shown in Figure 8, when the tensioning device 42 is inoperative and the support plates 25 are in contact with the end pieces 11, 12 without the influence of any external force, the distance between the support elements 17 and 18, measured between the support plates, is $d + \geq 1 \text{ mm}$, e.g. $d + 3 \text{ mm}$. In the setting position as shown in Figure 9, when the tensioning device 42 is operative and the support plates 25 have pressed in free arc sections 4 of the end pieces so that the holes 22 and 40 are coaxial with each other, the distance between the support elements 17 and 18 is $d - x \text{ mm}$, e.g. $d - 2 \text{ mm}$, where x is equal to the gap (tolerance) between the locking pin 23 and the walls of the holes 22 and 40. In the final position, shown in Figure 10, when the locking pin 23 is in locked position and the tensioning device 42 has been removed from the shaft 19, the distance between the support and bearing elements 17 and 18 is $d \text{ mm}$. In this final position, therefore, there is a favourably pretension in the end pieces 11, 12. From Figure 8 it is clear that a gap 35 also exists between one end surface of the sleeve and the support arms 24, thus allowing said displacement of the tensioning device 42.

Figures 2-14 illustrate various steps in the production of a parcel 32 of a coil 5 ready for storage or delivery

to a customer. The initial step is assembly of the drum 1 from the three parts 7, 11, 12, after which the tool 2 is fitted on the drum to produce a rotatable unit 3 as shown in Figure 7. The rotatable unit 3 is placed in a
5 stationary coiling machine (not shown) in an industry for supplying cable, etc., the coiling machine being provided with spindles for receipt in the holes 20 of the shaft 19 in order to drive the shaft. A cable 6, etc., is wound onto the rotating unit 3 so that a coil 5 is formed of
10 predetermined diameter, said diameter being less than that of the end pieces 11, 12. The unit 3 with the finished coil 5 is then conveyed to a wrapping station where the coil 5 is first surrounded by a protective casing 34, preferably of cardboard, after which securing
15 bands 30 are threaded through the notches 29 and sleeve 7 and clamped around the sleeve 7, end pieces 11, 12 and coil 5. The securing bands 30 extend through the peripheral notches on the end pieces 11, 12 and over the protrusions 14 of the end pieces so that most of the
20 clamping force from the securing bands 30 will be exerted on these points instead of on the sleeve 7. The parcel 32 thus becomes more stable. In the next step the tool 2 is dismantled from the drum 1 as illustrated in Figure 13 to release the finished parcel 32 as shown in Figure 14.

25 For unwinding the cable 6, etc. on site a second tool 102, shown in Figure 15, is used which has the same basic structure as the industrial tool shown in Figure 1 but is somewhat simplified since the strain on the tool is not
30 as great during unwinding as during winding of the cable 6, etc. The same reference designations are used for equivalent constructional elements as in the industrial tool, but with the addition of "100".

35 The support ring 127 has no inner connection with the hub 121, similar to the spokes 28 in the industrial tool 2. It is rigidly joined to the radial support arms 124 at

- one side so that the hub 121, support arms 124 and support ring 127 form a rigid unit. Furthermore, the support arms 124 need not initially be pressed against the end pieces 11, 12 by some externally applied force, but may abut both the end pieces 11, 12 and the end surfaces 8, 9 of the sleeve 7. In this case the anchoring means of the connection member includes a locking sleeve 60 with external threading 61, which is brought into engagement with internal threading 62 in the shaft 119, the other end of which has a stop flange 141. The locking sleeve 60 is provided with a handle 64 to facilitate turning the locking sleeve 60 into and out of its thread engagement with the shaft 119.
- Figures 16-18 illustrate various steps for producing a second rotatable unit 103 on site, out of the coil parcel 32 supplied and the second tool 102. When the finished unit 103 is placed in an unwinding machine (not shown), the securing bands 30 are cut and removed, together with the protective casing 34 to prepare the cable, etc. for unwinding as illustrated in Figure 17. After unwinding, the tool is dismantled for reuse, while the end pieces are removed from the sleeve and discarded.

C L A I M S

1. A tool (2) for detachable assembly on a drum (1) of disposable type to form a rotatable unit (3) to be placed
5 in journalling equipment for rotation of the unit (3), said drum (1) comprising a cylindrical sleeve (7) and two end pieces (11, 12) which are secured to the sleeve to prevent them from slipping axially towards each other, the drum (1) being designed to carry a coil (5) of a
10 continuous flexible object (6), comprising cable, line, wire, wire cable, rope, cord, ribbon, chain or the like, said tool (2) comprising two support and bearing elements (17, 18), each having a hub-forming sleeve (21), a plurality of support arms (24) rigidly joined to the hub
15 (21) and forming right angle or substantially right angle with the central axis of the hub (21), and a concentric support member (27) for supporting and centering the drum (1) by means of internal engagement with both end portions of the sleeve (7); and also a connecting member
20 comprising a shaft (19) arranged to extend through the sleeve (7) and said hubs (21), and anchoring means for anchoring the support and bearing elements (17, 18) to said shaft (19) while at the same time securing the sleeve (7) against axial displacement in relation to the
25 shaft (19), characterized in that the support arms (24) are arranged to abut in supporting manner against the end pieces (11, 12) and have free ends (33) located radially inside the outer circular edge (37) of the end pieces (11, 12) so that the support arms (24) are not in contact
30 with the ground when said unit (3) is resting on the ground by means of the end pieces (11, 12) of the drum (1).

2. A tool as claimed in claim 1, characterized in that
35 the support arms (24) are spaced from the end surfaces (8, 9) of the sleeve in order to form a gap (35) therebetween, and that it also comprises a tensioning

- device (42) arranged to be brought into engagement with the shaft (19) to press the support and bearing elements (17, 18) towards each other and bring them into position for anchoring to said shaft (19) by means of said
- 5 anchoring means during said assembly and to bring them out of said position for their release from the shaft (19) when dismantling the unit (3) provided with coil (5).
- 10 3. A tool as claimed in claim 2, characterized in that said anchoring means comprise a stop flange (41) at one end portion of the shaft (19) to serve as a counter-support for one (18) of the support and bearing elements, radial holes (40) in the other end portion of
- 15 the shaft (19), radial holes (22) in the hub (21) of the other support and bearing element (17) and a locking device (23) arranged to be brought into engagement with said radially directed holes (22, 40) of the hub (21) and shaft (19) which are aligned with each other, after said
- 20 position has been set by means of said tensioning device (42).
4. A tool as claimed in claim 2 or 3, characterized in that the end portions (36) of the support arms (24) are
- 25 provided with flat support plates (25) arranged to press against the end pieces (11, 12) in order to pre-tension them during said assembly.
5. A tool as claimed in any of claims 1-4,
- 30 characterized in that the supporting member consists of a endless support ring (27) provided with a predetermined number of radial notches (29) forming axial apertures which are located equidistant from the support arms (24) for the passage of securing bands (30) surrounding the
- 35 coil.

6. A tool as claimed in any of claims 1-5,
characterized in that the end portions of the sleeve (7)
are provided with a predetermined number of uniformly
distributed, axial notches (10) through-going in radial
direction, and that each end piece (11, 12) is provided
with a corresponding number of radially inwardly directed
protrusions (14) arranged to be brought into engagement
with the axial notches (10) in the sleeve (7) in the
event of coaxial and parallel displacement of the end
pieces (11, 12) towards each other and towards the end
portions of the sleeve (7).

7. A tool as claimed in claim 6 in combination with
claim 5, characterized in that the notches (29) of the
support rings (27) are arranged to be radially aligned
with the protrusions (14) of the end pieces (11, 12) so
that said securing bands (30) are brought into contact
with the protrusions (14) upon surrounding the coil (5).

8. A tool as claimed in claim 6 or 7, characterized in
that each end portion of the sleeve (7) is provided with
at least one additional notch (15) and that each support
and bearing element (17, 18) is provided with a
corresponding follower boss (31) arranged on the inside
of one of the support arms (24) to be brought into
engagement with said additional notch (15) to form a
detachable joint so that the drum (1) is prevented from
turning in relation to the support and bearing elements
(17, 18).

9. A tool as claimed in claim 8, characterized in that
the end pieces (11, 12) consist of laminated plates of
fibreboard having a thickness of at least 12 mm or of
pressed fibreboard plates having a thickness of at least
15 mm and a density of 700-950 kg/m³.

10. A drum of disposable type for detachable connection
to a tool (2) to form a rotatable unit (3) for a coil (5)
of a continuous object (6), comprising cable, line, wire,
wire cable, rope, cord, ribbon, chain or the like, said
5 tool (2) comprising a cylindrical sleeve (7), and two end
pieces (11, 12) secured to the sleeve to prevent them
from being displaced along the sleeve towards each other,
characterized in that the end portions of the sleeve (7)
are provided with a predetermined number of uniformly
10 distributed, axial notches (10) through-going in radial
direction, and that each end piece (11, 12) is provided
with a corresponding number of radially inwardly directed
protrusions (14) arranged to be brought into engagement
with the axial notches (10) in the sleeve (7) in the
15 event of coaxial and parallel displacement of the end
pieces (11, 12) towards each other and towards the end
portions of the sleeve (7).

11. A drum as claimed in claim 1, characterized in that
20 each end of the sleeve (7) is provided with at least one
additional notch (15) for receipt of a corresponding
follower boss (31) of the tool (2), in order to form a
detachable joint so that the drum is prevented from
turning in relation to the tool (2).

12. A combination of drum (1) of disposable type and
25 tool (2) for detachable assembly on a drum (1) to form a
rotatable unit (3) to be placed in journalling equipment
for rotation of the unit (3), said drum (1) comprising a
cylindrical sleeve (7) and two end pieces (11, 12) which
30 are secured to the sleeve to prevent them from slipping
axially towards each other, the drum (1) being designed
to carry a coil (5) of a continuous flexible object (6),
comprising cable, line, wire, wire cable, rope, cord,
35 ribbon, chain or the like, said tool (2) comprising two
support and bearing elements (17, 18), each having a
hub-forming sleeve (21), a plurality of support arms (24)

rigidly joined to the hub (21), and forming right angle or substantially right angle with the central axis of the hub (21), and a concentric support member (27) for supporting and centering the drum (1) by means of
5 internal engagement with both end portions of the sleeve (7); and also a connecting member comprising a shaft (19) arranged to extend through the sleeve (7) and said hubs (21), and anchoring means for anchoring the support and bearing elements (17, 18) to said shaft (19) while at the
10 same time securing the sleeve (7) against axial displacement in relation to the shaft (19), characterized in that the support arms (24) are arranged to abut in supporting manner against the end pieces (11, 12) and have free ends (33) located radially inside the outer
15 circular edge (37) of the end pieces (11, 12) so that the support arms (24) are not in contact with the ground when said unit (3) is resting on the ground by means of the end pieces (11, 12) of the drum (1).

20 13. A combination as claimed in claim 12, characterized in that the support arms (24) are spaced from the end surfaces (8, 9) of the sleeve in order to form a gap (35) therebetween, that it also comprises a tensioning device (42) arranged to be brought into engagement with the
25 shaft (19) to press the support and bearing elements (17, 18) towards each other and bring them into position for anchoring to said shaft (19) by means of said anchoring means during said assembly and to bring them out of said position for their release from the shaft
30 (19) when dismantling the unit (3) provided with coil (5).

14. A combination as claimed in claim 13, characterized in that said anchoring means comprise a stop flange (41)
35 at one end portion of the shaft (19) to serve as a counter-support for one (18) of the support and bearing elements, radial holes (40) in the other end portion of

the shaft (19), radial holes (22) in the hub (21) of the other support and bearing element (17) and a locking device (23) arranged to be brought into engagement with said radially directed holes (22, 40) of the hub (21) and shaft (19) which are aligned with each other, after said position has been set by means of said tensioning device (42).

15. A combination as claimed in claim 13 or 14, characterized in that the end portions (36) of the support arms (24) are provided with flat support plates (25) arranged to press against the end pieces (11, 12) in order to pre-tension them during said assembly.

16. A combination as claimed in any of claims 12-15, characterized in that the supporting member consists of a endless support ring (27) provided with a predetermined number of radial notches (29) forming axial apertures which are located equidistant from the support arms (24) for the passage of securing bands (30) surrounding the coil.

17. A combination as claimed in any of claims 12-16, characterized in that the end portion of the sleeve (7) are provided with a predetermined number of uniformly distributed, axial notches (10) through-going in radial direction, and that each end piece (11, 12) is provided with a corresponding number of radially inwardly directed protrusions (14) arranged to be brought into engagement with the axial notches (10) in the sleeve (7) in the event of coaxial and parallel displacement of the end pieces (11, 12) towards each other and towards the end portions of the sleeve (7).

18. A combination as claimed in claim 17 in combination with claim 16, characterized in that the notches (29) of the support rings (27) are arranged to be radially

aligned with the protrusions (14) of the end pieces (11, 12) so that said securing bands (30) are brought into contact with the protrusions (14) upon surrounding the coil (5).

5

19. A combination as claimed in claim 17 or 18, characterized in that each end portion of the sleeve (7) is provided with at least one additional notch (15) and that each support and bearing element (17, 18) is
10 provided with a corresponding follower boss (31) arranged on the inside of one of the support arms (24) to be brought into engagement with said additional notch (15) to form a detachable joint so that the drum (1) is prevented from turning in relation to the support and
15 bearing elements (17, 18).

20. A combination as claimed in claim 19, characterized in that the end pieces (11, 12) consist of laminated plates of fibreboard having a thickness of at least 12 mm
20 or of pressed fibreboard plates having a thickness of at least 15 mm and a density of 700-950 kg/m³.

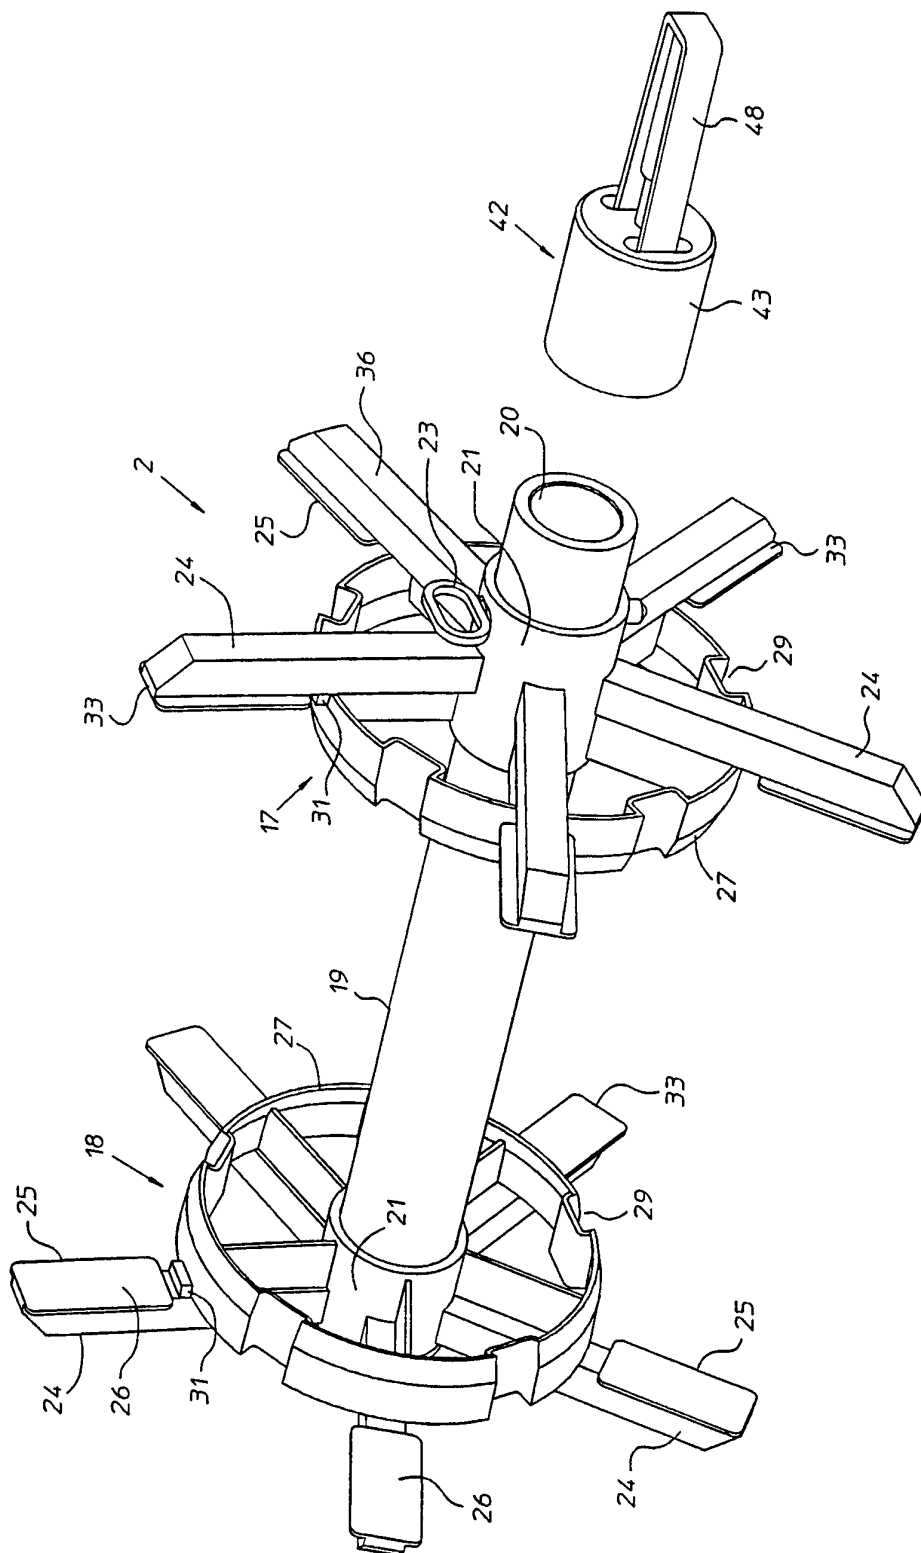


Fig 1

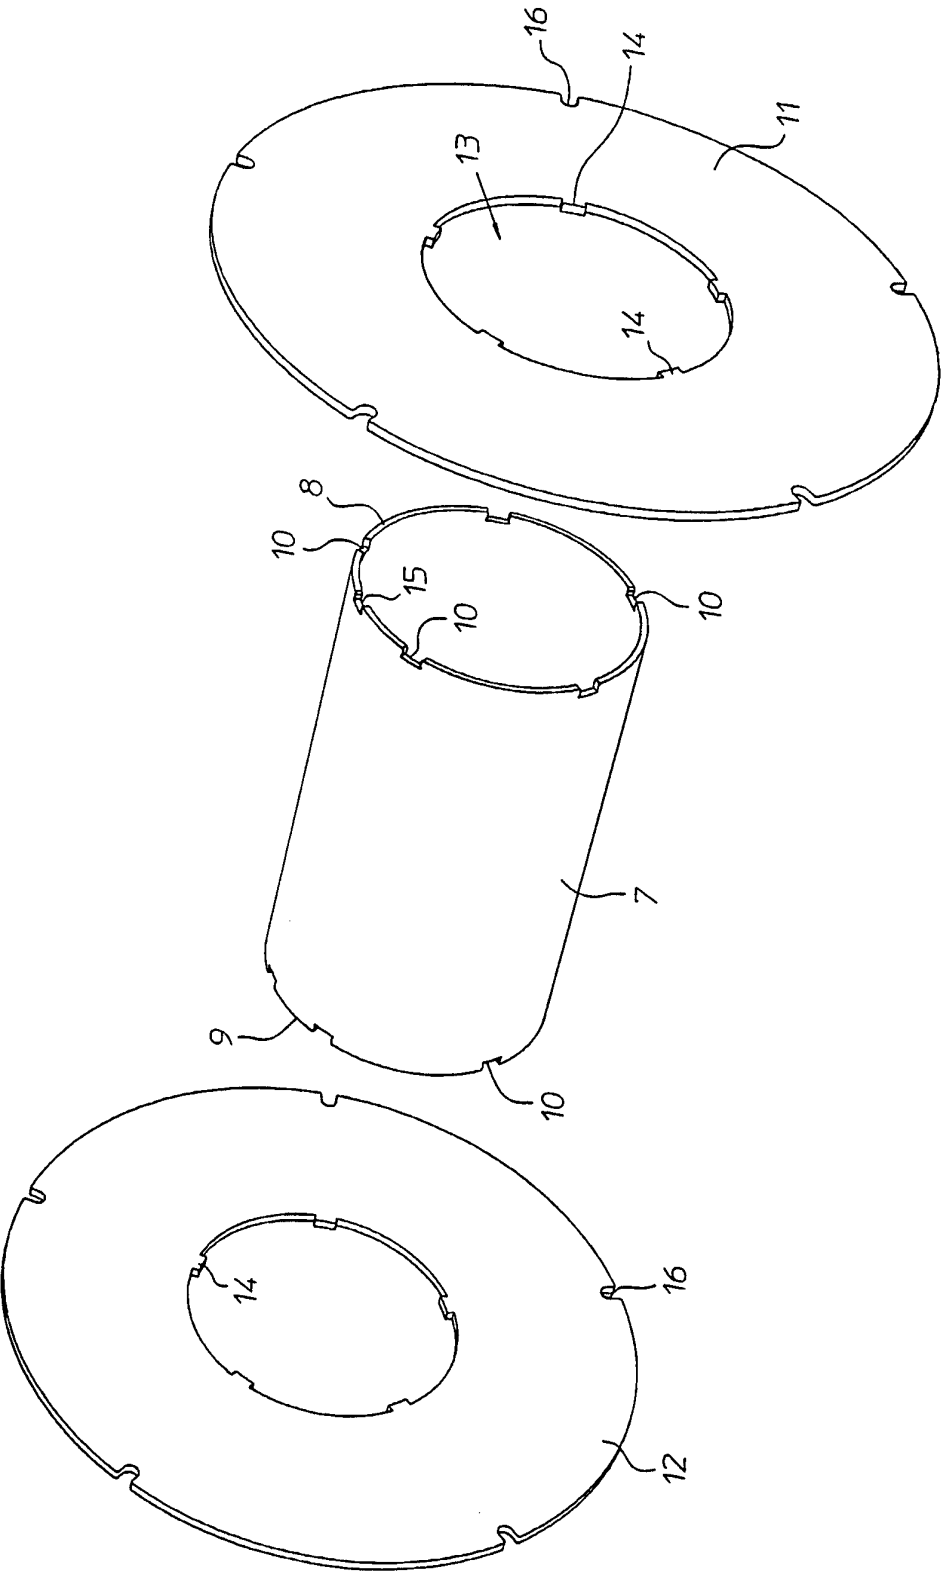


Fig 2

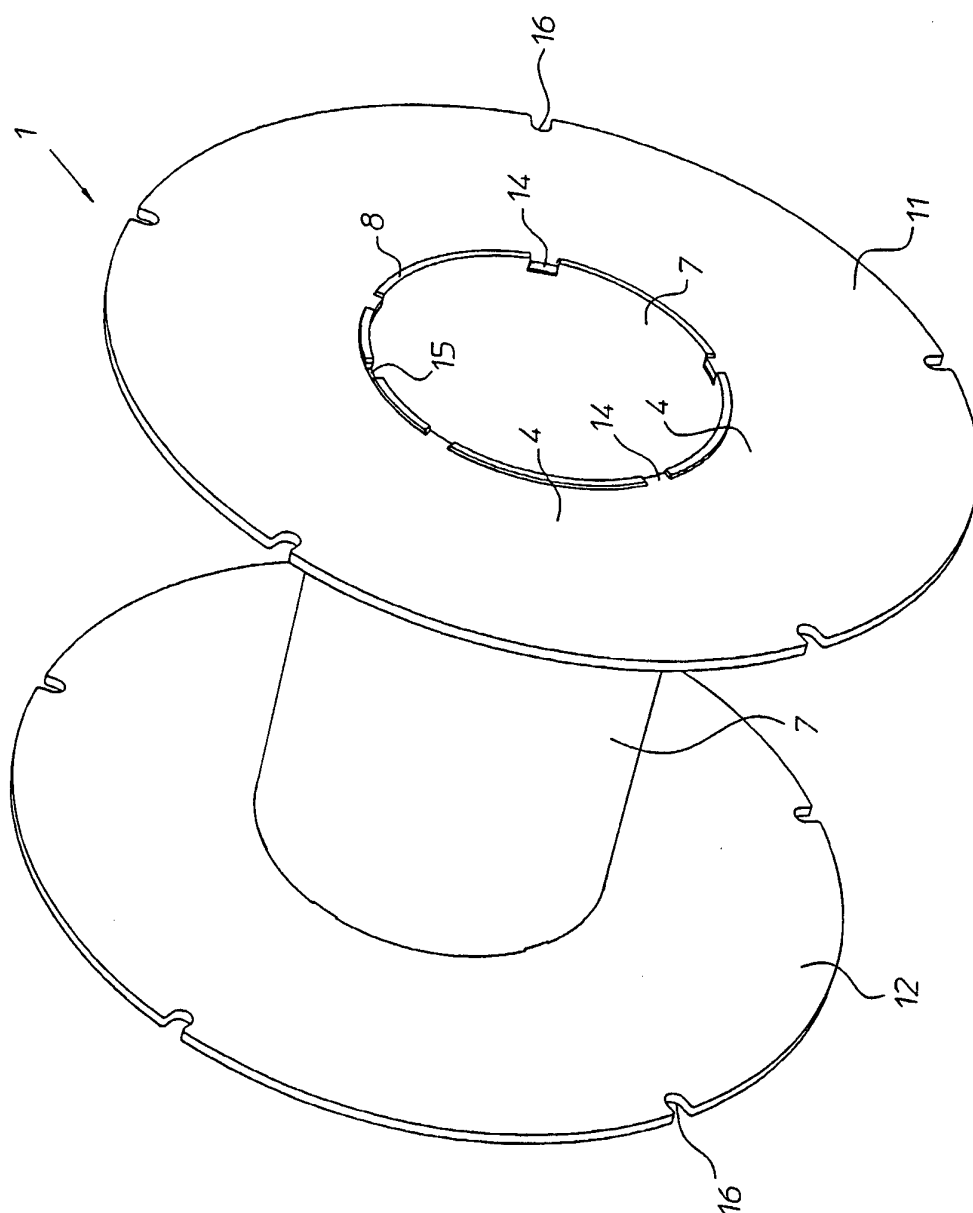


Fig 3

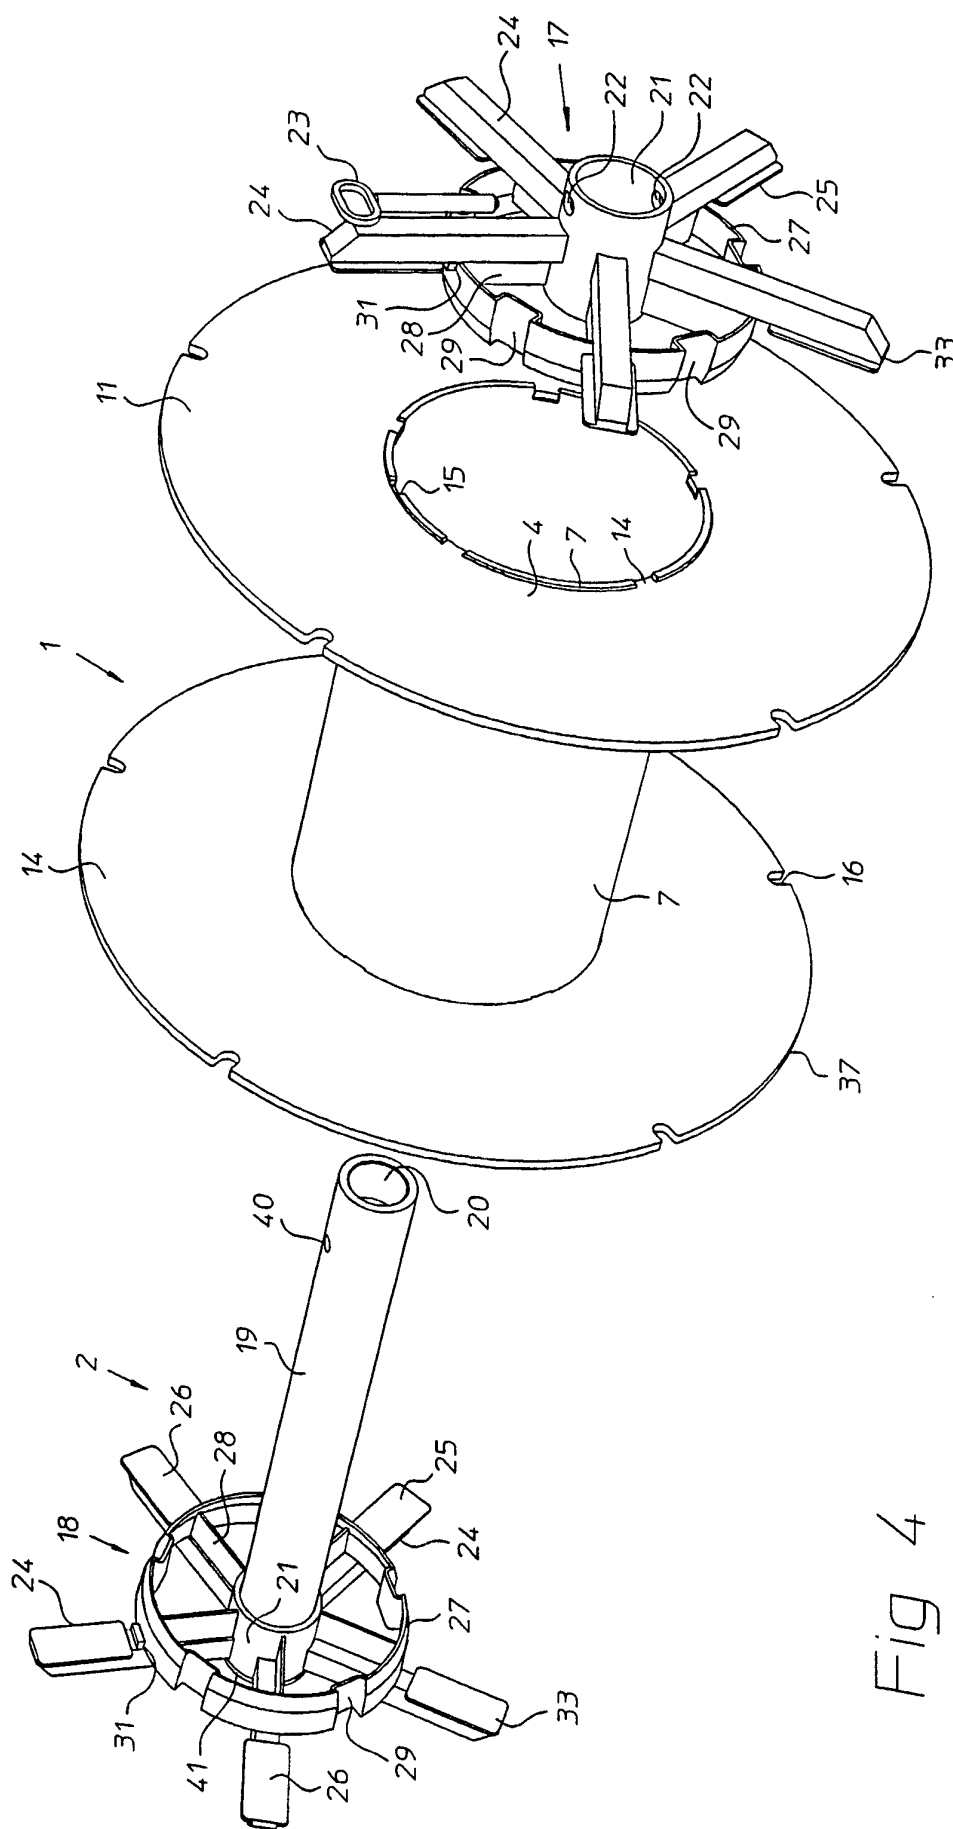


Fig 4

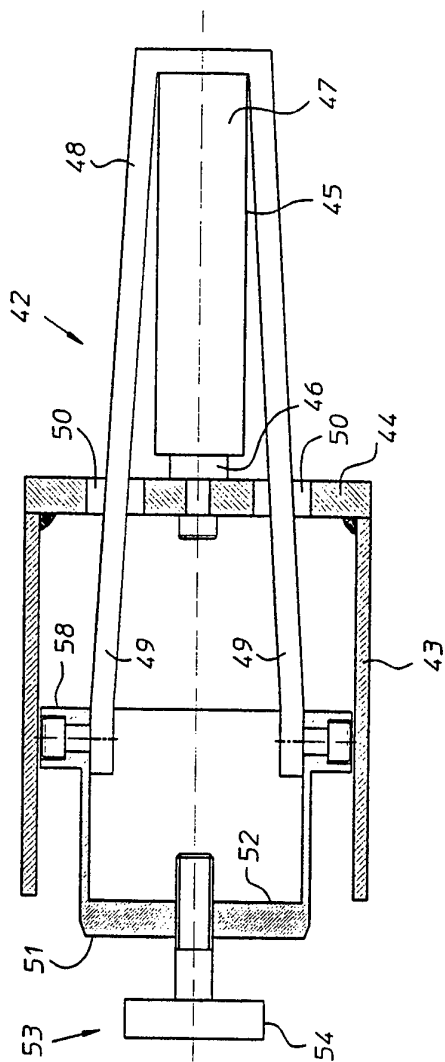


Fig 5

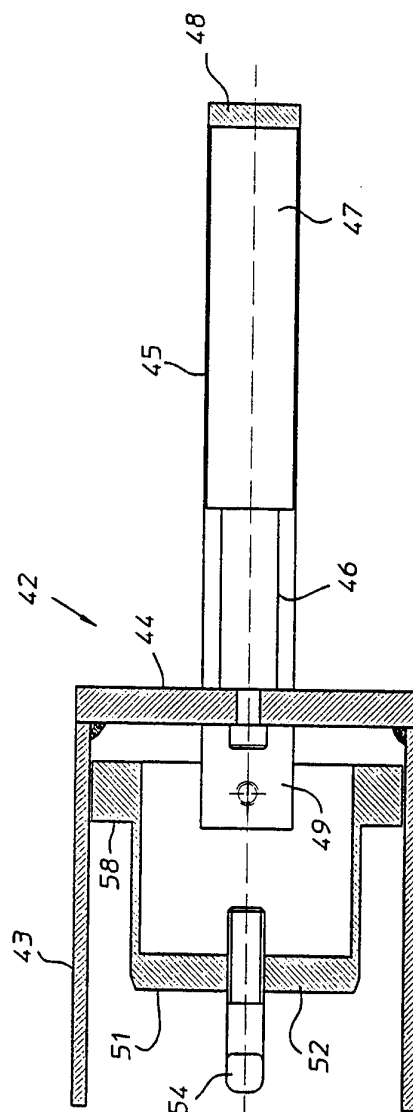


Fig 6

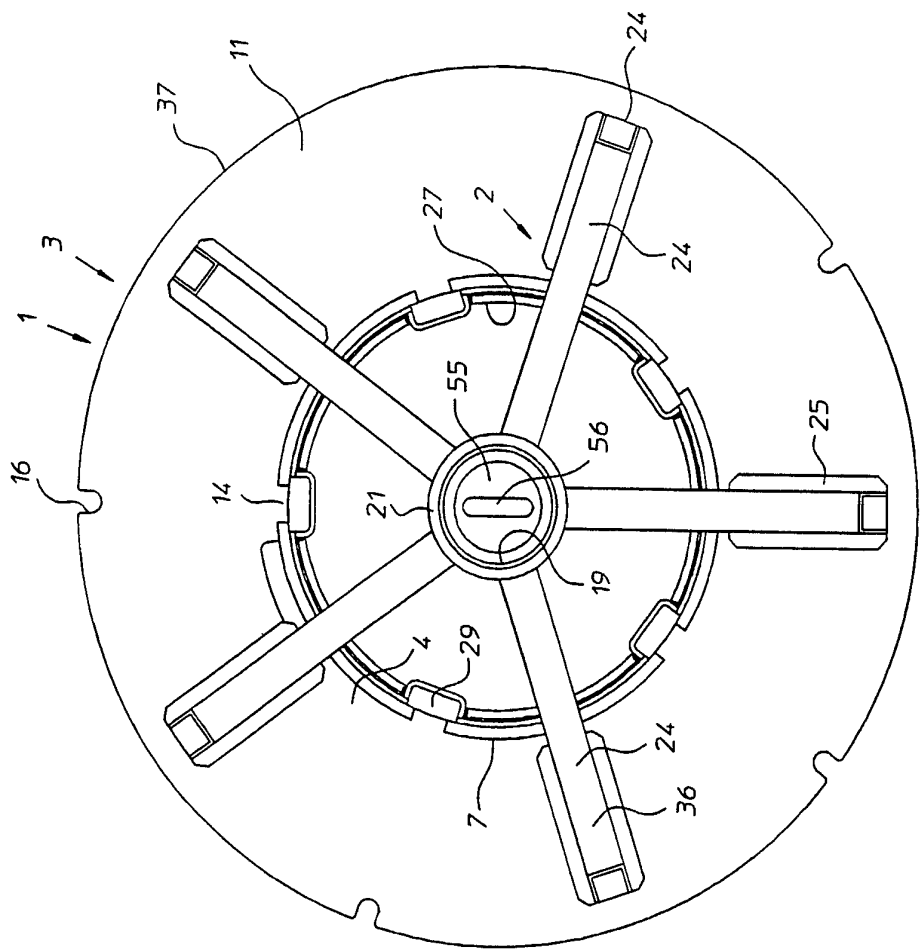
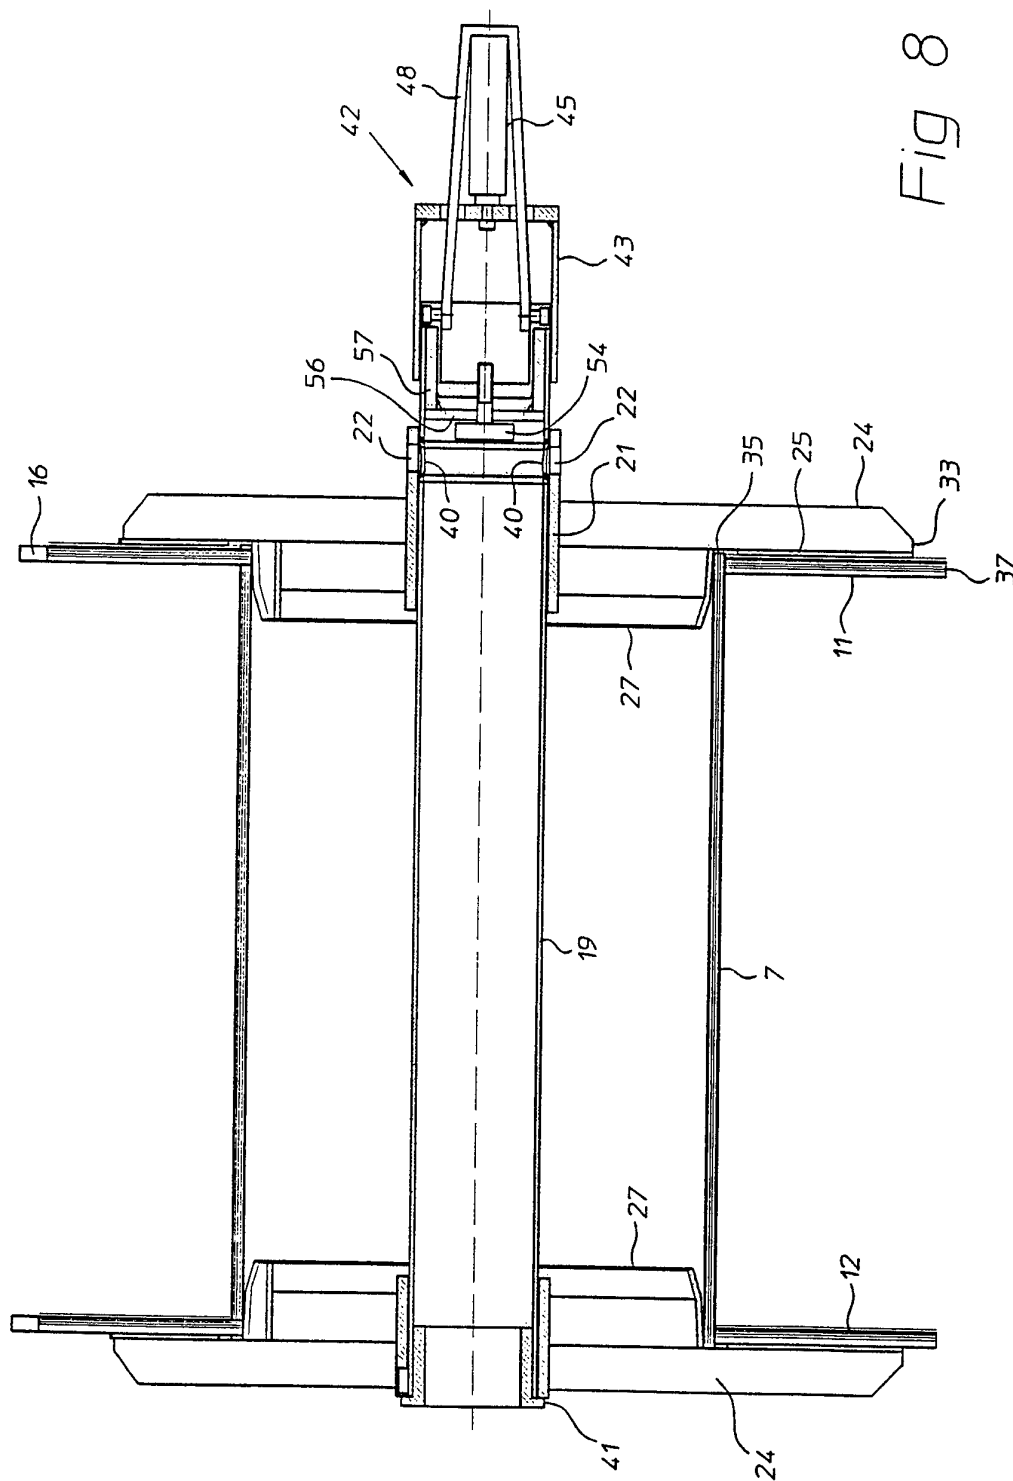
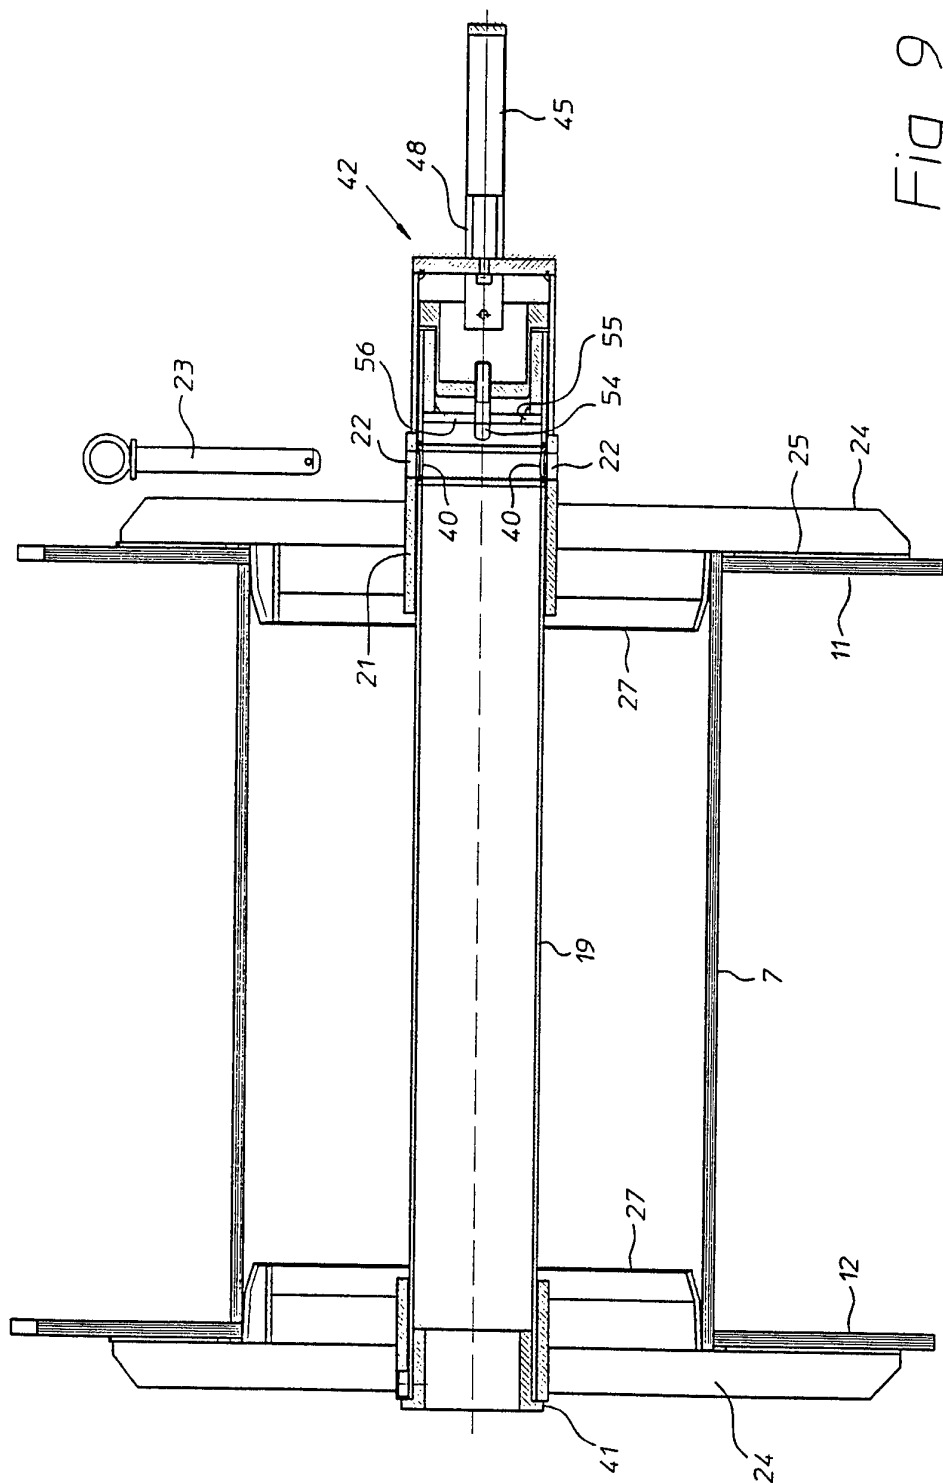
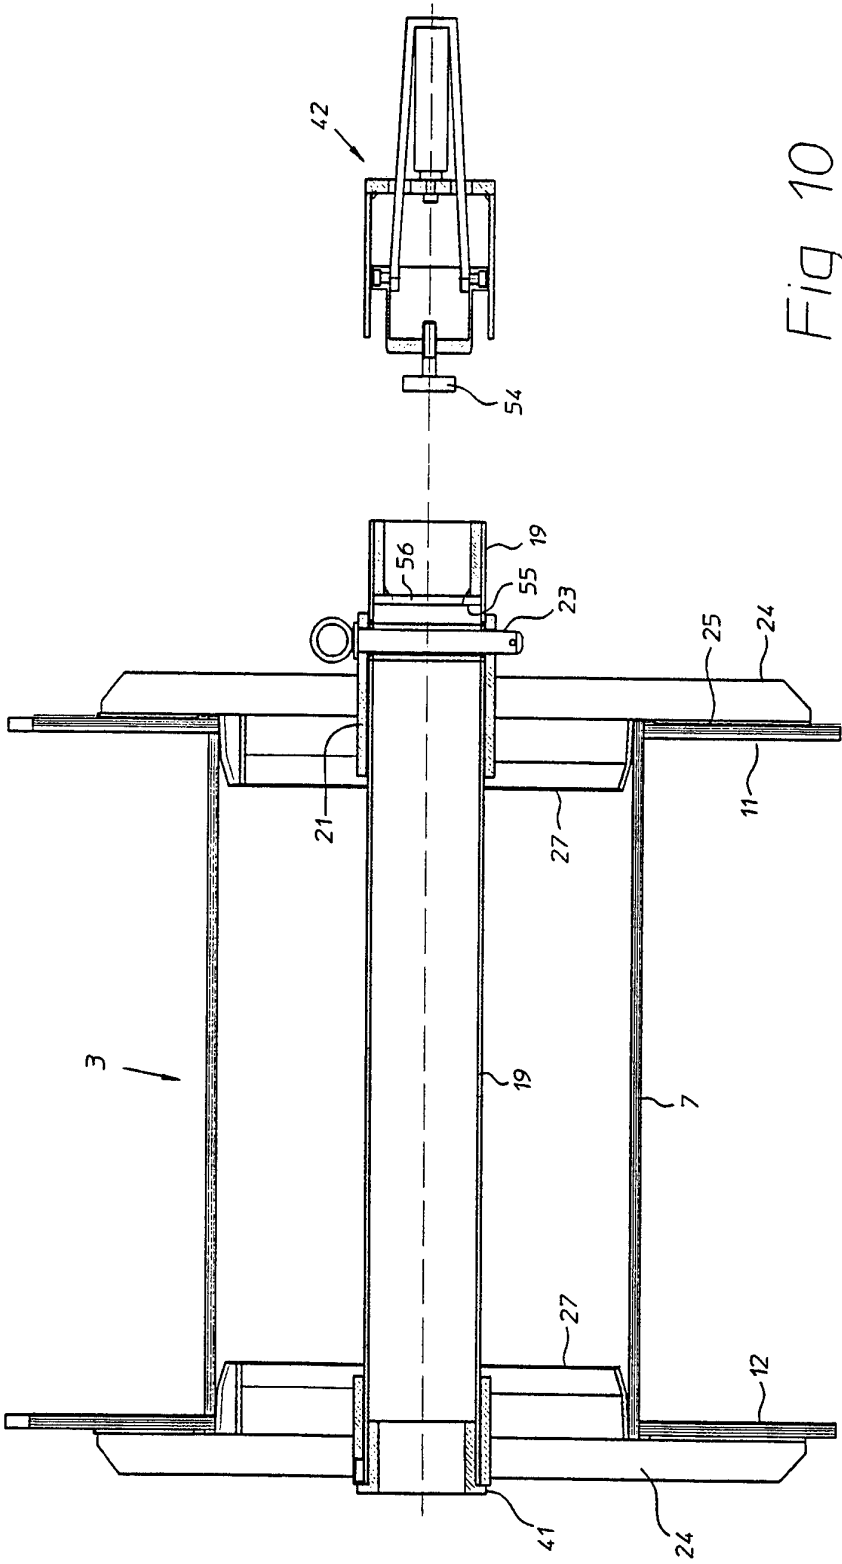


Fig 7







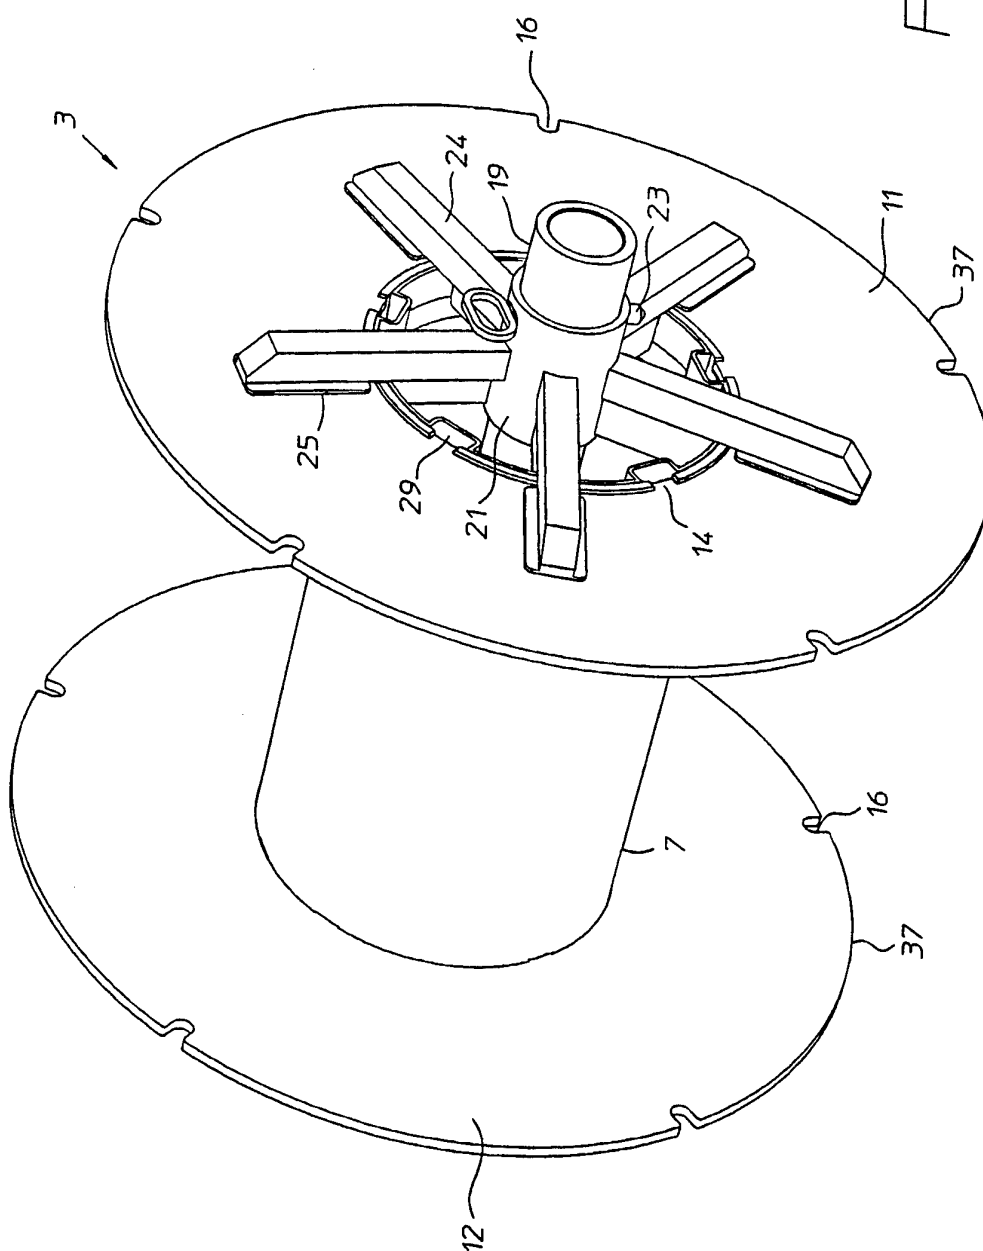


Fig 11

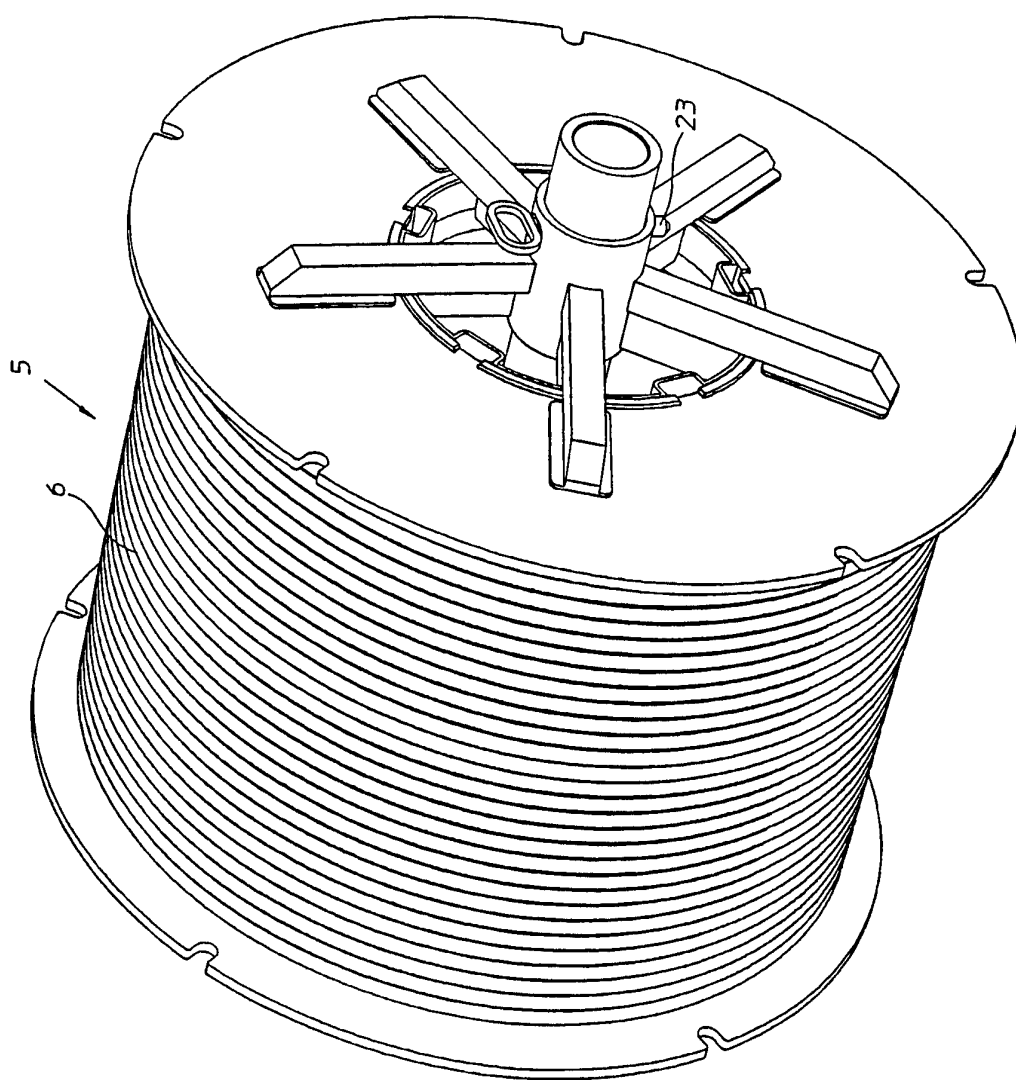


Fig 12

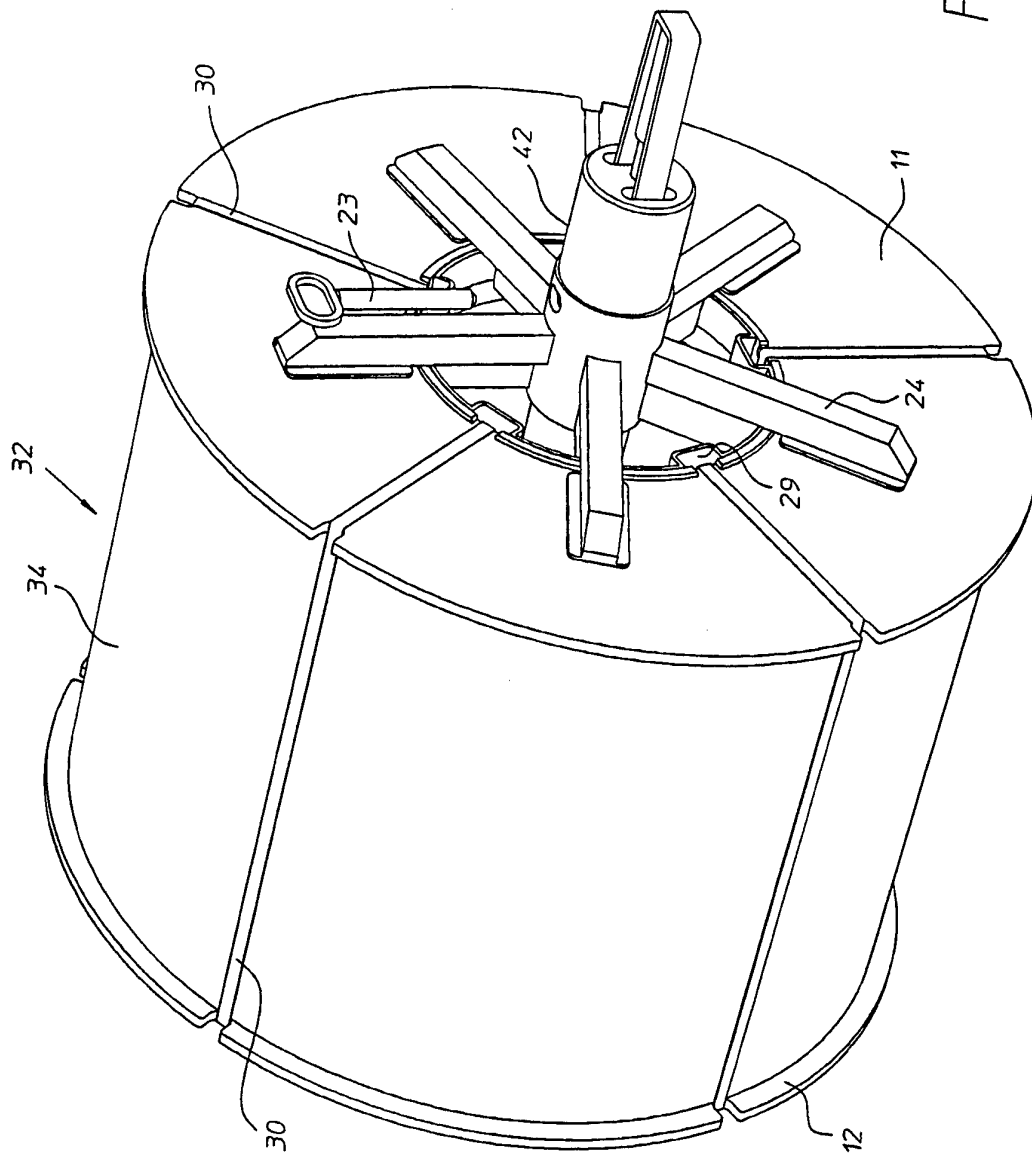


Fig 13

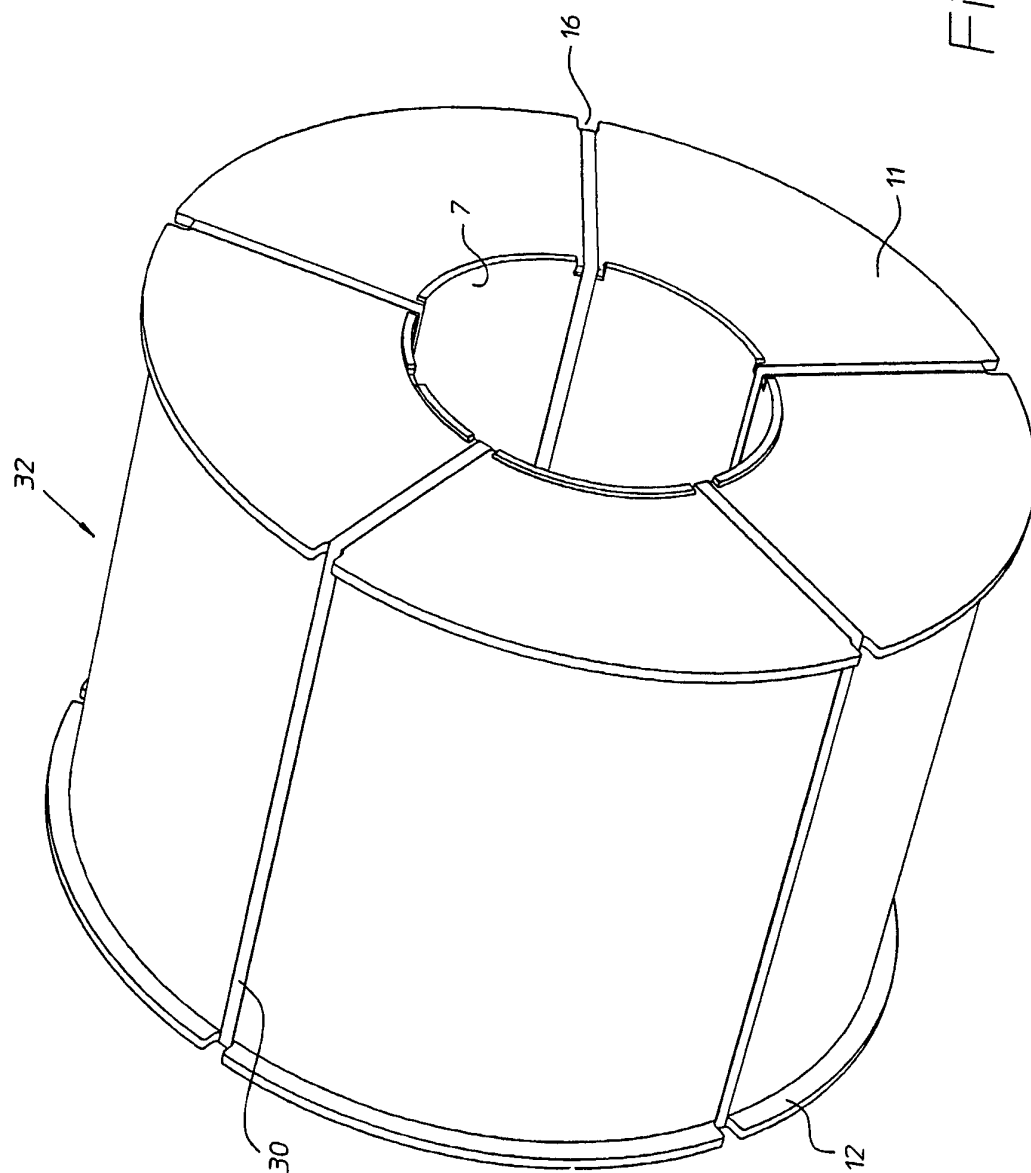


Fig 14

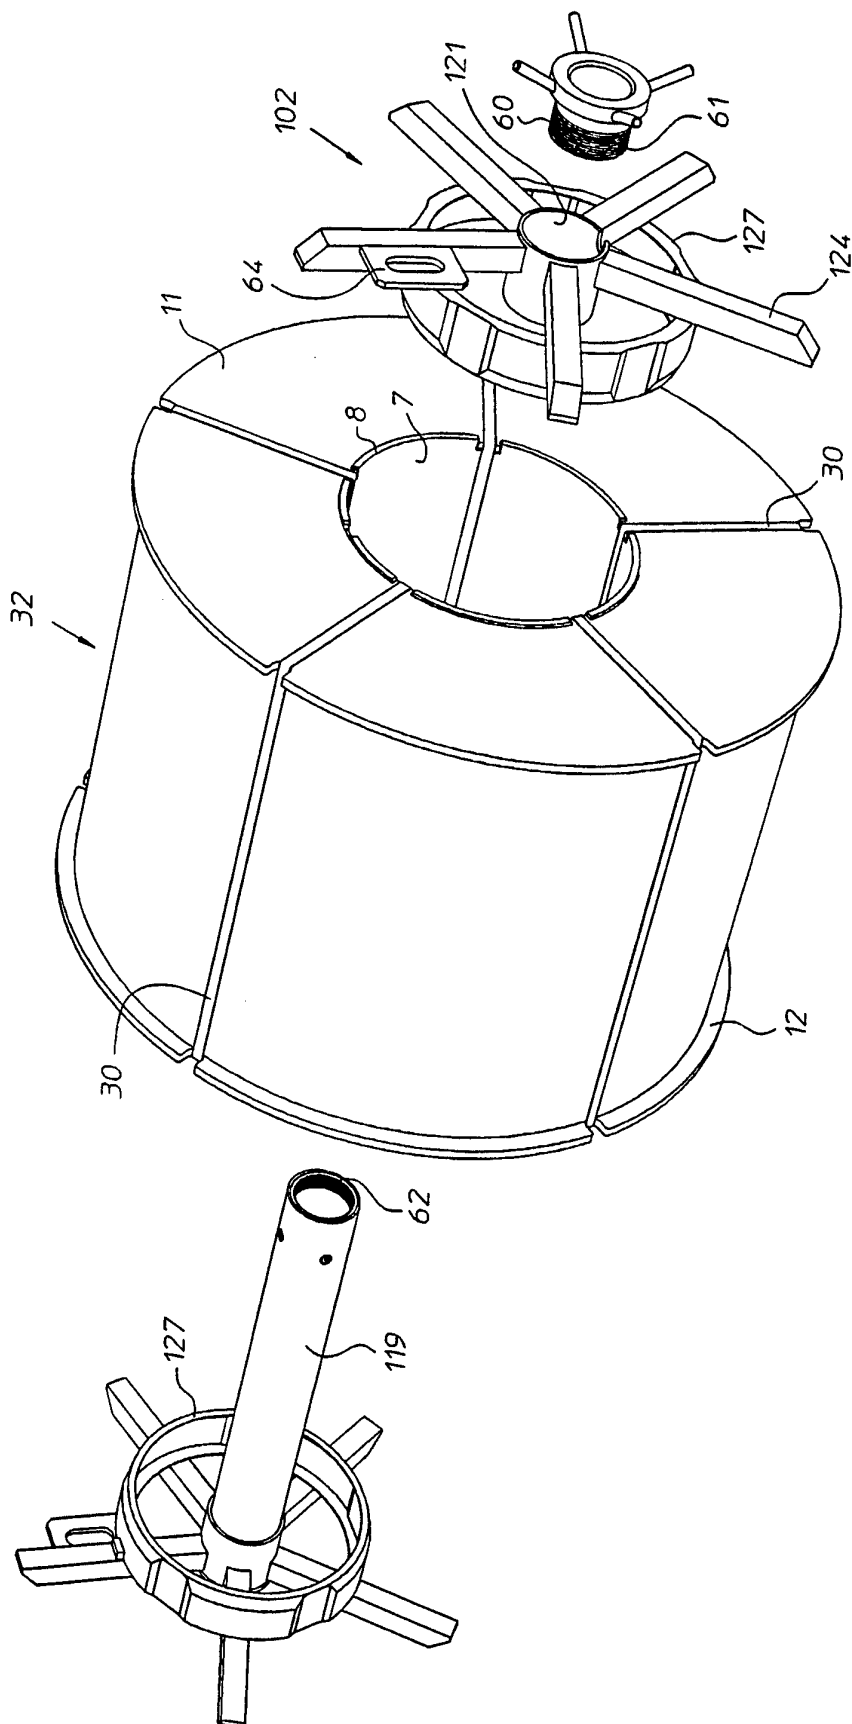
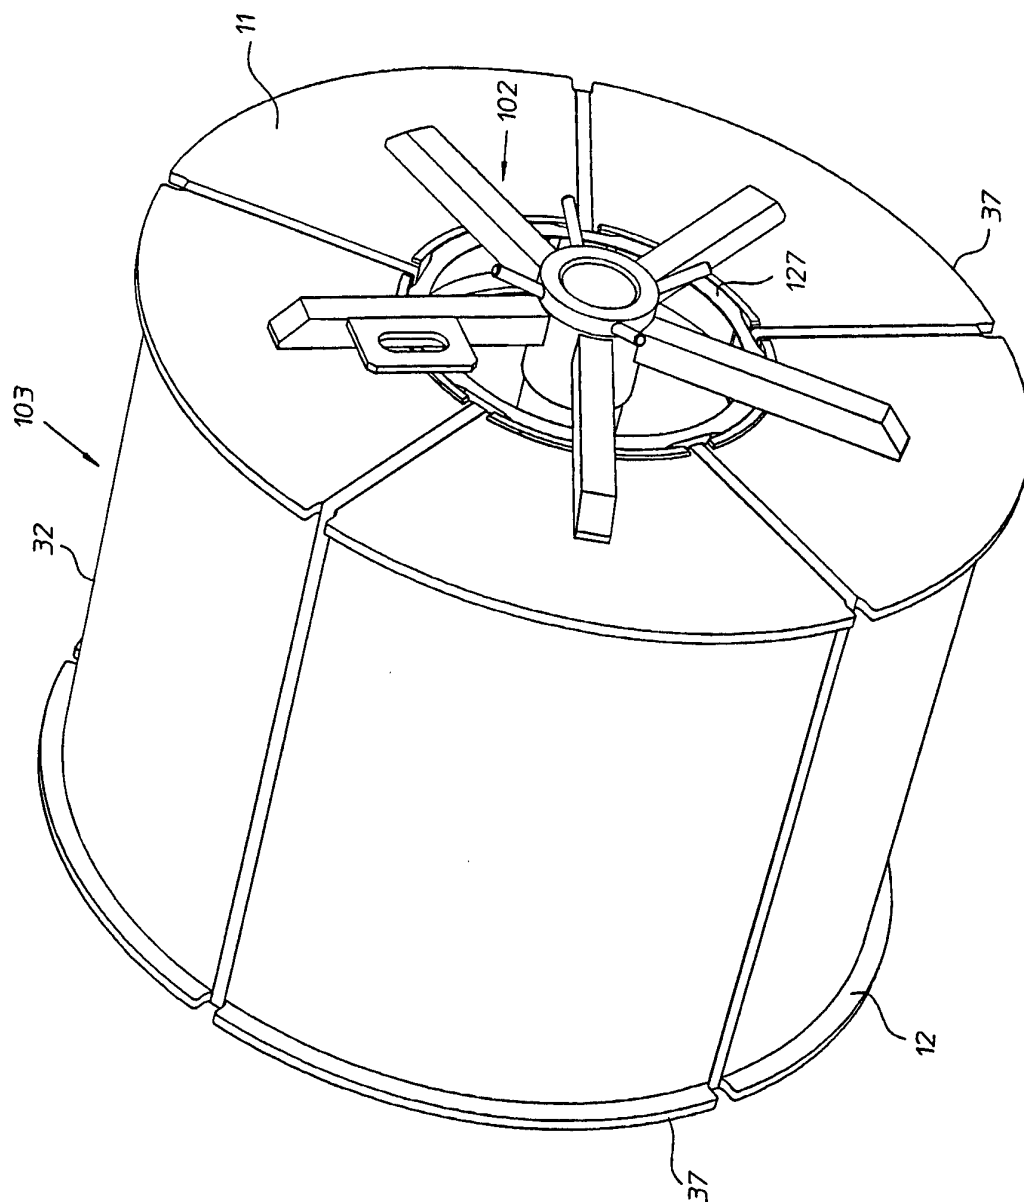


Fig 15

Fig 16



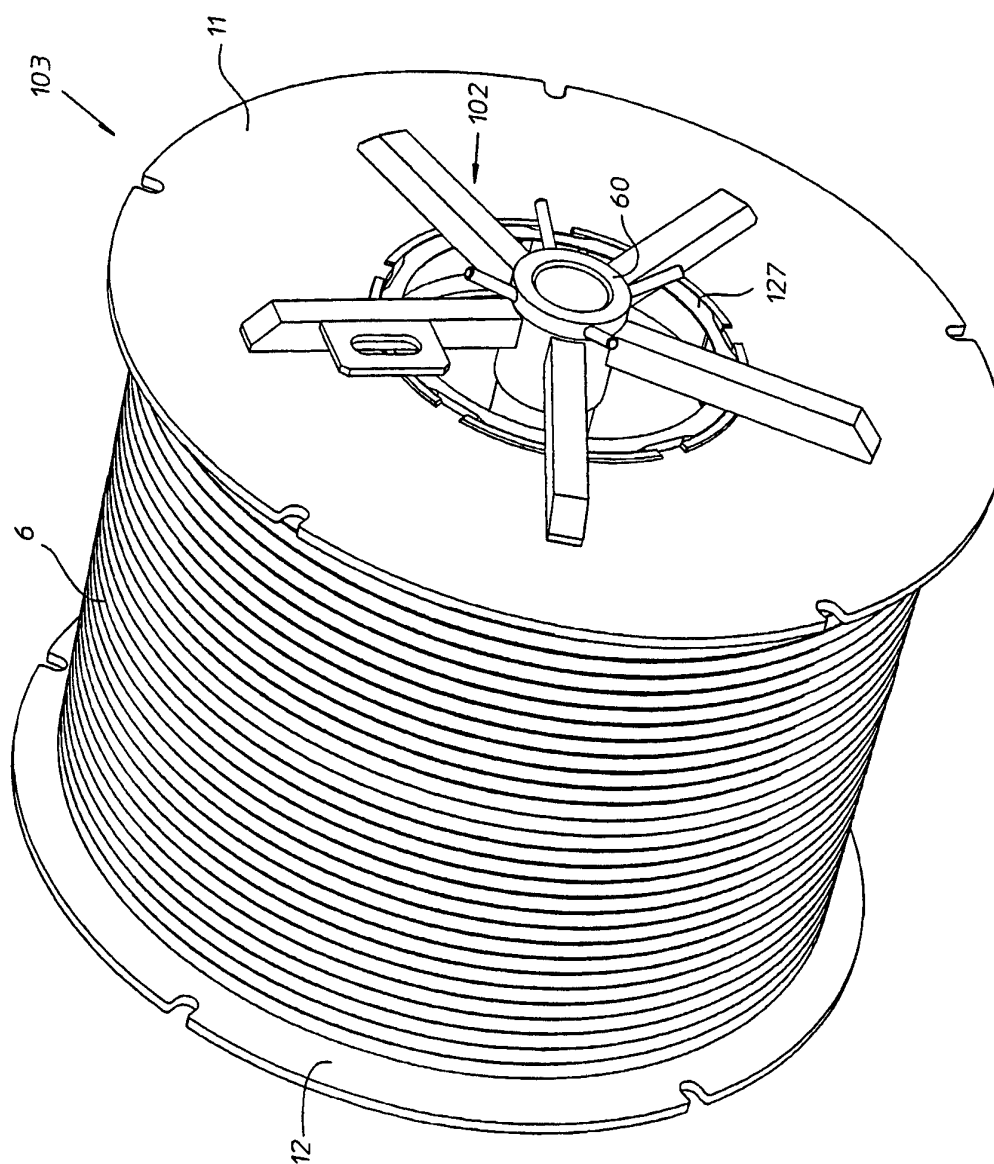


Fig 17

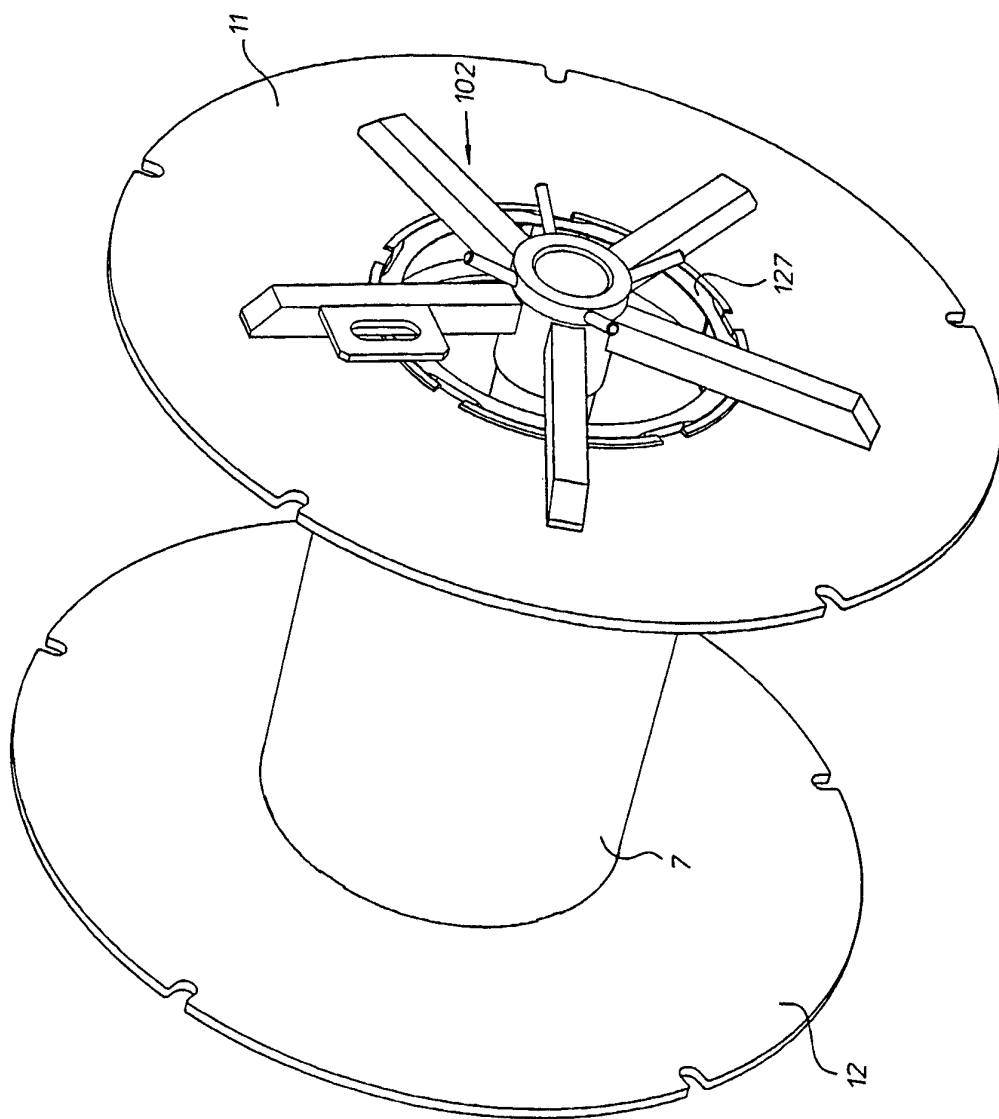


Fig 18

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00696

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B65H 75/14, B65H 54/553

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 379747 C (JOHANNES SCHMIDT), 27 August 1923 (27.08.23), page 2, line 41 - line 45, figures 2,4 --	10
X	US 2306907 A (W.F. STAHL), 29 December 1942 (29.12.42), figures 1-3 --	10
X	SE 467209 B (AB VÄRNAMO GUMMIFABRIK), 15 June 1992 (15.06.92), page 3 - page 4, figures 1-3 --	10
A	SE 339368 B (O. WESTIN), 4 October 1971 (04.10.71), figures 1-4 --	1-20

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

6 Sept. 1996

Date of mailing of the international search report

18 -09- 1996

Name and mailing address of the ISA/

Swedish Patent Office

Box 5055, S-102 42 STOCKHOLM

Facsimile No. +46 8 666 02 86

Authorized officer

Paul Winblad

Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 96/00696

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 9221603 A1 (ULVATOR INNOVATION AB), 10 December 1992 (10.12.92), figures 1-2, abstract --	1-20
A	US 3652026 A (AWEBRO), 28 March 1972 (28.03.72), figures 1-7, abstract --	1-20
A	US 5400567 A (LINDSTRAND), 28 March 1995 (28.03.95) --	1-20
A	US 5417384 A (LINDSTRAND), 23 March 1995 (23.03.95) -- -----	1-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

31/07/96

International application No.

PCT/SE 96/00696

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-C- 379747	27/08/23	NONE	
US-A- 2306907	29/12/42	NONE	
SE-B- 467209	15/06/92	EP-A- 0342739	23/11/89
		SE-A- 8801878	20/11/89
		US-A- 4976475	11/12/90
SE-B- 339368	04/10/71	NONE	
WO-A1- 9221603	10/12/92	AU-A- 1911092	08/01/93
		SE-B,C- 468713	08/03/93
		SE-A- 9101602	28/11/92
US-A- 3652026	28/03/72	NONE	
US-A- 5400567	28/03/95	AU-B- 640021	12/08/93
		AU-A- 7753591	11/11/91
		CA-A- 2080463	13/10/91
		EP-A- 0525093	03/02/93
		FI-B,C- 92684	15/09/94
		NO-B,C- 177344	22/05/95
		NO-B,C- 177960	18/09/95
		NO-A- 941405	07/12/92
		PL-B- 166623	30/06/95
		PL-B- 168767	30/04/96
		SE-B,C- 468129	09/11/92
		SE-A- 9101042	13/10/91
		WO-A- 9116261	31/10/91
US-A- 5417384	23/03/95	AT-T- 132464	15/01/96
		AU-B- 657762	23/03/95
		AU-A- 1911992	08/01/93
		BR-A- 9206057	06/12/94
		CA-A- 2110278	10/12/92
		DE-D,T- 69207408	15/05/96
		EP-A,B- 0586499	16/03/94
		ES-T- 2085017	16/05/96
		FI-D- 935238	00/00/00
		JP-T- 6508332	22/09/94
		NO-A- 934147	16/11/93
		SE-B,C- 470017	25/10/93
		SE-A- 9101600	28/11/92
		WO-A- 9221604	10/12/92
		HU-A- 68740	28/07/95
		HU-D- 9303199	00/00/00
		SE-B,C- 469929	11/10/93
		SE-A- 9200351	08/08/93
		WO-A- 9315866	19/08/93