



- (51) International Patent Classification:
B41J 2/175 (2006.01) *B41J 2/045* (2006.01)
- (21) International Application Number:
PCT/US2012/039055
- (22) International Filing Date:
23 May 2012 (23.05.2012)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HEW-LETT-PACKARD DEVELOPMENT COMPANY, L.P.** [US/US]; 11445 Compaq Center Drive W., Houston, Texas 77070 (US).
- (72) Inventors; and
(75) Inventors/Applicants (for US only): **ABELLO ROSELLO, Lluís** [ES/ES]; Cami de Can Graells, 1-21, E-08174 Sant Cugat del Valles (ES). **VIDAL FORTIA, Joan** [ES/ES]; Cami de Can Graells, 1-21, E-08174 Sant Cugat del Valles (ES). **BURNS, Ronald** [US/US]; 16399 W Bernardo Dr., San Diego, California 92127 (US).
- (74) Agents: **WEBB, Steven L** et al.; Hewlett-Packard Company, Intellectual Property Administration, 3404 East Harmony Road Mail Stop 35, Fort Collins, Colorado 80528 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD,

[Continued on next page]

(54) Title: PRINTING WITH MULTIPLE PRINTHEAD DIES

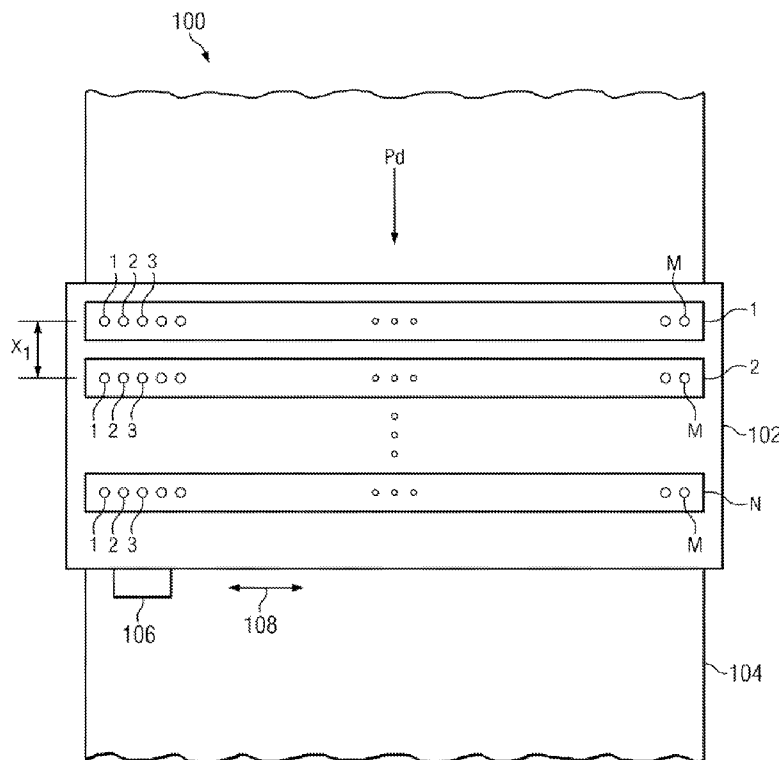


FIG. 1

(57) Abstract: A method and apparatus for printing is disclosed. The printing is done with multiple printhead dies. The nozzles in the different printhead dies are fired using different phases in an up-sampled encoder signal. The different phases correspond to a print offset between the different printhead dies.



SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- as to the identity of the inventor (Rule 4.17(i))
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))

Published:

- with international search report (Art. 21(3))

Printing with multiple printhead dies

BACKGROUND

[0001] Many inkjet printers use multiple printhead dies to print multiple colors each pass. The multiple printhead dies may be mounted in a carriage that scans back-and-forth across the media or in a page wide array (PWA).

BRIEF DESCRIPTION OF THE DRAWINGS

[0002] FIG. 1 is a top view of a printer 100 in an example embodiment of the invention.

[0003] FIG. 2 is a block diagram of printer 100 in an example embodiment of the invention.

[0004] FIG. 3 is a timing diagram for printing at 600 dpi, in an example embodiment of the invention.

[0005] FIG. 4 shows ink drops printed from two printhead dies in an example embodiment of the invention.

[0006] FIG. 5 is a flow chart for printing with multiple printhead dies in an example embodiment of the invention.

DETAILED DESCRIPTION

[0007] FIGS. 1 – 5 and the following description depict specific examples to teach those skilled in the art how to make and use the best mode of the invention. For the purpose of teaching inventive principles, some conventional aspects have been simplified or omitted. Those skilled in the art will appreciate variations from these examples that fall within the scope of the invention. Those skilled in the art will appreciate that the features described below can be combined in various ways to form multiple variations of the invention. As a result, the invention is not limited to the specific examples described below, but only by the claims and their equivalents.

[0008] Inkjet printers typically have one or more printhead dies where each printhead die has an array of nozzles. The printhead dies and media are moved relative to each other. In page wide array printers, the media is moved past the page wide array of print dies. Other inkjet printers have the print dies mounted on a carriage that moves back and forth across the media width while printing swaths of ink. The media is then advanced between the different swaths. In both cases the direction of motion between the printhead dies and the media is called the print direction. The spacing or resolution of the ink drops on the paper in the print direction is determined by the frequency of firing pulses sent to the printhead die and the speed the media is moving with respect to the printhead dies. The spacing or resolution of the ink drops on the paper in the axis perpendicular to the print axis is determined by the nozzle spacing on the printhead die and the number of nozzles used.

[0009] Figure 1 is a top view of a printer 100 in an example embodiment of the invention. Printer 100 is a page wide array printer with a print bar 102 extending across the width of the media 104. Media 104 is moved in the print direction shown by arrow PD. Print bar has multiple printhead dies numbered 1 - N. Each printhead die may be used to print ink of one color onto media 104, for example cyan, yellow, magenta or black. There may be multiple printhead dies used to print the same color. Each printhead die has a row of nozzles numbered 1 - M. Each nozzle can dispense ink drops onto media 104. A real printer would have more than one row of nozzles in each printhead die and may have multiple colors, but for clarity the number of rows of nozzles has been reduced. A sensor 106 is attached to print bar 102 and can be moved in an axis (shown by arrow 108) perpendicular to the print direction. Sensor 106 can be used to measure the position of the drops of ink deposited on media 104. In other examples, an external sensor may be used to measure the position of ink drops on the media.

[0010] The alignment of ink drops on the media from different printhead dies is affected by the spacing between the rows of nozzles in the different printhead dies and the speed the media is moving with respect to the printhead dies. The spacing in the print direction between the nozzles in the different printhead dies is X1. Distance X1 may vary due to manufacturing tolerance such that the spacing between the nozzles in the different printhead dies is non-uniform. For example, the spacing between the nozzles in

printhead die 2 and printhead die 3 may be $X1 + \delta$, and the spacing between the nozzles in printhead die 3 and printhead die 4 may be $X1 - \delta$. The alignment of ink drops from different printhead dies can also be affected by media stretch or shrinkage due to wetting by the ink, drying, media tension variations, media speed variations and the like. By measuring the ink drop location on the media from the different printhead dies, the firing pulses for the nozzles in the different printhead dies can be aligned/calibrated such that the drops from the different printhead dies align.

[0011] Figure 2 is a block diagram of printer 100 in an example embodiment of the invention. Printer 100 comprises a media positioning system 220, ink sensor 106, printhead dies 1 – N, an encoder 226, a controller 228, and communication bus 230. Media positioning system 220 may comprise drums, motors, sensors, feed rollers, take-up rollers and the like. Controller 228 may comprise one or more processors, an application specific integrated circuit (ASIC), memory, input/output circuitry and the like. Communication bus 230 may be any type of communication bus, for example USB. Controller 228 is coupled to media positioning system 220, ink sensor 106, printhead dies 1-N, and encoder 226 through bus 230. Memory in controller 228 may comprise both volatile and non-volatile memory. Code, stored in the memory, when executed by a processor on controller 228, causes printer 100 to take actions, for example printing ink on media 104.

[0012] Encoder 226 may be a 150 dpi quadrature encoder and output a 150 dpi encode signal. When using all 4 edges of the 150 dpi encoder signal a 600 dpi encode signal is generated. The output from encode 226 is used to derive the firing pulses for the different printhead dies. Printers typically print at multiple resolutions. For high quality jobs a printer may print at its native resolution, for example 1200 dots per inch (DPI). For high speed or lower quality jobs, the printing resolution may be 600 DPI. For draft modes the printing resolution may only be 300 to 150 DPI. The resolution for each print job is selected before the start of the print job. Once the print job resolution has been selected, the encoder signal will be up-sampled to a higher than printing resolution signal. For example, when printing at 600 dpi the encode signal will be up-sampled by 4X to 2400 dpi. The up-sampled 2400 dpi signal will be used to align the firing between the different printhead dies to sub-pixel accuracy at the printing resolution.

[0013] Figure 3 is a timing diagram for printing at 600 dpi, in an example embodiment of the invention. In figure 3, line 330 is the base encoder signal running at 600 dpi. Line 332 is an up-sampled encoder signal. In this example the base encoder signal has been up-sampled by 4X, so the up-sampled encoder signal 332 is at 2400 dpi. Lines 334, 336, 338 and 340 shows the firing pulses for printhead dies 1, 2, 3 and 4 respectively. The firing pulses in lines 334, 336, 338 and 340 are the column sync signal for printhead dies 1, 2, 3 and 4 respectively. The column sync for die 1 is aligned to phase 0 of the up-sampled encoder signal in line 332. The column sync for die 2 is aligned to phase 1 of the up-sampled encoder signal in line 332. This means die 2 will print dots of ink offset by $1/2400^{\text{th}}$ of an inch relative to dots of ink printed by die 1. $1/2400^{\text{th}}$ of an inch is $1/4$ of a pixel at the 600 dpi printing resolution.

[0014] The column sync for die 3 is aligned to phase 3 of the up-sampled encoder signal in line 332. This means die 3 will print dots of ink offset by $3/2400^{\text{th}}$ of an inch relative to dots of ink printed by die 1. The column sync for die 4 is aligned to phase 2 of the up-sampled encoder signal in line 332. This means die 4 will print dots of ink offset by $2/2400^{\text{th}}$ of an inch relative to dots of ink printed by die 1. Using this method, the ink drops from each printhead die can be aligned to sub-pixel accuracy at the print resolution. In one example embodiment of the invention, the up-sample rate is fixed and is independent of the print resolution. For example the encoder signal is always up-sampled by a factor of 4 so that the ink dots are aligned to within $1/4$ of the print resolution.

[0015] In another example embodiment of the invention, the up-sample rate is variable and is dependent on the print resolution. In this example, the up-sample rate would increase with decreasing print resolution. This could maintain the ink drop alignment between printhead dies at a constant physical distance. For example, when printing at 600 dpi, the up-sample rate may be 4X and when printing at 300 dpi the up-sample rate would be 8X. In each case the alignment between drops of ink printed by two different printhead dies would be $1/2400^{\text{th}}$ of an inch. This would be $1/4$ of a pixel at 600 dpi and $1/8$ of a pixel at 300 dpi.

[0016] The selected phase of the up-sampled encoder signal for two printhead dies corresponds to a print offset between ink drops printed from the two printhead dies. The print offset between two printhead dies can be determined in the following way. One or

more ink drops are printed by each of the two printhead dies using the encoder signals for each printhead die that should align the ink drops deposited on the media. The distance between the nozzles in the two printhead dies and the media speed past the printhead dies affect the alignment of the ink on the media. In some instances, the encoder signal for each printhead die that should align ink drops from the two printhead dies may not be in the same phase. The ink drops that should align are printed and then the location or position of the ink drops on the media are measured. During a long print job, conditions in the printer and/or the media may change such that the encoder signals that should align the ink drops from the two printhead dies no longer align the ink drops from the two printhead dies.

[0017] The position of the ink drops are measured using an ink sensor. The print offset corresponds to the miss-alignment between the ink drops printed by the two printhead dies. Figure 4 shows ink drops printed from two printhead dies in an example embodiment of the invention. Ink drops 450 have been printed from printhead die 1. Ink drops 452 have been printed from printhead die 2. Both printhead dies are printing at the same resolution which corresponds to a spacing between ink drops of distance R . A time axis/print direction is running along the bottom of figure 4 with increments of $\frac{1}{4} R$. The ink drops or dots from the two printhead dies should be aligned vertically. The ink drops from printhead die 1 are offset from printhead die 2 by distance PO . Distance PO is the print offset. In this example the print offset (distance PO) corresponds to approximately $\frac{3}{8} R$.

[0018] When the encoder signal is up-sampled by a factor of 4 from the print resolution, the miss-alignment between print dies can be corrected within $\frac{1}{4}$ of the print resolution. The print resolution in figure 4 is R . To align the ink drops in figure 4 the nozzles from die 1 (in figure 4) will be fired at phase 1 and the nozzles in die 2 will be fired at phase 0. This will shift the positions of the drops from die 1 by $\frac{1}{4} R$ to the right with respect to the ink drops from die 2. Once the ink drops have been shifted, the ink drops from die 1 will be aligned to within $\frac{1}{4} R$ to the ink drops from die 2. If the encoder signal in figure 4 was up-sampled by a factor of 8, the miss-alignment between print dies could be corrected to within $\frac{1}{8}$ of the print resolution or $\frac{1}{8}$ of R . In this case the nozzles from die 1 (in figure 4) will be fired at phase 3 and the nozzles in die 2 will be

fired at phase 0. This will shift the positions of the drops from die 1 by $3/8 R$ to the right with respect to the ink drops from die 2. Once the ink drops have been shifted, the ink drops from die 1 will be aligned to within $1/8$ of R to the ink drops from die 2

[0019] The print offset between two printhead dies can be measured by printing drops in a number of different locations. In some examples the ink drops are measured by looking at ink deposited in a page or image being printed. In other examples, the ink drops to be measured may be deposited between pages or in the margin alongside pages being printed. Because the ink drops can be measured in these different locations, the print offset between printhead dies can be updated dynamically during a print job. This allows the alignment between printhead dies to be adjusted on a per page bases, if needed. In some examples, the alignment between printhead dies may be updated on a periodic time period or at the start of each print job. In other examples, the alignment between printhead dies may be updated whenever the print offset exceeds a threshold value.

[0020] Figure 5 is a flow chart for printing with multiple printhead dies in an example embodiment of the invention. At step 570 a print resolution in a printing axis is determined. At step 572 an encoder signal is up-sampled to a higher than print resolution. At step 574 the firing phase in the up-sampled encode signal is selected for a first one of the two printhead dies to be aligned. And the firing phase in the up-sampled encode signal is selected for the second of the two printhead dies to be aligned. At step 576 the nozzles in the first printhead die are fired at the printing resolution, starting at the firing phase for the first die. The nozzles in the second printhead die are fired at the printing resolution, starting at the firing phase for the second die.

[0021] The examples above describe adjusting the alignment of printhead dies using a page wide array printer. Adjusting the alignment of printhead dies using this method may also be done for inkjet printers that have printhead dies moving across the media in a carriage.

[0022] CLAIMS

What is claimed is:

1. A printer, comprising:
 - at least two printhead dies in a spaced apart relationship, where each printhead die comprises a plurality of nozzles;
 - an encoder that provides an encoder signal;
 - a controller coupled to the two printhead dies and the encoder, the controller to control the printer;
 - the controller to up-sample the encoder signal to higher than a print resolution in a print direction;
 - the controller to select a first one of the up-sampled encoder signal phases for a first one of the at least two printhead dies;
 - the controller to select a second one of the up-sampled encoder signal phases for a second one of the at least two printhead dies, wherein the difference between the first one and the second one of the up-sampled encoder signal phases corresponds to a print offset between the first printhead die and the second printhead die;
 - the controller to fire nozzles in the first printhead die at the print resolution beginning at the first one of the up-sampled encoder signal phases;
 - the controller to fire nozzles in the second printhead die at the print resolution beginning at the second one of the up-sampled encoder signal phases.
2. The printer of claim 1, further comprising:
 - an ink sensor, the ink sensor to sense the position of ink, deposited on media loaded in the printer, by the at least two printhead dies;
 - the controller coupled to the ink sensor, the controller to determine the print offset from the position of the ink on the media.
3. The printer of claim 2, wherein the controller determines the print offset periodically.

4. The printer of claim 3, wherein the controller re-selects the first one and the second one of the up-sampled encoder signal phases when the print offset exceeds a threshold value.
5. The printer of claim 2, wherein the controller uses ink drops printed in the margins of the page to determine the print offset.
6. The printer of claim 1, wherein the controller uses an up-sample rate when the controller up-samples the encoder signal to higher than the print resolution, and the up-sample rate is selected from the following group of up-sample rates: 4X, 6X, 8X, 10X, 12X, 16X, 32X, 64X and 128X.
7. The printer of claim 1, wherein the controller uses an up-sample rate when the controller up-samples the encoder signal to higher than the print resolution, and the up-sample rate is dependent on the print resolution.
8. A method for printing, comprising
 - determining a print resolution in a print axis;
 - up-sampling an encoder signal to higher than the print resolution;
 - determining a print offset between a first printhead die and a second printhead die;
 - selecting a first one of the up-sampled encoder signal phases for the first printhead die;
 - selecting a second one of the up-sampled encoder signal phases for the second printhead die, wherein the difference between the first one and the second one of the up-sampled encoder signal phases corresponds to the print offset;
 - firing nozzles in the first printhead die at the print resolution starting at the first one of the up-sampled encoder signal phases;
 - firing nozzles in the second printhead die at the print resolution starting at the second one of the up-sampled encoder signal phases.

9. The method of claim 7, where the print resolution is less than a native resolution in the print axis.

10. The method of claim 7, wherein determining the print offset between the first printhead die and the second printhead die is done during a print job.



11. The method of claim 7, wherein determining the print offset between the first printhead die and the second printhead die is done using ink printed between pages in a print job.

12. The method of claim 7, further comprising:

determining a print offset between the second printhead die and a third printhead die;

selecting a third one of the up-sampled encoder signal phases for the third printhead die, wherein the difference between the second one and the third one of the up-sampled encoder signal phases corresponds to the print offset between the second printhead die and a third printhead die;

firing nozzles in the third printhead die at the print resolution starting at the third one of the up-sampled encoder signal phases.

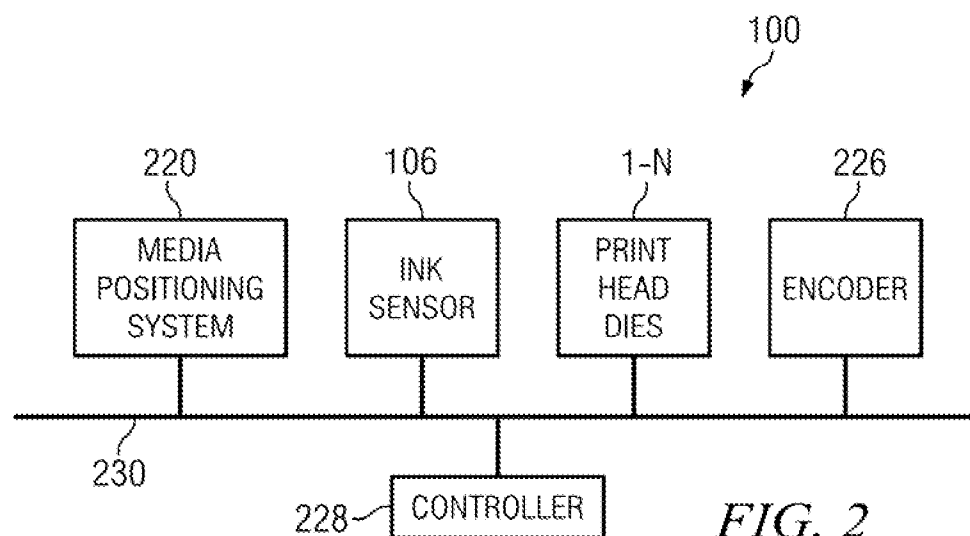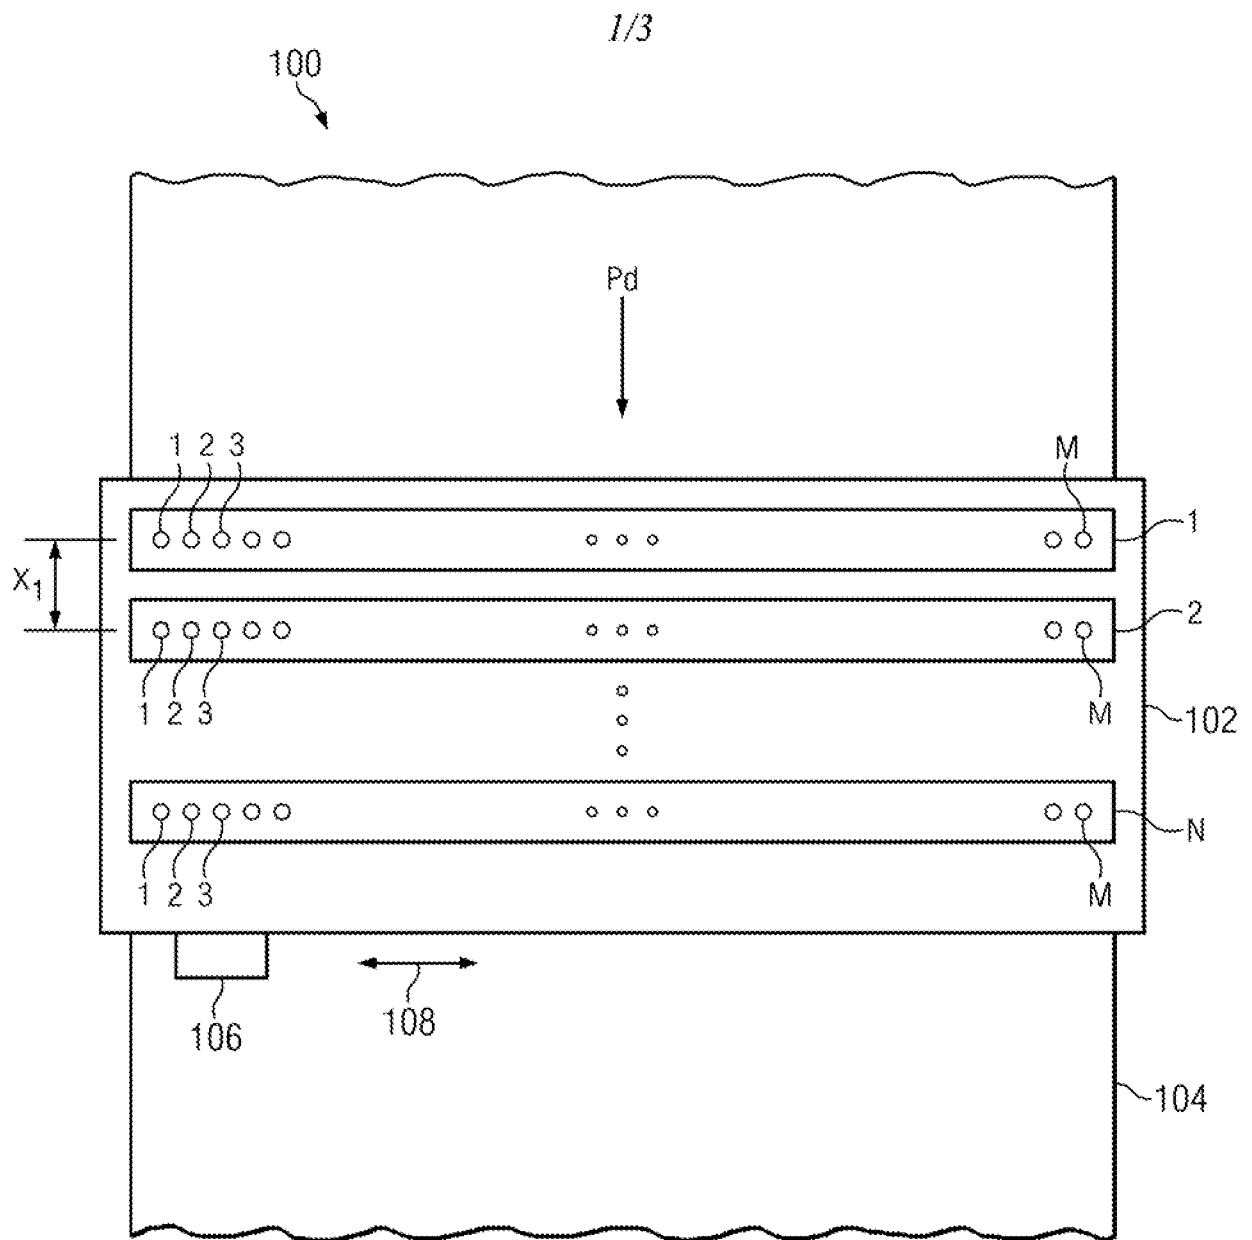

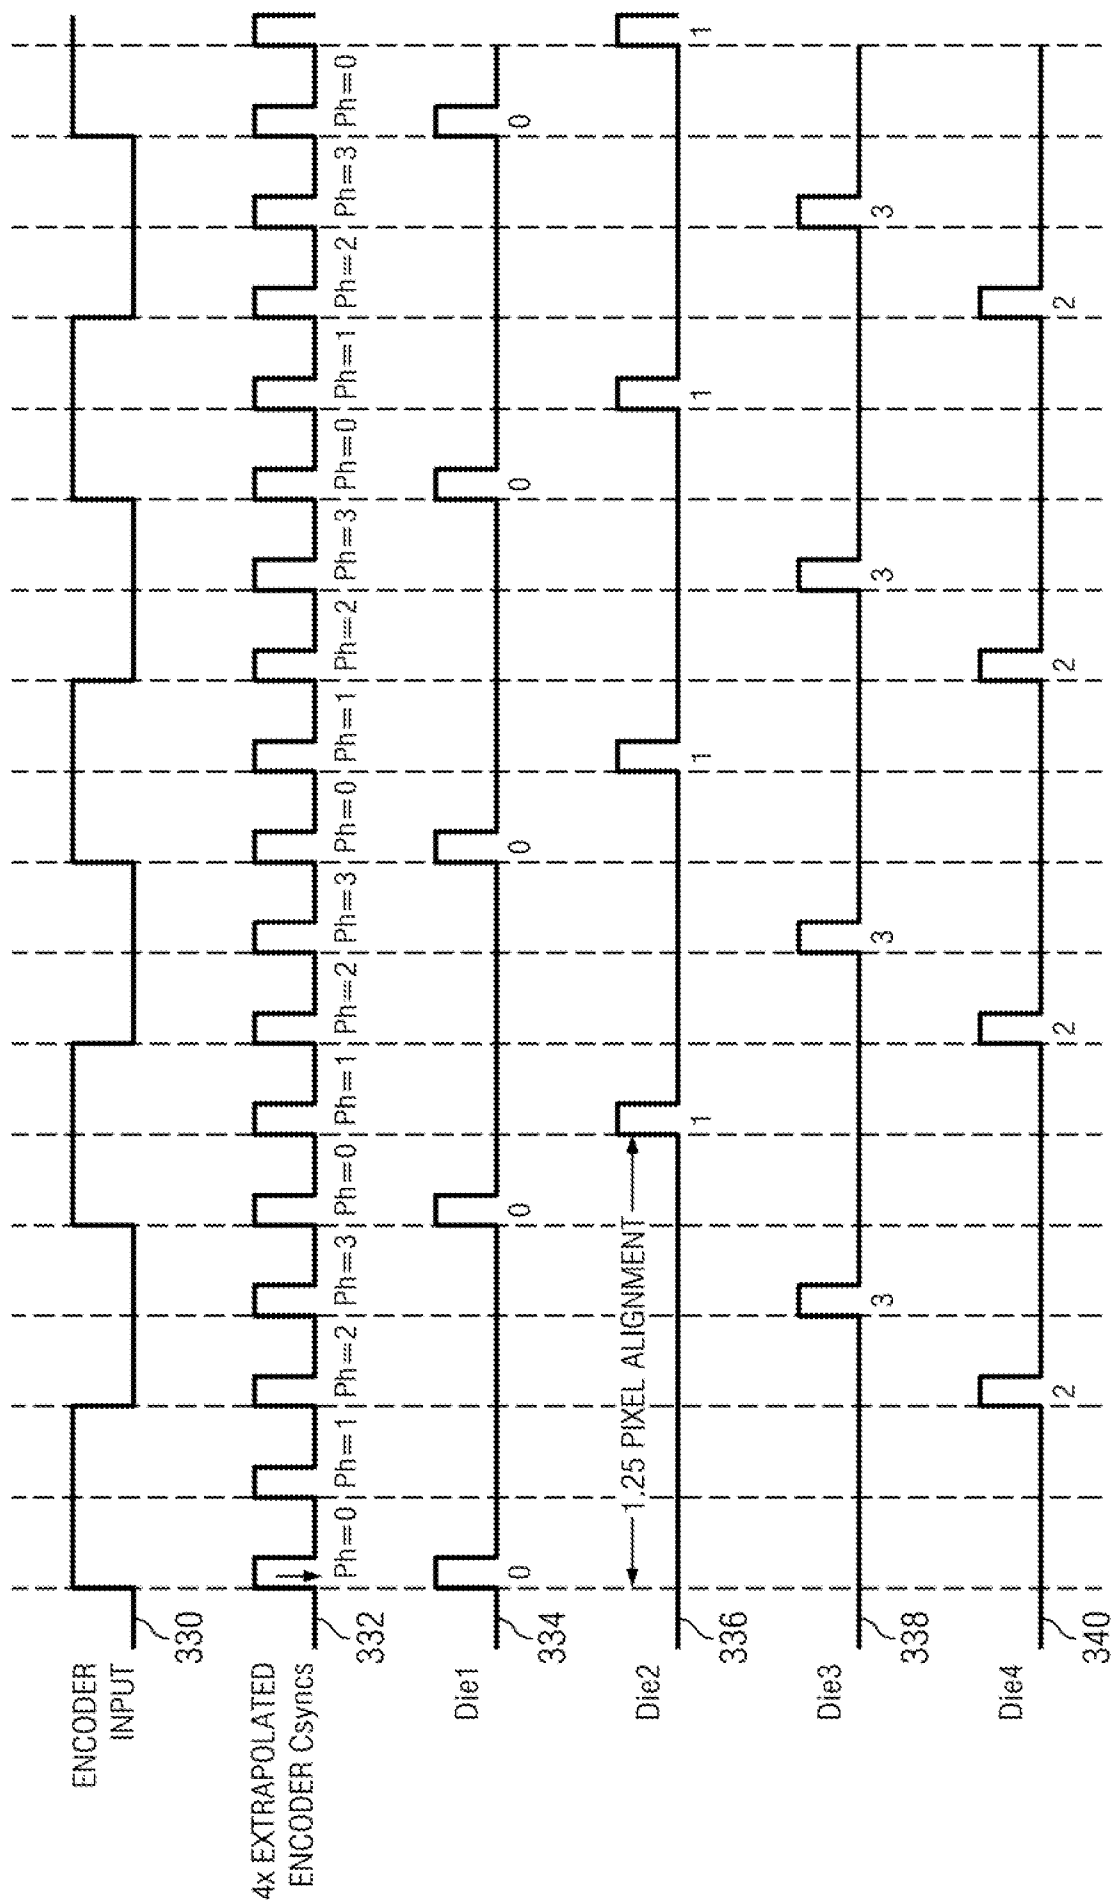


FIG. 3

3/3

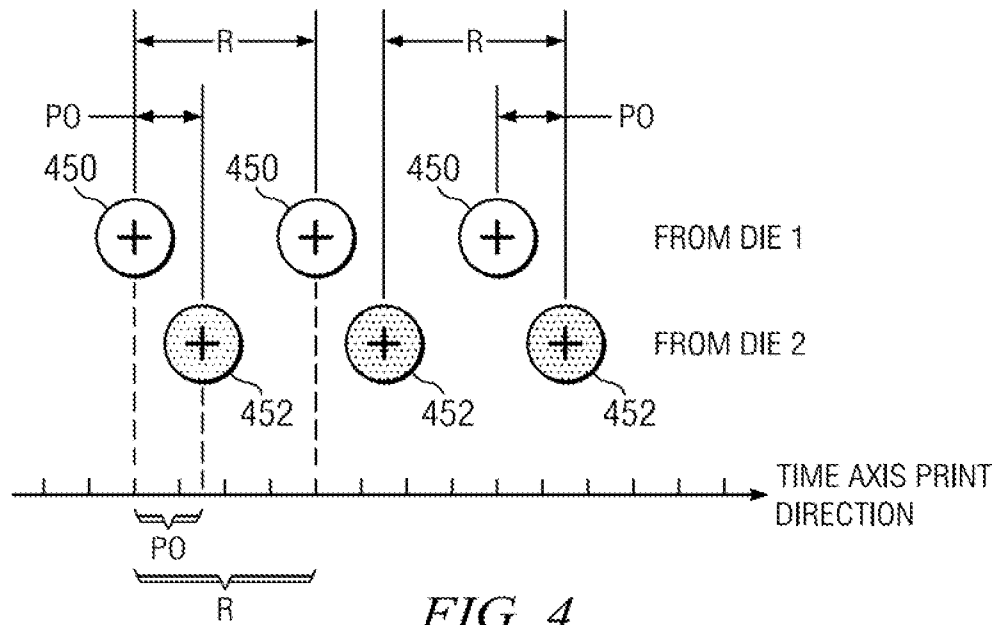


FIG. 4

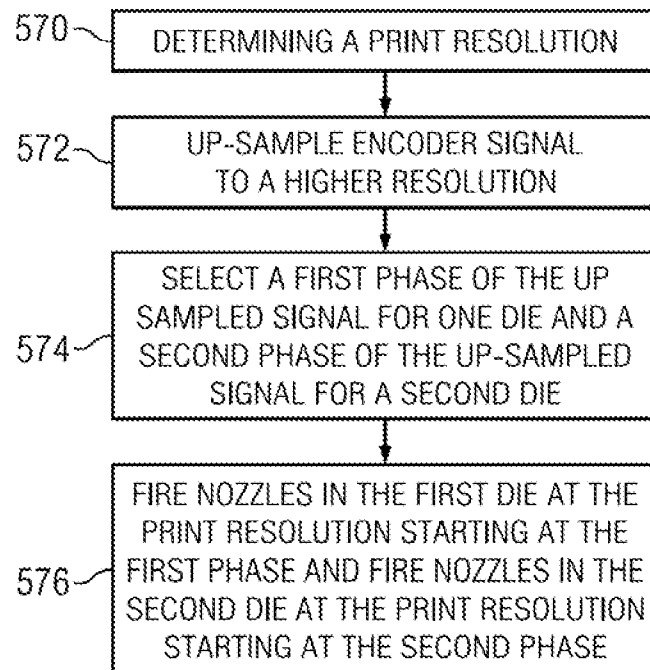


FIG. 5

A. CLASSIFICATION OF SUBJECT MATTER***B41J 2/175(2006.01)i, B41J 2/045(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B41J 2/175; B41J 2135; B41J 2205; B41J 2/145; B41J 2/21; B41J 29/38

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: "printhead", "print offset", "encoder", "resolution", "sampling", "die"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004-0061730 A1 (RONALD A. ASKELAND et al.) 01 April 2004 See figures 5A-5D and paragraphs 0032-0035.	1-12
A	US 2006-0170716 A1 (SANTIAGO REYERO et al.) 03 August 2006 See paragraphs 0032-0035 and figures 5A-5C,6.	1-12
A	KR 10-0788664 B1 (SAMSUNG ELECTRONICS CO., LTD.) 26 December 2007 See figures 3A-3C,10 and paragraphs 0066-0068,0096-0100.	1-12
A	US 6824239 B1 (HANABUSA TADASHI et al.) 30 November 2004 See claim 1.	1-12



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

13 FEBRUARY 2013 (13.02.2013)

Date of mailing of the international search report

15 FEBRUARY 2013 (15.02.2013)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsu-ro, Seo-gu, Daejeon Metropolitan
City, 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

CHO, Choon Geun

Telephone No. 82-42-481-8482



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2012/039055

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2004-0061730 A1	01.04.2004	DE 60203215 D1	21.04.2005
		DE 60203215 T2	11.05.2006
		EP 1270225 A1	02.01.2003
		EP 1270225 B1	16.03.2005
		JP 2003-048319 A	18.02.2003
		US 2003-0001915 A1	02.01.2003
		US 6648440 B2	18.11.2003
US 2006-0170716 A1	03.08.2006	US 7255413 B2	14.08.2007
KR 10-0788664 B1	26.12.2007	CN 1868746 A	29.11.2006
		CN 1868746 C0	29.11.2006
		US 2006-0268061 A1	30.11.2006
		US 7637590 B2	29.12.2009
US 6824239 B1	30.11.2004	DE 60127910 D1	31.05.2007
		DE 60127910 T2	06.09.2007
		EP 1188569 A2	20.03.2002
		EP 1188569 A3	06.08.2003
		EP 1188569 B1	18.04.2007
		JP 2002-178503 A	26.06.2002
		US 2005-0012769 A1	20.01.2005
		US 6926381 B2	09.08.2005