

(12) PATENT
(19) AUSTRALIAN PATENT OFFICE

(11) Application No. **AU 199668809 B2**
(10) Patent No. **703000**

(54) Title
Visual display means incorporating loudspeakers

(51)⁶ International Patent Classification(s)
H04R 005/02 H04R 007/06
H04N 005/64

(21) Application No: **199668809** (22) Application Date: **1996 .09 .02**

(87) WIPO No: **WO97/09852**

(30) Priority Data

(31) Number	(32) Date	(33) Country
9517918	1995 .09 .02	GB
9522281	1995 .10 .31	GB
9606836	1996 .03 .30	GB

(43) Publication Date : **1997 .03 .27**

(43) Publication Journal Date : **1997 .05 .22**

(44) Accepted Journal Date : **1999 .03 .11**

(71) Applicant(s)
New Transducers Limited

(72) Inventor(s)
Henry Azima; Martin Colloms; Neil Harris

(74) Agent/Attorney
SPRUSON and FERGUSON,GPO Box 3898,SYDNEY NSW 2001

(56) Related Art
WO 92/03024
FR 2649575
US 3247925

OPI DATE 27/03/97 APPLN. ID 68809/96
AOJP DATE 22/05/97 PCT NUMBER PCT/GB96/02151



AU9668809

(CT)

(51) International Patent Classification:

H04R 5/02, H04N 5/64, H04R 7/06

A2

(11) International Publication Number:

WO 97/09852

(43) International Publication Date:

13 March 1997 (13.03.97)

(21) International Application Number: PCT/GB96/02151

(22) International Filing Date: 2 September 1996 (02.09.96)

(30) Priority Data:

9517918.0	2 September 1995 (02.09.95)	GB
9522281.6	31 October 1995 (31.10.95)	GB
9606836.6	30 March 1996 (30.03.96)	GB

NEW TRANSDUCERS LIMITED

(71) Applicant (for all designated States except US): ~~VERITY GROUP PLC~~ (GB/GB); Stonehill, Huntingdon, Cambridgeshire PE18 6ED (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): AZIMA, Henry [CA/GB]; 3 Southacre Close, Chaucer Road, Cambridge CB2 2TT (GB). COLLOMS, Martin [GB/GB]; 22 Burgess Hill, London NW2 2DA (GB). HARRIS, Neil [GB/GB]; 9 Davey Crescent, Great Shelford, Cambridge CB2 5JF (GB).

(74) Agent: MAGUIRE & CO.; 5 Crown Street, St. Ives, Cambridgeshire PE17 4EB (GB).

(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published


Without international search report and to be republished upon receipt of that report.



(54) Title: VISUAL DISPLAY MEANS INCORPORATING LOUDSPEAKERS

(57) Abstract

A visual display unit (137) comprising a display screen (37) and a housing (101) in which the display screen is mounted, characterised in that the housing carries a loudspeaker (81) comprising a distributed mode acoustic radiator and transducer means (9) mounted wholly and exclusively on the radiator to vibrate the radiator to cause it to resonate.

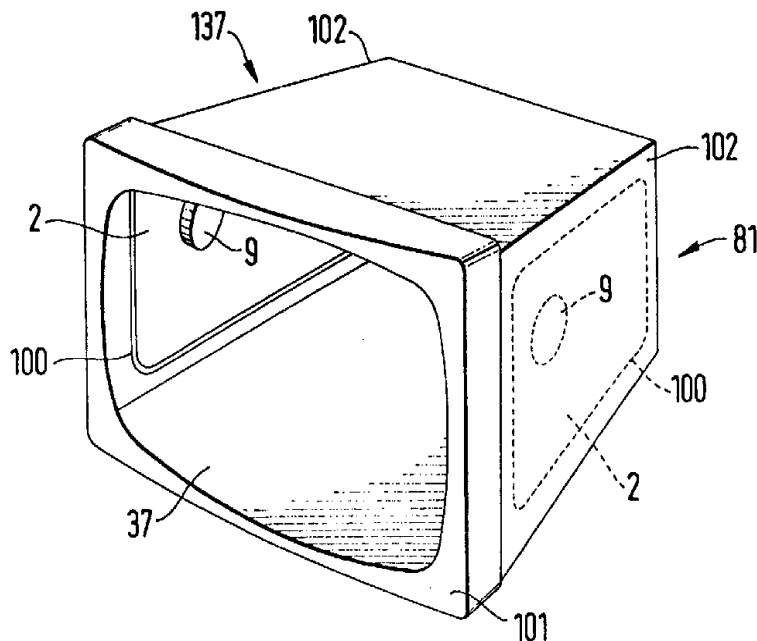

5 VISUAL DISPLAY MEANS INCORPORATING LOUDSPEAKERS

10 DESCRIPTION15 TECHNICAL FIELD

The invention relates to visual display apparatus and more particularly to visual display means (hereinafter visual display units) incorporating loudspeakers.

BACKGROUND ART

20 It is known from GB-A-2262861 to suggest a panel-form loudspeaker comprising:-

a resonant multi-mode radiator element being a unitary sandwich panel formed of two skins of material with a spacing core of transverse cellular construction, wherein
25 the panel is such as to have ratio of bending stiffness (B), in all orientations, to the cube power of panel mass per unit surface area (μ) of at least 10;

a mounting means which supports the panel or attaches

to it a supporting body, in a free undamped manner;

and an electro-mechanical drive means coupled to the panel which serves to excite a multi-modal resonance in the radiator panel in response to an electrical input within a
5 working frequency band for the loudspeaker.

DISCLOSURE OF INVENTION

Embodiments of the present invention use members of nature, structure and configuration achievable generally and/or specifically by implementing teachings of our co-
10 pending PCT publication No. WO97/09842 of even date herewith. Such members thus have capability to sustain and propagate input vibrational energy by bending waves in operative area(s) extending transversely of thickness often but not necessarily to edges of the member(s); are
15 configured with or without anisotropy of bending stiffness to have resonant mode vibration components distributed over said area(s) beneficially for acoustic coupling with ambient air; and have predetermined preferential locations or sites within said area for transducer means,
20 particularly operationally active or moving part(s) thereof effective in relation to acoustic vibrational activity in said area(s) and signals, usually electrical, corresponding to acoustic content of such vibrational activity. Uses are envisaged in co-pending International publication No.
25 WO97/09842 for such members as or in "passive" acoustic devices without transducer means, such as for reverberation or for acoustic filtering or for acoustically "voicing" a space or room; and as or in "active" acoustic devices with

AMENDED SHEET

transducer means, such as in a remarkably wide range of sources of sound or loudspeakers when supplied with input signals to be converted to said sound, or in such as microphones when exposed to sound to be converted into
5 other signals.

This invention is particularly concerned with active acoustic devices e.g. in the form of loudspeakers for visual display means. Members as above are herein called distributed mode radiators and are intended to be
10 characterised as in the above PCT application and/or otherwise as specifically provided herein.

The invention is a visual display unit comprising a display screen, a housing in which the display screen is mounted and a loudspeaker in the housing, characterised in
15 that the loudspeaker comprises a stiff lightweight member having capability to sustain and propagate input vibrational energy by bending waves in at least one operative area extending transversely of thickness to have resonant mode vibration components distributed over said at
20 least one area and have predetermined preferential locations or sites within said area for transducer means and having a transducer mounted wholly and exclusively on said member at one of said locations or sites to vibrate the member to cause it to resonate forming an acoustic
25 radiator which provides an acoustic output when resonating. The radiator may be integral with the housing. The housing may have an external wall with which the radiator is integral. The radiator may comprise a cellular core

3a

sandwiched by skin layers, one of which skin layers is integral with the housing. The said one skin layer may be thinner than the average wall thickness of the housing.

- 5 The external wall of the housing may be formed with a groove which surrounds the radiator and which defines a resilient suspension coupling the loudspeaker to the housing. At least one slot may be provided in the groove to increase the compliance of the suspension.

10

BRIEF DESCRIPTION OF DRAWINGS

AMENDED SHEET

The invention is diagrammatically illustrated, by way of example, in the accompanying drawings, in which:-

Figure 1 is a diagram showing a distributed-mode loudspeaker as described and claimed in our co-pending
5 International publication No. WO97/09842;

Figure 2a is a partial section on the line A-A of Figure 1;

Figure 2b is an enlarged cross-section through a distributed mode radiator of the kind shown in Figure 2a
10 and showing two alternative constructions;

Figure 3 is a perspective diagram of an embodiment of visual display unit incorporating a loudspeaker according to the present invention, and

Figure 4 is a partial cross-sectional view, through
15 the loudspeaker shown in Figure 3.

BEST MODES FOR CARRYING OUT THE INVENTION

Referring to Figure 1 of the drawings, there is shown a panel-form loudspeaker (81) of the kind described and claimed in our co-pending International publication No. WO97/09842 of even date herewith comprising a rectangular
5 frame (1) carrying a resilient suspension (3) round its inner periphery which supports a distributed mode sound radiating panel (2). A transducer (9) e.g as described in detail with reference to our co-pending International publication Nos. WO97/09859, WO97/09861, WO97/09858 of even
10 date herewith, is mounted wholly and exclusively on or in the panel (2) at a predetermined location defined by dimensions x and y , the position of which location is

calculated as described in our co-pending International publication No. WO97/09842 of even date herewith, to launch bending waves into the panel to cause the panel to resonate to radiate an acoustic output.

5 The transducer (9) is driven by a signal amplifier (10), e.g. an audio amplifier, connected to the transducer by conductors (28). Amplifier loading and power requirements can be entirely normal, similar to conventional cone type speakers, sensitivity being of the
10 order of 86 - 88dB/watt under room loaded conditions. Amplifier load impedance is largely resistive at 6 ohms, power handling 20-80 watts. Where the panel core and/or skins are of metal, they may be made to act as a heat sink for the transducer to remove heat from the motor coil of
15 the transducer and thus improve power handling.

Figures 2a and 2b are partial typical cross-sections through the loudspeaker (81) of Figure 1. Figure 2a shows that the frame (1), surround (3) and panel (2) are connected together by respective adhesive-bonded joints
20 (20). Suitable materials for the frame include lightweight framing, e.g. picture framing of extruded metal e.g. aluminium alloy or plastics. Suitable surround materials include resilient materials such as foam rubber and foam plastics. Suitable adhesives for the joints (20) include
25 epoxy, acrylic and cyano-acrylate etc. adhesives.

Figure 2b illustrates, to an enlarged scale, that the panel (2) is a rigid lightweight panel having a core (22) e.g. of a rigid plastics foam (97) e.g. cross linked

polyvinylchloride or a cellular matrix (98) i.e. a honeycomb matrix of metal foil, plastics or the like, with the cells extending transversely to the plane of the panel, and enclosed by opposed skins (21) e.g. of paper, card, plastics or metal foil or sheet. Where the skins are of plastics, they may be reinforced with fibres e.g. of carbon, glass, Kevlar (RTM) or the like in a manner known per se to increase their modulus.

Envisaged skin layer materials and reinforcements thus include carbon, glass, Kevlar (RTM), Nomex (RTM) i.e. aramid etc. fibres in various lays and weaves, as well as paper, bonded paper laminates, melamine, and various synthetic plastics films of high modulus, such as Mylar (RTM), Kaptan (RTM), polycarbonate, phenolic, polyester or related plastics, and fibre reinforced plastics, etc. and metal sheet or foil. Investigation of the Vectra grade of liquid crystal polymer thermoplastics shows that they may be useful for the injection moulding of ultra thin skins or shells of smaller size, say up to around 30cm diameter. This material self forms an orientated crystal structure in the direction of injection, a preferred orientation for the good propagation of treble energy from the driving point to the panel perimeter.

Additional such moulding for this and other thermoplastics allows for the mould tooling to carry location and registration features such as grooves or rings for the accurate location of transducer parts e.g. the motor coil, and the magnet suspension. Additional with

some weaker core materials it is calculated that it would be advantageous to increase the skin thickness locally e.g. in an area or annulus up to 150% of the transducer diameter, to reinforce that area and beneficially couple vibration energy into the panel. High frequency response will be improved with the softer foam materials by this means.

Envisaged core layer materials include fabricated honeycombs or corrugations of aluminium alloy sheet or foil, or Kevlar (RTM), Nomex (RTM), plain or bonded papers, and various synthetic plastics films, as well as expanded or foamed plastics or pulp materials, even aerogel metals if of suitably low density. Some suitable core layer materials effectively exhibit usable self-skinning in their manufacture and/or otherwise have enough inherent stiffness for use without lamination between skin layers. A high performance cellular core material is known under the trade name 'Rohacell' which may be suitable as a radiator panel and which is without skins. In practical terms, the aim is for an overall lightness and stiffness suited to a particular purpose, specifically including optimising contributions from core and skin layers and transitions between them.

Several of the preferred formulations for the panel employ metal and metal alloy skins, or alternatively a carbon fibre reinforcement. Both of these, and also designs with an alloy Aerogel or metal honeycomb core, will have substantial radio frequency screening properties which

should be important in several EMC applications. Conventional panel or cone type speakers have no inherent EMC screening capability.

In addition the preferred form of piezo and electro
5 dynamic transducers have negligible electromagnetic radiation or stray magnet fields. Conventional speakers have a large magnetic field, up to 1 metre distant unless specific compensation counter measures are taken.

Where it is important to maintain the screening in an
10 application, electrical connection can be made to the conductive parts of an appropriate DML panel or an electrically conductive foam or similar interface may be used for the edge mounting.

The suspension (3) may damp the edges of the panel (2)
15 to prevent excessive edge movement of the panel. Additionally or alternatively, further damping may be applied, e.g. as patches, bonded to the panel in selected positions to damp excessive movement to distribute resonance equally over the panel. The patches may be of
20 bitumen-based material, as commonly used in conventional loudspeaker enclosures or may be of a resilient or rigid polymeric sheet material. Some materials, notably paper and card, and some cores may be self-damping. Where desired, the damping may be increased in the construction
25 of the panels by employing resiliently setting, rather than rigid setting adhesives.

Effective said selective damping includes specific application to the panel including its sheet material of

means permanently associated therewith. Edges and corners can be particularly significant for dominant and less dispersed low frequency vibration modes of panels hereof. Edge-wise fixing of damping means can usefully lead to a
5 panel with its said sheet material fully framed, though their corners can often be relatively free, say for desired extension to lower frequency operation. Attachment can be by adhesive or self-adhesive materials. Other forms of useful damping, particularly in terms of more subtle
10 effects and/or mid- and higher frequencies can be by way of suitable mass or masses affixed to the sheet material at predetermined effective medial localised positions of said area.

An acoustic panel as described above is bi-
15 directional. The sound energy from the back is not strongly phase related to that from the front. Consequently there is the benefit of overall summation of acoustic power in the room, sound energy of uniform frequency distribution, reduced reflective and standing
20 wave effects and with the advantage of superior reproduction of the natural space and ambience in the reproduced sound recordings.

While the radiation from the acoustic panel is largely non-directional, the percentage of phase related
25 information increases off axis. For improved focus for the phantom stereo image, placement of the speakers, like pictures, at the usual standing person height, confers the benefit of a moderate off-axis placement for the normally

seated listener optimising the stereo effect. Likewise the triangular left/right geometry with respect to the listener provides a further angular component. Good stereo is thus obtainable.

5 There is a further advantage for a group of listeners compared with conventional speaker reproduction. The intrinsically dispersed nature of acoustic panel sound radiation gives it a sound volume which does not obey the inverse square law for distance for an equivalent point
10 source. Because the intensity fall-off with distance is much less than predicted by inverse square law then consequently for off-centre and poorly placed listeners the intensity field for the panel speaker promotes a superior stereo effect compared to conventional speakers. This is
15 because the off-centre placed listener does not suffer the doubled problem due to proximity to the nearer speaker; firstly the excessive increase in loudness from the nearer speaker, and then the corresponding decrease in loudness from the further loudspeaker.

20 There is also the advantage of a flat, lightweight panel-form speaker, visually attractive, of good sound quality and requiring only one transducer and no crossover for a full range sound from each panel diaphragm.

Figure 3 illustrates a visual display unit (137) e.g.
25 a computer monitor or the like having a screen (37) formed in any desired fashion e.g. as a cathode ray tube or as a liquid crystal display. The unit (137) comprises a box-like housing (101) having opposed sides (102) each of which

is formed to incorporate a multi-mode acoustic radiator (2) generally similar to that described above with reference to Figures 1 and 2 to form loudspeaker (81).

The housing (101) is moulded from plastics and the
5 opposed sides (102) are moulded with generally rectangular relatively thin rectangular areas, in comparison to the general thickness of the housing, bounded by grooves (100) to define the radiators (2). These areas (2) are stiffened on their inner faces with a lightweight core (22) which is
10 backed by an inner skin (21) to form a rigid lightweight multi-mode radiator panel (2) of the kind described above e.g. with reference to Figures 1 and 2. The grooves effectively define a resilient suspension (3) of the kind shown in Figures 1 and 2 and the surrounding housing (101)
15 forms the frame (1). Slots (not shown) may be provided in the grooves and which pierce through the housing to increase the compliance of the suspension.

A transducer (9) e.g. of the kind described in detail in our co-pending International patent publication Nos.
20 WO97/09859, WO97/09861, WO97/09858 is attached to each panel (2) to launch bending waves into the panels to cause them to resonate to produce an acoustic output.

CLAIMS

1. A visual display unit (137) comprising a display screen (37), a housing (101) in which the display screen is mounted and a loudspeaker (81) in the housing,
5 characterised in that the loudspeaker comprises a a stiff lightweight member (2) having capability to sustain and propagate input vibrational energy by bending waves in at least one operative area extending transversely of thickness to have resonant mode vibration components
10 distributed over said at least one area and have predetermined preferential locations or sites within said area for transducer means and having a transducer (9) mounted wholly and exclusively on said member at one of said locations or sites to vibrate the member to cause it
15 to resonate forming an acoustic radiator which provides an acoustic output when resonating.
2. A visual display unit according to claim 1, characterised in that the radiator (2) is integral with the housing (101).
- 20 3. A visual display unit according to claim 2, characterised in that the housing (101) has an external wall (102) and in that the radiator (2) is integral with the external wall.
4. A visual display unit according to claim 2 or claim 3,
25 characterised in that the radiator (2) comprises a cellular core (22) sandwiched by skin layers (21), one of which skin layers is integral with the housing.
5. A visual display unit according to claim 4,

characterised in that the said one skin layer (21) is thinner than the average wall thickness of the housing (101).

6. A visual display unit according to any one of claims 3 to 5, characterised in that the external wall (102) of the housing is formed with a groove (100) which surrounds the radiator and which defines a resilient suspension (3) coupling the loudspeaker to the housing.

7. A visual display unit according to claim 6, characterised by at least one slot in the groove (100) to increase the compliance of the suspension.

8. A visual display unit substantially as herein described and as shown in any one of the embodiments of the accompanying drawings.

DATED this Seventeenth Day of February 1998

New Transducers Limited

Patent Attorneys for the Applicant

SPRUSON & FERGUSON

1/3

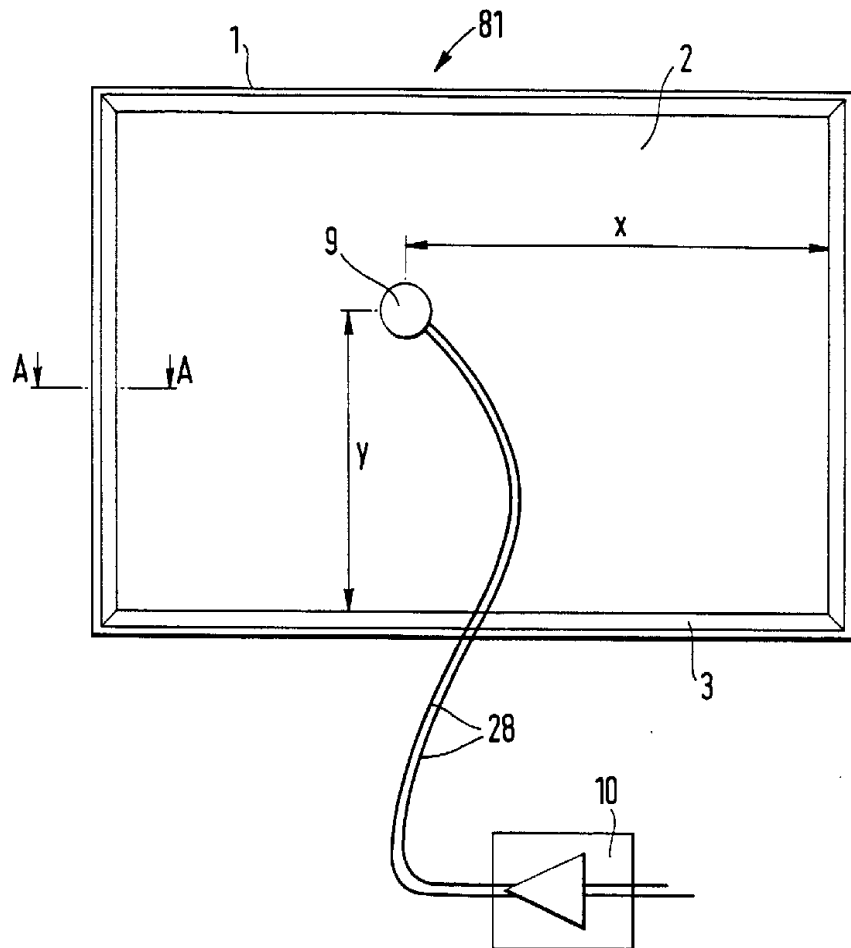


Fig. 1

2/3

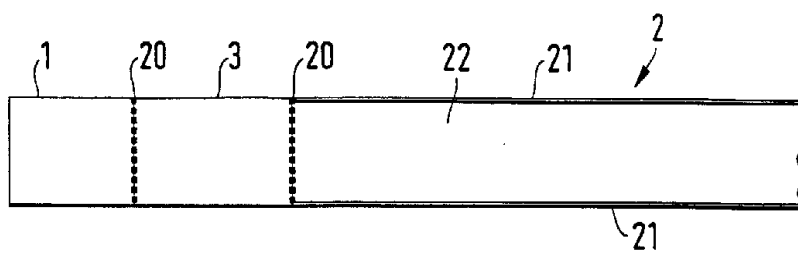


Fig. 2a

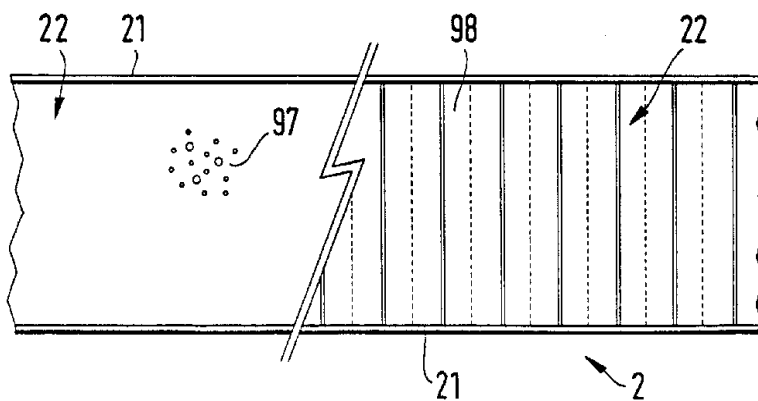


Fig. 2b

3/3

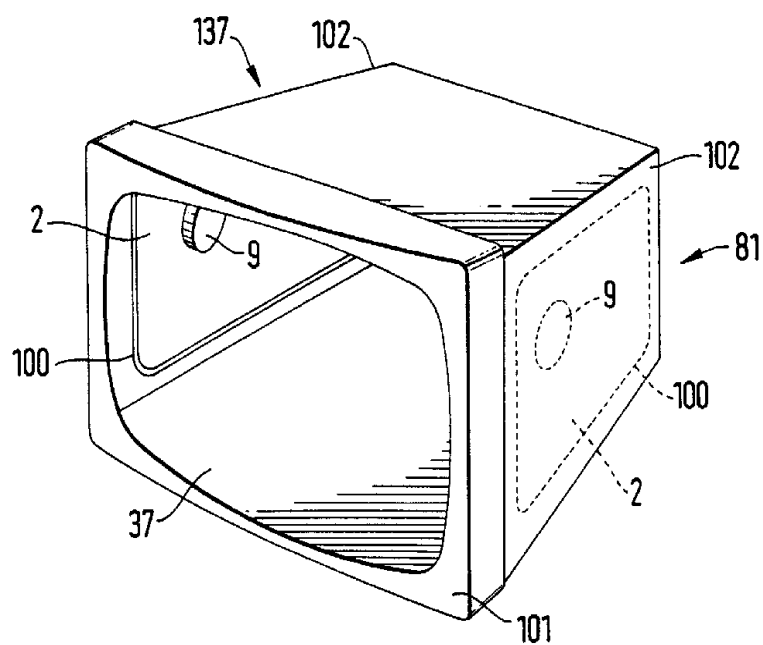


Fig. 3

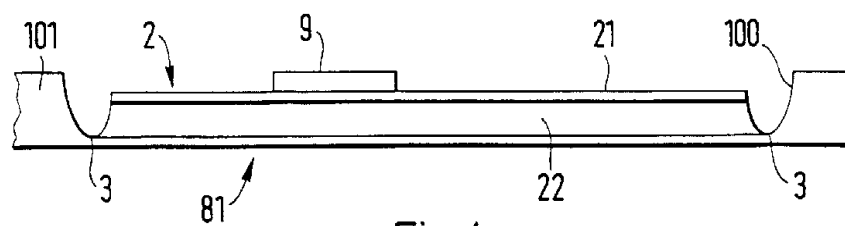


Fig. 4