




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : B01J 19/00	A1	(11) International Publication Number: WO 99/47255 (43) International Publication Date: 23 September 1999 (23.09.99)
(21) International Application Number: PCT/US99/06150 (22) International Filing Date: 17 March 1999 (17.03.99) (30) Priority Data: 09/040,498 17 March 1998 (17.03.98) US (71) Applicant: CEPHEID [US/US]; 1190 Borregas Avenue, Sunnyvale, CA 94089 (US). (72) Inventors: NORTHRUP, M., Allen; 616 Vistamont Avenue, Berkeley, CA 94708 (US). PETERSEN, Kurt, E.; 3655 Valley Ridge Lane, San Jose, CA 95148 (US). McMILLAN, William, A.; 8051 Presidio Drive, Cupertino, CA 95014 (US). KOVACS, Gregory, T., A.; 105 Peter Couatts Circle, Stanford, CA 94305 (US). (74) Agents: CHOW, Y., Ping et al.; 525 University Avenue, Palo Alto, CA 94301 (US).	(81) Designated States: AL (Utility model), AM (Utility model), AT (Utility model), AU, AZ, BA, BB, BG (Utility model), BR (Utility model), BY (Utility model), CA, CH, CN (Utility model), CU, CZ (Utility model), DE (Utility model), DK (Utility model), EE (Utility model), ES (Utility model), FI (Utility model), GB, GD, GE (Utility model), GH (Utility model), GM, HR, HU (Utility model), ID, IL, IN, IS, JP (Utility model), KE (Utility model), KG (Utility model), KP, KR (Utility model), KZ (Utility model), LC, LK, LR, LS (Utility model), LT, LU, LV, MD (Utility model), MG, MK, MN, MW, MX (Utility model), NO, NZ, PL (Utility model), PT (Utility model), RO, RU (Utility model), SD, SE, SG, SI, SK (Utility model), SL, TJ (Utility model), TM, TR (Utility model), TT, UA (Utility model), UG, UZ (Utility model), VN (Utility model), YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: UNITARY CHEMICAL PROCESSING DEVICE

(57) Abstract

A sample-processing device (150) comprises a unitary body (152), preferably a molded polymeric part, having formed therein a reaction chamber (154) for chemically reacting a sample, a separation region (158) for separating components of the sample, and a transition region (156) connecting the reaction chamber (154) to the separation region (158). The reaction chamber (154), transition region (156), and separation region (158) are formed in and enclosed by the unitary body (152). Additionally, the transition region (156) includes at least one flow restrictor (180) for controlling the flow of fluid between the reaction chamber (154) and the separation region (158). Further, the portion of the unitary body (152) defining the transition region (156) has lower thermal conduction than the portion of the body defining the reaction chamber (154) so that the transition region (156) thermally isolates the reaction chamber (154) from the separation region (158). In a preferred embodiment, the reaction chamber (154) is an amplification chamber for amplifying nucleic acid in the sample, and the separation region (158) comprises an electrophoresis column or capillary containing a suitable matrix material, such as electrophoresis gel or buffer, for separating nucleic acid fragments in the sample. Electrodes (167, 168, 169) are embedded in the body (152) for forcing the sample to flow from the reaction chamber (154) to the separation region (158). The unitary body (152) may also be surrounded by external, functional components such as an optical detector (186) for detecting separated components of the sample.

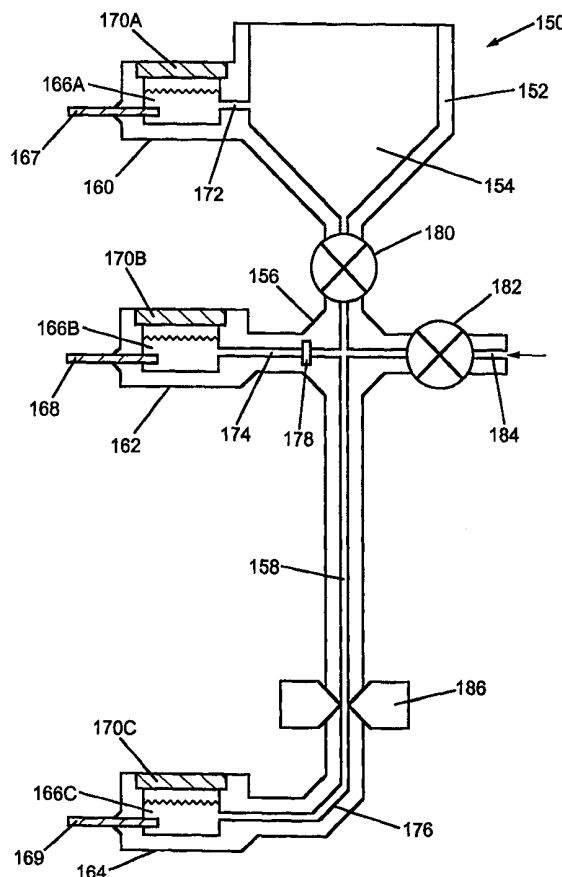

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

UNITARY CHEMICAL PROCESSING DEVICE

FIELD OF THE INVENTION

The present invention relates generally to the field of chemical processing, and in particular to an integrated device for processing of a fluid sample.

BACKGROUND OF THE INVENTION

There are many applications in the field of chemical processing in which it is desirable to separate chemical components prior to or after reacting chemicals. Examples of reactions requiring separation of components include organic, inorganic, biochemical, and molecular reactions. Examples of chemical reactions include thermal cycling amplification, such as polymerase chain reaction (PCR), ligase chain reaction (LCR), isothermal nucleic acid amplification, self-sustained sequence replication, enzyme kinetic studies, homogeneous ligand binding assays, affinity binding assays, and more complex biochemical mechanistic studies. Conventional separation techniques include electrophoresis, such as capillary electrophoresis, synchronized cyclic electrophoresis, and free flow electrophoresis. Conventional separation techniques also include isoelectric focusing (IEF), hybridization, liquid and gas chromatography, molecular sieving and filtering.

Components to be separated in various samples include nucleic acids, amino acids, peptides, proteins, cells, viruses, bacteria, organic compounds, carbohydrates, etc. For example, in amplification applications, multiple oligonucleotide primers and probes designed for many organisms can be used to multiply DNA from numerous organisms in a sample. After amplification, separation techniques such as electrophoresis or IEF can be employed to separate the amplification products by certain properties, such as molecular weight, for subsequent detection by fluorescence methods.

Of increasing interest in the field of chemical separation is the use of devices that include an integrated reaction chamber and separation region. Such integrated devices provide a number of advantages over conventional devices in which one transfers a fluid sample

between a reaction apparatus and a separation device. For example, where the chemical reaction and separation steps are performed in a single integrated device, one may avoid contamination and crossover of sample or reaction products. In addition, an integrated device may allow for substantially faster sample processing and analysis.

5

Recent efforts to integrate processing and analytical functionalities in a single device, especially in the field of MEMS, microfabrication, and microfluidics, have resulted in the development of devices that include multiple substrates bonded together. The substrates are usually bonded with adhesives, or by heat sealing, fusion bonding, or anodic bonding.

10 These multi-substrate devices typically include a reaction chamber that is connected to a separate separation component, such as a capillary tube containing a suitable electrophoresis gel, by an adhesive such as epoxy. Alternatively, these multi-substrate devices have reaction chambers and separation channels etched into a plate and a cover bonded over top of the plate. For example, U.S. Patent 5,849,208 issued to Hayes et al.
15 discloses such a multi-substrate device.

These multi-substrate devices have many disadvantages. First, the uniformity between devices is often compromised during bonding of the substrates. Second, mass production of the multi-substrate devices is costly, labor intensive, difficult to automate, and
20 therefore impractical. For example, when applying adhesives such as epoxy, isolating the epoxy to only specific areas is difficult to implement and to control on a production basis, especially where the device includes small microchannels. Furthermore, adhesives may allow for leaks and add to the cost of the device.

25 Moreover, current integrated devices provide for only limited control of fluid between reaction and separation regions. For example, high internal pressure can develop in a reaction chamber due to the thermal expansion of liquid or gas present in this region, the generation of gas bubbles, or the chemical reactions performed inside of the chamber. This pressure, combined with any elevated temperatures within the chamber, can have
30 detrimental effects on fluidic components and performance upstream and downstream from the reaction chamber. A particular problem is the flow or diffusion of chemicals

from the reaction chamber into unwanted regions caused by the elevated pressure or temperature. This situation is especially problematic when sensitive detection methods and apparatus are located downstream from the reaction chamber.

- 5 A further problem with prior integrated devices is that when the reaction chamber is heated to perform a chemical reaction, the separation region is also heated due to thermal conduction. If the separation region is heated, however, the separation material contained in the region, e.g., electrophoresis gel, degrades and renders the device inoperable. In addition to degrading the separation material, the thermal conduction between the
10 reaction chamber and separation region causes large thermal gradients within the device and prevents adequate heating of a sample in the reaction chamber.

Moreover, where the separation region requires electrodes, as in capillary electrophoresis, micro-electrophoresis, and IEF, there are many issues that have not been
15 addressed by prior art designs. Much of the prior art has focused on issues regarding the design, fabrication, and operation of the capillary channel itself. In contrast, the design of the electrodes which are in contact with the fluid, and which are responsible for the electrokinetic movement of the fluid, has not yet been adequately addressed. The correct design of these electrodes is necessary for the proper, practical, and cost-effective
20 implementation of high-volume, disposable systems that incorporate both reaction chambers and separation regions in a single device. Current state-of-the-art is to incorporate large, open reservoirs (100 μL or more) near the end of each capillary channel, and then "dip" a separate metal electrode into each open reservoir. Such a crude arrangement is unsuitable for mass production of disposable assemblies. Furthermore,
25 external electrodes, which are placed in contact with the fluid in the disposable assembly, are generally not practical because they may need to be cleaned or otherwise "prepared" prior to each use.

SUMMARY

- 30 The present invention provides an integrated reaction and separation device that overcomes the disadvantages of the prior art discussed above. In particular, the

integrated device of the present invention avoids the use of inconvenient bonding techniques, enabling inexpensive, high-volume production of the device. Additionally, the integrated device includes a reaction chamber that is thermally isolated from the separation region, thereby enabling proper heating of a sample without degrading the
5 separation region.

In a preferred embodiment, the device comprises a unitary body, preferably a molded polymeric part, having formed therein a reaction chamber for chemically reacting a sample, a separation region for separating components of the sample, and a transition
10 region connecting the reaction chamber to the separation region. The reaction chamber, transition region, and separation region are formed in and enclosed by the unitary body. Additionally, the transition region includes at least one flow restrictor for controlling the flow of fluid between the reaction chamber and the separation region. Further, the
15 portion of the unitary body defining the transition region has lower thermal conduction than the portion of the body defining the reaction chamber so that the transition region substantially thermally isolates the reaction chamber from the separation region.

The unitary body may be surrounded by external, functional components such as differential pressure sources, electro-motive sources, heaters, light sources, and
20 optical detectors. In the preferred embodiment, the reaction chamber is an amplification chamber for amplifying nucleic acid in the sample. Also in the preferred embodiment, the separation region comprises an electrophoresis column or capillary containing a suitable matrix material, such as electrophoresis gel or buffer, for separating nucleic acid fragments in the sample.

25

A more complete understanding of the present invention may be gained upon consideration of the following description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- Fig. 1 is a schematic view of a unitary processing device having an integrated reaction chamber, transition region, and capillary electrophoresis separation region according to one embodiment of the present invention.
- 5
- Fig. 2 is a schematic view of another processing device having an integrated reaction chamber, transition region, and hybridization separation region according to a second embodiment of the present invention.
- 10
- Figs. 3 A, B, C, D, E are schematic views of several variations of the transition regions connecting a reaction chamber and separation region according to the present invention. Fig. 3A shows a constrictor in the transition region. Fig 3B shows a two-way valve. Figs. 3C and 3D show multiple two-way valves with an inlet channel. Fig. 3E shows a three-way valve.
- 15
- Fig. 4 A is a plan view of an exemplary mechanical valve according to the present invention.
- Fig. 4B is a cross-sectional view of the valve of Fig. 4A.
- 20
- Fig. 5 is a perspective view of a chemical reaction and separation device according to a third embodiment of the invention.
- Fig. 6 is a schematic view of another chemical reaction and separation device
- 25 according to a fourth embodiment of the present invention.

DETAILED DESCRIPTION

The present invention provides an integrated device for the processing of a fluid sample. The device comprises a reaction chamber, a product separation region, and a fluid transition region connecting the reaction chamber to the separation region. In the preferred embodiment, the reaction chamber, transition region, and separation region are

30

formed in and enclosed by a single unitary body, preferably a molded piece of polymeric material. The term "unitary" is herein intended to mean that the body of the device that forms the reaction chamber, transition region, and separation region is a single piece of material. This unitary design enables inexpensive, mass production of the
5 device.

In operation, a fluid sample is moved from one region to another and the sample flow is controlled between regions. There may be more than one reaction chamber, transition region, or separation region in a single integrated device. Also
10 provided is a device as described having one or more electrodes embedded in the body adjacent to one or more of the regions. The electrodes may be in dry or coated form. The body of the device may be surrounded by external, functional components such as electro-motive sources, heaters, light sources, and optical detectors. The device may also be a component of a larger system, for example, a
15 fluid flow cartridge that has other chemical processing functionalities. Such a cartridge is described in co-pending patent application PCT/US98/27632 filed December 24, 1998 the disclosure of which is incorporated by reference herein.

The body may be a polymer, ceramic, or other material that permits the molding of
20 chambers and channels directly into the material. The body may be of various shapes and sizes. The internal network of chambers and channels may be macro, meso or micro scale size, or a combination thereof. For example, the device may include a macro scale reaction chamber which leads to a microchannel transition region and separation region. In general, the integrated device of the present invention includes one or more reaction
25 chambers in fluidic communication with one or multiple separation regions through one or more transition regions. A variety of combinations of chambers, transition regions, and separation regions are intended to be within the scope of the invention. For example, a separation region may precede a reaction chamber and/or lead from the chamber. Also, multiple separation regions may be connected in series or in parallel. These separation
30 regions may be of assorted types, each providing different separating functions. For

example, a reaction chamber may lead through a transition region to a hybridization site which in turn leads to an electrophoresis channel.

Fig. 1 shows one embodiment of a processing device **2** formed by a unitary body **4**. The body **4** has formed therein a reaction chamber **6**, a separation region **8**, and a transition region **10** connecting the reaction chamber to the separation region. The reaction chamber **6** has an inlet port **12** for adding sample and reagents as required by the particular reaction performed in the chamber. The device **2** may include an outlet port as well as the inlet port **12**. The ports may serve to connect the device to an external pump, vacuum source, or syringe. Alternatively, the ports may function as vents. In this embodiment, the separation region **8** is a capillary electrophoresis tube **14** containing appropriate separation material, e.g. electrophoresis gels or polymers, for separating components of the sample. Such separation materials are well known in the art.

The integrated device **2** also includes an injection electrode **20** and a separation electrode **22** embedded in the unitary body **4**. The electrodes **20** and **22** are located at opposite ends of the device to drive electrophoretic, electro-osmotic, or IEF ion flow through the separation region **8**. Each electrode is preferably embedded in the body **4** such that one end of the electrode protrudes through an external surface of the body and such that the other end of the electrode protrudes into an internal region of the body.

In a preferred embodiment, the device **2** is used in combination with and designed to be inserted into an external instrument (not shown) having a heater for heating the reaction chamber **6** and having electrical connections for applying a voltage difference between the electrodes **20**, **22**. The instrument may optionally include an optical detector **16** for detecting separated components of the sample in separation region **8**. Additionally, the instrument may include a pair of optics assemblies **18A**, **18B** for monitoring the reaction chamber **6**. Suitable optics assemblies for use with the device of the present invention are disclosed in U.S. application Ser. No. 09/081,260 filed May 19, 1998 the disclosure of which is incorporated by reference herein.

The reaction chamber **6** is designed for the particular process being performed, such as PCR, LCR, isothermal nucleic acid amplification, self-sustained sequence replication, enzyme kinetic studies, homogenous ligand binding assays, affinity binding assays, chemical or temperature mediated lysis of target microorganisms, more complex
5 biochemical mechanistic studies, the study of certain physiologic process and other synthetic and ligand binding processes. The volume capacity of the chamber depends on its application. In a preferred embodiment, for PCR applications, the chamber has a volume capacity between about 10 to 100 microliters. Thermal energy may be supplied to the reaction chamber **6** by coupling the portion of the body **4** forming the chamber to
10 an external heater. Alternatively, a heating element may be permanently coupled to the body using screen-printing or thin-film depositing techniques.

In terms of the separation region **8**, there may be electrophoretic, hybridization, or IEF functionalities, different filtrations, or other separation mechanisms, such as molecular
15 sieving. Where the separation functionality is electrophoresis, the separation region **8** is preferably a capillary, as in Fig. 1. The separation region may contain an appropriate separation matrix such as a gel or other solution suitable for electrophoresis or IEF, as is known in the art. The solutions may include buffers, additives, polymeric agents, etc. In the preferred embodiment, the capillary tube **14** is between about .05 to 1.0 mm in
20 diameter and 1-10 cm in length.

Fig. 2 shows another embodiment of a processing device **30** in which the separation region **32** is a hybridization region incorporating an array of nucleic acid hybridization sites **34**. Each hybridization site is preferably a channel or chamber coated with
25 immobilized reagent such as polynucleotide probes. Immobilized reagent refers to reagent that is covalently or non-covalently attached to the surface of the structure. The immobilized reagent can be applied to the surface by a variety of methods well known in the art, e.g., dipping, inscribing with a pen, dispensing through a capillary tube or through the use of reagent jet-printing or any other suitable dispensing techniques.

Upon binding of the complementary analyte polynucleotide to the immobilized polynucleotide probe, a labeled probe, e.g., a fluorescent-labeled probe can be added to bind to the analyte polynucleotide. The amount of fluorescence is directly proportional to the amount of analyte in the test sample. Alternatively, the hybridization assay can be performed in a competitive format where a polynucleotide is conjugated to a detectable label. The polynucleotide labeled reagent competes with the analyte for binding to the immobilized polynucleotide. In another embodiment, the hybridization area comprises microstructure columns as described in co-pending application, U.S. Serial No. 09/115,454 filed July 14, 1998, the disclosure of which is incorporated by reference herein.

Other separation regions according to the present invention include ligand-binding sites in which members of a binding pair are located in the sites and couple to complementary binding pairs in the sample. In addition, the separation region may include selective filters such as molecular weight filters. Multiple functionalities may be located in one separation region. For example, electromotive separations such as electrophoresis may be combined with filters to pre-process certain samples where a mixture of protein background and nucleic acid is made to flow by electrical motive forces through a molecular weight cut-off filter, thereby filtering out the protein.

Flow between the reaction chamber and the separation region may be by differential pressure, hydrodynamic forces, electrical motive forces, capillary action, pneumatic forces, hydraulic forces, mechanical forces, etc. The unitary device may be coupled to instruments to actuate fluid flow such as pumps, vacuums, electrical connections, and the like. Electromotive mobility of molecules, and especially nucleic acids, as in isoelectric focus and electrophoretic mobility, is a convenient movement mechanism because of the predictability of movement. When conditions such as buffer ionic strength, channel dimensions, gel type and density, current density, voltage drop, time, etc. are constant, it is relatively easy to predict the location of molecules. Under controlled conditions, at time (T), the position of the analyte should be at position (X) consistently. This concept is illustrated in Fig. 5 in which site 114 denotes the location of the target.

For electrically motivated flow, a series of electrodes may be partially or fully embedded in the body of the device, or alternatively inserted prior to use. As shown in Fig. 1, electrodes **20**, **22** may be actuated to induce fluid flow from the reaction chamber **6** to the separation region **8**, or from the separation region **8** to the reaction chamber **6**.

5 Additionally, depending on the performance of the system and the requirements of the reaction chamber **6**, a common electrode (not shown) located in or proximal to the transition region **10** may be included to drive the separation procedures. Both sample injection and electrophoresis can be achieved by applying a voltage between electrodes. The voltage may be applied by a power source external to the device. Alternatively, a
10 suitable power source may be integrated into the device.

Prior to use, the device may have electrodes that are dry, coated, or pre-contacted with electrolytic fluids. In order to use the device, the electrodes should be exposed to electrolytes. Dry electrodes may be made to contact solutions by injecting fluids into the
15 electrode regions or by releasing pre-disposed fluids from connecting reservoirs. Where the electrodes are coated, the coating may be dissolved by various means, to allow the electrodes to contact the electrolytic solution. Furthermore, the timing in which the coating of particular electrodes is dissolved may be controlled to control the activation of each electrode and thus dictate the resulting electrically driven movement of fluids or
20 components.

There are numerous advantages to embedding electrodes in the body of the device. Embedded electrodes facilitate reproducibility of electrode position in each device, to allow one to achieve reproducible results among several devices. In addition, embedded
25 electrodes permit mass production of such devices resulting in decreased cost of manufacture. Moreover, the disposable, single use device of the present invention avoids issues of electrode contamination which may occur where electrodes are permanently secured in multiple use devices and in contact with conducting fluids for a long period of
time.

The electrodes may be embedded into the unitary device with little additional cost by several techniques. First, metal electrodes can be situated inside a plastic injection molding production machine and "over-molded" during the injection molding process. Second, the metal electrodes may be selectively screen-printed, or otherwise deposited
5 by plating, thin-film deposition, etc., and patterned on the unitary body of the device. For example, one end of a screen-printed metal line may be used to contact fluid in the device while the other end forms a connector which is electrically engaged by an external instrument. Both of these techniques, and other similar techniques are cost-effective and very suitable for high-volume production lines. The electrodes are preferably located
10 near vents which allow the venting of gases generated during the application of the high electric fields associated with electrophoresis. The vent ports could be simple openings in the tube itself or gas permeable hydrophobic membranes such as Gore-Tex®.

Another aspect of the processing device according to the present invention is the fluid
15 transition region between the reaction chamber and separation region. In some embodiments, the transition region may be a simple fluidic connection, *e.g.* a tube, between the reaction chamber and the separation region. In other embodiments, the transition region includes valves, fluid inlet ports, mixing regions, and the like. In each embodiment, the transition region has a fluid flow restrictor, such as a viscous matrix, a
20 constrictor, fluidic capacitor, ports, and/or at least one valve, which may be a mechanical two-way or three-way valve. The fluid flow restrictor is used to control the flow of fluid between the reaction chamber and separation region.

Figures 3A-E show several embodiments of an integrated device from the perspective of
25 the transition region **60** between the reaction chamber **40** and separation region **50**. Fig. 3A shows a device **80** having a transition region **60** in which the flow restrictor is a constrictor **62**. The inner diameter of the constrictor **62** is very narrow compared to the preceding area, *e.g.*, the reaction chamber **40**. The inner diameter of the constrictor **62** should be sufficiently small, preferably in the range of 0.01 to 1.0 mm, so that surface
30 tension prevents the flow of fluid from the reaction chamber **40** to the separation region **50** until the electrodes **51**, **53**, **55** are activated.

Fig. 3B shows another exemplary device **82** having a two-way valve **64** located in transition region **60**. This valve **64** may be an on-off valve, such as a pinch-off valve, a membrane valve, or the like, to prevent fluid from flowing through the valve when in a closed position and to permit fluid flow when in an open position. Fluids may be allowed to collect in a collection area **66** just upstream of the valve **64**. In this manner, it may be possible to perform functions on the fluid sample prior to injection from the reaction chamber **40** into the separation region **50**. For example, the valve **64** may be closed during nucleic acid amplification reactions in the reaction chamber **40**, then opened just prior to sample injection into the separation region **50**. Furthermore, it may be desirable to return the valve to a closed position to stop fluid flow and thus allow only a plug of fluid to pass into the separation region **50**.

The valve **64** may also be used in the real-time monitoring of the processes occurring in the reaction chamber **40**. As the reaction proceeds in the reaction chamber, a sample of fluid may be allowed to pass through the valve **64** by opening and closing the valve at selective intervals during the course of the reaction process. The fluid flows into the separation region **50** for separation of components and detection of chemicals, thus indicating the status of the reaction process at any given time. The detection of the sample may indicate that the reaction procedure should be adjusted to optimize results. For example, where nucleic acid amplification is occurring in the reaction chamber **40**, if a low nucleic acid concentration is detected during the course of the amplification, the number of thermal cycles may be increased according to the desired outcome. Thus, a user of the device may avoid running too many or few cycles.

Electrodes positioned in the transition region and areas prior to the transition region, e.g., the reaction chamber **40**, may facilitate movement of fluid into the transition region **60**. Embedded electrodes **70A**, **70B** are shown by the form of the two-way valve configuration in Figure 3C. The electrode **70A** is embedded in the reaction region **40** and the second electrode **70B** is embedded in a channel **72** immediately downstream from the

valve **64**. The electrodes **70A**, **70B** protrude through the unitary body of the device to be partially exposed to the fluid inside of the chamber and channel.

The embodiments of the transition region **60** shown in Figs. 3C and 3D each include a
5 combination of several two-way valves with a channel connected to the transition region. In these embodiments, a side valve **68** is located in a side channel **74** to control flow of fluids into the transition region **60**. For example, reagents and fluids may be added to or channeled away from the separation region **60** through the side channel **74**. These additional fluids may be injected prior to, during, or after the injection of the sample into
10 the separation region **50**. Functions such as washing, incorporation of ampholines for isoelectric focusing in the separation region **50**, injection of markers, etc. may be utilized with such a channel and valve arrangement.

In the device **84** of Fig. 3C, the side channel **74** communicates with the transition region
15 **60** downstream from the intermediary valve **64**. In the device **86** of Fig. 3D, the side channel **74** communicates with the transition region **60** in the collection section **66** located upstream from the intermediary valve **64**. In this embodiment, reagents may be allowed to interact with fluid in the collection section **66** prior to injecting the fluid into the separation region **50**. Also in the embodiments of Figs. 3C and 3D, the embedded
20 common electrode **70B** is positioned in the transition region **60** opposite the side channel **74**. The common electrode **70B** may have several functions. The common electrode may either work with a side electrode (not shown) in the side channel **74** to induce fluid flow from the side channel. In addition, the common electrode **70B** may work with the injection electrode **70A** to facilitate fluid flow from the reaction chamber **40**.

25

Further to the types of valves in the transition region of the device, the function of multiple, two-way valves may be realized through a single three-way valve. Fig. 3E shows a device **88** having a three-way valve **69** that allows injection of additional fluids, e.g. reagents, into the transition region **60** through the side channel **74**. A three-way
30 valve or combination of two-way valves may also communicate with a concentration channel having a focusing gel and a common electrode. In this embodiment, a sample of

chemicals flows into the channel to produce a fluid plug which may then be moved into the separation region.

5 An exemplary membrane valve is shown in plan view in Fig. 4A and cross-sectional view in Fig. 4B. The membrane valve **90** comprises a thin flexible polymer layer **92** that can be exposed to a force **A** to bias the layer **92** against a surface **94** to seal the fluidic path between two channels **96** and **98**. The valve **90** may then be released by removing the force **A**, causing the membrane to relax and permitting fluid to flow between the channels **96** and **98**. The force **A** which deflects the flexible membrane may be
10 pneumatically, hydraulically, or a mechanically induced, for example by a mechanical plunger.

Referring again to Figs. 3A-3E, it is important that the transition region **60** thermally isolate the reaction chamber **40** from the separation region **50**. This thermal isolation
15 enables proper heating of a sample in the reaction chamber **40** and prevents the degradation of material in the separation region **50**. The thermal isolation is achieved by making the transition region **60** thermally resistive, i.e., by ensuring that the transition region **60** has a lower thermal conduction than the reaction chamber **40**. The thermal conduction of the transition region **60** relates to both the conductivity of the material
20 forming the transition region and the size of the transition region relative to the reaction chamber **40**. The present invention contemplates several methods for ensuring that the transition region **60** has a lower thermal conduction than the reaction chamber **40**. First, the portion of the body defining the transition region **60** is made narrower than the portion of the body forming the reaction chamber **40** so that the transition region **60**
25 substantially thermally isolates the reaction chamber **40** from the separation region **50**. This is the presently preferred technique and is illustrated in the various embodiments of Fig. 1-3E. Second, the transition region **60** may comprise a different material having a lower thermal conductivity than the material forming the reaction chamber **40**. Third, thermal insulators, such as air pockets, may be formed in the body surrounding the
30 transition region **60**. Of course, suitable combinations of these techniques may also be employed.

One or more optical assemblies may communicate with the reaction chamber, separation region and/or other areas of the device. The optical assemblies may be externally coupled to the device and preferably include solid-state components, such as photodiodes and LEDs. As shown in Fig. 5, a device **100** includes a light source **102**, such as an LED, and
5 an optical detector **104**, such as a lens, optical filter, and photodiode. Light source **102** and detector **104** are positioned to detect separated components, *e.g.* nucleic acid fragments, of the sample in the electrophoresis capillary **108**. The nucleic acid fragments may be detected when stained with an intercalating dye such as ethidium bromide. An example of this format provides for ethidium bromide being added from a side channel
10 (not shown) via electromotive forces of electrodes. The light source **102** is coupled to a controller by a connector **112** and data is received by the controller from detector **104** through a connector **110**. The controller may comprise one or more microprocessors or microcontrollers for controlling operations such as fluid flow actuation, optics, detection, etc.

15

Alternatively, the optical detection system may comprise a laser and CCD. In this embodiment, the optical detection arrangement preferably includes an optical filter, such as an interference filter or band pass filter for passing the detection wavelength of interest, a CCD, focusing optics, a reflector/splitter, and an Argon ion laser. The
20 operation is as follows: The laser excites the fluorescent indicator dye associated with product detection. The fluorescent signal is monitored by the CCD and passed to the controller. Alternatively, an LED may be used to excite the fluorescent indicator dye. Absorption spectroscopy could similarly be used.

25 Fig. 6 illustrates another embodiment of the present invention in which a processing device **150** includes electrode regions **160**, **162** and **164**. Each electrode region includes a respective reservoir **166A**, **166B**, **166C** for storing electrophoretically transported fluid. Each of the electrode regions also has a respective electrode **167**, **168** and **169** embedded in the body **152** of the device. Each electrode protrudes through the body **152** to be
30 partially immersed inside of a reservoir. Each reservoir further has a respective

membrane 170A, 170B, and 170C to vent gases. The membranes may be made of Gore-Tex® or other convenient hydrophobic porous materials.

The first electrode region 160 is connected to a reaction chamber 154 by a channel 172.

- 5 Similarly, the second electrode region 162 is connected to a transition region 156 by a channel 174. The channel 174 further includes a filter 178, preferably a high molecular weight filter, to allow only selected molecular components to pass. The third electrode region 164 is attached to the terminal end of a separation region 158 by a channel 176. A valve 180 in transition region 156 controls fluid flow from the reaction chamber 154 and
- 10 a valve 182 controls cross-flow of fluid through a side channel 184. In a preferred embodiment, the device 150 is used for nucleic acid analysis and the reaction chamber 154 is a nucleic acid amplification chamber.

Examples of Operation

- 15 The present invention further contemplates particular methods for using various embodiments of the reaction and separation device described above.
1. **Method for using an electrophoresis device of the present invention:**
 - 20 i) an unknown sample is mixed with the appropriate PCR, for example, mastermix solution and introduced into the reaction chamber portion of the analysis system;
 - ii) a PCR reaction sequence (or other DNA amplification technique or chemical reaction) is performed on the solution inside the reaction chamber;
 - iii) optical monitoring of the reaction products inside the chamber is performed to track the progress of the amplification reaction;
 - 25 iv) when it is determined that sufficient product, such as nucleic acid, has been generated inside the reaction chamber, the injection and common electrodes are activated, drawing a sample plug through the transition region into the top portion of the separation region, e.g., an electrophoresis tube containing a suitable gel. This electrophoretic injection step can be completed within a very short time,
 - 30 thereby minimizing the generation of bubbles within the reaction chamber;

- v) the common and electrophoresis electrodes are activated, causing the sample plug to drift through the gel and down the hollow separation tube;
- vi) as the separated bands of molecules traverse the length of the tube, they pass by the optical detection system and data representing the product is determined.

5

2. Method of using the electrophoresis device shown in Figure 6:

- i) the sample and appropriate reagents are subjected to a nucleic acid amplification process in the reaction chamber **154**, while valves **180** and **182** are closed;
- ii) optical monitoring of the reaction products inside the chamber **154** is performed to track the progress of the amplification reaction;
- 10 iii) while valve **180** is closed, valve **182** is opened and an appropriate buffer solution is injected into the separation column or capillary **158** through the inlet port **184**;
- iv) an appropriate electrophoresis voltage is applied between electrodes **167** and **168** while valve **180** is opened and valve **182** is closed. During this phase, high
- 15 molecular weight species are collected on the high molecular weight filter **178**;
- v) an appropriate electrophoresis voltage is then applied between electrodes **168** and **169**, while valves **180** and **182** are closed. During this phase, the high molecular weight species collected on the filter **178** are electrophoretically transported down the separation capillary **158**;
- 20 vi) as the captured molecular species are electrophoretically transported down the capillary **158**, they reach the optical detector **186** and are detected by optical fluorescence.

3. Method of using a device with a hybridization region and three-way valve:

- 25 i) steps i) to iii) in Example 1 are performed on a sample;
- ii) a first three-way valve in the transition region is opened to allow the reaction mixture to flow under hydrodynamic force from the reaction chamber, through the valve, through a hybridization region (first separation region), through a second three-way valve, and into a connected waste area. As the fluid flows
- 30 through the hybridization region, target molecules in the sample hybridize to

- iii) electrodes in communication with the second separation region are activated causing the elution solution with target molecules to flow into the separation region and the target molecules to separate in the matrix located in the second separation region;
- 5 iv) a CCD camera optically images the entire length of the second separation channel to provide a barcode-like result.

Fabrication

The devices of the present invention may be produced by injection molding, casting,
10 machining or other convenient means of making a one-piece body without bonding multiple pieces together. Molding allows for formation of a contiguous reaction chamber, transition region, and separation region. Valve structures may also be included in the mold, or in the alternative, added to device after the unitary body is molded.

15 Although a one-piece body is presently preferred, a device of the present invention may also be produced by sealing or laminating one or more plastic films to a molded polymeric part. For example, the body of the device may comprise a molded polymeric part having the reaction chamber, transition region, and separation region formed therein and first and second plastic films sealed to opposite sides of the molded polymeric part to
20 enclose the reaction chamber, transition region, and/or separation region. To aid in the transfer of energy to the sample components or to aid in optical detection of the components, it is preferred that the plastic films be relatively thin, e.g., that the films each have a thickness in the range of 0.01 to 0.5 mm, and more preferably have a thickness of about 0.05 mm.

25

The integrated devices of the present invention are preferably made of any number of polymeric materials. Included among these are, but not intended to be limited to, polyolefins such as polypropylene and polyethylene, polyesters such as polyethylene terephthalate, styrene containing polymers such as polystyrene, styreneacrylonitrile, and
30 acrylonitrilebutadienestyrene, polycarbonate, acrylic polymers such as polymethylmethacrylate and poly acrylonitrile, chlorine containing polymers such as

polyvinylchloride and polyvinylidenechloride, acetal homopolymers and copolymers, cellulosics and their esters, cellulose nitrate, fluorine containing polymers such as polyvinylidene fluoride, polytetrafluoroethylene, polyamides, polyimides, polyetheretherketone, sulfur containing polymers such as polyphenylenesulfide and
5 polyethersulfone, polyurethanes, silicon containing polymers such as polydimethylsiloxane. In addition, the structures can be made from copolymers, blends and/or laminates of the above materials, as well as glass and ceramic materials.

Furthermore, electrodes may be "overmolded" by partially inserting electrodes at their
10 selected locations into the mold such that the electrodes become embedded in the unitary body after the material is added to the mold and allowed to solidify. The electrodes may be made of platinum, silver, carbon, gold or any other suitable electrically conductive material. Other components may be optionally overmolded to the device in a similar fashion.

15

In the alternative, after the unitary body is formed, electrodes, filters, resistive heating elements, etc. may be embedded into the body using screen-printing or thin-film depositing techniques. Reagents, matrices or fluids may be injected into various reservoirs and channels of the formed body. Furthermore, the device may include
20 components external to the unitary body, such as optics, electrical connections to the electrodes, heater(s) embedded in the body, pneumatic interfaces to pumps or vacuums, etc. Alternatively, such components may be located in an external instrument into which the unitary device is placed for sample processing, as described above.

25 To summarize, the entire assembly of the reaction chamber, transition region, and separation region are preferably formed in a single, unitary, disposable body. There are a number of reasons why the device of the present invention is much improved over prior implementations.

30 1) the entire device is disposable, so that sample carry-over and contamination from sample to sample is not a problem;

- 2) all major elements of the device are integrated into one analytical component; it is not necessary to transfer the sample or the reaction products from one device having a reaction chamber to a separate device having a separation tube;
- 3) provision is made for thermally isolating the reaction chamber from the separation region, thereby ensuring proper heating of a sample and operability of the separation region;
- 4) provision is made for optical detection both in the reaction chamber as well as the separation tube;
- 5) provision is made for venting and otherwise dealing with the gases generated during electrophoresis or during isoelectric focusing;
- 6) the inconvenience of bonding techniques to connect substrates and modules is avoided; and
- 7) embedded electrodes provide for reproducibility and low cost mass production.

15 The present invention has been described above in varied detail by reference to the particular embodiments and figures. It is to be understood that modifications or substitutions may be made to the devices and methods described based upon this disclosure without departing from the broad scope of the invention. Therefore, the scope of the invention should be determined by the following claims and their legal
20 equivalents.

CLAIMS

What is claimed is:

1. A device for processing a fluid sample, the device comprising a unitary body
5 having formed therein:
 - a) a reaction chamber for chemically reacting the sample;
 - b) a separation region for separating components of the sample; and
 - c) a transition region connecting the reaction chamber to the separation region;wherein the reaction chamber, transition region, and separation region are formed
10 in and enclosed by the unitary body, the transition region includes at least one flow restrictor for controlling the flow of fluid between the reaction chamber and the separation region, and the portion of the unitary body defining the transition region has lower thermal conduction than the portion of the body defining the reaction chamber so that the transition region
15 substantially thermally isolates the reaction chamber from the separation region.
2. The device of claim 1, further comprising at least two electrodes coupled to the
20 unitary body, wherein the electrodes are positioned to force the sample to flow from the reaction chamber or transition region into the separation region when a voltage is applied between the electrodes.
3. The device of claim 2, wherein the unitary body comprises a molded polymeric
25 part having the electrodes embedded therein.
4. The device of claim 3, wherein each of the electrodes is embedded in the body such
30 that one end of the electrode protrudes through an external surface of the body and such that the other end of the electrode protrudes into an internal region of the body.

5. The device of claim 2, wherein the device is in combination with and designed to be inserted into an external instrument having a heater for heating the reaction chamber and having electrical connections for supplying power to the electrodes.
- 5 6. The combination of claim 5, wherein the instrument further includes optics for detecting separated components of the sample or for optically monitoring the reaction chamber.
7. The device of claim 1, further comprising:
 - 10 a) an injection electrode embedded in the unitary body adjacent the reaction chamber;
 - b) a separation electrode embedded in the unitary body adjacent the separation region;
 - c) a common electrode embedded in the unitary body adjacent the transition region; and
 - 15 d) a high molecular weight filter positioned in the transition region such that when a voltage is applied between the injection and common electrodes, high molecular weight species in the sample are transported from the reaction chamber to the transition region and collected on the filter, and such that
20 when a subsequent voltage is applied between the common and separation electrodes, the high molecular weight species collected on the filter are electrophoretically transported into the separation region.
8. The device of claim 1, wherein the portion of the unitary body forming the
25 transition region is narrower than the portion of the body forming the reaction chamber.
9. The device of claim 1, wherein the unitary body defines air pockets surrounding
30 the transition region.

10. The device of claim 1, wherein the separation region comprises an electrophoresis capillary containing a separation material.
- 5 11. The device of claim 1, wherein the separation region comprises at least one ligand binding site containing members of a binding pair for coupling to complementary binding pairs in the sample.
- 10 12. The device of claim 1, wherein the separation region comprises at least one hybridization site having immobilized reagent for hybridizing target analyte in the sample.
13. The device of claim 1, wherein the flow restrictor comprises a constrictor in the transition region having an inner diameter in the range of .01 to 1.0 mm.
- 15 14. The device of claim 1, wherein the unitary body further has formed therein at least one side channel communicating with the transition region for adding reagents to the transition region, and wherein the side channel includes at least one flow controller for controlling the flow of fluids through the channel.
- 20 15. The device of claim 14, wherein the side channel connects to the transition region upstream of the flow restrictor, and wherein the transition region further includes a collection area for mixing the sample with the reagents.
- 25 16. A method for producing a sample-processing device, the method comprising the steps of:
- 30 a) molding a one-piece polymeric body having:
- i) a reaction chamber for chemically reacting a sample;
 - ii) a separation region for separating components of the sample; and
 - iii) a transition region connecting the reaction chamber to the separation region, wherein the polymeric body is molded such that the reaction chamber, transition region, and separation region are formed in and

enclosed by the body and such that the portion of the body defining the transition region has lower thermal conduction than the portion of the body defining the reaction chamber; and

5 b) embedding at least two electrodes in the polymeric body such that the electrodes are positioned to force the sample to flow from the reaction chamber or from the transition region into the separation region when a voltage difference is applied to the electrodes.

10 17. The method of claim 16, wherein the electrodes are overmolded in the polymeric body by partially inserting the electrodes at selected locations in a mold so that the electrodes become embedded in the body after material is added to the mold.

15 18. The method of claim 17, wherein the electrodes are embedded in the polymeric body by screen-printing or depositing.

19. A device for processing a fluid sample, the device comprising:

a) a body having formed therein:

i) a reaction chamber for chemically reacting the sample;

ii) a separation region for separating components of the sample; and

20

iii) a transition region connecting the reaction chamber to the separation region, wherein the transition region includes at least one flow restrictor for controlling the flow of fluid between the reaction chamber and the separation region, and wherein the portion of the body defining the transition region has lower thermal conduction than the portion of the body defining the reaction chamber so that the transition region substantially thermally isolates the reaction chamber from the separation region;

25

b) an injection electrode embedded in the body adjacent the reaction chamber;

c) a separation electrode embedded in the body adjacent the separation region;

30

and

- 5 d) a common electrode embedded in the body adjacent the transition region such that when a voltage is applied between the injection and common electrodes, the components in the sample are transported from the reaction chamber to the transition region, and such that when a subsequent voltage is applied between the common and separation electrodes, the sample components are electrophoretically transported into the separation region.
- 10 20. The device of claim 19, further comprising a high molecular weight filter positioned in the transition region such that when the voltage is applied between the injection and common electrodes, high molecular weight species in the sample are transported from the reaction chamber to the transition region and collected on the filter, and such that when the subsequent voltage is applied between the common and separation electrodes, the high molecular weight species collected on the filter are transported into the separation region.
- 15 21. The device of claim 19, wherein the body further has formed therein at least one side channel communicating with the transition region for adding reagents to the transition region, and wherein the side channel includes at least one flow controller for controlling the flow of fluids through the channel.
- 20 22. The device of claim 21, wherein the side channel connects to the transition region upstream of the flow restrictor, and wherein the transition region further includes a collection area for mixing the sample with the reagents.

1/7



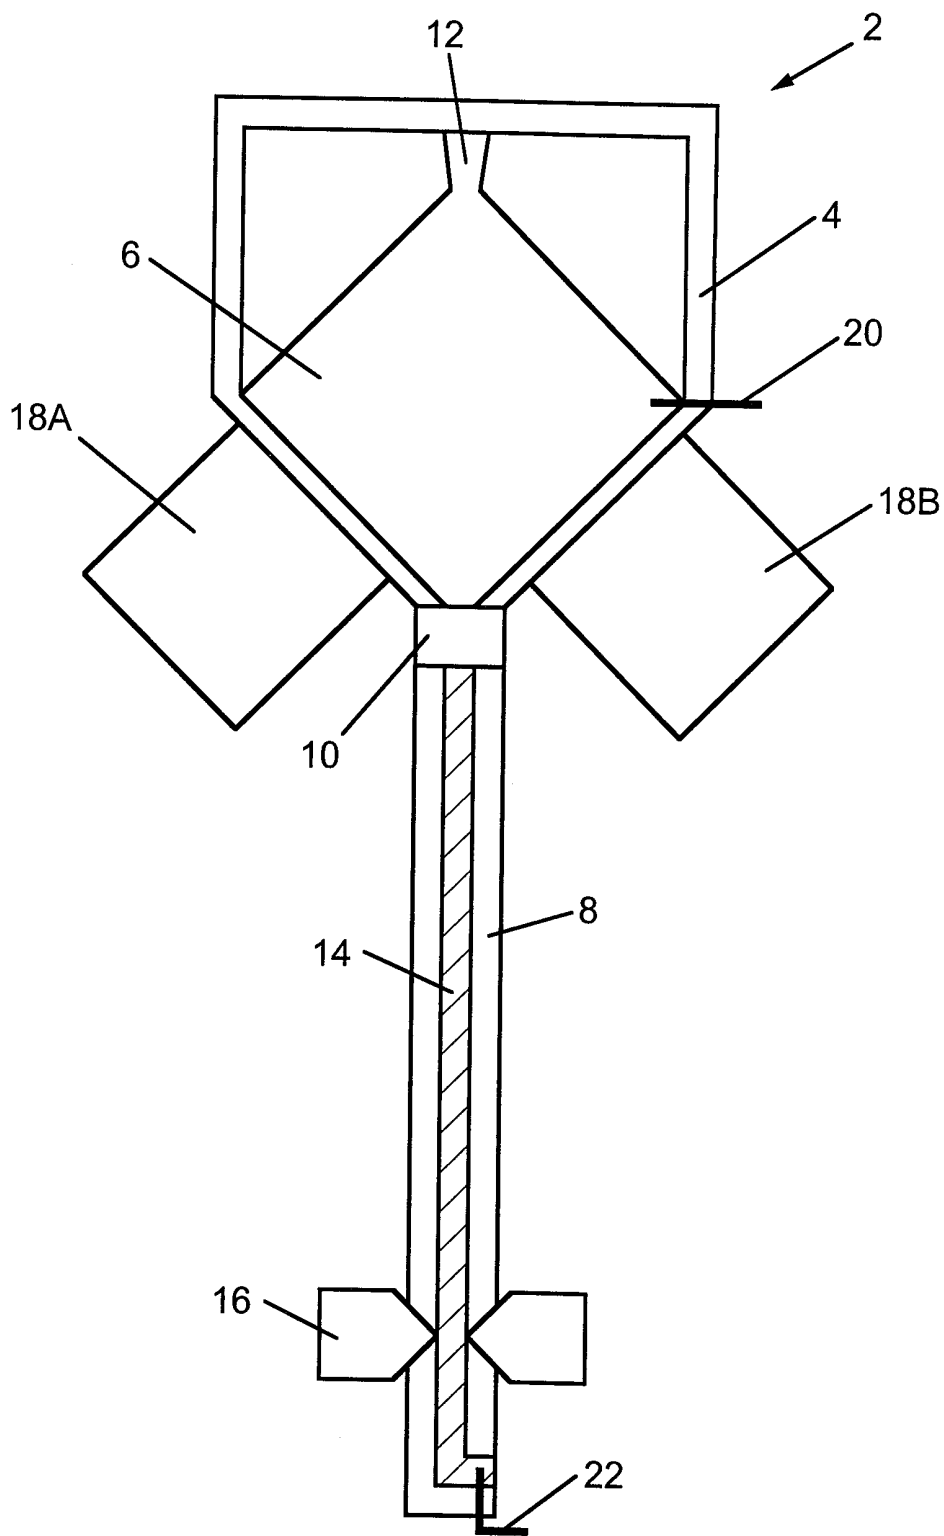


FIG. 1

3/7

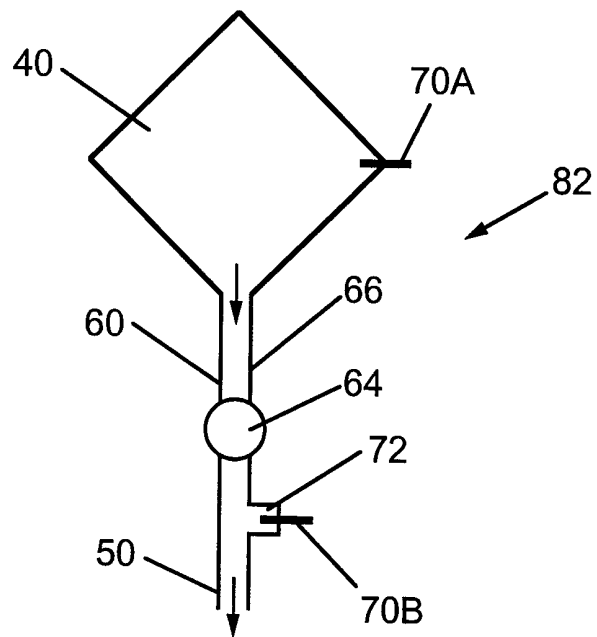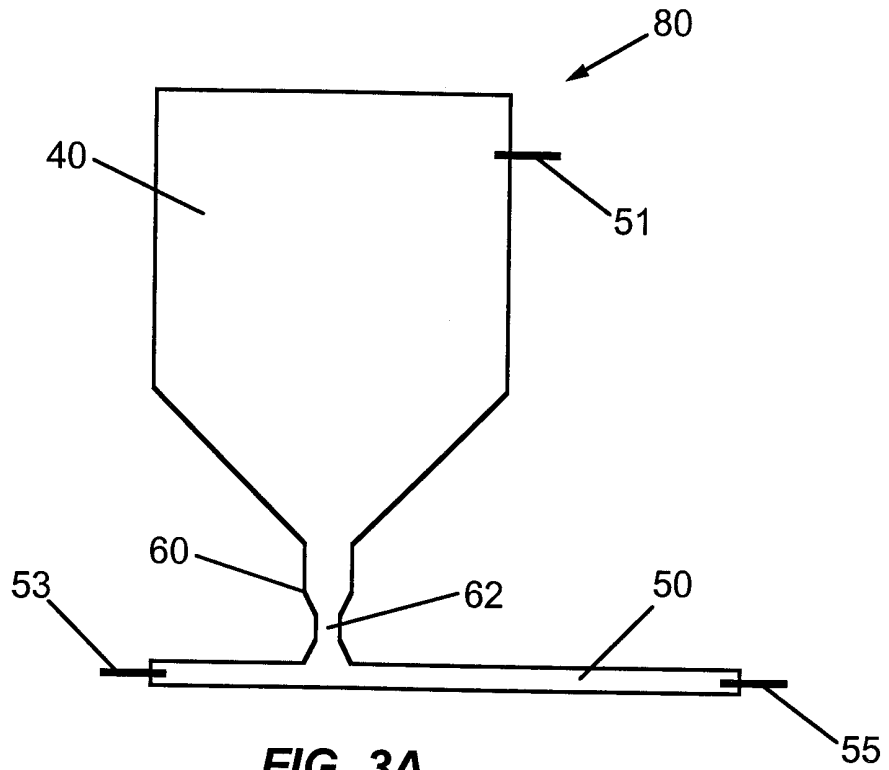

4/7

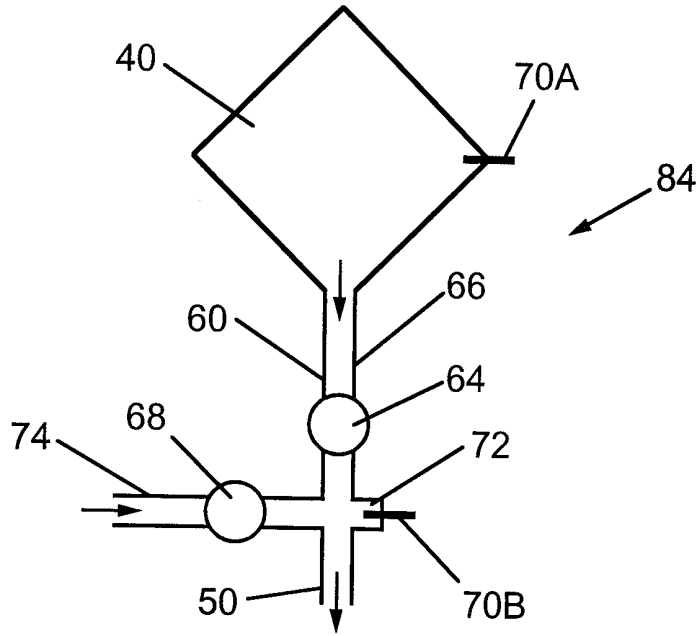


FIG. 3C

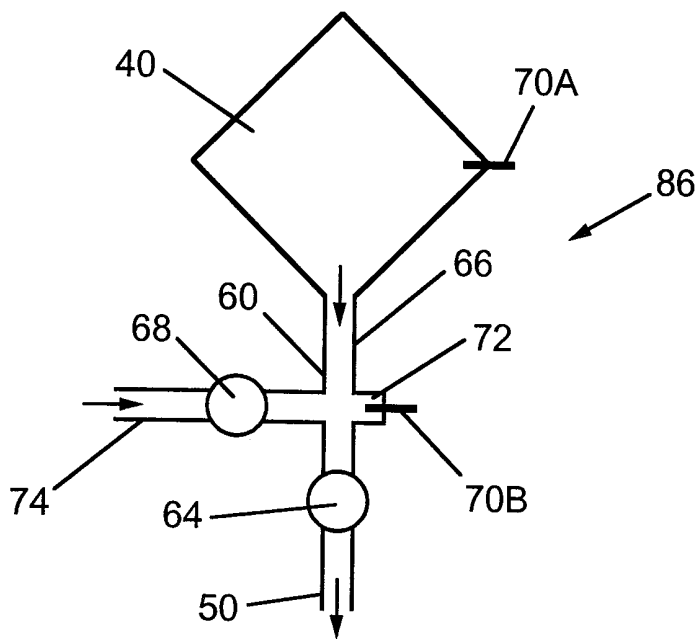


FIG. 3D

5/7

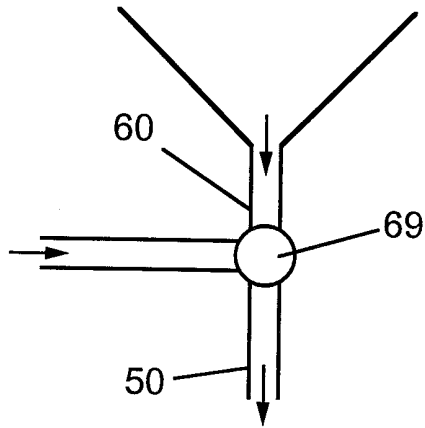


FIG. 3E

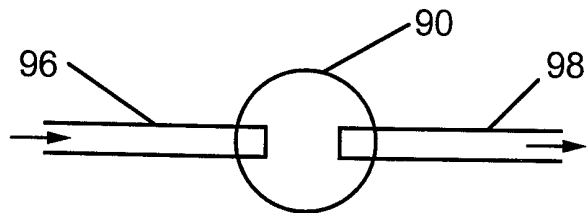


FIG. 4A

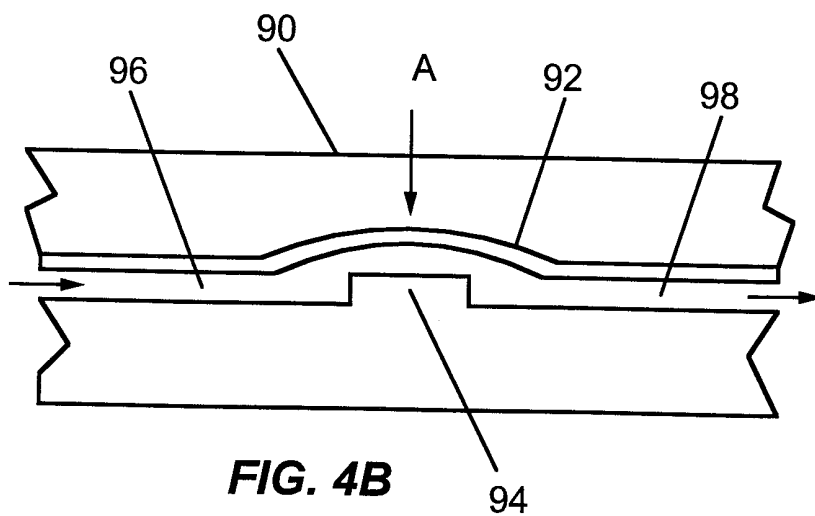


FIG. 4B

6/7

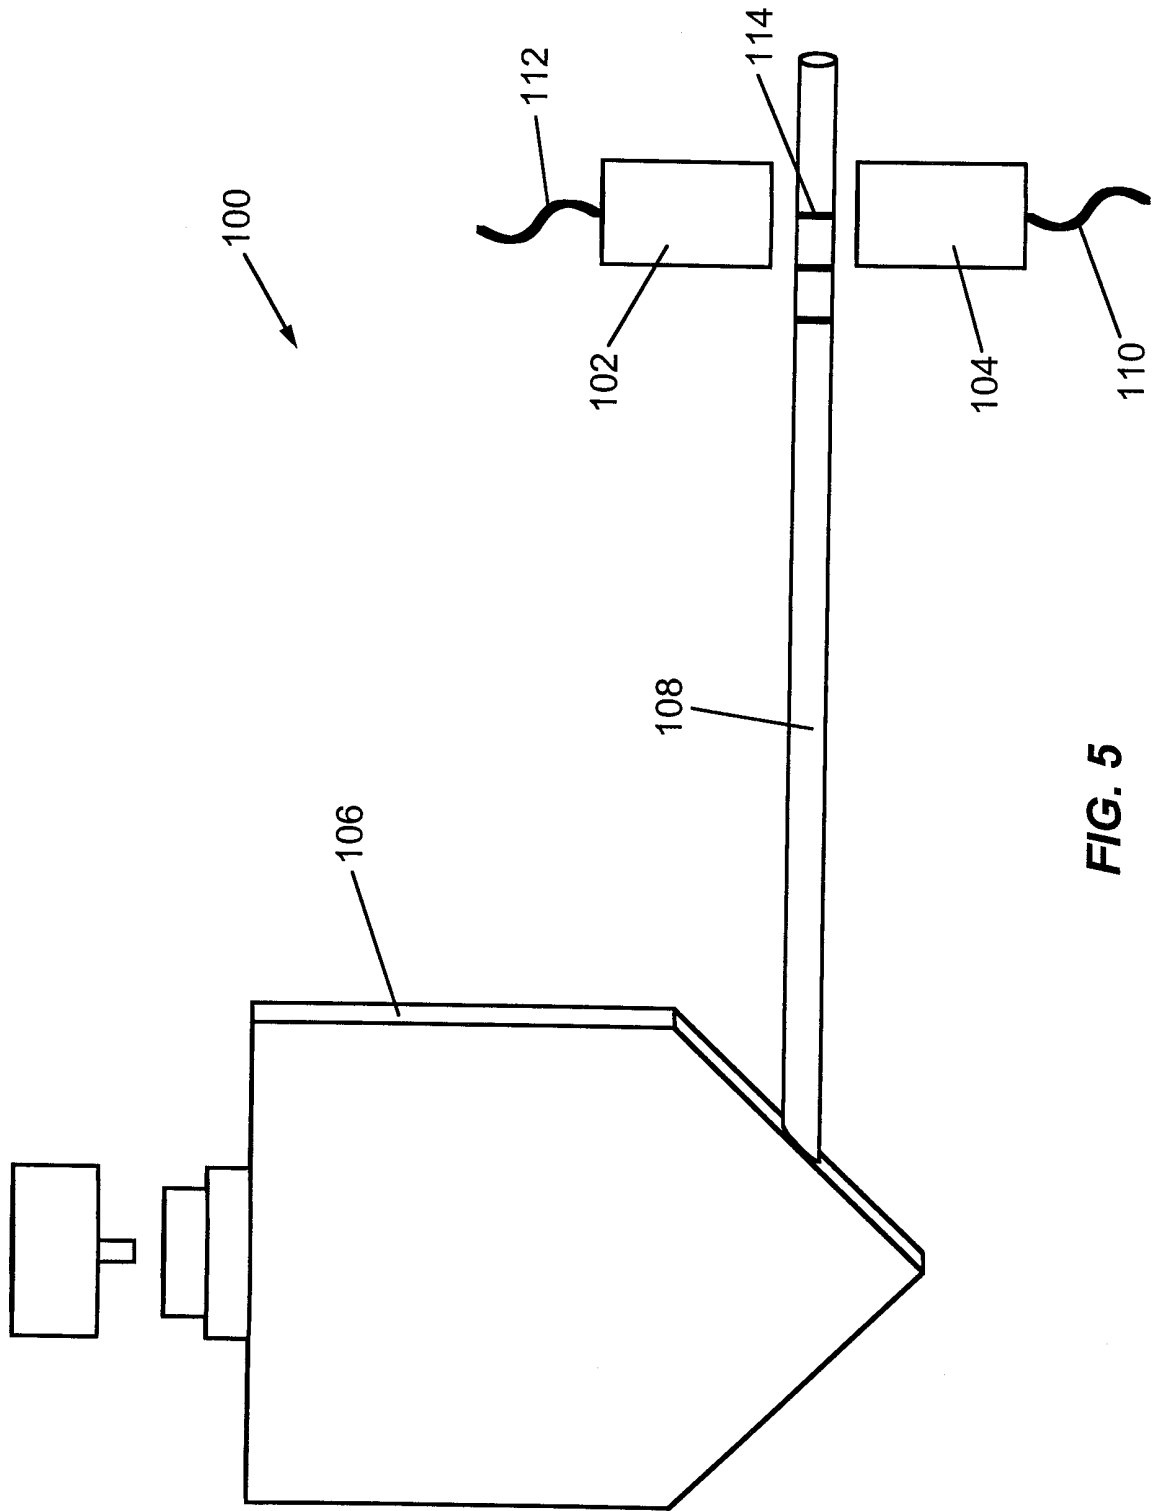


FIG. 5

7/17

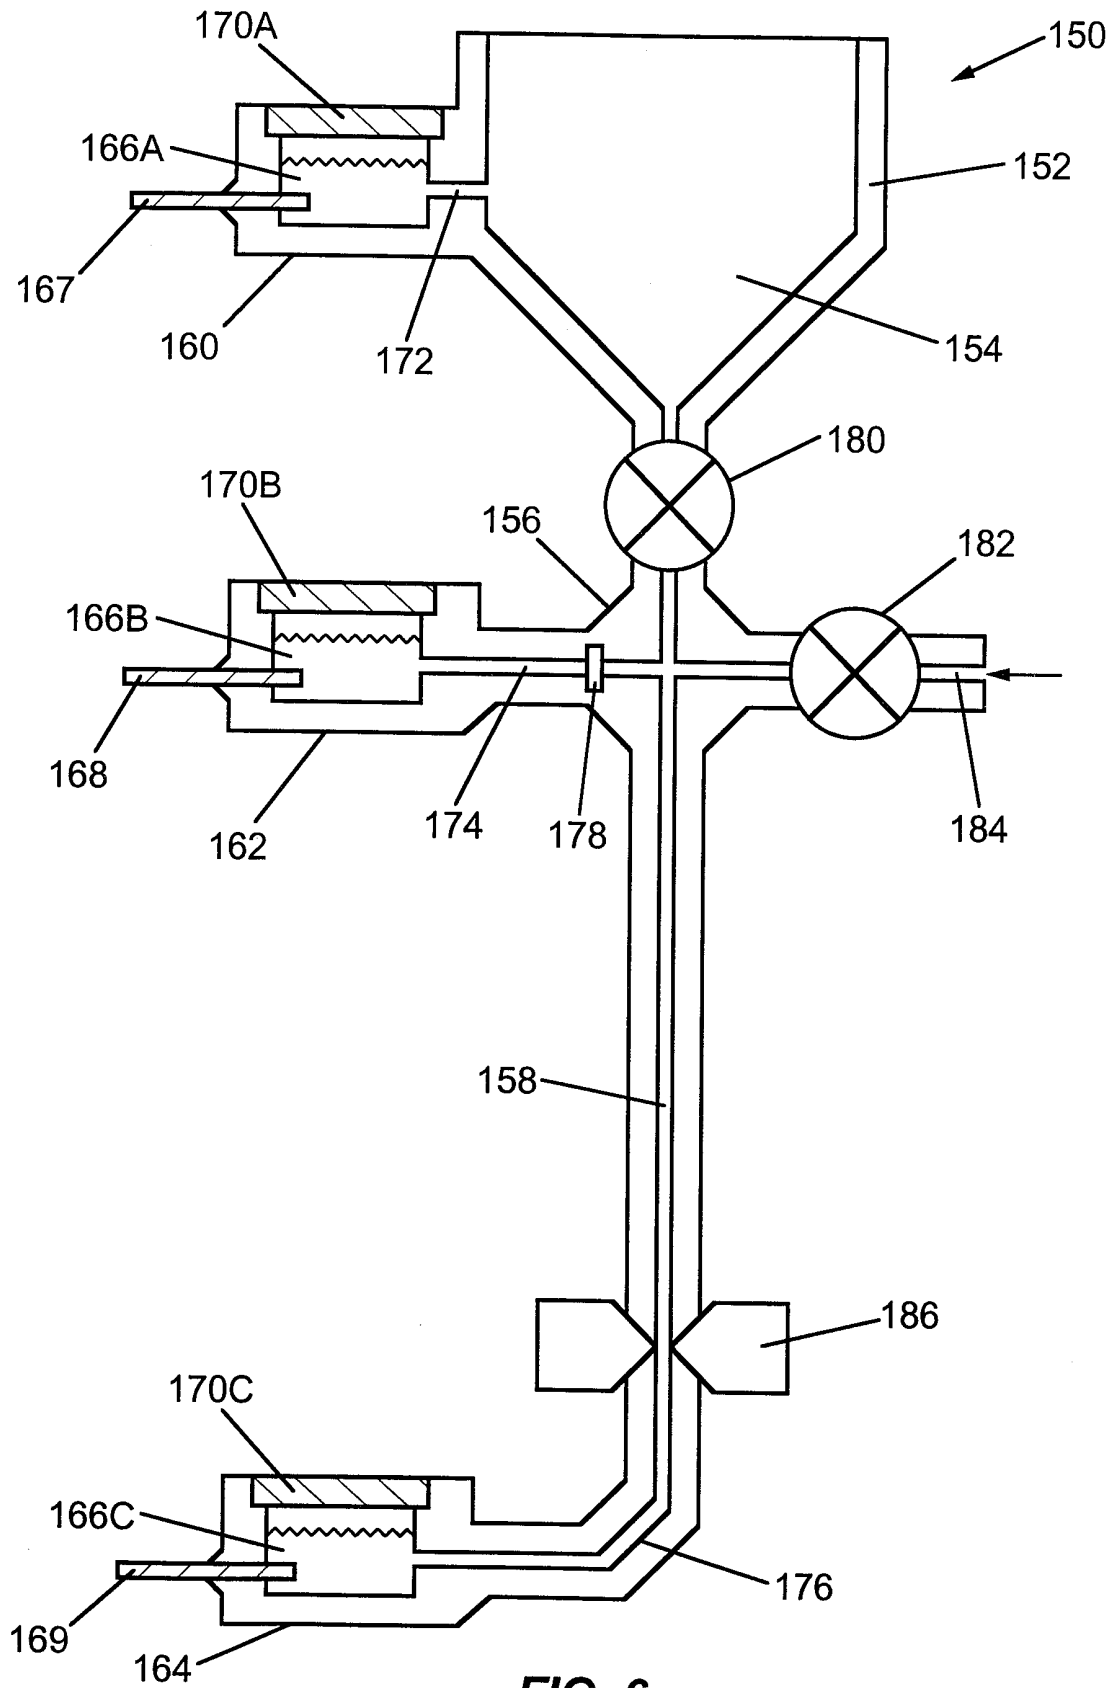


FIG. 6

INTERNATIONAL SEARCH REPORT

In **ional Application No**
PCT/US 99/06150

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 B01J19/00				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) IPC 6 B01J B01L				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
A	BURNS M A ET AL: "MICROFABRICATED STRUCTURES FOR INTEGRATED DNA ANALYSIS" PROCEEDINGS OF THE NATIONAL ACADEMY OF SCIENCES OF USA., vol. 93, 1 May 1996 (1996-05-01), pages 5556-5561, XP002058000 NATIONAL ACADEMY OF SCIENCE. WASHINGTON., US ISSN: 0027-8424 the whole document --- -/--	1-22		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.				
° Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family </td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family
"A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family			
Date of the actual completion of the international search <h2 style="text-align: center;">20 August 1999</h2>		Date of mailing of the international search report <h2 style="text-align: center;">27/08/1999</h2>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <h2 style="text-align: center;">Stevnsborg, N</h2>		

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/US 99/06150

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 96 04547 A (LOCKHEED MARTIN ENERGY SYSTEMS, INC.) 15 February 1996 (1996-02-15) abstract page 8, line 33 - page 9, line 21 page 10, line 7 - page 11, line 8 page 37, line 6 - line 27 page 39, line 32 - page 42, line 6 figures 1,25,30</p> <p style="text-align: center;">---</p>	1-22
A	<p>US 5 726 026 A (PETER WILDING & LARRY J. KRICKA) 10 March 1998 (1998-03-10)</p> <p>the whole document</p> <p style="text-align: center;">---</p>	1,5-8, 14-16, 19,21,22
A	<p>US 5 646 039 A (M. ALLEN NORTHRUP & RICHARD M. WHITE) 8 July 1997 (1997-07-08)</p> <p>the whole document</p> <p style="text-align: center;">---</p>	1,5,7-9, 16,19
A	<p>US 5 415 841 A (NORMAN J. DOVICH & KAREN C. WALDRON) 16 May 1995 (1995-05-16)</p> <p>the whole document</p> <p style="text-align: center;">---</p>	1-22
A	<p>WO 97 06437 A (AKZO NOBEL N.V.) 20 February 1997 (1997-02-20)</p> <p style="text-align: center;">---</p>	
A	<p>US 4 756 884 A (ROBERT S. HILLMAN ET AL.) 12 July 1988 (1988-07-12)</p> <p style="text-align: center;">-----</p>	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/06150

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9604547 A	15-02-1996	AU 701348 B	28-01-1999
		AU 3150895 A	04-03-1996
		CA 2196429 A	15-02-1996
		CN 1168720 A	24-12-1997
		EP 0775306 A	28-05-1997
		JP 10507516 T	21-07-1998
		US 5858195 A	12-01-1999
US 5726026 A	10-03-1998	US 5635358 A	03-06-1997
		US 5498392 A	12-03-1996
		US 5304487 A	19-04-1994
		AU 704277 B	15-04-1999
		AU 4236996 A	06-06-1996
		AU 698213 B	29-10-1998
		AU 4282896 A	06-06-1996
		AU 4282996 A	06-06-1996
		CA 2181189 A	23-05-1996
		CA 2181190 A	23-05-1996
		CN 1157639 A	20-08-1997
		CN 1143917 A	26-02-1997
		EP 0739240 A	30-10-1996
		EP 0739423 A	30-10-1996
		JP 9511407 T	18-11-1997
		JP 9509498 T	22-09-1997
		WO 9615269 A	23-05-1996
		WO 9614933 A	23-05-1996
		WO 9614934 A	23-05-1996
		US 5928880 A	27-07-1999
		AT 155711 T	15-08-1997
		AT 167816 T	15-07-1998
		AT 140025 T	15-07-1996
		AT 140880 T	15-08-1996
		AT 174813 T	15-01-1999
		AU 677780 B	08-05-1997
		AU 4222393 A	29-11-1993
		AU 680195 B	24-07-1997
		AU 4222593 A	29-11-1993
		AU 677781 B	08-05-1997
		AU 4222693 A	29-11-1993
		AU 4222793 A	29-11-1993
		AU 677197 B	17-04-1997
		AU 4223593 A	29-11-1993
		CA 2134474 A	11-11-1993
		CA 2134475 A	11-11-1993
		CA 2134476 A	11-11-1993
		CA 2134477 A	11-11-1993
		CA 2134478 A	11-11-1993
		DE 69303483 D	08-08-1996
		DE 69303483 T	06-02-1997
DE 69303898 D	05-09-1996		
DE 69303898 T	20-02-1997		
DE 69312483 D	04-09-1997		
DE 69312483 T	12-02-1998		
DE 69319427 D	06-08-1998		
DE 69319427 T	10-12-1998		
DE 69322774 D	04-02-1999		
DE 69322774 T	17-06-1999		
EP 0637996 A	15-02-1995		

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/06150

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5646039 A	08-07-1997	US 5639423 A	17-06-1997
		AU 5092193 A	29-03-1994
		EP 0711200 A	15-05-1996
		JP 7508928 T	05-10-1995
		WO 9405414 A	17-03-1994
		US 5674742 A	07-10-1997
		-----	-----
US 5415841 A	16-05-1995	CA 2097257 A	29-11-1994
		US 5565171 A	15-10-1996
-----	-----	-----	-----
WO 9706437 A	20-02-1997	AU 6788796 A	05-03-1997
		CA 2228485 A	20-02-1997
		EP 0843817 A	27-05-1998
-----	-----	-----	-----
US 4756884 A	12-07-1988	AT 105084 T	15-05-1994
		AU 593001 B	01-02-1990
		AU 6088486 A	12-02-1987
		CA 1275231 A	16-10-1990
		DE 3650530 D	18-07-1996
		DE 3650530 T	21-11-1996
		DE 3650574 D	31-10-1996
		DE 3650574 T	13-03-1997
		DE 3650610 D	15-05-1997
		DE 3650610 T	25-09-1997
		DE 3689812 D	01-06-1994
		DE 3689812 T	01-09-1994
		EP 0212314 A	04-03-1987
		EP 0483117 A	29-04-1992
		EP 0485368 A	13-05-1992
		EP 0488994 A	03-06-1992
		JP 7092169 A	07-04-1995
		JP 7104356 B	13-11-1995
		JP 1945801 C	23-06-1995
		JP 6058373 B	03-08-1994
		JP 62129759 A	12-06-1987
		JP 2032116 C	19-03-1996
		JP 6094722 A	08-04-1994
		JP 7069330 B	26-07-1995
		JP 2595422 B	02-04-1997
		JP 6094723 A	08-04-1994
		JP 2075360 C	25-07-1996
		JP 6094724 A	08-04-1994
		JP 7117546 B	18-12-1995
		US 5004923 A	02-04-1991
		US 5164598 A	17-11-1992
		US 5144139 A	01-09-1992
		US 5204525 A	20-04-1993
US 5140161 A	18-08-1992		
US 5300779 A	05-04-1994		
US 4963498 A	16-10-1990		
US 4948961 A	14-08-1990		
-----	-----	-----	-----