




(86) Date de dépôt PCT/PCT Filing Date: 2008/12/23
 (87) Date publication PCT/PCT Publication Date: 2010/07/01
 (45) Date de délivrance/Issue Date: 2017/11/14
 (85) Entrée phase nationale/National Entry: 2011/06/23
 (86) N° demande PCT/PCT Application No.: CA 2008/002282
 (87) N° publication PCT/PCT Publication No.: 2010/071961

(51) Cl.Int./Int.Cl. *H04L 29/14* (2006.01),
H04W 24/04 (2009.01)
 (72) Inventeurs/Inventors:
ARSENAULT, JONATHAN ALLAN, CA;
CLARK, DAVID WILLIAM, CA;
MURRAY, SEAN MACLEAN, CA;
WOLF, ERIC JOHN, CA
 (73) Propriétaire/Owner:
BCE INC., CA
 (74) Agent: GOWLING WLG (CANADA) LLP

(54) Titre : PROCÉDES ET SYSTÈMES POUR ACTIVER UN ÉQUIPEMENT D'UTILISATEUR FINAL AU NIVEAU D'UN LOCAL D'UTILISATEUR FINAL POUR EFFECTUER DES COMMUNICATIONS LORSQU'UNE CAPACITÉ DE L'ÉQUIPEMENT D'UTILISATEUR FINAL A COMMUNIQUER PAR L'INTERMÉDIAIRE D'UNE LIAISON DE COMMUNICATION CONNECTANT L'ÉQUIPEMENT D'UTILISATEUR FINAL A UN RESEAU DE COMMUNICATION EST PERTURBEE
 (54) Title: METHODS AND SYSTEMS FOR ENABLING END-USER EQUIPMENT AT AN END-USER PREMISE TO EFFECT COMMUNICATIONS WHEN AN ABILITY OF THE END-USER EQUIPMENT TO COMMUNICATE VIA A COMMUNICATION LINK CONNECTING THE END-USER EQUIPMENT TO A COMMUNICATIONS NETWORK IS DISRUPTED

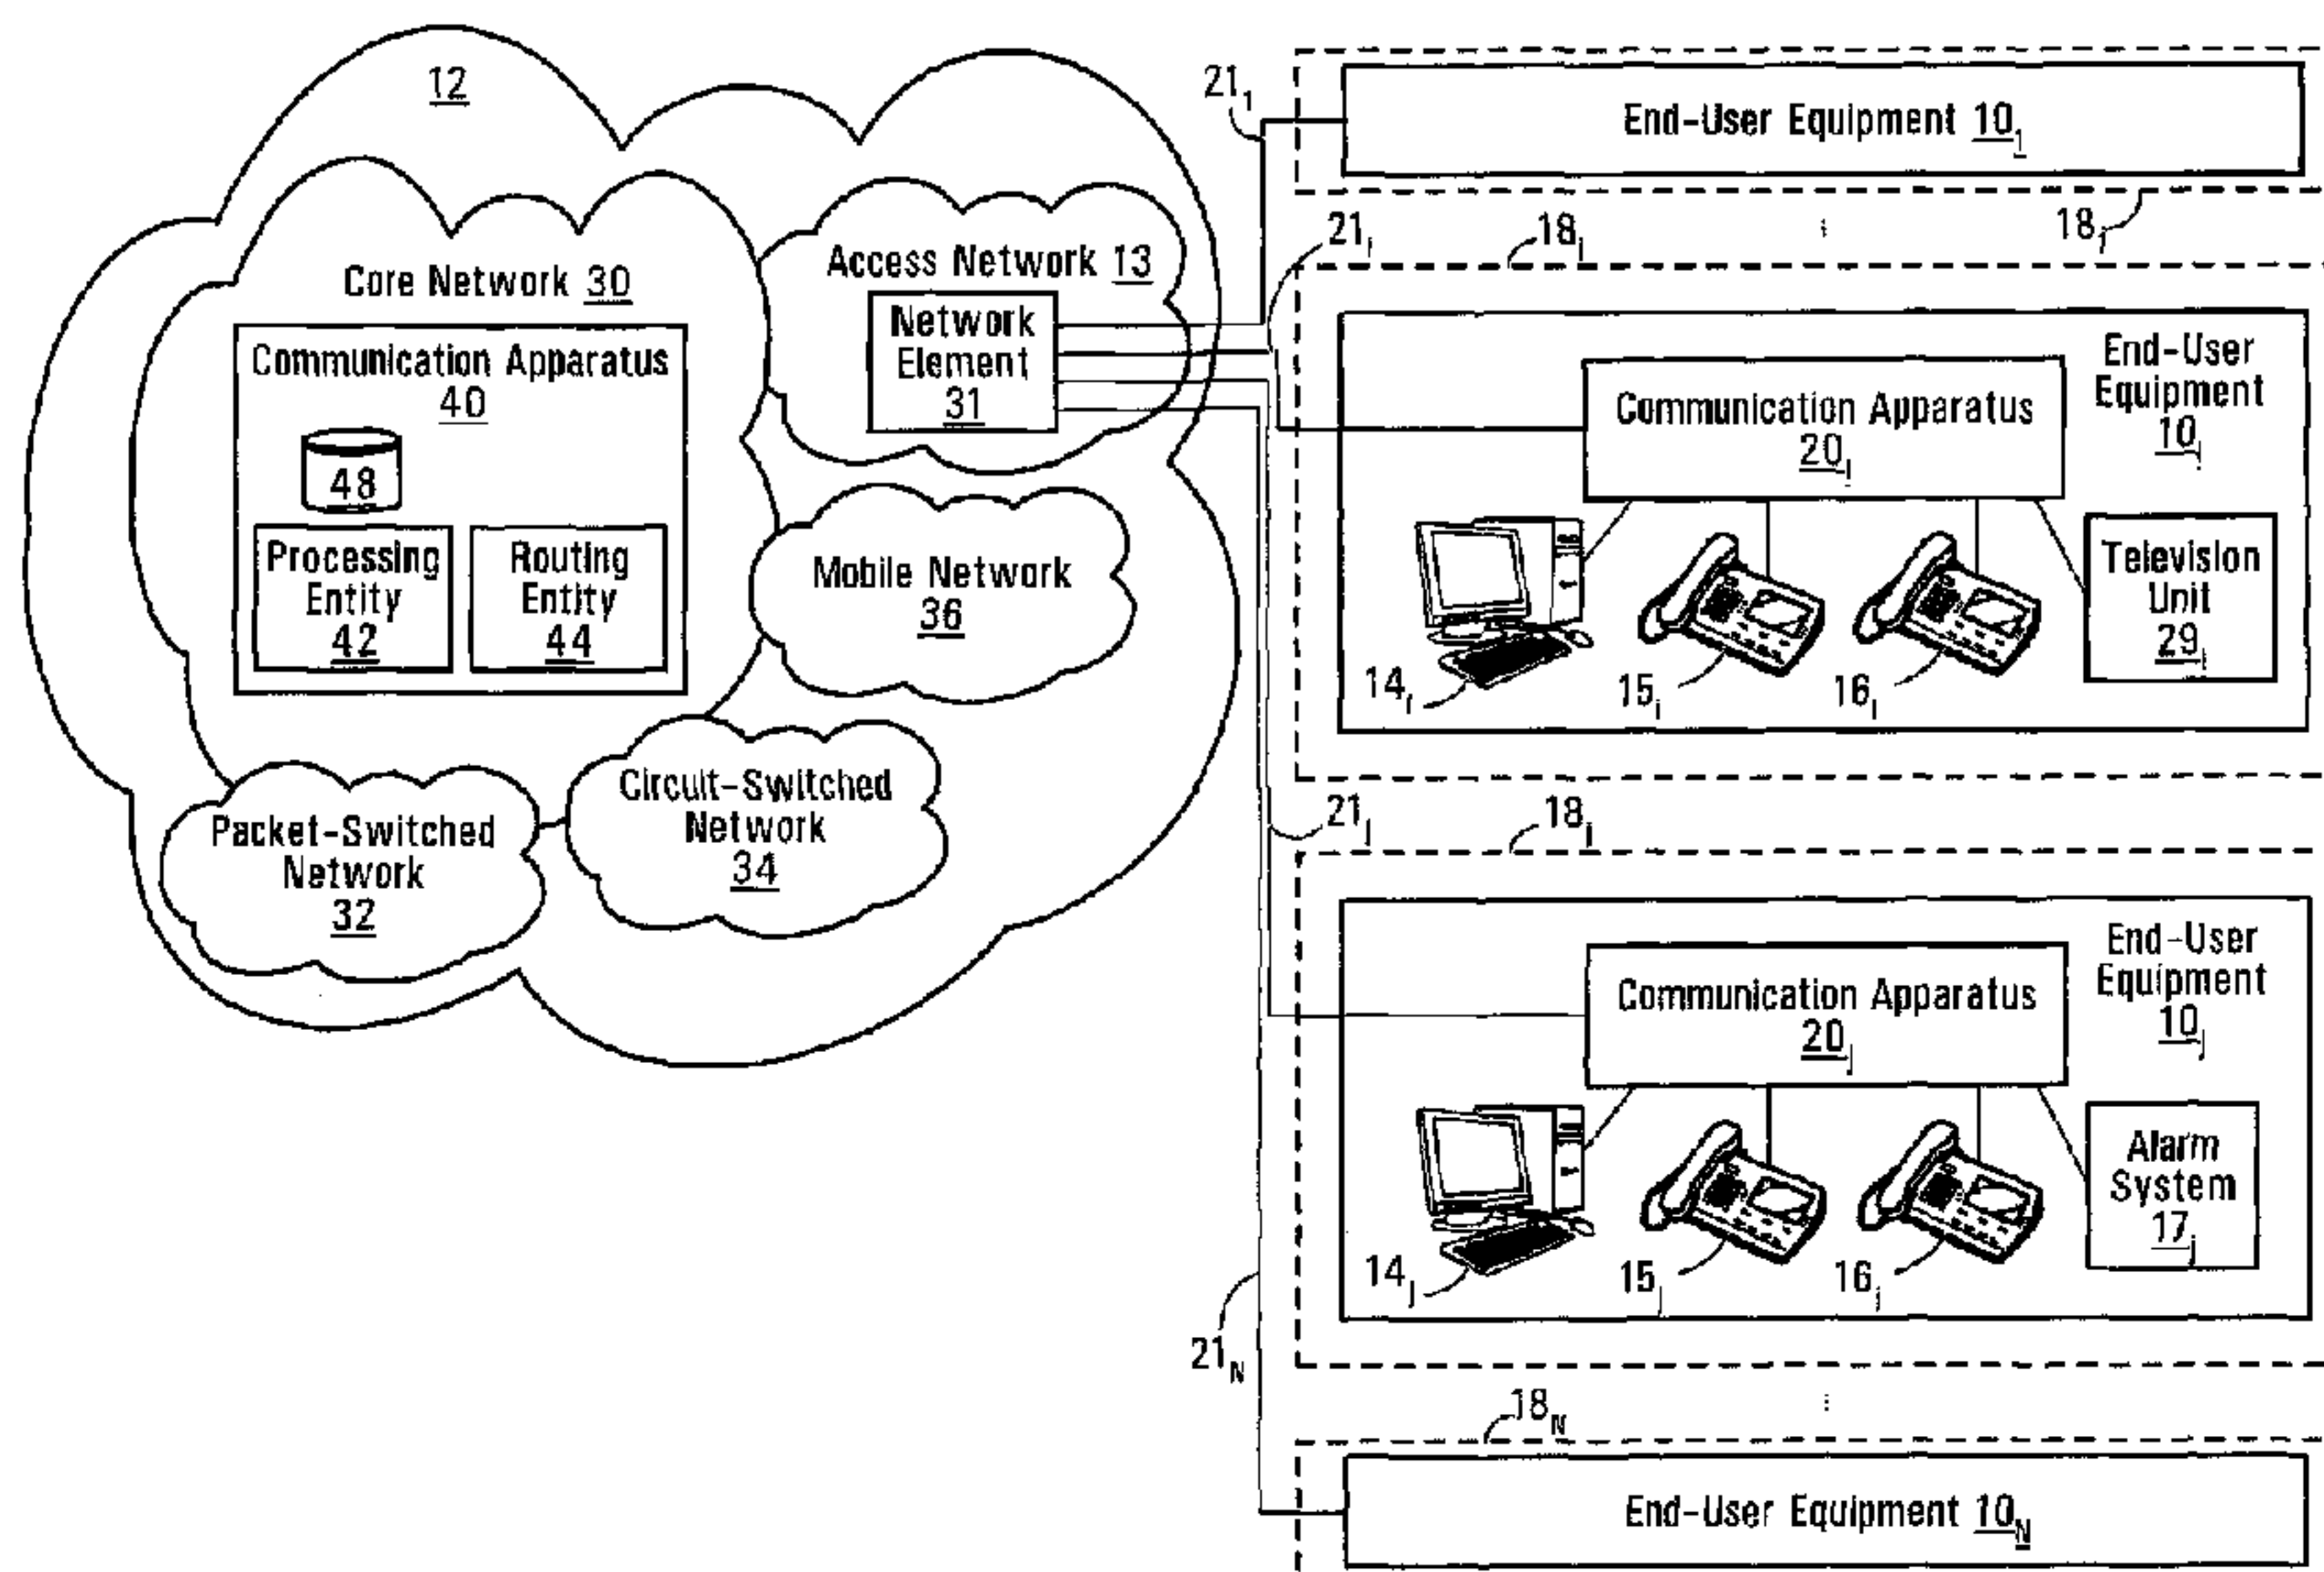

(57) Abrégé/Abstract:

A method for effecting communications, such as telephone calls, accesses to data network sites, alarm system communications, and/or other communications, over a communications network. The method comprises: determining that an ability of first end-user

(57) **Abrégé(suite)/Abstract(continued):**

equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted; establishing a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise; and causing information transmitted by or destined for the first end-user equipment to be exchanged over the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network. Also provided are apparatus and computer-readable media containing a program element executable by a computing system to perform such a method.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
1 July 2010 (01.07.2010)(10) International Publication Number
WO 2010/071961 A1

(51) International Patent Classification:

H04L 29/14 (2006.01) *H04W 24/04* (2009.01)

(21) International Application Number:

PCT/CA2008/002282

(22) International Filing Date:

23 December 2008 (23.12.2008)

(25) Filing Language:

English

(26) Publication Language:

English

(71) Applicant (for all designated States except US): **BCE INC.** [CA/CA]; 1000 De La Gauchetière Street West, Suite 3700, Montreal, Quebec H3B 4Y7 (CA).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ARSENAULT, Jonathan, Allan** [CA/CA]; 5894 Pineglade Crescent, Oleans, Ontario K1W 1G3 (CA). **CLARK, David William** [CA/CA]; 125 Ladyslipper Way, Carp, Ontario K0A 1L0 (CA). **WOLF, Eric, John** [CA/CA]; 165 Arrowwood Dr., Stittsville, Ontario K2S 2G1 (CA). **MURRAY, Sean MacLean** [CA/CA]; 67 Silverlace Private, Ottawa, Ontario K1T 3Z8 (CA).(74) Agent: **SMART & BIGGAR**; 1000 De La Gauchetière Street West, Suite 3300, Montreal, Quebec H3B 4W5 (CA).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS AND SYSTEMS FOR ENABLING END-USER EQUIPMENT AT AN END-USER PREMISE TO EFFECT COMMUNICATIONS WHEN AN ABILITY OF THE END-USER EQUIPMENT TO COMMUNICATE VIA A COMMUNICATION LINK CONNECTING THE END-USER EQUIPMENT TO A COMMUNICATIONS NETWORK IS DISRUPTED

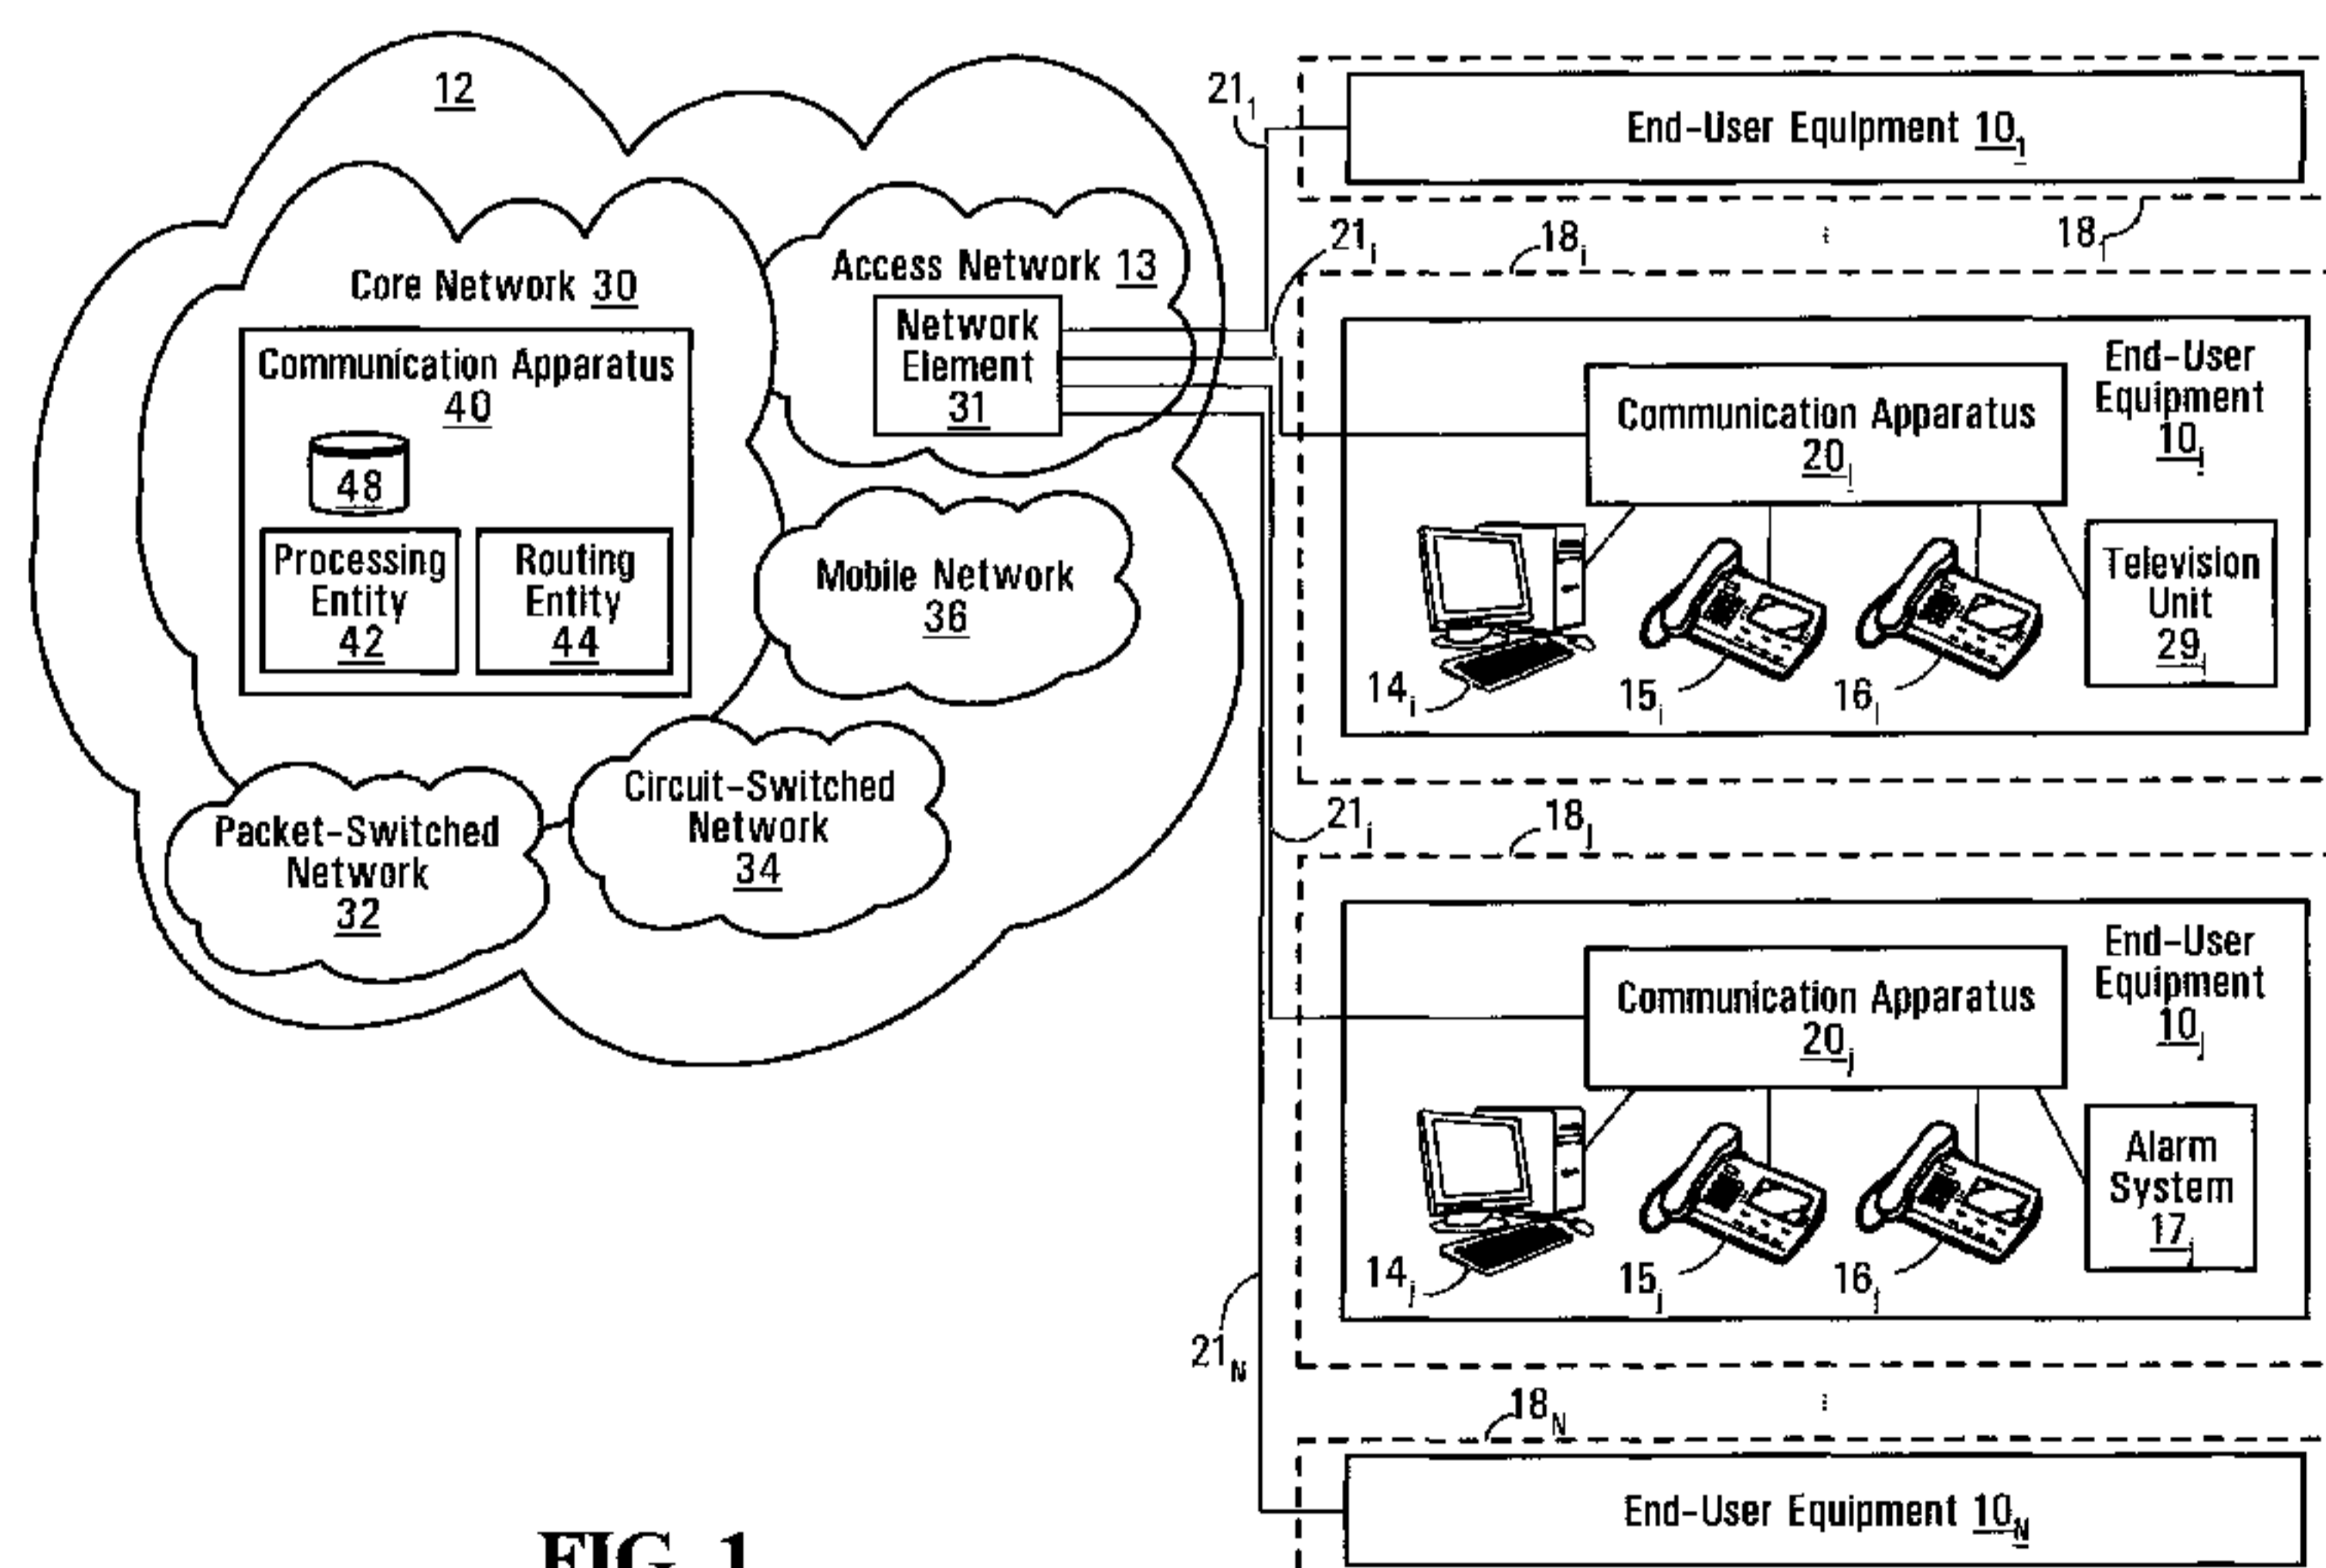


FIG. 1

(57) Abstract: A method for effecting communications, such as telephone calls, accesses to data network sites, alarm system communications, and/or other communications, over a communications network. The method comprises: determining that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted; establishing a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise; and causing information transmitted by or destined for the first end-user equipment to be exchanged over the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network. Also provided are apparatus and computer-readable media containing a program element executable by a computing system to perform such a method.

**METHODS AND SYSTEMS FOR ENABLING END-USER EQUIPMENT AT
AN END-USER PREMISE TO EFFECT COMMUNICATIONS WHEN AN
ABILITY OF THE END-USER EQUIPMENT TO COMMUNICATE VIA A
COMMUNICATION LINK CONNECTING THE END-USER EQUIPMENT
5 TO A COMMUNICATIONS NETWORK IS DISRUPTED**

FIELD OF THE INVENTION

10

The invention relates generally to telecommunications and, more particularly, to methods and systems for enabling end-user equipment at an end-user premise to effect communications when an ability of the end-user equipment to communicate via a communication link connecting the end-user equipment to a communications network
15 is disrupted.

BACKGROUND

20 End-user premises such as residences or other buildings (or parts thereof) can be equipped with various pieces of equipment, including phones, computers, alarm system devices and/or other devices (e.g., television units), which can be used to effect telephone calls, accesses to data network sites (e.g., websites), alarm system communications, and/or other communications (e.g., television signals, etc.).

25

Communications effected by end-user equipment at a given end-user premise take place over a communication link, such as a metallic twisted-pair cable, a coaxial cable, an optic fiber cable, or a wireless link, which reaches the given end-user premise and connects the end-user equipment to a communications network. In some
30 situations, an ability of the end-user equipment to communicate via the communication link can be disrupted. For example, in some cases, the communication link can be disrupted, for instance, due to a cut or other physical damage inflicted (accidentally or maliciously) to the communication link or to any other condition

preventing the communication link from operating normally. In other cases, software and/or hardware (e.g., a modem) of the end-user equipment used by the end-user equipment to effect communications via the communication link can be disrupted, for instance, due to a defective or inoperative component. In such situations, it may no longer be possible for the end-user equipment to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications via the communication link.

Accordingly, there exists a need for solutions enabling end-user equipment at an end-user premise to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications when an ability of the end-user equipment to communicate via a communication link connecting the end-user equipment to a communications network is disrupted.

15

SUMMARY OF THE INVENTION

According to a first broad aspect, the invention provides a method for effecting communications over a communications network. The method comprises: determining that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted; establishing a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise; and causing information transmitted by or destined for the first end-user equipment to be exchanged over the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network.

According to a second broad aspect, the invention provides apparatus for effecting communications over a communications network. The apparatus comprises a processing entity configured to determine that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted. The apparatus

also comprises a routing entity configured to: establish a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise; and cause information transmitted by or destined for the first end-user equipment to be exchanged over the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network.

According to a third broad aspect, the invention provides computer-readable media containing a program element executable by a computing system to perform a method for effecting communications over a communications network. The program element comprises: program code for causing the computing system to determine that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted; program code for causing the computing system to establish a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise; and program code for causing the computing system to cause information transmitted by or destined for the first end-user equipment to be exchanged over the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network.

These and other aspects of the invention will become apparent to those of ordinary skill in the art upon review of the following description of example embodiments of the invention in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

A detailed description of certain embodiments of the invention is provided herein below, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 shows an example of an architecture comprising a communications network allowing end-user equipment located at respective end-user premises to effect various communications, in accordance with an embodiment of the invention;

- 5 Figure 2 shows an example of potential contents of a database of a communication apparatus of the communications network shown in Figure 1;

Figure 3 shows a communication apparatus of the end-user equipment located at one of the end-user premises shown in Figure 1;

10

Figure 4 shows an example of potential contents of a database of the communication apparatus shown in Figure 3;

- 15 Figures 5A and 5B show an example in which a wireless communication link is established between the end-user equipment at a first one of the end-user premises and the end-user equipment at a second one of the end-user premises in order to allow information pertaining to a communication effected using the end-user equipment at the first one of the end-user premises to be exchanged over the communications network, when an ability of the end-user equipment at the first one of the end-user premises to communicate via a communication link connecting the end-user equipment at the first one of the end-user premises to the communications network is
20 disrupted; and

- 25 Figures 6A and 6B show a variant to the example considered in Figures 5A and 5B.

It is to be expressly understood that the description and drawings are only for the purpose of illustration of example embodiments of the invention and are an aid for understanding. They are not intended to be a definition of the limits of the invention.

30

DETAILED DESCRIPTION OF EMBODIMENTS

Figure 1 shows an example of an architecture comprising a communications network 12 allowing end-user equipment 10_1-10_N located at respective end-user premises 18_1-18_N to effect various communications, including telephone calls, accesses to data network sites (e.g., websites), alarm system communications, and/or other communications (e.g., television signals), in accordance with an embodiment of the invention. Each of the end-user premises 18_1-18_N may be a residence (such as a house or an apartment) or other building (or a part thereof).

10

The end-user equipment 10_x ($1 \leq x \leq N$) at the end-user premise 18_x is connected to the communications network 12 via a respective one of a plurality of communication links 21_1-21_N that reach corresponding ones of the end-user premises 18_1-18_N . In this embodiment, the communication links 21_1-21_N are part of an access network 13 that is provided by a service provider providing communication services to the end-user premises 18_1-18_N . The access network 13 leads to a core network 30 provided by the service provider to enable the end-user equipment 10_1-10_N at the end-user premises 18_1-18_N to effect communications over various networks of the communications network 12, including a packet-switched network 32 (e.g., the Internet), a circuit-switched network 34 (e.g., the Public Switched Telephone Network (PSTN)) and a mobile network 36 (e.g., a Global System for Mobile Communications (GSM) network or other cellular network).

15

More particularly, in this embodiment, each of the communication links 21_1-21_N comprises a metallic twisted-pair cable (e.g., a copper twisted-pair cable) or a coaxial cable that is connected to a network element 31 of the access network 13. Also, in this embodiment, the access network 13 is based on a fiber-to-the-node or -neighborhood (FTTN) infrastructure such that the network element 31 comprises a FTTN platform (e.g., an Alcatel 7330 Intelligent Services Access Manager (ISAM) Fiber to the Node (FTTN) platform) which, in addition to being connected to the communication links 21_1-21_N , is connected to optical fiber cabling of the access network 13. The optical fiber cabling is connected to other components of the access network 13 (e.g., one or

25

30

more routers or switches, an optical Ethernet network, etc.) that interface with the core network 30.

The access network 13 and the communication links 21_1-21_N may be implemented in various other ways in other embodiments. For example, in some embodiments, the access network 13 may be based on a fiber-to-the-curb (FTTC) infrastructure and the network element 31 may be a FTTC platform. In other embodiments, the network element 31 may be omitted depending on the nature of the access network 13. For example, in some embodiments, the access network 13 may be based on a fiber-to-the-premises (FTTP) infrastructure (e.g., fiber-to-the-building (FTTB) or fiber-to-the-house (FTTH) infrastructures) in which case the communication links 21_1-21_N may comprise optical fiber cables leading to optical network terminals (ONTs) that may be part of the end-user equipment 10_1-10_N at the end-user premises 18_1-18_N . In yet other embodiments, the communication links 21_1-21_N may comprise a wireless link portion (e.g., a WiMAX link, a satellite-based link, etc.).

The core network 30 comprises a communication apparatus 40 configured to perform various operations when a communication, such as a telephone call or an access to a data network site, is originated by, destined for, in progress at certain end-user equipment (such as any of the end-user equipment 10_1-10_N). The communication apparatus 40 comprises suitable hardware, firmware, software or a combination thereof for implementing a plurality of functional entities, including a processing entity 42, a routing entity 44 and a database 48.

The processing entity 42 implements a processing logic to process communications originated by, destined for, or in progress at end-user equipment (such as any of the end-user equipment 10_1-10_N). The processing logic may be defined by a sequence of decisions to be taken with respect to a given communication, which may lead to one or more actions being performed based on those decisions. Each decision taken with respect to the given communication may be based on one or more factors. One example of such a factor is an origin of the given communication which, for instance, may be specified by: a telephone number, an Internet Protocol (IP) address, a Uniform Resource Identifier (URI) (e.g., a Session Initiation Protocol (SIP) URI), and/or

another identifier identifying a device that originated the given communication; a name or other identifier of a party that originated the given communication; a time at which the given communication was originated (e.g., a day, hour, minute, etc.); and/or a location (e.g., a civic address) where the given communication was originated.

5 Another example of such a factor is a destination of the given communication which, for instance, may be specified by: a telephone number, an IP address, a URI (e.g., a SIP URI), and/or another identifier identifying a device for which the given communication is destined; a name or other identifier of a party for which the given communication is destined; and/or a location (e.g., a civic address) for which the
10 given communication is destined. In some cases, a factor on which may be based a decision to be taken with respect to the given communication may also be defined in terms of certain information included in the database 48 that may be accessed by the processing entity 42 (e.g., where the given communication is a telephone call, certain information in the database 48 on how to process calls involving a party having
15 originated the telephone call or for which the telephone call is destined may be used by the processing entity 42).

Figure 2 shows an example of potential contents of the database 48. In this example, the database 48 stores a plurality of records 200_1-200_N , where each of these records is
20 associated with a subscription to communication services provided by the service provider to a respective one of the end-user premises 18_1-18_N . In other words, each of the end-user premises 18_1-18_N is associated with a different subscriber (i.e., a person or a group of persons) to which the service provider provides communication services. The database 48 may store other records associated with other subscriptions
25 associated with other end-user premises which are served by the service provider.

The record 200_x is associated with the subscriber to which communication services are provided at the end-user premise 18_x and includes various types of information. More particularly, in this example, the record 200_x includes:

- 30 - subscriber identification information 19 identifying the subscriber. For example, the subscriber identification information 19 may include an account number (e.g., a phone number) and/or another subscriber identifier (e.g., a name);

- location information 23 indicating a physical location of the end-user premise 18_x. For example, the location information 23 may include a civic address, a set of geo-coordinates, and/or any other information that indicates the physical location of the end-user premise 18_x;
- 5 - end-user equipment information 27 regarding the end-user equipment 10_x at the end-user premises 18_x, which includes information regarding each of one or more pieces of equipment of the end-user equipment 10_x. For example, the information regarding a given piece of equipment of the end-user equipment 10_x may include an identifier of the given piece of equipment, such as: a Media Access Control
10 (MAC) address, an Ethernet hardware address (EHA), or another hardware identifier of the given piece of equipment; an IP address assigned to the given piece of equipment; a URI (e.g., a SIP URI) identifying the given piece of equipment; or any other information that identifies the given piece of equipment. The end-user equipment information 27 may also include additional information
15 that concerns the end-user equipment 10_x at the end-user premise 18_x, examples of which will be discussed later on; and
- service information 25 regarding one or more communication services provided to the subscriber by the service provider. For example, the service information 25 may comprise call processing information that is related to processing of calls
20 destined for or originated by the subscriber and that is used by the communication apparatus 40 to process such calls. In some cases, the call processing information may relate to one or more telephony features (e.g., call forwarding, call waiting, calling line identification (CLID) display, etc.) that may be subscribed to by the subscriber.

25

While this example illustrates certain information that can be included in the records 200₁-200_N of the database 48, various other information may be included in these records in other embodiments. In addition, while it is depicted in Figure 1 as being one component, the database 48 may be distributed in nature. For example, in some
30 embodiments, the database 48 can have portions of its content stored in different data storage media possibly located in different components of the communication apparatus 40 that are linked by one or more physical (i.e., wired or wireless) links.

The routing entity 44 is operative to cause one or more actions to be performed based on one or more decisions taken by the processing entity 42 with respect to a given communication, such as route information conveyed by the given communication to a certain piece of equipment which may be, for instance, a certain end-user device or a certain network element (e.g., a router). For example, the routing entity 44 may cause information conveyed by the given communication to be routed via the packet-switched network 32, the circuit-switched network 34, or the mobile network 36. To that end, the routing entity 44 may interact with one or more gateways interfacing with the packet-switched network 32, the circuit-switched network 34, and the mobile network 36

In some embodiments, the processing entity 42, the routing entity 44 and the database 48 may be implemented by a common network component. For example, in some embodiments, the processing entity 42, the routing entity 44 and the database 48 may be implemented by a softswitch or other computer platform. Alternatively, in other embodiments, the processing entity 42, the routing entity 44 and the database 48 may be implemented by two or more different network components that are linked by one or more physical (i.e., wired or wireless) links. For example, in some embodiments, the processing entity 42, the routing entity 44 and the database 48 may be implemented by two or more softswitches or other computer platforms.

The end-user equipment 10_x at the end-user premise 18_x comprises various pieces of equipment that can be used to effect communications, including telephone calls, accesses to data network sites, alarm system communications, and/or other communications (e.g., television signals). More particularly, the end-user equipment 10_x at the end-user premise 18_x comprises one or more end-user devices configured to effect communications, such as: one or more telephones, each of which may be, for instance, a wired Plain Old Telephony System (POTS) phone (including a cordless phone), a Voice-over-Internet Protocol (VoIP) phone, a POTS phone equipped with an analog terminal adapter (ATA), a softphone (i.e., a computer equipped with telephony software), or a telephony-enabled television unit (e.g., a set-top box connected to a television and a remote control); one or more computers, each of which may comprise, for instance, a desktop computer, a laptop computer or another

personal computer (PC); one or more alarm system devices of an alarm system (sometimes also referred to as a “security system”), each of which may comprise, for instance, a door or window opening detector, a smoke detector, a motion detector, a glass break detector and/or another detector, a controller, and/or another piece of equipment of the alarm system; and/or one or more other end-user devices (e.g., a television unit).

Also, in this embodiment, the end-user equipment 10_x at the end-user premise 18_x comprises a communication apparatus 20_x that is connected to the one or more end-user devices at the end-user premise 18_x and to the communication link 21_x reaching the end-user premise 18_x in order to allow these one or more end-user devices to communicate over the communications network 12 via the communication link 21_x . The communication apparatus 20_x at the end-user premise 18_x can thus be viewed as a communications center or hub through which communications originated by, destined for, or in progress at the one or more end-user devices at the end-user premise 18_x are effected via the communication link 21_x reaching the end-user premise 18_x .

In some situations, an ability of the end-user equipment 10_x to communicate via the communication link 21_x can be disrupted (i.e., not normal). For example, in some cases, the communication link 21_x can be disrupted, for instance, due to a cut or other physical damage inflicted (accidentally or maliciously) to the communication link 21_x (e.g., to a metallic twisted-pair or coaxial cable thereof), a defective or inoperative port of the network element 31 to which the communication link 21_x is connected, or any other condition preventing the communication link 21_x from operating normally. In other cases, software and/or hardware (e.g., a modem) of the end-user equipment 10_x used by the end-user equipment 10_x to effect communications via the communication link 21_x can be disrupted, for instance, due to a defective or inoperative component. In such situations, it may no longer be possible for the end-user equipment 10_x to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications via the communication link 21_x reaching the end-user premise 18_x .

In accordance with an embodiment of the invention, and as further discussed below, when an ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is determined to be disrupted, the communication apparatus 20_x of the end-user equipment 10_x at the end-user premise 18_x can cause a wireless communication link to be established between the end-user equipment 10_x and the end-user equipment 10_y ($1 \leq y \leq N$; $y \neq x$) at the end-user premise 18_y in order to allow the end-user equipment 10_x to effect communications over the communications network 12 via this wireless communication link and the communication link 21_y reaching the end-user premise 18_y . This provides a failover mechanism that enables the end-user equipment 10_x at the end-user premise 18_x to continue to be able to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications over the communications network 12 despite its ability to communicate via the communication link 21_x being disrupted. In other words, despite the ability of the end-user equipment 10_x to communicate via the communication link 21_x being disrupted, the end-user equipment 10_x at the end-user premise 18_x continues to be able to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications over the communications network 12 by "piggybacking" on the communication link 21_y reaching the end-user premise 18_y .

20

With additional reference to Figure 3, the communication apparatus 20_x of the end-user equipment 10_x at the end-user premise 18_x comprises suitable hardware, firmware, software or a combination thereof for implementing a plurality of functional entities, including, in this embodiment, a network interface 50, a plurality of connectors 52_1 - 52_M , a wireless interface 80, a wireless interface 70, a processing entity 54, a routing entity 62, a database 66, and a power supply 56. In some embodiments, these entities of the communication apparatus 20_x may be integrated into a terminal installed at a suitable location (e.g., a basement or other location) at the end-user premise 18_x . In other embodiments, these entities of the communication apparatus 20_x may be part of two or more devices interconnected to one another via one or more physical links.

30

The network interface 50 is connected to the communication link 21_x reaching the end-user premise 18_x in order to provide an interface between the end-user equipment 10_x and the communications network 12. For example, in some embodiments, the network interface 50 may be implemented by a network interface device (NID) and a channel service unit / data service unit (CSU/DSU). In other embodiments, the network interface 50 may be implemented in various other manners depending on the nature of the communication link 21_x.

The connectors 52₁-52_M enable connection of one or more end-user devices of the end-user equipment 10_x to the communication apparatus 20_x. For example, individual ones of the connectors 52₁-52_M may be an RJ11 connector (e.g., for connecting a wired POTS phone), an RJ45 connector (e.g., for connecting a computer or a VoIP phone) or any other type of connector (e.g., a connector for connecting to a television set-top box, a connector for connecting to an alarm system device, etc.).

The wireless interface 80 is configured to wirelessly exchange information with one or more end-user devices of the end-user equipment 10_x at that end-user premise 18_x. More particularly, the wireless interface 80 comprises a wireless transmitter and a wireless receiver to wirelessly exchange information with one or more end-user devices of the end-user equipment 10_x. For example, in some embodiments, the wireless interface 80 may be implemented by a wireless router based on WiFi (IEEE 802.11) technology or other wireless communication technologies.

The wireless interface 70 is configured to establish a wireless communication link between the end-user equipment 10_x at the end-user premise 18_x and the end-user equipment 10_y at the end-user premise 18_y, when the ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is determined to be disrupted. More particularly, the wireless interface 70 comprises a wireless transmitter and a wireless receiver to wirelessly exchange information with the end-user equipment 10_y at the end-user premise 18_y. For example, in some embodiments, the wireless interface 70 may be based on WiFi technology or other wireless communication technologies.

The processing entity 54 is configured to receive requests for communications originated by one or more end-user devices of the end-user equipment 10_x. For example, the processing entity 54 may receive a request for a telephone call originated by a telephone of the end-user equipment 10_x, a request for an access to a data network site originated by a computer of the end-user equipment 10_x, a request for an alarm system communication originated by an alarm system device, and/or a request for another type of communication originated by another end-user device of the end-user equipment 10_x.

10 The processing entity 54 is also configured to process information pertaining to communications effected by the end-user equipment 10_x. More particularly, in this embodiment, the processing entity 54 comprises a modem 60 and an analog telephony adapter (ATA) 64. The modem 60 is configured to modulate an analog carrier signal to encode digital information for transmission via the network interface 50 and to
15 demodulate an analog carrier signal received via the network interface 50 to decode information it conveys. For example, in some embodiments, the modem 60 may be a digital subscriber line (DSL) modem or a cable modem, depending on the nature of the communication link 21_x. The ATA 64 is configured to convert analog telephony signals from any wired POTS phone that may be part of the end-user equipment 10_x
20 and connected to one of the connectors 52₁-52_M into digital information to be processed by the routing entity 62 and the modem 60, and vice versa.

The processing entity 54 is also configured to determine whether the ability of the end-user equipment 10_x to communicate via the communication link 21_x is disrupted.
25 For example, in this embodiment, the processing entity 54 may monitor the network interface 50 to detect a disruption of the communication link 21_x (e.g., detect that no signal is received or transmittable by the network interface 50 via the communication link 21_x or detect that a signal received via the communication link 21_x at the network interface 50 fails to meet certain quality-of-service criteria). The processing entity 54
30 may also monitor software and/or hardware of the communication apparatus 20_x to detect a defective or inoperative component (e.g., detect that the modem 60 is not operating normally). In other embodiments, the processing entity 54 may determine that the ability of the end-user equipment 10_x to communicate via the communication

link 21_x is disrupted in various other ways, such as based on information received from a source external to the communication apparatus 20_x and indicative of a disruption of the ability of the end-user equipment 10_x to communicate via the communication link 21_x (e.g., the communication apparatus 40 in the core network 30
5 may determine that the communication link 21_x is disrupted and cause the end-user equipment 10_y at the end-user premise 18_y to transmit information received via the wireless interface 70 of the communication apparatus 20_x at the end-user premise 18_x and indicative of a disruption of the communication link 21_x).

10 The routing entity 62 is configured to cause information transmitted by or destined for the end-user equipment 10_x to be exchanged over the communications network 12. More particularly, in this embodiment, when the ability of the end-user equipment 10_x to communicate via the communication link 21_x is normal (i.e., is not disrupted), the routing entity 62 routes information received via the connectors 52_1 - 52_M and/or the
15 wireless interface 80 towards the modem 60 for transmission via the network interface 50 and routes information received from the modem 60 towards the connectors 52_1 - 52_M and/or the wireless interface 80 for transmission to one or more end-user devices of the end-user equipment 10_x . However, when the ability of the end-user equipment
20 10_x to communicate via the communication link 21_x is determined to be disrupted (i.e., not normal), the routing entity 62 can cause the wireless interface 70 to establish a wireless communication link with the end-user equipment 10_y at the end-user premise 18_y . The routing entity 62 can proceed to route information received via the connectors 52_1 - 52_M and/or the wireless interface 80 towards the wireless interface 70 such that it is conveyed via the established wireless communication link, and to route
25 information conveyed via the established wireless communication link and received via the wireless interface 70 towards the connectors 52_1 - 52_M and/or the wireless interface 80 for transmission to one or more end-user devices of the end-user equipment 10_x .

30 The database 66 stores information that can be used by the communication apparatus 20_x in operation. Figure 4 shows an example of potential contents of the database 66.

In this example, the database 66 stores end-user equipment information 41 regarding the end-user equipment 10_x , which includes information regarding each of one or more pieces of equipment of the end-user equipment 10_x (e.g., the communication apparatus 20_x and the one or more end-user devices at the end-user premise 18_x).

5 More particularly, in this example, the information regarding a given piece of equipment of the end-user equipment 10_x may include:

- an identifier of the given piece of equipment, such as a MAC address, EHA, or other hardware identifier of that piece of equipment, an IP address assigned to that piece of equipment, a URI (e.g., a SIP URI) identifying that piece of equipment,
10 or any other information that identifies that piece of equipment; and
- depending on the nature of the given piece of equipment, access information to be provided to the given piece of equipment in order to access (i.e., make use of) that piece of equipment. For example, the access information for the given piece of equipment may comprise a code, such as a password or a wireless network key
15 (e.g., a Wi-Fi Protected Access (WPA) key).

In addition, in this example, the database 66 stores end-user equipment information 43 regarding end-user equipment at one or more other ones of the end-user premises 18_1 - 18_N that is within wireless range of the end-user equipment 10_x at the end-user
20 premise 18_x . For example, if the end-user equipment 10_z ($1 \leq z \leq N$; $z \neq x$) at the end-user premise 18_z is within wireless range of the end-user equipment 10_x at the end-user premise 18_x , the end-user equipment information 43 may include information regarding each of one or more pieces of equipment of the end-user equipment 10_z (e.g., the communication apparatus 20_z and the one or more end-user devices at the
25 end-user premise 18_z). For instance, the information regarding a given piece of equipment of the end-user equipment 10_z may include: an identifier of the given piece of equipment such as a MAC address, EHA, or other hardware identifier of that piece of equipment, an IP address assigned to that piece of equipment, or any other information that identifies that piece of equipment; and, depending on the nature of
30 the given piece of equipment, access information to be provided to the given piece of equipment in order to make use of that piece of equipment (e.g., a password or a wireless network key).

86503-305

2008-03568

The end-user equipment information 41 regarding the end-user equipment 10_x may be provided in the database 66 in various ways. For example, in some cases, the identifier of and/or access information for any piece of equipment of the end-user equipment 10_x may be provided in the database 66 by a user at the end-user premise 5 18_x when setting up that piece of equipment. In other cases, the identifier of and/or access information for any piece of equipment of the end-user equipment 10_x may be provided in the database 66 by the service provider, for example, by the communication apparatus 40 transmitting this information via the communication link 21_x.

10

Similarly, the end-user equipment information 43 regarding end-user equipment at one or more other ones of the end-user premises 18₁-18_N that is within wireless range of the end-user equipment 10_x at the end-user premise 18_x may be provided in the database 66 in various ways. For example, in some cases, the end-user equipment 15 information 43 may be provided in the database 66 by the service provider, for example, by the communication apparatus 40 transmitting this information via the communication link 21_x. In other cases, the end-user equipment information 43 may be provided in the database 66 during a provisioning phase (e.g., when the communication apparatus 20_x is initially set up at the end-user premise 18_x) using an 20 exchange of information between the communication apparatus 20_x at the end-user premise 18_x and the communication apparatus at each of these one or more other ones of the end-user premises 18₁-18_N that is within wireless range of the end-user equipment 10_x at the end-user premise 18_x.

25 While this example illustrates certain information that can be included in the database 66, other information may be included in that database in other embodiments. Also, while it is depicted in Figure 3 as being one component, the database 66 may be distributed in nature. For example, in some embodiments, the database 66 can have portions of its content stored in different data storage media of the communication 30 apparatus 20_x.

The power supply 56 is configured to power the communication apparatus 20_x using electrical power from an electrical network of the end-user premise 18_x. In addition,

the power supply 56 is capable of powering the communication apparatus 20_x in cases where the electrical network of the end-user premise 18_x does not provide sufficient electrical power (including no electrical power at all) for operation of the communication apparatus 20_x (e.g., due to a power outage or a malfunction in the electrical network). For example, the power supply 56 may comprise one or more batteries capable of powering the communication apparatus 20_x for a prolonged period of time (e.g., several hours or a few days) before being depleted. The power supply 56 may also comprise charging circuitry for recharging the one or more batteries using electrical power from the electrical network of the end-user premise 18_x.

10

While they are shown as distinct entities, different ones of the functional entities of the communication apparatus 20_x may be implemented by a common device. For example, the wireless interface 70 and the wireless interface 80 may be implemented by a common wireless router (e.g., a WiFi router). As another example, one or more of the connectors 52₁-52_M and the ATA 64 may be implemented by a common ATA device. As yet another example, the modem 60 and the network interface 50 may be implemented by a common network interface device. As yet another example, the processing entity 54 and the routing entity 62 may be implemented by a common processing platform. As yet another example, the wireless interface 70, the wireless interface 80, the processing entity 54 and the routing entity 62 may be implemented by a common routing device.

20

Also, while the communication apparatus 20_x is configured in a particular manner in this embodiment, the communication apparatus 20_x may be configured in various manners in other embodiments. For example, in some embodiments, the ATA 64 may be omitted in cases where the end-user equipment 10_x at the end-user premise 18_x does not comprise any POTS phone.

25

Turning to Figures 5A and 5B, an example illustrating how the end-user equipment 10_j at the end-user premise 18_j continues to be able to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications over the communications network 12 when its ability to communicate via the

30

communication link 21_j reaching the end-user premise 18_j is disrupted, will now be considered.

In this example, the end-user equipment 10_j comprises, in addition to the communication apparatus 20_j, a plurality of end-user devices, including a computer 14_j, a VoIP phone 15_j, a POTS phone 16_j, and alarm system devices (e.g., detectors, a controller) of an alarm system 17_j, which are connected to the communication apparatus 20_j via its connectors 52₁-52_M and/or its wireless interface 80.

At one point in time, a telephone call, an access to a data network site, an alarm system communication, and/or another communication is to be effected by the end-user equipment 10_j. The communication is destined for communication equipment 55, which, depending on the nature of the communication, may comprise a telephone, a computer and/or another communication device. More particularly, for purposes of this example, it is assumed that a user 11 at the end-user premise 18_j initiates a telephone call using the VoIP phone 15_j. It is further assumed that the communication equipment 55 comprises a telephone for which the telephone call is destined.

As shown in Figure 5A, the communication apparatus 20_j receives information 200 from the VoIP phone 15_j when the user 11 uses this phone to initiate a telephone call. The information 200 conveys a request for the telephone call being made using the VoIP phone 15_j and is indicative of a destination of the telephone call. For example, the information 200 may include a phone number, SIP data and/or other information that identifies the telephone of the communication equipment 55 for which the telephone call is destined.

The processing entity 54 of the communication apparatus 20_j verifies the ability of the end-user equipment 10_j to communicate via the communication link 21_j to assess whether it is normal or disrupted (i.e., not normal). This verification may be performed in various manners.

For example, in this embodiment, the processing entity 54 of the communication apparatus 20_j verifies a state of the communication link 21_j to assess whether it is

operating normally or is disrupted (i.e., not operating normally). The state of the communication link 21_j may be verified in various ways. For instance, in this embodiment, the state of the communication link 21_j may be verified using an exchange of signals along the communication link 21_j between the communication apparatus 20_j and one or more components of the communications network 12, such as the network element 31 of the access network 13 or the core network 30. The communication apparatus 20_j may repeatedly (e.g., periodically) transmit signals along the communication link 21_j to one or more components of the communications network 12 and expect receipt of a given acknowledgement signal from the communications network 12.

Such an exchange of signals can allow the communication apparatus 20_j to verify the state of the communication link 21_j using criteria that determine whether the communication link 21_j is operating normally or is disrupted. In some cases, the criteria may include one or more of the following factors: timeliness (e.g., signals have to be received and/or acknowledged within a particular timeframe); acknowledgement (e.g., a signal received by a component has to be acknowledged by the receiving component with a return signal); quality-of-service (e.g., the receiving component assesses a quality of the received signals to ensure that it conforms with a particular quality of service level). In other cases, the criteria may include other factors.

The state of the communication link 21_j may thus be assessed by determining whether the signals exchanged between the communication apparatus 20_j and the communications network 12 via this link satisfy the criteria. For example, the state of the communication link 21_j may be deemed to be normal if the following criteria are met: the exchange of signals is completed within the expected timeframe (e.g., five (5) seconds); a component having transmitted a signal receives a return signal acknowledging the receipt of the transmitted signal; and/or the exchange of signals is completed within the expected quality-of-service level. In contrast, the state of the communication link 21_j may be deemed to be disrupted based on an exchange where signals are late or missing, signals are unacknowledged by one or more components, and/or the quality of signals exchanged falls below the expected quality-of-service.

While in this embodiment the processing entity 54 of the communication apparatus 20_j verifies the state of the communication link 21_j based on an exchange of signals along the communication link 21_j between the communication apparatus 20_j and one
5 or more components of the communications network 12, processing entity 54 may assess the state of the communication link 21_j in various other ways in other embodiments. For example, in some embodiments, processing entity 54 may determine that the communication link 21_j is disrupted based on information received from a source external to the communication apparatus 20_j and indicative of a
10 disruption of the communication link 21_j (e.g., the communication apparatus 40 in the core network 30 may determine that the communication link 21_j is disrupted and cause the end-user equipment 10_i at the end-user premise 18_i to transmit information received via the wireless interface 70 of the communication apparatus 20_j and indicative of a disruption of the communication link 21_j).

15

Also, in this embodiment, in addition to verifying the state of the communication link 21_j, processing entity 54 of the the communication apparatus 20_j verifies a state of one or more software and/or hardware components (e.g., the modem 60, the network interface 50) of the end-user equipment 10_j that are used to effect communications via
20 the communication link 21_j in order to assess whether they are operating normally or are disrupted (i.e., not operating normally). For example, processing entity 54 may verify the state of the modem 60 to assess whether it is operating normally or not (e.g., by verifying whether the modem 60 has issued any error code indicative of a malfunction).

25

For purposes of this example, assume that the ability of the end-user equipment 10_j to communicate via the communication link 21_j is disrupted. Specifically, in this example, assume that the communication link 21_j is disrupted, for instance, due to a cut or other physical damage inflicted to it, and thus cannot be used to reliably
30 exchange information between the end-user equipment 10_j and the communications network 12.

Thus, in this embodiment, upon determining that the communication link 21_j is disrupted, the processing entity 54 of the communication apparatus 20_j attempts to find another way to effect the telephone call being initiated by the user 11 using the VoIP phone 15_j over the communications network 12. More particularly, the communication apparatus 20_j attempts to implement a failover mechanism in which it attempts to establish a wireless communication link allowing it to effect the telephone call by routing the call to the communications network 12 via this wireless communication link and another one of the communications links 21₁-21_N.

10 The processing entity 54 of the communication apparatus 20_j accesses the database 66 of the communication apparatus 20_j to obtain the end-user equipment information 43 regarding end-user equipment at one or more other ones of the end-user premises 18₁-18_N that is within wireless range of the end-user equipment 10_j at the end-user premise 18_j.

15

In this example, it is assumed that the end-user equipment information 43 in the database 66 of the communication apparatus 20_j includes end-user equipment information regarding the end-user equipment 10_i at the end-user premise 18_i, which is within wireless range of the end-user equipment 10_j at the end-user premise 18_j. The end-user equipment 10_i comprises, in addition to the communication apparatus 20_i, a plurality of end-user devices, including a computer 14_i, a VoIP phone 15_i, another VoIP phone 16_i, and a television unit 29_i, which are connected to the communication apparatus 20_i via its connectors 52₁-52_M and/or its wireless interface 80. It is also assumed in this example that the end-user equipment information 43 included in the database 66 of the communication apparatus 20_j at the end-user premise 20_j includes an identifier of the communication apparatus 20_i (e.g., a MAC address, EHA, or other hardware identifier of the communication apparatus 20_i, an IP address assigned to communication apparatus 20_i, or any other information that identifies the communication apparatus 20_i) and access information to be provided to the communication apparatus 20_i in order to make use of the communication apparatus 20_i (e.g., a password or a wireless network key).

While in this example the end-user equipment information 43 in the database 66 pertains only to the end-user equipment 10_i at the end-user premise 18_i, in other examples, the end-user equipment information 43 in the database 66 may include identifiers and access information for end-user equipment at other ones of the end-user premises 18₁-18_N. In such a case, the processing entity 54 of communication apparatus 20_j may use a selection process to select one or more of the communication apparatuses 20₁-20_N listed in the database 66 with which it may attempt to establish a wireless communication link. For example, the selection process may define one or more "preferred" ones of the communication apparatuses 20₁-20_N listed in the database 66 that are predetermined by one or more components of the communications network 12, such as the communication apparatus 40 of the core network 30. As another example, the selection process may allow the processing entity 54 of the communication apparatus 20_j to decide with which of the other ones of the communication apparatuses 20₁-20_N listed in the database 66 it should attempt to establish a wireless communication link. For instance, the processing entity 54 may evaluate the other ones of the communication apparatuses 20₁-20_N listed in the database 66 based on criteria such as their physical proximity, wireless signal strength and/or reported network traffic load, and/or other factors. This may allow the communication apparatus 20_j to choose to establish a wireless communication link with a different one of the communication apparatuses 20₁-20_N listed in the database 66 every time the failover mechanism is initiated based on an evaluation of current signal strength and network traffic load.

Upon retrieving the identifier and access information of the communication apparatus 20_i, the processing entity 54 of the communication apparatus 20_j causes the routing entity 62 of the communication apparatus 20_j to attempt to establish a wireless communication link between the communication apparatus 20_j and the communication apparatus 20_i. More particularly, the processing entity 54 causes the routing entity 62 to wirelessly transmit information 210 to the communication apparatus 20_i via the wireless interface 70 of the communication apparatus 20_j. The information 210 can be viewed as a request to access the communication apparatus 20_i. In this example, the information 210 includes the identifier and access information of the communication apparatus 20_i, as well as the identifier and access

information of the communication apparatus 20_j, which the processing entity 54 retrieved from the end-user equipment information 41 included in the database 66 of the communication apparatus 20_j.

5 When it receives the information 210, the communication apparatus 20_i attempts to validate the identifier and access information of the communication apparatus 20_i that are included in the information 210. More particularly, the processing entity 54 of the communication apparatus 20_i verifies whether the identifier and access information of the communication apparatus 20_i that are included in the information 210 correspond
10 to the identifier and access information of the communication apparatus 20_i that are included in the end-user equipment information 41 in the database 66 of the communication apparatus 20_i. If not, the communication apparatus 20_i may deny the request of the communication apparatus 20_j to access the communication apparatus 20_i and may take some other action. For instance, the communication apparatus 20_i
15 may send information back to the communication apparatus 20_j indicating that access to the communication apparatus 20_i is denied, and/or may send information to the communication apparatus 40 of the core network 30 to indicate that a failed connection attempt has occurred due to invalid credentials.

20 In this example, it is assumed that the identifier and access information of the communication apparatus 20_i that are included in the information 210 indeed correspond to the identifier and access information of the communication apparatus 20_i that are included in the end-user equipment information 41 in the database 66 of the communication apparatus 20_i. Therefore, as shown in Figure 5B, the
25 communication apparatus 20_i grants access to the communication apparatus 20_j, resulting in establishment of a wireless communication link 85 between the communication apparatus 20_j and the communication apparatus 20_i.

30 With the wireless communication link 85 being established, the communication apparatus 20_j may proceed to effect the telephone call requested by the user 11 using the VoIP phone 15_j over the communications network 12 despite the disruption of the communications link 21_j.

More particularly, the routing entity 62 of the communication apparatus 20_j transmits information 240 pertaining to the telephone call to the communications network 12 via the wireless communication link 85, the communication apparatus 20_i and the communication link 21_i. The information 240 includes the telephone number, SIP data
5 or other information identifying the telephone of the communication equipment 55. In this example, the information 240 also includes the identifier of the communication apparatus 20_j and the identifier of the VoIP phone 15_j from which the telephone call originates. The information 240 may also include other call control information that may be needed to establish the telephone call.

10

The communication apparatus 40 of the core network 30 receives the information 240. The processing entity 42 of the communication apparatus 40 determines, based on the telephone number, SIP data or other information included in the information 240, that the telephone call is to be established with the telephone of the communication
15 equipment 55. The processing entity 42 proceeds to cause the routing entity 44 of the communication apparatus 40 to transmit information 250 to the communication equipment 55 to establish the telephone call between the VoIP phone 15_j and the telephone of the communication equipment 55.

20 Once the information 250 is received by the communication equipment 55, a person or automated system (e.g., a voicemail system, an automated voice response system) associated with the communication equipment 55 can answer the telephone call initiated by the user 11. Information pertaining to the telephone call may then be exchanged between the VoIP phone 15_j and the communication equipment 55.

25

More particularly, the routing entity 62 of communication apparatus 20_j transmits information 220 pertaining to the telephone call over the communications network 12 via the wireless communication link 85, the communication apparatus 20_i and the communication link 21_i. The information 220 can include information transmitted by
30 the VoIP phone 15_j, which may include voice information provided by the user 11 during the call, and possibly call control information to maintain the call in progress.

In the other direction, information 230 pertaining to the telephone call and arriving over the communications network 12 may be routed to the communication apparatus 20_j via the communication link 21_i, the communication apparatus 20_i and the wireless communication link 85. For example, the information 230 may include call control information transmitted by the communications network 12 to establish and/or maintain the call in progress, and/or voice information provided by the person or automated system associated with the communication equipment 55 during the call.

Thus, information pertaining to the telephone call (such as the information 240, 220, 230) can be exchanged between the communications network 12 and the communication apparatus 20_j by “piggybacking” this information on the communications link 21_i. In this way, the telephone call can still be effected by the user 11 despite the disruption of the communication link 21_j. This is generally very useful, in particular if the telephone call that the user 11 wants to make is an important call or an emergency call (such as an emergency “911” call) to police, fire and/or ambulance services in an emergency situation.

In some embodiments, the wireless communication link 85 may remain established between the communication apparatus 20_j and the communication apparatus 20_i until the telephone call is terminated. Upon determining that the telephone call is terminated, the processing entity 54 of the communication apparatus 20_j may cause the routing entity 62 of the communication apparatus 20_j to wirelessly transmit information to the communication apparatus 20_i via the wireless interface 70 of the communication apparatus 20_j in order to disestablish the wireless communication link 85.

In other embodiments, the wireless communication link 85 may remain established between the communication apparatus 20_j and the communication apparatus 20_i until the disruption to the communication link 21_j is resolved. In other words, the wireless communication link 85 may remain established even after the termination of the telephone call placed by the user 11 (e.g., to allow the end-user equipment 20_j to make other telephone calls and/or other communications, and/or to allow incoming calls and/or other incoming communications to reach the end-user premise 18_j). When the

disruption to the communication link 21_j is resolved, the wireless communication link 85 becomes unnecessary and may be disestablished (i.e., terminated). To determine when the communication link 21_j is no longer disrupted (i.e., is operating normally once again), the communication apparatus 20_j may verify the state of the communication link 21_j. For example, this verification may be carried out periodically by the communication apparatus 20_j, possibly more frequently while the communication link 21_j is disrupted, in order to detect when the communication link 21_j is no longer disrupted. As mentioned above, the state of the communication link 21_j may be verified using an exchange of signals between the communication apparatus 20_j and the communications network 12. When such an exchange of signals results in the proper criteria being met, the communication apparatus 20_j can deem the state of the communication link 21_j as being normal (i.e., non-disrupted) once again. Upon concluding that the state of the communication link 21_j is once again normal, the processing entity 54 of the communication apparatus 20_j may cause the routing entity 62 of the communication apparatus 20_j to wirelessly transmit information to the communication apparatus 20_i via the wireless interface 70 of the communication apparatus 20_j in order to disestablish the wireless communication link 85.

While in the example presented above the ability of the end-user equipment 10_j to communicate via the communication link 21_j is disrupted due to a disruption to the communication link 21_j itself, similar operations may occur when the ability of the end-user equipment 10_j to communicate via the communication link 21_j is disrupted due to some other reason, such as a defective or inoperative software or hardware component of the end-user equipment 10_j (e.g., the modem 60) normally used to effect communications over the communication link 21_j.

Also, while the example presented above involved a telephone call initiated by the user 11 using the VoIP phone 15_j, similar operations may occur for other types of communications effected using the end-user equipment 10_j at the end-user premise 18_j. For example, if the user 11 uses the computer 14_j to access one or more data network sites (e.g., web sites) while the ability of the end-user equipment 10_j to communicate via the communication link 21_j is disrupted, information pertaining to such data network site accesses (e.g., hypertext markup language (HTML) requests

and responses) can be transmitted to and from the packet-switched network 32 of the communications network 12 via the communication apparatus 20_j, the wireless communication link 85, the communication apparatus 20_i and the communication link 21_i. Other types of communications, such alarm system communications, can be
5 effected in a similar manner.

It will thus be appreciated that, in this embodiment, interaction between the communication apparatus 20_j at the end-user premise 18_j and the communication apparatus 20_i at the end-user premise 18_i provides a failover mechanism enabling the
10 end-user equipment 10_j at the end-user premise 18_j to continue to be able to effect telephone calls, accesses to data network sites, alarm system communications, and/or other communications over the communications network 12, despite the ability of the end-user equipment 10_j to communicate via the communication link 21_j being disrupted, by “piggybacking” on the communication link 21_i reaching the end-user
15 premise 18_i. In this way, telephone, data network (e.g., Internet), alarm system, television and/or other communication services may continue to be provided to the subscriber associated with the end-user premise 18_j in an uninterrupted fashion, regardless of the ability of the end-user equipment 10_j to communicate via the communication link 21_j reaching the end-user premise 18_j.

20

The failover mechanism contemplated herein may be implemented in various other ways in other embodiments.

For example, in some embodiments, one or more end-user devices of the end-user
25 equipment 10_x at the end-user premise 18_x may have wireless capabilities that can be exploited to implement the failover mechanism contemplated herein.

With reference to Figure 6A, a variant to the example considered above will be discussed in which it is assumed that the VoIP phone 15_j used by the user 11 to place
30 the telephone call is a wireless VoIP phone.

As in the example considered above, when the user 11 initiates the telephone call using the VoIP phone 15_j, the communication apparatus 20_j receives the information

200 from the VoIP phone 15_j conveying the request for the telephone call and including the telephone number, SIP data or other information identifying the telephone of the communication equipment 55 for which the telephone call is destined. Also as in the example considered above, the communication apparatus 20_j,
5 upon verifying the state of the communication link 21_j, determines that the communication link 21_j is disrupted (i.e., not operating normally).

Upon determining that the communication link 21_j is disrupted, the processing entity 54 of the communication apparatus 20_j attempts to find another way to effect the telephone call being initiated by the user 11 using the VoIP phone 15_j over the communications network 12. More particularly, the communication apparatus 20_j attempts to implement a failover mechanism in which it attempts to establish a wireless communication link allowing it to effect the telephone call by routing the call to the communications network 12 via this wireless communication link and another
15 one of the communications links 21₁-21_N.

The processing entity 54 of the communication apparatus 20_j accesses the database 66 of the communication apparatus 20_j to obtain the end-user equipment information 43 regarding end-user equipment at one or more other ones of the end-user premises 18₁-
20 18_N that is within wireless range of the end-user equipment 10_j at the end-user premise 18_j.

As in the example considered above, in this variant example, it is assumed that the end-user equipment information 43 in the database 66 of the communication
25 apparatus 20_j includes an identifier of the communication apparatus 20_i (e.g., a MAC address, EHA, or other hardware identifier of the communication apparatus 20_i, an IP address assigned to the communication apparatus 20_i, or any other information that identifies the communication apparatus 20_i) and access information to be provided to the communication apparatus 20_i in order to make use of the communication
30 apparatus 20_i (e.g., a password or a wireless network key).

The processing entity 54 of the communication apparatus 20_j retrieves the identifier and access information of the communication apparatus 20_i. In the embodiment

considered above, the communication apparatus 20_j uses this identifier and access information to establish the wireless communication link 85 between itself and the communication apparatus 20_i. In this variant, however, the communication apparatus 20_j attempts to cause establishment of a wireless communication link between the
5 VoIP phone 15_j and the communication apparatus 20_i instead.

More particularly, the routing entity 62 of the communication apparatus 20_j transmits information 205 to the VoIP phone 15_j. The information 205 includes the identifier and access information for the communication apparatus 20_i retrieved from the
10 database 66 as well as an indication to establish a wireless communication link between itself, i.e., the VoIP phone 15_j, and the communication apparatus 20_i.

Upon receipt of the information 205, the VoIP phone 15_j wirelessly sends information 211 to the communication apparatus 20_i. The information 211 includes the identifier and access information of the communication apparatus 20_i that was retrieved from
15 the database 66 by the communication apparatus 20_j. In this example, the information 211 also includes an identifier of the VoIP phone 15_j (e.g., a MAC address, EHA, or other hardware identifier of the VoIP phone 15_j, an IP address assigned to the VoIP phone 15_j, or any other information that identifies the VoIP phone 15_j) and may also
20 include access information to be provided to the VoIP phone 15_j in order to make use of the VoIP phone 15_j (e.g., a password or a wireless network key).

When it receives the information 211, the communication apparatus 20_i attempts to validate the identifier and access information of the communication apparatus 20_i that
25 are included in the information 211. More particularly, the processing entity 54 of the communication apparatus 20_i verifies whether the identifier and access information of the communication apparatus 20_i that are included in the information 211 correspond to the identifier and access information of the communication apparatus 20_i that are included in the end-user equipment information 41 in the database 66 of the
30 communication apparatus 20_i. If not, the communication apparatus 20_i may deny the request of the VoIP phone 15_j to access the communication apparatus 20_i and may take some other action. For instance, the communication apparatus 20_i may send information back to the VoIP phone 15_j indicating that access to the communication

apparatus 20_i is denied, and/or may send information to the communication apparatus 40 of the core network 30 to indicate that a failed connection attempt has occurred due to invalid credentials.

5 In this example, it is assumed that the identifier and access information of the communication apparatus 20_i that are included in the information 211 indeed correspond to the identifier and access information of the communication apparatus 20_i that are included in the end-user equipment information 41 in the database 66 of the communication apparatus 20_i. Therefore, as shown in Figure 6B, the
10 communication apparatus 20_i grants access to the VoIP phone 15_j, resulting in establishment of a wireless communication link 87 between the VoIP phone 15_j and the communication apparatus 20_i.

With the wireless communication link 87 being established, the VoIP phone 15_j may
15 proceed to effect the telephone call requested by the user 11 using the VoIP phone 15_j over the communications network 12 despite the disruption to the communications link 21_j.

More particularly, the VoIP phone 15_j transmits information 240' pertaining to the
20 telephone call to the communications network 12 via the wireless communication link 87, the communication apparatus 20_i and the communication link 21_j. The information 240' includes the telephone number, SIP data or other information identifying the telephone of the communication equipment 55. In this example, the information 240' also includes the identifier of the identifier of the VoIP phone 15_j from which the
25 telephone call originates. The information 240' may also include other call control information that may be needed to establish the telephone call.

The communication apparatus 40 of the core network 30 receives the information 240'. The processing entity 42 of the communication apparatus 40 determines, based
30 on the telephone number, SIP data or other information included in the information 240', that the telephone call is to be established with the telephone of the communication equipment 55. The processing entity 42 proceeds to cause the routing entity 44 of the communication apparatus 40 to transmit information 250' to the

communication equipment 55 to establish the telephone call between the VoIP phone 15_j and the telephone of the communication equipment 55.

5 Once the information 250' is received by the communication equipment 55, a person or automated system (e.g., a voicemail system, an automated voice response system) associated with the communication equipment 55 can answer the telephone call initiated by the user 11. Information pertaining to the telephone call may then be exchanged between the VoIP phone 15_j and the communication equipment 55.

10 More particularly, the VoIP phone 15_j transmits information 220' pertaining to the telephone call over the communications network 12 via the wireless communication link 87, the communication apparatus 20_i and the communication link 21_i. The information 220' may include voice information provided by the user 11 during the call and possibly call control information to maintain the call in progress.

15

In the other direction, information 230' pertaining to the telephone call and arriving over the communications network 12 may be routed to the VoIP phone 15_j via the communication link 21_i, the communication apparatus 20_i and the wireless communication link 87. For example, the information 230' may include call control
20 information transmitted by the communications network 12 to establish and/or maintain the call in progress, and/or voice information provided by the person or automated system associated with the communication equipment 55 during the call.

25 Thus, information pertaining to the telephone call (such as the information 240', 220', 230') can be exchanged between the communications network 12 and the VoIP phone 15_j by "piggybacking" this information on the communications link 21_i. In this way, the telephone call can still be effected by the user 11 despite the disruption of the communication link 21_j.

30 While this embodiment illustrates one way in which the failover mechanism contemplated herein may be implemented using wireless capabilities of one or more end-user devices of the end-user equipment 10_x at the end-user premise 18_x, such

wireless capabilities may be exploited in other ways in other embodiments to implement the failover mechanism.

For example, in some embodiments, when the ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is determined to be disrupted, the communication apparatus 20_x at the end-user premise 18_x may establish a wireless communication link with a wireless-enabled end-user device that is part of the end-user equipment 10_y at the end-user premise 18_y rather than with the communication apparatus 20_y directly. For instance, in the example considered above, the communication apparatus 20_j at the end-user premise 18_j may establish a wireless communication link between itself and the computer 14_i , the VoIP phone 15_i , or the VoIP phone 16_i (using an identifier and possibly access information for that end-user device retrieved from the database 66 of the communication apparatus 20_j), such that information pertaining to the telephone call requested by the user 11 using the VoIP phone 15_j may be exchanged between the VoIP phone 15_j and the communication network 12 via this wireless communication link, the communication apparatus 20_i and the communication link 21_i .

As another example, in some embodiments, when the ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is determined to be disrupted, the communication apparatus 20_x at the end-user premise 18_x may establish a wireless communication link between a wireless-enabled end-user device that is part of the end-user equipment 10_x and a wireless-enabled end-user device that is part of the end-user equipment 10_y at the end-user premise 18_y . For instance, in the example considered above, the communication apparatus 20_j at the end-user premise 18_j may establish a wireless communication link between the VoIP phone 15_j and the computer 14_i , the VoIP phone 15_i , or the VoIP phone 16_i (using an identifier and possibly access information for that end-user device retrieved from the database 66 of the communication apparatus 20_j), such that information pertaining to the telephone call requested by the user 11 using the VoIP phone 15_j may be exchanged between the VoIP phone 15_j and the communication network 12 via this wireless communication link, the communication apparatus 20_i and the communication link 21_i .

Although the embodiments considered above relate to telephone calls, accesses to date network sites, alarm system communications, and/or other communications that originate from the end-user equipment 10_x, it will be appreciated that the failover mechanism contemplated herein may also apply to communications (e.g., incoming telephone calls) that originate elsewhere, arrive over the communications network 12 and are destined for the end-user equipment 10_x. In particular, in some embodiments, the communication apparatus 20_x may repeatedly verify the ability of the end-user equipment 10_x to communicate via the communication link 21_x to assess whether it is normal or disrupted (i.e., not normal), and not only when a request for a communication is made using the end-user equipment 10_x, in order to detect a disruption of this ability as soon as possible after it occurs. Such rapid detection can allow the failover mechanism to be invoked as soon as possible after the disruption of the ability of the end-user equipment 10_x to communicate via the communication link 21_x, thus allowing incoming communications to reach the end-user equipment 10_x in an uninterrupted fashion.

In the embodiments considered above, the communication apparatus 20_x at the end-user premise 18_x determines that the ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is disrupted (i.e., not normal) and proceeds to establish a wireless communication link between the end-user equipment 10_x at the end-user premise 18_x and the end-user equipment 10_y at the end-user premise 18_y. In other embodiments, such functions may be implemented by other pieces of equipment of the end-user equipment 10_x at the end-user premise 18_x and/or of the communications network 12.

For example, in some embodiments, a given end-user device (e.g., a phone, computer, or alarm system device) at the end-user premise 18_x may itself determine that the ability of the end-user equipment 10_x to communicate via the communication link 21_x is disrupted (i.e., not normal) and proceed to implement the failover mechanism contemplated herein. In such embodiments, the given end-user device constitutes an apparatus implementing a processing entity and a routing entity operating in a manner similar to the processing entity 54 and the routing entity 62 of the communication

apparatus 20_x in connection with the failover mechanism contemplated herein. For instance, in a variant to the example considered above, the wireless VoIP phone 15_j may determine that the communication apparatus 20_j is inoperative or malfunctioning or that the communication link 21_j is down (e.g., based on signals or lack of signals between the VoIP phone 15_j and the communication apparatus 20_j). In such a variant, the wireless VoIP phone 15_j may store the identifier and access information of the communication apparatus 20_i in memory or request them from the database 66 of the communication apparatus 20_j and may use this information to establish a wireless communication link (such as the wireless communication link 87) in a manner similar to that described above.

As another example, in some embodiments, a disruption of the ability of the end-user equipment 10_x to communicate via the communication link 21_x may be determined by an apparatus of the communication network 12 (such as the communication apparatus 40 or the network element 31).

For instance, in one embodiment, the communications network 12 (and more particularly, the access network 13 or the core network 30) sends "heartbeat" signals to each of the communication apparatuses 20₁-20_N via the communication links 21₁-21_N. When the communication link 21_x reaching the end-user premise 18_x and the communication apparatus 20_x at the end-user premise 18_x are operating normally, the communication apparatus 20_x receives a heartbeat signal from the communications network 12 and acknowledges its receipt by replying with a similar signal.

Because the communications network 12 sends the heartbeat signals to each of the communications apparatuses 20₁-20_N via the communication links 21₁-21_N, the communications network 12 is able to identify potential disruptions to the respective abilities of the end-user equipment 10₁-10_N to communicate via these communication links by looking for certain ones of these communications apparatuses that have not replied to these heartbeat signals. Such a disruption may be determined by one or more components of the communications network 12, such as the network element 31 or another apparatus of the access network 13 and/or the communication apparatus 40 or another apparatus of the core network 30.

For instance, consider a variant to the example considered previously in which it is assumed that the communications network 12, and more particularly, the communication apparatus 40, identifies the disruption of the communication link 21_j reaching the end-user premise 18_j because “heartbeat” signals sent to the communication apparatus 20_j go unacknowledged. Further assume that the communication apparatus 20_j does not determine that the link 21_j is disrupted.

This results in a situation where the end-user equipment 10_j may not be able to effect telephone calls, accesses to data network sites, alarm system communications and/or other communications since the communication apparatus 20_j has not determined that the communication link 21_j is disrupted. In particular, this may present risks, especially if the user 11 or someone else at the end-user premise 18_j needs to effect an important or emergency (e.g., 911) call to alert civic services (such as fire, police and ambulance services) or if the alarm system 17_j needs to effect an alarm system communication potentially indicative of an undesirable event (e.g., an intrusion or a fire at the end-user premise 18_x). Also, the end-user equipment 10_j may be unable to receive incoming calls and/or other incoming communications.

To address this situation, in this embodiment, the communication apparatus 40 can try to alert the communication apparatus 20_j to the disruption of the communication link 21_j using the failover mechanism contemplated herein. For example, the communication apparatus 40 may try to contact the communication apparatus 20_j using the communication apparatus 20_i at the end-user premise 18_i.

More particularly, in this embodiment, the processing entity 42 of the communication apparatus 40 retrieves the identifier and access information of the communication apparatus 20_j from the database 48 (which, in this embodiment, includes this access information). Once the processing entity 42 has performed this retrieval, the routing entity 44 of the communication apparatus 40 causes information including the identifier and access information of the communication apparatus 20_j to be transmitted to the communication apparatus 20_i via the communication link 21_i. Alternatively, the processing entity 42 may cause the routing entity 44 to transmit to

the communication apparatus 20_i via the communication link 21_i information instructing the processing entity 54 of the communication apparatus 20_i to retrieve the identifier and access information of the communication apparatus 20_j from the database 66 of the communication apparatus 20_i. In any event, the information
5 transmitted to the communication apparatus 20_i also includes an indication for the communication apparatus 20_i to establish a wireless communication link between itself and the communication apparatus 20_j.

Upon receiving the information, the communication apparatus 20_i proceeds to
10 establish a wireless communication link between itself and the communication apparatus 20_j using the identifier and access information of the communication apparatus 20_j. With this wireless communication link being established, when incoming and/or outgoing telephone calls, accesses to data network sites, alarm system communications, and/or other communications are to be effected using the
15 end-user equipment 10_j at the end-user premise 18_j, the communication apparatus 20_j proceeds to exchange information pertaining to these communications over the communications network 12 via the established wireless communication link, the communication apparatus 20_i and the communications link 21_i in a manner similar to that described previously herein.

20

Thus, an apparatus of the communications network 12 (such as the communication apparatus 40 or the network element 31) may be able to identify disruptions of the respective abilities of the end-user equipment 10₁-10_N to communicate via the communications links 21₁-21_N and implement failover operations to allow the end-
25 user equipment 10₁-10_N at the end-user premises 18₁-18_N to continue to be used to effect communications despite these disruptions.

Also, by having the communications network 12 manage certain aspects of the failover mechanism contemplated herein, the communications network 12 may use
30 other information at its disposal to manage these aspects. For example, when the ability of the end-user equipment 10_x to communicate via the communication link 21_x reaching the end-user premise 18_x is determined to be disrupted, the communications network 12 may evaluate the current network traffic load being experienced by

individual ones of the communication apparatuses 20_1-20_N within the particular geographic area around the end-user premise 18_x . This evaluation may allow the communications network 12 to identify opportunities arising from “piggybacking” information onto one or more of the communications links 21_1-21_N that are currently
5 experiencing low network traffic loads and therefore have more available resources than those links experiencing high network traffic loads. This may allow the failover mechanism to be used more efficiently among the communications apparatuses 20_1-20_N within a geographic area, possibly ensuring a higher and more consistent level of service to all users within this area. For instance, assume that the communication
10 network 12 identifies the communication apparatuses 20_y and 20_z as two (2) apparatuses with acceptable signal strength proximate to the communication apparatus 20_x of the end-user equipment 10_x whose ability to communicate via the communication link 21_x is determined to be disrupted, with the communication apparatus 20_y currently experiencing a high network traffic load due to several
15 ongoing communications made by the end-user equipment 10_y at the end-user premises 18_y while the communication apparatus 20_z is experiencing a very low traffic load since few or no communications are being made by the end-user equipment 10_z at the end-user premise 18_z . In such a case, the communications network 12 may direct the communication apparatus 20_z to establish a wireless
20 communication link with the communication apparatus 20_x since the communication apparatus 20_z and thus the communication link 21_z provides a greater capacity. In addition to or alternatively to considering network traffic loads, other factors may be taken into consideration by the communications network 12 to determine with which
of the end-user equipment 10_1-10_N the end-user equipment 10_x is to establish a
25 wireless communication link, such as reported signals strengths of signals exchanged between the end-user equipment 10_1-10_N .

In some embodiments, the end-user equipment 10_x at the end-user premise 18_x may use a private network address space for one or more end-user devices of the end-user
30 equipment 10_x , while the communication apparatus 20_x may communicate via the communication link 21_x using a public network address space. For example, the communication apparatus 20_x may be assigned a public IP address by the communications network 12 (e.g., by the communication apparatus 40 of the core

network 30) and the one or more end-user devices of the end-user equipment 10_x may be assigned private IP addresses by the communication apparatus 20_x. In such embodiments, the routing entity 62 of the communication apparatus 20_x performs a network address translation (NAT) process on data packets passing therethrough to
5 translate their addresses from the private network address space to the public network address space, and vice versa.

When the failover mechanism contemplated herein is invoked in these embodiments, in cases where a wireless communication link is established between the
10 communication apparatus 20_x at the end-user premise 18_x and the communication apparatus 20_y at the end-user premise 18_y, the NAT process performed by the communication apparatus 20_x and, if applicable, the NAT process performed by the communication apparatus 20_y can take into account the establishment of the wireless communication link in order to avoid potential private network address clashes.

15

For example, considering the previous example discussed in connection with Figures 5A and 5B where the wireless communication link 85 is established between the communication apparatus 20_j at the end-user premise 18_j and the communication apparatus 20_i at the end-user premise 18_i upon the user 11 initiating the telephone call
20 while the communication link 21_j is disrupted, it is assumed that (prior to the wireless communication link 85 being established) the computer 14_j, the VoIP phone 15_j, an ATA associated with the POTS phone 16_j, and the alarm system devices of the alarm system 17_j are assigned private IP addresses by the communication apparatus 20_j which is itself assigned a public IP address by the communications network 12, and
25 that the computer 14_i, the VoIP phone 15_i, the VoIP phone 16_i and the television unit 29_i are assigned private IP addresses by the communication apparatus 20_i which is itself assigned a public IP address by the communications network 12. More particularly, for purposes of this example, assume that the public IP address assigned to the communication apparatus 20_j is "122.1.17.6", the private IP address assigned to
30 the VoIP phone 15_j is "10.2.2.9", and the public IP address assigned to the communication apparatus 20_i is "122.28.5.18".

In establishing the wireless communication link 85, the routing entity 62 of the communication apparatus 20_i assigns a private IP address to the communication apparatus 20_j, say "10.50.50.3" for purposes of this example. In other words, the communication apparatus 20_j can be viewed as becoming part of the private network address space used by the end-user equipment 10_i at the end-user premise 18_i. The routing entity 62 of the communication apparatus 20_j takes note of the private IP address "10.50.50.3" assigned to it by the communication apparatus 20_i.

Upon receiving data packets transmitted by the VoIP phone 15_j which have the private IP address "10.2.2.9" as their source address, the routing entity 62 of the communication apparatus 20_j performs the NAT process on these data packets. As part of the NAT process, the routing entity 62 notes destination addresses and possibly destination ports of the data packets in a database (e.g., a connection state table) and sends to the communication apparatus 20_i modified versions of the data packets such that they have the private IP address "10.50.50.3" as their source address.

The routing entity 62 of the communication apparatus 20_i receives the data packets transmitted by the communication apparatus 20_j which have the private IP address "10.50.50.3" as their source address and proceeds to perform the NAT process on these data packets. As part of the NAT process, the routing entity 62 notes destination addresses and possibly destination ports of the data packets in a database (e.g., a connection state table) and sends over the communications network 12 via the communication link 21_i modified versions of the data packets such that they have the public IP address "122.28.5.18" as their source address.

In the reverse direction, when the communication apparatus 20_i receives via the communication link 21_i data packets pertaining to the telephone call which have the public IP address "122.28.5.18" as their destination address, the routing entity 62 of the communication apparatus 20_i performs the NAT process on these data packets by consulting the aforementioned database (e.g., connection state table) based on their source addresses and optionally source ports and sends to the communication

apparatus 20_j modified versions of these data packets such that they have the private IP address "10.50.50.3" as their destination address.

The routing entity 62 of the communication apparatus 20_j receives the data packets
5 transmitted by the communication apparatus 20_i which have the private IP address
"10.50.50.3" as their destination address and proceeds to perform the NAT process on
these data packets by consulting the aforementioned database (e.g., connection state
table) based on their source addresses and optionally source ports. This results in the
routing entity 62 sending to the VoIP phone 15_j modified versions of the data packets
10 such that they have the private IP address "10.10.2.9" as their destination address.

While the embodiment considered above illustrates one way in which NAT may be
taken into account in implementing the failover mechanism contemplated herein,
NAT may be taken into account in various other ways in other embodiments. Also, in
15 some embodiments, NAT may not be needed and/or may not be performed (e.g., in
cases where an IPv6 addressing scheme is used).

Those skilled in the art will appreciate that, in some embodiments, certain
functionality of a given element described herein (e.g., the communication apparatus
20 40, any piece of equipment of the end-user equipment 10_x such as the communication
apparatus 20_x) may be implemented as pre-programmed hardware or firmware
components (e.g., application specific integrated circuits (ASICs), electrically
erasable programmable read-only memories (EEPROMs), etc.) or other related
components. In other embodiments, a given element described herein (e.g., the
25 communication apparatus 40, any piece of equipment of the end-user equipment 10_x
such as the communication apparatus 20_x) may comprise a processor having access to
a memory which stores program instructions for execution by the processor to
implement certain functionality of that given element. The program instructions may
be stored on data storage media that is fixed, tangible, and readable directly by the
30 processor. The data storage media may store data optically (e.g., an optical disk such
as a CD-ROM or a DVD), magnetically (e.g., a hard disk drive, a removable diskette),
electrically (e.g., semiconductor memory, floating-gate transistor memory, etc.),
and/or in various other ways. Alternatively, the program instructions may be stored

remotely but transmittable to the given element via a modem or other interface device connected to a network over a transmission medium. The transmission medium may be either a tangible medium (e.g., optical or analog communications lines) or a medium implemented using wireless techniques (e.g., microwave, infrared or other
5 wireless transmission schemes).

Although various embodiments of the invention have been described and illustrated, it will be apparent to those skilled in the art that numerous modifications and variations can be made without departing from the scope of the invention, which is defined in
10 the appended claims.

CLAIMS

1. A method for effecting a communication over a communications network, said method comprising:
 - 5 - determining that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted;
 - establishing a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise upon
10 the ability of the first end-user equipment to communicate via the first communication link being determined to be disrupted; and
 - causing information pertaining to the communication to be exchanged between the first end-user equipment and the communications network via the wireless communication link and a second communication link connecting the second
15 end-user equipment to the communications network.
2. A method as claimed in claim 1, said determining comprising verifying the ability of the first end-user equipment to communicate via the first communication link.
- 20 3. A method as claimed in claim 2, said verifying comprising:
 - performing a verification of a state of the first communication link based on a signal conveyable via the first communication link; and
 - determining that the first communication link is disrupted based on a result of the verification.
- 25 4. A method as claimed in claim 3, said determining that the first communication link is disrupted based on a result of the verification comprising determining that the signal is not received within a period of time or does not satisfy a quality-of-service condition.
- 30 5. A method as claimed in claim 2, said verifying comprising:
 - performing a verification of a state of a software or hardware component of the first end-user equipment; and

86503-305

2008-03568

- determining that the software or hardware component of the first end-user equipment is disrupted based on a result of the verification.
- 5 6. A method as claimed in claim 1, said determining comprising receiving information indicative of a disruption of the ability of the first end-user equipment to communicate via the first communication link.
 - 10 7. A method as claimed in claim 6, the information indicative of a disruption of the ability of the first end-user equipment to communicate via the first communication link comprising information indicative of a disruption of the first communication link.
 - 15 8. A method as claimed in claim 1, said establishing comprising causing a first one of the first end-user equipment and the second end-user equipment to wirelessly transmit certain information to a second one of the first end-user equipment and the second end-user equipment to establish the wireless communication link.
 - 20 9. A method as claimed in claim 8, the certain information comprising an identifier of the second end-user equipment.
 10. A method as claimed in claim 9, the identifier of the second end-user equipment comprising at least one of a hardware identifier and an IP address.
 - 25 11. A method as claimed in claim 10, the hardware identifier comprising at least one of a MAC address and an Ethernet hardware address.
 12. A method as claimed in claim 9, the certain information comprising access information for the second end-user equipment.
 - 30 13. A method as claimed in claim 12, the access information for the second end-user equipment comprising at least one of a password and a wireless network key.

86503-305

14. A method as claimed in claim 12, the certain information comprising an identifier of the first end-user equipment.
15. A method as claimed in claim 14, each of the identifier of the first end-user equipment and the identifier of the second end-user equipment comprising at least one of a hardware identifier and an IP address.
16. A method as claimed in claim 15, the hardware identifier comprising at least one of a MAC address and an Ethernet hardware address.
17. A method as claimed in claim 14, the certain information comprising access information for the first end-user equipment.
18. A method as claimed in claim 17, each of the access information for the first end-user equipment and the access information for the second end-user equipment comprising at least one of a password and a wireless network key.
19. A method as claimed in claim 1, the first-end user equipment comprising a communication apparatus connected to the first communication link and to an end-user device at the first end-user premise, said method being performed by the communication apparatus.
20. A method as claimed in claim 19, said establishing comprising wirelessly transmitting certain information to the second end-user equipment to establish the wireless communication link between the communication apparatus and the second end-user equipment.
21. A method as claimed in claim 20, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an end-user device at the second end-user premise, said wirelessly transmitting comprising wirelessly transmitting the certain information to the communication apparatus of the second end-user equipment to establish the wireless

communication link between the communication apparatus of the first end-user equipment and the communication apparatus of the second end-user equipment.

5 22. A method as claimed in claim 20, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an end-user device at the second end-user premise, said wirelessly transmitting comprising wirelessly transmitting the certain information to the end-user device at the second end-user premise to establish the wireless communication link between the communication apparatus of the first end-user equipment and the end-
10 user device at the second end-user premise.

23. A method as claimed in claim 19, said establishing comprising causing the end-user device at the first end-user premise to wirelessly transmit certain information to the second end-user equipment to establish the wireless communication link
15 between the end-user device at the first end-user premise and the second end-user equipment.

24. A method as claimed in claim 23, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an
20 end-user device at the second end-user premise, said causing the end-user device at the first end-user premise to wirelessly transmit certain information to the second end-user equipment comprising causing the end-user device at the first end-user premise to wirelessly transmit the certain information to the communication apparatus of the second end-user equipment to establish the
25 wireless communication link between the end-user device at the first end-user premise and the communication apparatus of the second end-user equipment.

25. A method as claimed in claim 23, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an
30 end-user device at the second end-user premise, said causing the end-user device at the first end-user premise to wirelessly transmit certain information to the second end-user equipment comprising causing the end-user device at the first end-user premise to wirelessly transmit the certain information to the end-user

86503-305

device at the second end-user premise to establish the wireless communication link between the end-user device at the first end-user premise and the end-user device at the second end-user premise.

- 5 26. A method as claimed in claim 19, comprising, prior to said determining, receiving a request for the communication to be effected over the communications network from the end-user device.
- 10 27. A method as claimed in claim 1, said method being performed by an apparatus residing in the communications network.
- 15 28. A method as claimed in claim 1, the communication being one of a telephone call effected using the first end-user equipment, an access to a data network site effected using the first end-user equipment, and an alarm system communication effected using the first end-user equipment.
- 20 29. Apparatus for effecting a communication over a communications network, said apparatus comprising:
- a processing entity configured to determine that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted; and
 - a routing entity configured to:
 - establish a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise upon the ability of the first end-user equipment to communicate via the first communication link being determined to be disrupted; and
 - cause information pertaining to the communication to be exchanged between the first end-user equipment and the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network.
- 25
- 30

86503-305

30. Apparatus as claimed in claim 29, wherein, to determine that the ability of the first end-user equipment to communicate via the first communication link is disrupted, said processing entity is configured to verify the ability of the first end-user equipment to communicate via the first communication link.
- 5
31. Apparatus as claimed in claim 30, wherein, to verify the ability of the first end-user equipment to communicate via the first communication link, said processing entity is configured to:
- perform a verification of a state of the first communication link based on a signal conveyable via the first communication link; and
 - determine that the first communication link is disrupted based on a result of the verification.
- 10
32. Apparatus as claimed in claim 31, wherein, to determine that the first communication link is disrupted based on the result of the verification, said processing entity is configured to determine that the signal is not received within a period of time or does not satisfy a quality-of-service condition.
- 15
33. Apparatus as claimed in claim 30, wherein, to verify the ability of the first end-user equipment to communicate via the first communication link, said processing entity is configured to:
- perform a verification of a state of a software or hardware component of the first end-user equipment; and
 - determine that the software or hardware component is disrupted based on a result of the verification.
- 20
- 25
34. Apparatus as claimed in claim 29, wherein, to determine that that the ability of the first end-user equipment to communicate via the first communication link is disrupted, said processing entity is configured to receive information indicative of a disruption of the ability of the first end-user equipment to communicate via the first communication link.
- 30

35. Apparatus as claimed in claim 34, the information indicative of a disruption of the ability of the first end-user equipment to communicate via the first communication link comprising information indicative of a disruption of the first communication link.
- 5
36. Apparatus as claimed in claim 29, wherein, to establish the wireless communication link, said routing entity is configured to cause a first one of the first end-user equipment and the second end-user equipment to wirelessly transmit certain information to a second one of the first end-user equipment and the second end-user equipment to establish the wireless communication link.
- 10
37. Apparatus as claimed in claim 36, the certain information comprising an identifier of the second end-user equipment.
- 15
38. Apparatus as claimed in claim 37, the identifier of the second end-user equipment comprising at least one of a hardware identifier and an IP address.
39. Apparatus as claimed in claim 38, the hardware identifier comprising at least one of a MAC address and an Ethernet hardware address.
- 20
40. Apparatus as claimed in claim 37, the certain information comprising access information for the second end-user equipment.
41. Apparatus as claimed in claim 40, the access information for the second end-user equipment comprising at least one of a password and a wireless network key.
- 25
42. Apparatus as claimed in claim 40, the certain information comprising an identifier of the first end-user equipment.
- 30
43. Apparatus as claimed in claim 42, each of the identifier of the first end-user equipment and the identifier of the second end-user equipment comprising at least one of a hardware identifier and an IP address.

86503-305

44. Apparatus as claimed in claim 43, the hardware identifier comprising at least one of a MAC address and an Ethernet hardware address.
45. Apparatus as claimed in claim 42, the certain information comprising access
5 information for the first end-user equipment.
46. Apparatus as claimed in claim 45, each of the access information for the first end-user equipment and the access information for the second end-user equipment comprising at least one of a password and a wireless network key.
- 10
47. Apparatus as claimed in claim 29, said apparatus being part of the first-end user equipment and being connected to the first communication link and to an end-user device at the first end-user premise.
- 15
48. Apparatus as claimed in claim 47, comprising a wireless interface, wherein, to establish the wireless communication link, said routing entity is configured to cause said wireless interface to wirelessly transmit certain information to the second end-user equipment to establish the wireless communication link between said apparatus and the second end-user equipment.
- 20
49. Apparatus as claimed in claim 48, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an end-user device at the second end-user premise, said routing entity being configured to cause said wireless interface to wirelessly transmit the certain
25 information to the communication apparatus of the second end-user equipment to establish the wireless communication link between said apparatus of the first end-user equipment and the communication apparatus of the second end-user equipment.
- 30
50. Apparatus as claimed in claim 48, the second end-user equipment comprising a communication apparatus connected to the second communication link and to an end-user device at the second end-user premise, said routing entity being configured to cause said wireless interface to wirelessly transmit the certain

86503-305

2008-03568

information to the end-user device at the second end-user premise to establish the wireless communication link between said apparatus of the first end-user equipment and the end-user device at the second end-user premise.

5 51. Apparatus as claimed in claim 47, wherein, to establish the wireless
communication link, said routing entity is configured to cause the end-user device
at the first end-user premise to wirelessly transmit certain information to the
second end-user equipment to establish the wireless communication link between
the end-user device at the first end-user premise and the second end-user
10 equipment.

52. Apparatus as claimed in claim 51, the second end-user equipment comprising a
communication apparatus connected to the second communication link and to an
end-user device at the second end-user premise, said routing entity being
15 configured to cause the end-user device at the first end-user premise to wirelessly
transmit the certain information to the communication apparatus of the second
end-user equipment to establish the wireless communication link between the end-
user device at the first end-user premise and the communication apparatus of the
second end-user equipment.

20 53. Apparatus as claimed in claim 51, the second end-user equipment comprising a
communication apparatus connected to the second communication link and to an
end-user device at the second end-user premise, said routing entity being
configured to cause the end-user device at the first end-user premise to wirelessly
25 transmit the certain information to the end-user device at the second end-user
premise to establish the wireless communication link between the end-user device
at the first end-user premise and the end-user device at the second end-user
premise.

30 54. Apparatus as claimed in claim 47, wherein said processing entity is configured to
receive, prior to determining that the ability of the first end-user equipment to
communicate via the first communication link is disrupted, a request for the

communication to be effected over the communications network from the end-user device.

55. Apparatus as claimed in claim 29, said apparatus residing in the communications network.

56. Apparatus as claimed in claim 29, the communication being one of a telephone call effected using the first end-user equipment, an access to a data network site effected using the first end-user equipment, and an alarm system communication effected using the first end-user equipment.

57. Computer-readable medium having recorded thereon instructions for execution by a processor to perform a method for effecting a communication over a communications network, said instructions comprising:

- program code for causing the processor to determine that an ability of first end-user equipment at a first end-user premise to communicate via a first communication link connecting the first end-user equipment to the communications network is disrupted;
- program code for causing the processor to establish a wireless communication link between the first end-user equipment and second end-user equipment at a second end-user premise upon the ability of the first end-user equipment to communicate via the first communication link being determined to be disrupted; and
- program code for causing the processor to cause information pertaining to the communication to be exchanged between the first end-user equipment and the communications network via the wireless communication link and a second communication link connecting the second end-user equipment to the communications network.

58. A method as claimed in claim 1, the communication being a telephone call and the information pertaining to the telephone call including voice information provided during the telephone call.

86503-305

59. Apparatus as claimed in claim 29, the communication being a telephone call and the information pertaining to the telephone call including voice information provided during the telephone call.

5

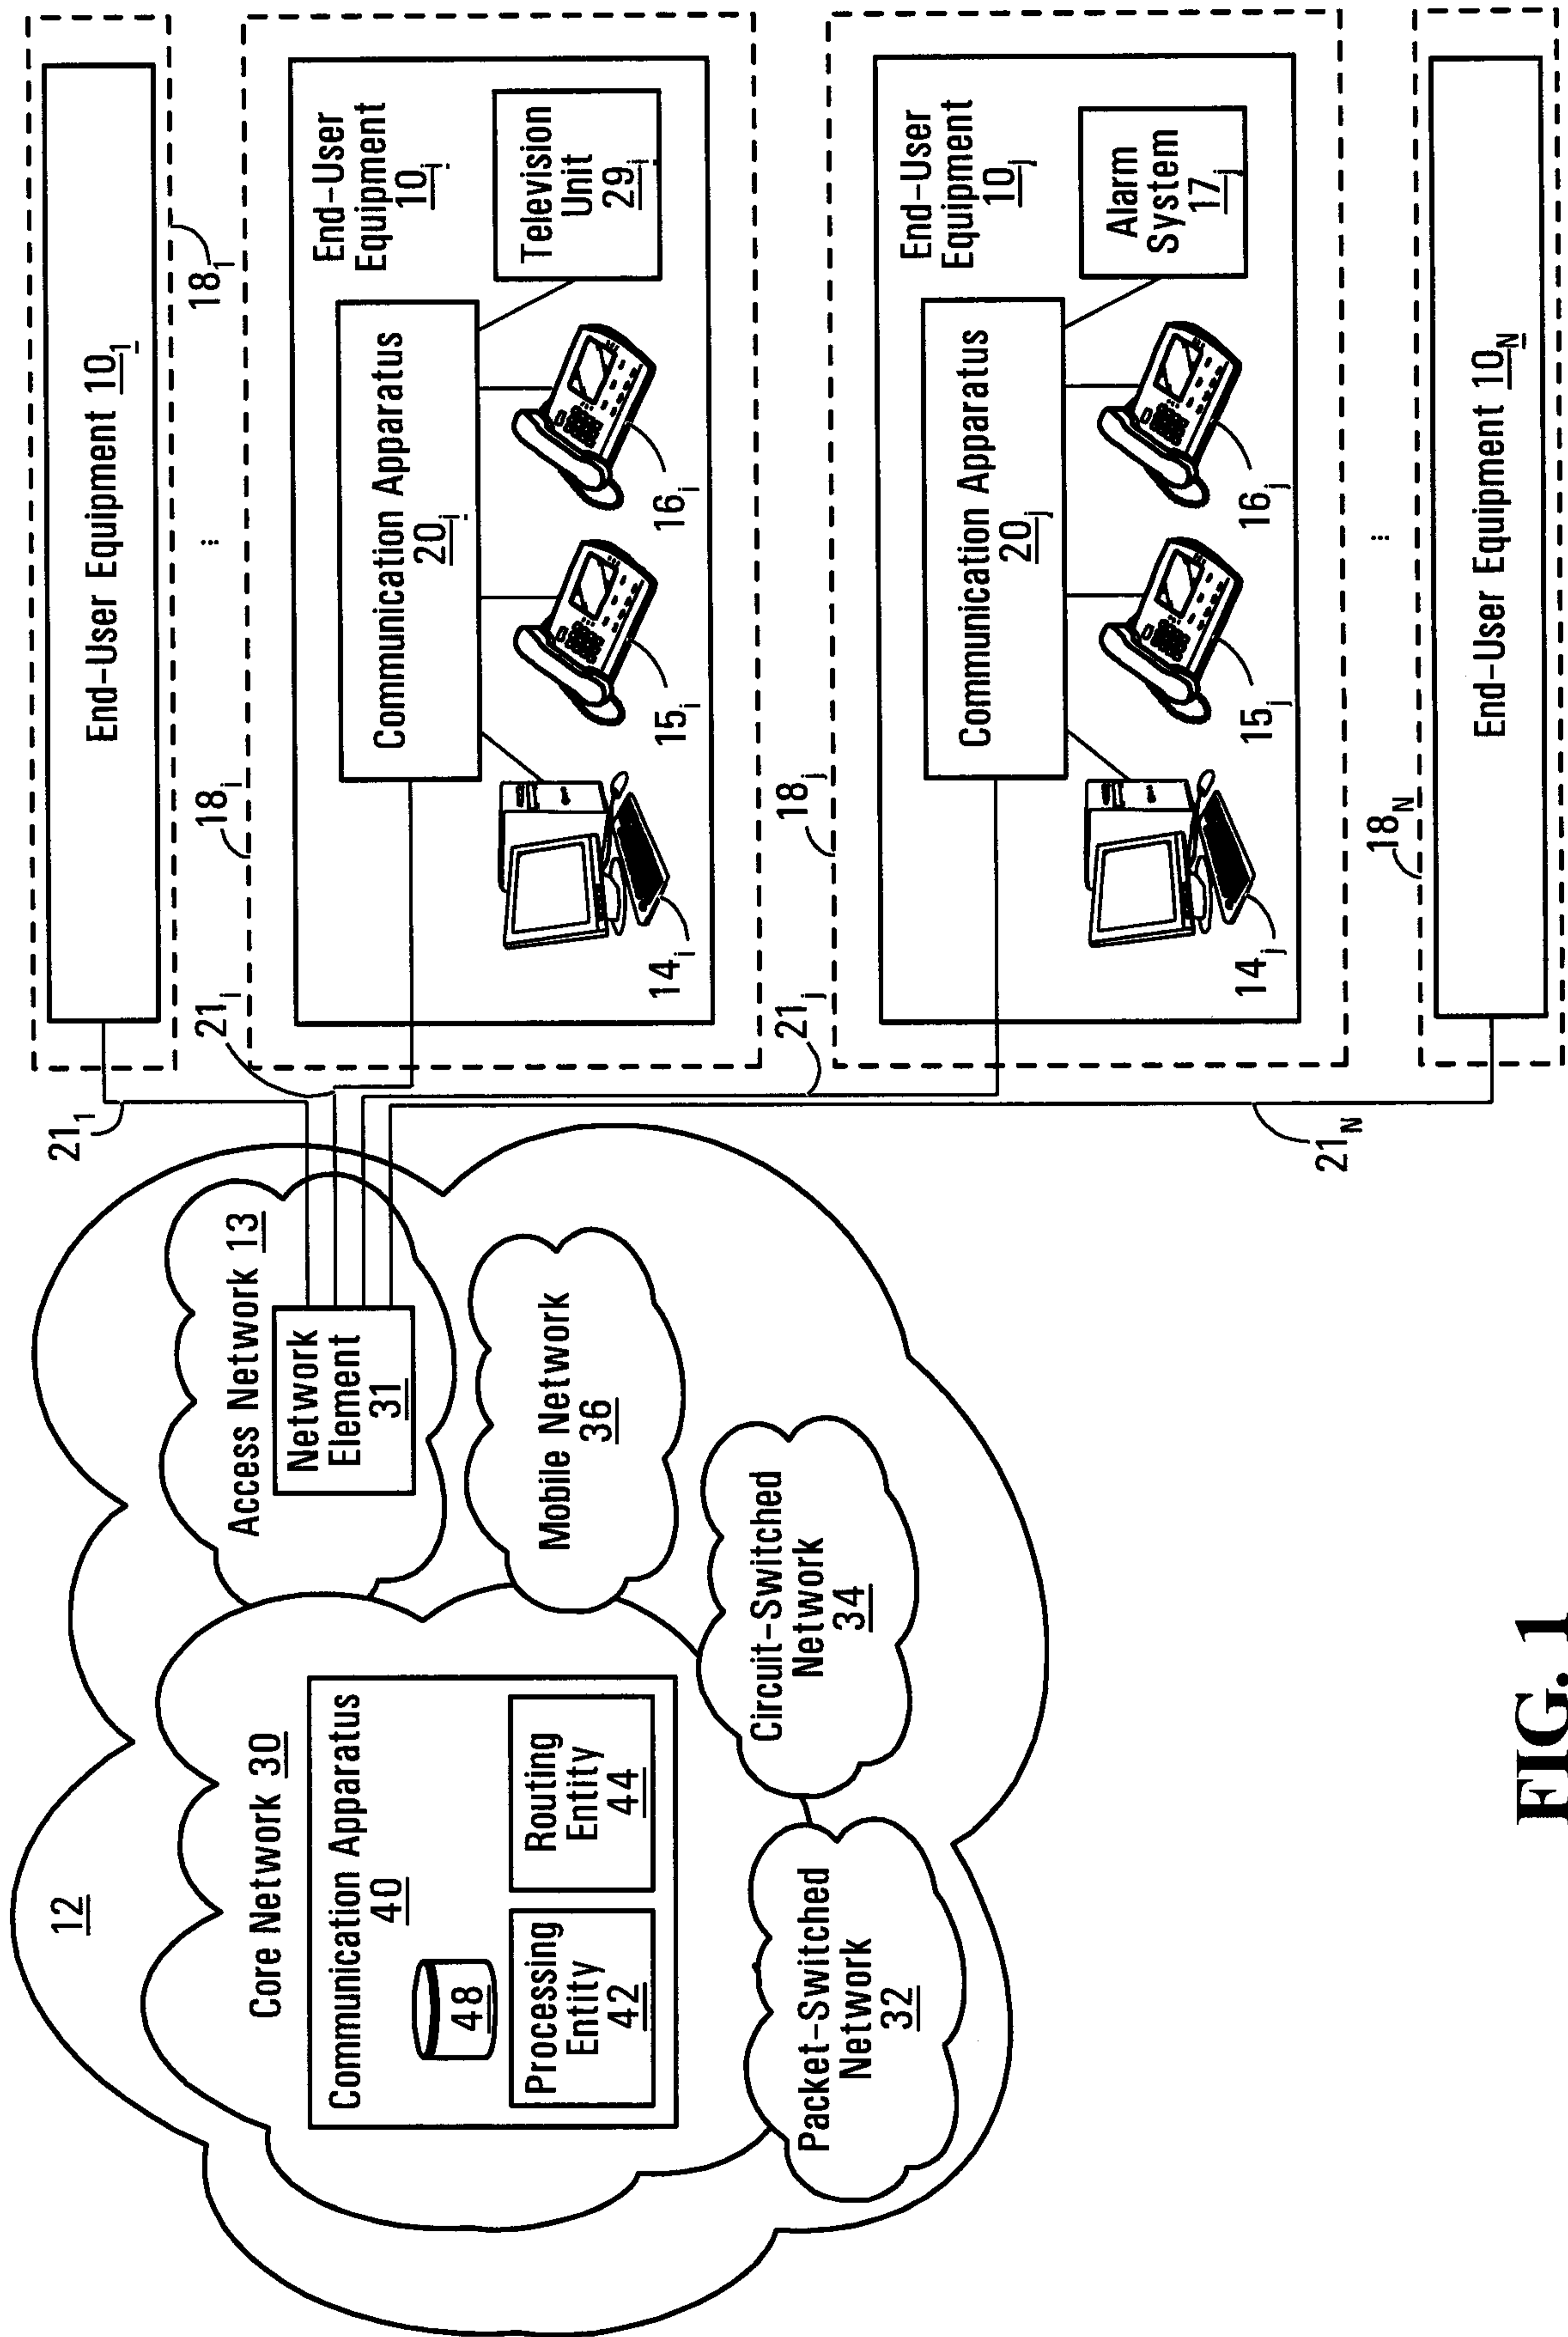


FIG. 1

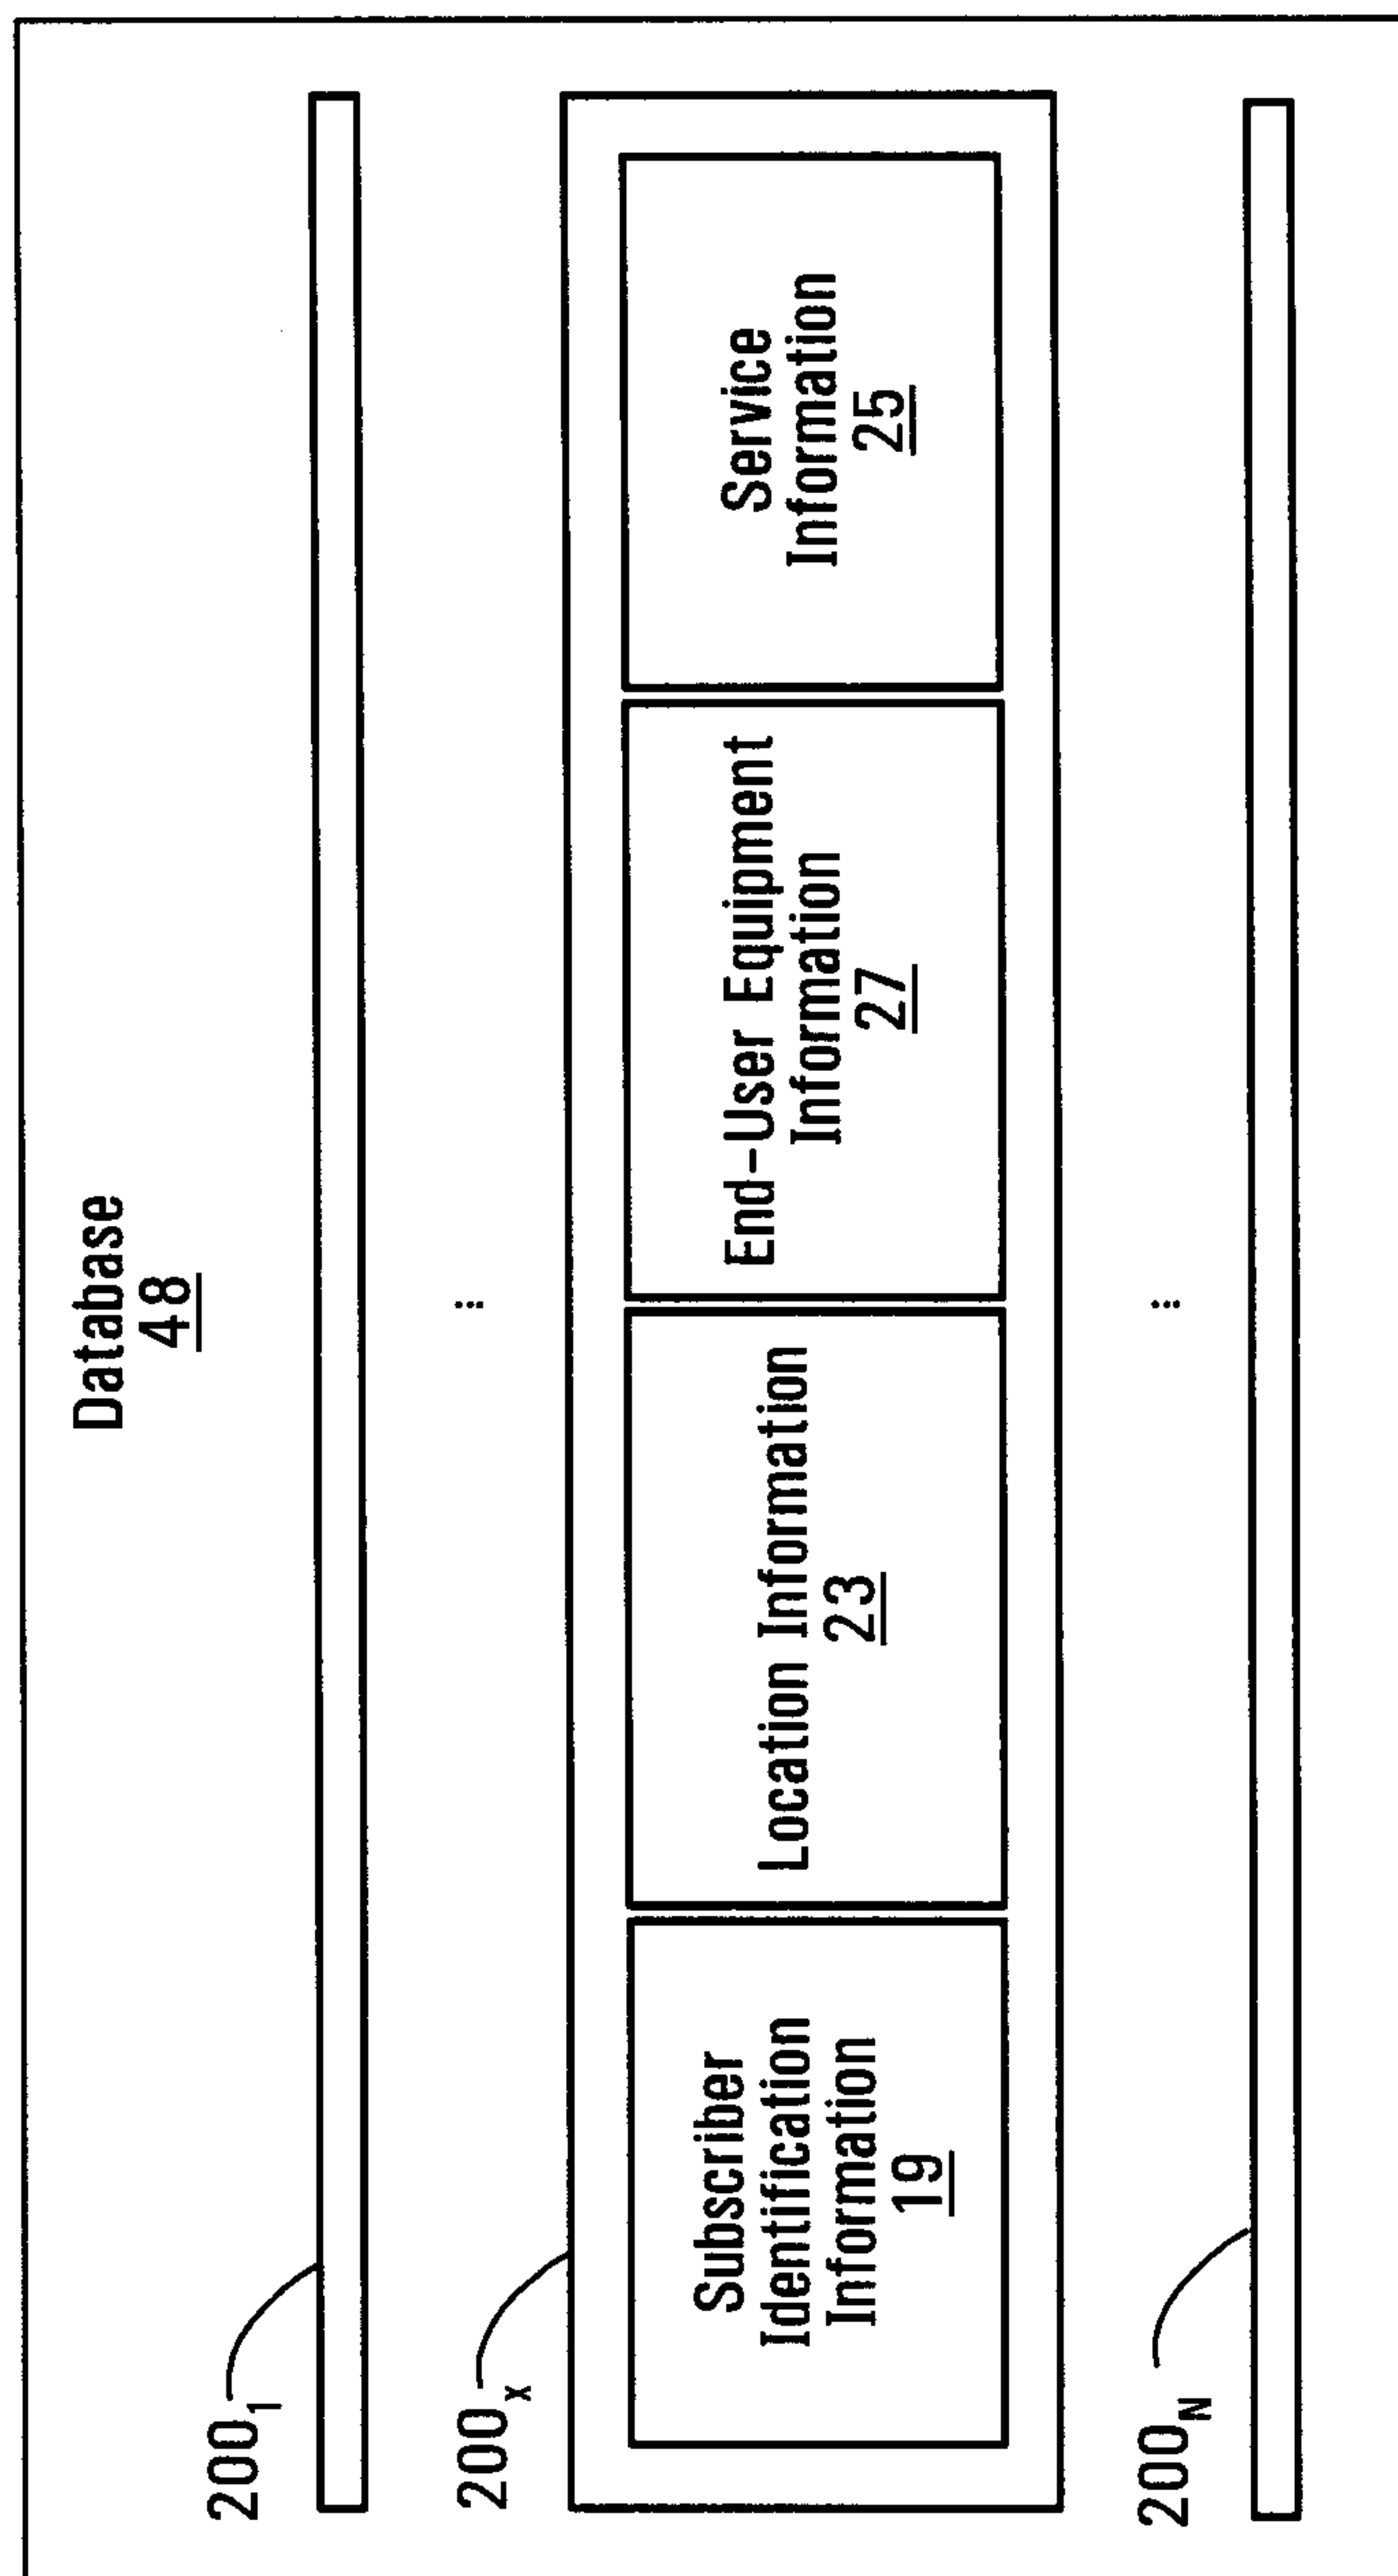


FIG. 2

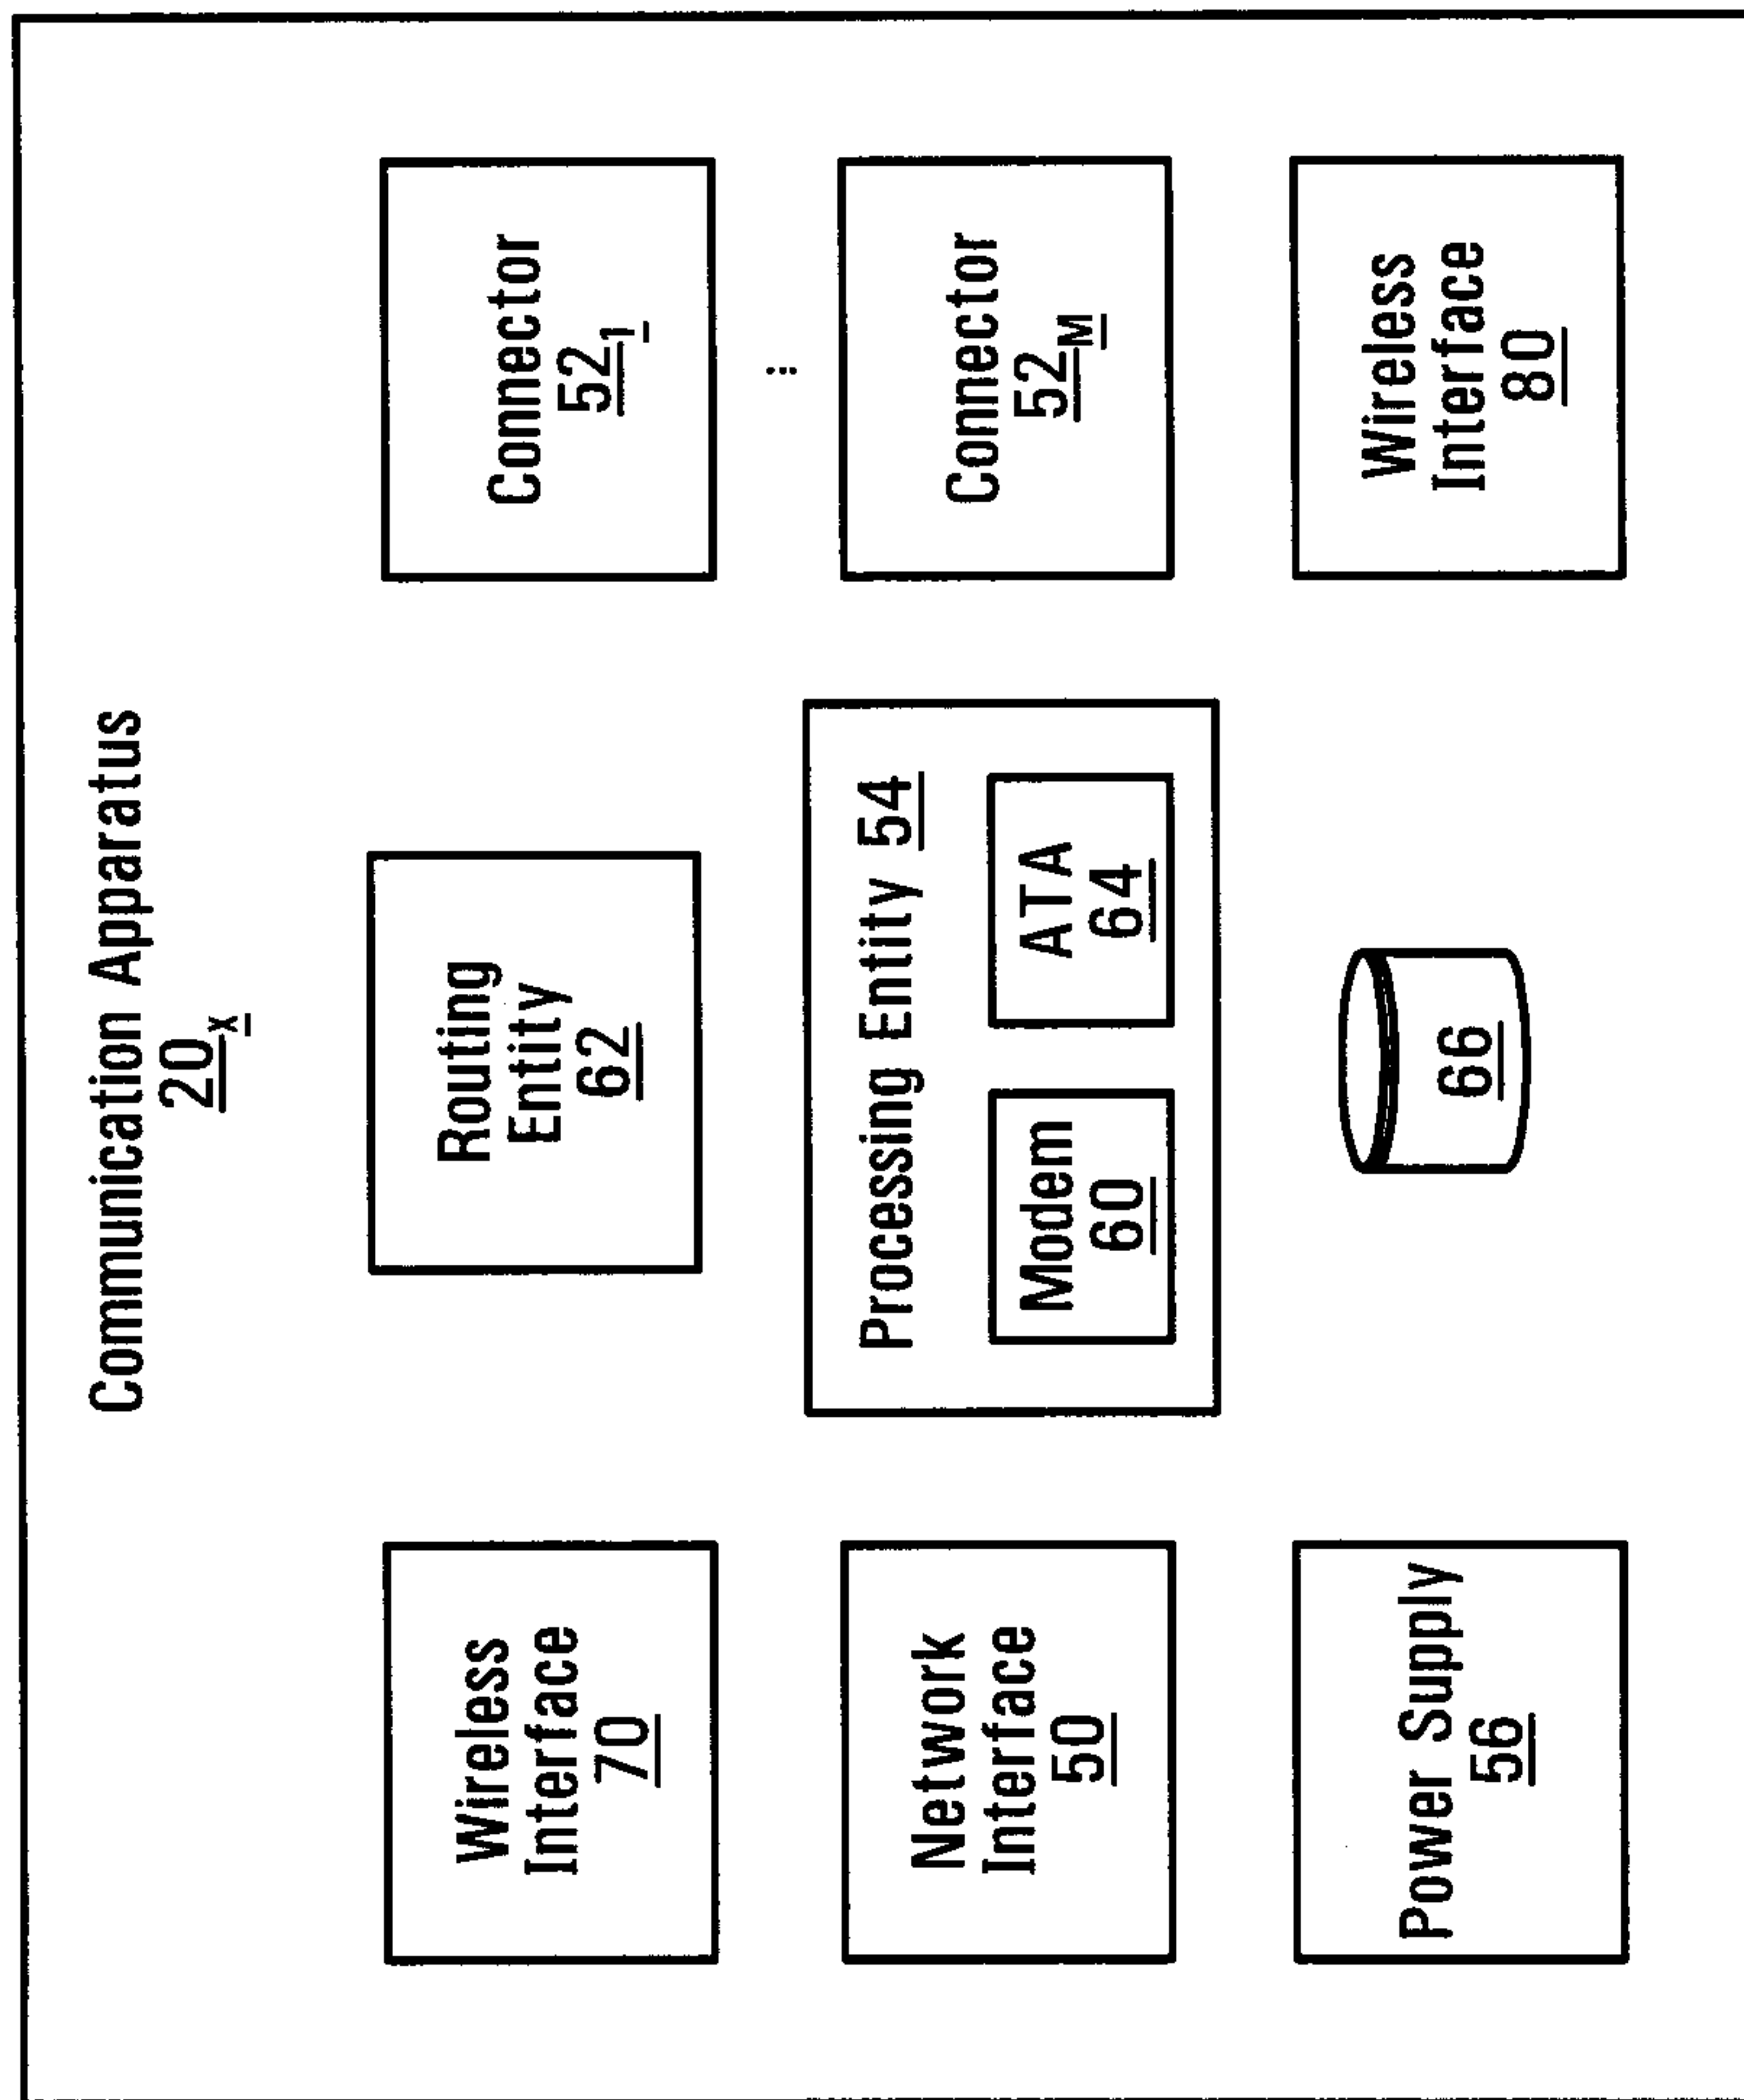


FIG. 3

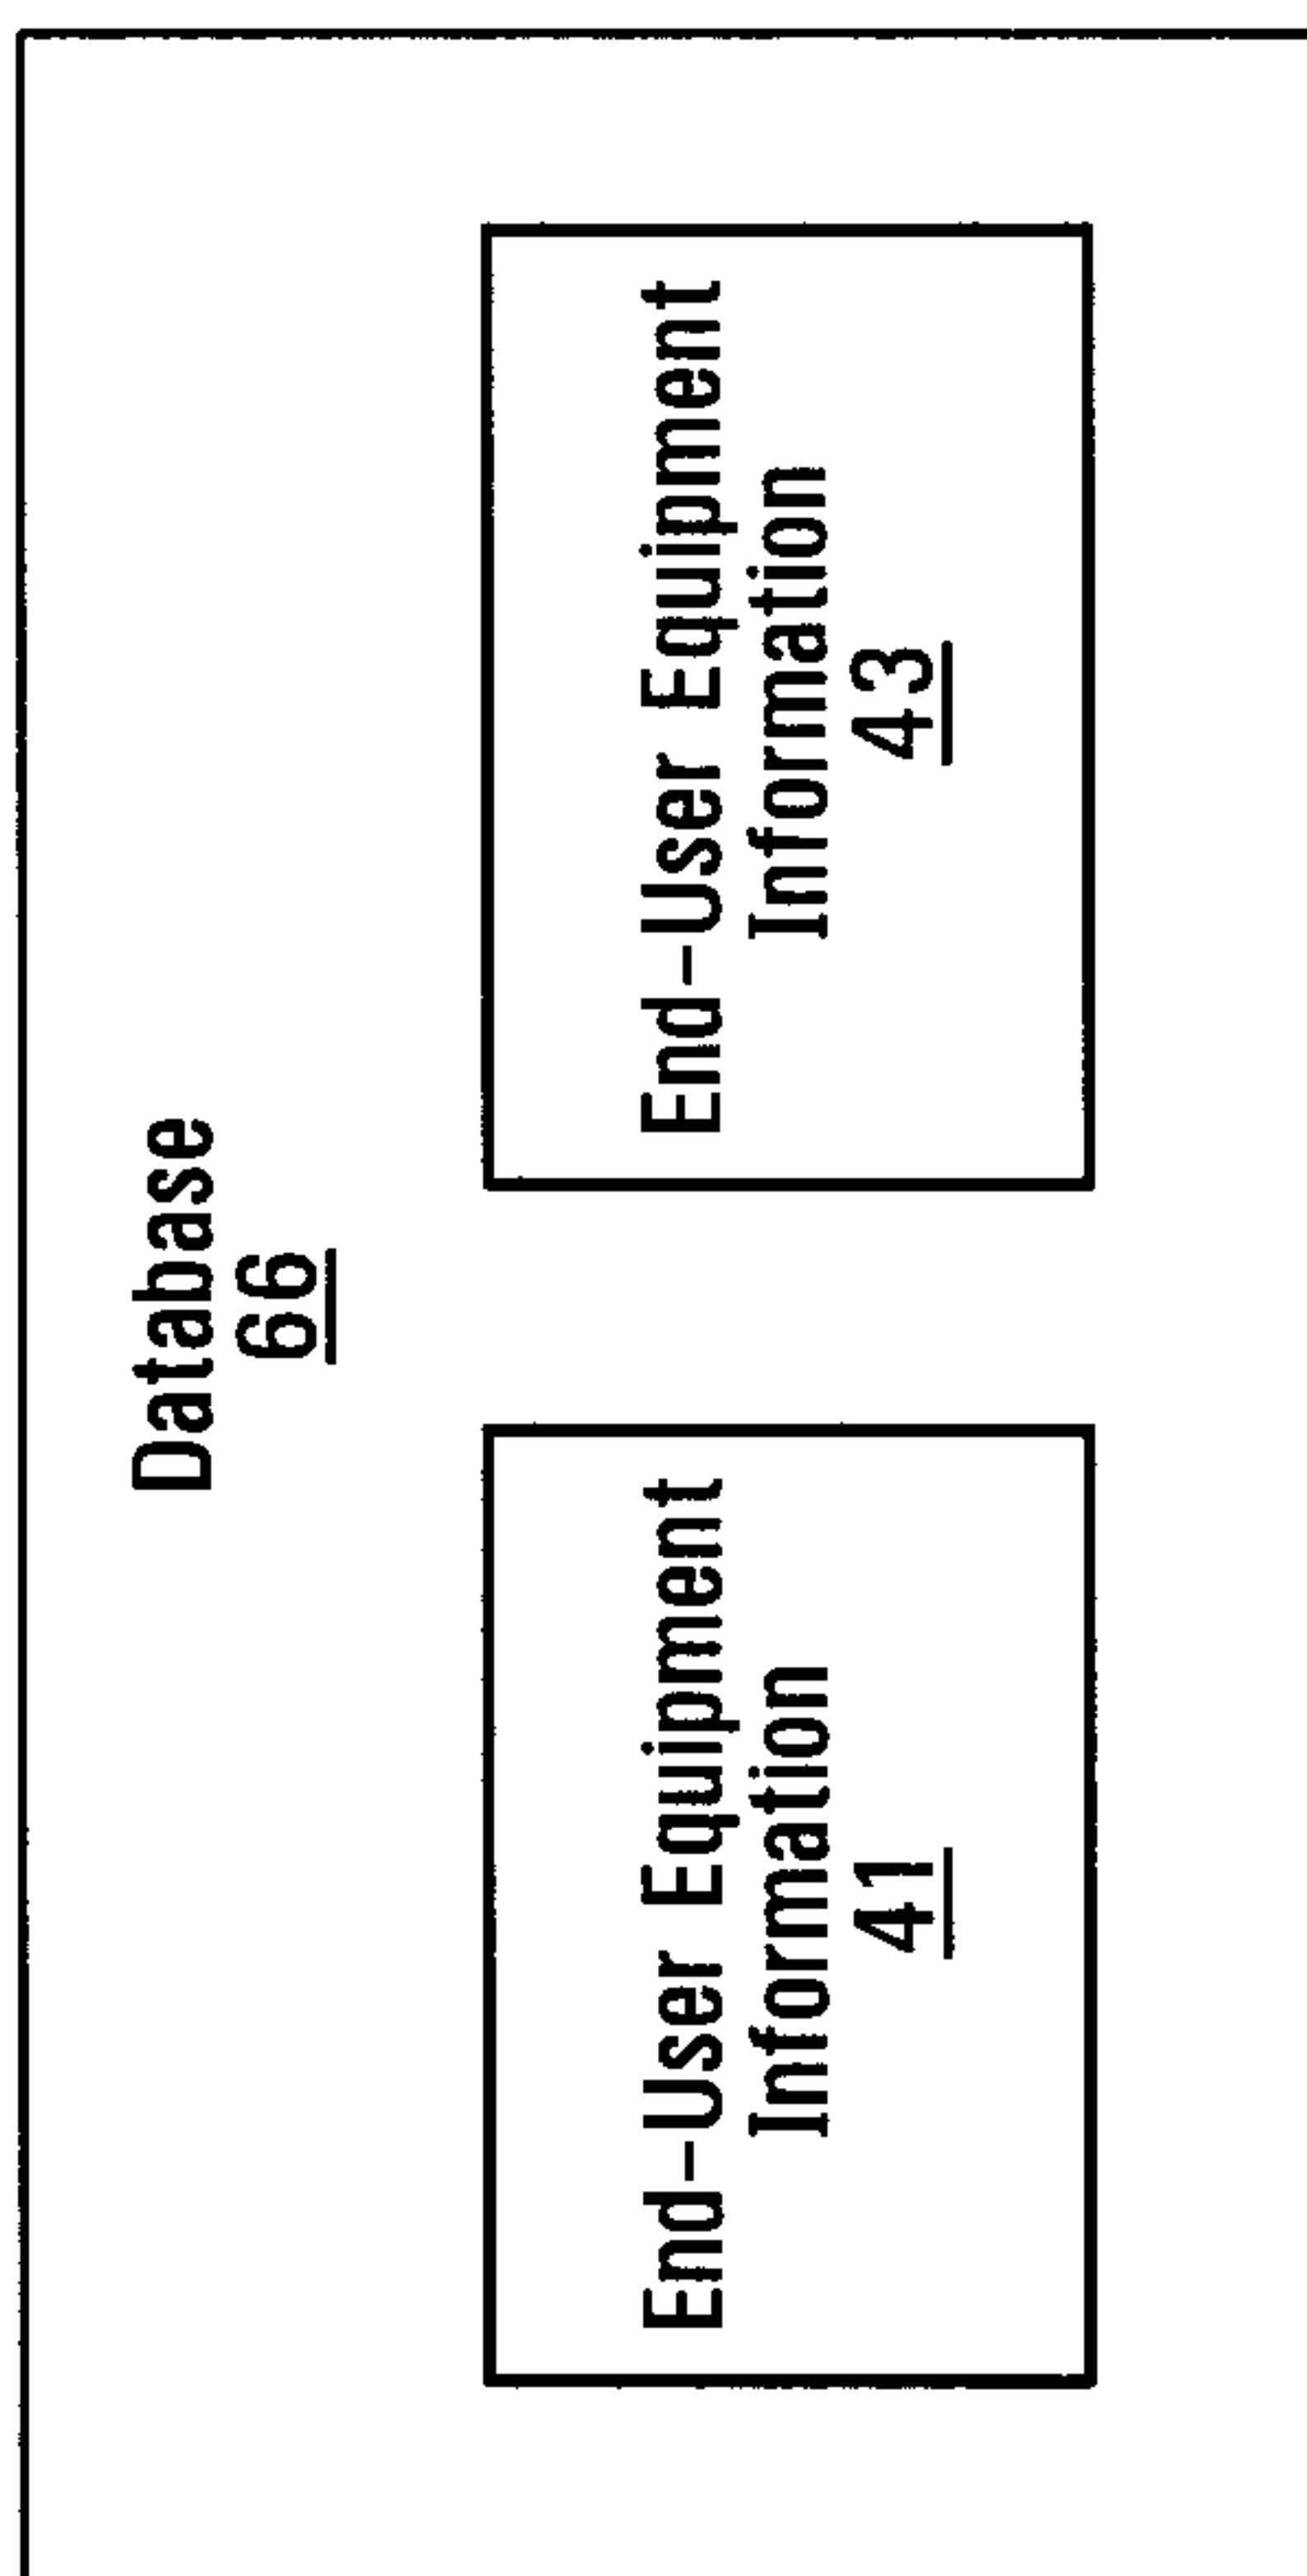


FIG. 4

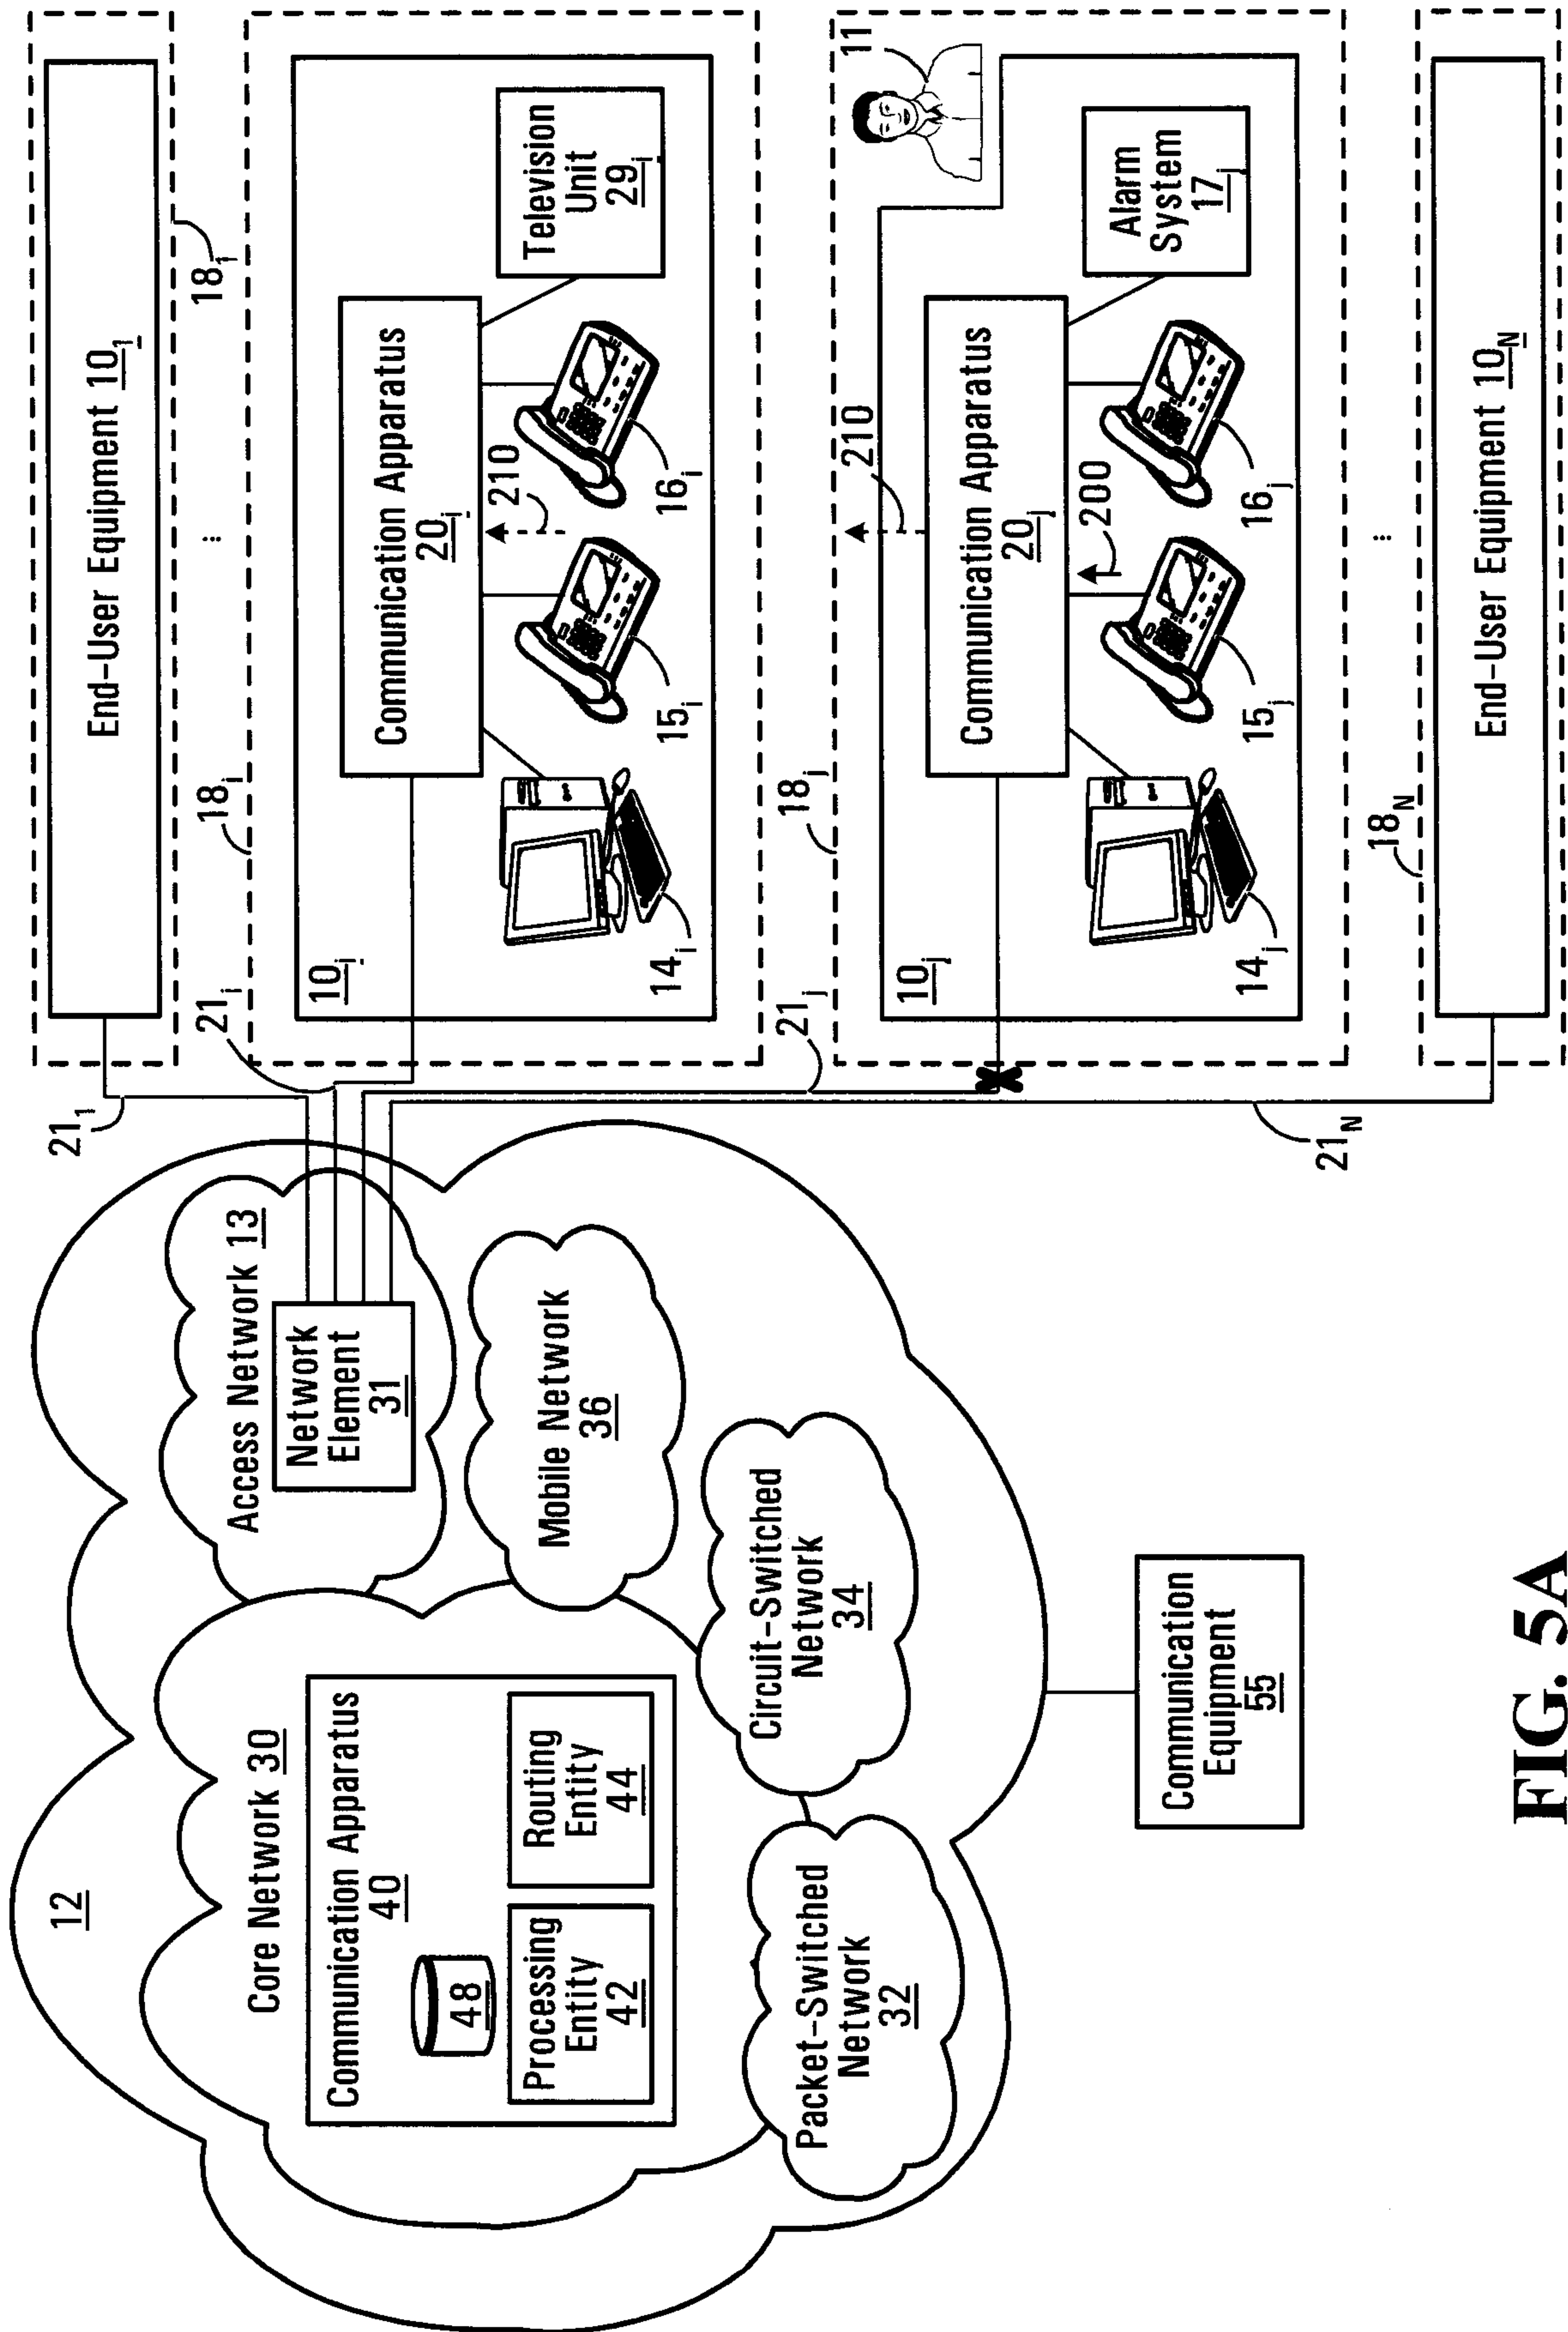


FIG. 5A

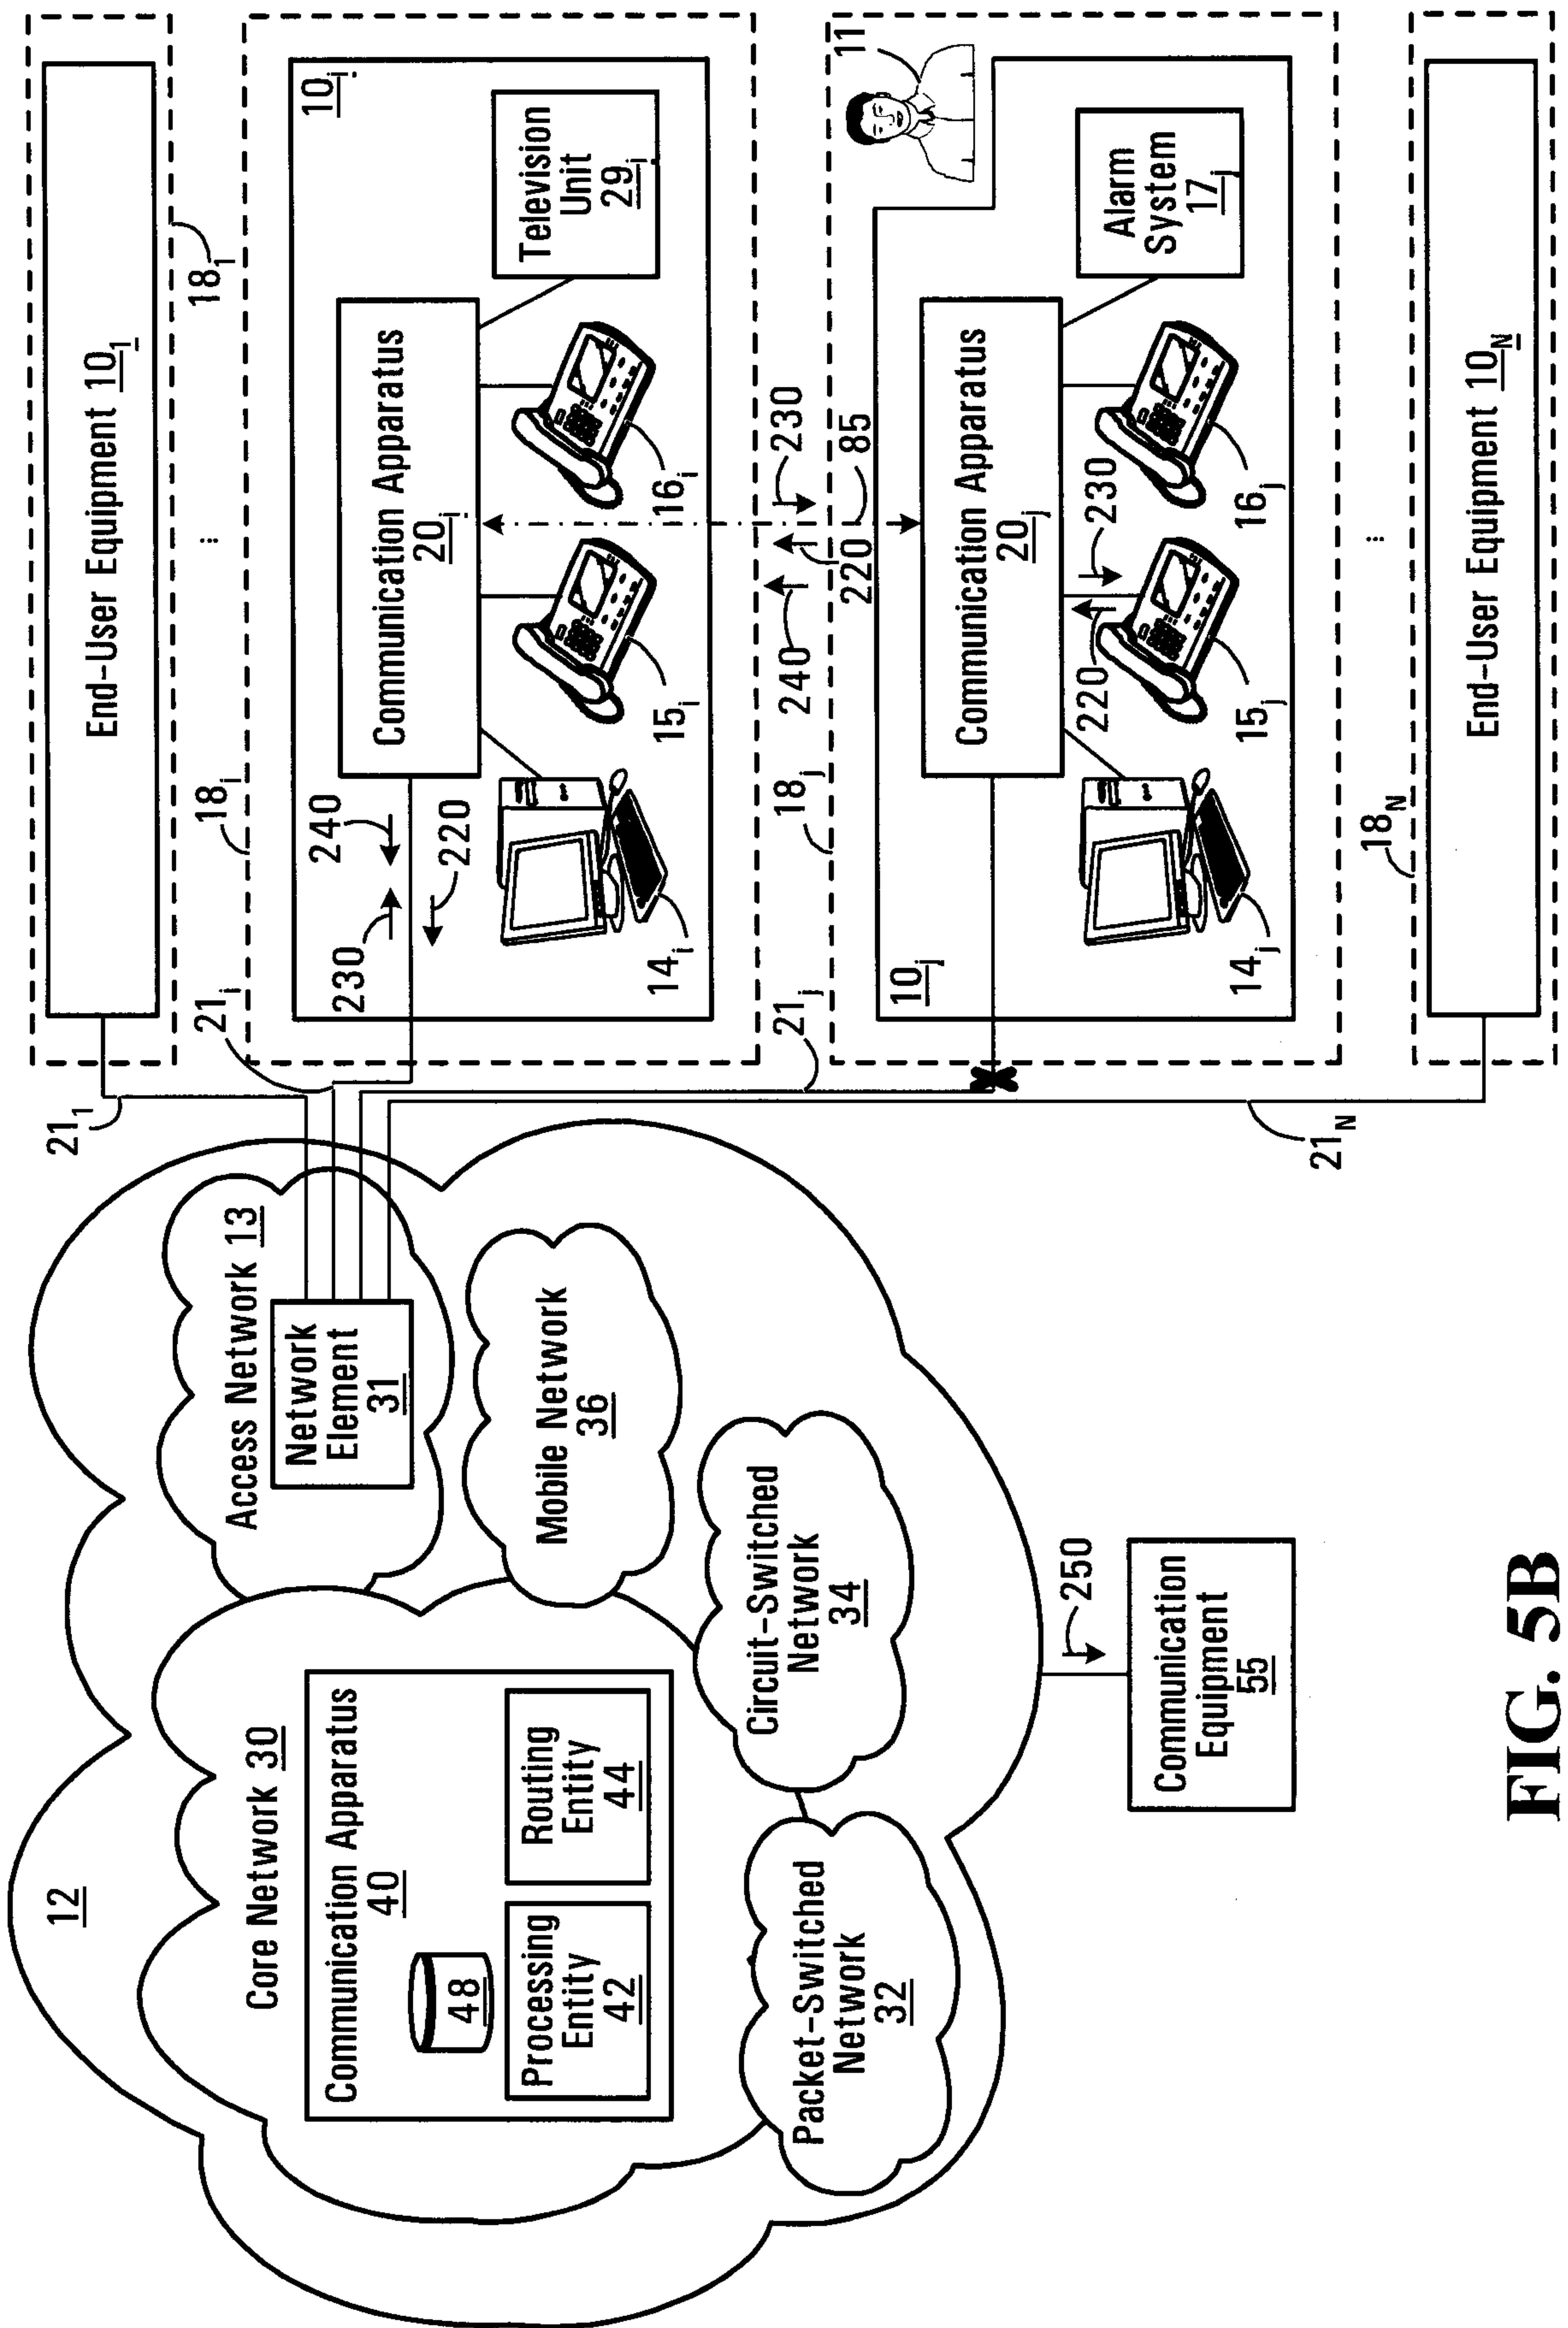


FIG. 5B

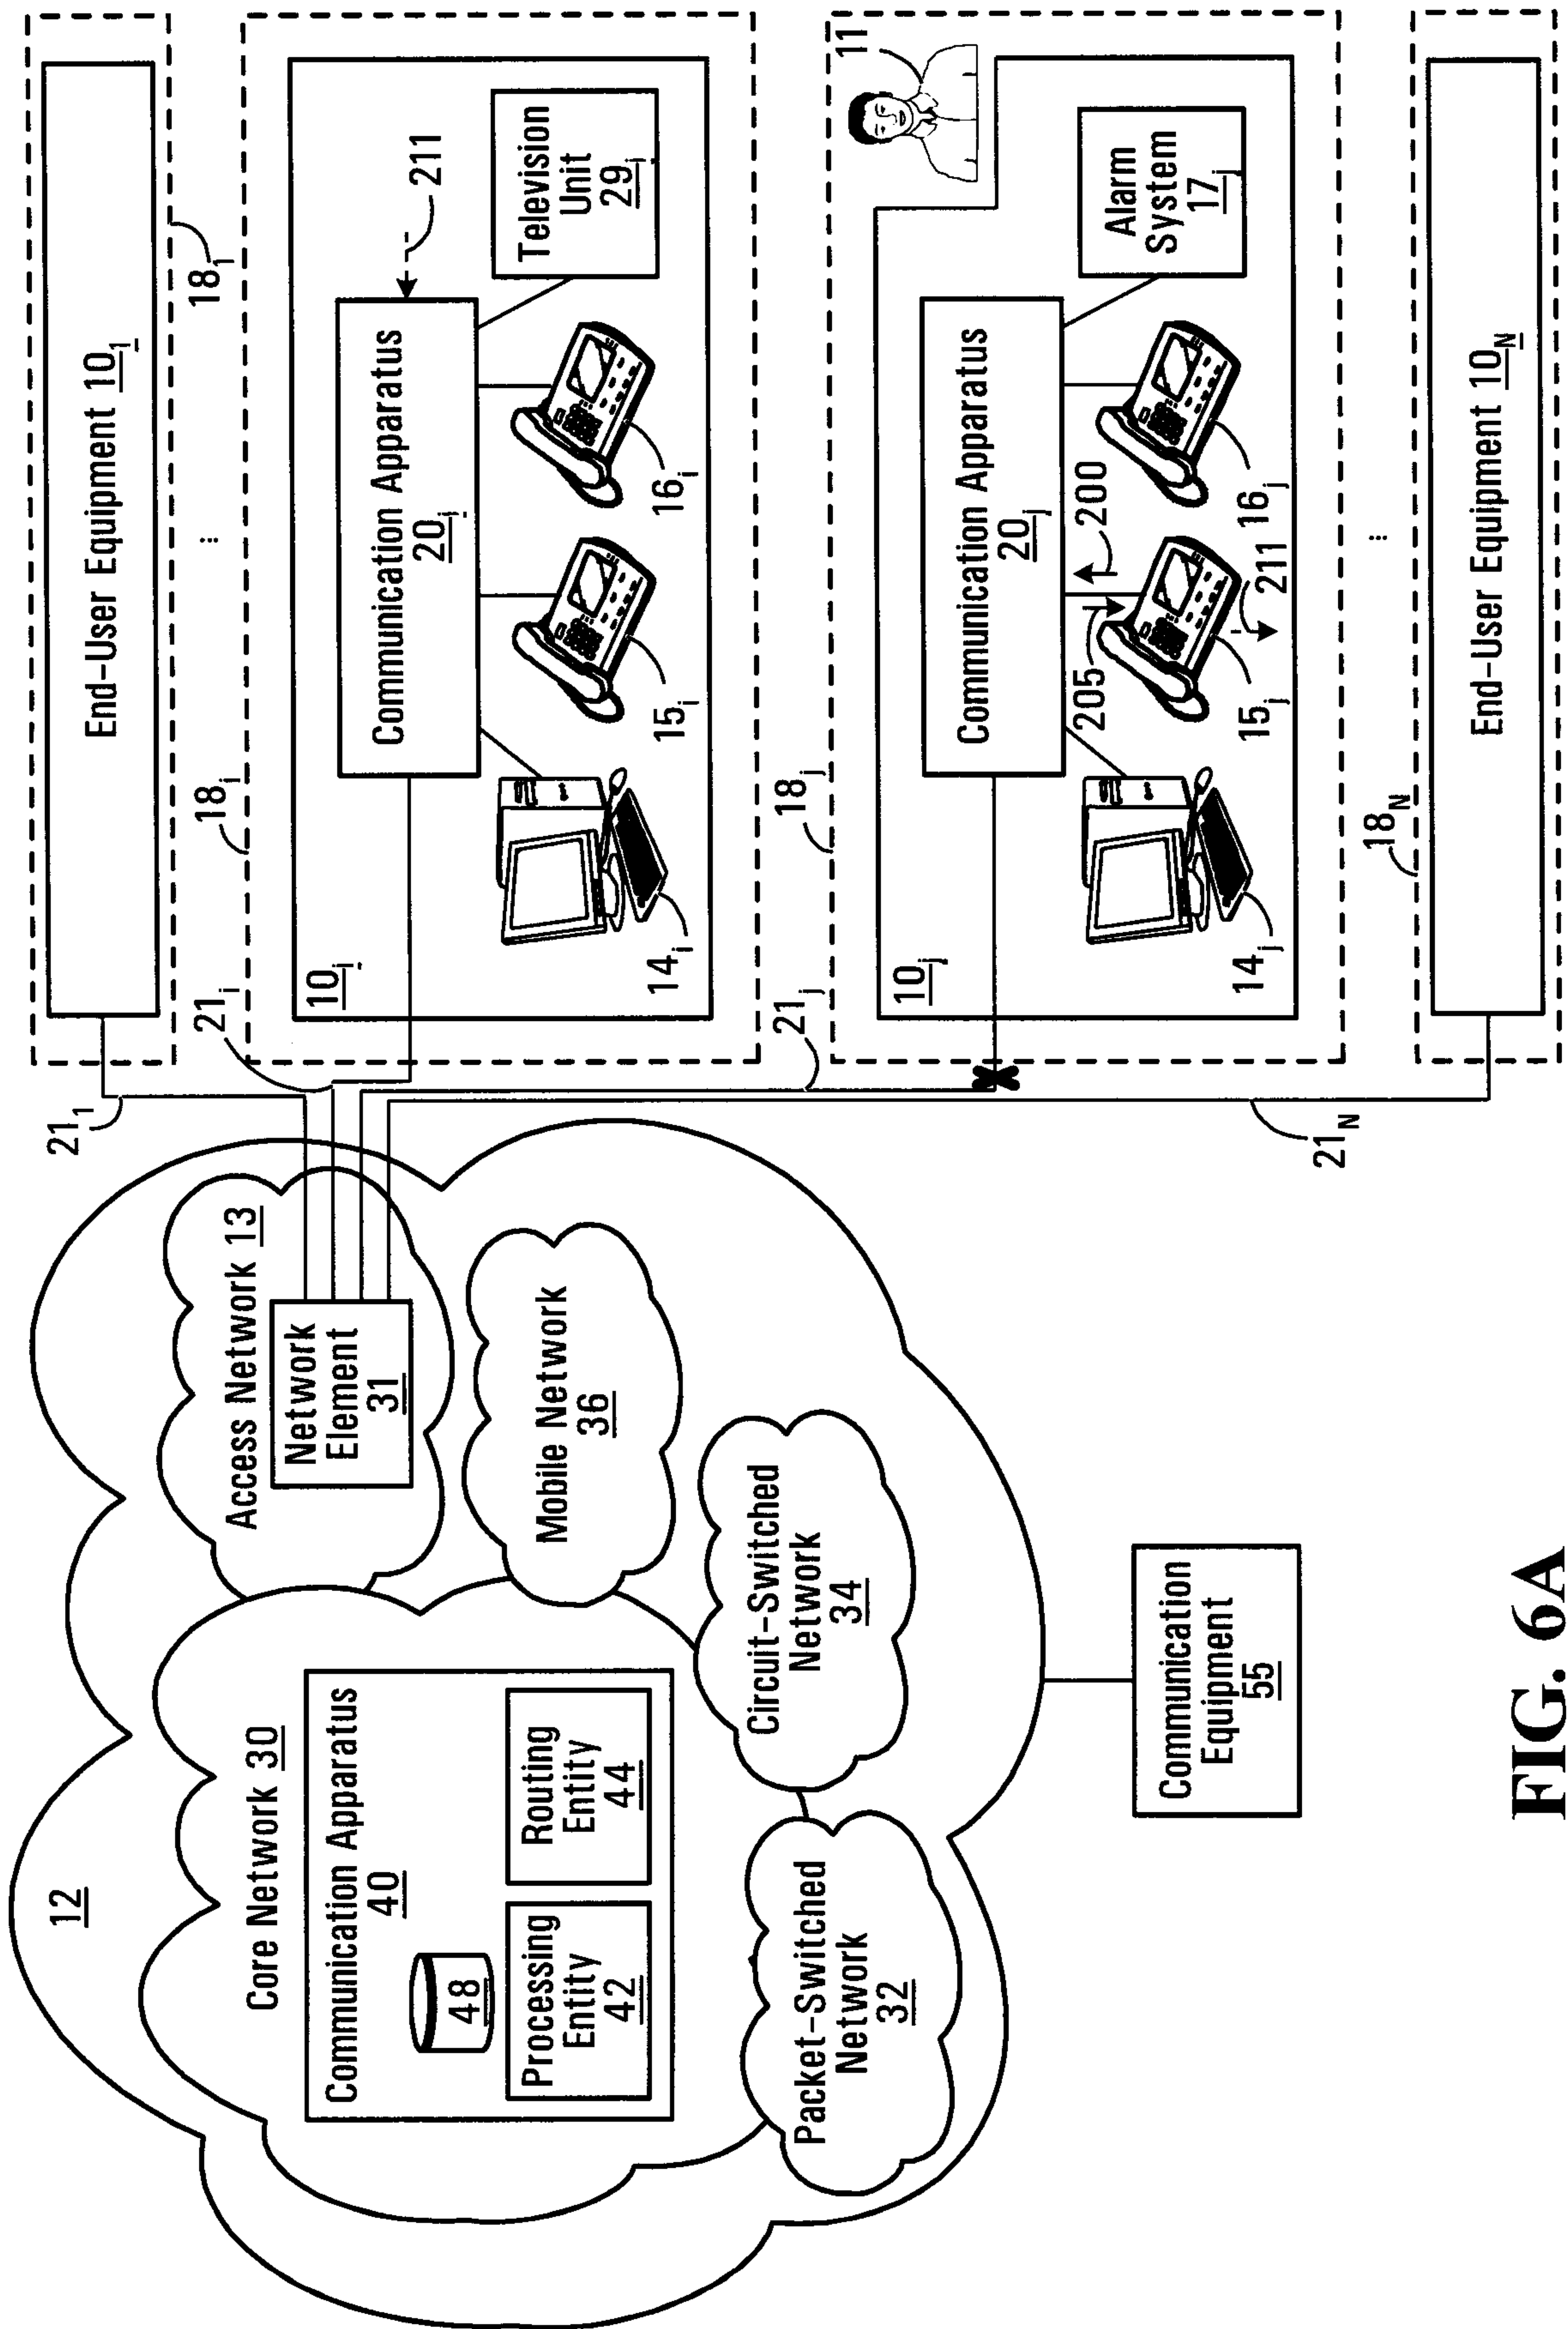


FIG. 6A

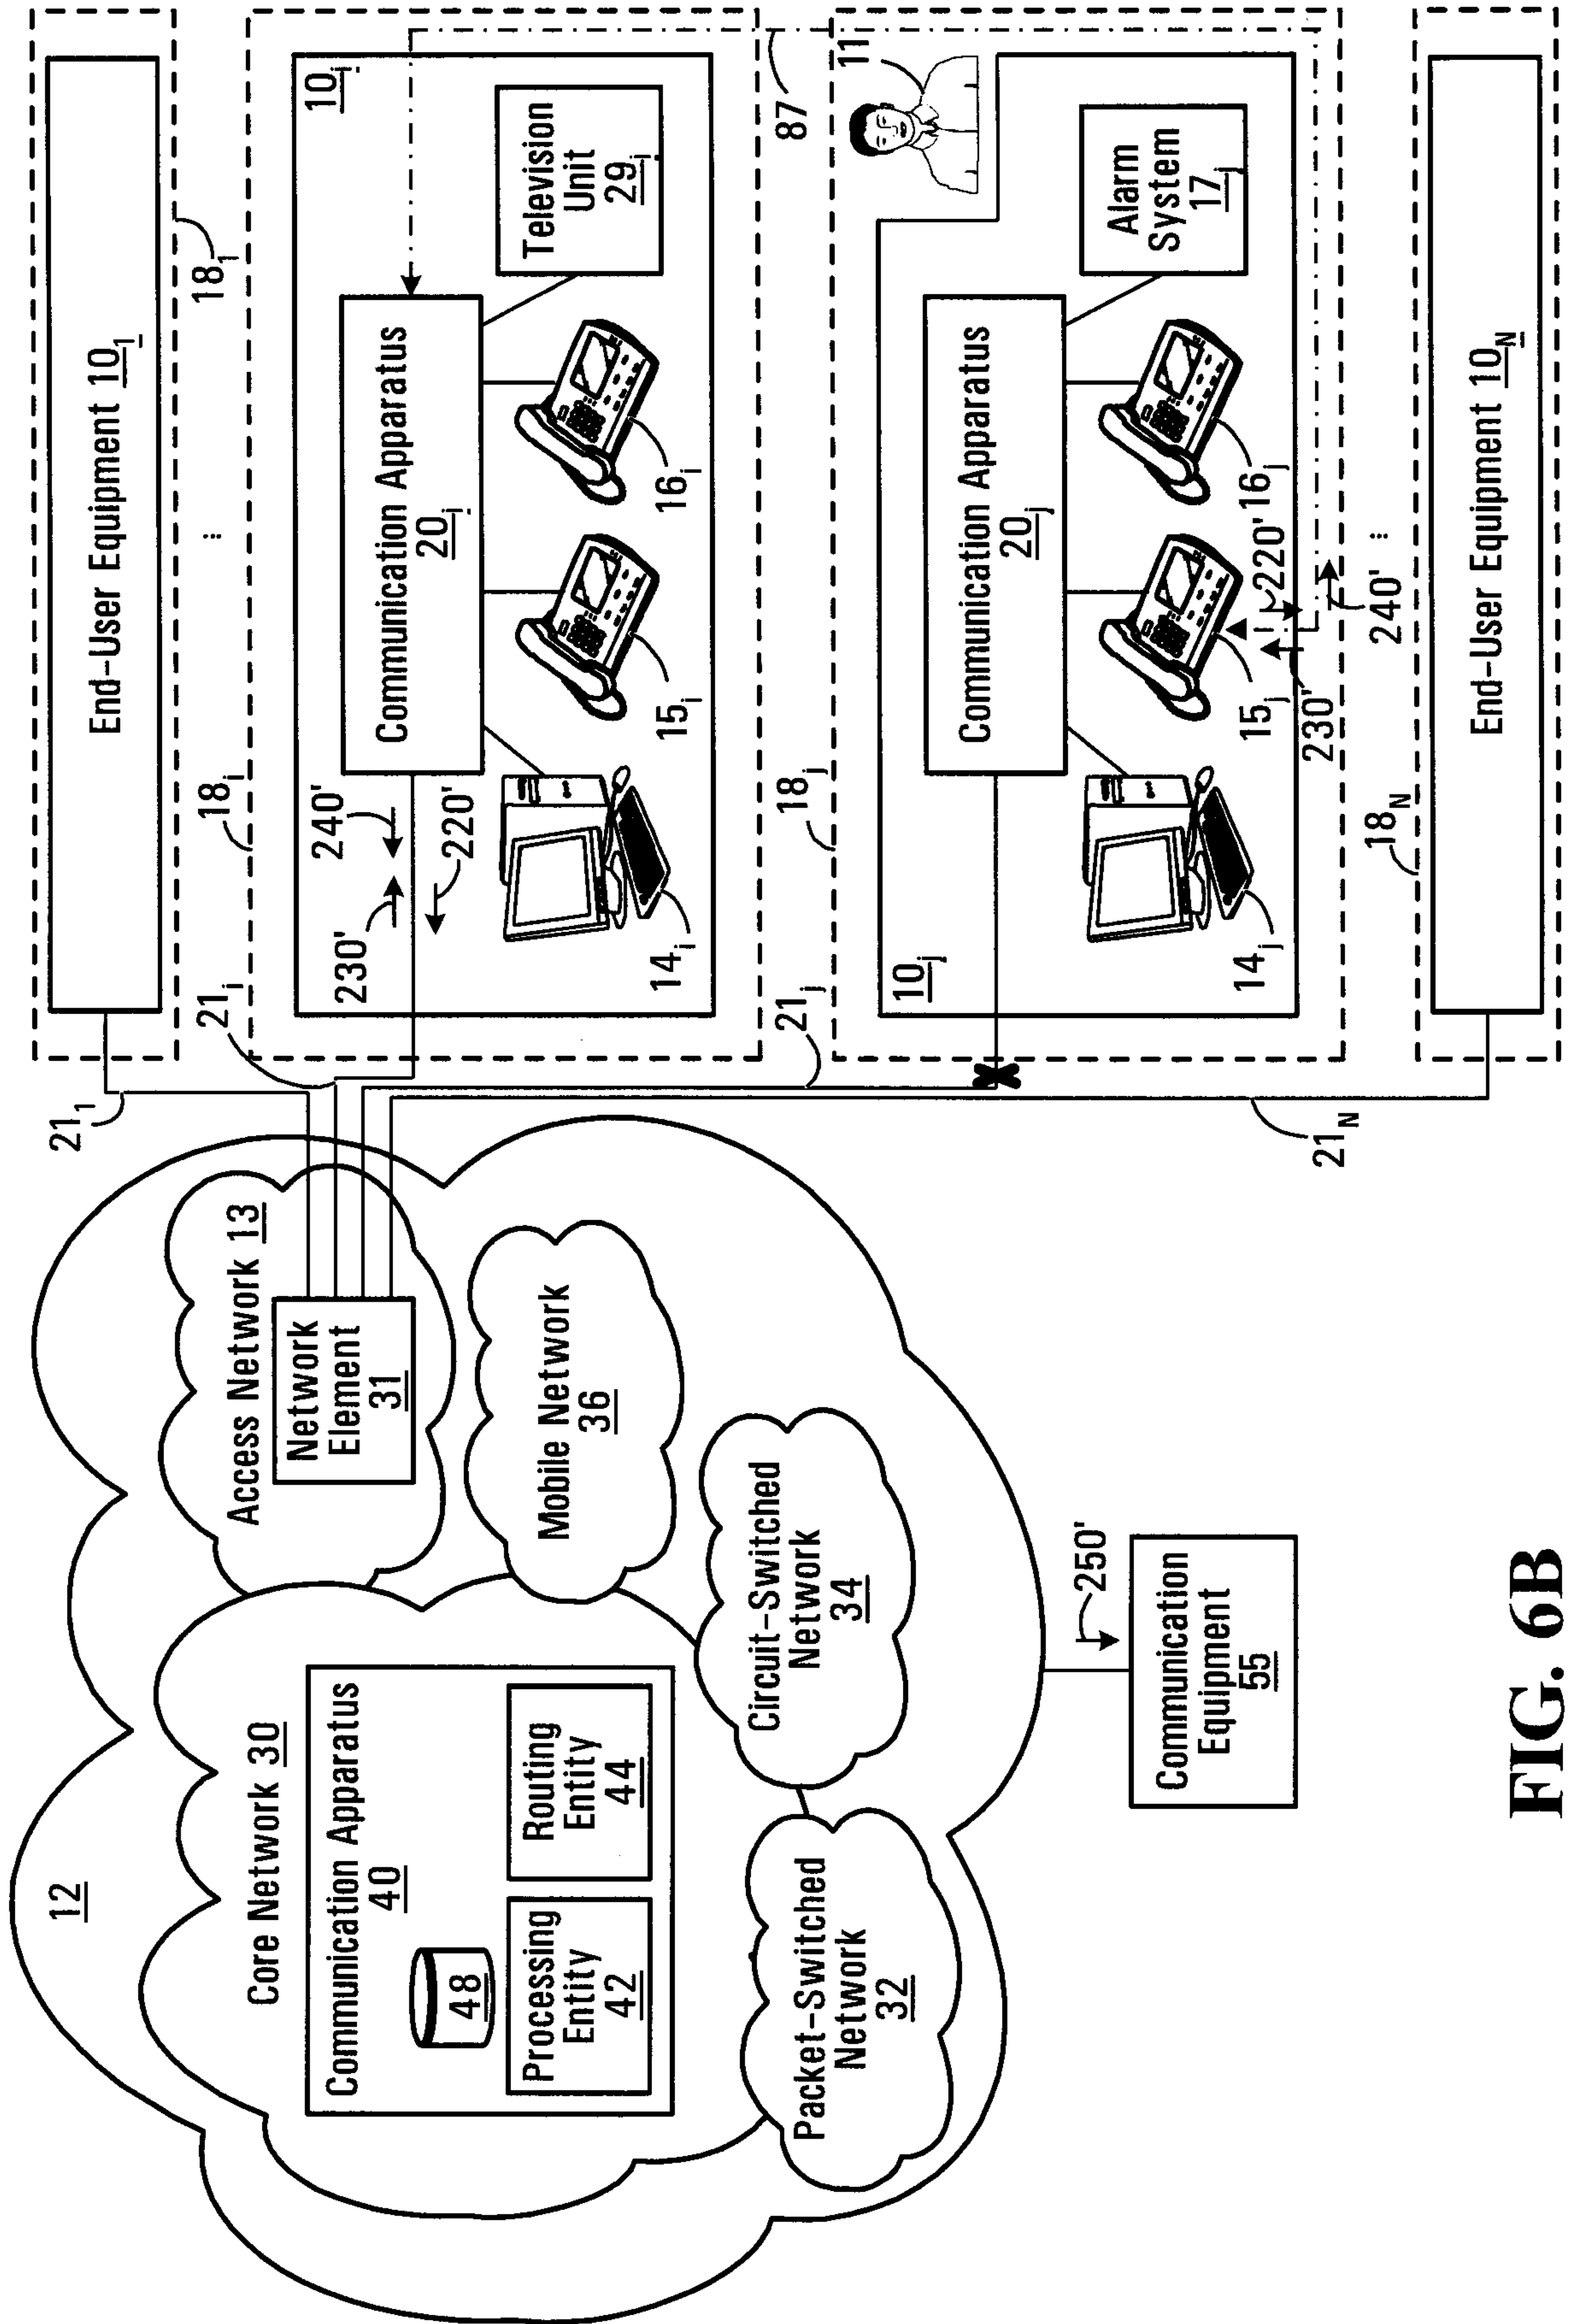


FIG. 6B

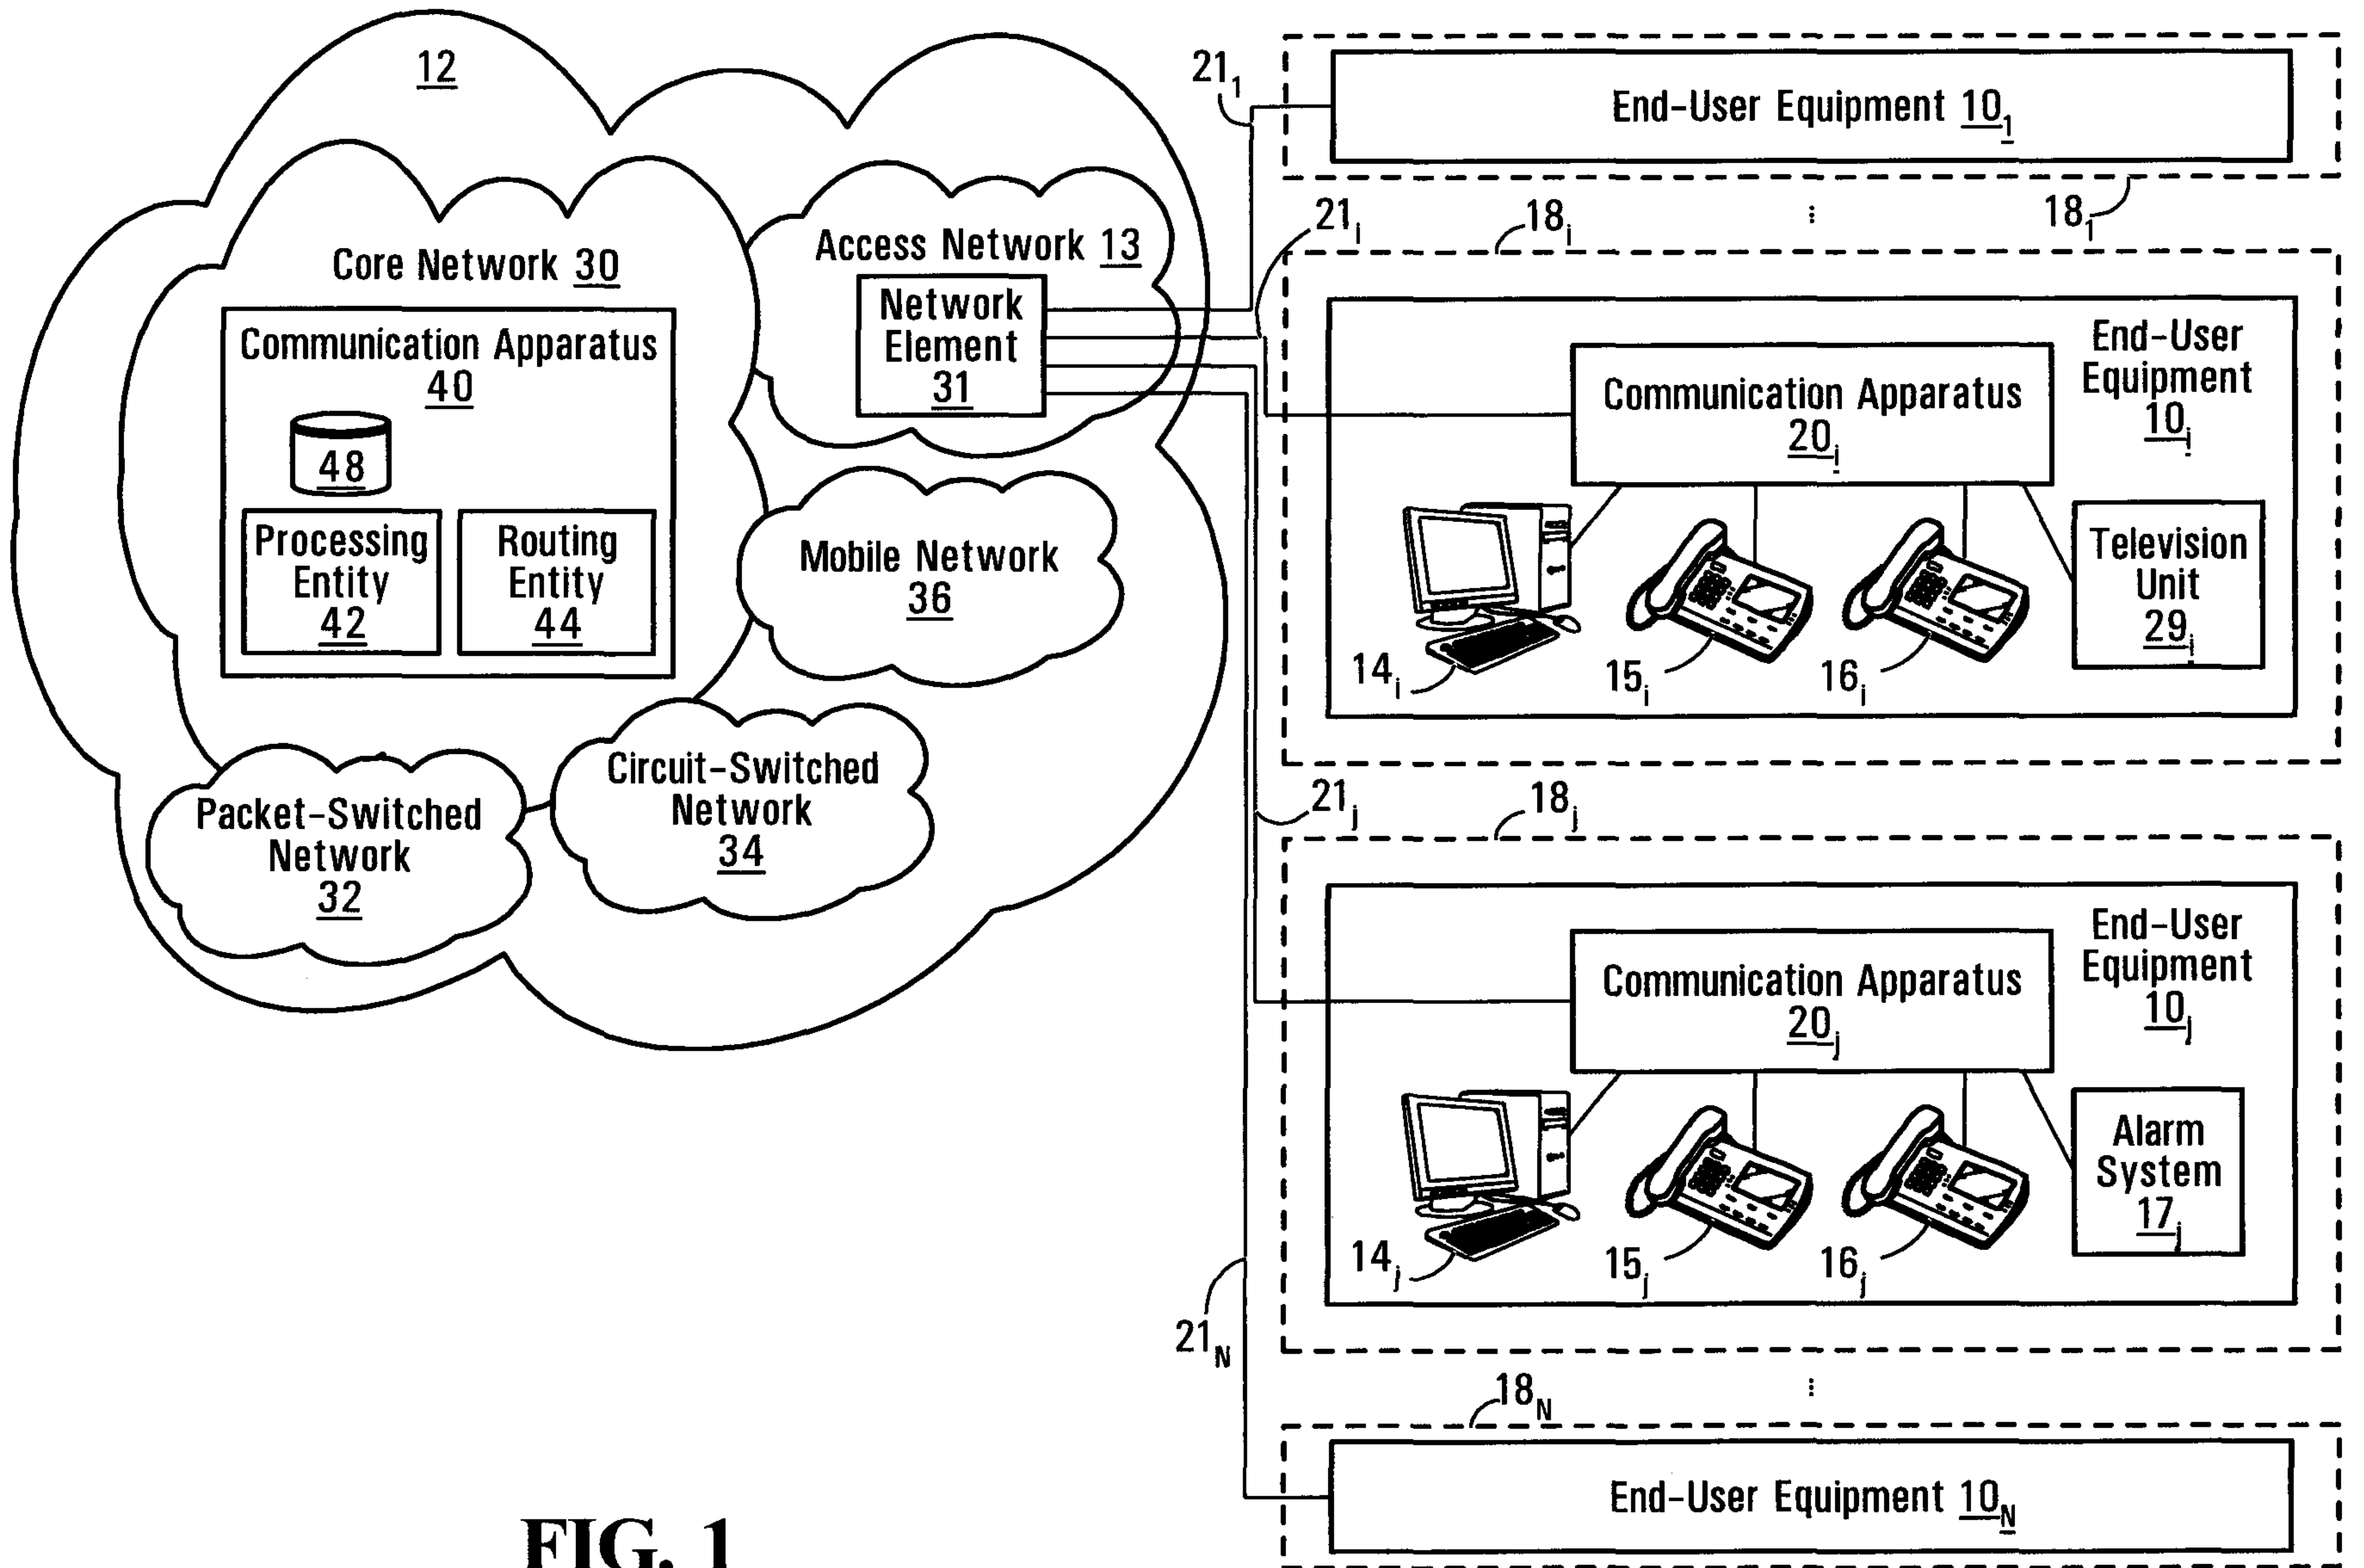


FIG. 1