

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 September 2009 (24.09.2009)

(10) International Publication Number
WO 2009/115879 A1

(51) International Patent Classification:

B64C 1/14 (2006.01) *B64D 25/12* (2006.01)
B64C 1/32 (2006.01) *E05B 51/02* (2006.01)
B64D 25/00 (2006.01) *F42B 3/00* (2006.01)

(21) International Application Number:

PCT/IB2009/000392

(22) International Filing Date:

2 March 2009 (02.03.2009)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

102008014691.9 18 March 2008 (18.03.2008) DE

(71) Applicant (for all designated States except US): **EURO-COPTER DEUTSCHLAND GMBH** [DE/DE]; Industriestrasse 4, 86609 Donauwörth (DE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ANDRES, Stefan** [DE/DE]; Johann-Fichte-Str. 21, D-80805 München (DE). **BARTOSCH, Hans** [DE/DE]; Dietrich-Bonhoefer-Str. 22, D-86609 Donauwörth (DE). **BUCHS, Wolfgang** [DE/DE]; Pater-Frei-Ring 19, 86698 Oberndorf (DE). **HELD, Manfred** [DE/DE]; Pfarrer-Meier-Strasse

8, 86561 Aresing (DE). **HERTIE, Rainer** [DE/DE]; Ringstr. 24, D-86733 Alerheim (DE).

(74) Agent: **KEMPF, Dominique**; GPI & Associés, EuroParc de Pichaury, Bât. B2.89 - 1^o Etage, 1330, rue Guillibert de la Lauzière, F-13856 Aix-En-Provence Cedex 3 (FR).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEVICE FOR OPENING A PASSENGER DOOR IN CASE OF EMERGENCY

Fig. 1

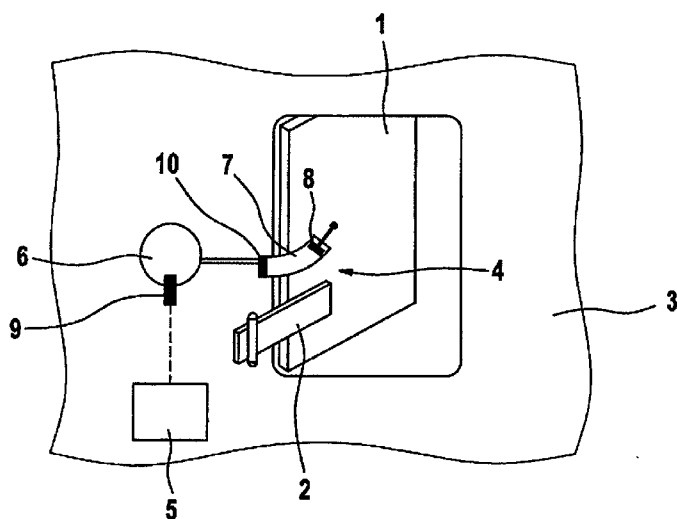

(57) Abstract: The invention relates to a device for opening a passenger door (1) of an aircraft in case of emergency, which is fastened so it is manually pivotable on the fuselage (3) of the aircraft via a hinge and/or support arm configuration (2), an auxiliary-energy-operated emergency opening drive (4) being provided between the fuselage (3) and the passenger door (1), which automatically opens the passenger door (1) in accordance with an emergency control unit (5), the auxiliary energy for the emergency opening drive (4) being pyrotechnic energy, whose gas expanding inside an expansion chamber (6) after triggering by the emergency control unit (5) impinges the emergency opening drive (4) with pressure medium to open the passenger door (1), wherein said emergency opening drive (4) generates a rotational movement.

WO 2009/115879 A1

Published:

— with international search report (Art. 21(3))

DEVICE FOR OPENING A PASSENGER DOOR IN CASE OF EMERGENCY

The present invention relates to a device for opening a passenger door of an aircraft, which is fastened so it is manually pivotable on the fuselage of the aircraft via a hinge and/or support arm configuration, in case of emergency, an auxiliary-energy-operated emergency opening drive acting between the fuselage and the passenger door being provided, which automatically opens the passenger door in accordance with an emergency control unit.

The field of use of the present invention extends to aircraft, in particular passenger airplanes. For reasons of safety, passenger doors and also emergency exit doors of such an aircraft must be able to be opened with very high reliability and rapidly in the event of an emergency landing, for example, so that the passengers may rapidly leave the aircraft. For this purpose, devices according to the object of the invention for opening a passenger door are employed, which allow an automatic opening of the passenger door in accordance with an emergency control unit.

A device according to the species is disclosed in DE 102 12 188 A1. It comprises an emergency opening drive for pivoting a passenger door, which is mounted on a support arm, which is mounted so it is pivotable in an axis on the fuselage-side frame. In case of emergency, the emergency opening drive is switched on, which causes the passenger door to pivot open into the opening position. The emergency opening drive may operate according to a pneumatic, hydraulic, electrical, or mechanical action principle. In the context of a pneumatic action principle, an emergency opening cylinder belonging to the emergency opening drive is connected to a gas cartridge. Upon release of the gas by an emergency control unit, it is conducted into the emergency opening cylinder, so that the piston therein

moves a pushrod, which is fastened at its end on the support arm to execute the desired pivoting movement to open the passenger door. The gas cartridge represents a pneumatic pressure accumulator, which provides the drive power for the emergency opening cylinder, implemented as a linear drive.

The high maintenance effort connected thereto has proven to be disadvantageous for this technical solution. This is because gas cartridges are to be checked frequently and replaced in the event of pressure loss. For reasons of safety, fixed monitoring intervals are prescribed. If the emergency opening drive is based on an electrical action principle, reliable provision of a sufficient level of electrical power is always to be ensured in case of emergency. Because the system must thus operate independently of the onboard electrical network, an electrical power accumulator is typically necessary, which increases the device outlay.

Another device is disclosed in EP 1 418 121 A1, in which a type of singly-acting pneumatic cylinder of a typical construction is used for the emergency opening, whose floor-side pressure chamber is coupled directly to a pyrotechnic propellant charge. In practice, the use of this solution may result in uncontrolled violent pivoting open of the passenger door.

It is therefore the object of the present invention to provide a device for opening a passenger door of an aircraft in case of emergency which ensures a reliable emergency opening of the passenger door using simple technical means.

The object is achieved proceeding from a device according to the preamble of Claim 1 in connection with its

characterizing features. The following dependent claims describe advantageous refinements of the invention.

The invention includes the technical teaching that the auxiliary energy for the emergency opening drive is pyrotechnic energy, whose gas, which expands inside a protected expansion chamber after triggering by the emergency control unit, impinges the emergency opening drive as adapted pressure means to open the passenger door.

The advantage of the solution according to the invention is, in particular, that the auxiliary energy for the emergency opening drive may be provided over a long period of time reliably with little outlay and occupying little installation space. This is because an explosive substance may preferably be used to generate the pyrotechnic energy, which is capable of generating sufficient auxiliary energy for the emergency opening drive after triggering or ignition. Complex maintenance measures are thus dispensed with in comparison to the solutions based on the pneumatic action principle discussed above. Heavy and complex batteries for the electrical power storage and/or buffering for the purpose of decoupling from the onboard electrical network in regard to the electrical active principle are dispensed with. In addition, the expansion chamber employed according to the invention ensures a controllable unfolding of pressure on the emergency opening drive.

According to a first embodiment of the invention, a direct impingement of the emergency opening drive with the auxiliary energy occurs in that a housing shaped like an annular segment, which is adapted to the opening movement of the passenger door, having at least one internal blade is used as a movable drive element. In case of two blades, it is suggested that they be situated opposing in pairs to achieve a high efficiency. The housing, which is shaped like an annular segment or is curved, generates - contrary

to typical piston-cylinder units - an adapted pivot movement for directly opening the passenger door. Interposed gears or transmission means are thus superfluous.

According to a second embodiment of the invention, it is also conceivable to use a linear cylinder in an emergency opening drive.

In this case, it is suggested that the internal piston drive at least one sliding pin, which is used in helical groove means to reshape the linear movement into a rotational movement for the opening of the passenger door. The advantage of this embodiment is that the cylinder itself may be produced easily because of the linear shape and prefinished recirculating ball spindles or the like may be used in regard to the helical groove means.

According to a preferred variant, a sliding pin driven by the piston may have its ends extending through assigned linear axially-parallel guide slots in the cylinder and work together with a threaded sleeve, which encloses the cylinder and is co-axially rotatable thereto and is mounted so it is rotatable thereon, as the helical grooved means, in such a way that the threaded sleeve generates the rotational movement.

Alternatively thereto, it is also more simply possible that the helical groove means are executed as a helical groove guide directly on the inner wall of the cylinder. A typical recirculating ball spindle or the like is thus superfluous.

If the impingement of the emergency opening drive is performed indirectly, it is suggested according to a third embodiment that a turbine be used to generate the rotational movement from the pyrotechnic energy, which works together with a downstream reduction gear to open the

passenger door. Because the pyrotechnically generated gas expands very rapidly, the energy thus suddenly released may be efficiently converted into a mechanical rotational movement by a rapidly rotating turbine. However, because a comparatively slower rotational velocity is necessary for pivoting open the passenger door, the reduction gear downstream from the turbine is used. In the simplest case, it may be implemented as a spur gear or - in a space-saving variant - as a planetary gear, the drive occurring via the sun wheel and the gear ring forming the output.

In the third embodiment described above, the turbine having the reduction gear may preferably be housed on-board in the area of the door-side pivot axis of a door support arm. This is because the reduction gear may be easily coupled to the door opening mechanism at this point.

To also employ the reduction gear provided for emergency opening and coupled to the turbine in another way, it may also be used as the reduction gear for the normal opening. In this case, the reduction gear is also coupled at its input to an electro-motorized rotational actuator. The rotational actuator is typically manually activated to actuate the passenger door during the normal entry and exit procedure. A further gear for this purpose may thus be saved.

The emergency control unit preferably performs an activation of the pyrotechnic energy via mechanism, electro-explosive igniter, or laser pulse. The power supply for actuating the igniter is preferably to be generated by magnetic impact generator or piezoelectric generator, and thus independently of the normal onboard electrical network. A breakdown of the onboard electrical network in case of emergency thus does not endanger the operation of the emergency opening of the passenger door.

According to another measure which improves the invention, it is suggested that the working pressure contained in the pyrotechnic energy be reduced by throttle means interpolated into the flow path after the expansion chamber. Through this measure, influence may be taken on the pressure pulse curve of the pyrotechnic energy and its peaks may be controlled by simple technical means, such as a throttle screen. This measure increases the operational reliability of the device according to the object of the invention.

Further measures which improve the invention are explained in greater detail hereafter together with the description of three preferred embodiments of the invention on the basis of the drawing. In the figures:

Figure 1 shows a device for opening a passenger door using direct impingement of an emergency opening drive according to a first embodiment,

Figure 2 shows a device for opening a passenger door using direct impingement of an emergency opening drive according to a second embodiment,

Figure 3 shows a device for opening a passenger door using direct impingement of an emergency opening drive according to a third embodiment.

According to Figure 1, a passenger door 1 of an aircraft is fastened to a fuselage 3 of the aircraft via a support arm configuration 2 so it is pivotable. The support arm 2 carries the entire load of the passenger door 1 and is situated so it is pivotable in relation to the fuselage 3 via hinge means, so that the passenger door 1 may be open and closed manually. Furthermore, seal and closing means (not shown in greater detail) are provided between the fuselage 3 and the passenger door 1, to keep the passenger

door 1 closed securely and pressure-tight during the flight.

In case of emergency, the passenger door 1 may also be opened in way other than that described above.

For this purpose, an auxiliary-energy-operated emergency opening drive 4 is provided between the fuselage 3 and the passenger door 1. The emergency opening drive 4, which is implemented in this embodiment as a curved housing 7, is impinged by pressure medium in that an explosive substance, which is housed in a protected expansion chamber 6, is electrically ignited by an emergency control unit 5. The pyrotechnic energy released in this way then directly reaches a blade 8 housed in a housing 7, which travels along an opening angle described by the curved housing 7, to open the passenger door 1.

The ignition of the explosive substance inside the expansion chamber 6 is performed here via electro-explosive igniter 9, which is inserted so it is replaceable in the wall of the expansion chamber 6. The electro-explosive igniter 9 is electrically actuated by the emergency control unit 5, which contains a piezoelectric generator for this purpose, to decouple the power supply for activating the igniter 9 from the onboard electrical network.

To control the pulsed pyrotechnic energy generated in the expansion chamber 6, throttle means 10 in the form of a screen are additionally interposed between the expansion chamber 6 and the housing 7, which ensure a more easily controllable pressure impingement of the housing 7.

According to Figure 2, the emergency opening drive 4' comprises a cylinder 7', which is linear in contrast to the embodiment described above, having internal piston 8', which is thus movable linearly. This piston-cylinder unit

drives a sliding pin 11, which is engaged in helical grooved means for reshaping the linear movement of the piston-cylinder unit into a relatively slower rotational movement for the opening of the passenger door 1. A threaded sleeve having a high thread pitch forms the helical grooved means here, which is implemented as a recirculating ball spindle 12 and encloses the cylinder 7', so that the linear movement of the sliding pin 11 of the piston 8' along an assigned axially-parallel grooved guide in the cylinder 7' is converted into the rotational movement for opening the passenger door 1, which acts directly on the door-side pivot axis of the support arm configuration 2 here.

In the embodiment illustrated in Figure 3, which operates according to the principle of an indirect impingement of an emergency opening drive 4" with auxiliary energy, in contrast to the two embodiments described above, the emergency opening drive 4" comprises a turbine 13 which generates a rapid rotational movement at high efficiency starting from the pyrotechnic energy from the expansion chamber 6. Because a rapid rotational movement of this type is not directly usable for the comparatively relatively slow opening of the passenger door 1, a reduction gear 14 is interposed. The reduction gear 14 is housed in the area of the door-side pivot axis of the support arm configuration 2 here.

The reduction gear 14 serves, in addition to reducing the output-side speed of the turbine 13, as an electro-motorized rotational actuator 15 for reducing the rapid rotational movement generated by these drive means. The electro-motorized rotational actuator 15 is provided for opening the passenger door 1 in the normal case and is thus used as an aid to the movement of a heavy passenger door 1.

The invention is not restricted to the preferred embodiments described above. Rather, alterations thereof are also conceivable, which are included by the protective scope of the following claims. Thus, for example, it is also possible to differently implement the helical grooved means for reshaping the linear movement of the piston-cylinder unit, which is impinged by the pyrotechnic energy, into a rotational movement for pivoting the passenger door. In this regard, it would be conceivable that the sliding pin of the piston engages directly in a helical grooved guide on the inner wall of the cylinder.

Furthermore, the possible use of the present invention is not solely restricted to passenger doors. Rather, other doors and hatches of an aircraft may also be equipped with the device described here for opening in case of emergency. In addition to a configuration described above of the indirectly impinged emergency opening drive on the fuselage-side axis of the support arm, it is also possible to situate the emergency opening drive on the door-side axis of the support arm.

LIST OF REFERENCE NUMERALS

- 1 passenger door
- 2 support arm configuration
- 3 fuselage
- 4 emergency opening drive
- 5 emergency control unit
- 6 expansion chamber
- 7 housing/cylinder
- 8 blade/piston
- 9 igniter
- 10 throttle means
- 11 sliding pin
- 12 recirculating ball spindle
- 13 turbine
- 14 reduction gear
- 15 rotational actuator

PATENT CLAIMS

1. A device for opening a passenger door (1) of an aircraft in case of emergency, which is fastened so it is manually pivotable on the fuselage (3) of aircraft via a hinge and/or support arm configuration (2), an auxiliary-energy-operated emergency opening drive (4) acting between the fuselage (3) and the passenger door (1) being provided, which automatically opens the passenger door (1) in accordance with an emergency control unit (5) and whose auxiliary energy is pyrotechnic energy, characterized in that its gas expanding within a protected expansion chamber (6) after triggering by the emergency control unit (5) impinges the emergency opening drive (4) as pressure medium to open the passenger door (1).
2. The device according to Claim 1, characterized in that the emergency opening drive (4) comprises a housing (7) shaped like an annular segment which is adapted to the opening movement of the passenger door (1) having at least one internal blade (8) as a movable drive element for the direct impingement with the auxiliary energy.
3. The device according to Claim 1, characterized in that the emergency opening drive (4') comprises a linear cylinder (7'), whose internal piston (8') drives at least one sliding pin (11), which engages in helical grooved means for reshaping the linear movement into a rotational movement for the opening of the passenger door (1).
4. The device according to Claim 3, characterized in that the helical grooved means are implemented as a helical grooved guide on the inner wall of the cylinder (7').

5. The device according to Claim 3, characterized in that the at least one sliding pin (11) has its ends projecting through assigned linear axially-parallel guide slots in the cylinder (7') and works together with a threaded sleeve, which encloses the cylinder (7') so it is coaxially rotatable and is mounted so it is rotatable thereon, as the helical grooved means in such a way that the threaded sleeve generates the rotational movement.
6. The device according to Claim 5, characterized in that the threaded sleeve is implemented like a recirculating ball spindle (12).
7. The device according to Claim 1, characterized in that, for the indirect impingement with the auxiliary energy, the emergency opening drive (4") comprises a turbine (13) for generating a rotational movement from the pyrotechnic energy, which works together with a downstream reduction gear (14) to open the passenger door (1).
8. The device according to Claim 7, characterized in that the turbine (13) is housed with the reduction gear (14) in the area of the door-side pivot axis of the support arm configuration (2).
9. The device according to Claim 7, characterized in that the reduction gear (14) of the turbine (13) also serves as the reduction gear of an electro-motorized rotational actuator (15) which executes the normal opening.
10. The device according to one of the preceding claims, characterized in that the emergency control unit (5) performs an activation of the pyrotechnic energy via a

mechanism, via electro-explosive igniter (9), or via laser pulse.

11. The device according to Claim 10, characterized in that the power supply for actuating the igniter (9) is performed by a magnetic impact generator or a piezoelectric generator.
12. The device according to one of the preceding claims, characterized in that the working pressure containing the pyrotechnic energy is controllable by throttle means (10) interposed in the flow path after the expansion chamber (6).

Fig. 1

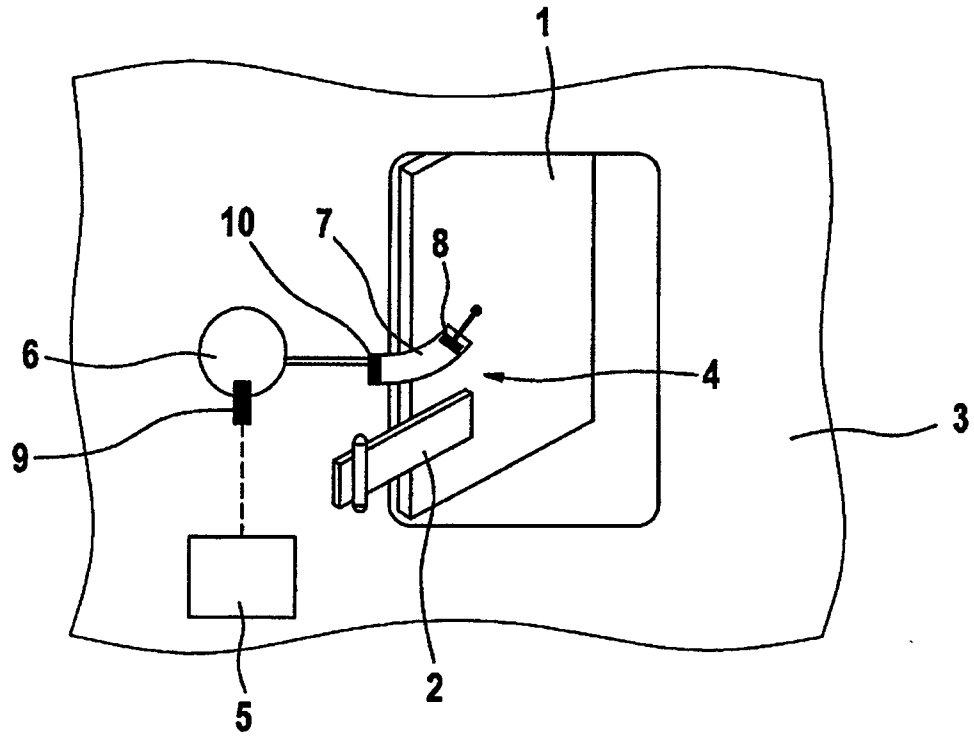


Fig. 2


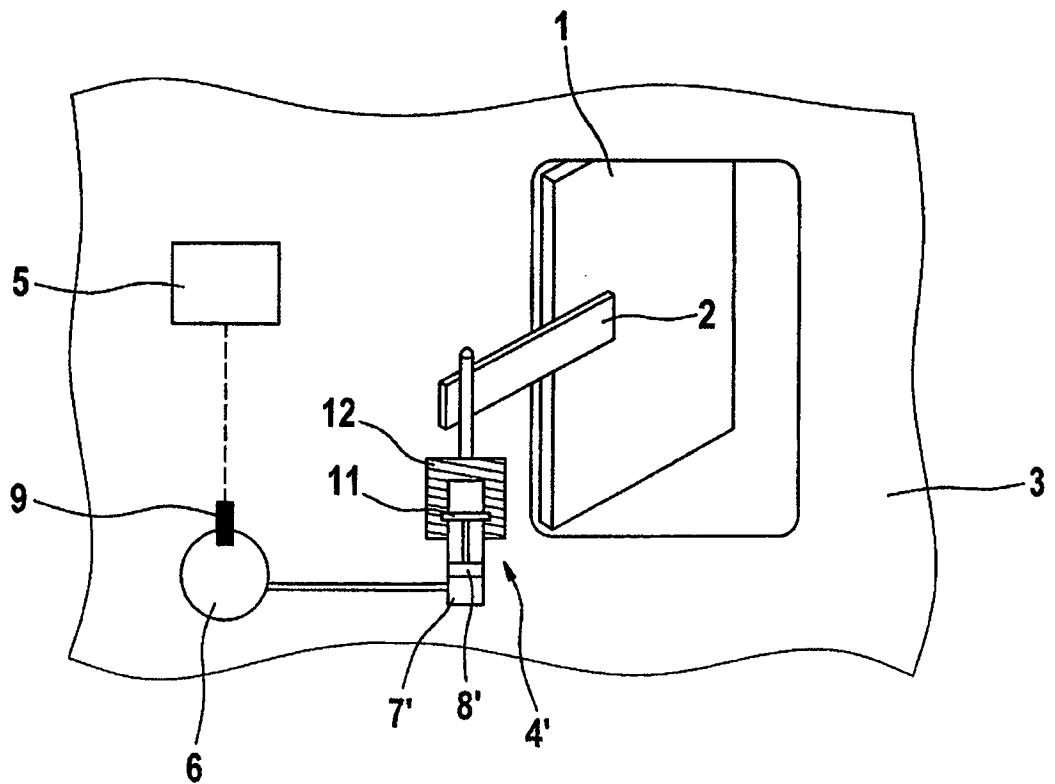


Fig. 3

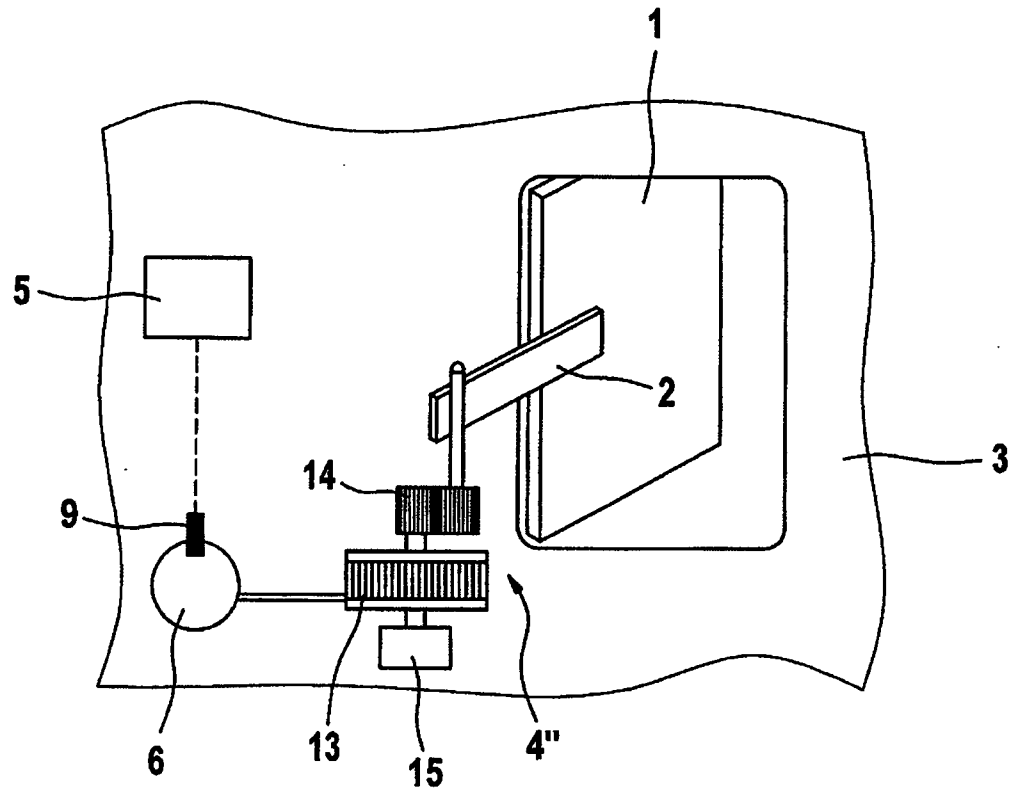

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2009/000392

A. CLASSIFICATION OF SUBJECT MATTER

INV. B64C1/14 B64C1/32 B64D25/00 B64D25/12
ADD. E05B51/02 F42B3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B64C B64D E05B F42B F15B B60R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 880 659 A (RATIER FIGEAC SOC PAR ACTIONS [FR]) 14 July 2006 (2006-07-14) page 1, line 3 - line 4 page 1, line 30 - line 31 page 2, line 10 - line 16 page 2, line 29 - line 31 page 3, line 14 - line 15 page 3, line 29 - line 30 -----	1,2, 10-12
A	page 4, line 9 - line 15; figure 1 -----	3-9
A	US 7 114 431 B1 (HOLDER ROBERT E [US] HOLDER ROBERT EDWARD [US]) 3 October 2006 (2006-10-03) column 1, line 24 - column 2, line 27 column 3, line 17 - column 4, line 37; figure 4 ----- -/--	1

 Further documents are listed in the continuation of Box C. See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

11 June 2009

Date of mailing of the international search report

26/06/2009

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Kaysan, Rainer

INTERNATIONAL SEARCH REPORT

International application No
PCT/IB2009/000392

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 418 121 A (EATON FLUID POWER GMBH [DE]) 12 May 2004 (2004-05-12) abstract; figure 2 -----	1
A	DE 41 24 377 C1 (DEUTSCHE AIRBUS GMBH, 2000 HAMBURG, DE) 17 December 1992 (1992-12-17) the whole document -----	1
A	EP 1 882 617 A (AUTOMOTIVE GROUP ISE INNOMOTIV [DE]) 30 January 2008 (2008-01-30) paragraph [0022]; figure 2 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/IB2009/000392

Patent document cited in search report	A	Publication date	Patent family member(s)	Publication date
FR 2880659	A	14-07-2006	NONE	
US 7114431	B1	03-10-2006	FR 2887595 A1	29-12-2006
EP 1418121	A	12-05-2004	AT 375293 T	15-10-2007
			AU 2003293662 A1	07-06-2004
			DE 60316830 T2	10-07-2008
			WO 2004041639 A1	21-05-2004
			US 2006010769 A1	19-01-2006
DE 4124377	C1	17-12-1992	NONE	
EP 1882617	A	30-01-2008	DE 102006034726 A1	31-01-2008