(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
21 July 2005 (21.07.2005)

PCT

(10) International Publication Number
WO 2005/066902 A1

(51) International Patent Classification[7]: G07D 7/12, B07C 5/342

(21) International Application Number: PCT/AU2005/000016

(22) International Filing Date: 10 January 2005 (10.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004900118 9 January 2004 (09.01.2004) AU

(71) Applicant *(for all designated States except US)*: **SECURENCY PTY LIMITED** [AU/AU]; Hume Highway, Craigieburn, VIC 3084 (AU).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **POWER, Gary Fairless** [GB/AU]; 46 Drummond Street, Greenvale Victoria 3059 (AU). **SWIFT, Patrick** [IE/AU]; 68 Dunsford Street, Lancefield Victoria 3435 (AU). **CHUA, James Hock Hai** [AU/AU]; 39 Sugarloaf Crescent, Castlecrag NSW 2068 (AU). **NARDELLA, Anthony** [AU/AU]; 24 Whiteley Parade, Taylors Lakes Victoria 3038 (AU). **HENSON, Paul** [AU/AU]; 26 Dewvale Place, Craigieburn Victoria 3064 (AU).


(74) Agent: **WATERMARK PATENT & TRADEMARK ATTORNEYS**; 290 Burwood Road, Hawthorn, Victoria 3122 (AU).

(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR INSPECTION OF SECURITY ARTICLES

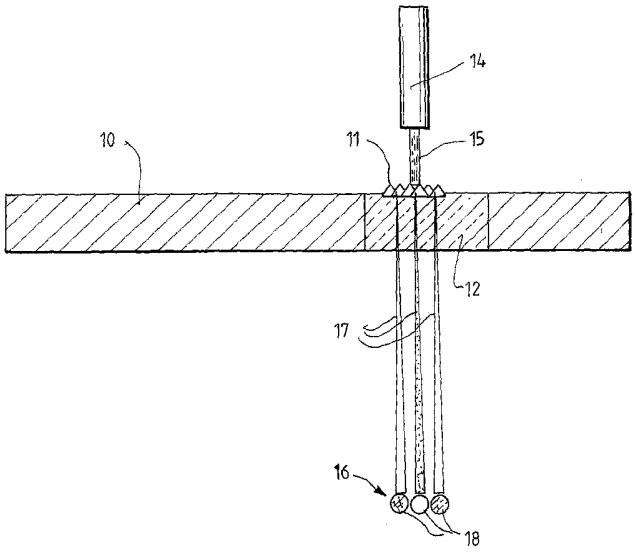

(57) Abstract: A method and apparatus for inspection of a security article (10) is provides in which a substantially collimated light beam (15) from a point light source (14) is directed onto a diffractive optical projection element (DOE) (11). The light beam is transformed by the DOE (11) into a patterned beam (17) which is reconstructed to form a projected image at a particular position in space remote from the surface of the security article (10). An optical detection device (16) is located at which the patterned beam (17) is reconstructed to detect the projected image. The inspection method and apparatus may be used in equipment for handling, sorting, counting or otherwise processing security articles, in particular security documents such as banknotes. The apparatus may include a processor for generating a signal when the absence or poor quality of a DOE is detected and which is used to isolate or mark the security article.

WO 2005/066902 A1

FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

METHOD AND APPARATUS FOR INSPECTION OF SECURITY ARTICLES

This invention relates to security articles, such as banknotes or other security documents, and is particularly concerned with providing a method and an apparatus for inspecting a security device or devices in one or more security articles.

As used herein, the term "security documents" includes documents and tokens such as identity documents, value documents or entrance documents, which in turn respectively include: passports, visas, identity cards, drivers licences, and security entrance cards, banknotes, shares, bonds, certificates, cheques, lottery tickets, bank cards, charge cards and credit cards, and aeroplane tickets, bus tickets, railroad tickets, and tickets to fun parks or specific rides. These security documents or tokens typically include some form of authenticity verification to guard against copying and fraudulent alteration. It will, however, be appreciated that this invention is applicable to other types of articles which require authentication and/or protection against copying or theft. Such articles, including security documents, are referred to broadly as "security articles" in this specification.

A wide variety of security devices have been proposed for use in security documents for verification of authenticity and to make counterfeiting of the documents difficult. Some types of security devices are low security devices, printed devices or embossings, which are relatively inexpensive to produce in security documents but which only provide a relatively low degree of security. Other types of security devices are high security devices, such as diffraction gratings or holograms. These can provide a higher degree of security because they are more difficult to counterfeit, but are more expensive to produce and so are generally used in higher value security documents, such as $50 or $100 banknotes, when high security devices are provided in banknotes, it is desirable to detect their presence and quality in the production process of the banknotes before the banknotes are issued to the public. It is also desirable to provide apparatus for inspecting a high security device in a single banknote.

WO 99/37488 discloses a security document and method in which a diffractive optical projection element is provided within a transparent portion or

window in the document, The diffractive optical projection element transforms a collimated beam of light, e.g. from a point light source or laser, into a patterned beam of a selected design. In the method of verifying the authenticity of the security document described in WO 99/37488, the patterned beam is projected onto a viewing surface, e.g. by folding the security document so that another part of the document laterally spaced from the window acts as the viewing surface. In another embodiment, the security document of WO 99/37488 may include a second transparent portion or window which can act as a pseudo point light source when the security document is folded.

In each embodiment described in WO 99/37488, the authenticity of the security document incorporating the diffractive optical projection element is verified visually by a person viewing the patterned beam when it impinges upon a viewing surface. However, this visual viewing method is not very suitable for inspecting the presence or quality of diffractive optical elements in banknotes or sheets of banknotes in equipment such as printing equipment, note sorting equipment or other equipment used in processing banknotes or the like.

According to one aspect of the invention, there is provided a method for inspection of at least one security article, wherein the security article incorporates a diffractive optical projection element as a security device, and wherein the method comprises the steps of:

directing a beam of light from a light source onto said diffractive optical projection element which transforms the beam into a patterned beam of light, that is reconstructed at a particular position in space to form a projected image; and

detecting the projected image with at least one optical detection device located at a position at which the patterned beam of light is reconstructed to form the projected image.

The "diffractive optical projection element" used in the invention is a diffractive microstructure which comprises an array of cells each designed to transform the phase of a coherent illuminating beam by a specified amount. The diffracted wavefronts transformed by the individual cells form a patterned beam of light and interfere in a particular reconstruction plane remote from the plane of the diffractive optical element thereby forming the projected image in the reconstruction plane. Therefore, the location of the optical detection device

substantially in the reconstruction plane of the diffractive optical projection element is important in the present invention. This requires knowledge of the particular diffractive optical projection element to be detected in order to set up the apparatus for inspection.

According to a second aspect of the invention, there is provided an apparatus for inspection of at least one security article incorporating a diffractive optical projection element as a security device, wherein the apparatus comprises:

a light source for directing a beam of light onto said diffractive optical projection element which transforms the beam into a patterned beam of light that is reconstructed at a particular position in space to form a projected image; and

at least one optical detection device located at the position at which the patterned beam of light is reconstructed to form the projected image.

The light source is preferably arranged to direct a substantially collimated beam of light onto the diffractive optical projection element. The light source is preferably a point light source, such as a light emitting diode (LED), a halogen light source or a laser (solid state or otherwise). It will, however, be appreciated that other types of point light sources may be used.

The optical detection device is preferably arranged to detect the amplitude of different parts of the patterned light beam forming the projected image. The optical detection device may comprise one or more photodiodes, e.g. an array of photodiodes, or a charge couple device (CCD), such as a line CCD or a matrix CCD.

In one preferred embodiment, the diffractive optical projection element is provided in a substantially transparent or translucent portion or window in a security document, the light source is positioned on one side of the security document and the optical detection device is positioned on the opposite side of the security document. Thus light passes through the diffractive optical projection element and the incident light beam is transformed into the patterned beam on the opposite side of the document and projected onto the optical detection device.

In an alternative embodiment, the diffractive optical projection element may overlie a reflective surface, such as a metallic layer or coating of the security article. In this case, the light source and the detection means may be provided on the same side of the security article with the optical detection device detecting a

reflected beam transformed by the diffractive optical projection element into the patterned beam and projected onto the detection means.

In accordance with the invention the apparatus may be incorporated into a wide variety of equipment for printing, sorting, counting, handling or otherwise processing security documents. For example, a light source and associated detection means may be provided for inspecting individual banknotes in a note counter or note sorter. The apparatus may include a plurality of optical detection devices, for instance when a sheet containing a plurality of banknotes each containing diffractive optical projection elements is required to be inspected, e.g. during the printing of a sheet of banknotes.

The apparatus preferably includes a processor for processing signals from the optical detection device.

According to a third aspect of the invention there is provided equipment for sorting, handling or otherwise processing security articles comprising inspection apparatus in accordance with the second aspect of the invention and article processing means for subsequently processing the security articles according to signals from the optical detection device. For example, if the detection device identifies a faulty security article, it may emit a signal rejecting the faulty article so that the article can be marked for rejection and/or rejected from the security article processing equipment.

According to a fourth aspect of the invention, there is provided equipment for sorting, handling, counting or otherwise processing security documents, the equipment including:

a detector for detecting the presence of a security document;

a window locator for locating a window in the security document incorporating a diffractive optical element;

a light source for directing a beam of light through said diffractive optical projection element in said window whereby the diffractive optical projection element produces a patterned beam of light which forms a projected image;

an optical detection device located at a position at which the patterned beam of light is reconstructed to form the projected image;

a processor for processing and analysing signals from the optical detection device; and

a document processing means for processing the security documents according to the signals from the optical detection device.

According to a fifth aspect of the invention, there is provided a method of processing or handling security articles comprising a method for inspection in accordance with the first aspect of the invention, wherein a signal is generated by the optical device when it detects the absence or poor quality of a diffractive optical projection element in a security article, and isolating or marking the security article.

In a further embodiment, a plurality of light sources may be provided for illuminating at least one diffractive optical projection element. Each of the light sources may cause a patterned beam to be diffracted at a slightly different point on the optical detection device, creating multiple signals on the same detector. By integrating these signals and sampling the signal over a period of time, it is possible to differentiate constructive diffraction produced by the diffractive optical projection element from a random or diffuse scattering of light, such as that caused by a scratch or a surface imperfection, or light transmitted through a standard diffraction grating or hologram. It is also envisaged that a moving light source which produces an incident light beam that scans across the diffractive optical projection element could be used to create multiple signals at the optical detector.

Preferred embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 is a schematic drawing of apparatus for inspecting a security document incorporating a diffractive optical projection element;

Figure 2 is a schematic drawing of apparatus for inspecting a modified security document;

Figure 3 is a block diagram of sorting equipment incorporating the inspection apparatus of Figure 1 or Figure 2; and

Figure 4 is a schematic flow chart of a method of sorting documents using the equipment of Figure 3.

Figure 1 shows apparatus for inspection of a security document 10 incorporating a diffractive optical projection element (DOE) 11 provided in a transparent portion or window 12 of the document 10. The apparatus comprises a

point light source 14 which directs an incident beam of substantially collimated light 15 onto the DOE 11, and detection means in the form of an optical detection device 16.

In one preferred embodiment, the security document 10 may be formed from an at least partially transparent substrate having one or more opacifying layers or coatings applied to at least one face of the substrate. The transparent portion or window 12 of the security document 10 may be formed by applying the opacifying layers or coatings to the substrate in such a manner that the substrate 12 is substantially free of opacifying layers or coatings in the region of the transparent portion or window 12. The transparent substrate may be formed from a transparent polymeric material, such as polyethylene (PE), polypropylene (PP) or polyethylene terephthalate (PET). In the case of a banknote, the substrate is preferably formed from at least one biaxially oriented polymeric film. The substrate may comprise a single film of polymeric material. Alternatively, the substrate may comprise a laminate of two or more layers of transparent biaxially oriented polymeric film.

It will, however, be appreciated that the present invention is equally applicable to security documents formed from paper or other partially or fully opaque material. In this case, an aperture may be formed in the paper or other material and a patch of transparent polymeric material inserted into or applied over the aperture to form the transparent portion or window 12.

The opacifying layers may comprise one or more of a variety of opacifying inks which can be used in the printing of banknotes or other security documents. For example, the layers of opacifying ink may comprise pigmented coatings comprising a pigment, such as titanium dioxide, dispersed within a binder or carrier of cross-linkable polymeric material.

The diffractive optical projection element 11 acts to transform the incident light beam 15 from the point light source 14 as the beam passes through the at least partially transparent portion 12 of the security document (the window created through the security document) into a patterned beam 17 of selected design. The diffractive optical projection element is of the type which acts to generate the patterned beam 17 by diffraction of the light beam 10. One example of such a device is a diffractive optical projection element or diffuser made by

Mems Optical, Inc. in accordance with WO 98/32590. Such devices are complicated surface micro relief structures similar to diffraction gratings. Whilst the optical transformation of the incident light beam 15 to the patterned beam 17 is based on the optical principle of diffraction, the mathematics of the structure of such devices is specifically designed in each case to produce a distinct optical transformation in order to produce a desired patterned image which is reconstructed at a particular point in space away from the security document 10, Each diffractive optical projection element 11 can be dependent on the wavelength of the light beam used.

The point light source 14 for producing the incident beam 15 may comprise an LED, a halogen light source, a laser or other light source for producing a beam of substantially collimated light which is directed on the DOE 11.

The optical detection device 16 is positioned at the particular point in space at which the patterned beam 17 forms the patterned image projected by the DOE 11.

The various points in space of the image projected by the DOE 11 are determined by the special focal coordinates created by a sinusoidal grating which constitutes the DOE 11 and the positions of the light source 14 and detector 16 relative to the DOE 11.

The presence of the patterned image projected by the DOE 11 is determined by the amplitude of the response of the detector 16 at particular points in space where the detector is located. For this purpose, the detector may comprise an array of photo-diodes 18, or a charge couple device (CCD) such as a line CCD or a matrix CCD.

Figure 2 shows a modified embodiment which is similar to Figure 1 and corresponding reference numerals have been applied to corresponding parts. The security document 20 in Figure 2 differs from that of Figure 1 in that the transparent portion or window 12 incorporates a reflective surface 21 underneath the diffractive optical projection element (DOE) 11. The reflective surface may be provided by a metallic layer 22 provided within the window 12 or by a metallised coating applied to a surface of the transparent portion forming the window 12 before the DOE 11 is applied over the reflective surface 21.

The apparatus of Figure 2 also differs from that of Figure 1 insofar as the point light source 24 and the optical detector 26 are located on the same side of the security document 20. The light source 24 is arranged to direct a substantially collimated incident beam 15 onto the window 12 at an acute angle to the perpendicular to the surface of the security document 20 so that the incident beam 15 is reflected back from the reflective surface 21 of the metallic layer 22 onto the DOE 11. The reflected beam passes through the DOE 11 and is transformed by the DOE 11 into a patterned beam 17 in similar manner to the embodiment of Figure 1.

The detector 26, which may also comprise an array of photo-diodes 18 or a line or matrix CCD, is disposed at a position relative to the security document 20 to receive the patterned beam 17 which also travels from the DOE 11 at an acute angle to the perpendicular to the surface of the security document 20 corresponding to the angle of the incident beam 16. Otherwise, the detector 26 functions in exactly the same manner as the detector of Figure 1 by determining the amplitude of different parts of the reconstructed projected image formed by the patterned beam 17 at particular points in space where the photo-diodes 18 are located.

In an alternative embodiment similar to Figure 2, the light source 24 is arranged to direct the substantially collimated incident beam at an acute angle onto the DOE 11 which transforms the beam into a patterned beam 17 that is reflected by the reflective surface 22 and projected onto the detector 26 located at the particular position in space where the projected image is reconstructed by the patterned beam 17. It is also possible that the DOE could be viewed in reflection without an underlying metallic surface using the reflectivity of the polymer surface.

Figures 3 and 4 illustrate sorting equipment and a method of sorting security documents utilizing the inspection apparatus of Figure 1 or Figure 2.

The sorting equipment of Figure 3 comprises an edge detector 30 for detecting the presence of a security document, such as a banknote, or a sheet of banknotes, a window locator 32 for locating a window 12 in a security document incorporating a DOE 11, an optical detector 16, 26 in the form of a CCD or photo-diode array for inspecting a patterned beam 17 from the DOE 11, a processor 34 for processing and analysing signals from the optical detector 16,

26, a barcode printer 36 and a document sorter 38 for sorting the security documents according to the signals from the optical detector 16, 26.

The method of operation of the sorting equipment of Figure 3 is illustrated by the flow chart of Figure 4. When a security document, e.g. a banknote, or a sheet of banknotes enters the sorting equipment, the edge detector 30 detects the presence of a banknote, or a sheet of notes, by detecting the edge of the note or sheet (Step 40). When the window locator 32 locates a window in the note or sheet (Step 42), e.g. by means of a time gated output from the processor 34, the light source (14, 24) and the CCD or photodiodes of the optical detector 16, 26 of the inspection apparatus are activated (Step 44).

The optical detector 16, 26 then performs its inspection of the security document and produces output signals that are input to the processor 34 which analyses the signals (Step 46). The processor 34 may comprise a process logic controller (PLC) or a microprocessor, such as a PIC chip, and can not only determine whether a DOE 11 is present in the window of the document, but can also determine the quality of the DOE by its inspection of the projected image formed by the patterned beam 17 from the DOE.

From its signal analysis, the processor (PLC) 34 determines whether or not the banknote should be accepted or rejected (Step 48), and outputs either an accept signal (Step 50) or a reject signal (Step 52). The output signals from the processor 34 are input to the barcode printer 36 which prints either an accept code (Step 54) or a reject code (Step 56) on the banknote or sheet of banknotes, The banknote or sheet of banknotes are then fed to the sorter 38 which sorts the documents (Step 58) by sending those marked with an accept code (54) to a delivery stack and by sending those marked with a reject code (56) to a reject stack.

The method and apparatus of the present invention therefore provides an efficient way of automatically inspecting security articles, such as banknotes, which incorporate diffractive optical projection elements (DOEs) as high security devices.

The inspection method and apparatus may be used in a wide variety of equipment, such as printing equipment, note counting or sorting equipment or any

other equipment used in the printing, handling or processing of security documents or other security articles.

It will be appreciated that various modifications and alterations may be made to the embodiments described above without departing from the cope and spirit of the present invention. For example, the inspection apparatus of Figures 1 or 2 may be used to inspect other types of security articles having either a DOE provided in a transparent portion or window or a DOE provided on a reflective surface of the security article, 20.

CLAIMS

1. An apparatus for inspection of at least one security article incorporating a diffractive optical projection element as a security device, wherein the apparatus comprises:

a light source for directing a beam of light onto said diffractive optical projection element which transforms the beam into a patterned beam of light that is reconstructed at a particular position in space to form a projected image; and

at least one optical detection device located at the position at which the patterned beam of light is reconstructed to form the projected image.

2. An apparatus according to claim 1 wherein the light source is arranged to direct a substantially collimated beam of light onto the diffractive optical projection element.

3. An apparatus according to either claim 1 or claim 2 wherein the light source is a point light source.

4. An apparatus according to claim 3 wherein the light source is any one of:

a light emitting diode (LED); or

a halogen light source; or

a laser.

5. An apparatus according to any one of claims 1 to 4 wherein the optical detection device is arranged to detect the amplitude of different parts of the patterned light beam forming the projected image.

6. An apparatus according to claim 5 wherein the optical detection device comprises one or more photodiodes.

7. An apparatus according to claim 5 wherein the optical detection device comprises a charge coupled device (CCD).

8. An apparatus according to any one of claims 1 to 7 wherein the diffractive optical projection element is provided in a substantially transparent or translucent portion or window in the security article, the light source is positioned on one side of a security article and the detection means is positioned on the opposite side of the security article such that the light passes through the diffractive optical projection element so that the incident beam is transformed into the patterned beam on the opposite side of the document and projected onto the optical detection device.

9. An apparatus according to any one of claims 1 to 7 wherein the diffractive optical projection element is provided on an underlying reflective surface, and the light source and optical detection device are positioned on the same side of the security article such that the optical detection device detects a reflected beam transformed by the diffractive optical projection element into the patterned beam and projected onto the optical detection device.

10. An apparatus according to any one of claims 1 to 9, wherein the apparatus is incorporated into at least one of:

printing equipment; or

counting equipment; or

handling equipment.

11. An apparatus according to any one of claims 1 to 10 wherein the apparatus includes a plurality of optical detection devices.

12. An apparatus according to any one of claims 1 to 11 wherein the apparatus includes a plurality of light sources for illuminating at least one diffractive optical projection element.

13. An apparatus according to claim 12 wherein each of the light sources causes a patterned beam to be diffracted at a slightly different point on the optical detection device, creating multiple signals at the optical detection device.

14. An apparatus according to any one of claims 1 to 11 wherein the light source is a moving light source which produces an incident light beam that scans across the diffractive optical projection element to create multiple signals at the optical detector.

15. An apparatus according to any one of the preceding claims, further including a processor for processing signals from the optical detection device.

16. An apparatus according to claim 15 wherein the processor analyses multiple signals to differentiate constructive diffraction produced by the diffractive optical element from a random or diffuse scattering of light.

17. A method for inspection of at least one security article, wherein the security article incorporates a diffractive optical projection element as a security device, and wherein the method comprises the steps of:

directing a beam of light from a light source onto said diffractive optical projection element which transforms the beam into a patterned beam of light that is reconstructed at a particular position in space to form a projected image; and

detecting the projected image with an optical detection device located at the position at which the patterned beam of light is reconstructed to form the projected image.

18. A method according to claim 17 wherein the step of directing a beam of light includes directing a substantially collimated beam of light onto the diffractive optical projection element.

19. A method according to claim 17 or claim 18 wherein the step of detecting the projected image includes detecting the amplitude of different parts of the patterned beam of light forming the projected image.

20. A method according to any one of claims 17 to 19 wherein the diffractive optical projection element is provided in a substantially transparent or translucent portion or window in the security document, the beam of light is directed from the light source onto the diffractive optical projection element from one side of a

security document and through the diffractive optical projection element and detecting the projected image on the opposite side of the security document.

21. A method according to any one of claims 17 to 19 wherein the diffractive optical projection element is provided on an underlying reflective surface, and the beam of light is directed and the projected image is detected from the same side of a security document.

22. A method according to claim 21 wherein the diffractive optical projection element is provided in a transparent window which has a reflective layer within the window, and the beam of light is directed at an acute angle to the surface of the window outside the diffractive optical projection element so that the beam of light reflected from the reflective layer passes through the diffractive optical projection element to the optical detection device.

23. A method according to any one of claims 17 to 21 wherein a plurality of beams of light are directed from a plurality of beams of light are directed from a plurality of light sources onto the diffractive optical projection element so that a plurality of patterned beams of light are produced and form multiple signals.

24. A method according to any one of claims 17 to 22 further including directing a beam of light from a moving light source such that the directed light beam scans across the diffractive optical projection element to create multiple signals at the optical detection device.

25. A method according to any of claims 17 to 24 further including the step of processing signals from the optical detection device.

26. A method according to claim 25 wherein the step of processing signals includes integrating and sampling multiple signals over a period of time to differentiate constructive diffraction produced by the diffractive optical elements from a random or diffuse scattering of light,

27. A method of processing or handling security articles comprising a method for inspection in accordance with any one of claims 17 to 26, wherein a signal is generated when the absence or poor quality of a diffractive optical projection element is detected in a security article.

28. A method of processing or handling security articles as claimed in claim 27 wherein the security article is isolated or marked when the signal is generated by the optical device.

29. Equipment for sorting, handling, counting or otherwise processing security documents, the equipment including:

a detector for detecting the presence of a security document;

a window locator for locating a window in the security document incorporating a diffractive optical element;

a light source for directing a beam of light through said diffractive optical projection element in said window whereby the diffractive optical projection element produces a patterned beam of light which forms a projected image;

an optical detection device located at a position at which the patterned beam of light is reconstructed to form the projected image;

a processor for processing and analysing signals from the optical detection device; and

a document processing means for processing the security documents according to the signals from the optical detection device.

30. Equipment according to claim 29 wherein the processor generates a rejection signal when the absence or poor quality of a diffractive optical projection element is detected by the optical detection device.

31. Equipment according to claim 29 or claim 30 wherein the processor comprises a process logic controller (PLC) or a microprocessor to determine the presence of a diffractive optical projection element in the window.

32. Equipment according to claim 31 wherein the PLC or the microprocessor determines the quality of the diffractive optical projection element by inspection of the projected image formed by the patterned beam.

33. Equipment according to claim 32 wherein the PLC or the microprocessor outputs an accept or reject signal based on the quality of the diffractive optical projection element.

34. Equipment according to any one of claims 29 to 33 further including a barcode printer.

35. Equipment according to claim 34 wherein the barcode printer prints either an accept or reject code on the security document in accordance with the output of the processor.

36. Equipment according to claim 34 wherein the document processing means processes the security documents in accordance with the code printed by the barcode printer.

37. Equipment according to any one of claims 29 to 36 wherein the detector for detecting the presence of a security document is an edge detector which detects the edge of a security document.

38. Equipment according to any one of claims 29 to 37 wherein the document processing means includes a document sorter.

39. Equipment according to any one of claims 29 to 37 wherein the document processing means includes a counter for counting security documents.

40. Equipment according to any one of claims 28 to 36 wherein the document processing means includes a document printer.

41. Equipment for sorting, handling or otherwise processing security articles, the equipment comprising:

inspection apparatus in accordance with any one of claims 1 to 15; and

article processing means for subsequently processing the security articles according to signals from the detection means.

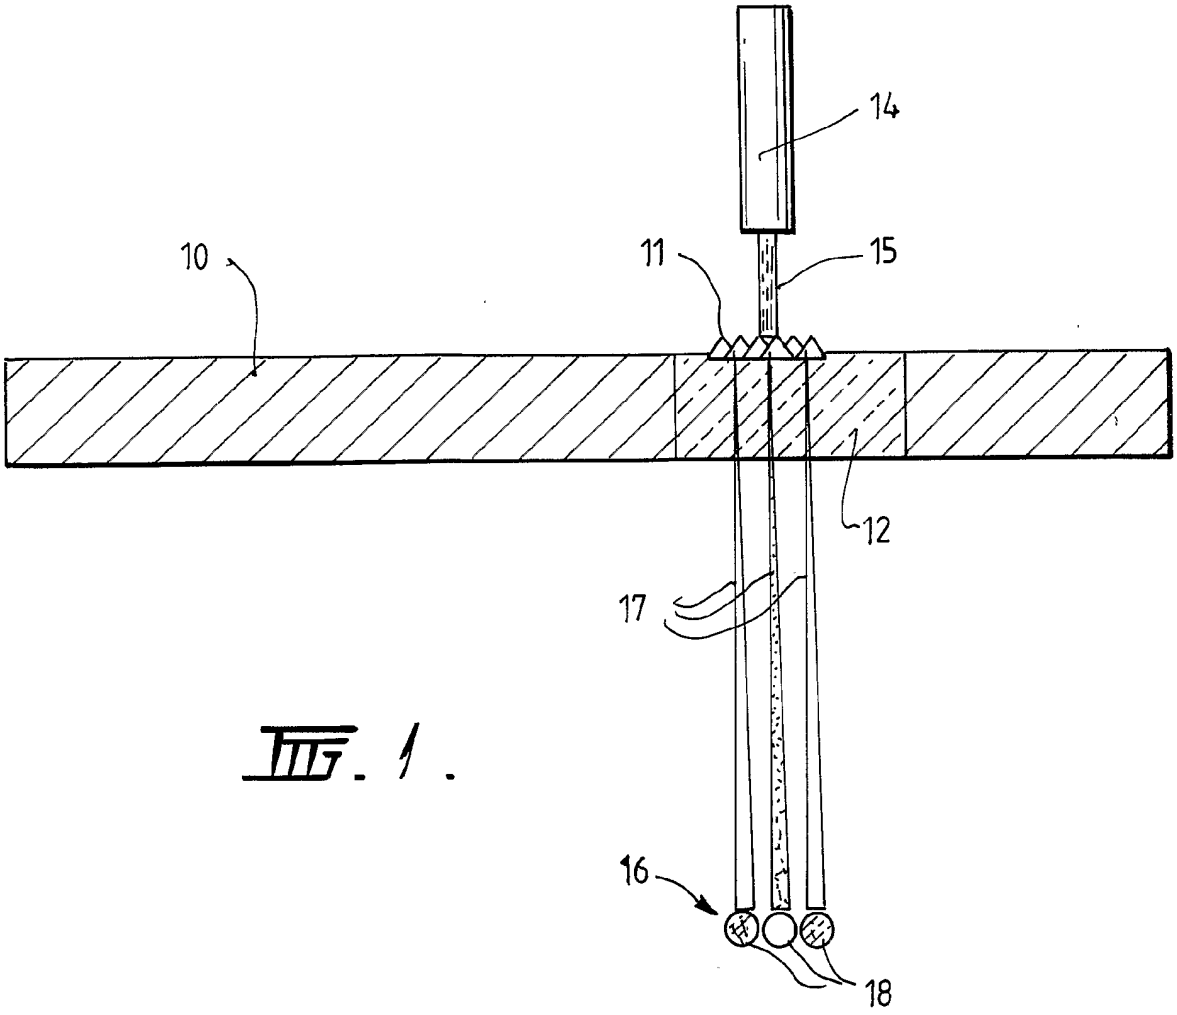


FIG. 1.

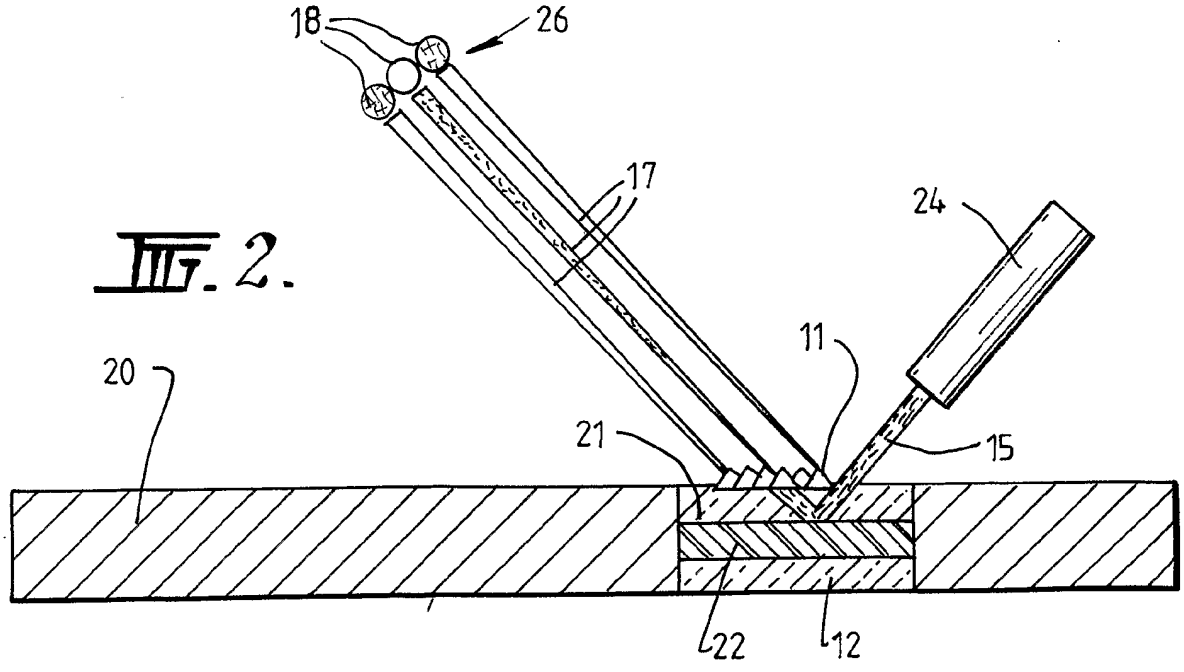


FIG. 2.

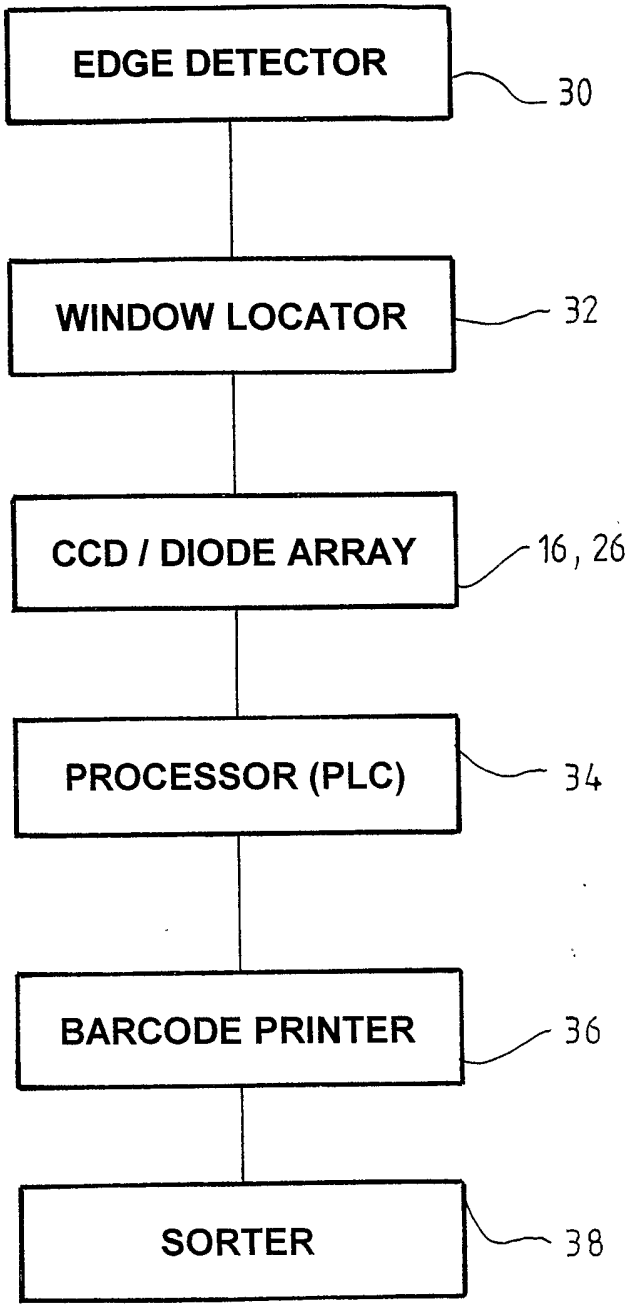

EDGE DETECTOR
30
WINDOW LOCATOR
32
CCD / DIODE ARRAY
16, 26
PROCESSOR (PLC)
34
BARCODE PRINTER
36
SORTER
38

FIG. 3.

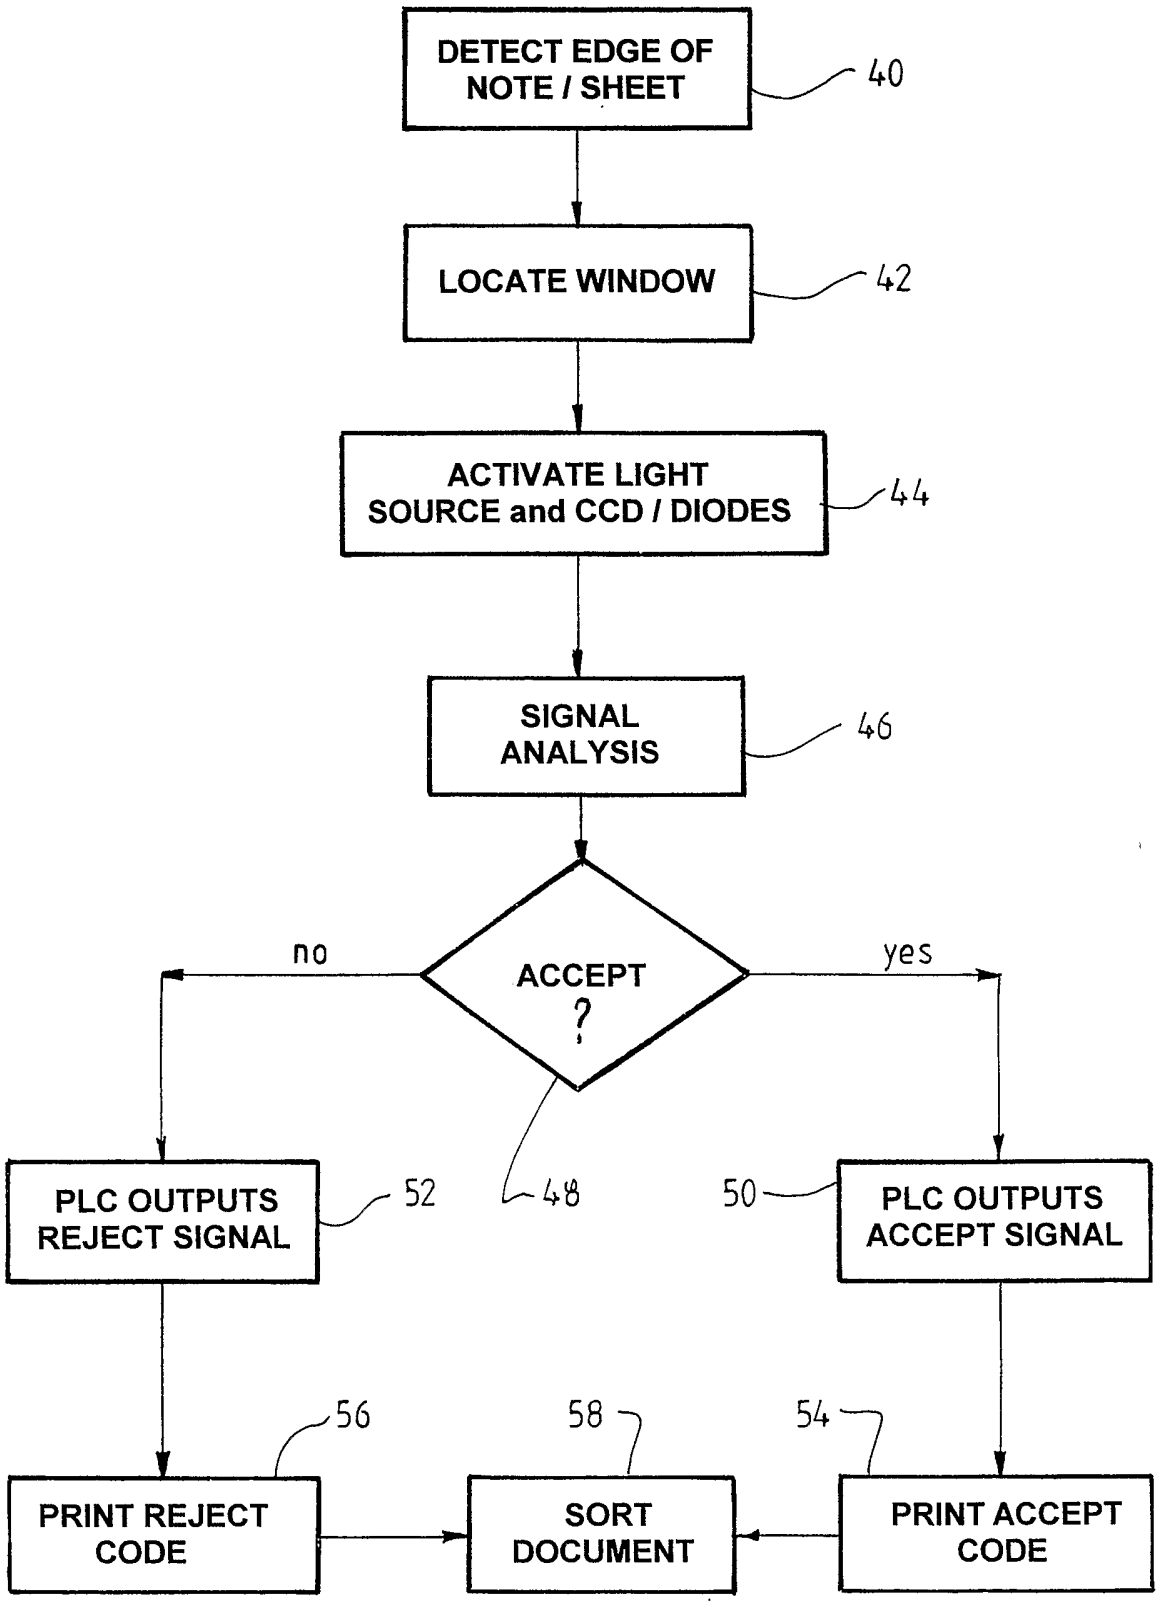

DETECT EDGE OF NOTE / SHEET
40
LOCATE WINDOW
42
ACTIVATE LIGHT SOURCE and CCD / DIODES
44
SIGNAL ANALYSIS
46
ACCEPT ?
no
yes
48
PLC OUTPUTS REJECT SIGNAL
52
50
PLC OUTPUTS ACCEPT SIGNAL
56
58
54
PRINT REJECT CODE
SORT DOCUMENT
PRINT ACCEPT CODE

FIG. 4.

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2005/000016

A. CLASSIFICATION OF SUBJECT MATTER

Int. Cl. [7]: G07D 7/12, B07C 5/342

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
DWPI: (security+, cheque?, ticket?, card?, note? etc), (hologra+, diffract+, DOE, interference pattern?), (project+, focal plane), (detect+, sens+, +read+, +recogni+, camera etc), (B44F-001/12, B41M-003/14, B42D-015/10, B42D-209:00, G06K-005/00, G06K-009/76, G06K-019/16, G07d-007/-), (authentic+, inspect+, valid+, forg+, etc), (sort+, reject+, accept+, count+ etc), (laser, point source, collimat+, coherent, beam,)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 1993/000224 A1 (LIGHT IMPRESSIONS EUROPE LIMITED) 7 January 1993 See the abstract	1-41
X	EP 1291199 A1 (KABUSHIKI KAISHA TOPCON) 12 March 2003 See the abstract	1-41
X	GB 2311130 A (OESTERREICHISCHE NATIONALBANK) 17 September 1997 See the abstract	1-8,10-20,23-41

[X] Further documents are listed in the continuation of Box C [X] See patent family annex

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
28 January 2005	4 FEB 2005

Name and mailing address of the ISA/AU

AUSTRALIAN PATENT OFFICE
PO BOX 200, WODEN ACT 2606, AUSTRALIA
E-mail address: pct@ipaustralia.gov.au
Facsimile No. (02) 6285 3929

Authorized officer

I.A.BARRETT

Telephone No : (02) 6283 2189

INTERNATIONAL SEARCH REPORT

International application No.
PCT/AU2005/000016

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 19926733 A1 (HSM HOLOGRAPHIC SYSTEMS MUNCHEN GmbH) 14 December 2000 See the abstract	1-41
X	DE 19542995 A1 (MATSCHKE et al) 22 May 1997 See the abstract	1-41

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/AU2005/000016

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report		Patent Family Member					
WO	9300224	AU	20210/92	EP	0591285	HK	1000936
		US	5623347				
EP	1291199	CA	2416720	JP	2002288604	US	2004016810
		WO	02076761				
GB	2311130	AT	35292	DE	19604856		
DE	19926733						
DE	19542995						

Due to data integration issues this family listing may not include 10 digit Australian applications filed since May 2001.

END OF ANNEX