

**(12) PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 200014040 B2
(10) Patent No. 769447

(54) Title
Volumetric physiological measuring system

(51)⁷ International Patent Classification(s)
A61B 005/113 **A61B 005/06**

(21) Application No: 200014040 (22) Application Date: 1999.10.28

(87) WIPO No: WO00/25675

(30) Priority Data

(31) Number	(32) Date	(33) Country
60/106282	1998.10.30	US
09/428358	1999.10.28	US

(43) Publication Date : 2000.05.22

(43) Publication Journal Date : 2000.07.20

(44) Accepted Journal Date : 2004.01.29

(71) Applicant(s)
Volusense AS

(72) Inventor(s)
Morten Eriksen; Erik Eriksen

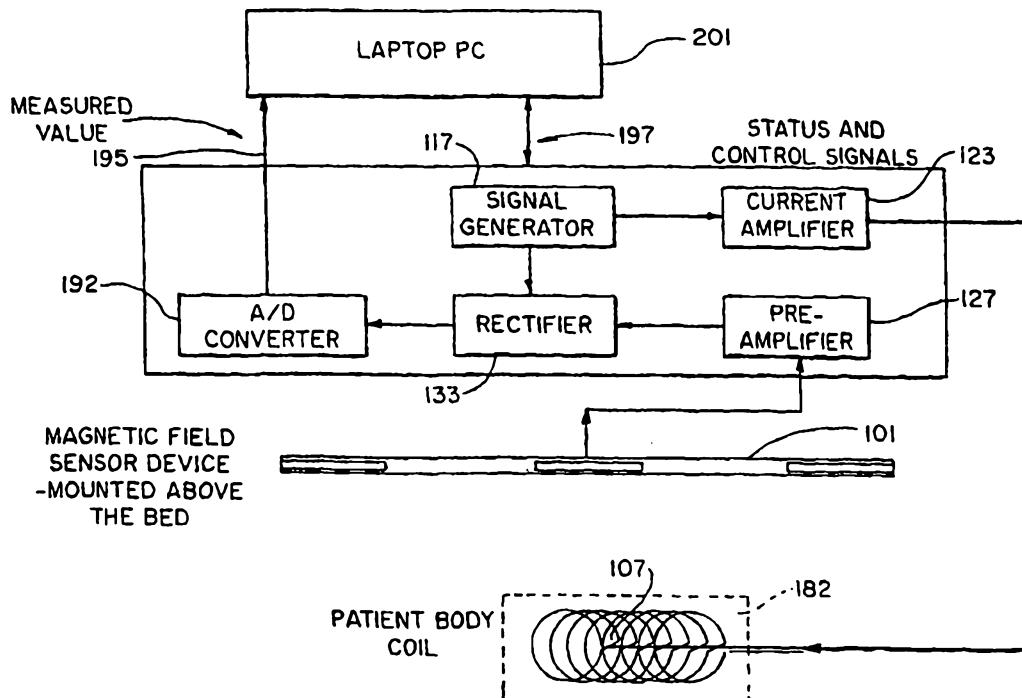
(74) Agent/Attorney
PHILLIPS ORMONDE and FITZPATRICK,367 Collins Street,MELBOURNE VIC 3000

(56) Related Art
GB 2116725
DE 4215901
WO 90/13259

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :	A1	(11) International Publication Number: WO 00/25675
A61B 5/113, 5/06		(43) International Publication Date: 11 May 2000 (11.05.00)
(21) International Application Number: PCT/IB99/01974		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
(22) International Filing Date: 28 October 1999 (28.10.99)		
(30) Priority Data:		
60/106,282 30 October 1998 (30.10.98) US		
09/428,358 28 October 1999 (28.10.99) US		
(71) Applicant: VOLUSENSE AS [NO/NO]; Kongsvinger Naeringspark, N-2200 Kongsvinger (NO).		
(72) Inventors: ERIKSEN, Morten; Krokliveien 34D, N-0587 Oslo (NO). ERIKSEN, Erik; Hoslegata 36, N-1356 Bekkestua (NO).		
(74) Agent: ONSAGERS AS; P.O.Box 265 Sentrum, N-0103 Oslo (NO).		
		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: VOLUMETRIC PHYSIOLOGICAL MEASURING SYSTEM



(57) Abstract

A system for measuring volumes and areas uses electromagnetic induction techniques. A current is generated and fed into one (107) of two coil assemblies to induce voltage into another coil assembly (101) to provide accurate values for volume, in particular within at least one portion of a mammal due to respiration.

VOLUMETRIC PHYSIOLOGICAL MEASURING SYSTEM

Field of the Invention

5 The invention relates to a system and method for accurate measurements of volume and area of objects, utilizing electromagnetic induction techniques.

Background of the Invention

Numerous opportunities exist in which accurate measurements of volume and area are essential, particularly of objects or portions of objects having variable 10 volumes or areas. For example, in the field of medicine, the recording of breathing volumes in patients is often quite critical. Unfortunately these measurements are often crude and inaccurate, or at best rely upon outmoded technical modalities or upon unreliable. The recording of breathing volumes in patients is currently either performed by connecting a volume flow-sensing device to a subject's airway (e.g. 15 by use of a spirometer or tachymeter) or by measuring the mechanical excursions of the chest and abdominal walls. For long-term monitoring purposes, the airway-based techniques are inappropriate since they interfere with normal breathing and are unpleasant for the patient. This is particularly relevant to children and certain 20 other patients. Although airway-based techniques are currently used in patients dependent on respiratory-assist devices there may be less intrusive and more reliable means of obtaining such data.

Similarly, techniques that rely on recordings of chest and abdominal wall movements are either strain gauge based (recording of changes in body circumference length), or based on elastic inductive electrical conductor loops 25 arranged around the chest and abdomen of the patient. Recordings of the inductance of the loops can then be used to estimate the magnitude of cross-sectional area variations of the chest and abdominal compartments. United States Patent No. 4,308,872 is an example of this self-inductance loop estimation technology. Such methods might be used for quantitative measurements of 30 respiratory volumes only after a calibration procedure where the patient breathes known air volumes with variable respiration movement distributions between the chest and abdominal compartments.

35 Currently, most devices for measurements of chest volume variations have shortcomings related to calibration, stability, accuracy or reliability. The methods are either based on measurements of circumference of the chest and abdomen (strain-gauge transducers), or on measurements of the electrical inductance of

conductor loops arranged around the chest and abdomen. The reason for using abdominal sensors is that the downward movement of the diaphragm during inspiration causes volume changes of both the chest and abdomen that have to be added to estimate the lung volume excursions. There is no fixed

5 ratio between the abdominal and chest volume variations. Indeed, the relative contributions to total volume variations might even vary as a consequence of respiratory effort, airway resistance or sleep state. Thus, independent calibrations of both measurement sites are necessary (when using known techniques) to estimate the actual volume variations caused by respiration.

10 The strain gauge or circumferential distance methods have no simple or reproducible relation between the measured variations and the volumes that are measured. This relation depends on assumptions about the relation between the area enclosed by the loop and the length of the loop that are valid only for a fixed geometry. Although some of the methods based on inductance may claim 15 that area is measured (i.e., it is assumed to be proportional to loop inductance), the assumption is only valid as long as the relative shape of the loop is conserved. Unfortunately, this is not the case for the cross-sectional area variations of the human chest or abdomen that are caused by respiration.

Common to all area-based methods is a considerable uncertainty in the 20 calculations of volume variations from the estimated area variations. One reason for this is that only point samples of the area (at the sites of the transducers) are measured. To relate area variations to volumes, some means of calibration is necessary. The calibration procedure depends highly upon patient cooperation to obtain coefficients for both chest and abdominal 25 measurement sites, and is virtually inapplicable to small children, patients with dyspnea (shortness of breath), and unconscious patients.

The discussion of the background to the invention herein is included to explain the context of the invention. This is not to be taken as an admission that any of the material referred to was published, known or part of the common 30 general knowledge in Australia as at the priority date of any of the claims.

This invention may provide novel systems and methods for volume and area measurements, based on electrical inductance, in ways which alleviate the shortcomings discussed above. The invention may not depend on patient cooperation for calibration and may be a true volume or area measurement

method that does not depend on assumptions about the relations between circumference, area and volume.

Summary of the Invention

5 A new family or class of devices may provide for recording of cross-sectional areas and volumes of objects, in particular portions of the human body. This may include static measurements as well as measurements of the smaller overlying variations in area and volume caused by respiratory and cardiac activity. The principle relies on measurement of electromagnetic 10 induction between one or more electrical conductor loops wrapped around a body part to be measured, and one or more remotely located electromagnetic coil arrangements. By proper design of the coils, the induced voltages that are measured will be proportional to the area or volume that is measured.

According to one aspect of the present invention there is provided a 15 system for measuring the changing area or volume of an object including:

a. conductive coil means adapted to be configured tightly about the various circumferences of at least one portion of the object;

b. fixed coil means adapted to be remotely located relative to the conductive coil means about the object;

20 c. current generating means capable of selectively providing alternating current to either one of the conductive coil means or the fixed coil means to create both an induced voltage and a homogeneous magnetic field in the coil means not receiving the alternating current which induced voltage changes over time with changes in the volume or area of the object; and

25 d. computational means for receiving a signal based on measurement of the induced voltages or measurement of the magnetic field generated by the current in the coil means and converting the signal to volume or area values.

According to a further aspect of the present invention there is provided a 30 method of measuring changing volume or area within at least one portion of an object, including the steps of:

a. configuring conductive coil means tightly about the various circumferences of at least one portion of the object;

b. positioning fixed coil means remotely to the object and to the conductive coil means so that an homogeneous magnetic field may be created around the conductive coil means if and when the fixed coil means are energized by an electrical current; and

5 c. generating an electrical current into either the conductive coil means or the fixed coil means to create an induced voltage signal in the other coil means, which induced voltage changes over time with changes in the volume or the area of the object and which creates an homogeneous magnetic field in the coil means not receiving current.

10 According to a still further aspect of the present invention there is provided a device for measuring changing area or volume of an object including

a. conductive coil means adapted to conform to the surface of the object;

15 b. means for creating time-varying magnetic fields at least large enough to surround the object, wherein such means are located remotely from the object;

c. voltage monitoring means connected to the conductive coil means, whereby motion of the surface creates a measurable change in induced voltage in the conductive coil means that correlates to the movement of the object wherein the voltage monitoring means is connected to a computing means suitable for performing a series of algorithmic steps to calculate the volume change of the object from the measured induced voltage.

20 In one embodiment, a device may be provided for measuring the movement of an object which comprises means for creating time-varying magnetic fields at least large enough to surround the object. Electrical circuits may be adapted to conform to the surface of the object, and voltage monitoring means may be connected to the electrical circuits, whereby motion of the surface creates a measurable change in induced voltage in the circuits that correlates to the movement of the object.

25 In another embodiment, a method may be provided for measuring the area or volume of an object which comprises the steps of adapting electrical circuits to conform to the object surface, and measuring the voltage induced in the circuits by a time-varying magnetic field surrounding the object, whereby the

change in the area or volume of the object may be calculated without calibration of the device to the individual.

Brief Description of the Drawings

5 Preferred embodiments of the present invention will now be described with reference to the accompanying drawings wherein:

Figure 1 is an arrangement of serially connected loops and a magnetic field vector.

10 Figure 2 is a block diagram of a first embodiment of the system of the invention.

Figure 3 is one embodiment of a transducer design for use as a coil means.

Figure 4 is a sample recording from the use of the system of Figure 2.

15 Figure 5 is a magnified view of the raw volume curve of Figure 4, demonstrating cardiac pulsations in volume.

Figure 6 is a schematic view of a second embodiment of the invention.

Figure 7 is a schematic view of a third embodiment of the invention.

Figure 8 is a schematic view of a fourth embodiment of the invention.

Figure 9 is a schematic view of a fifth embodiment of the invention.

20 Figure 10 is a schematic view of a sixth embodiment of the invention.

Figure 11 is a schematic view of a seventh embodiment of the invention.

Figure 12 is a screen view graph of simultaneous recordings using a spirometer and the system of the invention.

Figure 13 is a screen view graph of blood volume variations in the chest and abdomen caused by cardiac activity.

Figure 14 is a block diagram schematic view of one embodiment of the system of the invention.

5

Detailed Description of the Invention

By way of technical background, and in reference to Figure 1, it may be seen that the induced voltage in a closed electrical conductor loop 10 perpendicular to a homogeneous magnetic field that varies with time is:

10

$$\text{Eq. 1)} \quad U_{\text{loop}} = (dB/dt) A_{\text{loop}}$$

where B is the magnetic field strength, and A_{loop} is the area of the loop regardless of its shape and t is time.

15 Thus, when a homogeneous magnetic field with a known intensity and temporal variation and with a direction that is along a patient's body axis is generated, measurements of induced voltages in conductor loops wrapped around the patient's body will give accurate area measurements. In order to measure volume, it is necessary to add together the volumes of a stack of slices, each with a 20 measured area and a known thickness. This is readily accomplished by using several conductor loops wrapped around the patient's body. If the spacing between the loops is constant and known, then the volume to be measured (V_{body}) may be expressed as:

25 Eq. 2)
$$V_{\text{body}} = s \lim_{s \rightarrow 0} \sum A_{\text{loop}} = s (dt/dB) \lim_{s \rightarrow 0} \sum U_{\text{loop}}$$

where s is the spacing between the loops.

30 Summation of the induced voltages is accomplished by electrical serial connection of the loops, effectively reducing the complexity of the system, since only one voltage needs to be measured. This is an important advantage of the invention disclosed herein resulting in reduced system complexity. The choice of the loop spacing s (also referred interchangeably herein as distance d) is a 35 compromise between accuracy and convenience in the design of the volume transducer. A low value of s means that a higher number of loops will be needed to encompass the measurement region, which typically is from the level of the

axilla and down to the crest of the hips, when measuring a torso. If the number of loops becomes high, the self-inductance of the serially connected loops starts to increase dramatically, with implications for the design of the electronic circuits. A preferable embodiment is to use values of s in the range of four to eight cm, which are the smallest values to be used for infants. This typically results in eight (8) to ten (10) loops. Other configurations, however, are possible. The magnetic field need only be homogeneous within the volume occupied by the relevant parts of the patient's body or other object being measured. Practical experience indicates that a field of sufficient intensity and homogeneity can be generated just by arranging a conductor wire as a vertical rectangular loop, following the floor, walls and ceiling of the room, and feeding an alternating current through the loop. Preferable values are 10kHz to 200 kHz with currents below 1 A, although other configurations are possible. For example, more than one electrical conductor loop may be used.

Figures 2-8 relate to a first embodiment of this invention discussed below. This embodiment, shown in block diagram form in Figure 2, comprises integrating both the alternating current source for the current loop that generates the magnetic field and the circuits needed to amplify and rectify the returned signal into a single unit. Stable crystal oscillator 30 controls system 20, with the output frequency of the oscillator being divided down to the desired value by binary counter 34. The suggested values of 1 MHz and a division of 16 are arbitrary. It is, however, an advantage that the signal fed into the power amplifier 36 is a symmetric square wave, since this waveform lacks even frequency harmonics. The removal of unwanted harmonic frequency components by filter 37 is then easier. Such removal of harmonics is preferable to avoid radiation interference with other electronic equipment. The amplifier output will eventually be fed into an inductive load that absorbs almost no energy. By using a (class D) switching amplifier design, and by proper design of the low-pass filter, the total power consumption of the amplifier unit can be minimized, reducing the demands for circuit cooling and for power supply capacity. The low-pass filter 37 would likely be a passive one, and would not introduce substantial phase-shifts to the voltage waveform at the frequency used. The signal picked up by the serially-connected loops, which in one embodiment are wrapped around a patient as shown and described below in relation to Figure 6, is first fed into band pass filter 44. The purpose of this filter is to increase the system noise immunity. The filter can be designed as a narrow-band resonant transformer, effectively implementing

galvanic separation of the conductive wires close to the patient and the rest of the apparatus.

5 Pre-amplifier 48 is useful since the noise performance of the amplifiers is better than that of demodulator 53. The gain of the amplifier need not be more than necessary to suppress the noise of the demodulator, with a typical value of about 20 to 25 dB.

10 The coherent demodulator 53 rectifies the alternating voltage signal, and is easily implemented by CMOS analog switches, such as the CD4016 or CD4066 circuit. Using a coherent demodulator has two advantages. It is very linear over a broad signal intensity range, and together with low-pass filter 58, a substantial improvement in relation to noise suppression is achieved. The effective bandwidth of the amplifier chain will be twice the cut-off frequency of low-pass filter 58, with one example of a typical value of this cut-off frequency being 5Hz to 15 Hz, with the highest value suited for infants with a higher natural respiration 15 rate.

20 The signal-conditioning block 63 serves several purposes. It provides amplification of the signal, making it suited for further processing in a computer-based system. Also, the unit provides some means of coarse adjustment of the amplification, preferably controlled by the analyzing software. Since the signal at 25 the output of the low-pass filter 58 contains a substantial DC or constant component (corresponding to the total volume of the body inside the coils), some means of subtracting this component will increase the sensitivity of the system in detecting small volume changes. Such subtraction can be made with an electronic high-pass filter, the cut-off frequency of which must be substantially below common respiration frequencies (0.05 Hz or below). In order to shorten the time 30 for the output signal to stabilize at start-up of the system, a means of shortening the time constant of this filter (by resistor switching) is desired. In some cases, where slow changes not related to respiration are measured, absolute readouts of volume without any zero subtraction might be desired. Applications of this might be monitoring of edema development, vascular volume reflexes, muscle growth or atrophy, effects of surgical procedures, etc.

35 The electronic circuits described above are easily constructed within less than 50 cm² of circuit board area, and could be integrated with an A/D converter and interface control circuitry on a plug-in board for an ordinary personal computer, for example as shown in Figure 14 below. A complete stand-alone unit could also be made, with the size and complexity being dependent on the amount of signal analysis, presentation capability and storage capacity built into the unit.

It should be emphasized that the above illustrative description is for only one embodiment of the invention, with numerous alternate means of practicing the underlying technology also being within the scope of the appended claims. Parts of the function of the suggested block diagram in Figure 2 could be implemented using digital signal processing or other means. At least one alternate construction is to let all processing of the received signal be digital from and including demodulator 53 with a sampling rate of exactly twice the loop current frequency.

The transducers containing the current loops can be made with varying materials, such as copper or similarly conductive metalization, as well as other designs. For example, one design of elastic electrical conductors might integrate a spring component with the electrical conductor. Also, ease and costs of manufacturing are important. Another solution is to develop a disposable unit, based on metallized plastic bands as the conductor elements. Since the induced voltages are very low (in the order of a few millivolts), and the impedances are low (unless the number of loops becomes high), there may be no need to use insulated conductors. Indeed, the magnetic field generated by a room coil is weaker than that generated by the deflection magnets in a television set. Prolonged exposure to such fields is generally deemed to be harmless. Since a pick-up conductor coil wrapped around the patient can be galvanically separated from the rest of the equipment (as is already done in most other electrical equipment used for patient monitoring), there will not be any electrical shock hazards either.

One embodiment for the design of a disposable transducer is shown in Figure 3. Strips of metallized foils 72 and plain plastic foils 74, possibly one cm wide, are made into a meshwork by welding at the cross sections. Alternatively, the whole assembly can be stamped from a sheet of foil with metallized bands on it. The thickness of the foil is selected so that the zig-zagged strips have a suitable elasticity. A rectangular sheet of such meshwork is wrapped around the patient or subject, with a skew, so that the conductor strips are turned into a helix. The seam must provide electrical conducting, either by using some sort of clips, or simply by twisting the pairs of strips together. A cable may be connected to the recording apparatus. It is recognized that other devices may be used to arrange the coil configurations around the object to be measured, for example, as will be discussed below.

One embodiment of the system according to Figure 2, with some minor modification, was tested using the following parameters:

Current frequency: 70 KHz

Loop current: 200 mA (a 4-turn loop was used, thus the effective current was 800 mA)

Loop size: 2 x 2 meters

5 Magnetic field strength in patient body: $\approx 2 \mu \text{ T}$

Incremental volume sensitivity (system noise level): 1 ml

10 This embodiment deviates somewhat from the suggested diagram in Figure 2. A free-running RC-oscillator was used as the frequency control element, and the low-pass filter between the power amplifier and the room loop was omitted. More strict conformance with the block diagram in Figure 2 will probably result in even better performance, especially with regard to the noise level.

15 A sample recording from the use of this embodiment is shown in Figure 4. The volume waveform 81 can be used to calculate breath-by-breath tidal volumes in liters 77 by considering the amplitude of the waveform. Ventilation in liters per second 75 can be found by dividing the tidal volume by the duration of the individual cycle. The instantaneous frequency of respiration (not display) can be found by inverting the duration of the cycles. By careful inspection, variations are observed in the volume that occur in synchrony with the heart rate, and which 20 probably reflect variations in thoracic and abdominal blood volume caused by the beating action of the heart. A magnified view of the raw volume curve 81 in Figure 4 (from 61 to 64 seconds on the time axis) is shown in Figure 5 to demonstrate cardiac pulsations in volume. These pulsations are, however, far smaller than the expected cardiac stroke volume of the subject, and reflect the net 25 volume variations of summed abdominal and thoracic blood volume, which might be related to the fraction of the cardiac stroke volume that is diverted to the limbs and brain. Clearly, this provides a valuable diagnostic indication by analysis of this waveform, which may be used for monitoring and assessment of patients with heart failure, shunts or valvular disease. The waveform can easily be extracted 30 from the underlying respiratory variations by coherent averaging, possibly using the patient's ECG as a timing reference. Volume minima coinciding with cardiac end-systole are indicated with arrow markers Ces. Thus, an apparatus combining respiratory and cardiac monitoring is disclosed. The curve trace of Figure 5 also demonstrates the noise level of the system which, when translated to measured 35 volume, is in the order of one ml RMS or standard deviation.

As noted above, a typical use of the invention is to continuously measure the volume or area of the chest and abdomen of a human patient. This volume or area will show variations in synchrony with the movements of breathing. These variations correspond to the changes in the volume of gas contained in the lungs, 5 since all fluids and tissues present in the measured volume are incompressible. It is essential also to include the abdomen in the measurement, since breathing action also comprises up and down contraction of the diaphragm muscle, which again causes inward and outward motion of the abdominal walls. Analysis of the time course of volume variations may be used for estimating the quantitative amount of 10 breathing, and a plurality of variables describing the breathing pattern, such as frequency, depth of breath (tidal volume) and airway flow are also discernible.

It should be noted that this invention occurred due to the recognition of the shortcomings of the previously known technology for measuring volumes and areas of objects having an outer material within which an inner volume may 15 change. In addition to human torso and limbs, this invention is well suited for use in the industrial applications of various types, such as where internal volumes may be fuel containers, propellants, or other materials having variable volumes or areas. Regardless of the application, the inventors have recognized the value of the fact that the induced voltage in a conductor loop by a homogeneous alternating 20 magnetic field is exactly proportional to the loop area, independent of the loop shape. The induced voltage in such loops will be added together when the loops are connected in series, for example as when the voltages from individual battery cells are added in everyday electrical equipment. This provides the basis for the 25 measurements of volumes by a single voltage reading from a stack of loops with equidistant spacings.

In addition to greater accuracy of this system and method of obtaining 30 measurements, this technique is also important due to its speed. In particular, the system of the invention does not need to be calibrated to each patient. Rather, volume and area measurements may be accurately taken regardless of the shape or variation pattern of the object/patient provided that the conductive coil follows the contours of the object's/patient's surface contours. For example, in one embodiment, a patient may be equipped with a tightly fitting elastic shirt or garment. This shirt has embedded electrical conductors that comprise a plurality of closed circumferential loops that closely follow the body contours. 35 Electromagnetic induction between this body coil and another remotely located fixed coil is then measured. This may be done by feeding an alternating electrical current (with frequency in the range of about 10 kHz - 200 kHz) through either

coil, and measuring the induced voltage in the other coil. It is important to note that magnetic fields that are used in the invention are not affected or modified by the presence of body tissue, so the physical laws describing electromagnetic phenomena in void spaces are still valid.

5 In one embodiment of the invention, a passive use of the patient coil is used, for example as will be later discussed in relation to Figure 6. In that embodiment the room coil 101 is generating the magnetic field rather than in a "reversed" arrangement where the patient coil is energized instead of the remote or room coil. Such a reversed arrangement will be further described below in relation
10 to Figure 7. The first embodiment mentioned above comprised a large (a few meters or more) electrical conductor loop mounted along a building structure such as a wall, floor, or ceiling in order not to be obstructive. However, another embodiment of this coil is possible and consists of a plurality, such as three, carefully positioned and matched small coils, as shown in Figure 8. These coils
15 will together generate the same type of magnetic field as a large coil would do at the patient measurement site. These embodiments for coil assemblies can be used instead of a bulkier room coil either as a magnetic field generator, or as a magnetic field sensor in the reversed coil arrangement. When the design of the overall system uses this coil configuration as a sensor, it may be possible to use non-
20 inductive technology, such as point sensors or magnetometers, or the like. In the embodiment of Figure 7, instead of generating the magnetic field with the room coil, the patient coil is energized and used for generating a magnetic field whose properties depend on the volume or area to be measured; while the room coil or three-coil assembly mentioned above is used for picking up an induced voltage
25 caused by the field. By proper design of the electronic circuits that energize the patient coil (constant current amplifiers), the desired linear area or volume dependency of the induced voltage will be preserved.

Another refinement of the system allows simultaneous measurement of two portions of an object, such as a plurality of patient volume compartments, 30 typically the chest and abdomen. This gives supplementary information about the distribution of muscular effort in breathing, and provides information relevant for diagnosis of infant pulmonary diseases, especially diseases associated with airways obstruction. Adding the two measured volumes will still give the total volume measurement advantages of the other embodiments. In order to perform 35 simultaneous measurements, the patient coil is divided in two halves by an electrical "tap" connection at the center turn, as shown in Figure 10.

Thus what has been provided by this invention is measurement of the area of an electrical conductor loop by recording of the induced voltage in the loop when the loop is positioned in a homogeneous magnetic field. The magnetic field must be alternating, such as a field generated by an alternating electrical current.

5 The area of the loop is, according to physical laws, proportional to the induced voltage. Also, the invention enables measurement of the sum of areas of multiple conductor loops by recording the induced voltage either individually, or as a single measurement when they are electrically connected in series. Measurement of the amount of volume contained inside a plurality of equidistantly stacked conductor

10 loops, by measuring their summed area and multiplying this measured area with the distance between the loops to obtain volume, is also disclosed. The use of these techniques to measure cross sectional areas or volumes of parts of animal or human bodies, using a system of one or more elastic and compliant conductor loops tightly wrapped around the body part, is quite advantageous. Further

15 benefits are taught by the systems and methods herein for achieving accurate measurements of variations in the volume of an animal or human body with the above techniques in order to record breathing, and measurements of variations in the volume of an animal or human body with the above techniques in order to record volume variations caused by cardiac activity. Additional embodiments of

20 the invention are disclosed which provide the further advantages of reversal of electrical coil connections; more compact design for the room coil, comprising two or more smaller coils with optimized shapes and positions; an arrangement comprising three small rod-like coils wound on ferrite cores arranged along a straight line, with optimized positions and signal intensity weighting to generate a

25 homogeneous magnetic field or sensing volume encompassing the patients body or body parts; and simultaneous measurement of two or more areas or volumes by phase, frequency or time multiplexing, using any of the techniques above.

The inventors have determined that implementation of the following embodiments require adherence to several principles. First, the electrical conductor coils that are wrapped around the body part or object to be measured must follow the body/object surface contours, even when these contours change shape. Thus the coil assembly must be elastic and deformable. Second, for measurements of volume, the coils that are wrapped around the body/object part must be stacked with a known spacing between each loop. Coil loops stacked with a constant spacing might be connected in series electrically in order to sum up their voltages and thus to ease volume calculations. Third, the remote coil or coils must, when energized by an electrical current, generate a magnetic field that is

reasonably homogeneous (of equal magnetic field strength) at the location of the body part to be measured. Only the vector component of the magnetic field that is perpendicular to the coils that are wrapped around the body needs to be considered regarding this homogeneity. It is further desirable that the remote coils must be able to record the field from a point-sized magnetic dipole located inside the volume to be measured (i.e. the patients body) with a sensitivity that is independent of the location of the dipole, as long as the dipole is oriented perpendicular to the patient body coil loops. It is further desirable to use the remote coil or coils to generate a magnetic field (by feeding an alternating electrical current through them), and then recording the induced electrical voltages in the coils wrapped around the body part to be measured. The voltage will be proportional to the area or volume enclosed by the coils. The remote coil or coils might be arranged in a manner that meets the homogeneity criterion noted above. Finally, it is desirable to feed an alternating current through the stacked coils wrapped around the body part to be measured and then to measure the magnetic field generated by this current. This can be done by recording the induced voltages in the remotely located coil or coils. The voltage will be accurately proportional to the area or volume enclosed by the patient body coils. During these measurements it is essential to keep the current in the patient coil constant even if the self-inductance of this coil varies due to dynamic variations in shape. Thus, a constant-current circuit, or equivalent means, must be used for energizing the patient coil. The design of such a circuit is trivial for those skilled in the art.

Several embodiments of the system and methods of the invention are disclosed in Figures 6-11. In Figure 6, an arrangement is shown in which a conductive coil means 107 is configured tightly about the various circumferences of a torso portion of a human 110. Fixed coil means is remotely located relative to the conductive coil means about the human. Current generating means is provided and generally shown as signal generator 117 and power amplifier 123 to create an induced voltage in the conductive coil means which changes over time due to the respiration of the human 110. The induced voltage in the conductive coil means is then amplified by amplifier means 127, and rectified by rectifier means 133, and provided as a volume output that is used for measurement of area or volume. The system and method embodiment of Figure 7 is similar to those of Figure 6 except that in Figure 7 the conductive coil means 107 is energized by a constant current, and the induced voltage in the fixed coil means or room coil is used for measurement of area or volume. As noted above, a constant current amplifier means 136, or equivalent circuit component, is provided in this embodiment.

Figures 8 and 9 illustrate the use of a more compact three-coil system design for the fixed coil means instead of the large room coil configuration of earlier embodiments. The individual coils 144 might be serially connected as shown in Figures 8 and 9, or they might also be connected in parallel if this is considered during their design. Alternatively, magnetic field sensing devices not based on electromagnetic induction could be used, such as sensors based on the well known Hall effect. Arrangement of a plurality of small coils above the object being measured is designed to generate a homogeneous magnetic field. The coils are typically wound on ferrite rod cores and each coil will then generate a magnetic field pattern similar to that of a magnetic dipole. The positions and number of turns of the coil loops are optimized to satisfy the homogeneity criterion noted above. The serial connection assures identical currents in all three coils. The individual field strength contributions of the coils might be set by their number of loops, physical dimensions or magnetic core material permeability. One example of a three-coil system includes a small cylindrical coil, having about a 10 cm length and 1 cm in diameter. This will generate a magnetic field that closely resembles that of two opposite magnetic monopoles at the two coil ends. The field can be strengthened substantially by inserting a rod made of a material with high magnetic permeability into the coil. A suitable material is ferrite, which is similar to the core material in electronic high-frequency transformers. The remote magnetic field from such a device is close to that of an ideal magnetic dipole, which can be described in exact mathematical terms. The process of finding an optimized design for a homogeneous field is initiated by deciding a set of physical constraints, such as the desired shape and extension of the spatial volume where a homogeneous field is desired, and the space into which a given number of such coils are to be positioned. A set of parameters or degrees of freedom must also be defined, with typical parameters being coordinates for the position and angular orientation of the individual coils, and the strength of the field generated by the individual coils. A general numeric error minimization routine such as the Levenberg-Marquardt method is then used to adjust the parameters to find a solution to the problem where the field homogeneity is maximized. The three-coil design described herein has been developed with this method.

Systems according to these embodiments also comprise sensing and control means for controlling operation of the system. Timing and multiplex switching means may also be included for providing simultaneous measurement capabilities of multiple portions of the object being measured, for example a thoracic region and an abdominal region, or perhaps a plurality of limbs. One of the methods of

performing a plurality of simultaneous volume or area measurements is to use phase encoding of the signals. The scheme can be adapted to systems where the patient coil is energized, and the room coil is used for sensing the field, as shown in Figure 10. The two constant current amplifiers 136 are driven by signals that are phase shifted 90° at phase shift means 158 with respect to each other. The patient coil or conductive coil means 107 is equipped with a center-tap connection means, so that the two halves can be energized by independent currents. The two demodulators 169 rectify the signal that has been picked up by the three room coils 144 and amplified. Since the demodulators receive reference signals that are phase-shifted in the same manner as the inputs to the current amplifiers, they will respond to signal components that match the phase of the two patient coil signals. The apparent swap of output signals (the demodulator that receives the same phase as the abdomen coil current gives an output that reflects chest volume) is caused by an inherent 90° phase shift of the induced voltage in the sensing room coils compared to the current-dependent magnetic field strength from the patient coils. It is recognized that various techniques might be used to perform simultaneous measurements of two or more volumes or areas. If the room coil generates the magnetic field, then independent signal processing chains consisting of amplifiers and rectifiers as shown in other figures can be connected to any number of coils wrapped around the patient's body. For the coil arrangement indicated in Figure 10, the different patient coils 107 might be driven with currents of different frequencies, and electronic band-pass filters might be used to extract the individual volume signals from a common room coil and pre-amplifier. Time multiplexing might also be used, energizing the patient coils in a rapidly repeating sequence, typically cycling through all coils between 10 and 1000 times per second, and sampling a common volume output signal in synchrony with this sequence to separate the volume measurements from each other. An additional potentially useful technique for simultaneous measurements of several volumes might be to use different, non-correlated pseudo-random bit sequences for generating patterns of current variation in two or more patient coils. The voltage picked up by the room coil is amplified, and the individual volume signals are recovered by demodulating the composite signal using the corresponding bit sequences as reference signals. Due to the encrypted nature of pseudo-random bit sequences, this type of instrument is expected to be very immune against electromagnetic interference noise, and instruments located close to each other will not interfere with each other's operation.

5 A measurement system as described above, with any of the disclosed room coil designs or electrical connection arrangements needs to be initially calibrated but not calibrated at every patient or object measurement session. This calibration will compensate for variations in: the current used for generating the magnetic field, the exact geometrical arrangement of the room coil with respect to the patient's position, and the gain of the electronic amplifier and characteristics of the rectifier circuit calibration is performed by connecting a reference coil instead of the patient coil, and positioning this reference coil in the same position as the patient's body will be later during measurements. The summed cross-sectional 10 area of the loops of the reference coil are known from the geometry and number of turns of this coil. Typically, this area should be of the same order of magnitude as the area of the patient coil. A constant, k_c , is then calculated as:

15 Eq. 3) $k_c = a_c / U_c$

where a_c is the area of the reference coil, and U_c is the voltage reading of the volume output signal.

20 For measurements of area, using a single conductor loop wrapped around the relevant body part, the area A can be calculated as:

25 Eq. 4) $A = U \cdot k_c$ - where U is the measured voltage.

During volume measurements, using serially connected equidistantly spaced loops the instantaneous volume V is calculated from the voltage reading U as:

25 Eq. 5) $V = U \cdot d \cdot k_c$ - where d is the spacing between the loops of the patient coil.

Example 1

30 A circular electrical conductor loop with a radius of 1.5 meters was placed on the floor. An alternating current of 0.1 A with a frequency of 100 kHz was fed through the conductor from a signal generator. A small, 10 x 10 cm (100 cm²) square conductor loop was connected to the input of a broadband signal amplifier with a gain of 40 dB, and the output from this amplifier was passed through a 35 narrow 100 kHz band-pass filter with no gain. The output signal from the filter was presented on an oscilloscope screen, where voltages could be read by cursors.

When the small loop was positioned flat on the floor in the center of the larger current loop, a voltage of 5 mV p/p was measured. This voltage remained essentially constant when the small loop was elevated 50 cm above the floor, and it also remained constant when the small loop was moved up to 50 cm in any 5 horizontal direction away from the center of the large current loop. Another square loop, measuring 14.1 x 14.1 cm, with an area of 200 cm² was then connected instead of the 10 x 10 cm loop. The voltage reading was now 10 mV.

Example 2

10 The same conductor loops as described in Example 1 were used, but the 0.1 A current from the signal generator was fed to the 100 cm² loop, and the large loop on the floor was connected to the input of the 40 dB broadband amplifier. The small loop was positioned as explained in Example 1. The same general 15 relations between induced voltage and loop position and area was observed as in Example 1, however the voltages were reduced to 250 μ V when using the 100 cm² loop, and 500 μ V when using the 200 cm² loop.

Example 3

20 Referring to Figure 11, three identical cylindrical ferrite rods 175 with a diameter of 8 mm, length of 150 mm and permeability of 100 were arranged along a straight horizontal line with a common axis. The end-to-end horizontal spacing between each rod was 50 cm. The two outer coils were equipped with 163 turns of lacquer-insulated 0.1 mm copper wire evenly distributed along a central 8 cm 25 segment of the rod, while the center rod had 100 turns arranged in the same manner. The coils were electrically connected in series, and care was taken to assure identical current directions in all coils. The serially connected coils were then tuned to parallel resonance at 100 kHz with a common capacitor 177 of about 10 nF. An oscilloscope directly monitored the signal from the resonant circuit. A 10 cm x 10 cm current loop carrying a 100 kHz alternating current of 0.1 A was 30 positioned adjacent to the coil assembly, keeping the orientation of the loop perpendicular to the ferrite rods common axis. It was found that the induced voltage in the ferrite rod circuit varied only 5 % from an average value for all positions of the probing coil in the homogeneous region 182 indicated in Figure 11.

Example 4

The circular room coil described in Example 1 was positioned horizontally 120 cm above the floor. An alternating current of 0.1 A at 100 kHz was fed through the coil from a signal generator. A human was dressed with an elastic 5 Lycra textile shirt that covered the torso from the armpits and down to the ridge of the hip. A helical electrical conductor was attached to the surface of the textile shirt, making a total of 10 equidistant turns around the torso. The spacing between the turns was 5 cm. The conductor was arranged in a fine zigzag pattern to allow for circumferential variations without becoming over-stretched or loosing contact 10 with the body contour. The subject was positioned standing with the chest and abdomen located close to the center of the room coil and the amplitude of the induced voltage in the helical coil was measured to be 350 mV peak to peak with an oscilloscope. Combining this with the reference measurements described in Example 1, the volume of the torso could be calculated as:

15

$$350 \text{ mV} \cdot 5 \text{ cm} \cdot \frac{100 \text{ cm}^2}{5 \text{ mV}} = 35000 \text{ cm}^3 = 35 \text{ liters}$$

Example 5

The same subject and as in Example 4 wearing the same elastic textile shirt 20 with electrical conductors is used. The subject is positioned supine on a bench, and three small ferrite coils as in Example 3 are mounted 90 cm above the surface where the subject is lying, parallel to the subjects body axis and centered above the subject's chest and abdomen. A constant alternating current of 0.1 A is fed through the coil, which follows the surface contours of the torso. The voltage that 25 is induced in the ferrite coils is measured with an oscilloscope. This voltage is compared to the voltage that is measured when a 100 cm^2 coil carrying 0.1 A is positioned at the same site as the subject's torso, and a volume very similar to that described in Example 4 is calculated.

30 **Example 6**

The experiment of Example 4 was repeated. The induced voltage from the patient coil was rectified in order to generate a DC voltage signal reflecting instantaneous torso volume. This signal was sampled with 14 bits of resolution by an analog to digital converter, and then transferred to a computer at a sampling 35 rate of 25 Hz. Equation 5 above was used to convert the voltage readings to

volume values. The signal was then fed through a digital high-pass filter with a cut-off frequency of 0.05 Hz. This removed the time-averaged volume component from the signal. The filtered signal then reflected breathing activity. The subject's breathing activity was also recorded by connecting the patient airways to a recording dry-seal spirometer by the use of a mouthpiece. A simultaneous recording of breathing by the two methods is displayed in Fig. 12. As shown, the comparison of the simultaneous recordings of breathing volume by a dry-seal spirometer connected to a human subject's airways (broken line), and the measurements using the device described in Example 4 (solid line) are virtually identical. Upward deviations of the traces mean increasing lung air content. To ease the comparison of traces, the spirometer trace has been inverted. The deviation between the traces during the first four seconds is probably related to thermal equilibration within the closed spirometer system.

15 Example 7

The experiment in Example 6 was repeated. Volume measured by the inductive device was recorded for 8 seconds while the subject held his breath in expiration phase. Variations in volume with amplitude of about 15 ml occurring in synchrony with his heartbeats could be seen, as shown in line 188 of Figure 13. 20 These variations are expected to represent the total blood volume variations in the chest and abdomen caused by the beating action of the heart.

25 While the above Examples illustrate some of the capabilities of the invention, they are not intended to limit the scope of this disclosure. Also, as referenced above, various system embodiments are contemplated. Figure 14 discloses yet another embodiment of the measurement systems disclosed herein. 30 Fixed coil means 101 is configured as a sensor for induced voltage created when current is generated in signal generator 117 and current amplifier 123 and fed to conductive coil means 107 within homogeneous region 182. The sensed voltage is amplified at amplifier 127, and is fed through rectifier 133, A/D converter 192, and becomes the measured value 195 that transmits to personal computing and/or display means 201. Finally, status and control means provides signals 197 to give status and control commands.

35 It is recognized that the functionality and display of the accurate values being measured by the systems and methods disclosed herein present significant advantages to users of the invention. The speed and accuracy greatly enhances the

value of multiple, real-time traces, traces with rapid x-axis and waveform details, traces with a wide range of time axis span of minutes to hours, and reconstruction displays. Numerous other display features and diagnostics are enabled due to the system advantages identified above.

5 It will be understood that various modifications and alternate configurations may be made in the preferred embodiments shown and described herein without departure from the scope of the invention, and that the invention embraces all such changes, modifications, and equivalents as are within the scope of the following claims.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A system for measuring the changing area or volume of an object including:

5 a. conductive coil means adapted to be configured tightly about the various circumferences of at least one portion of the object;

b. fixed coil means adapted to be remotely located relative to the conductive coil means about the object;

10 c. current generating means capable of selectively providing alternating current to either one of the conductive coil means or the fixed coil means to create both an induced voltage and a homogeneous magnetic field in the coil means not receiving the alternating current which induced voltage changes over time with changes in the volume or area of the object; and

15 d. computational means for receiving a signal based on measurement of the induced voltages or measurement of the magnetic field generated by the current in the coil means and converting the signal to volume or area values.

2. The system of claim 1 used for measuring the changing volume within at least one portion of a mammal due to respiration wherein the induced voltage in the coil means not receiving the current changes over time due to the respiration of the mammal and the changing area of the coil means.

3. The system of claim 2 in which the conductive coil means comprises electrically conductive coil loops that are equally spaced on a flexible substrate that is suitable for wearing by the mammal.

4. The system of claim 2 in which the conductive coil means comprises 25 electrically conductive coil loops that are closed circumferential loops.

5. The system of claim 2 in which the current generating means generates current with the frequency range of about 10 kHz to about 200 kHz and from about 1 milliampere to about 1 ampere.

6. The system of claim 2 in which the conductive coil means comprises a plurality of coil loops which are configured tightly about a thoracic region and an abdominal region of the mammal.

7. The system of claim 2 further comprising sensing and control means for controlling operation of the system, the sensing and control means being electrically connected to the conductive coil means, the fixed coil means and the current generating means.

8. The system of claim 6 further comprising sensing and control means for controlling operation of the system, the sensing and control means being electrically connected to the conductive coil means, the fixed coil means and the current generating means and in which the sensing and control means comprises timing and multiplex switching means for providing simultaneous volume measurements of both the thoracic region and the abdominal region of the mammal.

20

9. The system of claim 7 in which the sensing and control means comprises multiplexing means for providing simultaneous measurement of a plurality of regions of the mammal utilizing either phase, frequency or time multiplexing.

25 10. The system of claim 2 in which the current generating means comprises a constant current circuit for generating current in the conductive coil means and to maintain the current constant regardless of the dynamic variations of portions of the conductive coil means that are configured tightly about the various circumferences of at least one portion of the mammal.

30

11. The system of claim 2 in which the current generating means comprises a signal generator and a constant current amplifier electrically connected to the coil means which is receiving the generated current.

5 12. The system of claim 2 in which the sensing and control means comprises an amplifier and rectifier electrically connected to the coil means that is receiving the induced voltage from the other coil means.

10 13. The system of claim 3 in which the conductive coil means are electrically connected in series so that the instantaneous volume V may be calculated from the voltage reading U of the volume output signal in the coil means which is receiving the induced voltage by use of the formula

$$V = U \cdot d \cdot k_c$$

wherein d is the spacing between the coils:

15 And $k_c = a_c / U_c$,
wherein a_c is the area of a reference coil and U_c is the voltage reading of the volume signal when a calibration coil is attached.

20 14. The system of claim 2 in which the fixed coil means comprises a plurality of small coil elements that are configured for matching and positioning to permit the fixed coil means to generate a homogeneous magnetic field similar to a single large coil for either sensing an induced voltage from the conductive coil means or for generating a field to create an induced voltage in the conductive coil means.

25 15. The system of claim 14 in which the plurality of small coil elements comprises three small coil elements.

30 16. The system of claim 15 in which each of the small coil elements is wound on a ferrite core and arranged linearly with optimized positions and signal intensity weighting to generate a homogeneous magnetic field at the portion of the mammal being measured.

17. The system of claim 2 in which the conductive coil means comprises electrically conductive coil loops that are equally spaced and carried by an elastic and conformable substrate that is suitable for wearing by the mammal in a manner similar to a tightly fitting garment and which is configured so that the 5 coil loops always conform to the same surface of the portion of the mammal regardless of any shape change which that portion of the mammal may experience during respiration.

18. The system of claim 2 in which the conductive coil means comprises electrically conductive coil loops that are spaced at constant and known 10 intervals and which are carried by an elastic and conformable substrate that is suitable for wearing by the mammal in a manner similar to a tightly fitting garment which is configured so that the coil loops always conform to the same surface of the portion of the mammal regardless of any shape change which that portion of the mammal may experience during respiration.

15 19. The system of claim 2 wherein the computational means receive a signal representative of sensed volume of the portion of the mammal being measured and converts the signal to true volume values.

20. The system of any one of the preceding claims adapted for measuring the changing area within at least one portion of a mammal due to cardiac 20 function wherein the induced voltage created in one of the coil means is representative of true area within the coil means and wherein the coil means is configured tightly about the various circumferences of the mammal portion or portions with the signals and area changing over time due to the cardiac function of the mammal.

25 21. The system of claim 20 in which the conductive coil means comprises electrically conductive coil loops that are equally spaced on a flexible substrate that is suitable for wearing by the mammal.

22. The system of claim 20 in which the conductive coil means comprises electrically conductive coil loops that are closed circumferential loops.

23. The system of claim 20 in which the current generating means generates current with a frequency range of about 10 kHz to about 200 kHz and from about 1 milliampere to about 1 ampere.

24. The system of claim 20 in which the conductive coil means comprises a plurality of coil loops which are configured tightly about a thoracic region and an abdominal region of the mammal.

25. The system of claim 20 further comprising sensing and control means for controlling operation of the system, the sensing and control means being electrically connected to the conductive coil means, the fixed coil means, and the current generating means.

26. The system of claim 25 in which the sensing and control means comprises timing and multiplex switching means for providing simultaneous area measurements of both a thoracic region and an abdominal region of the mammal.

20

27. The system of claim 26 in which the sensing and control means comprises multiplexing means for providing simultaneous measurement of a plurality of regions of the mammal utilizing either phase, frequency or time multiplexing.

25 28. The system of claim 20 in which the current generating means comprises a constant current circuit for generating current in the conductive coil means and to maintain the current constant regardless of the dynamic variations of portions of the conductive coil means that are configured tightly about the various circumferences of at least one portion of the mammal.

30

29. The system of claim 20 in which the current generating means comprises a signal generator and a constant current amplifier electrically connected to the coil means which is receiving the generated current.

5 30. The system of claim 20 in which the sensing and control means comprises an amplifier and rectifier electrically connected to the coil means that is receiving the induced voltage from the other coil means.

10 31. The system of claim 21 in which the conductive coil means are electrically connected in series so that the instantaneous volume V may be calculated from the voltage reading U of the volume output signal in the coil means which is receiving the induced voltage by use of the formula

$$A = U \cdot k_c$$

15 And $k_c = a_c / U_c$;

wherein a_c is the area of a reference coil and U_c is the voltage reading of the volume signal when a calibration coil is attached.

20 32. The system of claim 20 in which the fixed coil means comprises a plurality of small coil elements that are configured for matching and positioning to permit the fixed coil means to generate a homogeneous magnetic field similar to a single large coil for either sensing an induced voltage from the conductive coil means or for generating a field to create an induced voltage in the conductive coil means.

25 33. The system of claim 32 in which the plurality of small coil elements comprises three small coil elements.

30 34. The system of claim 33 in which each of the small coil elements is wound on a ferrite core and arranged linearly with optimized positions and signal intensity weighting to generate a homogeneous magnetic field at the portion of the mammal being measured.

35. The system of claim 20 in which the conductive coil means comprises electrically conductive coil loops that are equally spaced and carried by an elastic and conformable substrate that is suitable for wearing by the mammal in a manner similar to a tightly fitting garment and which is configured so that the
5 coil loops always conform to the same surface of the portion of the mammal regardless of any shape change which that portion of the mammal may experience during respiration.

36. The system of claim 20 in which the conductive coil means comprises electrically conductive coil loops that are spaced at constant and known
10 intervals and which are carried by an elastic and conformable substrate that is suitable for wearing by the mammal in a manner similar to a tightly fitting garment which is configured so that the coil loops always conform to the same surface of the portion of the mammal regardless of any shape change which that portion of the mammal may experience during respiration.

15 37. The system of claim 20 wherein the computational means receive a signal representative of sensed area of the portion of the mammal being measured and converts the signal to true area values.

38. A method of measuring changing volume or area within at least one portion of an object, including the steps of:

20 a. configuring conductive coil means tightly about the various circumferences of at least one portion of the object;

b. positioning fixed coil means remotely to the object and to the conductive coil means so that an homogeneous magnetic field may be created around the conductive coil means if and when the fixed coil means are
25 energized by an electrical current; and

c. generating an electrical current into either the conductive coil means or the fixed coil means to create an induced voltage signal in the other coil means, which induced voltage changes over time with changes in the volume or the area of the object and which creates an homogeneous magnetic
30 field in the coil means not receiving current.

39. The method of claim 38 in which the current generating step generates current with a frequency range of about 10 kHz to about 200 kHz and from about 1 milliampere to about 1 ampere.

40. The method of claim 38 or 39 further comprising the step of configuring the conductive coil means as electrically conductive coil loops that are equally spaced on a flexible substrate that is placed around the object.

41. The method of claim 40 in which the step of configuring the conductive coil means comprises placing a plurality of coil loops tightly about a first portion and a second portion of the object.

5 42. The method of claim 38 further comprising the step of providing sensing and control means for controlling operation of the system, the sensing and control means being electrically connected to the conductive coil means, the fixed coil means, and the current generating means.

10 43. The method of claim 42 further comprising the step of providing the sensing and control means with timing and multiplex switching means for providing simultaneous measurements of both a first portion and second portion of the object.

15 44. The method of claim 42 further comprising the step of using multiplexing means within the sensing and control means for providing simultaneous measurement of a plurality of portions of the object utilizing either phase, frequency or time multiplexing.

20 45. The method of claim 38 in which the current generating means utilizes a constant current circuit to maintain the current in the conductive coil means

constant regardless of the dynamic variations of portions of the conductive coil means that are configured tightly about the various circumferences of at least one portion of the object.

5 46. The method of claim 38 in which the sensing and control means utilizes an amplifier and a rectifier electrically connected to the coil means which is receiving the generated current.

10 47. The method of claim 38 in which the sensing and control means utilizes an amplifier and a rectifier electrically connected to the coil means that is receiving the induced voltage from the other coil means.

48. The method of claim 40 further comprising the step of electrically connecting the conductive coil loops in series.

15 49. The method of claim 38 further comprising the step of configuring the fixed coil means as a plurality of small coil elements that are configured for matching and positioning to permit the fixed coil means to generate a magnetic field similar to a single large coil for either sensing an induced voltage from the conductive coil means or for generating a field to create an induced voltage in the conductive coil means.

25 50. The method of claim 49 further comprising the step of arranging each of the small coil elements so as to be wound on a ferrite core and arranged linearly with optimized positions and signal intensity weighting to generate the homogeneous magnetic field at the portion of the object being measured.

30 51. The method of claim 38 in which the step of configuring the conductive coil means comprises providing electrically conductive coil loops that are equally spaced and carried by an elastic and conformable substrate that is suitable for placement around the object in a manner similar to a tightly fitting garment which is configured so that the coil loops always conform to the same surface of the

portion of the object regardless of any shape change which that portion of the object may experience.

52. The method of claim 38 in which the step of configuring the conductive coil means comprises providing electrically conductive coil loops that are spaced at constant and known intervals and which are carried by an elastic and conformable substrate that is suitable for placement around the object in a manner similar to a tightly fitting garment which is configured so that the coil loops always conform to the same surface of the portion of the object regardless of any shape change which that portion of the object may 10 experience.

53. The method of claim 38 further comprising the step of providing computational means adapted to receive a signal representative of the sensed area or volume of the portion of the object being measured and further comprising the steps of converting the signal to true area or volume values and 15 displaying the values on a display.

54. The method of claim 38 wherein the electrical current is generated in the fixed coil means to create a time-varying magnetic field and further comprises the step of measuring the voltage induced in the conductive coil means.

55. The method of claim 54 wherein the conductive coil means comprise 20 electrically conductive coil loops that are spaced at constant and known intervals and wherein the step of measuring voltage and calculating the volume comprises the step of calculating the volume by measurement of the sum of the induced voltages in the loops, and the means of measuring the sum comprising electrical serial connection of the loops.

56. A device for measuring changing area or volume of an object including 25 a. conductive coil means adapted to conform to the surface of the object;

b. means for creating time-varying magnetic fields at least large enough to surround the object, wherein such means are located remotely from 30 the object;

c. voltage monitoring means connected to the conductive coil means, whereby motion of the surface creates a measurable change in induced voltage in the conductive coil means that correlates to the movement of the

object wherein the voltage monitoring means is connected to a computing means suitable for performing a series of algorithmic steps to calculate the volume change of the object from the measured induced voltage.

5. 57. The device of claim 56 in which the conductive coil means are adapted to conform to one or more portions of a human body.

58. The system of any one of the preceding claims in which the conductive coil means comprises a plurality of coil loops which are configured tightly about portions of one or more limbs of the mammal.

10 59. The method of claim 38 further comprising the step of calculating the inductive coupling coefficient between the coil means to calculate the changes in area or volume of the object.

60. A system for measuring changing area or volume of an object substantially as herein described with reference to the accompanying drawings.

15 61. A method of measuring changing volume or area within at least one portion of an object substantially as herein described with reference to the accompanying drawings.

62. A device for measuring changing area or volume of an object substantially as herein described with reference to the accompanying drawings.

20 DATED: 12 March 2002

PHILLIPS ORMONDE & FITZPATRICK

Attorneys for:

VOLUSENSE AS

1/8

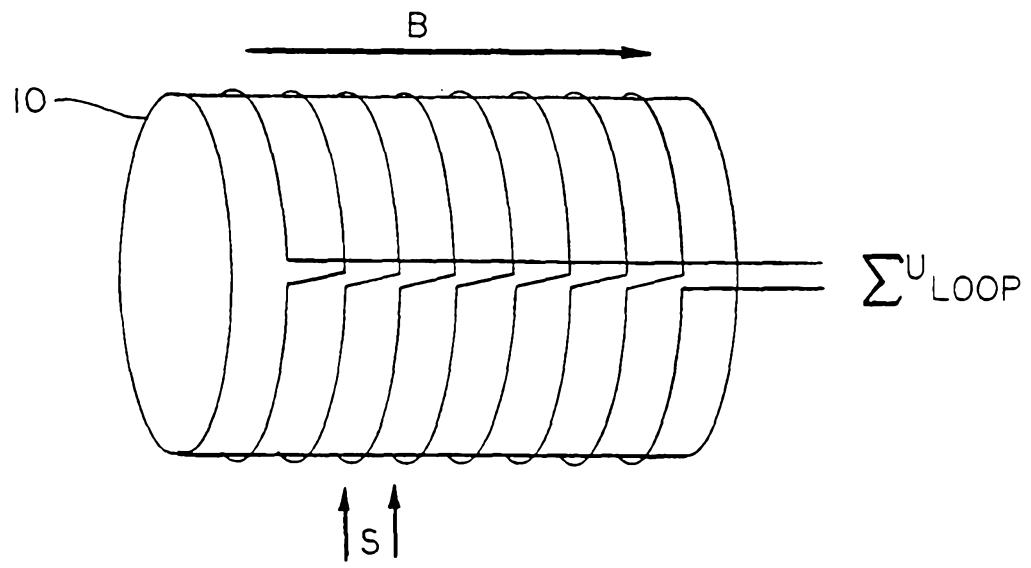
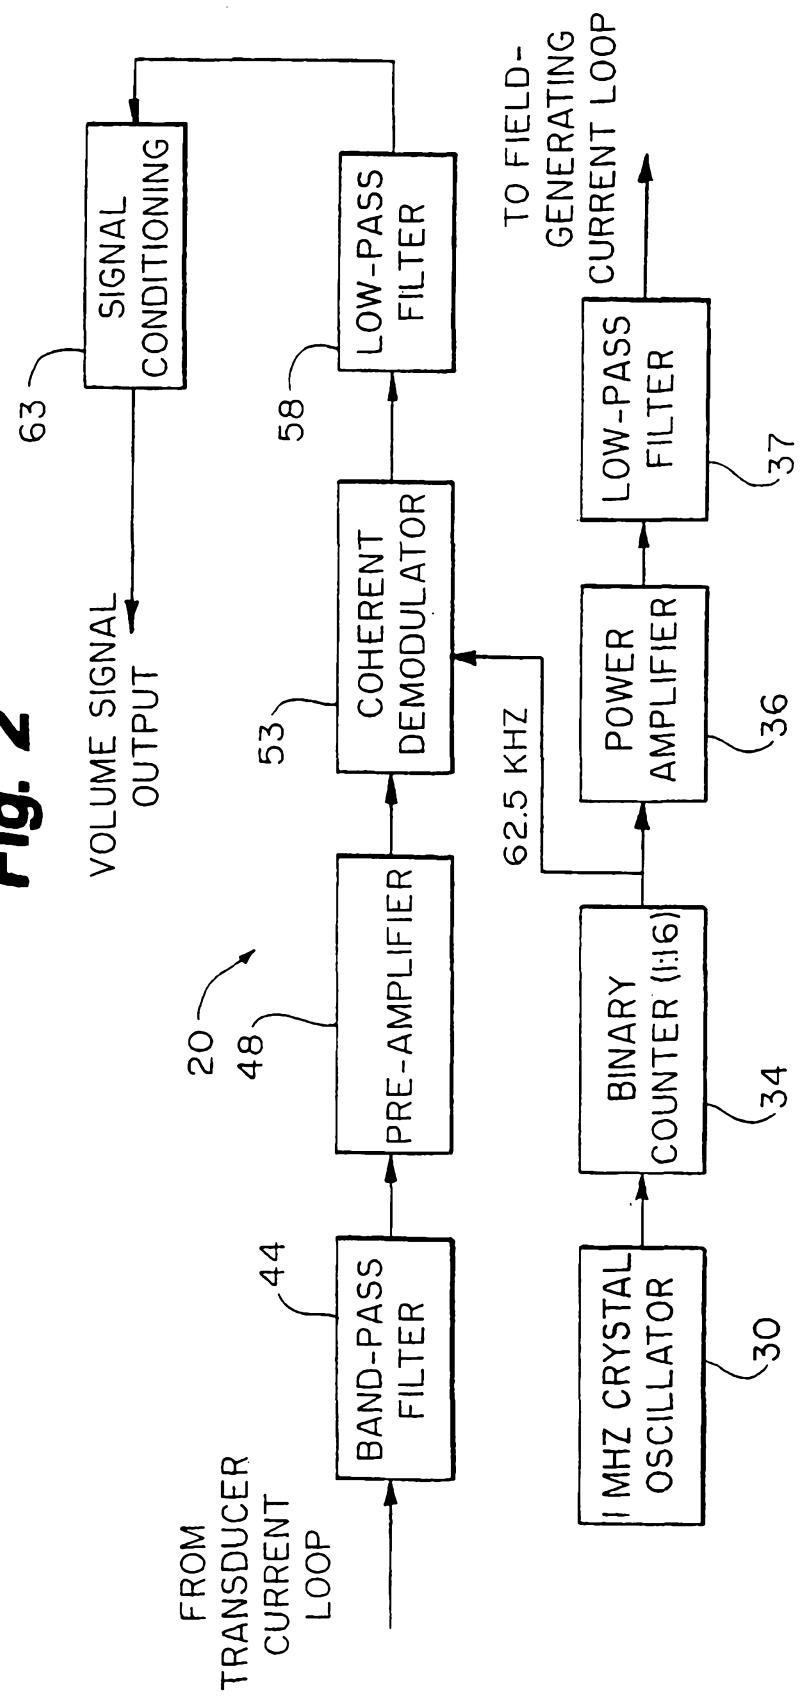
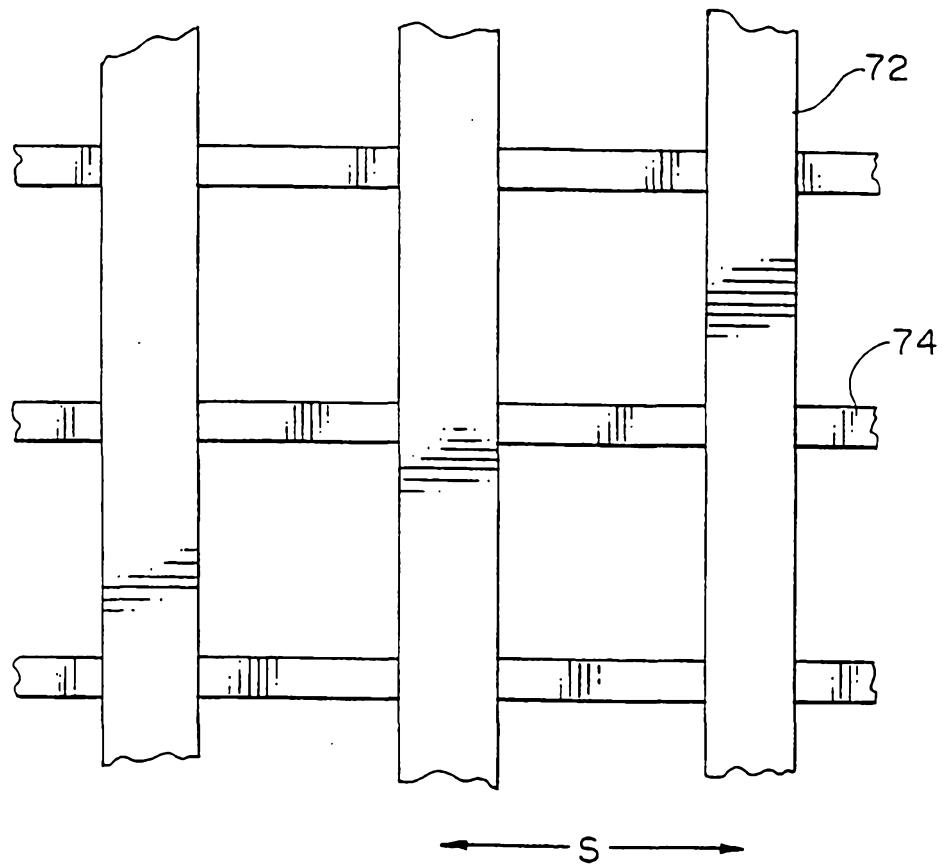
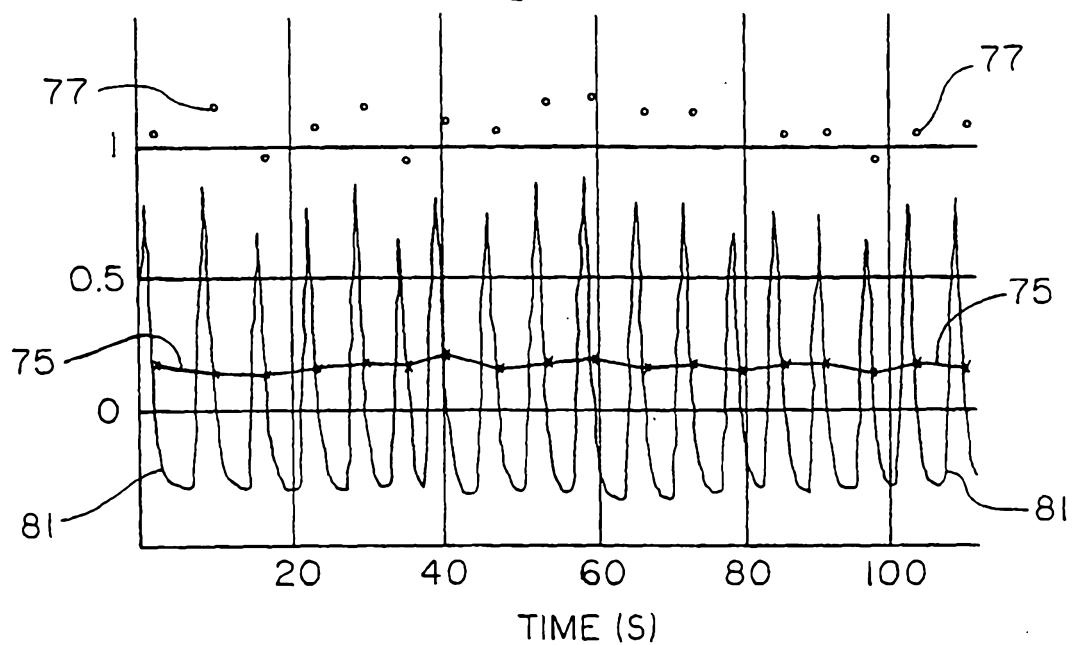
Fig. 1

Fig. 2


3/8

Fig. 3

4/8




Fig. 4**Fig. 5**

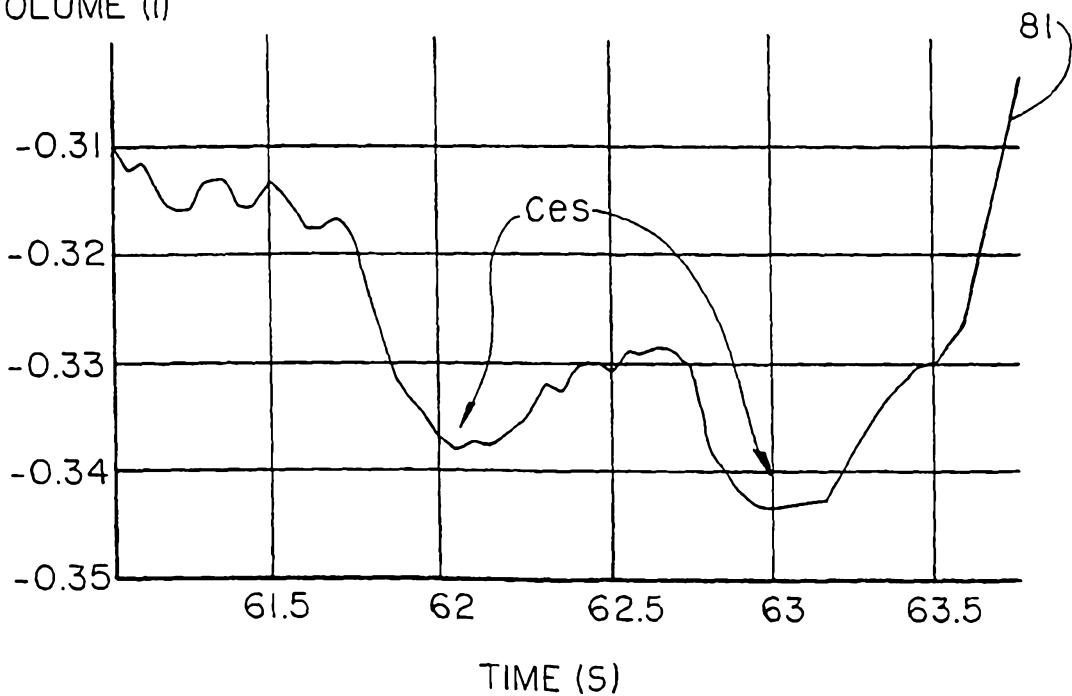VOLUME (l)



SUBSTITUTE SHEET (RULE 26)

5/8

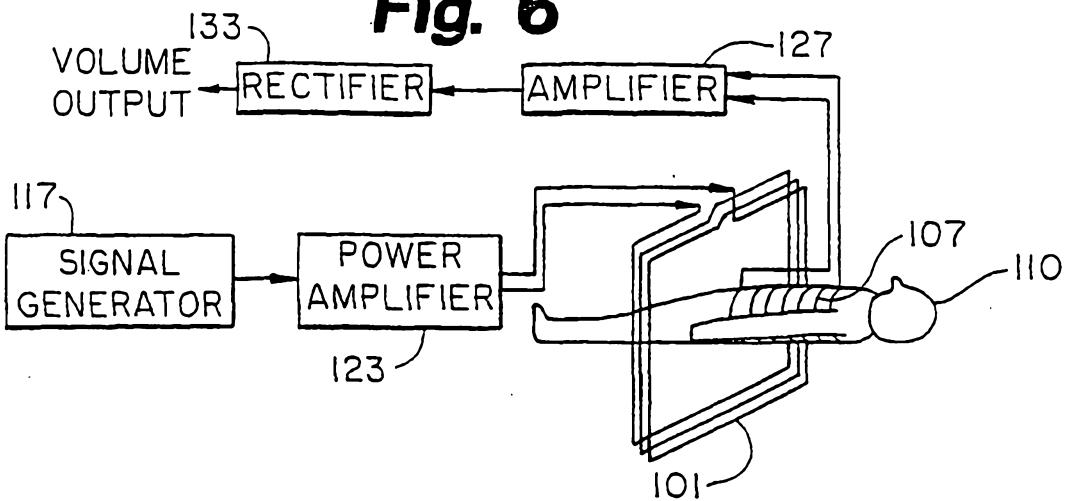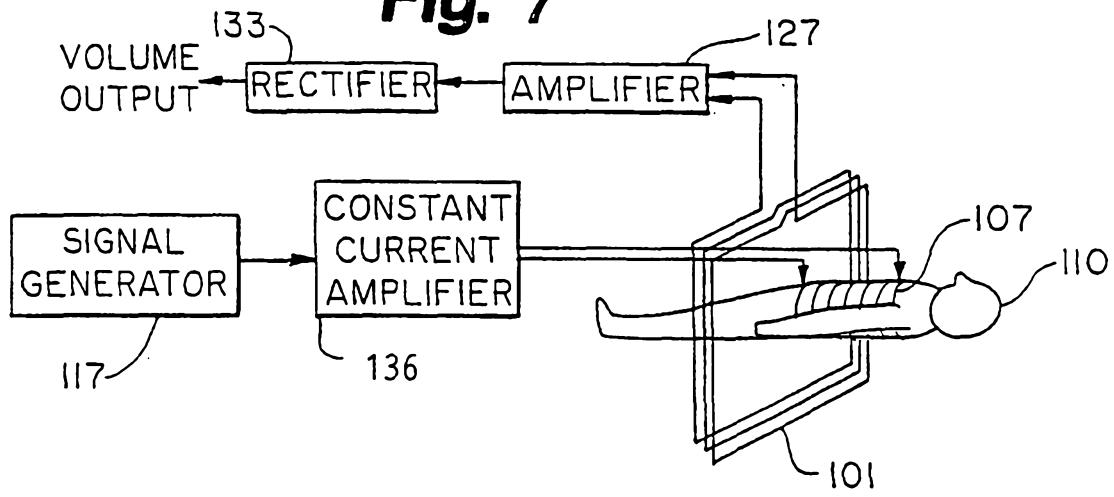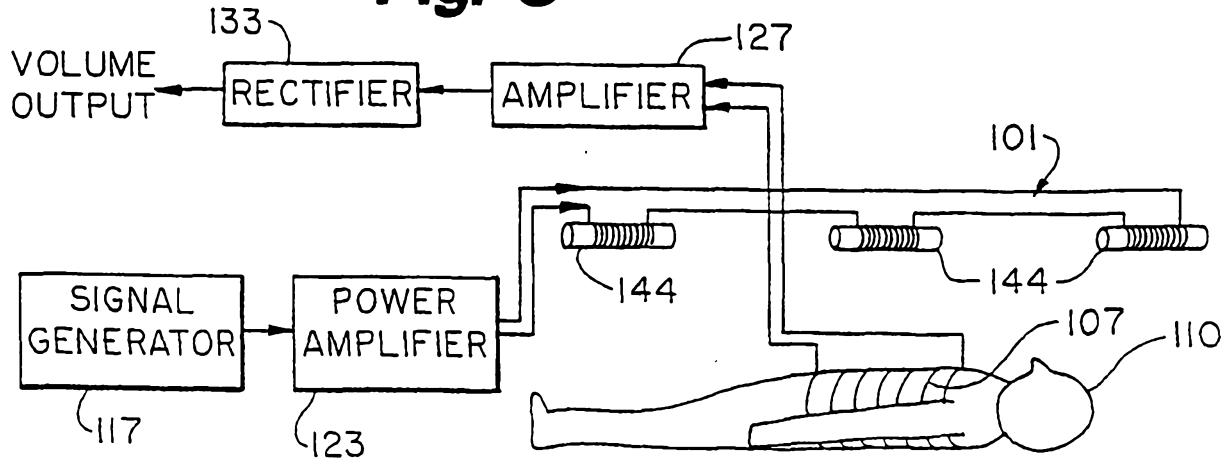Fig. 6**Fig. 7****Fig. 8**

6/8

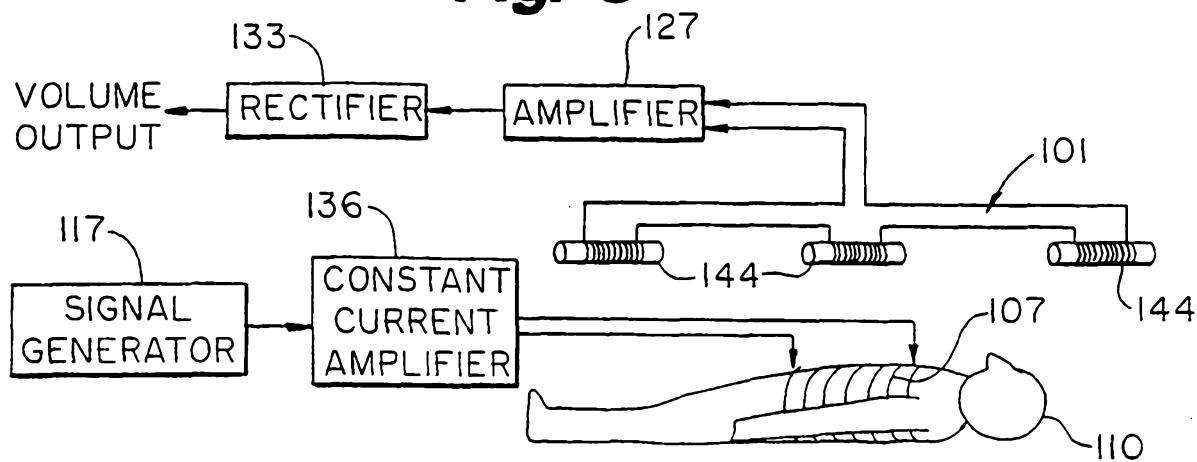
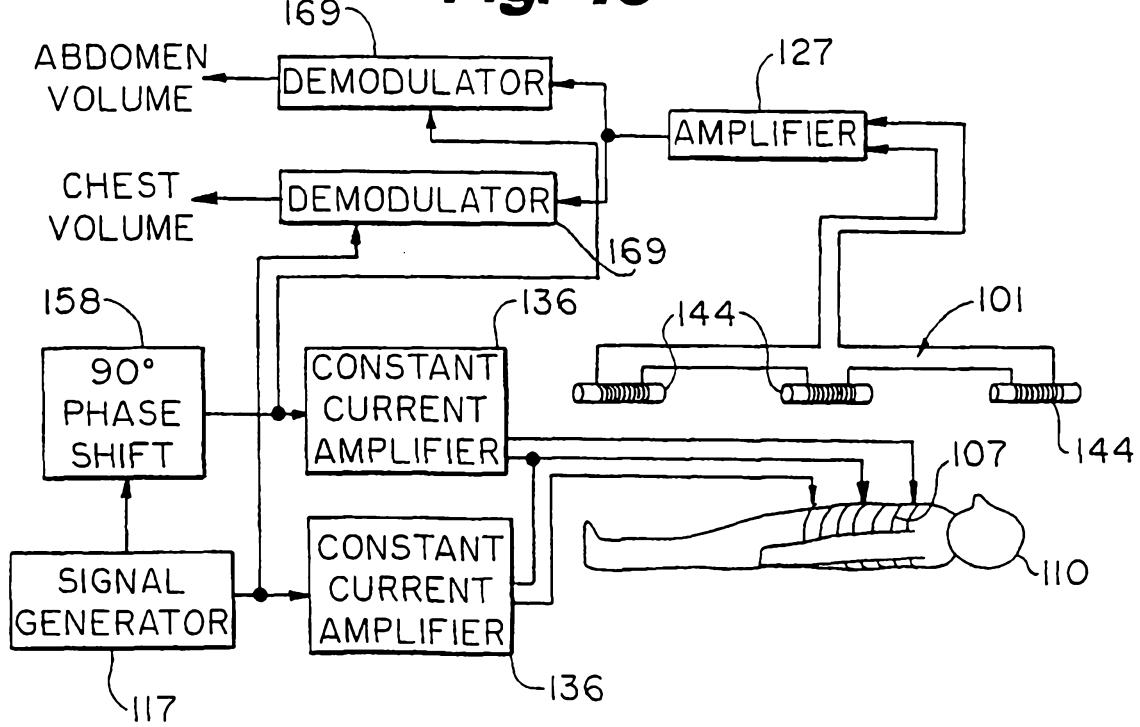
Fig. 9**Fig. 10**


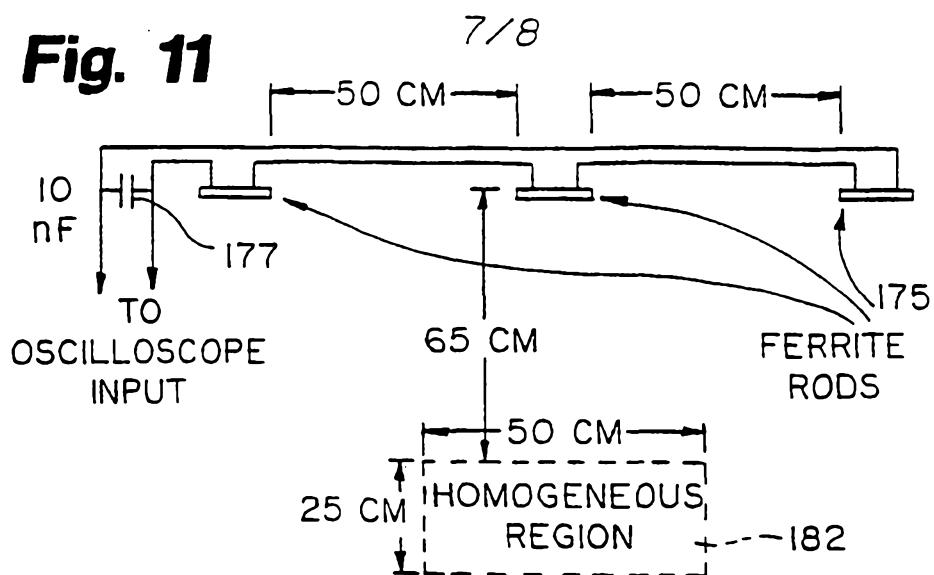
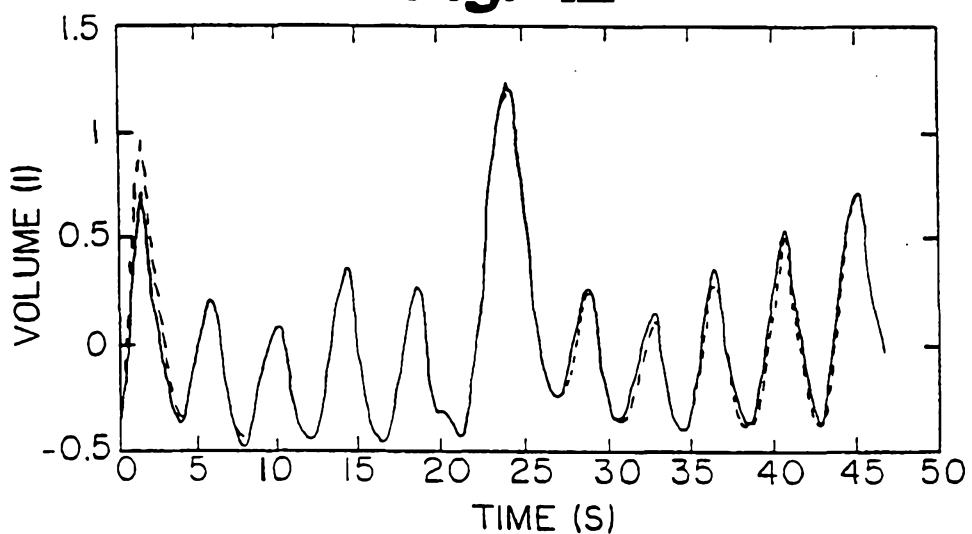
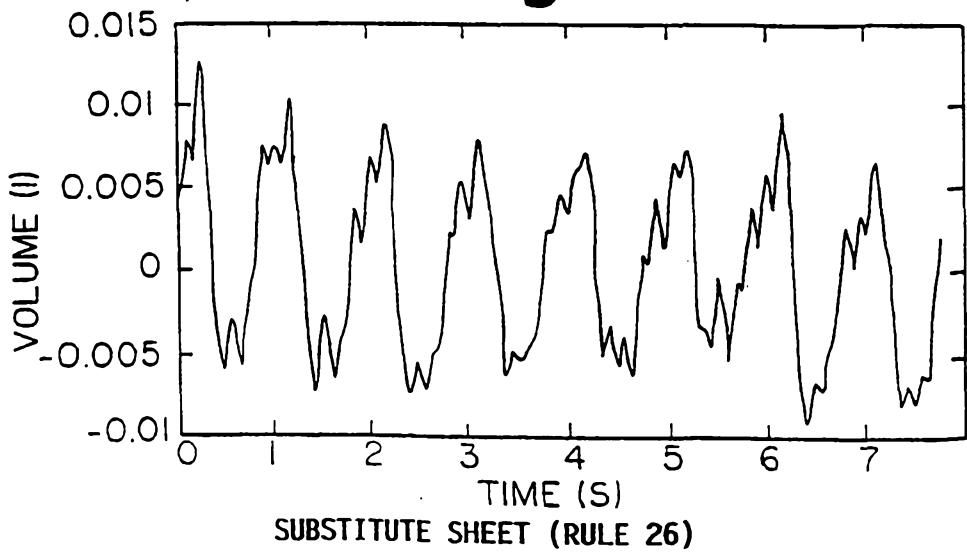
Fig. 11**Fig. 12****Fig. 13**

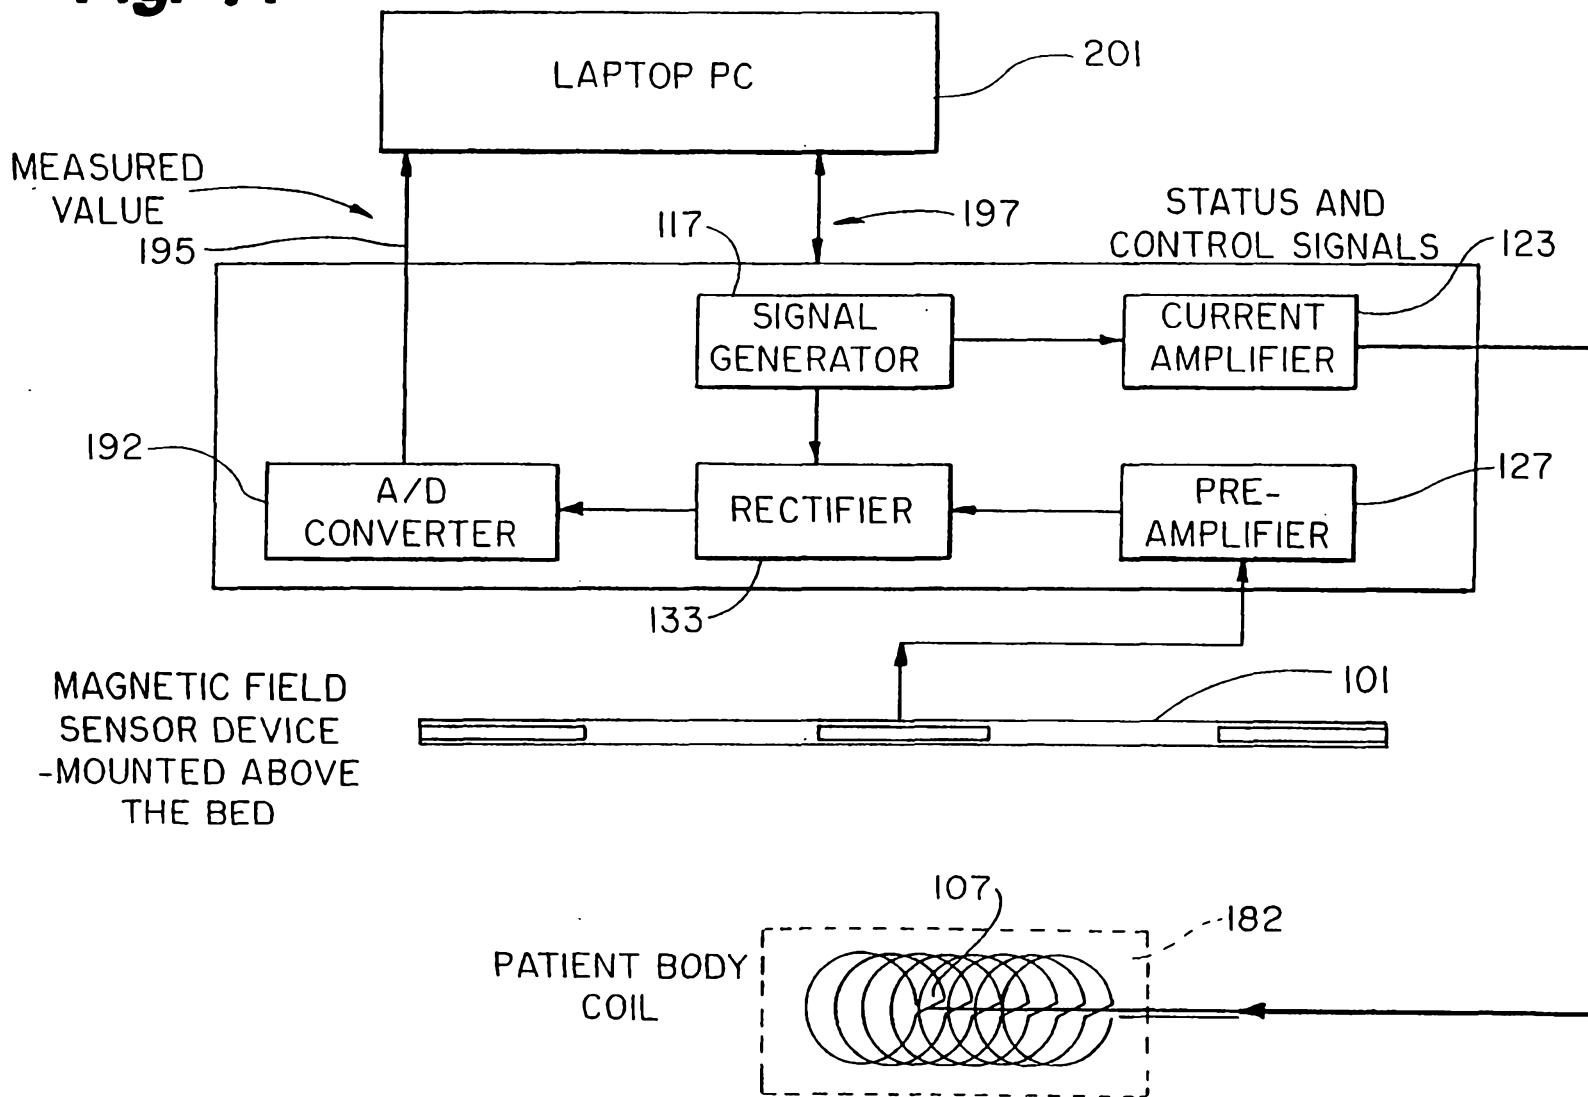Fig. 14



SUBSTITUTE SHEET (RULE 26)