



(11) **EP 1 403 462 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.01.2011 Bulletin 2011/02

(51) Int Cl.:
E06B 7/086 ^(2006.01)

(21) Application number: **03021679.0**

(22) Date of filing: **29.09.2003**

(54) **Blind apparatus**

Jalousie

Store

(84) Designated Contracting States:
CH DE FR LI

(30) Priority: **30.09.2002 JP 2002285550**

(43) Date of publication of application:
31.03.2004 Bulletin 2004/14

(73) Proprietor: **Oiles Eco Corporation**
Tokyo 108-0014 (JP)

(72) Inventors:

- **Ohishi, Mamoru**
Ritto-shi
Shiga 520-3041 (JP)
- **Matsumoto, Koji**
Ritto-shi
Shiga 520-3041 (JP)

- **Nakajima, Hironari**
Fujisawa-shi
Kanagawa 252-0811 (JP)

(74) Representative: **Sajda, Wolf E. et al**
Meissner, Bolte & Partner GbR
Widenmayerstrasse 48
80538 München (DE)

(56) References cited:

EP-A- 0 179 968 EP-A- 1 243 744
CA-A- 2 224 834 DE-A- 3 132 094
DE-A- 3 638 406 US-A- 2 391 709
US-A- 3 200 876 US-A- 4 155 395

- **DATABASE WPI Section PQ, Week 200262**
Derwent Publications Ltd., London, GB; Class
Q48, AN 2002-580220 XP002304675 -& JP 2002
194966 A (NAKAMURA) 10 July 2002 (2002-07-10)

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 403 462 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention:

[0001] The present invention relates to a blind apparatus according to the preamble of claim 1. Such a blind apparatus is known from DE-A-3638 406.

Description of the Related Art:

[0002] Another conventional blind apparatus is disclosed in JP-A-8-326445.

[0003] This conventional blind apparatus comprises : a pair of link mechanisms; a plurality of slat supporting mechanisms each having one end portion connected to one of the link mechanisms and the other end portion connected to the other link mechanism; slats respectively supported by the slat supporting mechanisms; a raising and lowering mechanism for raising and lowering the slats; and a tilting mechanism for tilting the slats by causing the pair of link mechanisms to undergo relative positional changes as the slats are raised or lowered by the raising and lowering mechanism. Each of the slat supporting mechanisms has an arm member for supporting an end portion of the slat at a substantially central portion of the arm member.

[0004] With the blind apparatus disclosed in the above-described publication, since each of the link mechanisms is formed by linking plate-shaped rigid link members in a chain form by means of shafts, substantial time is required for the assembly of the link mechanisms, and a large force is required for raising and lowering the slats due to the weight of the link members.

SUMMARY OF THE INVENTION

[0005] The present invention has been devised in view of the above-described aspects, and its object is to provide a blind apparatus which makes it possible to assemble the link mechanisms in a short time, and make the link mechanisms lightweight so as to render needless a very large force for raising and lowering the slats, thereby making it possible to easily effect the raising and lowering of the slats.

[0006] According to the invention, a blind apparatus is disclosed as specified in the main claim. Advantageous further developments of such a blind apparatus are specified in the subclaims.

[0007] Moreover, a combination of slat supporting mechanisms and first and second link mechanisms for use in the blind apparatus according to the invention is disclosed, wherein each of the slat supporting mechanisms has an arm member for supporting an end portion of the slat substantially at a central portion of the arm member and each of the link mechanisms has a flexible belt-shaped body and shaft members to which the belt-

shaped body is secured and which are each rotatably connected to an end portion of each of the arm members.

[0008] Preferably, in a further embodiment of the blind apparatus in accordance with the invention, each of the belt-shaped bodies may be fabricated from one continuous belt-shaped member, and the belt-shaped member may be passed through shaft members which are respectively fitted rotatably in corresponding end portions of the arm members.

[0009] Each belt-shaped body is sufficient if it is tough and flexible, and may not have very large elasticity. It is rather preferred that each belt-shaped body be nonelastic. As for the resiliency, each belt-shaped body may be slightly resilient, but it is rather preferred that the belt-shaped body not be resilient. Preferably, in another embodiment of the blind apparatus in accordance with the invention, each of the belt-shaped bodies may be fabricated from a belt of a woven fabric or a knit fabric of yarn made of a synthetic resin such as polyester, or a belt of a nonwoven fabric made of a synthetic resin. In the invention, each of the belt-shaped bodies may be alternatively fabricated from a flat belt made of such as leather. As the yarn made of a synthetic resin, yarn made of polyester is preferable. As a more preferable example, it is possible to cite a flexible belt-shaped body made by plain weaving using such polyester-made yarn and having a width of 6 to 12 mm and a thickness of 0.4 mm to 0.7 mm, more specifically a width of 7 mm and a thickness of 0.6 mm.

[0010] Preferably, in another embodiment of the blind apparatus in accordance with the invention, each of the shaft members may be formed by an integrally molded piece made of a synthetic resin and including a cylindrical portion and a pair of shaft portions respectively disposed on opposite end faces of the cylindrical portion, and may be rotatably fitted at the shaft portion thereof in the corresponding end portion of each of the arm members. In this case, each of the belt-shaped bodies may be integrally secured to the cylindrical portion and passed through the cylindrical portion.

[0011] In the case where each of the shaft members is formed by an integrally molded piece made of a synthetic resin, as in another embodiment of the blind apparatus in accordance with the invention, the securing of each shaft member to the belt-shaped body may be effected simultaneously with the integral molding of each shaft member by clamping the belt-shaped body between a pair of mold halves for integrally forming the shaft members, and by allowing a forming material of the shaft members to flow into the pair of mold halves with the belt-shaped body clamped therebetween.

[0012] As in the blind apparatus in accordance with another embodiment of the invention, each shaft member in the blind apparatus may be formed by an integrally molded piece made of a synthetic resin and further having a pair of rectangular projecting portions disposed at symmetrical positions with respect to an axis of the cylindrical portion. In this case, each of the belt-shaped bodies may

be integrally secured to the cylindrical portion and the pair of rectangular projecting portions, and may be passed through the cylindrical portion and the pair of rectangular projecting portions.

[0013] Also in the case of the shaft member having the pair of rectangular projecting portions, the securing of each shaft member to the belt-shaped body may be effected simultaneously with the integral molding of each shaft member by clamping the belt-shaped body between the pair of mold halves for integrally forming the shaft members, and by allowing a forming material of the shaft members to flow into the pair of mold halves with the belt-shaped body clamped therebetween, as described above.

[0014] In addition, as in the blind apparatus in accordance with another embodiment of the invention, each of the belt-shaped bodies may alternatively have a plurality of belt-shaped pieces which are respectively terminated inside shaft members respectively fitted rotatably in corresponding end portions of pairs of vertically adjacent ones of the arm members.

[0015] As in the blind apparatus in accordance with another embodiment of the invention, each of the slats in a preferred example has a hollow portion, wherein each of the slat supporting mechanisms may further have a fitting portion provided in a substantially central portion of each of the arm members and fitted in the hollow portion in the end portion of each of the slats.

[0016] In the present invention, as in the blind apparatus in accordance with another embodiment of the invention, the raising and lowering mechanism may be connected to a lowermost one of the arm members, and may be adapted to raise the slats by raising the lowermost one of the arm members. Alternatively, as in the blind apparatus in accordance with another embodiment of the invention, the raising and lowering mechanism may be connected to an uppermost one of the arm members, and may be adapted to raise the slats by raising the uppermost one of the arm members.

[0017] In accordance with the present invention, it is possible to provide a blind apparatus which makes it possible to assemble the link mechanisms in a short time, and make the link mechanisms lightweight so as to render needless a very large force for raising and lowering the slats, thereby making it possible to easily effect the raising and lowering of the slats.

[0018] Hereafter, a detailed description will be given of the present invention and embodiments thereof on the basis of the preferred embodiments shown in the drawings. It should be noted that the present invention is not limited to these embodiments.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

Fig. 1 is a perspective view of a preferred embodiment of the invention;

Fig. 2 is a partial side elevational view of the embodiment shown in Fig. 1;

Fig. 3 is an explanatory side elevational view of slats and components within one vertical frame in accordance with the embodiment shown in Fig. 1;

Fig. 4 is an explanatory side elevational view of components within one vertical frame in accordance with the embodiment shown in Fig. 1;

Fig. 5 is an explanatory plan view of the embodiment shown in Fig. 1;

Figs. 6(a) and 6(b) are explanatory diagrams of a link mechanism in accordance with the embodiment shown in Fig. 1, in which Fig. 6(a) is an explanatory front elevational view thereof, and Fig. 6(b) is an explanatory side elevational view thereof;

Fig. 7 is a diagram explaining the operation of the embodiment shown in Fig. 1;

Fig. 8 is a diagram explaining the operation of the embodiment shown in Fig. 1;

Fig. 9 is a diagram explaining the operation of the embodiment shown in Fig. 1;

Fig. 10 is a diagram explaining the operation of the embodiment shown in Fig. 1;

Fig. 11 is a diagram explaining the operation of the embodiment shown in Fig. 1;

Figs. 12(a) and 12(b) are explanatory diagrams of another example of the link mechanism in accordance with the embodiment shown in Fig. 1, in which Fig. 12(a) is an explanatory front elevational view thereof, and Fig. 12(b) is an explanatory side elevational view thereof;

Figs. 13(a) and 13(b) are explanatory diagrams of still another example of the link mechanism in accordance with the embodiment shown in Fig. 1, in which Fig. 13(a) is an explanatory front elevational view thereof, and Fig. 13(b) is an explanatory side elevational view thereof;

Fig. 14 is an explanatory diagram of another example of a raising and lowering mechanism and a tilting mechanism shown in Fig. 1;

Fig. 15 is an explanatory plan view of the another example of the raising and lowering mechanism and the tilting mechanism shown in Fig. 14;

Fig. 16 is a diagram explaining the operation of the embodiment shown in Figs. 14 and 15;

Fig. 17 is a diagram explaining the operation of the embodiment shown in Figs. 14 and 15;

Fig. 18 is an explanatory perspective view of another example of the slat used in the blind apparatus in accordance with the invention; and

Fig. 19 is an explanatory cross-sectional view of the embodiment shown in Fig. 18.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0020] In Figs. 1 to 6, a window blind apparatus 1 in accordance with this embodiment is comprised of a pair

of vertical frames 2 and 3; a link mechanism 4; a link mechanism 5 juxtaposed to the link mechanism 4; a plurality of slat supporting mechanisms 8 each having one end portion 6 connected to the link mechanism 4 and the other end portion 7 connected to the link mechanism 5; a plurality of slats 9 supported by the respective slat supporting mechanisms 8 and juxtaposed in an opening P between the vertical frames 2 and 3; a raising and lowering mechanism 10 for raising and lowering the slats 9; and a tilting mechanism 11 for tilting the respective slats 9 by causing the link mechanisms 4 and 5 to undergo relative changes in their vertical positions as the slats 9 are raised or lowered by the raising and lowering mechanism 10.

[0021] The vertical frame 2, which is hollow, has a guide slit 15 extending in the vertical direction, while the vertical frame 3, which is hollow, also has a guide slit 16 extending in the vertical direction. The link mechanisms 4 and 5 and the tilting mechanism 11 are accommodated in the respective vertical frames 2 and 3. Since the link mechanisms 4 and 5 and the tilting mechanism 11 on the vertical frame 3 side are arranged in the same way as the link mechanisms 4 and 5 and the tilting mechanism 11 on the vertical frame 2 side, a detailed description will be given hereafter of the link mechanisms 4 and 5 and the tilting mechanism 11 on the vertical frame 2 side.

[0022] The link mechanism 4 has one continuous flexible belt-shaped body 21 and shaft members 23 to which the belt-shaped body 21 is secured and which are each rotatably connected to the end portion 6 of each arm member 22, which is the one end portion 6 of each slat supporting mechanism 8.

[0023] In the same way as the link mechanism 4, the link mechanism 5 has one continuous flexible belt-shaped body 25 similar to the belt-shaped body 21, as well as shaft members 26 which are similar to the shaft members 23 and to which the belt-shaped body 25 is secured, each shaft member 26 being rotatably fitted in the end portion 7 of each arm member 22, which is the other end portion 7 of each slat supporting mechanism 8.

[0024] As particularly shown in Figs. 6(a) and 6(b), the belt-shaped body 21 is passed through the shaft members 23 which are rotatably fitted in the end portions 6 of the respective arm members 22 including the end portions 6 of the uppermost and lowermost arm members 22, and is secured to the shaft members 23 at the respective passing positions. The belt-shaped body 21 passed through the shaft member 23 fitted to the end portion 6 of the uppermost arm member 22 extends further to the tilting mechanism 11, and is inserted in and secured to a shaft member 28 of the tilting mechanism 11 at its upper end portion 27, as particularly shown in Fig. 3. The belt-shaped body 21 passed through the shaft member 23 fitted to the end portion 6 of the lowermost arm member 22 at its lower end portion 29 is secured to the shaft member 23 at that lower end portion 29 and terminates there.

[0025] In the same way as the belt-shaped body 21,

the belt-shaped body 25 is passed through the shaft members 26 which are rotatably fitted in the end portions 7 of the respective arm members 22 including the end portions 7 of the uppermost and lowermost arm members 22, and is secured to the shaft members 26 at the respective passing positions. The belt-shaped body 25 passed through the shaft member 26 fitted to the end portion 7 of the uppermost arm member 22 extends further to the tilting mechanism 11, and is inserted in and secured to a shaft member 32 of the tilting mechanism 11 at its upper end portion 31. The belt-shaped body 25 passed through the shaft member 26 fitted to the end portion 7 of the lowermost arm member 22 at its lower end portion 33 is secured to the shaft member 26 at that lower end portion 33 and terminates there.

[0026] Each of the belt-shaped bodies 21 and 25 may be fabricated from a belt of a woven fabric or a knit fabric of yarn made of a synthetic resin such as polyester, or a flat belt of a nonwoven fabric made of a synthetic resin, or may be fabricated from another tough flexible belt.

[0027] Each of the slat supporting mechanisms 8 has the arm member 22, a shaft portion 36 formed integrally with an arm body 35 of the arm member 22, a cover portion 37 formed integrally with the shaft portion 36, and a fitting portion 38 formed integrally in a substantially central portion of the cover portion 37. The shaft portion 36 is passed through the guide slit 15 and is disposed in and outside the vertical frame 2. The fitting portion 38, which is provided in the substantially central portion of the arm body 35 of the arm member 22 through the shaft portion 36 and the cover portion 37, is fitted in a hollow portion 40 in one end portion 39 of the slat 9 having a hollow body.

[0028] The arm member 22 has the arm body 35 made of a synthetic resin and having a pair of split pins 41, as well as an arm plate 42 made of a metal or a resin and fitted to the arm body 35 through the split pins 41 of the arm body 35 in a snapfit fashion. The shaft portion 36 is integrally provided in the substantially central portion of the arm body 35. Thus the arm member 22 supports the end portion 39 of the slat 9 through the shaft portion 36, the cover portion 37, and the fitting portion 38 in its substantially central portion.

[0029] Each of the shaft members 23 and 26 is formed by an integrally molded piece including a cylindrical portion 46 and a pair of shaft portions 47 which are integrally provided on opposite end faces of the cylindrical portion 46 disposed in such a manner as to be sandwiched between the arm body 35 and the arm plate 42, and which are rotatably inserted in the arm body 35 and the arm plate 42. Each shaft member 23 or 26 is rotatably fitted at its shaft portion 47 in the end portion 6 or 7 of each arm member 22. Each of the belt-shaped bodies 21 and 25 is integrally secured to the cylindrical portion 46, and is passed through the cylindrical portion 46. The securing of each cylindrical portion 46 to each of the belt-shaped bodies 21 and 25 may be effected at the time of the integral molding of the shaft members 23 and 26.

[0030] Each slat 9 comprises a hollow body, and its

one end portion 39 is closed by the cover portion 37 of the slat supporting mechanism 8, while its other end portion 49 is closed by the cover portion 37 of the slat supporting mechanism 8 on the vertical frame 3 side. The respective slats 9 are supported at their opposite end portions 39 and 49 by the slat supporting mechanisms 8 on the vertical frame 2 side and the vertical frame 3 side so as to be parallel to each other in the opening P.

[0031] The raising and lowering mechanism 10 includes a chain 51 disposed in each of the vertical frames 2 and 3 and serving as a flexible traveling body; a connecting mechanism 54 for connecting to the lowermost slat supporting mechanism 8 the other end portion 53 of the chain 51 having one end portion 52 which is a free end; a traveling unit 55 for causing the chain 51 to travel in directions A and B; and a guide mechanism 56 for guiding the traveling of the chain 51 in the directions A and B.

[0032] Since the chain 51, the connecting mechanism 54, and the guide mechanism 56 are respectively arranged in the same way on the vertical frame 2 side and the vertical frame 3 side, a detailed description will be given hereafter of the vertical frame 2 side.

[0033] The connecting mechanism 54 includes a pin member 61 disposed concentrically with the shaft portion 36 of the lowermost slat supporting mechanism 8 and secured to that shaft portion 36 in such a manner as to project from the arm plate 42; a connecting arm member 65 having one end portion 62 connected rotatably and linearly movably to the pin member 61 and the other end portion 63 connected rotatably to the end portion 53 of the chain 51 through a pin member 64; and a torsion coil spring 66 disposed between the chain 51 and the connecting arm member 65 and having one end portion retained by the end portion 53 of the chain 51, the other end portion retained by the connecting arm member 65, and a central portion wound around the pin member 64.

[0034] The connecting arm member 65 has an elongated hole 67 with the pin member 61 inserted therein on the end portion 62 side. As a result, the connecting arm member 65 is rotatably and linearly movably connected to the pin member 61 on the end portion 62 side. The torsion coil spring 66 resiliently urges the connecting arm member 65 with respect to the end portion 53 of the chain 51 so as to rotate the connecting arm member 65 clockwise in Fig. 4 with respect to the end portion 53 of the chain 51. Consequently, the lowermost arm member 22 is adapted to be moved downward along the guide slit 15 by means of the pin member 61.

[0035] The traveling unit 55 has an electric motor 71 for generating a traveling force for the chain 51 as well as a transmitting means 72 for transmitting the traveling force from the electric motor 71 to the chain 51.

[0036] The electric motor 71 supported on the vertical frame 2 through a speed reducer 73 and a bracket 74 has a braking mechanism. The braking mechanism cancels the braking of the output rotating shaft of the electric motor 71 when electric power is supplied so as to rotate

its output rotating shaft, and effects braking so as not to freely rotate the output rotating shaft when electric power is not supplied so as not to rotate the output rotating shaft. This braking mechanism is electromagnetically operated on supply of electric power to the electric motor 71 to cancel the braking of the output rotating shaft of the electric motor 71, and stops the electromagnetic operation on stopping of the supply of electric power to effect the braking of the output rotating shaft of the electric motor 71 by mechanical operation.

[0037] The transmitting means 72 has the speed reducer 73 for reducing the rotational speed of the output rotating shaft of the electric motor 71; a rotating shaft 75 to which the rotation of the output rotating shaft of the speed reducer 73 is transmitted; and a sprocket wheel 76 secured to one end of the rotating shaft 75 and serving as a rotating body around which the chain 51 is wound.

[0038] The rotating shaft 75 is rotatably supported at its respective end portions by a bracket 77 attached to each of the vertical frames 2 and 3. The sprocket wheel 76 is disposed between the bracket 77 and a rotating body 78 of the tilting mechanism 11, and a sprocket wheel similar to the sprocket wheel 76 is also secured to the other end portion of the rotating shaft 75 on the vertical frame 3 side. In the same way as the chain 51 disposed in the vertical frame 2, the chain 51 disposed in the vertical frame 3 is wound around the sprocket wheel on the other end portion side of the rotating shaft 75.

[0039] The transmitting means 72 is adapted to transmit the torque of the output rotating shaft of the electric motor 71 to the chain 51 through the speed reducer 73, the rotating shaft 75, and the sprocket wheel 76 as the traveling force in the directions A and B.

[0040] In this embodiment, although the output rotating shaft of the electric motor 71 is coupled to the rotating shaft 75 through the speed reducer 73, instead of indirectly coupling the output rotating shaft of the electric motor 71 to the rotating shaft 75 in this way, the output rotating shaft of the electric motor 71 may be directly coupled to the rotating shaft 75, or the output rotating shaft of the electric motor 71 may be used as the rotating shaft 75.

[0041] The guide mechanism 56 has two pairs of guide walls 81 and 82 extending vertically and formed integrally on a sidewall portion 80 of the vertical frame 2, as well as chain guides 83 and 84 secured to the bracket 77 and disposed around the outer periphery of the sprocket wheel 76. The chain 51 travels by passing along the path between the respective pairs of guide walls 81 and 82, between the chain guide 83 and the sprocket wheel 76, and between the chain guides 83 and 84, and its deflection is prevented by the two pairs of guide walls 81 and 82 and the chain guides 83 and 84.

[0042] The tilting mechanism 11 includes the rotating body 78 provided rotatably on the rotating shaft 75 by means of a bearing 90 (see Fig. 8); an attaching member 91 through which the rotating shaft 75 is passed and which is secured to the rotating body 78 so as to rotate

together with the rotation of the rotating body 78; and a clutch mechanism 92 for causing the rotating body 78 to rotate as the chain 51 travels in the directions A and B.

[0043] The clutch mechanism 92 has a pawl member 94 attached rotatably to the rotating body 78 through a shaft 93; an engaging pin 95 supported by the vertical frame 2 through a bracket or the like so as to allow the pawl member 94 to engage therewith; and an engaging projection 96 provided on the chain 51 and adapted to abut against the pawl member 94 so as to cancel the engagement of the pawl member 94 with the engaging pin 95.

[0044] The pawl member 94 integrally has a pawl portion 98 having a recess 97 for engaging the engaging pin 95, as well as an abutment portion 99 (see Fig. 8) for abutting against the engaging projection 96. A notch 101 is formed in the rotating body 78 for allowing the engaging projection 96 to approach the abutment portion 99 for the abutment of the engaging projection 96 against the abutment portion 99.

[0045] In the traveling of the chain 51 in the direction A, the clutch mechanism 92 rotates the pawl member 94 by the abutment of the engaging projection 96 against the abutment portion 99 to cancel the mutual engagement between the recess 97 of the pawl portion 98 and the engaging pin 95, thereby setting the rotating body 78 in a rotatable state. Subsequently, the rotating body 78 is rotated together with the traveling of the chain 51 in the direction A. Meanwhile, in the traveling of the chain 51 in the direction B opposite to the direction A, the clutch mechanism 92 rotates the pawl member 94 by cancellation of the abutment of the engaging projection 96 against the abutment portion 99 to allow the recess 97 of the pawl portion 98 and the engaging pin 95 to engage each other. The rotating body 78 is thereby fixed to the vertical frame 2 by means of the engaging pin 95 so as to be unrotatable.

[0046] As the engaging projection 96 abuts against the abutment portion 99 when the chain 51 travels in the direction A, the tilting mechanism 11 swings the attaching member 91 counterclockwise in Fig. 3 by means of the rotating body 78, and lowers the upper end portion 27 of the belt-shaped body 21, while raising the upper end portion 31 of the belt-shaped body 25. On the other hand, as the abutment of the engaging projection 96 against the abutment portion 99 is canceled when the chain 51 travels in the direction B, the tilting mechanism 11 swings the attaching member 91 clockwise in Fig. 3 by means of the rotating body 78, and raises the upper end portion 27 of the belt-shaped body 21, while lowering the upper end portion 31 of the belt-shaped body 25.

[0047] In the above-described window blind apparatus 1, when the chain 51 has traveled in the direction A, in the state in which, as shown in Fig. 10, the engaging projection 96 provided on the chain 51 is disposed in the notch 101 and abuts against the abutment portion 99 of the pawl member 94 to lower the upper end portion 27 of the belt-shaped body 21, while raising the upper end

portion 31 of the belt-shaped body 25, as shown in Fig. 7, the lowermost arm member 22 is urged downward by means of the connecting arm member 65 and the pin member 64 by the torsion coil spring 66, and the belt-shaped bodies 21 and 25 are stretched straightly. Consequently, as shown in Fig. 7, the respective slats 9 are tilted substantially vertically and completely close the opening P between the vertical frames 2 and 3. In addition, when the electric motor 71 is operated in this state, the sprocket wheel 76 is rotated by the rotation of the rotating shaft 75 through the speed reducer 73, thereby causing the chain 51 to travel in the direction B.

[0048] As the chain 51 travels in the direction B, the engaging projection 96 is also moved clockwise about the rotating shaft 75. As the engaging projection 96 is thus moved, the rotating body 78 is also moved or rotated clockwise, as shown in Fig. 9. As the rotating body 78 is thus moved, the upper end portion 27 of the belt-shaped body 21 is pulled upward, while the upper end portion 31 of the belt-shaped body 25 is lowered downward. Thus, as the belt-shaped bodies 21 and 25 are respectively raised and lowered differentially, as shown in Figs. 3 and 4, the end portion 6 of each arm member 22 is lifted upward relative to the end portion 7 thereof. As the respective arm members 22 are thereby rotated clockwise, each of the slats 9 are also rotated to the substantially horizontal position and set in the form of a rattan blind, as shown in Figs. 1, 3 and 4.

[0049] As the chain 51 is made to further travel in the direction B, the engaging projection 96 starts to be disengaged from the notch 101, and as the engaging projection 96 is disengaged from the notch 101, the engaging projection 96 then abuts against the pawl portion 98 and rotates the pawl member 94 about the shaft 93, causing the recess 97 of the pawl portion 98 and the engaging pin 95 to engage with each other. As shown in Fig. 8, as the recess 97 of the pawl portion 98 is engaged with the engaging pin 95, the rotation of the rotating body 78 is prevented and is held in that state.

[0050] As the chain 51 continues to travel in the direction B, the lowermost arm member 22 connected to the end portion 53 of the chain 51 by the connecting mechanism 54 starts to be raised. At the same time, the belt-shaped bodies 21 and 25 start to be deflected from their lower portions, and the slats 9 are consecutively superposed on top of each other starting with the lower ones, as shown in Fig. 11. It should be noted that although, in Fig. 11, the deflected belt-shaped bodies 21 and 25 are shown jutting out in the lateral direction due to their slight resiliency for the sake of explanation, in a case where they practically do not have resiliency, they droop down. When the slats 9 are completely superposed in an upper portion of the opening P, the operation of the electric motor 71 is stopped by a signal from a detector or the like, and the state in which the opening P is completely open is maintained.

[0051] If the electric motor 71 is operated in the opposite direction to the one described above in the state in

which the opening P is completely open or in the state in which the opening P is halfway open, the chain 51 is caused to travel in the direction A. As a result, the belt-shaped bodies 21 and 25 start to be extended beginning with their uppermost portions, and the superposition of the slats 9 starts to be canceled beginning with the upper ones. When the deflection of the belt-shaped bodies 21 and 25 is totally canceled and the superposition of the slats 9 is totally canceled, the engaging projection 96 starts to be inserted in the notch 101, as shown in Fig. 8. As a result of this insertion, as shown in Fig. 9, the engaging projection 96 abuts against the abutment portion 99 of the pawl member 94 and rotates the pawl member 94, canceling the engagement of the recess 97 with the engaging pin 95. As a result of this cancellation, together with the movement of the engaging projection 96 the rotating body 78 is rotated counterclockwise in the opposite direction to the one described above, as shown in Fig. 10. Hence, the upper end portion 31 of the belt-shaped body 25 is pulled upward, while the upper end portion 27 of the belt-shaped body 21 is pulled downward. As the belt-shaped bodies 21 and 25 are respectively raised and lowered differentially in this manner, relative displacement occurs in the belt-shaped bodies 21 and 25. The slats 9 which are supported by the belt-shaped bodies 21 and 25 by means of the slat supporting mechanisms 8 are thereby tilted in the opposite direction, and completely close the opening P, as shown in Fig. 7. Subsequently, the operation of the electric motor 71 is stopped by a signal from the detector or the like, and the state in which the opening P is completely closed is maintained.

[0052] In the window blind apparatus 1, after the opening P has been completely closed, the operation of the electric motor 71 is not stopped immediately. Even if the chain 51 is further made to travel slightly in the direction A, the connecting arm member 65 itself connected rotatably to the end portion 53 of the chain 51 through the pin member 64 rotates about the pin member 61 against the resiliency of the torsion coil spring 66, and linearly moves with respect to the pin member 61. This arrangement ensures that further downward movement of the lowermost arm member 22 does not occur.

[0053] With the above-described window blind apparatus 1 having combinations of the link mechanisms 4 and 5 as well as the slat supporting mechanisms 8, the link mechanisms 4 and 5 are respectively comprised of the flexible belt-shaped bodies 21 and 25 and the shaft members 23 and 26 to which the belt-shaped bodies 21 and 25 are secured and which are rotatably connected to the end portions 6 and 7 of the respective arm members 22, instead of a pair of chains of rigid link members which are linked in chain forms so as to be rotatable by means of shafts. Therefore, the link mechanisms 4 and 5 can be assembled in a short time. Moreover, the link mechanisms 4 and 5 can be made lightweight, so that not a very large force is required for raising and lowering the slats 9, thereby making it possible to easily effect the

raising and lowering of the slats 9.

[0054] In the above-described embodiment, the traveling body is not limited to the chain 51 with ends having the end portions 53 and 52, and may be an endless chain. In that case, it suffices if another sprocket wheel disposed in addition to the sprocket wheel 76, and the endless chain is wound around and trained between the two sprocket wheels. The guide mechanism 56 can be omitted if such an endless chain is used as the traveling body. In addition, a timing belt or the like may be used as the traveling body. In the case where the timing belt is used, it suffices if a toothed pulley is used instead of the sprocket wheel 76. In addition, the transmitting means 72 may be configured by omitting the speed reducer 73, in which case an electric motor 71 whose speed is controllable may be used, as required.

[0055] In addition, in the link mechanisms 4 and 5, the belt-shaped bodies 21 and 25 at their lower end portions 29 and 33 are respectively passed through the shaft members 23 and 26 and are terminated outside the shaft members 23 and 26. Alternatively, the belt-shaped bodies 21 and 25 at their lower end portions 29 and 33 may be terminated inside the cylindrical portions 46 of the shaft members 23 and 26. Still alternatively, as shown in Figs. 12(a) and 12(b), each of the shaft members 23 and 26 may be formed by an integrally molded piece made of a synthetic resin and having, in addition to the cylindrical portion 46 and the shaft portion 47, a pair of rectangular projecting portions 115 and 116 disposed symmetrically about the axis of the cylindrical portion 46 and formed integrally with the cylindrical portion 46. In this case, each of the belt-shaped bodies 21 and 25 is integrally secured to the cylindrical portion 46 and the pair of rectangular projecting portions 115 and 116, and is passed through the cylindrical portion 46 and the pair of rectangular projecting portions 115 and 116. Furthermore, although the link mechanisms 4 and 5 are respectively formed by the two continuous belt-shaped bodies 21 and 25 in the above-described embodiment, the link mechanisms 4 and 5 may be alternatively formed by respectively having a plurality of belt-shaped pieces 111 and 112 which are respectively terminated inside the shaft members 23 and 26 respectively fitted rotatably in the corresponding end portions 6 and 7 of pairs of vertically adjacent arm members 22, as shown in Figs. 13(a) and 13(b). In this case, the belt-shaped pieces 111 and 112 excluding upper end portions 113 (corresponding to the upper end portions 27 and 31) of the uppermost belt-shaped pieces 111 and 112 and lower end portions 114 (corresponding to the lower end portions 29 and 33) of the lowermost belt-shaped pieces 111 and 112 are secured to the respective cylindrical portions 46 of the shaft members 23 and 26 at their upper end portions 113 and lower end portions 114, and are terminated inside the cylindrical portions 46. The uppermost belt-shaped pieces 111 and 112 are secured to the shaft members 28 and 32 at their upper end portions 113, while the lowermost belt-shaped pieces 111 and 112 are secured at

their lower end portions 114 to the respective cylindrical portions 46 of the lowermost shaft members 23 and 26, and are terminated inside the cylindrical portions 46. In the case of such belt-shaped pieces 111 and 112, it suffices if the shaft members 23 and 26 such as those shown in Figs. 12(a) and 12(b) are used.

[0056] With the above-described window blind apparatus 1, the arrangement provided is such that the slats 9 are consecutively raised starting with the lowermost one by raising the arm member 22 of the lowermost slat supporting mechanism 8 by the raising and lowering mechanism 10, so as to set the opening P in the open state. Alternatively, an arrangement may be provided such that, as shown in Figs. 14 and 15, the raising and lowering mechanism 10 is connected to the uppermost arm member 22, and the slats 9 are consecutively raised starting with the uppermost one by raising the uppermost arm member 22, so as to set the opening P in the closed state.

[0057] Namely, with the raising and lowering mechanism 10 in the window blind apparatus 1 shown in Figs. 14 and 15, the end portion 53 of the chain 51 whose traveling in the directions A and B is guided by the guide mechanism 56 is rotatably connected to a pin member 121. The pin member 121 is disposed concentrically with the shaft portion 36 of the uppermost slat supporting mechanism 8, is secured to that shaft portion 36, and is provided in such a manner as to project from the arm plate 42. As the chain 51 travels in the direction A or B by the operation of the electric motor 71, the end portion 53 is lowered or raised. This causes the arm member 22 of the uppermost slat supporting mechanism 8 to be similarly lowered or raised by means of the pin member 121. Here, the arm member 22 of the lowermost slat supporting mechanism 8 is adapted to be resiliently pulled downward by a pulling mechanism 125 which includes a slider member 122 connected rotatably to the pin member 61 and disposed in the guide slit 15 so as to guide its vertical movement, as well as a coil spring 124 having one end connected to the slider member 122 and the other end connected to a bottom wall portion 123 of the vertical frame 2.

[0058] In addition, the tilting mechanism 11 in the window blind apparatus 1 shown in Figs. 14 and 15 includes a cam roller 132 provided rotatably on a shaft member 131; a cam projection 134 provided integrally on a front wall portion 133 of the vertical frame 2; and a cam face member 136 provided integrally on the front wall portion 133 of the vertical frame 2 in such a manner as to extend vertically below the cam projection 134 with a recess 135 formed therebetween. The shaft member 131 is disposed concentrically with the shaft member 23 on the end portion 6 side of the uppermost arm member 22, is secured to the shaft portion 47 of that shaft member 23, and is provided projectingly from the arm plate 42. The upper end portion 27 of the belt-shaped body 21 of the link mechanism 4 is secured to the uppermost shaft member 23 and is terminated inside the cylindrical portion 46 of

that shaft member 23. Meanwhile, the upper end portion 31 of the belt-shaped body 25 of the link mechanism 5 is secured to the uppermost shaft member 26 and is terminated inside the cylindrical portion 46 of that shaft member 26.

[0059] In the window blind apparatus 1 shown in Figs. 14 and 15, in the state in which the opening P is open, as shown in Fig. 17, the belt-shaped bodies 21 and 25 are deflected, the cam roller 132 is in contact with the cam face member 136, and the respective slats 9 are closely superposed on top of each other (stacked) in a lower position. At the time of closing the opening P, the electric motor 71 is first operated, and as its output rotating shaft rotates, the sprocket wheel 76 is rotated. This causes the chain 51 to travel in the direction B, and the belt-shaped bodies 21 and 25 are extended from their upper end sides, so that the arm members 22 are also raised upward starting with the uppermost one, as shown in Fig. 17. Consequently, the respective slats 9 supported by the arm members 22 are consecutively raised in the closing direction. When the cam roller 132 is being guided in contact with the cam face member 136, the slats 9 are held in a substantially horizontally tilted state.

[0060] As the chain 51 travels further in the direction B, the belt-shaped bodies 21 and 25 are fully extended at a position immediately before the complete closure of the opening P. Meanwhile, the lowermost arm member 22 is slightly raised against the resiliency of the coil spring 124 by means of the belt-shaped bodies 21 and 25. Then, when the cam roller 132 faces the recess 135 and undergoes a shift from abutment against the cam face member 136 to abutment against the cam projection 134, as shown in Fig. 16, the uppermost arm member 22 starts to be rotated, and the upper end portion 31 of the belt-shaped body 25 comes to be lifted more than the upper end portion 27 of the belt-shaped body 21. Consequently, the uppermost slat 9 is rotated counterclockwise, and the counterclockwise rotation of the uppermost arm member 22 is transmitted to the lower arm members 22 by means of the belt-shaped body 21 and the belt-shaped body 25, thereby holding all the slats 9 in a substantially vertically tilted state. As a result, the opening P is fully closed by the slats 9. Subsequently, the operation of the electric motor 71 is stopped, and the closing operation is completed. Even if the stopping of the operation of the electric motor 71 is slightly delayed, and the lowermost arm member 22 is pulled further upward in a state where the belt-shaped bodies 21 and 25 are fully extended, the lowermost slider member 122 urged resiliently downward by the coil spring 124 moves upward. Therefore, even if the stopping of the operation of the electric motor 71 is delayed, the belt-shaped bodies 21 and 25 do not become damaged.

[0061] When the opening P is opened, the electric motor 71 is operated in the opposite direction to the one described above, and the cam roller 132 thereby undergoes a shift from abutment against the cam projection 134 to abutment against the cam face member 136, con-

secutively deflecting the belt-shaped bodies 21 and 25 starting with their lower portions.

[0062] Also with the above-described window blind apparatus 1 shown in Figs. 14 and 15, the link mechanisms 4 and 5 are respectively comprised of the flexible belt-shaped bodies 21 and 25 as well as the shaft members 23 and 26 in which the belt-shaped bodies 21 and 25 are inserted and secured and which are rotatably connected to the end portions 6 and 7 of the respective arm members 22. Therefore, the link mechanisms 4 and 5 can be assembled in a short time. Moreover, the link mechanisms 4 and 5 can be made lightweight, so that not a very large force is required for raising and lowering the slats 9, thereby making it possible to easily effect the raising and lowering of the slats 9.

[0063] Although, in the above-described raising and lowering mechanism 10, the electric motor 71 is provided to raise the slats 9 automatically, the raising and lowering mechanism 10 may be alternatively arranged to raise the slats 9 manually.

[0064] In addition, although the above-described window blind apparatus 1 is constructed by using the slats 9 formed of hollow bodies, the window blind apparatus 1 may be alternatively constructed by using the slats 9 each having a plate-like curved slat body 151 and a hollow rectangular portion 153 formed integrally on one surface 152 of the slat body 151, as shown in Figs. 18 and 19. In this case, the fitting portion 38 of the slat supporting mechanism 8 is fitted in a hollow portion 154 formed by the rectangular portion 153 in each of the end portions 39 and 49 of the slat 9 shown in Figs. 18 and 19, so as to support such a slat 9. According to the slat 9 shown in Figs. 18 and 19, its further lightweight can be attained, so that not a very large force is required for raising and lowering the slats 9, thereby making it possible to easily effect the raising and lowering of the slats 9. Moreover, the slats 9 can be fabricated easily.

Claims

1. A blind apparatus, comprising:

- a first link mechanism (4);
- a second link mechanism (5) juxtaposed to the first link mechanism (4);
- a plurality of slat supporting mechanisms (8) each having one end portion (6) connected to the first link mechanism (4) and another end portion (7) connected to the second link mechanism (5);
- slats (9) respectively supported by the slat supporting mechanisms (8);
- a raising and lowering mechanism (10) for raising and lowering the slats (9); and
- a tilting mechanism (11) for tilting the slats (9) by causing the first and second link mechanisms (4, 5) to undergo relative positional changes as

the slats (9) are raised or lowered by the raising and lowering mechanism (10),

- wherein each of the slat supporting mechanisms (8) has an arm member (22) for supporting an end portion of the slat (9) substantially at a central portion of the arm member (22),
- wherein the first link mechanism (4) has a flexible belt-shaped body (21) and shaft members (23) to which the belt-shaped body (21) is secured and which are each rotatably connected to one end portion (6) of each of the arm members (22), and
- wherein the second link mechanism (5) has a flexible belt-shaped body (25) and shaft members (26) to which the belt-shaped body (25) is secured and which are each rotatably connected to another end portion (7) of each of the arm members (22),

characterized in that each of the arm members (22) has an arm body (35) made of a synthetic resin and an arm plate (42) fitted to the arm body (35) in a snapfit fashion,

and in that each of the shaft members (23, 26) is disposed in such a manner as to be sandwiched between the arm body (35) and the arm plate (42).

2. The blind apparatus according to claim 1, wherein each of the belt-shaped bodies (21, 25) is fabricated from one continuous belt-shaped member, and the belt-shaped member is passed through the shaft members (23, 26) which are respectively fitted rotatably in corresponding end portions (6, 7) of the arm members (22).
3. The blind apparatus according to claim 1 or 2, wherein each of the belt-shaped bodies (21, 25) is fabricated from a belt of a woven fabric or a knit fabric of yarn made of a synthetic resin such as polyester, or a belt of a nonwoven fabric made of a synthetic resin.
4. The blind apparatus according to any one of claims 1 to 3, wherein each of the shaft members (23, 26) is formed by an integrally molded piece made of synthetic resin and including a cylindrical portion (46) and a pair of shaft portions (47) respectively disposed on opposite end faces of the cylindrical portion (46), and is rotatably fitted at the shaft portion (47) thereof in the corresponding end portion (6, 7) of each of the arm members (22), wherein each of the belt-shaped bodies (21, 25) is integrally secured to the cylindrical portion (46) and passed through the cylindrical portion (46).
5. The blind apparatus according to claim 4, wherein each of the shaft members (23, 26) is formed

by an integrally molded piece made of a synthetic resin and further has a pair of rectangular projecting portions (115, 116) disposed at symmetrical positions with respect to an axis of the cylindrical portion (46), and wherein each of the belt-shaped bodies (21, 25) is integrally secured to the cylindrical portion (46) and the pair of rectangular projection portions (115, 116), and is passed through the cylindrical portion (46) and the pair of rectangular projecting portions (115, 116).

6. The blind apparatus according to claim 1, wherein each of the belt-shaped bodies (21, 25) has a plurality of belt-shaped pieces (111, 112) which are respectively terminated inside the shaft members (23, 26) respectively fitted rotatably in corresponding end portions (6, 7) of pairs of vertically adjacent ones of the arm members (22).
7. The blind apparatus according to any one of claims 1 to 6, wherein each of the slats (9) has a hollow portion, and each of the slat supporting mechanisms (8) further has a fitting portion (38) provided in a substantially central portion of each of the arm members (22) and fitted in the hollow portion (40) in the end portion (39) of each of the slats (9).
8. The blind apparatus according to any one of claims 1 to 7, wherein the raising and lowering mechanism (10) is connected to a lowermost one of the arm members (22), and is adapted to raise the slats (9) by raising the lowermost one of the arm members (22).
9. The blind apparatus according to any one of claims 1 to 7, wherein the raising and lowering mechanism (10) is connected to an uppermost one of the arm members (22), and is adapted to raise the slats (9) by raising the uppermost one of the arm members (22).
10. A combination of slat supporting mechanisms (8) and first and second link mechanisms (4, 5) in the blind apparatus according to any one of claims 1 to 9, wherein each of the slat supporting mechanisms (8) has an arm member (22) for supporting an end portion of the slat (9) substantially at a central portion of the arm member (22), and each of the link mechanisms (4, 5) has a flexible belt-shaped body (21, 25) and shaft members (23, 26) to which the belt-shaped body (21, 25) is secured and which are each rotatably connected to an end portion (6, 7) of each of the arm members (22).

Patentansprüche

1. Jalousievorrichtung, die folgendes aufweist:

- 5 - einen ersten Verbindungsmechanismus (4);
- einen zweiten Verbindungsmechanismus (5), der neben dem ersten Verbindungsmechanismus (4) angeordnet ist;
- eine Vielzahl von Lamellenhalterungsmechanismen (8), von denen jeweils ein Endbereich (6) mit dem ersten Verbindungsmechanismus (4) verbunden ist, und ein anderer Endbereich (7) mit dem zweiten Verbindungsmechanismus (5) verbunden ist;
- 10 - Lamellen (9), die jeweils von den Lamellenhalterungsmechanismen (8) gehalten sind;
- einen Hebe- und Senkmechanismus (10), um die Lamellen (9) anzuheben und abzusenken; und
- 20 - einen Kippmechanismus (11), um die Lamellen (9) zu kippen, indem bewirkt wird, dass der erste und der zweite Verbindungsmechanismus (4, 5) relative Lageveränderungen erfahren, wenn die Lamellen (9) von dem Hebe- und Senkmechanismus (10) angehoben oder abgesenkt werden,
- 25 - wobei jeder der Lamellenhalterungsmechanismen (8) ein Armteil (22) besitzt, um einen Endbereich der Lamelle (9) im wesentlichen in einem mittleren Bereich des Armteils (22) zu halten,
- wobei der erste Verbindungsmechanismus (4) einen flexiblen gurtförmigen Körper (21) und Wellenteile (23) besitzt, an denen der gurtförmige Körper (21) befestigt ist und die drehbar mit einem Endbereich (6) von jedem der Armteile (22) verbunden sind, und
- wobei der zweite Verbindungsmechanismus (5) einen flexiblen gurtförmigen Körper (25) und Wellenteile (26) besitzt, an denen der gurtförmige Körper (25) befestigt ist und die drehbar mit einem anderen Endbereich (7) von jedem der Armteile (22) verbunden sind,
- dadurch gekennzeichnet,**
- dass** jedes der Armteile (22) einen aus Kunstharz hergestellten Armkörper (35) und eine Armplatte (42) besitzt, die mit einer Schnappverbindung an dem Armkörper (35) angebracht ist,
- und **dass** jedes der Wellenteile (23, 26) so angeordnet ist, dass es sandwichartig zwischen dem Armkörper (35) und der Armplatte (42) angebracht ist.
- 55 2. Jalousievorrichtung nach Anspruch 1, wobei jeder der gurtförmigen Körper (21, 25) aus einem durchgehenden gurtförmigen Teil hergestellt ist und wobei das gurtförmige Teil durch die Wellen-

- teile (23, 26) hindurchgeführt ist, die jeweils drehbar in entsprechenden Endbereichen (6, 7) des Armteils (22) eingepasst sind.
3. Jalousievorrichtung nach Anspruch 1 oder 2, wobei jeder der gurtförmigen Körper (21, 25) aus einem Gurt aus einem Gewebe oder Gewirk aus einem Garn aus Kunstharz, wie etwa Polyester, oder aus einem Gurt aus einem aus Kunstharz hergestellten Textilverbundstoff hergestellt ist.
4. Jalousievorrichtung nach einem der Ansprüche 1 bis 3, wobei jedes der Wellenteile (23, 26) aus einem integral aus einem Kunstharz hergestellten Formteil gebildet ist und einen zylindrischen Bereich (46) und ein Paar Wellenbereiche (47) aufweist, die jeweils an entgegengesetzten Endflächen des zylindrischen Bereichs (46) angeordnet sind, und drehbar an dessen Wellenbereich (47) im entsprechenden Endbereich (6, 7) von jedem der Armteile (22) angebracht ist, wobei jeder der gurtförmigen Körper (21, 25) integral an dem zylindrischen Bereich (46) befestigt und durch den zylindrischen Bereich (46) hindurchgeführt ist.
5. Jalousievorrichtung nach Anspruch 4, wobei jedes der Wellenteile (23, 26) aus einem integral aus einem Kunstharz hergestellten Formteil gebildet ist und darüber hinaus ein Paar von rechtwinkligen vorstehenden Bereiche (115, 116) besitzt, die bezüglich einer Achse des zylindrischen Bereichs (46) an symmetrischen Stellen angeordnet sind, und wobei jeder der gurtförmigen Körper (21, 25) integral an dem zylindrischen Bereich (46) und an dem Paar der rechtwinkligen vorstehenden Bereiche (115, 116) befestigt und durch den zylindrischen Bereich (46) und das Paar der rechtwinkligen vorstehenden Bereiche (115, 116) hindurchgeführt ist.
6. Jalousievorrichtung nach Anspruch 1, wobei jeder der gurtförmigen Körper (21, 25) eine Vielzahl von gurtförmigen Teilen (111, 112) besitzt, die jeweils im Inneren der Wellenteile (23, 26) enden, die jeweils drehbar in jeweiligen Endbereichen (6, 7) von Paaren von vertikal benachbarten Armteilen (22) angebracht sind.
7. Jalousievorrichtung nach einem der Ansprüche 1 bis 6, wobei jede der Lamellen (9) einen hohlen Bereich besitzt und wobei jeder der Lamellenhalterungsmechanismen (8) darüber hinaus einen Einpassbereich (38) besitzt, der in einem im wesentlichen mittleren Bereich von jedem der Armteile (22) vorgesehen und in den hohlen Bereich (40) im Endbereich (39) von jeder der Lamellen (9) eingepasst ist.
8. Jalousievorrichtung nach einem der Ansprüche 1 bis 7, wobei der Hebe- und Senkmechanismus (10) mit einem untersten der Armteile (22) verbunden und dazu ausgelegt ist, die Lamellen (9) anzuheben, indem das unterste der Armteile (22) angehoben wird.
9. Jalousievorrichtung nach einem der Ansprüche 1 bis 7, wobei der Hebe- und Senkmechanismus (10) mit einem obersten der Armteile (22) verbunden und dazu ausgelegt ist, die Lamellen (9) anzuheben, indem das oberste der Armteile (22) angehoben wird.
10. Kombination aus einem Lamellenhalterungsmechanismus (8) und einem ersten und einem zweiten Verbindungsmechanismus (4, 5) in einer Jalousievorrichtung nach einem der Ansprüche 1 bis 9, wobei jeder der Lamellenhalterungsmechanismen (8) ein Armteil (22) besitzt, um einen Endbereich der Lamelle (9) im wesentlichen in einem mittleren Bereich des Armteils (22) zu halten, und wobei jeder der Verbindungsmechanismen (4, 5) einen flexiblen gurtförmigen Körper (21, 25) und Wellenteile (23, 26) besitzt, an denen der gurtförmige Körper (21, 25) befestigt ist und die drehbar mit einem Endbereich (6, 7) von jedem der Armteile (22) verbunden sind.

Revendications

1. Store comprenant:

- un premier mécanisme de liaison (4);
- un second mécanisme de liaison (5) juxtaposé au premier mécanisme de liaison (4);
- une pluralité de mécanismes de support de lamelle (8) ayant chacun une partie d'extrémité (6) connectée au premier mécanisme de liaison (4) et une autre partie d'extrémité (7) connectée au second mécanisme de liaison (5);
- des lamelles (9) supportées respectivement par les mécanismes de support de lamelle (8);
- un mécanisme de montée et descente (10) pour lever et abaisser les lamelles (9); et
- un mécanisme d'inclinaison (11) pour incliner les lamelles (9) en faisant subir aux premier et second mécanismes de liaison (4, 5) des changements de position relatifs lorsque les lamelles (9) sont levées ou abaissées par le mécanisme de montée et descente (10),
- dans lequel chacun des mécanismes de support de lamelle (8) comporte un élément formant bras (22) destiné à supporter une partie d'extrémité de la lamelle (9) substantiellement en une partie centrale de l'élément formant bras (22),
- dans lequel le premier mécanisme de liaison (4) a un corps en forme de courroie souple (21)

- et des éléments formant axes (23) auxquels est fixé le corps en forme de courroie (21) et qui sont chacun connectés à rotation à une partie d'extrémité (6) de chacun des éléments formant bras (22), et
- dans lequel le second mécanisme de liaison (5) a un corps en forme de courroie souple (25) et des éléments formant axes (26) auxquels est fixé le corps en forme de courroie (25) et qui sont chacun connectés à rotation à une autre partie d'extrémité (7) de chacun des éléments formant bras (22),
- caractérisé en ce que** chacun des éléments formant bras (22) a un corps de bras (35) fait d'une résine synthétique et une plaque de bras (42) montée sur le corps de bras (35) en assemblage par pression,
- et en ce que** chacun des éléments formant axes (23, 26) est disposé de manière à être pris entre le corps de bras (35) et la plaque de bras (42).
2. Store selon la revendication 1, dans lequel chacun des corps en forme de courroie (21, 25) est fabriqué à partir d'un élément en forme de courroie continue, et l'élément en forme de courroie passe à travers les éléments formant axes (23, 26) qui sont montés à rotation respectivement dans des parties d'extrémité correspondantes (6, 7) des éléments formant bras (22).
 3. Store selon la revendication 1 ou 2, dans lequel chacun des corps en forme de courroie (21, 25) est fabriqué à partir d'une courroie en tissu ou en tricot à base de fil en résine synthétique comme du polyester, ou d'une courroie faite d'un non tissé en résine synthétique.
 4. Store selon l'une quelconque des revendications 1 à 3, dans lequel chacun des éléments formant axes (23, 26) est formé par une pièce moulée d'un seul tenant en résine synthétique et comprenant une partie cylindrique (46) et une paire de parties d'axe (47) disposées respectivement sur des faces d'extrémité opposées de la partie cylindrique (46), et est monté à rotation au niveau de la partie d'axe (47) de celui-ci dans la partie d'extrémité correspondante (6, 7) de chacun des éléments formant bras (22), dans lequel chacun des corps en forme de courroie (21, 25) est fixé intégralement à la partie cylindrique (46) et passe à travers la partie cylindrique (46).
 5. Store selon la revendication 4, dans lequel chacun des éléments formant axes (23, 26) est formé par une pièce moulée d'un seul tenant en résine synthétique et comporte en outre une paire de parties saillantes rectangulaires (115, 116) disposées en des positions symétriques par rapport à un axe de la partie cylindrique (46), et dans lequel chacun des corps en forme de courroie (21, 25) est fixé intégralement à la partie cylindrique (46) et à la paire de parties saillantes rectangulaires (115, 116), et passe à travers la partie cylindrique (46) et la paire de parties saillantes rectangulaires (115, 116).
 6. Store selon la revendication 1, dans lequel chacun des corps en forme de courroie (21, 25) comporte une pluralité de pièces en forme de courroie (111, 112) qui se terminent respectivement à l'intérieur des éléments formant axes (23, 26) respectivement montés à rotation dans des parties d'extrémité correspondantes (6, 7) de paires d'éléments formant bras verticalement adjacents (22).
 7. Store selon l'une quelconque des revendications 1 à 6, dans lequel chacune des lamelles (9) a une partie creuse, et chacun des mécanismes de support de lamelle (8) comporte en outre une partie d'assemblage (38) prévue dans une partie substantiellement centrale de chacun des éléments formant bras (22) et montée dans la partie creuse (40) de la partie d'extrémité (39) de chacune des lamelles (9).
 8. Store selon l'une quelconque des revendications 1 à 7, dans lequel le mécanisme de montée et descente (10) est connecté à un élément formant bras le plus bas parmi lesdits éléments formant bras (22), et est adapté pour lever les lamelles (9) en levant l'élément formant bras (22) le plus bas.
 9. Store selon l'une quelconque des revendications 1 à 7, dans lequel le mécanisme de montée et descente (10) est connecté à un élément formant bras le plus haut parmi lesdits éléments formant bras (22), et est adapté pour lever les lamelles (9) en levant l'élément formant bras (22) le plus haut.
 10. Association de mécanismes de support de lamelle (8) et de premier et second mécanismes de liaison (4, 5) dans le store selon l'une quelconque des revendications 1 à 9, dans lequel chacun des mécanismes de support de lamelle (8) comporte un élément formant bras (22) destiné à supporter une partie d'extrémité de la lamelle (9) substantiellement en une partie centrale de l'élément formant bras (22), et chacun des mécanismes de liaison (4, 5) a un corps en forme de courroie souple (21, 25) et des éléments formant axes (23, 26) auxquels est fixé le corps en forme de courroie (21, 25) et qui sont connectés chacun à rotation à une partie d'extrémité (6, 7) de chacun des éléments formant bras (22).

FIG. 1

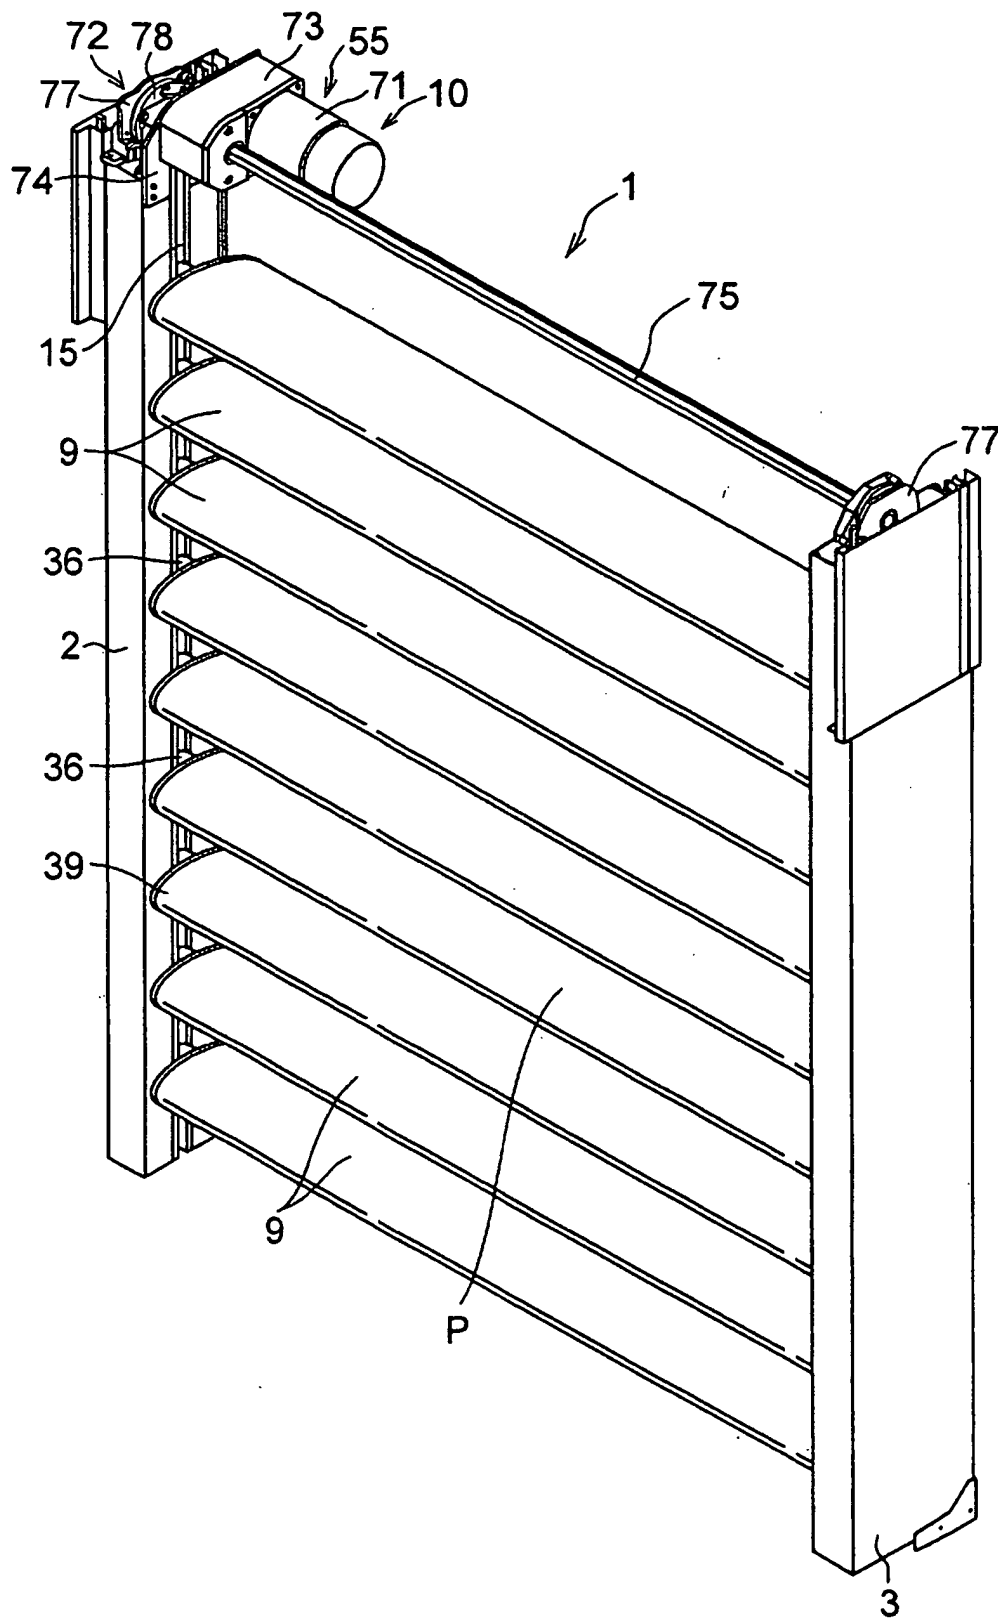


FIG. 2

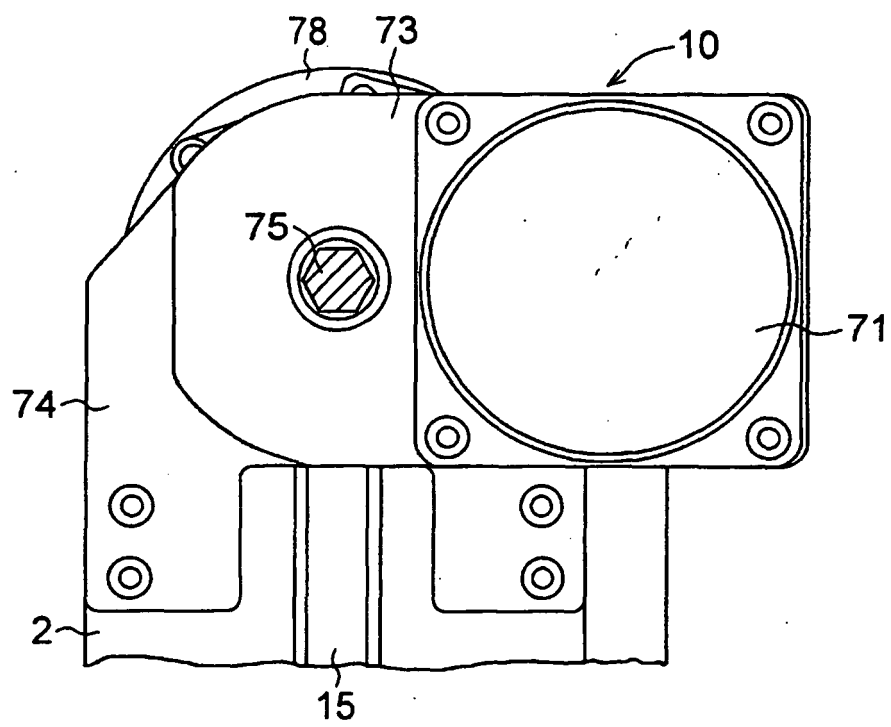


FIG. 3

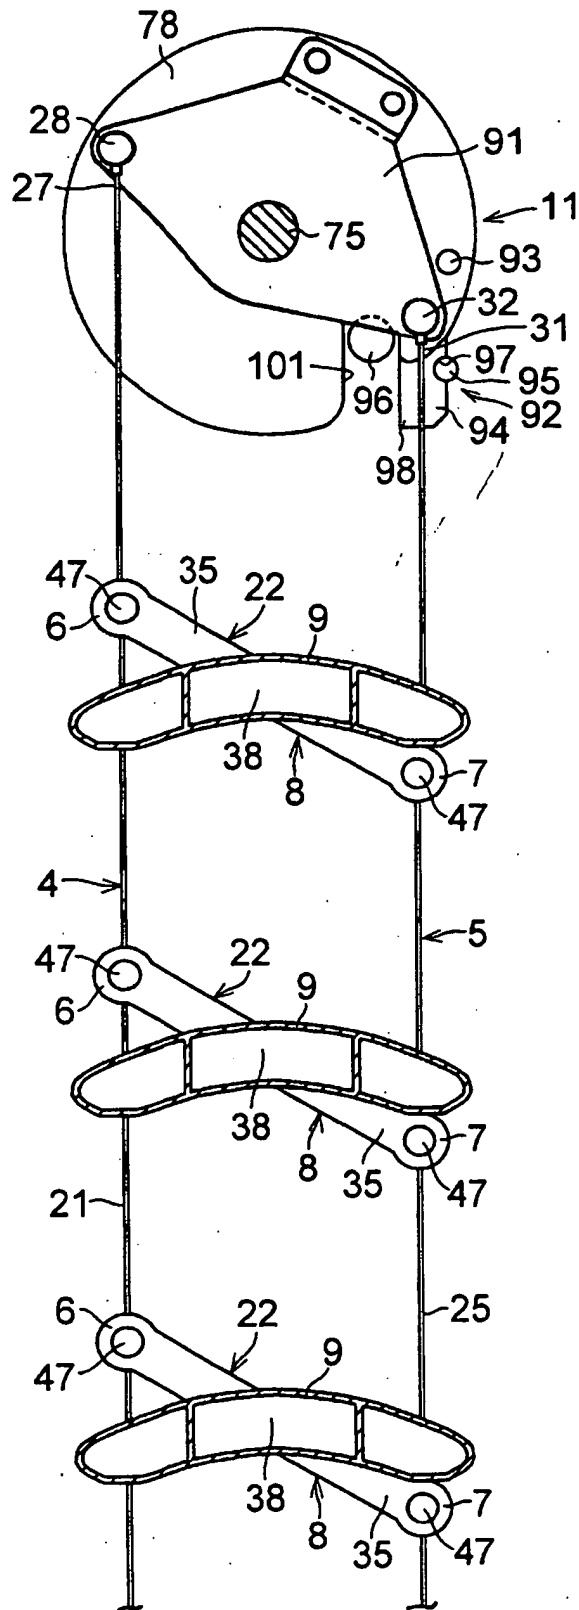


FIG. 4

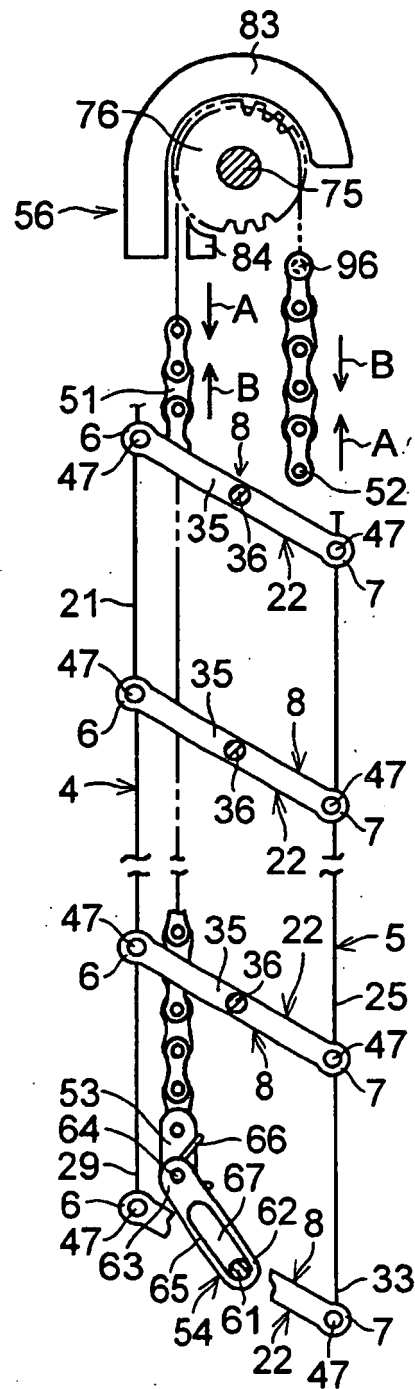


FIG. 5

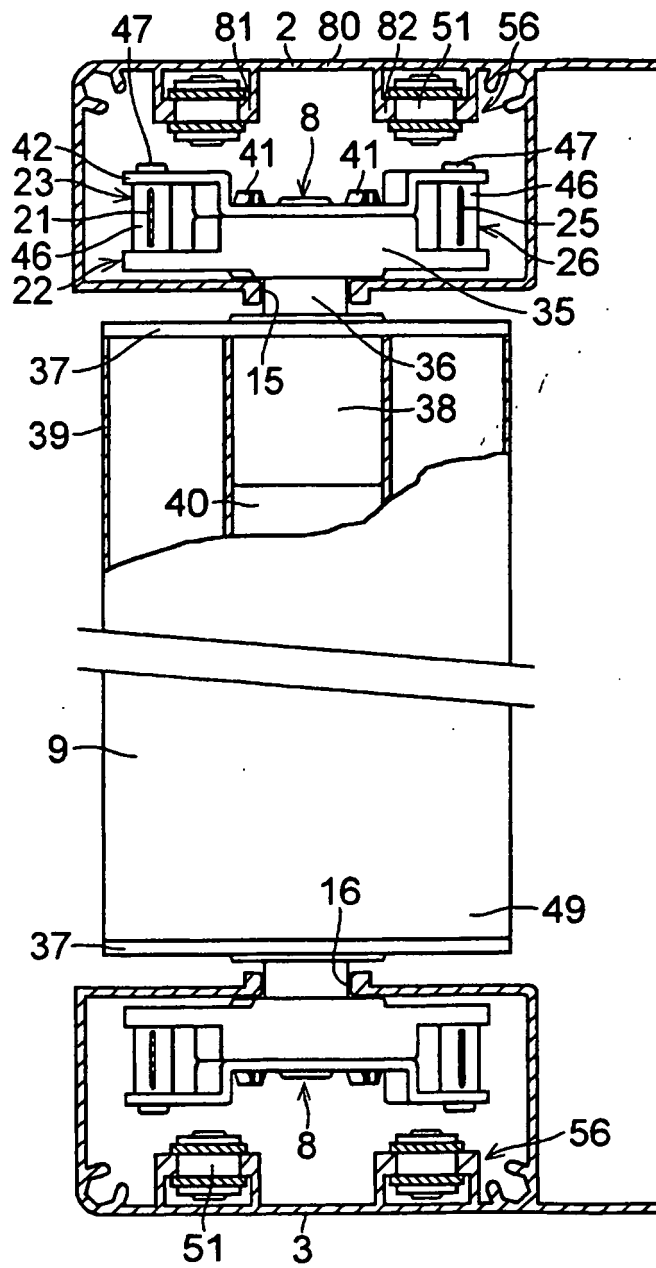


FIG. 6

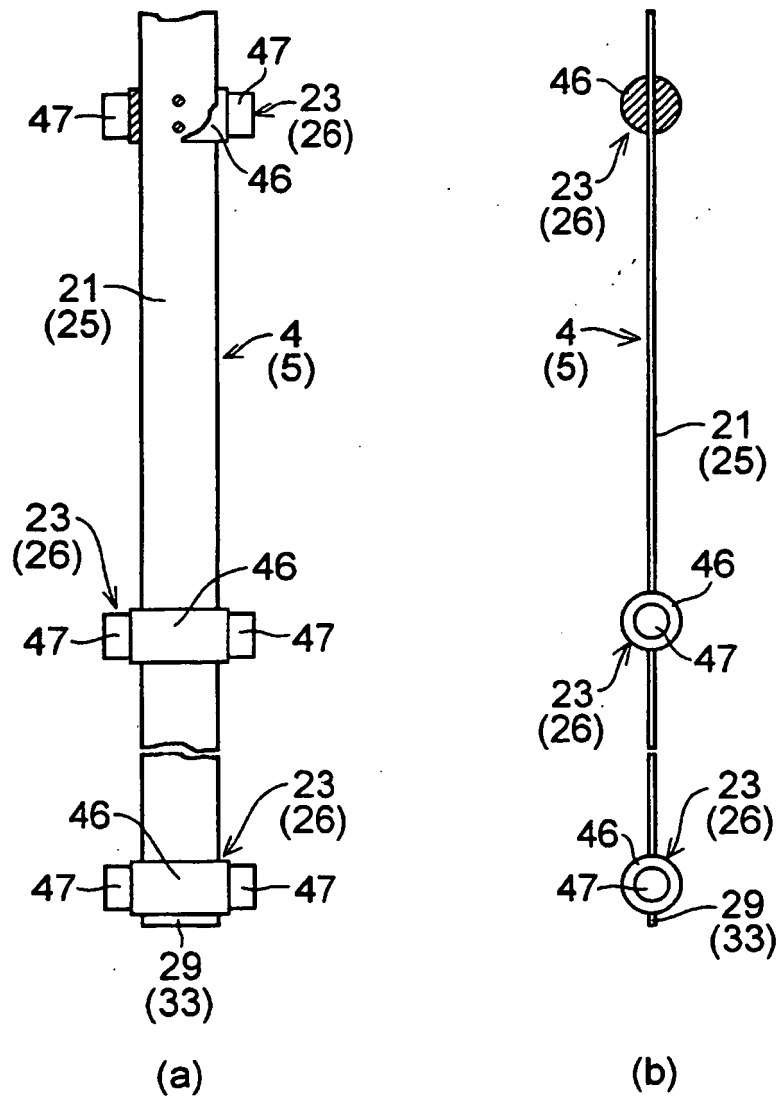


FIG. 7

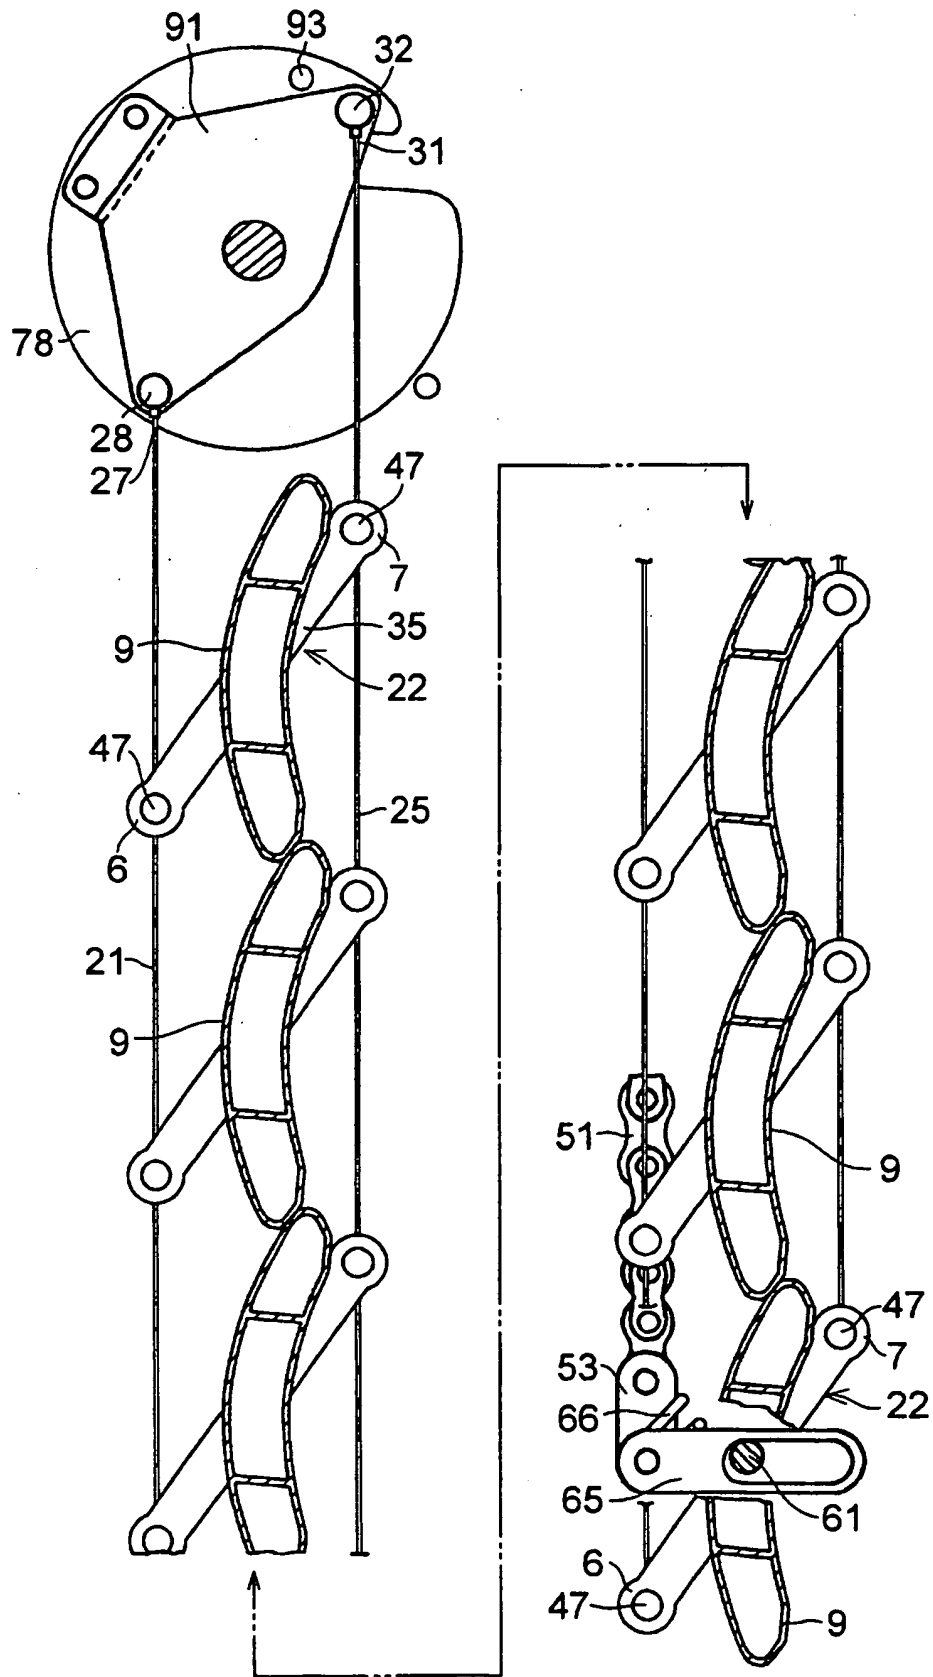


FIG. 8

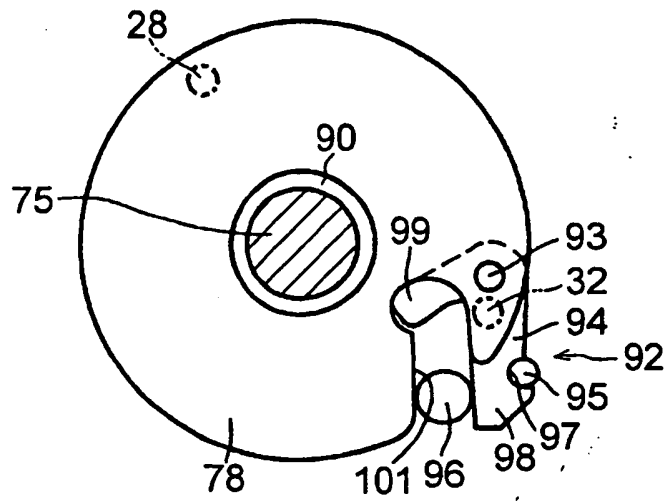


FIG. 9

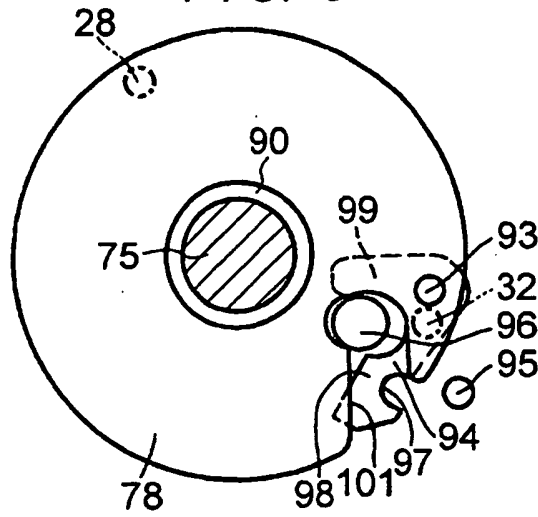


FIG. 10

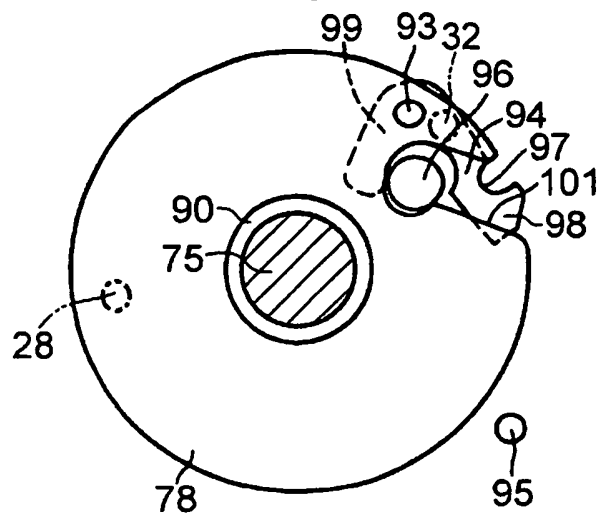


FIG. 11

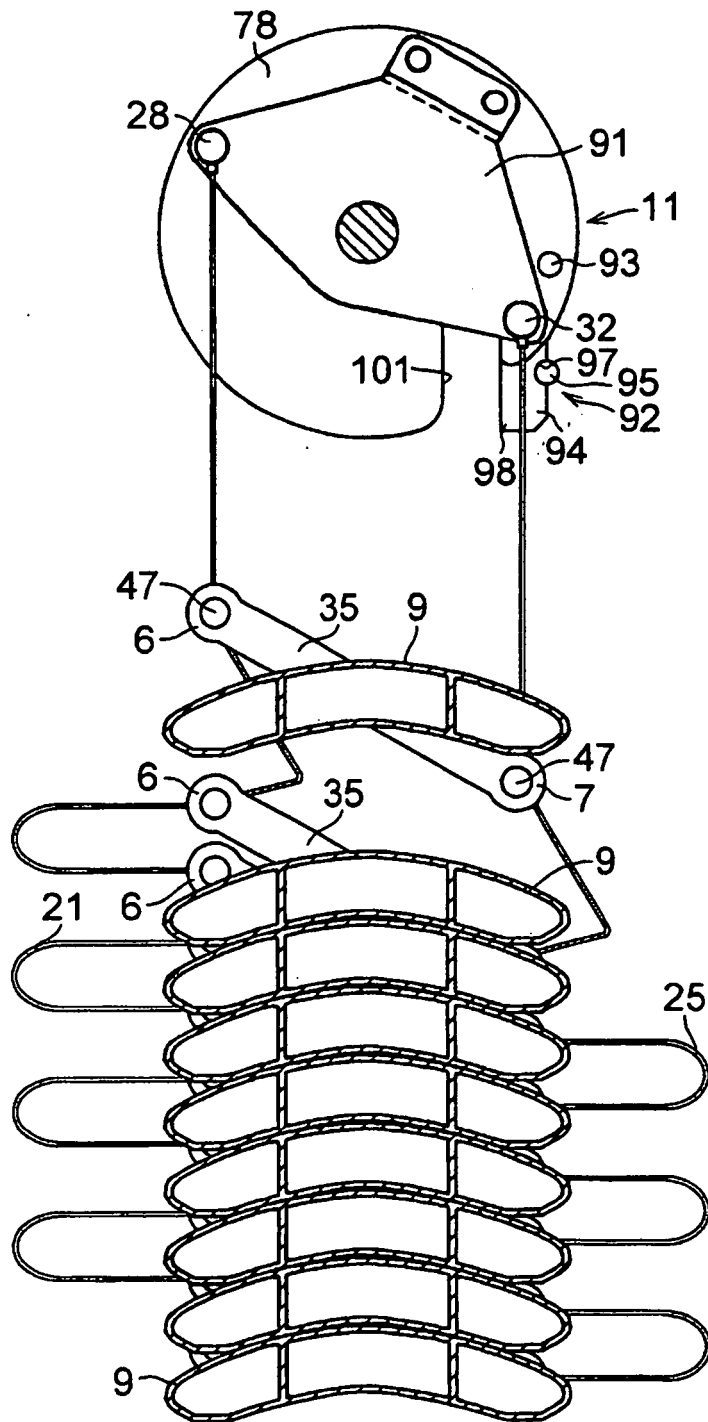


FIG. 12

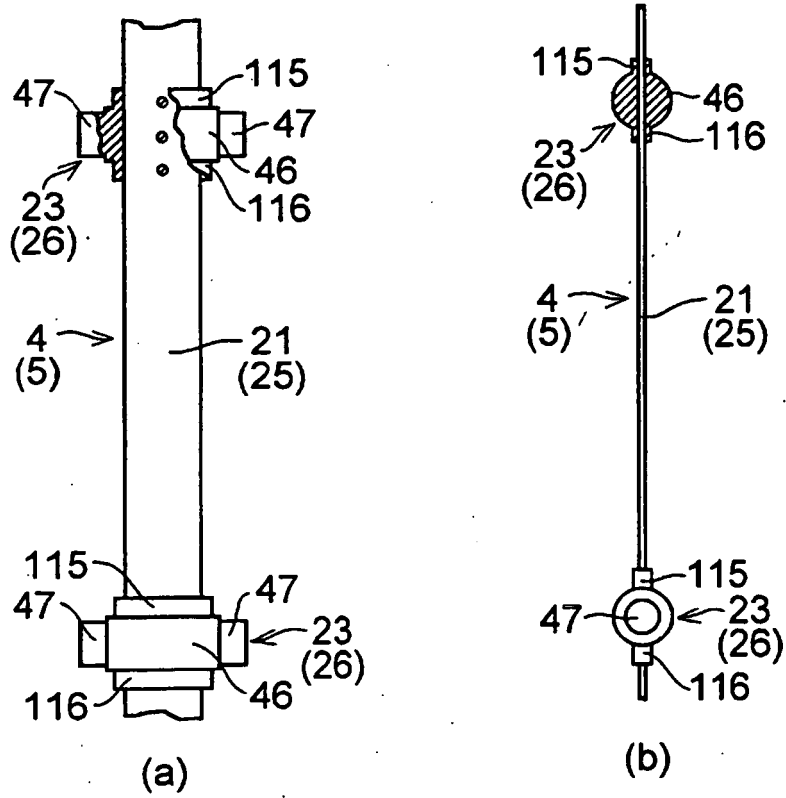


FIG. 13

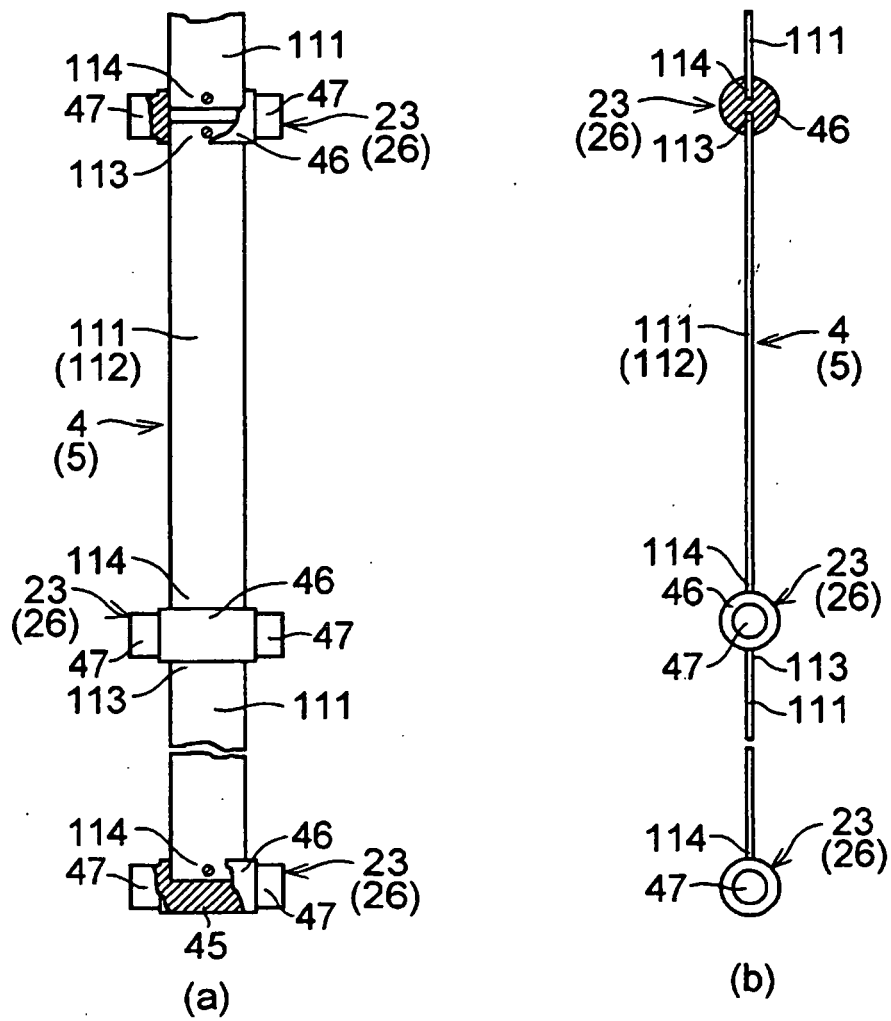


FIG. 14

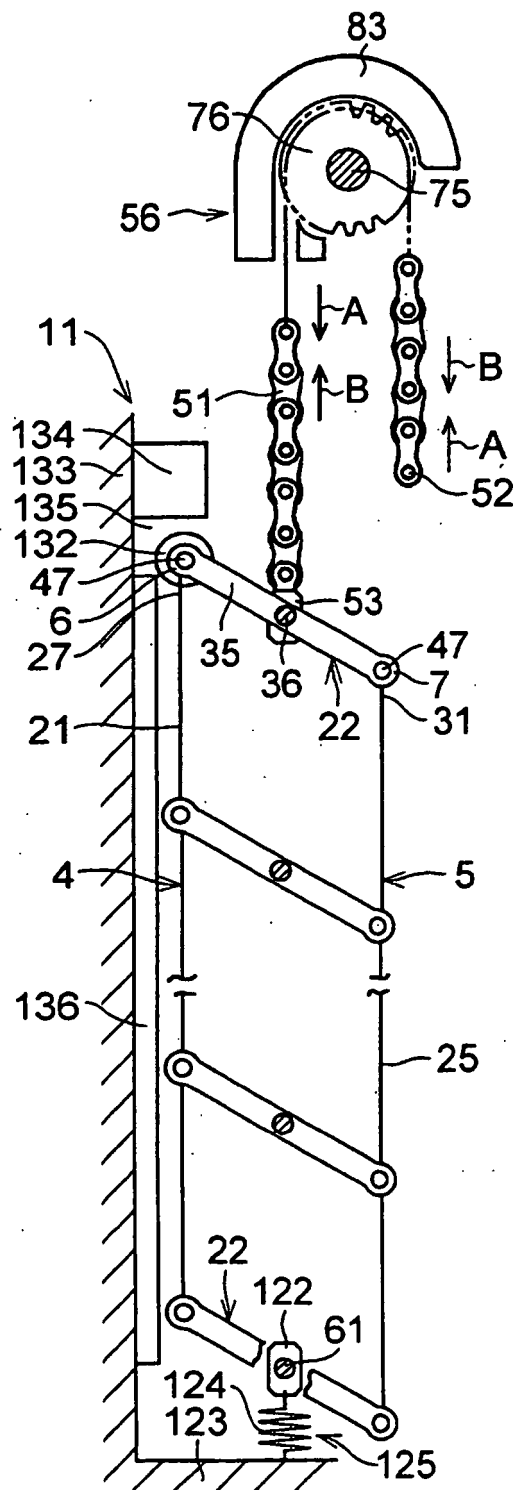


FIG. 15

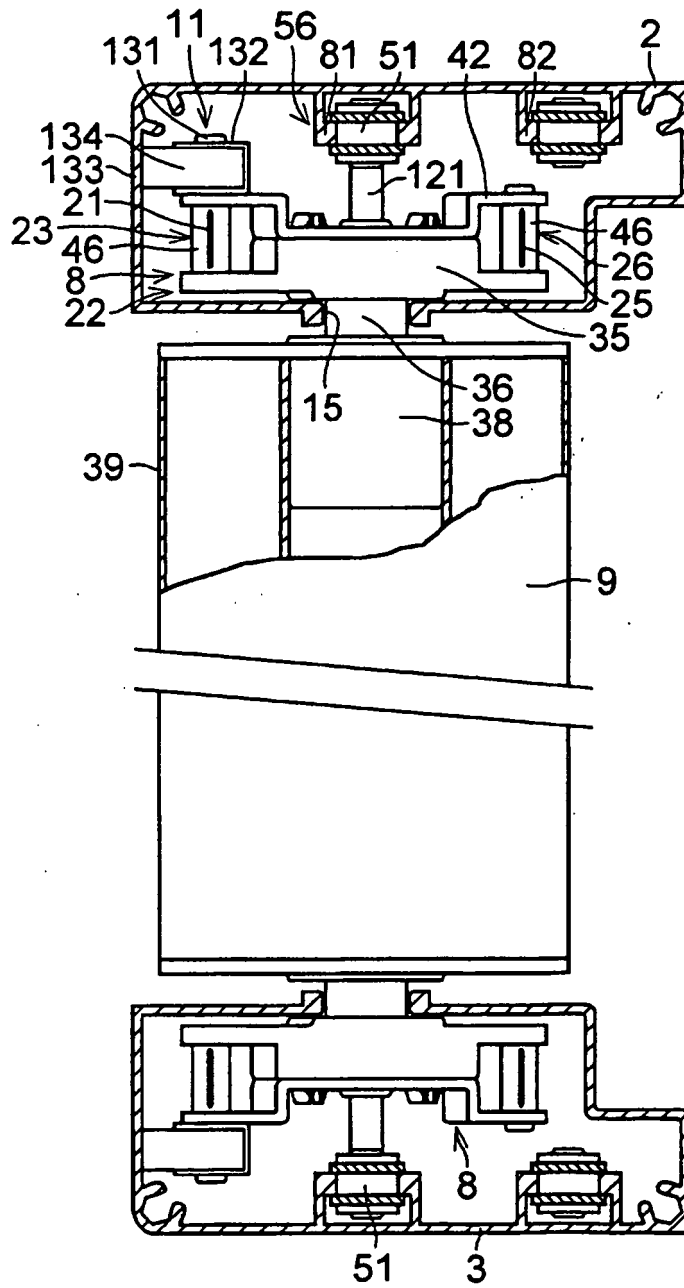


FIG. 16

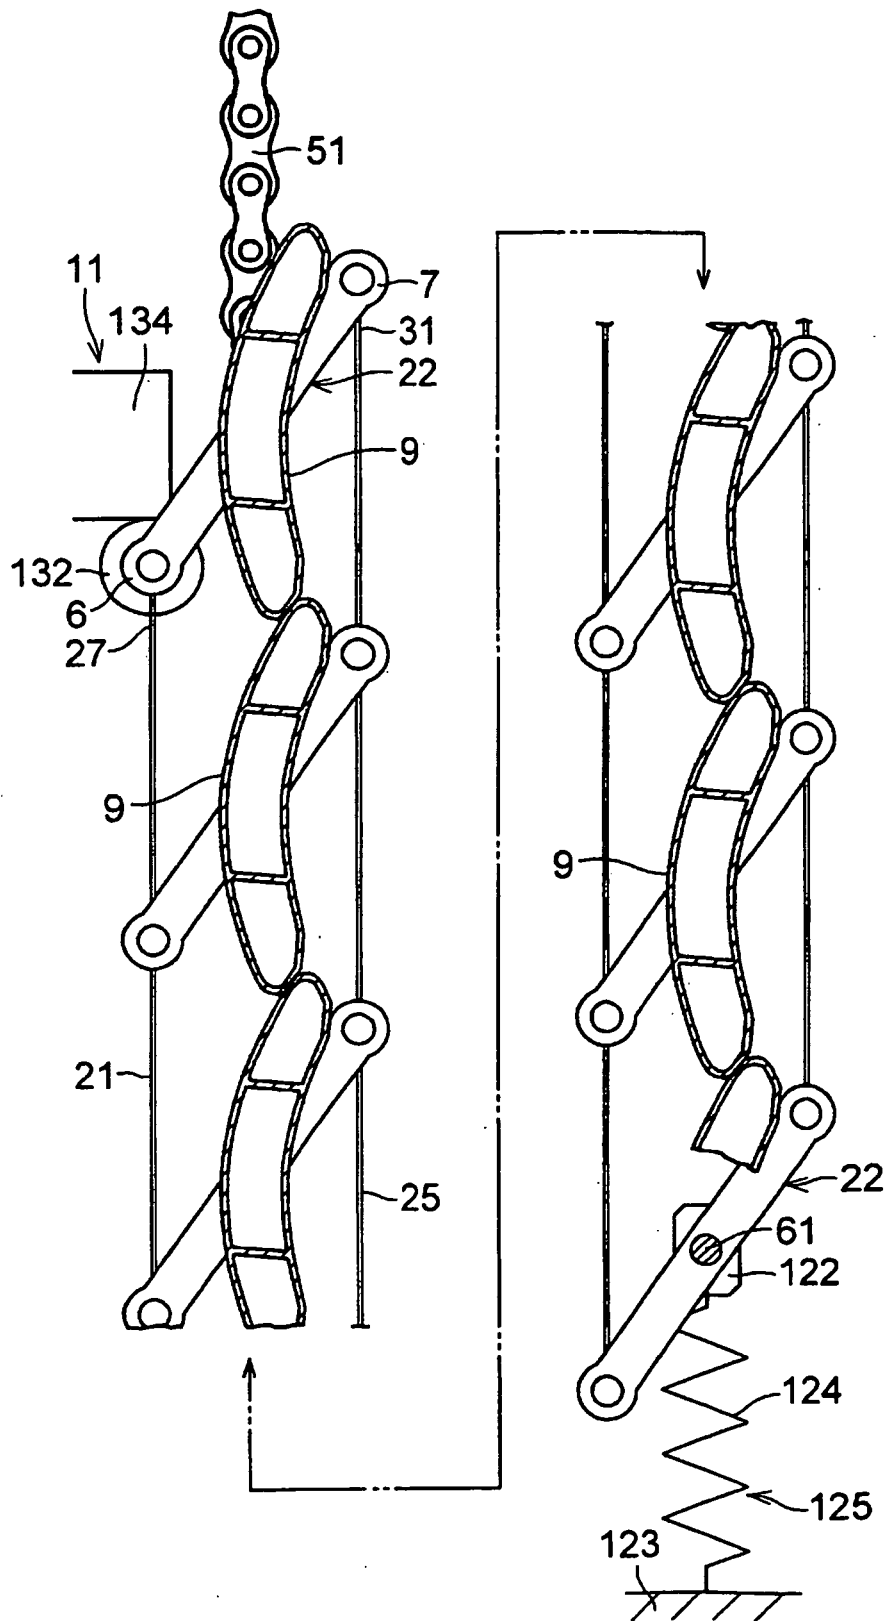


FIG. 17

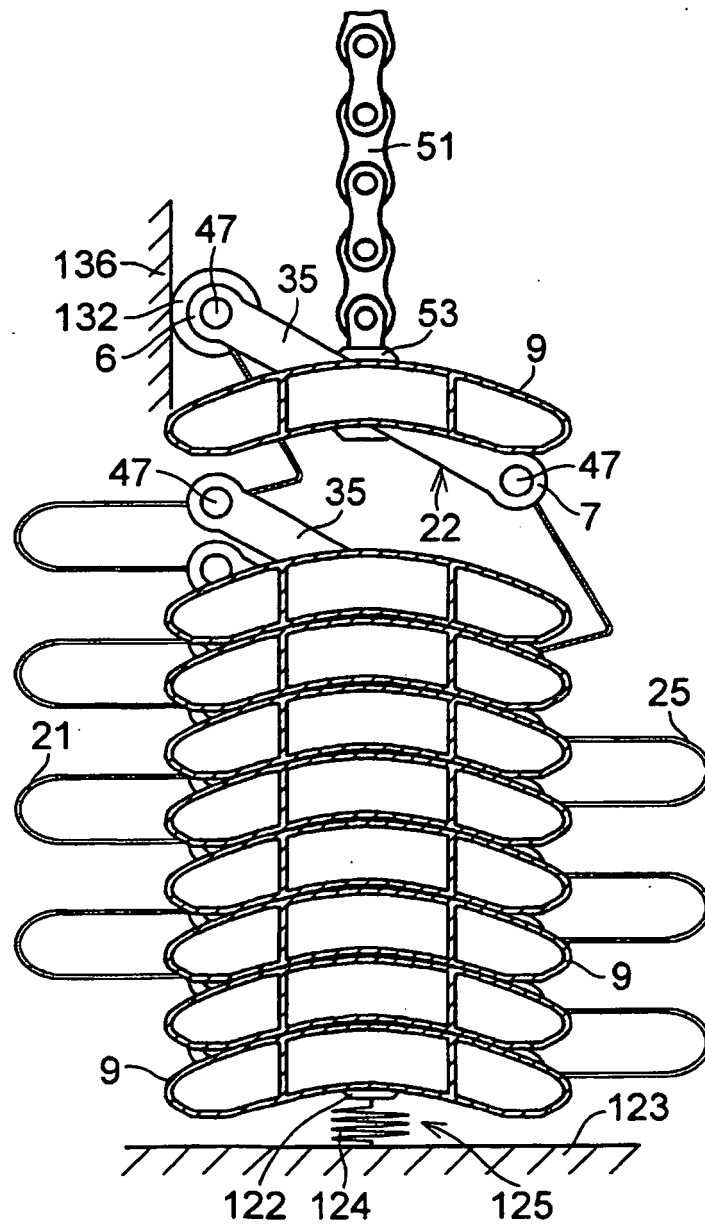


FIG. 18


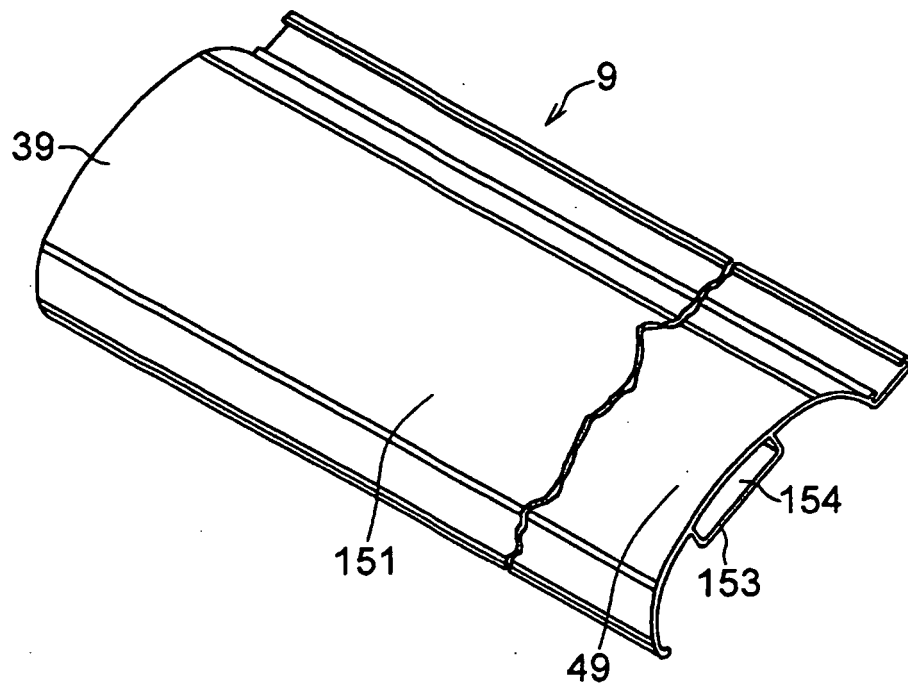


FIG. 19

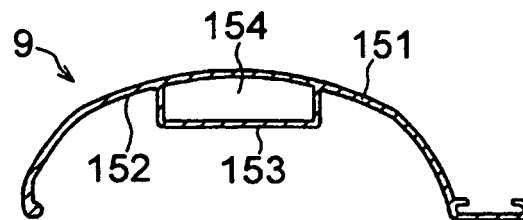

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- DE 3638406 A [0001]
- JP 8326445 A [0002]