

(51) International Patent Classification:  
*H04L 29/06* (2006.01)(21) International Application Number:  
PCT/US2016/060265(22) International Filing Date:  
3 November 2016 (03.11.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
15/011,231 29 January 2016 (29.01.2016) US

(71) Applicant: MCAFEE, INC. [US/US]; 2821 Mission College Blvd., Santa Clara, CA 95054 (US).

(72) Inventors: REVASHETTI, Siddaraya; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). RAJAN, Priyadarshini, R.; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). ZAMBRE, Sulakshana; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). SUNIL, Saira; 2821 Mission College Blvd., Santa Clara, CA 95054 (US). SUSMITA, Nayak; 2821 Mission College Blvd., Santa Clara, CA 95054 (US).


(74) Agent: SCHAFER, Richard, A.; Blank Rome, LLP, 717 Texas Avenue, Suite 1400, Houston, TX 77002 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BEACON CLOUD REPUTATION SERVICE

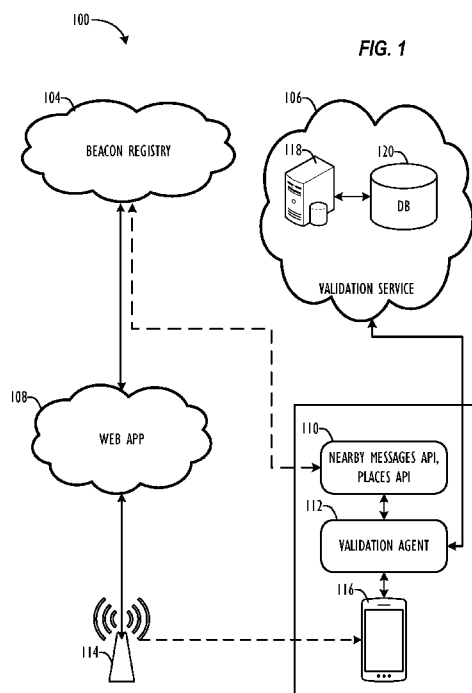

(57) Abstract: A technique for determining the safety of the content of beacon transmissions. A user device extracts beacon identification information from a beacon transmission. The user device queries the beacon registry to obtain the targeted content. The user device provides the targeted content and beacon identification information to a validation service. The validation service evaluates the targeted content and the beacon identification information for safety. The validation service determines a score based on that evaluation and sends the score to the user device. The user device alerts the user or performs background actions such as suppression of transmission of beacon contextual data to other apps on user device based on the score.

**WO 2017/131829 A1**



---

**Published:**

— *with international search report (Art. 21(3))*

## BEACON CLOUD REPUTATION SERVICE

## TECHNICAL FIELD

**[0001]** Embodiments described herein generally relate to the identification of beacons and more specifically to the verification of the safety of the content transmitted by such beacons.

## BACKGROUND ART

**[0002]** Bluetooth® low energy (BLE) was introduced as part of the Bluetooth® Core Specification version 4.0 adopted in June 2010. (“BLUETOOTH” is a registered trademark of Bluetooth SIG, Inc.) BLE was designed to support multiple profiles for wireless device communication. BLE was designed with the low power requirements, small size, low cost, and compatibility in mind.

**[0003]** One implementation of a BLE enabled device is a BLE beacon (beacon). Beacons are small devices that transmit via limited data payloads, serving various purposes. They are typically low-powered devices using BLE protocols, but as used herein, the term “beacon” can include other types of devices, including Near Field Communication (NFC) tags. Targeted applications include health and fitness, information presentation, and advertising. The devices present content in a payload to a client device, and the client device may act on that content.

**[0004]** Beacons interface with client devices by a well-defined protocol. The Eddystone™ protocol developed by Google Inc. is an example, as well as the iBeacon™ protocol developed by Apple Inc.. These protocols define how to encode, decode, and transmit data from the beacon to the client device. Specific networking frames defined by the protocol specification contain different data. For example, the Eddystone protocol defines frames that contain Universal Identification (UID) information, which identifies the beacon. Eddystone also defines a frame type for Universal Resource Locator (URL) information, which includes information for determining the content the beacon is conveying or the content itself.

**[0005]** Beacon registries provide content for the client device upon receiving a BLE transmission from a beacon. Beacon registries are well known databases that contain content associated with a beacon. For example, upon receiving a beacon transmission, the client device may extract a UID associated with the beacon, and query the beacon registry using the UID as a key. The beacon registry queries content associated with that UID and transmits the associated content to the client device. Often the associated content takes the form of a website

URL which is intended for use by the client device. Currently, the associated content is handled by the device without knowledge of the safety or the source of the transmission from the beacon. The beacon registry typically does not verify the content contained therein, so it is possible for the client device to access the content and be exposed to malicious data.

**[0006]** Expectations for the deployment of beacons are quite high due to the low cost of production and operation. Current projections predict that shipments of beacons will exceed four hundred million units by the year 2020.

### BRIEF DESCRIPTION OF DRAWINGS

**[0007]** FIG. 1 is a block diagram illustrating a system for receiving and determining the safety of beacon transmissions according to one embodiment.

**[0008]** FIG. 2 is a flowchart illustrating a technique for receiving and determining the safety of beacon transmissions according to one embodiment.

**[0009]** FIG. 3 is a flowchart illustrating a technique for generating a beacon safety score according to another embodiment.

**[0010]** FIG. 4 is a flowchart illustrating a technique for suppressing beacon transmissions according to one embodiment.

**[0011]** FIG. 5 is a block diagram illustrating an embodiment of a computing device for use with techniques described herein.

**[0012]** FIG. 6 is a block diagram illustrating another embodiment of computing device for use with techniques described herein.

### DESCRIPTION OF EMBODIMENTS

**[0013]** In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the invention. It will be apparent, however, to one skilled in the art that the invention may be practiced without these specific details. In other instances, structure and devices are shown in block diagram form in order to avoid obscuring the invention. References to numbers without subscripts or suffixes are understood to reference all instance of subscripts and suffixes corresponding to the referenced number. Moreover, the language used in this disclosure has been principally selected for readability and instructional purposes, and may not have been selected to delineate or

circumscribe the inventive subject matter, resort to the claims being necessary to determine such inventive subject matter. Reference in the specification to “one embodiment” or to “an embodiment” means that a particular feature, structure, or characteristic described in connection with the embodiments is included in at least one embodiment of the invention, and multiple references to “one embodiment” or “an embodiment” should not be understood as necessarily all referring to the same embodiment.

**[0014]** As used herein, the term “a computer system” can refer to a single computer or a plurality of computers working together to perform the function described as being performed on or by a computer system.

**[0015]** The term “machine readable medium” can refer to a single physical medium or a collection of physical media that together store data or instructions described as being stored on the medium.

**[0016]** FIG. 1 depicts a block diagram **100** illustrating a system for receiving and determining the safety of beacon transmissions according to one embodiment.

**[0017]** Prior to the transmission of any beacon signals, the beacon **114** needs to be configured. A web app **108** typically provides an interface between the beacon **114** and a beacon registry **104**. The web app **108** provides the interface to input the beacon identification information into the beacon registry **104**, as well as to tie that beacon identification information to beacon content. One example would be for the beacon identification information to comprise a universally unique identifier (UUID) paired with a URL. The URL may be the address of a public or private beacon registry **104**. A public registry may take the form of a cloud based service, often administered by a different party than the one operating the beacon. The public registry provides an interface that is openly accessible by all beacon operators. A private registry differs from a public registry in that it has controlled access and only certain beacons, often defined by their UUID, may have access. Often the operator of the private registry is the same as the beacons seeking access. The combination with the URL with the UUID identifies a specific beacon **114** in the beacon registry **104**. Alternatively, the UUID may be used to identify a specific beacon **114** in a well-known beacon registry **104** if the URL is not present.

**[0018]** Upon creating an entry in the beacon registry **104** associated with the beacon **114**, the web app **108** may assign beacon content to the entry in the beacon registry **104**. Examples

of the beacon content may include URL web links to product descriptions, advertisements, consumer surveys, etc.

**[0019]** Once the beacon **114** has been registered with the beacon registry **104**, the common usage pattern consists of a user device **116** receiving a transmission from a beacon **114**. The user device **116** extracts the beacon identification information, and queries the beacon registry **104** for the beacon content. The user device **116** then provides the retrieved beacon content to applications executing on the user device **116**. The beacon content is not verified for safety and exposes the user device to potentially malicious code.

**[0020]** The user device **116** may provide a level of safety from potentially malicious beacon initiated transmissions by utilizing a framework to support a validation service **106**.

**[0021]** Upon receiving a transmission from a beacon **114**, the user device **116** processes the beacon identification information in a validation agent **112** that operates with the validation service **106**. The validation agent **112** may operate as a part of the operating system (OS), middleware between the OS and the applications, or an application. The beacon identification information often includes raw information revealing hardware and firmware details of the beacon, telemetry information of the beacon, and manufacturing source. Additionally, the beacon identification information includes details used to derive data points about the beacon including data used to associate malicious data with the beacon, and data used to derive trustworthiness of manufacturing origin of the beacon. The validation agent **112** extracts the beacon identification information and utilizes one or more application programming interfaces **110** (APIs) to interface with the beacon registry **104**. In other embodiments, different beacon registries may use different APIs **110**. Similar to the web app **108** registering the beacon **114** with the beacon registry **104**, the APIs **110** interface with the beacon registry **104**. In some embodiments, the APIs **110** are utilized with the extracted beacon identification information, including UUIDs and URLs, to query the beacon registry **104** and retrieve the beacon content.

**[0022]** The beacon registry **104**, through the API **110**, sends the beacon content associated with the beacon identification information back to the validation agent **112**. The validation agent **112** acts as a verification gateway, and sends the resultant beacon content, beacon identification information, and contextual information to the validation service **106**. Contextual information includes a geo-physical location of the validation agent, the time the transmission was received, and a contextual location. A contextual location is further described by

landmarks physically located nearby. For example, a beacon located in shopping mall, might have a contextual location of a mall, which implies that the beacon is contextually located in a retail environment. Contextual location may be determined by the validation agent **112** at the time when the transmission is received based at least in part on the geo-physical location, and previous beacon transmissions received.

**[0023]** The validation service **106** maintains a record of beacons **114** that have interfaced with user devices **116** executing the validation agent **112**. The validation service **106** catalogs information related to the beacon **114**. The validation service **106** may also catalog whether the beacon occupies a well-known geo-physical location, and any known historical activity with the beacon. If the beacon identification information does not exist in the validation service **106** catalog, it is added along with any beacon content and contextual information. In the querying of the catalog, the validation service **106** may maintain data relating to how many times a specific beacon is interfaced, and keep a safety history. In some implementations, historical activity of the beacon may age off, and a beacon's past malicious behavior may be purged.

**[0024]** The validation service **106** may compare the manufacturing origin as well as hardware and firmware versions may be used to determine trustworthiness of the beacon. For example, if a beacon is detected to be from a well-known manufacturing origin, however the firmware details appear suspect, the validation service **106** may record that data point.

**[0025]** The validation service **106** also may evaluate the beacon content. This involves evaluating the beacon content itself, and any additional content the beacon content may reference. For example, if the beacon content is a URL, the validation service **106** evaluates the URL character string itself, as well as the content of the website to which the URL points. The validation service **106** examines any content returned from the URL request searching for any potentially malicious code.

**[0026]** The validation service **106** also determines a beacon safety score. Alternately, in other embodiments, the beacon safety score may be implemented as a beacon danger score, where the scores are interpreted differently. In one embodiment, the score is a numerical value determined by the combination of results assigned to the evaluation of the content, as well as metrics derived from historical interactions with the beacon as logged in the catalog. For example, if a beacon has been accessed by many devices and developed a safe history in conjunction with a currently favorable evaluation of the beacon content, then the beacon safety

score would be high. Alternatively, if the known safety history is low in conjunction with a current evaluation of the content as malicious, the beacon would receive a low beacon safety score. Finally, if a beacon has no known history in conjunction with a current evaluation as non-malicious, the beacon safety score may be midlevel, indicating caution to the user.

[0027] The validation service **106** stores any resultant beacon safety score in the catalog as a data point for future reference. The validation service **106** returns the beacon safety score to the validation agent **112**.

[0028] The validation service **106** may include at least one server **118** which facilitates the sending and receiving of information from the user device **116**, as well as the evaluation of the content provided to the validation service **106** from the user device **116**.

[0029] Coupled to the server **118**, is a database **120**. The database facilitates the historical data necessary to build a beacon safety history. Implementation of the database may vary from off the shelf database packages to custom developed systems.

[0030] The validation agent **112** may present the user with a notification indicative of the beacon safety score. For example, ranges of beacon safety scores may be represented by the validation agent **112** using colors similar to a traffic light, where green indicates safe, yellow indicates uncertainty or caution, and red indicates safe. Any desired threshold between ranges of score values may be used as desired, and may be configurable. Other techniques may be used to represent the beacon safety score, and do not have to be visual in nature. Audio notifications may be used to indicate the beacon safety score.

[0031] FIG. 2 depicts a flowchart **200** illustrating a technique for receiving and determining the safety of beacon transmissions according to one embodiment.

[0032] Flowchart **200** represents a way of determining the beacon safety score as calculated by the validation service **106**.

[0033] The validation service **106** receives beacon identification information and the beacon content **210**. Generally, in its most simple form, this is information that is likely to uniquely identify a beacon. For example, a UUID extracted out of a beacon transmission and a URL for a corresponding beacon registry **104** may compose beacon identification information. It may also include additional contextual information as described above as well. The beacon content is the output from the beacon registry **104** query.

**[0034]** The validation service **106** identifies whether the beacon identification information identifies a known beacon **220**. In one embodiment, a database indexed on the UUID value may be used as a key. Upon querying the database with the UUID, the database returns an entry for the beacon if it is known, or optionally returns nothing or an indication that the beacon is unknown. The entry for a beacon may also contain other information relating to past queries for the beacon. The entry may include past beacon safety scores, times of queries, location of the beacon, and the beacon content itself.

**[0035]** The validation service **106** determines a safety level of the beacon content **230**. The beacon content string may be parsed to evaluate correct syntax. If the beacon content is a hyper transport protocol (HTTP) URL, it may be traversed in a web browser and the content of the HTTP response may be parsed to identify malicious scripts embedded in the response. In the case that the beacon content is not a web based URL, the validation service **106** may use an appropriate mechanism to evaluate the beacon content. For example, if the URL is a file transfer protocol (FTP) address, the validation service **106** may use a (FTP) application to evaluate the beacon content. The beacon content traversal may be executed in an isolated environment for safety purposes. The isolated environment may include a Trusted Execution Environment (TEE).

**[0036]** Additionally, the validation service **106** evaluates the beacon content for privacy concerns. The validation service **106** may evaluate content that would allow downstream beacon transmission applications to collect unauthorized private information. For example, this could include beacon content directing users to URLs that are not malicious on their face, however setting session cookies for user tracking. Subsequent applications may then utilize the session cookies to obtain unauthorized user information and profile a user. Another example would be the detection by the validation service **106** of beacon content indicative of an attempt to supply applications with beacon content designed to assist in the reset of the device's advertisement ID, or augment data associated with the device's advertisement ID.

**[0037]** The validation service **106** then generates a beacon safety score **240**. The beacon safety score may be a numerical value. In one embodiment, the numerical value is representative of whether the beacon is a known safe beacon combined with the evaluation of the beacon content. For example, if the beacon has a history of generating safe beacon safety scores, it may have a high value for the known safe beacon component. Additionally, if a beacon has a trusted manufacturing origin, and/or well reputed geo-physical location it may

also be a known safe beacon. A well reputed geo-physical location is a location, as reported by the user device **116**, where beacon information stored in the validation service **106** indicate that surrounding beacons in the same geo-physical area are safe. If the beacon content associated with that beacon also is evaluated safe, then the beacon safety score would be the combination of those two high values. Alternatively, those two components may be returned to the validation agent **112**, where the validation agent **112** makes the determination on how to apply those values to alert the user to beacon safety. In another embodiment, the validation service **106** may store the beacon safety score as another metric for future evaluations of the beacon safety score or be used to modify an existing score, as keeping a running average beacon safety score.

**[0038]** Additionally, the validation service may store various metrics of beacon performance including rate of transmission individually or as an aggregate over multiple validation agents **112**.

**[0039]** The validation service **106** then transmits the beacon safety score back to the requestor **250** who originally sent the beacon identification information and beacon content at block **210**.

**[0040]** FIG. **3** depicts a flowchart **300** illustrating a technique for generating a beacon safety score according to another embodiment.

**[0041]** Flowchart **300** represents a way of receiving a beacon transmission by a user device **116** and the processing of that transmission.

**[0042]** A user device **116** receives a transmission from a beacon in block **310**. This occurs across a beacon protocol (e.g. Eddystone). The transmission should include enough information to uniquely identify the beacon **114** and any beacon registry **104** with which the beacon may be associated.

**[0043]** The user device **116** extracts the beacon identification information from the beacon transmission in block **320**. Extracting beacon identification information involves processing the frames of the transmission and identifying which portions of the transmission identify the beacon. For example, UID and URL frames for the Eddystone protocol include information identifying the beacon and the beacon registry. Processing of the frames would require that the user device **116** extract a unique beacon identifier and registry information. In the Eddystone example above, the registry information would correspond to the URL frames. In the iBeacon

case, the registry information would be statically defined by the APIs **110**. Registry information may address both private and public registries. Additionally, the user device **116** computes additional contextual information around the reception of the transmission. This contextual information may include the geo-physical location, the time that the transmission was received, and the contextual location.

[0044] The user device **116** sends the beacon identification information to the beacon registry in block **330**. Utilizing the information extracted at block **320**, the user device **116** may properly identify the associated beacon registry **104**. The validation agent **112** may interface with beacon registry APIs to address and access the beacon registry **104**. For example, the URL frame mentioned above may contain the appropriate information to address a beacon registry **104** and the API would facilitate the query for the beacon based on the information from the UID frame.

[0045] The user device **116** receives the beacon content from the beacon registry in block **340**. The beacon content consists of the data that the beacon was implemented to convey. The beacon content may take the form of a URL to a desired website. For example, a beacon may be placed in a grocery store near a specific brand of soups. The beacon content returned by the beacon registry **104** would then be a URL directing the user device **116** to display a web page with more information on the specific brand of soups.

[0046] The user device **116** sends the beacon content and the beacon identification information to the validation service in block **350**. Upon reception of the beacon content, the user device **116** through a validation agent **112** currently executing, transmits the beacon content and the beacon identification information to the validation service **106**. As the validation agent **112** is the agent of the validation service's framework, the addressing as well as the mechanism for transport for the validation service **106** may be incorporated into the validation agent **112**. If the mechanism for transport fails, the validation service **106**, may not be available, which may necessitate the validation agent **112** to notify the user.

[0047] The user device **116** receives a beacon safety score from the validation service in block **360**. The validation agent **112** acts as an agent for or client of the validation service **106** and receives the beacon safety score. The user device **116** may now use the beacon safety score to indicate to the user the safety of the beacon. In one embodiment, the safety score may be used to implement a "traffic light" system indicating green for safe, yellow for caution, and red

for unsafe. Alternatively, or in combination, the user device **116** may suppress any beacon transmissions with beacon safety scores not meeting a predetermined safety threshold. The validation agent **112** may additionally store transmission data from receiver applications, as beacon transmissions are forwarded to other applications.

[0048] FIG. 4 depicts a flowchart **400** illustrating a technique for suppressing beacon transmissions according to one embodiment.

[0049] Flowchart **400** represents a way of receiving a beacon transmission by a user device **116** and the suppression of that transmission based on criteria.

[0050] A user device **116** receives a beacon transmission from a beacon **410**. This occurs across a beacon protocol (e.g. Eddystone). The transmission should include enough information to uniquely identify the beacon **114** and any beacon registry **104** with which the beacon may be associated. Alternatively, the transmission may include only enough information to identify the beacon, as long the registry information may be retrieved from the registry APIs **110**.

[0051] The user device **116** extracts the beacon identification information from the beacon transmission **420**. Extracting beacon identification information involves processing the frames of the transmission and identifying which portions of the transmission identify the beacon. For example, UID and URL frames for the Eddystone protocol include information identifying the beacon and the beacon registry. Processing of the frames would require that the user device **116** extract a unique beacon identifier and registry information. In the Eddystone example above, the registry information would correspond to the URL frames. Registry information may address both private and public registries. Additionally, the user device **116** computes additional contextual information around the reception of the transmission. This contextual information may include the geo-physical location of the user device **116**, the time that the transmission was received, and the contextual location.

[0052] The user device **116** sends the beacon identification information to the validation service **430**. Utilizing the information extracted at block **420**, the user device **116** may identify the associated beacon registry **104**. The user device **116** may interface with APIs to address and access the beacon registry **104**. For example, the URL frame mentioned above may contain the appropriate information to address a beacon registry **104** and the API would facilitate the query for the beacon based on the information from the UID frame.

[0053] The user device **116** receives data about the beacon from the validation service **440**. In this embodiment, the user device **116** may receive data about the beacon, including the beacon safety score. This data describes the content that the beacon is directing the user device **116** to view. Beacon types may be included in the data. Age restrictive information may be included in the data as well. For example, the data may indicate that the beacon is promoting products, or that the beacon is presenting information not intended for children.

[0054] The user device **116** suppresses the propagation of the beacon transmission to other applications running on the user device **116** based on that data **450**. Based on the data received at block **440** and a set of user preferences, the user device **116** determines if the beacon transmission should be suppressed. The set of user preferences may indicate acceptable types, times, and locations to receive beacon transmissions. For example, if the user preferences block all media content rated higher than PG and the received data indicates the beacon is directing the user to a media website with content rating of R, the user device **116** will suppress that transmission. Likewise, if the user preferences block all unsolicited advertisements, any beacon directing the user to advertising websites will be suppressed. Additionally, the user device **116** may reset time to live (TTL) affected networking components in order to remain anonymous to the transmitter. Furthermore, the user device **116** may alert the user that data transmitted may be used to pinpoint the location or path traversed by a user.

[0055] Referring now to FIG. **5**, a block diagram illustrates a programmable device **500** that may be used for implementing the techniques described herein in accordance with one or more embodiments. The programmable device **500** illustrated in FIG. **5** is a multiprocessor programmable device that includes a first processing element **570** and a second processing element **580**. While two processing elements **570** and **580** are shown, an embodiment of programmable device **500** may also include only one such processing element.

[0056] Programmable device **500** is illustrated as a point-to-point interconnect system, in which the first processing element **570** and second processing element **580** are coupled via a point-to-point interconnect **550**. Any or all of the interconnects illustrated in FIG. **5** may be implemented as a multi-drop bus rather than point-to-point interconnects.

[0057] As illustrated in FIG. **5**, each of processing elements **570** and **580** may be multicore processors, including first and second processor cores (i.e., processor cores **574a** and **574b** and processor cores **584a** and **584b**). Such cores **574a**, **574b**, **584a**, **584b** may be configured to

execute computing instruction code. However, other embodiments may use processing elements that are single core processors as desired. In embodiments with multiple processing elements 570, 580, each processing element may be implemented with different numbers of cores as desired.

**[0058]** Each processing element 570, 580 may include at least one shared cache 546. The shared cache 546a, 546b may store data (e.g., computing instructions) that are utilized by one or more components of the processing element, such as the cores 574a, 574b and 584a, 584b, respectively. For example, the shared cache may locally cache data stored in a memory 532, 534 for faster access by components of the processing elements 570, 580. In one or more embodiments, the shared cache 546a, 546b may include one or more mid-level caches, such as level 2 (L2), level 3 (L3), level 4 (L4), or other levels of cache, a last level cache (LLC), or combinations thereof.

**[0059]** While FIG. 5 illustrates a programmable device with two processing elements 570, 580 for clarity of the drawing, the scope of the present invention is not so limited and any number of processing elements may be present. Alternatively, one or more of processing elements 570, 580 may be an element other than a processor, such as a graphics processing unit (GPU), a digital signal processing (DSP) unit, a field programmable gate array, or any other programmable processing element. Processing element 580 may be heterogeneous or asymmetric to processing element 570. There may be a variety of differences between processing elements 570, 580 in terms of a spectrum of metrics of merit including architectural, microarchitectural, thermal, power consumption characteristics, and the like. These differences may effectively manifest themselves as asymmetry and heterogeneity amongst processing elements 570, 580. In some embodiments, the various processing elements 570, 580 may reside in the same die package.

**[0060]** First processing element 570 may further include memory controller logic (MC) 572 and point-to-point (P-P) interconnects 576 and 578. Similarly, second processing element 580 may include a MC 582 and P-P interconnects 586 and 588. As illustrated in FIG. 5, MCs 572 and 582 couple processing elements 570, 580 to respective memories, namely a memory 532 and a memory 534, which may be portions of main memory locally attached to the respective processors. While MC logic 572 and 582 is illustrated as integrated into processing elements 570, 580, in some embodiments the memory controller logic may be discrete logic outside processing elements 570, 580 rather than integrated therein.

[0061] Processing element 570 and processing element 580 may be coupled to an I/O subsystem 590 via respective P-P interconnects 576 and 586 through links 552 and 554. As illustrated in FIG. 5, I/O subsystem 590 includes P-P interconnects 594 and 598. Furthermore, I/O subsystem 590 includes an interface 592 to couple I/O subsystem 590 with a high performance graphics engine 538. In one embodiment, a bus (not shown) may be used to couple graphics engine 538 to I/O subsystem 590. Alternately, a point-to-point interconnect 539 may couple these components.

[0062] In turn, I/O subsystem 590 may be coupled to a first link 516 via an interface 596. In one embodiment, first link 516 may be a Peripheral Component Interconnect (PCI) bus, or a bus such as a PCI Express bus or another I/O interconnect bus, although the scope of the present invention is not so limited.

[0063] As illustrated in FIG. 5, various I/O devices 514, 524 may be coupled to first link 516, along with a bridge 518 that may couple first link 516 to a second link 520. In one embodiment, second link 520 may be a low pin count (LPC) bus. Various devices may be coupled to second link 520 including, for example, a keyboard/mouse 512, communication device(s) 526 (which may in turn be in communication with the computer network 503), and a data storage unit 528 such as a disk drive or other mass storage device which may include code 530, in one embodiment. The code 530 may include instructions for performing embodiments of one or more of the techniques described above. Further, an audio I/O 524 may be coupled to second link 520.

[0064] Note that other embodiments are contemplated. For example, instead of the point-to-point architecture of FIG. 5, a system may implement a multi-drop bus or another such communication topology. Although links 516 and 520 are illustrated as busses in FIG. 5, any desired type of link may be used. In addition, the elements of FIG. 5 may alternatively be partitioned using more or fewer integrated chips than illustrated in FIG. 5.

[0065] Referring now to FIG. 6, a block diagram illustrates a programmable device 600 according to another embodiment. Certain aspects of FIG. 6 have been omitted from FIG. 6 in order to avoid obscuring other aspects of FIG. 6.

[0066] FIG. 6 illustrates that processing elements 670, 680 may include integrated memory and I/O control logic ("CL") 672 and 682, respectively. In some embodiments, the 672, 682 may include memory control logic (MC) such as that described above in connection with FIG.

5. In addition, CL 672, 682 may also include I/O control logic. FIG. 6 illustrates that not only may the memories 632, 634 be coupled to the CL 672, 682, but also that I/O devices 644 may also be coupled to the control logic 672, 682. Legacy I/O devices 615 may be coupled to the I/O subsystem 690 by interface 696. Each processing element 670, 680 may include multiple processor cores, illustrated in FIG. 6 as processor cores 674A, 674B, 684A and 684B. As illustrated in FIG. 6, I/O subsystem 690 includes point-to-point (P-P) interconnects 694 and 698 that connect to P-P interconnects 676 and 686 of the processing elements 670 and 680 with links 652 and 654. Processing elements 670 and 680 may also be interconnected by link 650 and interconnects 678 and 688, respectively.

[0067] The programmable devices depicted in FIGS. 5 and 6 are schematic illustrations of embodiments of programmable devices that may be utilized to implement various embodiments discussed herein. Various components of the programmable devices depicted in FIGS. 5 and 6 may be combined in a system-on-a-chip (SoC) architecture.

[0068] The following examples pertain to further embodiments.

[0069] Example 1 is a machine readable medium, on which are stored instructions for determining beacon safety, comprising instructions that when executed cause a machine to: receive a beacon identification information and a beacon content associated with a beacon; determine whether the beacon identification information identifies a known beacon; determine a safety level of the beacon content; generate a beacon safety score based on the safety level and the beacon identification information; and send the beacon safety score to a requester.

[0070] In Example 2 the subject matter of Example 1 optionally includes wherein the beacon safety score comprises a value derived from the safety level of the beacon content and the beacon identification information.

[0071] In Example 3 the subject matter of Example 1 optionally includes wherein the instructions to determine whether the beacon identification information identifies a known beacon comprise instructions that evaluate a manufacturing origin of the beacon, a geo-physical location of the beacon, and historical activity associated with the beacon.

[0072] In Example 4 the subject matter of Example 1 optionally includes wherein the beacon content comprises a uniform resource locator, and the instructions to determine a safety level of the beacon content comprises evaluating the uniform resource locator and content addressed by the uniform resource locator.

**[0073]** In Example 5 the subject matter of any of Examples 1–4 optionally includes wherein the beacon identification information comprises hardware information associated with the beacon and telemetry information received, both received from the beacon, data used to associate malicious data with the beacon, and data used to derive trustworthiness of manufacturing origin of the beacon, data used to determine whether the beacon occupies a well reputed geo-physical location, and data used to associate a known historical activity with the beacon.

**[0074]** In Example 6 the subject matter of any of Examples 1–4 optionally includes further comprising instructions to store the beacon safety score.

**[0075]** Example 7 is a system for determining safety of beacon transmissions, comprising: one or more processors; memory coupled to the one or more processors on which are stored instructions, comprising instructions that when executed cause at least some of the one or more processors to: receive a beacon transmission from a beacon; extract a beacon identification information from the beacon transmission; send the beacon identification information to a beacon registry; receive a beacon content from the beacon registry; send the beacon content and the beacon identification information to a validation service; and receive, from the validation service, a beacon safety score.

**[0076]** In Example 8 the subject matter of Example 7 optionally includes further comprising instructions to suppress the beacon content of the beacon based on the beacon safety score.

**[0077]** In Example 9 the subject matter of Example 7 optionally includes further comprising instructions to identify the beacon registry.

**[0078]** In Example 10 the subject matter of Example 7 optionally includes wherein the beacon safety score indicates whether the beacon is safe and whether the beacon content is safe.

**[0079]** In Example 11 the subject matter of any of Examples 7–10 optionally includes wherein the beacon safety score indicates whether the beacon has a trusted manufacturing origin, a well reputed geo-physical location, and known historical activity.

**[0080]** In Example 12 the subject matter of any of Examples 7–10 optionally includes wherein the instructions to extract beacon identification information from the beacon transmission comprise instructions to: extract a beacon identifier from the beacon transmission;

extract a registry information from the beacon transmission; and compute a contextual information, wherein the contextual information comprises a geo-physical location, a time transmission received, and a contextual location associated with the beacon.

**[0081]** In Example 13 the subject matter of Example 12 optionally includes wherein the registry information comprises an address of a private beacon registry.

**[0082]** In Example 14 the subject matter of any of Examples 7–10 optionally includes further comprising instructions to present a visual representation indicative of the beacon content based on the beacon safety score.

**[0083]** Example 15 is a method for suppressing beacon transmissions, comprising: receiving a beacon transmission from a beacon; extracting a beacon identification information from the beacon transmission; sending the beacon identification information to a validation service; receiving, from the validation service, data associated with the beacon; and suppressing, based on the data, propagation of the beacon transmission to other applications.

**[0084]** In Example 16 the subject matter of Example 15 optionally includes wherein the suppressing comprises evaluating the data against a set of user preferences.

**[0085]** In Example 17 the subject matter of Example 16 optionally includes wherein the set of user preferences comprises acceptable times of day to receive beacon transmissions.

**[0086]** In Example 18 the subject matter of Example 16 optionally includes wherein the set of user preferences comprise acceptable types of beacon transmissions.

**[0087]** In Example 19 the subject matter of Example 16 optionally includes wherein the set of user preferences comprise acceptable locations to receive beacon transmissions.

**[0088]** In Example 20 the subject matter of any of Examples 15–19 optionally includes further comprising notifying a user of received suppressed beacon transmissions.

**[0089]** Example 21 is an apparatus comprising: a processor; and a memory coupled with the processor, on which are stored instructions, comprising instructions that when executed cause the processor to: receive a beacon identification information and a beacon content associated with a beacon; determine whether the beacon identification information identifies a known beacon; determine a safety level of the beacon content; generate a beacon safety score based on the safety level and the beacon identification information; and send the beacon safety score to a requester.

**[0090]** In Example 22 the subject matter of Example 21 optionally includes wherein the beacon safety score comprises a value derived from the safety level of the beacon content and the beacon identification information.

**[0091]** In Example 23 the subject matter of Example 21 optionally includes wherein the instructions to determine whether the beacon identification information identifies a known beacon comprise instructions that evaluate a manufacturing origin of the beacon, a geo-physical location of the beacon, and historical activity associated with the beacon.

**[0092]** In Example 24 the subject matter of Example 21 optionally includes wherein the beacon content comprises a uniform resource locator, and the instructions to determine a safety level of the beacon content comprises evaluating the uniform resource locator and content addressed by the uniform resource locator.

**[0093]** In Example 25 the subject matter of any of Examples 21–24 optionally includes wherein the beacon identification information comprises hardware information associated with the beacon and telemetry information received, both received from the beacon, data used to associate malicious data with the beacon, and data used to derive trustworthiness of manufacturing origin of the beacon, data used to determine whether the beacon occupies a well reputed geo-physical location, and data used to associate a known historical activity with the beacon.

**[0094]** In Example 26 the subject matter of any of Examples 21–24 optionally includes further comprising instructions to store the beacon safety score.

**[0095]** Program instructions may be used to cause a general-purpose or special-purpose processing system that is programmed with the instructions to perform the operations described herein. Alternatively, the operations may be performed by specific hardware components that contain hardwired logic for performing the operations, or by any combination of programmed computer components and custom hardware components. The methods described herein may be provided as a computer program product that may include a machine readable medium having stored thereon instructions that may be used to program a processing system or other electronic device to perform the methods. The term “machine readable medium” used herein shall include any medium that is capable of storing or encoding a sequence of instructions for execution by the machine and that cause the machine to perform any one of the methods described herein. The term “machine readable medium” shall accordingly include, but not be

limited to, tangible, non-transitory memories such as solid-state memories, optical and magnetic disks. Furthermore, it is common in the art to speak of software, in one form or another (e.g., program, procedure, process, application, module, logic, and so on) as taking an action or causing a result. Such expressions are merely a shorthand way of stating that the execution of the software by a processing system causes the processor to perform an action or produce a result.

**[0096]** It is to be understood that the above description is intended to be illustrative, and not restrictive. For example, the above-described embodiments may be used in combination with each other. Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention therefore should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled.

## CLAIMS

What is claimed is:

1. A machine readable medium, on which are stored instructions for determining beacon safety, comprising instructions that when executed cause a machine to:
  - receive a beacon identification information and a beacon content associated with a beacon;
  - determine whether the beacon identification information identifies a known beacon;
  - determine a safety level of the beacon content;
  - generate a beacon safety score based on the safety level and the beacon identification information; and
  - send the beacon safety score to a requester.
2. The machine readable medium of claim 1, wherein the beacon safety score comprises a value derived from the safety level of the beacon content and the beacon identification information.
3. The machine readable medium of claim 1, wherein the instructions to determine whether the beacon identification information identifies a known beacon comprise instructions that evaluate a manufacturing origin of the beacon, a geo-physical location of the beacon, and historical activity associated with the beacon.
4. The machine readable medium of claim 1, wherein the beacon content comprises a uniform resource locator, and the instructions to determine a safety level of the beacon content comprises evaluating the uniform resource locator and content addressed by the uniform resource locator.
5. The machine readable medium of any one of claims 1–4, wherein the beacon identification information comprises hardware information associated with the beacon and telemetry information received, both received from the beacon, data used to associate malicious data with the beacon, and data used to derive trustworthiness of manufacturing origin of the

beacon, data used to determine whether the beacon occupies a well reputed geo-physical location, and data used to associate a known historical activity with the beacon.

6. The machine readable medium of any one of claims 1–4, further comprising instructions to store the beacon safety score.

7. A system for determining safety of beacon transmissions, comprising:  
one or more processors;  
memory coupled to the one or more processors on which are stored instructions, comprising instructions that when executed cause at least some of the one or more processors to:

- receive a beacon transmission from a beacon;
- extract a beacon identification information from the beacon transmission;
- send the beacon identification information to a beacon registry;
- receive a beacon content from the beacon registry;
- send the beacon content and the beacon identification information to a validation service; and
- receive, from the validation service, a beacon safety score.

8. The system of claim 7, further comprising instructions to suppress the beacon content of the beacon based on the beacon safety score.

9. The system of claim 7, further comprising instructions to identify the beacon registry.

10. The system of claim 7, wherein the beacon safety score indicates whether the beacon is safe and whether the beacon content is safe.

11. The system of any one of claims 7–10, wherein the beacon safety score indicates whether the beacon has a trusted manufacturing origin, a well reputed geo-physical location, and known historical activity.

12. The system of any of claims 7–10, wherein the instructions to extract beacon identification information from the beacon transmission comprise instructions to:

- extract a beacon identifier from the beacon transmission;
- extract a registry information from the beacon transmission; and
- compute a contextual information, wherein the contextual information comprises a geo-physical location, a time transmission received, and a contextual location associated with the beacon.

13. The system of claim 12, wherein the registry information comprises an address of a private beacon registry.

14. The system of any one of claims 7–10, further comprising instructions to present a visual representation indicative of the beacon content based on the beacon safety score.

15. A method for suppressing beacon transmissions, comprising:  
receiving a beacon transmission from a beacon;  
extracting a beacon identification information from the beacon transmission;  
sending the beacon identification information to a validation service;  
receiving, from the validation service, data associated with the beacon; and  
suppressing, based on the data, propagation of the beacon transmission to other applications.

16. The method of claim 15, wherein the suppressing comprises evaluating the data against a set of user preferences.

17. The method of claim 16, wherein the set of user preferences comprises acceptable times of day to receive beacon transmissions.

18. The method of claim 16, wherein the set of user preferences comprise acceptable types of beacon transmissions.

19. The method of claim 16, wherein the set of user preferences comprise acceptable locations to receive beacon transmissions.

20. The method of any of claims 15–19, further comprising notifying a user of received suppressed beacon transmissions.

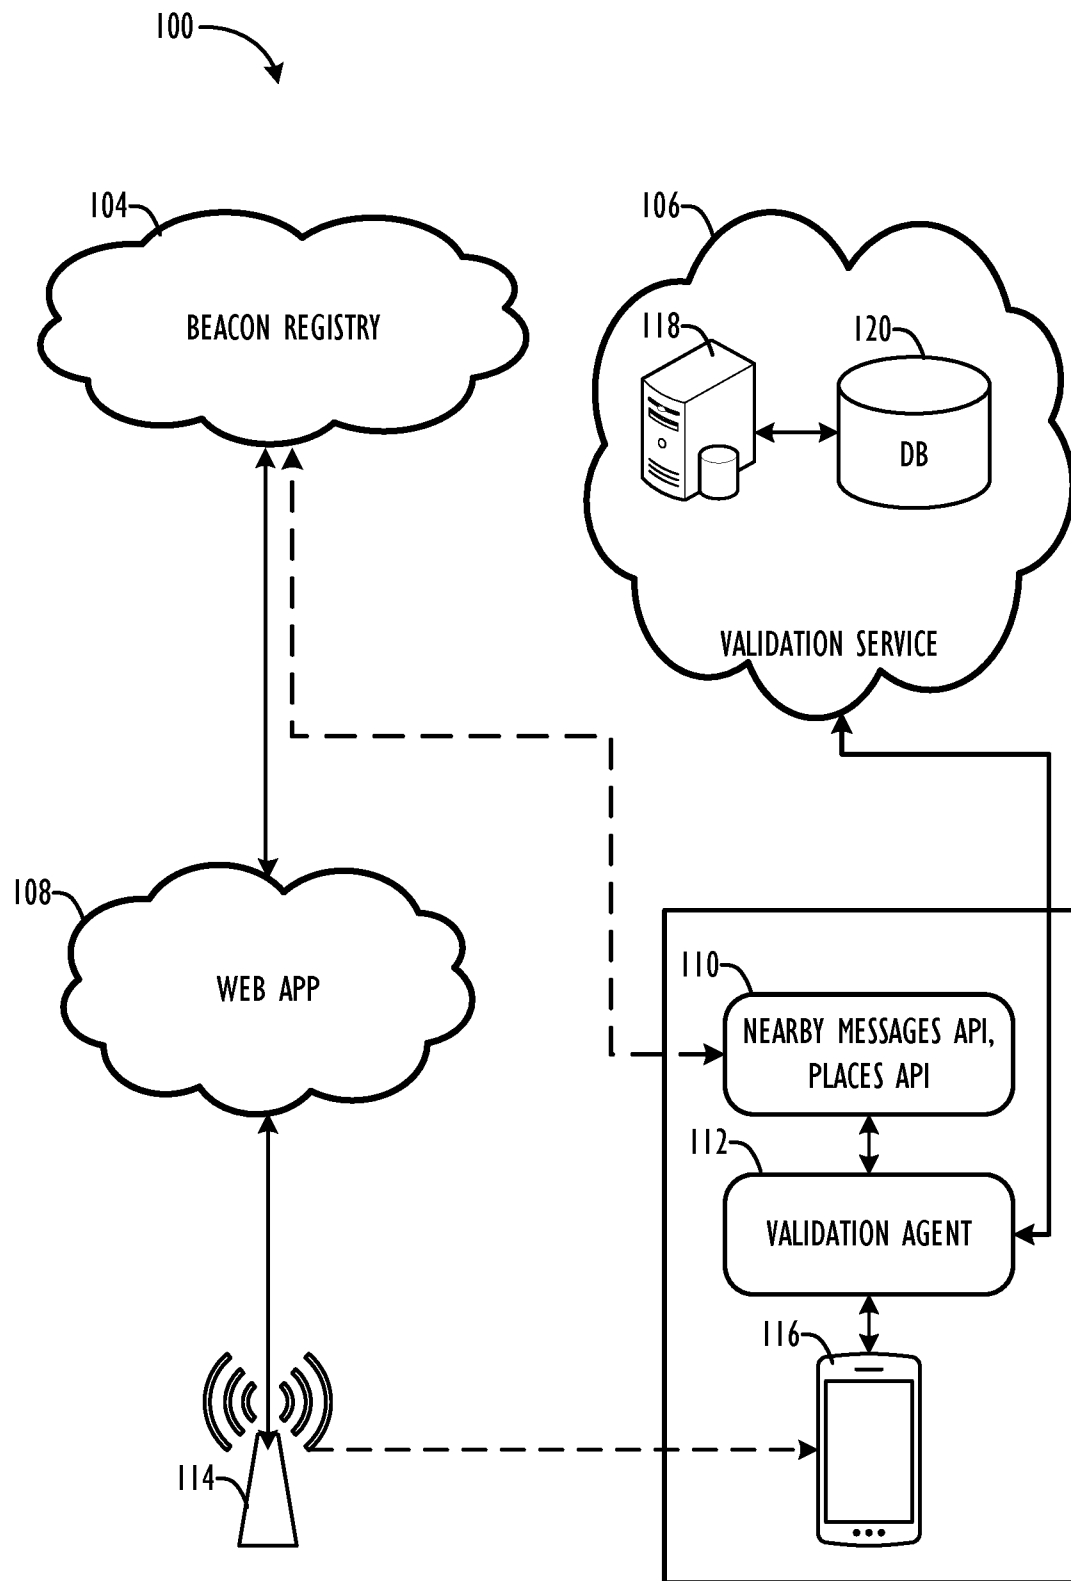


FIG. 1

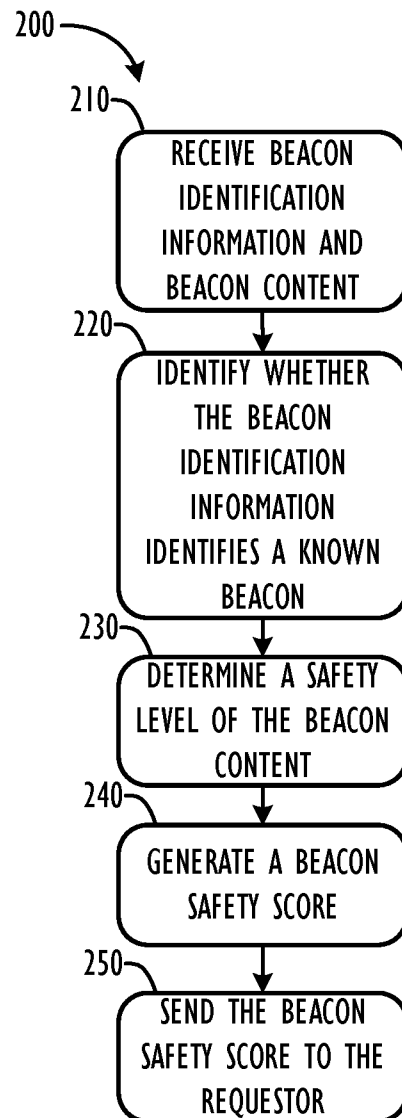


FIG. 2

3/6

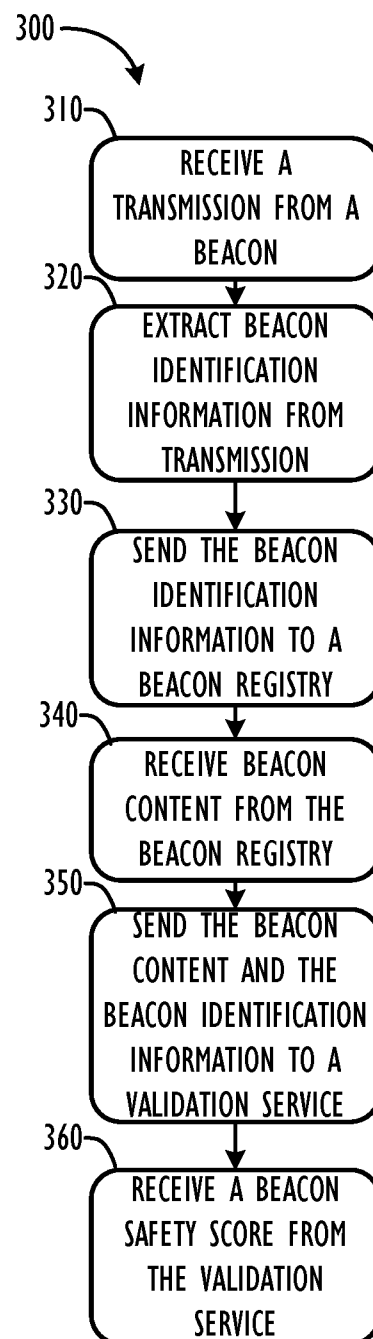


FIG. 3

4/6

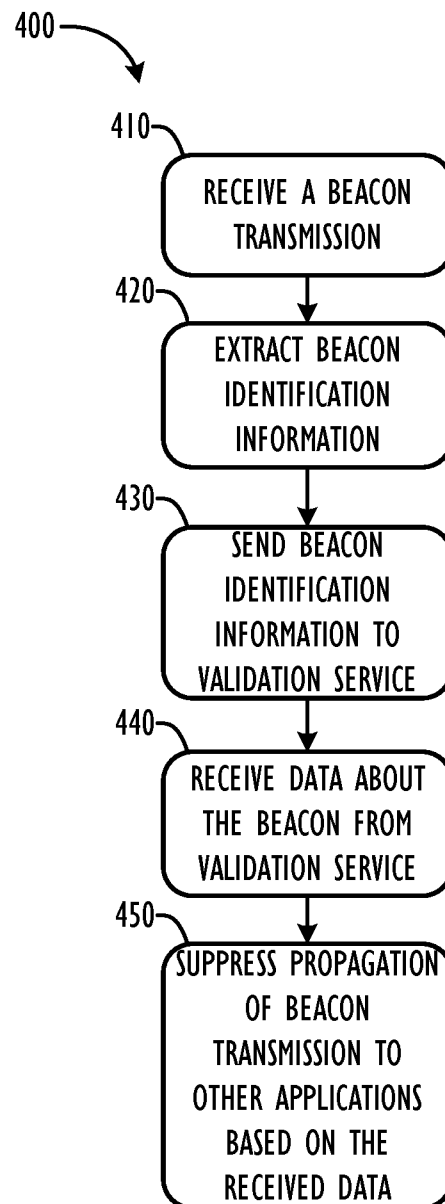


FIG. 4

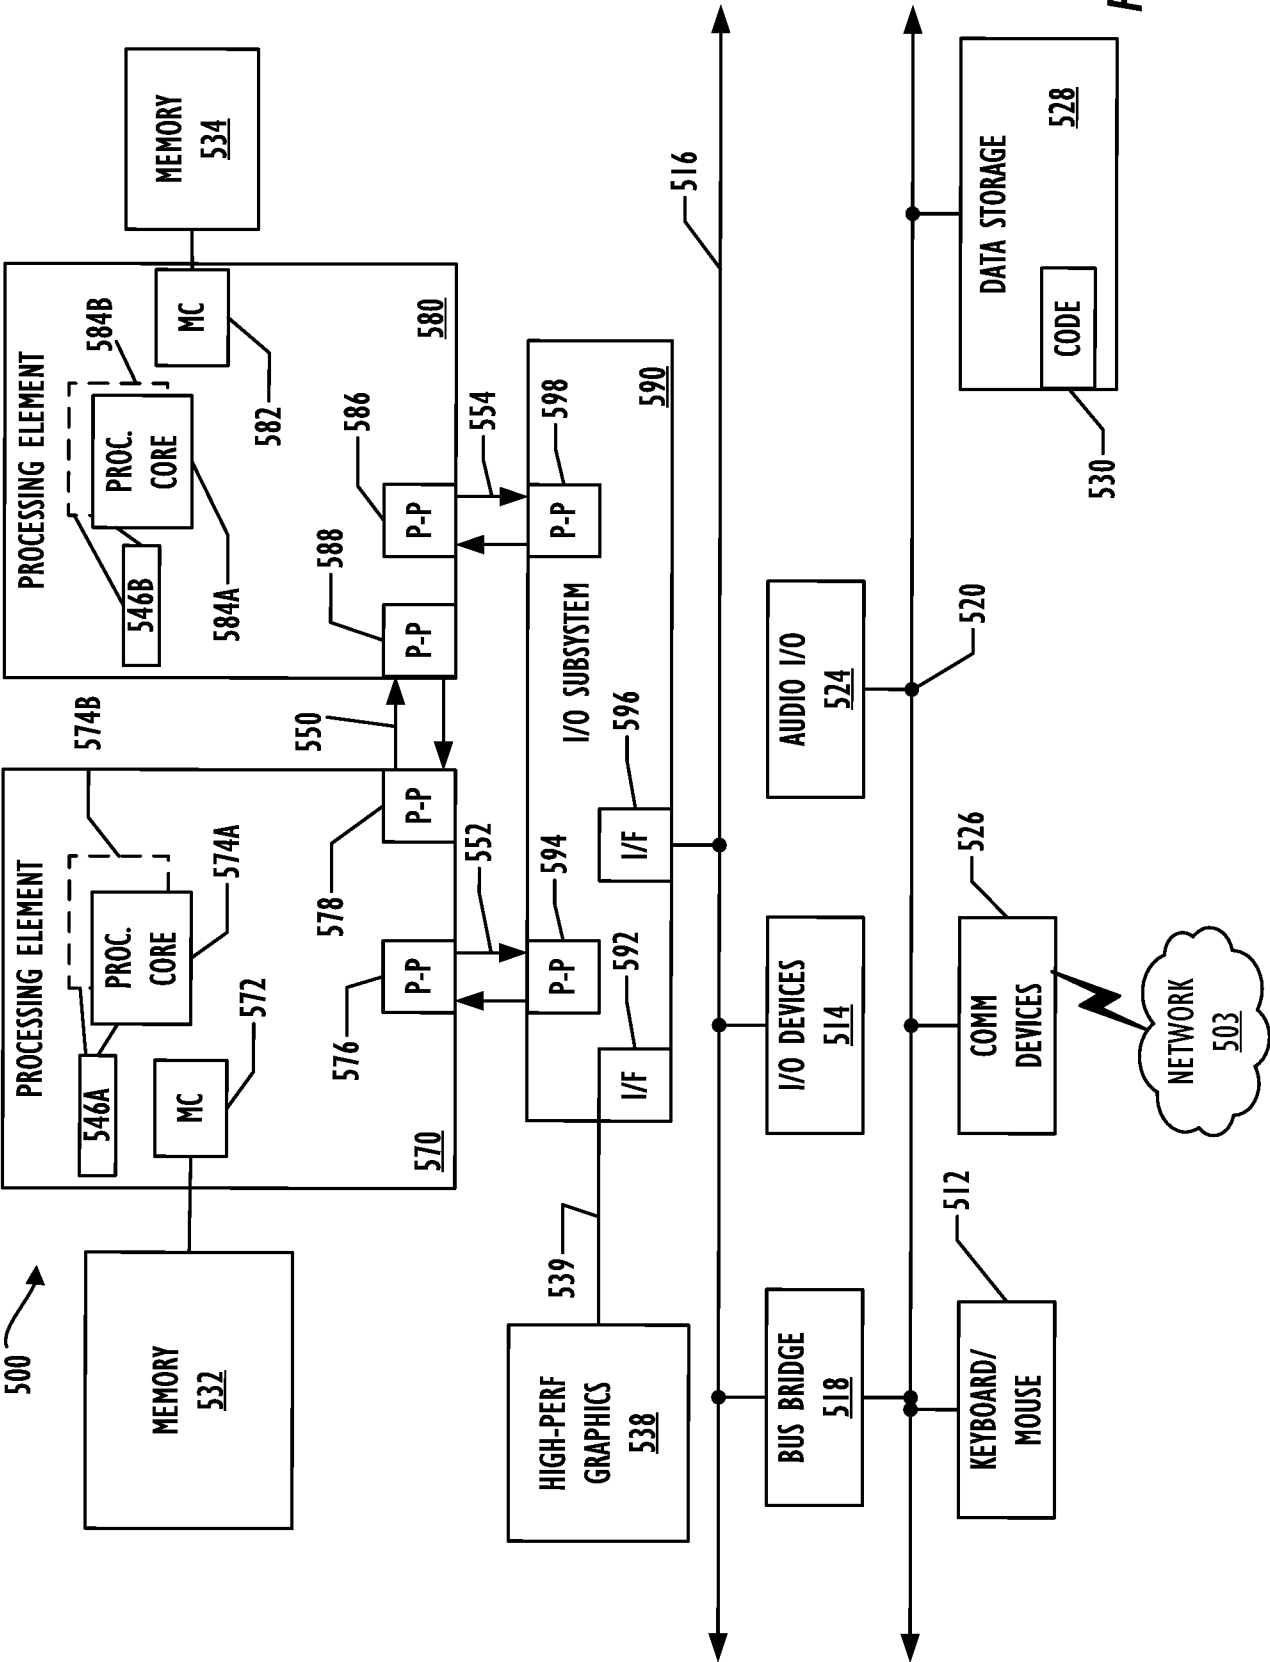


FIG. 5

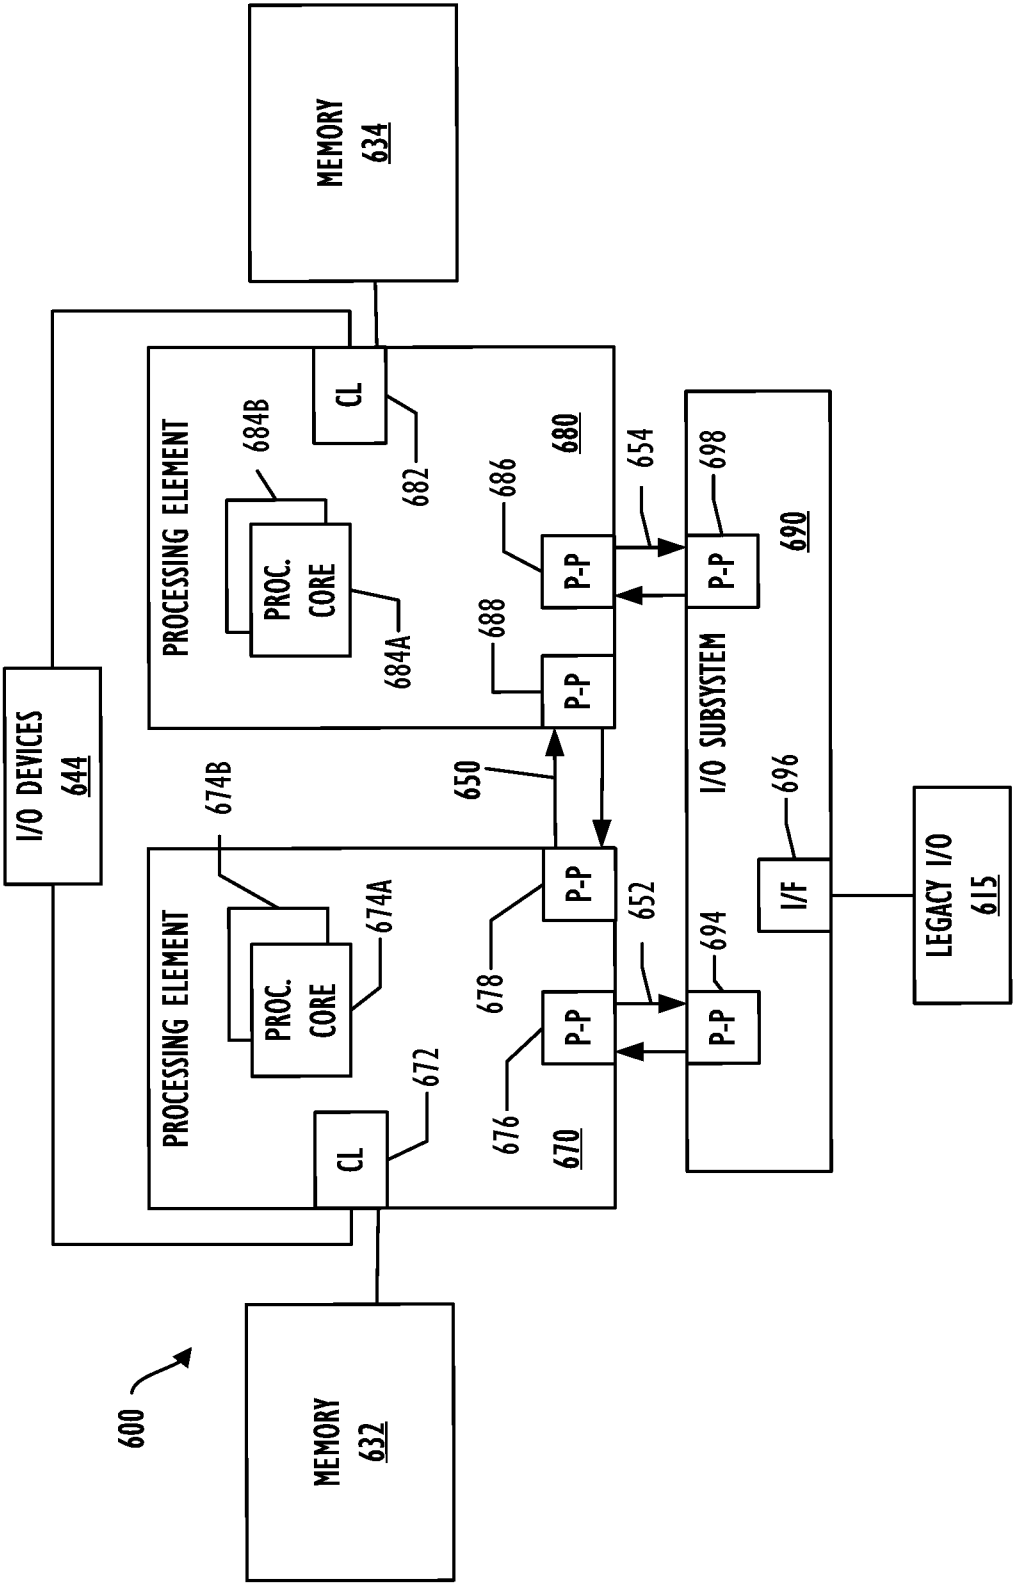


FIG. 6

**A. CLASSIFICATION OF SUBJECT MATTER****H04L 29/06(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
H04L 29/06; G06F 15/16; G06F 21/24; H04W 4/06; H04W 12/08; H04W 4/00; H04W 64/00Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
Korean utility models and applications for utility models  
Japanese utility models and applications for utility modelsElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
eKOMPASS(KIPO internal) & Keywords: bluetooth, low, energy, beacon, content, validation, server, safety, level, score, and similar terms.**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

| Category* | Citation of document, with indication, where appropriate, of the relevant passages                                                                                     | Relevant to claim No. |
|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Y         | US 2015-0334569 A1 (CISCO TECHNOLOGY, INC.) 19 November 2015<br>See paragraphs [0011], [0021], [0026], [0040]-[0051], [0056];<br>claims 1, 7, 9, 13; and figures 2, 4. | 1-4, 6-10, 14-15, 20  |
| A         |                                                                                                                                                                        | 5, 11-13, 16-19       |
| Y         | US 8108536 B1 (BRIAN HERNACKI et al.) 31 January 2012<br>See column 5, lines 38-48; column 9, lines 33-46; claims 1, 6;<br>and figures 2, 9.                           | 1-4, 6-10, 14-15, 20  |
| A         | US 2013-0227700 A1 (MANDEEP DHILLON et al.) 29 August 2013<br>See paragraphs [0011]-[0045]; and figures 1-3.                                                           | 1-20                  |
| A         | US 2015-0072618 A1 (JOHN HASTINGS GRANBERY) 12 March 2015<br>See paragraphs [0023]-[0054]; and figures 1-5.                                                            | 1-20                  |
| A         | US 2015-0126119 A1 (EGAN SCHULZ et al.) 07 May 2015<br>See paragraphs [0014]-[0034]; and figures 1-2.                                                                  | 1-20                  |



Further documents are listed in the continuation of Box C.



See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

20 February 2017 (20.02.2017)

Date of mailing of the international search report

**22 February 2017 (22.02.2017)**

Name and mailing address of the ISA/KR

International Application Division

Korean Intellectual Property Office


189 Cheongsa-ro, Seo-gu, Daejeon, 35208, Republic of Korea

Facsimile No. +82-42-481-8578

Authorized officer

KIM, Seong Woo

Telephone No. +82-42-481-3348



**INTERNATIONAL SEARCH REPORT**

Information on patent family members

International application No.

**PCT/US2016/060265**

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s) | Publication<br>date |
|-------------------------------------------|---------------------|----------------------------|---------------------|
| US 2015-0334569 A1                        | 19/11/2015          | US 09258713 B2             | 09/02/2016          |
| US 8108536 B1                             | 31/01/2012          | None                       |                     |
| US 2013-0227700 A1                        | 29/08/2013          | US 09390243 B2             | 12/07/2016          |
| US 2015-0072618 A1                        | 12/03/2015          | AU 2014-315484 A1          | 21/01/2016          |
|                                           |                     | CA 2916053 A1              | 12/03/2015          |
|                                           |                     | CN 105493484 A             | 13/04/2016          |
|                                           |                     | EP 3042494 A1              | 13/07/2016          |
|                                           |                     | KR 10-2016-0037134 A       | 05/04/2016          |
|                                           |                     | US 09445220 B2             | 13/09/2016          |
|                                           |                     | US 2016-345126 A1          | 24/11/2016          |
|                                           |                     | WO 2015-034755 A1          | 12/03/2015          |
| US 2015-0126119 A1                        | 07/05/2015          | AU 2014-347258 A1          | 21/01/2016          |
|                                           |                     | CA 2915909 A1              | 14/05/2015          |
|                                           |                     | CN 105340304 A             | 17/02/2016          |
|                                           |                     | EP 3066852 A1              | 14/09/2016          |
|                                           |                     | JP 2016-534618 A           | 04/11/2016          |
|                                           |                     | KR 10-2016-0026883 A       | 09/03/2016          |
|                                           |                     | US 09215570 B2             | 15/12/2015          |
|                                           |                     | US 2016-066162 A1          | 03/03/2016          |
|                                           |                     | WO 2015-069369 A1          | 14/05/2015          |