



(51) International Patent Classification:  
A61F 2/24 (2006.01)

(21) International Application Number:  
PCT/IT2010/000347

(22) International Filing Date:  
2 August 2010 (02.08.2010)

(25) Filing Language: English

(26) Publication Language: English

(72) Inventor; and

(71) Applicant : DE PAULIS, Ruggero [IT/IT]; Via L. Ronzoni, 65, I-00151 - Roma (IT).

(74) Agent: FEZZARDI, Antonio; Studio Ferrario SRL, Via Collina, 36, I-00187 - Rome (IT).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,

DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: ANNULOPLASTY BAND FOR A SIMPLIFIED APPROACH TO MITRAL VALVULOPLASTY FOR DEGENERATIVE DISEASES

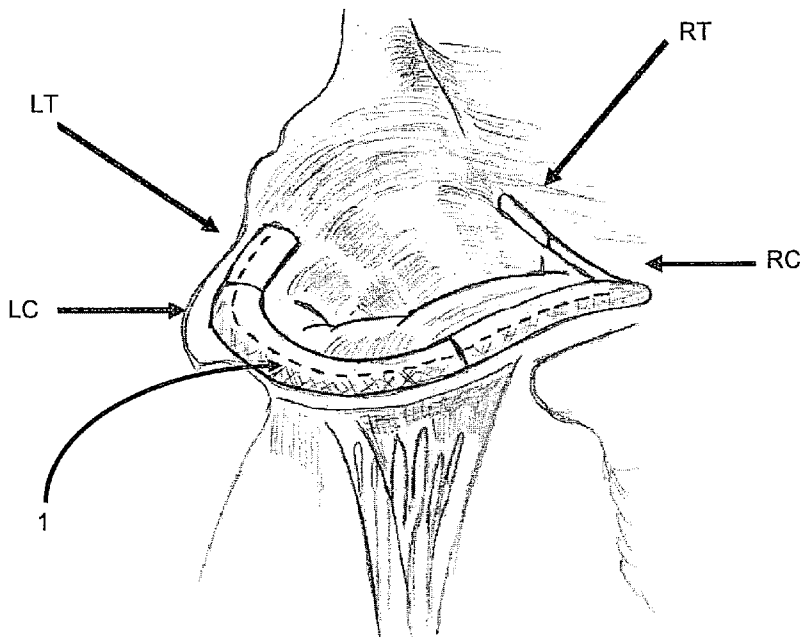


FIG. 1

(57) Abstract: The present invention relates substantially to a device for repair of heart valves, and more particularly to an improved annuloplasty band which is constituted by a semirigid open band comprising a sheath and a generally curved stiffening semirigid element disposed within the sheath which extends from a first end adjacent the antero-lateral trigone to a second end adjacent the postero-medial trigone defining a non flat (not coplanar) compound C-curve shape so as to mime both in anterior and posterior side a saddle shape.

## ANNULOPLASTY BAND FOR A SIMPLIFIED APPROACH TO MITRAL VALVULOPLASTY FOR DEGENERATIVE DISEASES

The present invention relates substantially to a device for repair of heart valves, and more particularly to an improved annuloplasty band.

Annuloplasty prostheses, generally categorized as either annuloplasty rings or annuloplasty bands, are employed in conjunction with valvular reconstructive surgery to assist in the correction of heart valve defects such as stenosis and valvular insufficiency. There are two atrio-ventricular valves in the heart. That on the left side of the heart known as the mitral valve, and that on the right side known as the tricuspid valve. Anatomically speaking, each valve type forms or defines a valve annulus and valve leaflets. To this end, the mitral and tricuspid valves differ significantly in anatomy. Whereas the annulus of mitral valve is somewhat "D" shaped, the annulus of the tricuspid valve is more nearly circular.

Both valves can be subjected to or incur in damage that requires that they must be repaired or replaced. The effects of valvular dysfunction vary. Mitral regurgitation has more severe physiological consequences to the patient than tricuspid valve regurgitation, a small amount of which is tolerated quite well. Many of the defects are associated with dilation of the valve annulus. This dilation not only prevents competence of the valve but also results in distortion of the normal shape of the valve orifice. Remodeling of the annulus is therefore central to most

reconstructive procedures on the mitral valve. In this regard, clinical experience has shown that repair of the valve, when technically possible, produces better long-term results as compared to valve replacement.

5 Many procedures have been described to correct pathology of the valve leaflets and their associated chordae tendinae and papillary muscles. In mitral repairs, it is considered important to preserve the normal distance between the two fibrous trigones. The  
10 trigones almost straddle the anterior leaflet portion of the annulus.

A significant surgical diminution of the inter-trigonal distance could cause left ventricular outflow obstruction. Thus, it is highly desirable to maintain  
15 the natural inter-trigonal distance during and following mitral valve repair surgery.

Consequently, when a mitral valve is repaired (be it the posterior or anterior leaflet) the result is generally a reduction in the size of the posterior  
20 segment of the mitral valve annulus. As a part of the mitral valve repair, the involved segment of the annulus is diminished (i.e. constricted) so that the leaflets may coapt correctly on closing, and the annulus is stabilized to prevent post-operative  
25 dilatation from occurring. This is frequently achieved by the implantation of a prosthetic ring or band in the supra annular position. The purpose of the ring or band is to restrict and/or support the annulus to correct and/or prevent valvular insufficiency. However, it is  
30 important not to over restrict the annulus or an unacceptable valvular stenosis could result.

As described above, both annuloplasty rings and annuloplasty bands are available for repair of an atrio-ventricular valve.

A flexible annuloplasty ring has been available, among others, under the trade designation "DURAN(TM)" by Medtronic, Inc., USA. In general terms, annuloplasty rings completely encompass both the anterior and posterior portions of the valve annulus. The posterior portion is often diseased or dilated and not well supported by heart tissue. The anterior portion, in contrast, is well supported by surrounding heart tissue. Thus, it is possible that the annuloplasty ring may overtly support an otherwise healthy anterior portion, potentially leading to tissue failure.

Annuloplasty bands, on the other hand, are specifically designed to primarily encompass only a portion of the valve annulus. For example, a mitral valve annuloplasty band is typically configured to encompass only the posterior portion of the mitral valve annulus, thus promoting natural movement of the anterior portion. In addition to facilitating natural movement of the healthy portion of the valve annulus, annuloplasty bands can be implanted more quickly than annuloplasty rings, as fewer sutures are required. Examples of annuloplasty bands are shown in US5824066 and WO2000/74603. While viable, annuloplasty bands present other concerns. For example, if the band is only anchored into friable valve annulus tissue, there is some concern that the band may possibly pivot excessively relative to the valve annulus. Furthermore, the profile (e.g., thickness) of prior annuloplasty

bands may theoretically be sufficiently large so as to restrict or disturb blood flow.

Furthermore, from US7371259 an annuloplasty band adapted to provide reinforced attachment to the valve annulus, and a holder and a sizer that facilitate  
5 implantation thereof are known.

In the field of annuloplasty prostheses it is well known that rings or bands are needed for durable results, that any type of ring abolishes annular  
10 movements, and that intertrigonal distance does not change.

**The saddle: aorto-mitral junction**

During systole annular contraction occurs, narrowing the valve orifice, the commissural areas are pulled down accentuating the anterior mitral saddle and  
15 accomodating the bulging root (Adams and coll. Curr. Cardiology Reports 2008; 10:226-32).

Aortic and mitral annular area have coupled reciprocal behavior: AoArea expansion may facilitate  
20 Mitral Area expansion and viceversa (Veronesi and coll. Circ Cardiovasc Imaging 2009; 2:24-31).

The angle between the two valves changes during the cardiac cycle supporting the role of the fibrous continuity as an anchor when the two annuli move  
25 towards each others (Veronesi and coll. Circ Cardiovasc Imaging 2009; 2:24-31)

Annulus systolic dynamics are substantially:

- Septo-lateral distance = -23%
- Comm-Comm distance = -12%
- 30 - Inter-trigonal distance = +11%

Importance of the saddle shape is due to a

plurality of advantages: Maintains leaflet curvature decreasing leaflet and chordal stress (Ryan et al. e Ann Thorac Surg 2008; 86:749-760); Reduces stress on anterior leaflet (Jimenez JTCVS 2007; 134:1562-8; 5 Jensen Circulation 2008; 118:S250-55) Reduces stress on both leaflets (Salgo et al. Circulation 2002; 106:711-7).

For all these reason it is important to maintain or re-established a normal saddle shape after surgery 10 because a more normal physiology will probably make the operation of valve plasty more durable and efficient.

The present invention substantially relates to an improved annuloplasty band for mitral valve plasty having a saddle shape, thereby obtaining both the 15 advantages of an open band and those of the saddle shape.

A better understanding of the invention will be obtained from the following detailed description with reference to the attached drawings, which illustrate, 20 purely by way of non-limiting example, a preferred embodiment thereof.

In the drawings:

Figure 1 is a 3D view of the open band with saddle shape according to the invention.

25 ADVANTAGES OF AN OPEN BAND:

The use of an Open band is important in order to: Avoid anterior leaflet folding or distortion, Avoid unnecessary suture placement, Leave enough space to the surgeon for chordal placement.

30 More particularly, the avoiding of unnecessary suture placement is very advantageous in the case of

MICS (minimally invasive approach) and because it reduces the risk of leaflet tearing, and of interfering with the aortic root (c.f.r. reimplantation below).

Furthermore, it has to be noted that the Open ring  
5 is fast, effective, more forgiving (no folds, no tearing, no distortion), and has a larger orifice area.

On the other hand it is well established how the open band is able to achieve all the objective of a closed ring and in particular:

10 it is known that Semirigid Band (or open ring) restores annular geometry, i.e. D-shape is restored (Redmond et al. J Heart valve Dis 2008; 17:115-8);

respects anterior motion of the saddle (Redmond J Heart valve Dis 2008; 17:115-8. Timek et al. Ann Thorac  
15 Surg 2001; 72:966-74).

the implantation of an open band gives durable results (Salvador et al. J Thorac Cardiovasc Surg 2008; 135: 1280 - 1287.)

#### THE ROLE OF FULL RING WITH A SADDLE SHAPE

20 Full rings with a saddle shape have been designed with the aim of re-establishes the saddle shape. However the drawbacks of such rings are that the saddle shape is fixed both in systole and in diastole and its shape can not change during the cardiac cycle.  
25 Furthermore the use of a full ring makes the anterior portion of the mitral valve rigid with time, as the rest of the annulus. In particular this portion of the ring might also interfere with the base of the aorta. In fact it has been reported that during a  
30 reimplantation procedure (a procedure used to replace the aortic root) it was necessary to remove the mitral

ring because it distorted the right and noncoronary aortic cusps (Mohr in discussion of Redmond and coll.)

#### SADDLE SHAPE AND OPEN BAND

For what saddle shape and open band are concerned,  
5 it should be noted that after implant of Cosgrove band the saddle shape is restored (Timek et al. Ann Thorac Surg 2001; 72:966-74); Saddle shape is in fact the ratio between annular height to C-C (commissuro-commissural) width. When C-C is restored this ratio  
10 will obviously increase. Furthermore, it is proved that only a partial ring preserves anterior annular flexion during cardiac cycle (Dagum et al. JTCVS 2001; 122:665-73). In fact it keeps anterior MA (mitral angle) elevation and anterior posterior MA flexion.

15 At present the known devices for valve repair either are full rings (with or without a saddle shape) or are flat open band. There are two types of open band: one that takes their shape only after  
20 implantation (being completely souple not having any rigidity)and another one (Future-Band) that is semirigid and flat.

The known devices for heart valve repair have a plurality of drawbacks those of a closed ring (with or without a saddle shape) have been outlined but are  
25 basically related to their interference with the anterior portion of the mitral valve that is unable to maintain its movement during the cardiac cycle as well as negatively influencing the physiologic movements of the aortic root. Regarding the existing open band they:

- 30 i. Do not have a saddle shape (ant. or post.)  
ii. There is not a marked portion corresponding to

the commissures and another corresponding to the trigones

iii. Curvature at their ends are non-existing or are too sharp.

5           According to the present invention, it is provided a device constituted by an open saddle 1 (herein after will be indicated also as "Physio-C" for being physiologic with a "C" shape) as schematically shown in figure 1.

10           Advantageously, the Physio-C or open saddle 1 has an optimized shape for increasing size (from D-shape to a more circular similar to the device known as "Physio II") and an optimized curvature at the commissures.

15           Furthermore, the device according to the present invention is semirigid and has an initial saddle shape at the trigones, thereby obtaining a clear location for trigones (LT and RT) and for commissures (LC and RC).

20           A peculiar feature of the invention, consists in that said saddle-shape is provided both to the anterior side and to the posterior side.

25           The two ends of the "C" shape of the open saddle 1 are rounded and with the increase of the size of the device, its general shape changes from a more oval shape to a more circular shape: in other words, when the size increases, then the antero-posterior diameter increases progressively more than the latero-lateral diameter.

Differently from known Physio II,

- It does not fix the aorto-mitral junction
- 30   - It allows cyclic movement of the saddle
- It allows for possible posterior displacement of

the saddle.

Accordingly, the open saddle 1 of the present invention preserves the saddle but does not fix it in systole: therefore, it combines the advantages of the  
5 open band and the saddle ring.

While the known Cosgrove-Edwards Annuloplasty System is completely soft, the open band with saddle shape according to the present invention comprises an inner stiffening element which maintains said curved  
10 (saddle shape) shape.

## CLAIMS

1. A device to repair heart valves, characterized in that it is constituted by a semirigid open band (1) comprising a sheath and a generally curved stiffening semirigid element disposed within the sheath which extends  
5 from a first end adjacent the antero-lateral trigone to a second end adjacent the postero-medial trigone defining a non flat (not coplanar) compound C-curve shape so as to mime both in anterior and posterior side a saddle shape.

2. A device according to claim 1 wherein the two  
10 ends of the C-shape of the open band are rounded; thereby obtaining a clear location for trigones (left trigone, LT; right trigone, RT) and for the commissures (left commissure, LC; right commissure, RC).

3. A device according to preceding claims  
15 characterized by the fact that with the increase of the size of the device, its general shape changes from a more oval shape to a more circular shape.

4. A device according to preceding claims  
20 characterized in that it has an initial saddle shape at the trigones.

5. A device according to preceding claims characterized in that markers are provided in the sheath that identify both the commissures and the trigones.

1/1

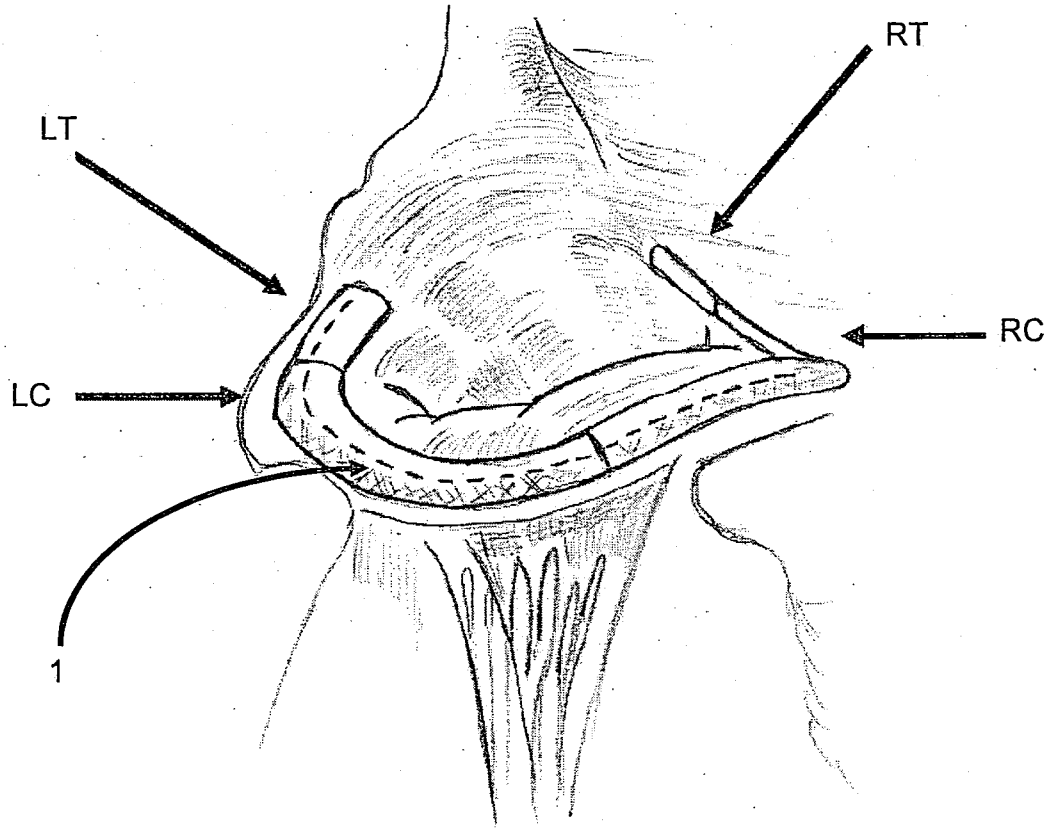


FIG. 1

## INTERNATIONAL SEARCH REPORT

International application No

PCT/IT2010/000347

## A. CLASSIFICATION OF SUBJECT MATTER

INV. A61F2/24

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/131533 A1 (ALFIERI OTTAVIO [IT] ET AL) 16 June 2005 (2005-06-16)	1-5
Y	paragraphs [0019], [6870], [0079] - [0080], [0087], [0092], [0096]; figures 1-21	5
X	WO 2008/134723 A1 (EDWARDS LIFESCIENCES CORP [US]; ALFIERI OTTAVIO [IT]) 6 November 2008 (2008-11-06)	1-4
Y	paragraphs [0015], [0031], [0032], [0033], [0047] - [0050], [0054], [0058]; figures 1-9	5
X	US 2007/100441 A1 (KRON IRVING L [US] ET AL) 3 May 2007 (2007-05-03)	1-4
Y	paragraphs [0002], [0011], [0027] - [0039]; figures 6,7	5
	----- -/--	

 Further documents are listed in the continuation of Box C. See patent family annex.

\* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&amp;" document member of the same patent family

Date of the actual completion of the international search

5 November 2010

Date of mailing of the international search report

15/11/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040,  
Fax: (+31-70) 340-3016

Authorized officer

Prechtel, A

## INTERNATIONAL SEARCH REPORT

International application No

PCT/IT2010/000347

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2005/256568 A1 (LIM JYUE B [US] ET AL)	1-4
Y	17 November 2005 (2005-11-17) paragraphs [0003], [0 11] - [0020]; figures 1-6 -----	5

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No <b>PCT/IT2010/000347</b>
--

Patent document cited in search report	A1	Publication date	Patent family member(s)	Publication date
US 2005131533	A1	16-06-2005	NONE	
WO 2008134723	A1	06-11-2008	CA 2685227 A1 CN 101686859 A EP 2142144 A1 US 2008275551 A1	06-11-2008 31-03-2010 13-01-2010 06-11-2008
US 2007100441	A1	03-05-2007	NONE	
US 2005256568	A1	17-11-2005	EP 1761210 A1 JP 2007537006 T WO 2005112830 A1	14-03-2007 20-12-2007 01-12-2005