

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
27 October 2005 (27.10.2005)

PCT

(10) International Publication Number  
WO 2005/101064 A1

(51) International Patent Classification<sup>7</sup>: G02B 3/14

MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/IB2005/051229

(22) International Filing Date: 14 April 2005 (14.04.2005)

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0408480.2 16 April 2004 (16.04.2004) GB

**Declaration under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): KUIPER, Stein [NL/NL]; c/o Philips Intellectual Property, & Standards, Cross Oak Lane, Redhill Surrey RH1 5HA (GB). HENDRIKS, Bernardus, H., W. [NL/NL]; c/o Philips Intellectual Property, & Standards, Cross Oak Lane, Redhill Surrey RH1 5HA (GB).

(74) Agents: WILLIAMSON, Paul, L. et al.; c/o Philips Intellectual Property, & Standards, Cross Oak Lane, Redhill Surrey RH1 5HA (GB).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: VARIABLE FOCUS LENS HAVING TWO LIQUIDS AND ELECTRONIC DEVICE

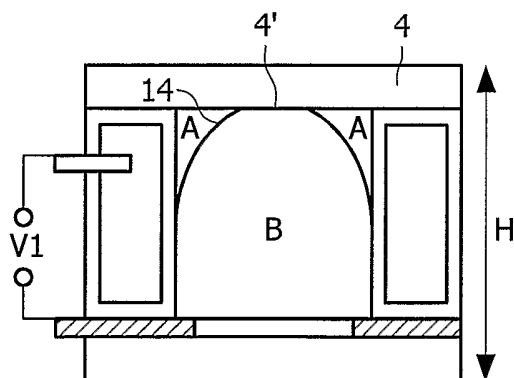

(57) Abstract: A variable focus lens comprises a container enclosing an insulating liquid (A) and a conducting liquid (B), the insulating liquid (A) and the conducting liquid (B) being immiscible, having different refractive indices and being in contact with each other via an interface (14), the liquids (A, B) being at least partially placed in a light path through the container. The variable focus lens further comprises an electrode arrangement (2, 12) for controlling the shape of the interface (14) by means of an applied voltage. The container further comprises a transparent end portion (4) in the light path, a part (4') the transparent end portion (4) defining the shape of a part of the interface (14) at a predefined value of the voltage. Consequently, a variable focus lens with a reduced building height (H) is achieved that suffers less from the gradual formation of its small droplets of the conducting liquid (B) on the inner surface of the end portion (4).

WO 2005/101064 A1

## DESCRIPTION

**VARIABLE FOCUS LENS HAVING TWO LIQUIDS AND ELECTRONIC  
DEVICE**

5

The present invention relates to a variable focus lens comprising a container enclosing an insulating liquid and a conducting liquid, the insulating liquid and the conducting liquid being immiscible, having different refractive indices and being in contact with each other via an interface, the liquids being placed in a light path through the container; an electrode arrangement for controlling the shape of the interface by means of a voltage; the container further comprising a transparent end portion in the light path.

The present invention further relates to an electronic device comprising such a variable focus lens.

15

Optical devices based on the manipulation of liquids are rapidly gaining large commercial interest, not in the least because of their lack of mechanically moving parts and the relative simplicity of the devices, which makes the devices cheap and durable.

For instance, in US patent application US2001/0017985 an optical device is disclosed that incorporates two immiscible liquids with equal refractive indices but different transmittances, with one of the two liquids being conductive. By varying the interface between these two liquids, the amount of each of the liquids in the light path through the device is changed and a diaphragm is obtained as a result.

International patent application WO03/069380 discloses a cylindrical variable focus lens incorporating two immiscible fluids having different refractive indices, one of the fluids being conductive and the other being insulating. The shape of the interface between the two fluids is manipulated by applying a voltage across the lens, which can be used to introduce a change in the focal point of the lens. The walls of the cylinder and one of the transparent

lids of the cylinder are coated with a hydrophobic coating to ensure that at least in a switched off state the conductive fluid, which typically is a polar liquid, does not contact said walls in order to maintain a well-defined interface between the fluids.

5           However, since the lids of the cylinder may be formed from a hydrophilic material such as glass or a hydrophilic polymer, a pinhole in the hydrophobic coating can cause the formation of microdroplets of the conductive liquid at the pinholes over time due to slow penetration of the insulating liquid by the  
10           conductive liquid or by the presence of a temperature gradient through the variable focus lens, leading to the condensation of droplets of the conductive liquid on the inner surface of the colder of the two lids. This is highly unwanted, because these microdroplets distort the image that is generated by the lens.

15           The present invention seeks to provide an variable focus lens in which the formation of such microdroplets is significantly reduced.

          The present invention further seeks to provide an electronic device comprising such an variable focus lens.

20           According to an aspect of the invention, there is provided an variable focus lens comprising a container enclosing an insulating liquid and a conducting liquid, the insulating liquid and the conducting liquid being immiscible, having different refractive indices and being in contact with each other via an interface, the liquids being at least partially placed in a light path through the container; an electrode arrangement for controlling the shape of  
25           the interface by means of a voltage; the container further comprising a transparent end portion in the light path, the transparent end portion defining the shape of a part of the interface at a predefined value of the voltage.

          In such an variable focus lens, the conductive liquid intentionally touches the end portion of the container, e.g., a coated lid of a cylindrical  
30           chamber, at a predefined voltage. Consequently, the microdroplets of the conducting liquid that are present on the end portion will merge with the bulk

conducting liquid due to the higher affinity therewith, thus yielding an end portion with a reduced number of microdroplets on its inner surface.

The variable focus lens of the present invention has the additional advantage that because of the fact that some optical power, e.g., lens power, is sacrificed to counter the presence of the microdroplets of the conducting fluid on the inner surface of the end portion, the building height of the variable focus lens can be reduced, which is an important advantage in application domains where the form factor of the device is of relevance, e.g., integration into camera modules for handheld devices such as mobile phones.

Preferably, the predefined voltage is 0 Volt, to have the conducting liquid touching the end portion in an off state of the variable focus lens. Obviously, when the interface is in contact with the transparent end portion, the image passing through the variable focus lens will be distorted. Therefore, it is desirable to let this occur during an off state of the variable focus lens, to prevent the user of the variable focus lens from noticing this distortion.

At this point, it is pointed out that in Fig. 7B of US patent application US2001/0017985 discloses a diaphragm based on two immiscible liquids, in which the shape of the interface between the two liquids is partially defined by a lid of the container of the diaphragm. However, the two liquids disclosed therein have the same refractive indices but different transmittances. Consequently, the interface between the two liquids does not affect the direction of the light path through the diaphragm. In other words, its shape is irrelevant to the performance of the diaphragm, which is determined by the respective thicknesses of the liquid layers in the light path through the diaphragm. In contrast, the quality of the shape of the interface between the two liquids in a variable focus lens is crucial for the performance of a variable focus lens of the present invention. Therefore, it is not obvious to a person skilled in the art that a deformation of a liquid interface in a diaphragm as disclosed in US patent application US2001/0017985 would lead to an advantageous effect in a liquid-based variable focus lens.

In addition, US patent application US2001/0017985 is completely silent about the problem of microdroplet formation on the end portion of the

container touching the interface between the liquids, so a person skilled in the art would not derive the present invention from this prior art, rendering the present invention both novel and inventive over this prior art.

According to another aspect of the invention, there is provided an  
5 electronic device comprising an variable focus lens comprising a container enclosing an insulating liquid and a conducting liquid, the insulating liquid and the conducting liquid being immiscible, having different refractive indices and being in contact with each other via an interface, the liquids being placed in a light path through the container; an electrode arrangement for controlling the  
10 shape of the interface by means of a voltage; the container further comprising a transparent end portion in the light path, the transparent end portion defining the shape of a part of the interface at a predefined value of the voltage; and driver circuitry coupled to the electrode arrangement, the driver circuitry being arranged to provide the electrode arrangement with the predefined voltage in  
15 an idle state of the variable focus lens and provide the electrode arrangement with a further voltage for separating the interface from the transparent end portion when the variable focus lens is enabled.

This has the advantage that as soon as a functionality of the electronic device including the variable focus lens is started up, the driver circuitry will  
20 provide the electrode arrangement of the variable focus lens with the further voltage, leading to the separation of the interface from the transparent end portion, so that the user of the electronic device is provided with an undistorted image immediately after the start-up of the functionality requiring the variable focus lens.

25 In an embodiment, the further voltage is a further predefined voltage, which may be stored in an internal memory of the driver circuitry or in a memory external thereto, or may be hard-coded into the driver circuitry, and so on.

In an alternative embodiment, the electronic device further comprises  
30 an image sensor for sensing light passing through the variable focus lens, the image sensor being arranged to provide the driver circuitry with an output signal for controlling the magnitude of the further voltage.

In this embodiment, the further voltage is dynamically determined by means of an optical feedback mechanism. This has the advantage that a change in the variable focus lens characteristics, which for instance can happen through ageing of the variable focus lens and which will have an impact on the magnitude of the further voltage, is automatically compensated for.

The invention is described in more detail and by way of non-limiting examples with reference to the accompanying drawings, wherein:

10

Fig. 1 schematically depicts a prior art variable focus lens;

Fig. 2 schematically depicts an variable focus lens according to the present invention; and

Fig. 3 schematically depicts an electronic device according to the present invention.

It should be understood that the Figures are merely schematic and are not drawn to scale. It should also be understood that the same reference numerals are used throughout the Figures to indicate the same or similar parts.

20

In Fig. 1, a variable focus lens as disclosed in International Patent application WO 03/069380 is shown. The variable focus lens comprises a first insulating fluid A and a second conductive fluid B housed in a cylindrical chamber. In the context of the present invention, the phrase conductive is intended to include polar and polarizable fluids. The fluids A and B are immiscible, have different refractive indices and preferably have the same density to avoid orientation-dependent gravitational effects on the orientation of the fluids including the interface 14 between the fluids. The cylindrical chamber further comprises a first end portion 4 and a second end portion 6, with the first end portion 4 as well as the inner walls of the cylindrical chamber

30

being covered by a hydrophobic and insulating coating such as AF1600™ from the DuPont company, which may be combined with a stack of parylene.

The shape of the interface 14 can be switched in a continuous fashion from a convex shape shown in orientation (a) to a concave shape shown in orientation (b) by varying a voltage from a value V1 to a value V2 across the cylindrical electrode 2 embedded in the chamber wall and a, preferably transparent, annular electrode 12 on the second end portion 6, which is in conductive contact with the second fluid B. Consequently, the focal point of the light path L through the cylinder is altered.

Inside this lens, microdroplets or small droplets of the second liquid B can become trapped on the inner surface of the end portion 4, causing aberrations in the image to be captured behind the variable focus lens. Such droplets can for instance be formed if the second end portion 6 is located in the presence of a heat source, e.g., an image sensor located behind the variable focus lens, causing condensation of the fluid B on the colder first end portion 4.

Fig. 2 shows an embodiment of a variable focus lens of the present invention. In comparison to the prior art lens shown in Fig. 1, the variable focus lens of the present invention has a reduced building height H causing a part of the interface 14 between an insulating liquid A and a conducting liquid B to be in contact with part 4' of the end portion 4. In other words, the part 4' of the end portion 4 defines the shape of the part of the interface 14 in contact with part 4'. The lower building height of the variable focus lens of the present invention is advantageous for integration of the variable focus lens in applications where building height is an issue, such as mobile phones equipped with variable focus lenses, compact cameras, portable multi-standard optical storage devices such as DVDs, or endoscopes.

In addition, small droplets of the conductive liquid B that have formed on part 4' of the end portion 4 or in the vicinity thereof during operation of the variable focus lens will be absorbed by the bulk of the conductive liquid B when the interface 14 is shaped as shown in (a). Preferably, position (a) is the

position at rest, i.e., without the application of a voltage across electrode 2 and electrode 12, i.e.,  $V_1 = 0V$ , although this is not necessary.

When the interface 14 has a disrupted shape as shown in (a), the image captured behind the variable focus lens may be distorted, especially when the variable focus lens is used as a variable focus lens, in which case the insulating liquid A and the conductive liquid B have different refractive indices and preferably have similar densities. This can be avoided by applying a voltage  $V_1'$  across the across electrode 2 and electrode 12 upon activation of the variable focus lens as shown in (b) to remove the contact between the interface 14 and the end portion 4.

It is emphasized that the end portion 4 may be any suitable lid for the container of the variable focus lens, e.g., a glass plate or a glass lens with a hydrophobic coating, a hydrophilic polymer plate or lens with a hydrophobic coating, a hydrophobic polymer plate or lens with a hydrophilic coating, an integral part of the container and so on. The container of the liquids preferably is cylindrical, although other shapes, e.g., conical shapes, are also feasible. It is also emphasized that the variable focus lens of the present invention preferably is a variable focus lens, but that this is not strictly necessary; a diaphragm such as disclosed in US patent application US2001/0017985 may also benefit from for instance the lower building height of the variable focus lens of the present invention.

Fig. 3 shows a part of an electronic device 1 of the present invention including the variable focus lens of the present invention as shown in Fig. 2 and described in the accompanying detailed description. The electronic device 1 further comprises driver circuitry 20 coupled to the electrode arrangement comprising electrode 2 and electrode 12. The driver circuitry may be responsive to an image sensor 30, which senses, or measures, the light i.e., the image, that passes through the variable focus lens. In an idle state of the variable focus lens, the driver circuitry 20 will apply a voltage  $V_1$  across the electrode 2 and the electrode 12, with  $V_1$  preferably being 0V. Upon activation of a function of the electronic device 1 requiring the functionality of the variable focus lens of the present invention, which for instance may be a user selecting

a camera function on a mobile phone, the driver circuitry 20 will be triggered to apply a further voltage  $V1'$  across the electrodes 2 and 12 to remove the contact between the interface 14 and the end portion 4, as depicted in situation (b) in Fig. 2., after which the voltage may be varied between a value  $V1'$  and a value  $V2$  as shown in Fig 1(b) during operation of the variable focus lens of the present invention.

The magnitude of the further voltage  $V1'$  may be determined in a number of ways. For instance, the magnitude may be predefined and stored in a memory 22, which may be an internal memory structure of the driver circuitry 20 or an external memory, from where it is retrieved upon activation of the variable focus lens. This has the advantage that no measurements are required and that the interface 14 can be rapidly altered to the desired shape upon activation of the variable focus lens. However, in implementations of the variable focus lens of the present invention where the magnitude of the further voltage increases upon ageing of the variable focus lens, this may cause the magnitude of the further voltage stored in memory 22 to become insufficient.

Alternatively, the magnitude of the further voltage may be determined dynamically. This can for instance be achieved by increasing the voltage provided by the driver circuitry 20 to the electrode arrangement of the variable focus lens until the image captured by the image sensor 30 is free of the distortion caused by the contact of the interface 14 with the part 4' of the end portion 4 of the variable focus lens.

Other dynamical determinations of the magnitude of the further voltage can be thought of; for instance, the electrode arrangement of the variable focus lens may be extended with a transparent electrode (not shown) on the end portion 4 for sensing the presence of a conductive contact or a capacitance between the end portion 4 and the conducting liquid B, which can be used to accurately remove such a contact upon activation of the variable focus lens of the present invention.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the

appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not  
5 exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate  
10 that a combination of these measures cannot be used to advantage.

## CLAIMS

1. A variable focus lens comprising:
  - a container enclosing an insulating liquid (A) and a conducting liquid (B), the insulating liquid (A) and the conducting liquid (B) being immiscible, having different refractive indices and being in contact with each other via an interface (14), the liquids (A; B) being at least partially placed in a light path through the container;
  - an electrode arrangement (2; 12) for controlling the shape of the interface (14) by means of a voltage;
  - the container further comprising a transparent end portion (4) in the light path, a part (4') of the transparent end portion (4) defining the shape of a part of the interface (14) at a predefined voltage (V1).
2. An variable focus lens as claimed in claim 1, wherein the predefined value (V1) of the applied voltage is 0V.
3. An electronic device (1) comprising:
  - a variable focus lens comprising:
    - a container enclosing an insulating liquid (A) and a conducting liquid (B), the insulating liquid (A) and the conducting liquid (B) being immiscible, having different refractive indices and being in contact with each other via an interface (14), the liquids (A; B) being at least partially placed in a light path through the container;
    - an electrode arrangement (2; 12) for controlling the shape of the interface (14) by means of a voltage;
    - the container further comprising a transparent end portion (4) in the light path, a part (4') of the transparent end portion (4) defining the shape of a part of the interface (14) at a predefined voltage (V1); and
    - driver circuitry (20) coupled to the electrode arrangement (2;12), the driver circuitry (20) being arranged to:

apply the predefined voltage (V1) across the electrode arrangement (2; 12) in an idle state of the variable focus lens; and

5 apply a further voltage (V1') across the electrode arrangement (2; 12) for separating the interface (14) from the transparent end portion (4) when the variable focus lens is enabled.

4. An electronic device (1) as claimed in claim 3, wherein the further voltage (V1') is a further predefined voltage.

10 5. An electronic device (1) as claimed in claim 3, wherein the electronic device (1) further comprises an image sensor (30) for sensing light passing through the variable focus lens, the image sensor (30) being arranged to provide the driver circuitry (20) with an output signal for controlling the magnitude of the further voltage (V1').

15

1/2

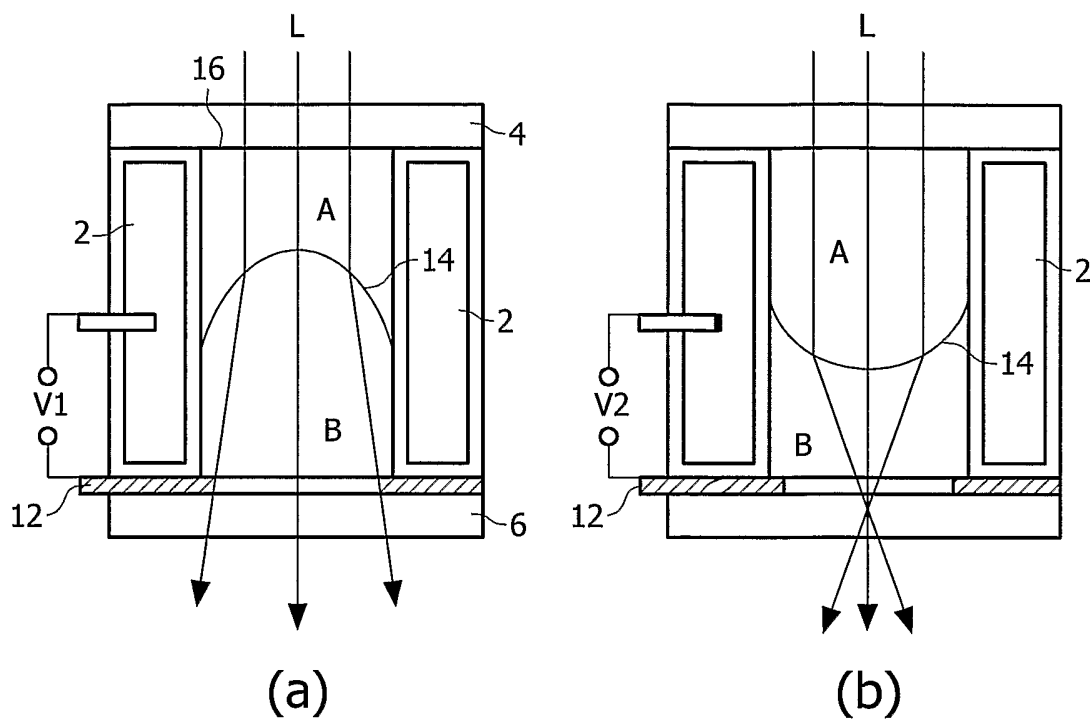


FIG. 1 (prior art)

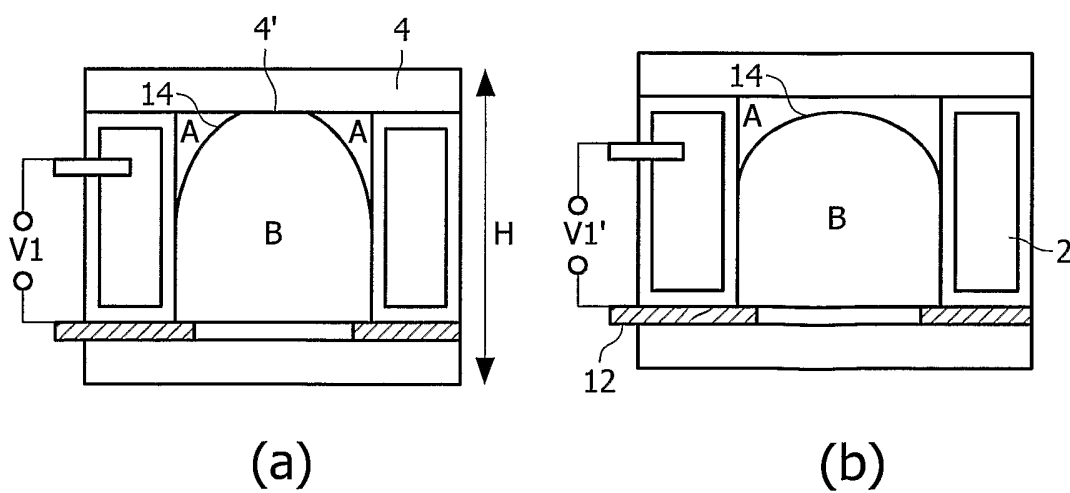


FIG. 2

2/2

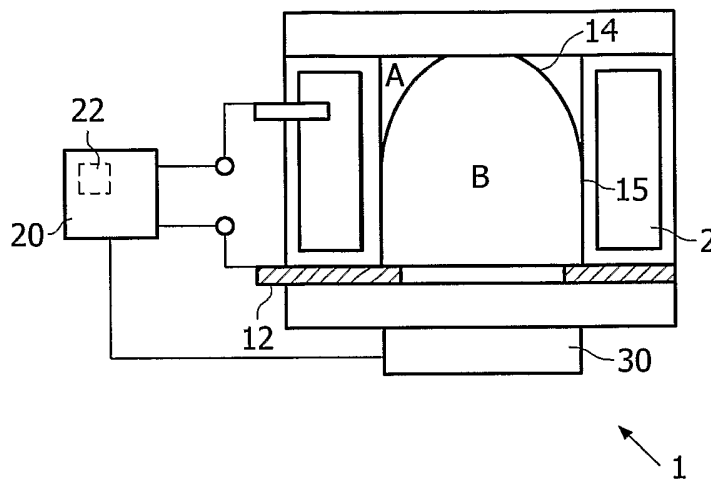


FIG. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2005/051229

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 G02B3/14

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2002, no. 10, 10 October 2002 (2002-10-10) - & JP 2002 169005 A (CANON INC), 14 June 2002 (2002-06-14) abstract figures 1,2,5	1-5
A	----- PATENT ABSTRACTS OF JAPAN vol. 2000, no. 16, 8 May 2001 (2001-05-08) - & JP 2001 013306 A (CANON INC), 19 January 2001 (2001-01-19) abstract; figures ----- -/--	1-5

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \* & \* document member of the same patent family

Date of the actual completion of the international search

7 July 2005

Date of mailing of the international search report

22/07/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Windecker, R

INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2005/051229

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 03/069380 A (KONINKLIJKE PHILIPS ELECTRONICS N.V; FEENSTRA, BOKKE, J; KUIPER, STEIN) 21 August 2003 (2003-08-21) cited in the application figures	1-5
A	US 2001/017985 A1 (TSUBOI TAKAYUKI ET AL) 30 August 2001 (2001-08-30) cited in the application abstract figures 3A-3C	1-5

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/IB2005/051229
---

Patent document cited in search report	Publication date	Patent family member(s)	Publication date												
JP 2002169005	A	14-06-2002	NONE												
JP 2001013306	A	19-01-2001	NONE												
WO 03069380	A	21-08-2003	<table style="width: 100%; border: none;"> <tr> <td style="width: 15%;">AU</td> <td style="width: 35%;">2003201481 A1</td> <td style="width: 50%;">04-09-2003</td> </tr> <tr> <td>EP</td> <td>1478951 A1</td> <td>24-11-2004</td> </tr> <tr> <td>WO</td> <td>03069380 A1</td> <td>21-08-2003</td> </tr> <tr> <td>US</td> <td>2005113912 A1</td> <td>26-05-2005</td> </tr> </table>	AU	2003201481 A1	04-09-2003	EP	1478951 A1	24-11-2004	WO	03069380 A1	21-08-2003	US	2005113912 A1	26-05-2005
AU	2003201481 A1	04-09-2003													
EP	1478951 A1	24-11-2004													
WO	03069380 A1	21-08-2003													
US	2005113912 A1	26-05-2005													
US 2001017985	A1	30-08-2001	<table style="width: 100%; border: none;"> <tr> <td style="width: 15%;">JP</td> <td style="width: 35%;">2001228307 A</td> <td style="width: 50%;">24-08-2001</td> </tr> <tr> <td>JP</td> <td>2001249282 A</td> <td>14-09-2001</td> </tr> </table>	JP	2001228307 A	24-08-2001	JP	2001249282 A	14-09-2001						
JP	2001228307 A	24-08-2001													
JP	2001249282 A	14-09-2001													