

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 December 2003 (24.12.2003)

PCT

(10) International Publication Number  
**WO 03/107334 A1**

(51) International Patent Classification<sup>7</sup>: G11B 7/007, 7/24

A. [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(21) International Application Number: PCT/IB03/02832

(74) Agent: **DEGUELLE, Wilhelmus, H., G.**; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(22) International Filing Date: 13 June 2003 (13.06.2003)

(25) Filing Language: English

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(30) Priority Data:  
02077448.5 18 June 2002 (18.06.2002) EP

(71) Applicant (*for all designated States except US*): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **MARTENS, Hubert, C., F.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **VAN DEN OETELAAR, Ronald, J.**

[Continued on next page]

(54) Title: OPTICAL DATA STORAGE MEDIUM AND USE OF SUCH MEDIUM

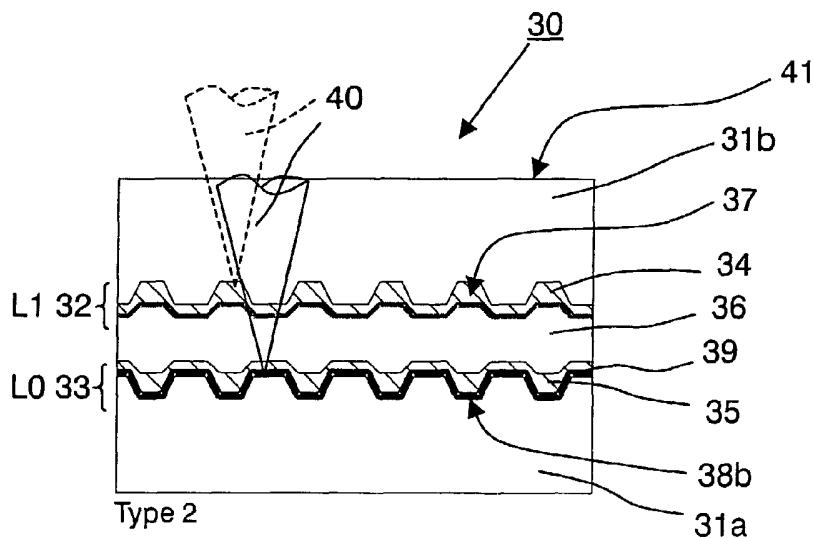

(57) Abstract: A multi-stack optical data storage medium (30) for recording and reading using a focused radiation beam (40) entering through an entranceface (41) of the medium (30) is described. It has a first substrate (31a) with present on a side thereof a first recording stack (32) named L<sub>0</sub>, comprising a recordable type L<sub>0</sub> recording layer (35), formed in a first L<sub>0</sub> guide groove (38a, 38b). A first reflective layer (39) is present between the first L<sub>0</sub> recording layer (35) and the first substrate (31a). A second substrate (31b) with present on a side thereof a second recording stack (32) named L<sub>1</sub> is present at a position closer to the entrance face (41) than the L<sub>0</sub> recording stack (32) and formed in a second L<sub>1</sub> guide groove (37). A transparent spacer layer (36) is sandwiched between the recording stacks (32, 33). The first L<sub>0</sub> guide groove (38a, 38b) has a depth G<sub>T0</sub> < 100 nm. In this way a relatively high reflection value of the L<sub>0</sub> stack is achieved at a radiation beam wavelength of approximately 655 nm.



WO 03/107334 A1

**Declaration under Rule 4.17:**

- as to the identity of the inventor (Rule 4.17(i)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ,

DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

**Published:**

- with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## Optical data storage medium and use of such medium

The invention relates to a multi-stack optical data storage medium for recording and reading using a focused radiation beam entering through an entrance face of the medium during recording and reading, comprising:

- a first substrate with present on a side thereof:

5           - a first recording stack named  $L_0$ , comprising a recordable type  $L_0$  recording layer, and formed in a first  $L_0$  guide groove, and a first reflective layer present between the  $L_0$  recording layer and the first substrate ,

- a second substrate with present on a side thereof:

10           - a second recording stack named  $L_1$  comprising a recordable type  $L_1$  recording layer, said second recording stack being present at a position closer to the entrance face than the  $L_0$  recording stack and formed in a second  $L_1$  guide groove,

- a transparent spacer layer sandwiched between the recording stacks, said transparent spacer layer having a thickness substantially larger than the depth of focus of the focused radiation beam.

15           The invention also relates to the use of such a medium.

20           An embodiment of an optical recording medium as described in the opening paragraph is known from European Patent Application EP1067535A2. Normally the medium is in the form of a circular disk.

          Regarding the market for optical recording, it is clear that the most important and successful format so far is a write-once format, Compact Disc recordable (CD-R). Although the take-over in importance by Compact Disc Rewritable (CD-RW) has been predicted since a long time, the actual market size of CD-R media is still at least an order of  
25   magnitude larger than for CD-RW. Furthermore the most important parameter for drives is the maximum write speed for R-media, not for RW. Of course, a possible shift of the market to CD-RW is still possible, e.g. because of Mount Rainier for CD-RW. However, the R-format has been proven very attractive due to its 100% compatibility.

Next to the Digital Versatile Disc ReWritable (DVD+RW) standard recently a new Digital Versatile Disc Recordable (DVD+R) standard was developed. The new DVD+R standard gets increasing attention as an important support for DVD+RW. A possible scenario is that the end customers have become so familiar with an optical write-once format that they might accept it more easily than a re-writable format.

An issue for both the R and RW formats is the limited capacity and therefore recording time because only single-stacked media are present. Note that for DVD-Video, dual stacked media have a considerable market share. A dual-layer, i.e. dual stack, DVD+RW disk is probably feasible. However, it has become clear that a fully compatible disk, i.e. within the reflection and modulation specification of the dual-layer DVD-ROM, is very difficult to achieve and requires at least a major breakthrough for the phase-change material properties. Without a full compatibility, the success of a dual-layer DVD+RW in the market is questionable.

In order to obtain a dual-layer DVD+R medium which is compatible with the dual-layer DVD-ROM standard, the effective reflectivity of both the upper  $L_1$  layer and the lower  $L_0$  layer should be at least 18% at a radiation beam wavelength of approximately 655 nm. Effective means that the reflection is measured as the portion of effective light coming back from the medium when both stacks  $L_0$  and  $L_1$  are present and focusing on  $L_0$  and  $L_1$  respectively. This means that the  $L_0$  stack as such requires a far higher reflection level of e.g. more than 50%, preferably more than 60%, because the  $L_1$  stack absorbs a substantial portion of the incoming and outgoing light. It should be noted that in this document the normally used convention of notation of  $L_0$  and  $L_1$ , in which notation  $L_0$  is the "closest" stack, i.e. closest to the radiation beam entrance face, has been changed:  $L_0$  now is the deepest stack and  $L_1 \dots L_n$  are stacks closer to the radiation beam entrance face. In EP1067535A2 the following definitions are used: DG1 is the thickness of the dye layer in groove of the first information recording/reproduction unit which corresponds to  $L_1$ , dG2 is the thickness of the dye layer in groove of the second information recording/reproduction unit which corresponds to  $L_0$ . DL1 is the thickness of the dye layer on land corresponding to  $L_1$ , dL2 is the thickness of the dye layer on land corresponding to  $L_0$ . The depth of the grooves corresponding to  $L_1$  is d1 but the depth of the grooves d2 corresponding to  $L_0$  is defined differently. D2 is the height difference of lands and grooves measured on the dye surface after a dye layer has been coated. DG2, d2 and dL2 are set to approximately 174, 140 and 120 nm. A calculation shows that this corresponds to a groove depth g in the substrate corresponding to  $L_0$  of about 194 nm. Measurements by applicants have shown that the inverted  $L_0$  stack of the known medium

with grooves with a depth of 194 nm has a reflectivity being only 15% - 50% of the reflectivity of blank areas (i.e. without grooves). This means that it is impossible to reach the desired 60% reflection level because in order to obtain a dual-layer DVD+R medium which is compatible with the dual-layer DVD-ROM standard, the reflectivity of a light beam  
5 focused onto the data track of the lower  $L_0$  layer should be sufficiently high (typically > 60%, depending on the transmission of the upper  $L_1$  layer). From a dual-stack DVD+R production point of view, an inverted  $L_0$  layer structure is preferred which means that the recording layer of the  $L_0$  stack is present at a side of the reflective layer other than the side of the substrate with groove structure.

10

It is an object of the invention to provide an optical data storage medium of the type mentioned in the opening paragraph which has a reflection value of the  $L_0$  recording stack higher than 25%, preferably higher than 50%, at a radiation beam wavelength of  
15 approximately 655 nm.

This object has been achieved in accordance with the invention by an optical storage medium as described in the opening paragraph, which is characterized in that the first  $L_0$  guide groove has a depth  $G_{L0} < 100$  nm. This invention disclosure proposes the use of shallow grooves in order to achieve a high reflection value. According to calculations  
20 grooves deeper than 200 nm may also achieve a high reflection but are more difficult to manufacture from the point of view of mastering and injection molding. The explanation for the reduced reflection above 100 nm may be that grooves covered with metal act as a waveguide for the radiation beam, thereby lowering the effective reflectivity due to optical effects, e.g. changes in polarization. At depths > 200 nm these effects may again lead to an  
25 increase of the reflection.

In an embodiment  $G_{L0} < 80$  nm and the first  $L_0$  guide groove has a full half maximum width  $W_{L0} < 350$  nm. For grooves which have a width of smaller than 350 nm the groove depth should be smaller than 80 nm. When grooves are relatively wide, e.g. 500-600 nm, groove depths of close to 100 nm may be feasible with still enough reflection. At smaller  
30 groove widths wave guide like effects play a more prominent role and the effective reflectivity may decrease. The shallow groove depth will result in inversion of the radial-error signal (push pull) and of the wobble signal. This should be corrected for in the drive.

In another embodiment  $25 \text{ nm} < G_{L0} < 40$  nm and the first reflective layer comprises a metal and has a thickness > 50 nm. A very high reflection value is obtained by

which compatibility with the DVD-dual layer read only, i.e. video and ROM, standard is achieved. Without additional measures the reduced groove depth seems to have a relatively low optical modulation, i.e. optical contrast between mark and non-mark. For e.g. a 35 nm deep groove experiments showed a modulation of 10 %, both on land and groove.

5 In a further embodiment recordable type  $L_0$  recording layer comprises a dye and has a thickness between 70 nm and 150 nm measured on the land portion of the guide groove. When using this thickness range adequate mark formation in the dye layer is achieved. When using this stack good modulation is possible combined with the strongly reduced groove depth. As the recording is performed on land, as opposed to in-groove, a proper sign of the modulation, i.e. high to low recording, is achieved. This has the additional  
10 advantage that the push-pull signal has the proper sign and no measures in the optical disk drive are required to invert the push-pull sign.

A dielectric layer may be present at a side of the  $L_0$  recording layer opposite from the side where the first reflective layer is present. This has the advantage of even a  
15 better modulation. The dielectric layer preferably has a thickness in the range of 5 nm – 120 nm.

In yet another embodiment a second reflective layer comprising a metal is present at a side of the  $L_0$  recording layer opposite from the side where the first reflective layer is present. Preferably the second reflective layer has a thickness in the range of 5 nm -  
20 15 nm. The second reflective layer preferably mainly comprises a metal selected from the group of Ag, Au, Cu, Al. The second reflective layer has the advantage of an even higher reflection of the  $L_0$  stack. Small variations in stack design may be required to reach good recording performance.

An additional advantage of the use of shallow grooves in an inverted  $L_0$  stack is that a wobble of the guide groove is less visible in the reflection of the radiation beam. A wobble is used to modulate additional information in the guide groove, e.g. an address or time signal. When e.g. using a guide groove with a depth  $G_{L0}$  of 160 nm a variation of 15 % is visible in the signal with the same periodicity as the wobble. At a groove depth  $G_{L0}$  of 35  
25 nm this variation is substantially absent.

30

The invention will be elucidated in greater detail with reference to the accompanying drawings, in which

Fig. 1 shows the reflectivity on a blank area (mirror) and grooved area for an inverted  $L_0$  DVD+R stack. The groove depth is 126 nm. The reflectivity on the grooved area is only about 15% of the reflectivity on the blank area,

Fig. 2 shows the reflectivity on a blank area (mirror) and grooved area for an inverted  $L_0$  DVD+R stack. The groove depth is 35 nm. The reflectivity on the grooved area is approximately 85% of the reflectivity on the blank area,

Fig. 3 schematically shows a cross-section of an embodiment according to the invention,

Fig. 4 schematically shows a cross-section of an embodiment according to the invention for an inverted  $L_0$  stack,

Figs. 5a and 5b show the calculated result of a modeling study of a stack design according to the invention,

Figs. 6a and 6b show the calculated result of a modeling study of another stack design according to the invention,

Fig. 7 Reflection and modulation calculated for a reference disk: single-layer DVD+R.

In Fig.1 the results of experiments on inverted  $L_0$  DVD+R stacks are presented when a substrate with a groove depth  $G_{L0}$  of 126 nm, not according to the invention, was used. The reflectivity on the grooved area is approximately 15% of the reflectivity on the blank area (mirror). This value is not acceptable.

In Fig.2 the results of experiments on inverted  $L_0$  DVD+R stacks are shown. A DVD+RW substrate with a groove depth of about 35 nm, according to the invention, was used. The reflectivity on the grooved area is approximately 85% of the reflectivity on the blank area, which is significantly higher than for deeper grooves. The disk still shows sufficient push-pull signal, so tracking is possible. Also the experiments show that it is possible to write data, although the modulation appears to be relatively low (10 %, 11T carrier to noise ratio CNR ~ 30 dB) but with the stack design of Fig. 5 and Fig. 6 a high modulation is possible.

The  $L_0$  substrate 31a had 35 nm deep grooves with a FWHM width  $W_{L0}$  of 300 nm, a reflective layer 39 of 100 nm Ag, and 80 nm azo dye recording layer 35, and a protective layer. Typical dyes that can be used are (phthalo)cyanine-type, azo-type,

squarylium-type, pyrromethene-type or other organic dye material having the desired properties.

In Fig. 3 a multi-stack optical data storage medium 30 for recording is shown. A focused radiation beam, i.e. a laser beam 40 with a wavelength of about 655 nm, enters through an entrance face 41 of the medium 30 during recording. The medium comprises a first substrate 31a with present on a side thereof a first recording stack 33 named  $L_0$ , comprising a recordable type  $L_0$  recording layer 35, i.e. an azo dye. The  $L_0$  recording layer is formed in a first  $L_0$  guide groove 38a, and a first reflective layer 39 is present between the  $L_0$  recording layer 35 and the first substrate 31a. A second substrate 31b is present with on a side thereof a second recording stack 32 named  $L_1$  comprising a recordable azo dye type  $L_1$  recording layer 34. The second recording stack  $L_1$  32 is present at a position closer to the entrance face 41 than the  $L_0$  recording stack 33 and formed in a second  $L_1$  guide groove 37.

A transparent spacer layer 36 is sandwiched between the recording stacks 32, 33 and has a thickness of approximately  $40\ \mu\text{m}$ . The first  $L_0$  guide groove 38a has a depth of 35 nm. Note that the depth of the guide groove is defined at the position of the semi reflective layer present between 34 and 36. The medium may be manufactured as follows. The spacer 36 either contains the first guide groove, also called pregroove, for  $L_0$  or this first guide groove for  $L_0$  is mastered into the spacer after application of it to  $L_1$ . Normally the guide groove constitutes a spiral. Then the first recording stack  $L_0$  is deposited on the grooved spacer 36. Finally, the first substrate 31a, containing no grooves, is applied. This lay-out is called type 1.

In Fig.4 a variant of the medium 30 is shown called type 2. Type 2 is based on an inverted  $L_0$  stack, and is the preferred embodiment. The description of Fig. 3 applies with the exception that a guide groove 38b now is present in the first substrate 31a. This first substrate 31a with  $L_0$  is attached to the substrate with  $L_1$  with the transparent spacer layer 36 in between. Specific suitable  $L_0$  stack designs named stack 1, stack 2 and stack 3 are discussed elsewhere in this document with the description of Fig. 5 and Fig. 6. The preferred spacer-layer thickness for both disk types is  $40\ \mu\text{m}$  to  $70\ \mu\text{m}$ . One specific embodiment would be:

$L_1$ : 80 nm dye/ 12 nm Ag/ UV curable resin (protective layer) and  
 $L_0$ : 100 nm (ZnS)<sub>80</sub>(SiO<sub>2</sub>)<sub>20</sub> / 130 nm dye/ 100 nm Ag, and a spacer thickness of  $55\ \mu\text{m}$ . The effective reflection from  $L_1$  is 20 %, and the effective reflection (measured through  $L_1$ ) from  $L_0$  is 21% at a radiation beam wavelength of approximately 655 nm.

The upper  $L_1$  stack of a recordable dual-stack DVD disk should have high transparency in order to be able to address the lower lying  $L_0$  stack. At the same time,  $L_1$  preferably should have a reflectivity of at least 18% in order to meet the dual layer DVD-ROM specification. The stacks proposed here are not restricted to use in DVD+R-DL and can be applied in any (multi-stack) organic-dye based optical recording medium.

In Figs.5a and 5b modeling results are presented on a stack with the following design:

Stack 1:

- 25 to 40 nm deep guide grooves in substrate 31a,
- an optically closed Ag mirror of 100 nm. Other metals, e.g. Au, Cu or Al, may be used as well,
- an azo dye layer, with thickness of 130 nm on land, the refractive index of the dye is  $2.24 - 0.02i$  ( $\lambda = 655$  nm) which corresponds to a typical DVD recordable dye,
- 80 to 120 nm  $(\text{ZnS})_{80}(\text{SiO}_2)_{20}$ , other dielectrics with  $n \sim 2.1$  give identical results.

This design combines a high reflectivity and a high modulation of the inverted  $L_0$  recording stack for the case of shallow grooves. The stacks should be recorded on-land (as opposed to in-groove) in order to obtain the proper sign of the modulation (high-to-low recording). This has as an additional advantage that the push-pull signal has the proper sign ("on-land"). The parameter  $L$  is defined as:  $L = (d_G - d_L)/G$  in which formula  $d_G$  is the dye thickness in the groove,  $d_L$  is the dye thickness on land and  $G$  is the groove depth. This parameter is a measure for the leveling out of the dye after depositing on the groove structure. Normally, dye is deposited by spincoating and typically the leveling is between about 0.2 and 0.5.  $L = 0$  means that  $d_G = d_L$  and  $L = 1$  means that the top surface of the dye is completely flat after depositing on the guide groove structure. In Fig 5a the calculated results of the on-land reflection at a radiation beam wavelength of 655 nm as a function of the onland dye thickness  $d_L$  are shown. In Fig. 5b the calculated results of on land modulation as a function of the on land dye thickness  $d_L$  are shown. The horizontal dotted line indicates a minimum desired level. It can be noted that the desired level is reached at a dye thickness range of about 70-150 nm.

Experimental results obtained with this stack 1 are: A high modulation of 75% and a high reflection level of 70%. Modulation is generally defined as  $M = (R_{\text{no-mark}} - R_{\text{mark}}) / R_{\text{no-mark}}$  in which formula  $R_{\text{mark}}$  and  $R_{\text{no-mark}}$  are the reflection levels from the read out laser beam when respectively a written mark and no mark is present. The laser beam power

required to write in the  $L_0$  layer is only 7 mW, which is favorable in view of the presence of the  $L_1$  stack because a relatively large portion of the power will be absorbed in the  $L_1$  stack.

In Fig.6a and 6b modeling results are presented on a stack with the following design:

5 Stack 2:

- 25 to 40 nm deep guide grooves in substrate 31a,
- an optically closed Ag reflective layer 39 of 100nm, other metals, e.g. Au, Cu or Al, may be used as well,
- an azo dye layer, thickness 100 to 130 nm on land, the refractive index of the dye is  $2.24 - 0.02i$  which corresponds to a typical dye,
- 10 - a 5 to 15 nm second reflective layer of Ag, other metals, e.g. Au, Cu or Al, may be used as well.

The on land reflection  $R_L$  and on land modulation  $M_L$  are plotted as a function of the on land dye thickness  $d_L$  for different leveling values  $L$  of the dye.

15 A third stack design is possible which is not shown in a drawing but is described here:

Stack 3:

- 25 to 40 nm deep guide grooves in substrate 31a,
- an optically closed Ag reflective layer 39 of 100nm, other metals, e.g. Au, Cu or Al, may be used as well,
- 20 - an azo dye layer 35, thickness 90 nm to 160 nm on land, the refractive index of the dye is  $2.24 - 0.02i$  which corresponds to a typical dye,
- a 5 to 50 nm layer of  $\text{SiO}_2$ , other dielectrics may be used as well.

25 In Fig.7, as an example, the result for a conventional single stack DVD+R disk is shown at a radiation beam wavelength of 655 nm. The refractive index of the dye is taken as  $2.24 - 0.02i$  ( $\lambda = 655$  nm). According to the calculations, when the dye has a thickness of around 80 nm in groove, both the on-groove reflection curve 72 and the on-groove modulation curve 71 are at optimum values. The calculated reflectivity and modulation agree well with experimentally obtained values. To achieve good signal quality from the  $L_0$  layer, it was attempted to obtain stack designs that combine high reflectivity with a high modulation (both  $> 60\%$ ). It turns out that for a straightforward three-layer stack-design, in-groove recorded signals have the wrong polarity (low-to-high recording, not shown) in most cases.

30

Thus for the case of shallow grooves, on-land recording may be considered, or more complicated stack designs.

For both stack designs of Fig. 5 and Fig.6 mentioned above, a dye thickness-range can be identified where both modulation and reflection are high. Note that the stacks  
5 proposed here, are optimized for shallow grooves.

It should be noted that the above-mentioned embodiments illustrate rather than limit the invention, and that those skilled in the art will be able to design many alternative embodiments without departing from the scope of the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The  
10 word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

15 According to the invention a multi-stack optical data storage medium for recording and reading using a focused radiation beam entering through an entrance face of the medium is described. It has a first substrate with present on a side thereof a first recording stack named  $L_0$ , comprising a recordable type  $L_0$  recording layer, formed in a first  $L_0$  guide groove. A first reflective layer is present between the first  $L_0$  recording layer and the first  
20 substrate. A second substrate with present on a side thereof a second recording stack named  $L_1$  is present at a position closer to the entrance face than the  $L_0$  recording stack and formed in a second  $L_1$  guide groove. A transparent spacer layer is sandwiched between the recording stacks. The first  $L_0$  guide groove has a depth  $G_{L_0} < 100$  nm. In this way a relatively high reflection value of the  $L_0$  stack is achieved at a radiation beam wavelength of approximately  
25 655 nm.

## CLAIMS:

1. A multi-stack optical data storage medium for recording and reading using a focused radiation beam entering through an entrance face of the medium during recording and reading, comprising:
- a first substrate with present on a side thereof:
  - 5 - a first recording stack named  $L_0$ , comprising a recordable type  $L_0$  recording layer, and formed in a first  $L_0$  guide groove, and a first reflective layer present between the  $L_0$  recording layer and the first substrate,
  - a second substrate with present on a side thereof:
  - a second recording stack named  $L_1$  comprising a recordable type  $L_1$   
10 recording layer, said second recording stack being present at a position closer to the entrance face than the  $L_0$  recording stack and formed in a second  $L_1$  guide groove,
  - a transparent spacer layer sandwiched between the recording stacks, said transparent spacer layer having a thickness substantially larger than the depth of focus of the focused radiation beam,
  - 15 characterized in that the first  $L_0$  guide groove has a depth  $G_{L0} < 100$  nm.
2. A multi-stack optical data storage medium according to claim 1, wherein  $G_{L0} < 80$  nm and the first  $L_0$  guide groove has a full half maximum width  $W_{L0} < 350$  nm.
- 20 3. A multi-stack optical data storage medium according to any one of claims 1 or 2, wherein  $25$  nm  $< G_{L0} < 40$  nm and the first reflective layer comprises a metal and has a thickness  $> 50$  nm.
4. A multi-stack optical data storage medium according to any one of claims 1-3,  
25 wherein the recordable type  $L_0$  recording layer comprises a dye and has a thickness between 70 nm and 150 nm measured on the land portion of the guide groove.
5. A multi-stack optical data storage medium according to any one of claims 1-4, wherein a dielectric layer is present at a side of the  $L_0$  recording layer opposite from the side

where the first reflective layer is present.

6. A multi-stack optical data storage medium according to claim 5, wherein the dielectric layer has a thickness in the range of 5 nm – 120 nm.

5

7. A multi-stack optical data storage medium according to any one of claims 1-4, wherein a second reflective layer comprising a metal is present at a side of the  $L_0$  recording layer opposite from the side where the first reflective layer is present.

10 8. A multi-stack optical data storage medium according to claim 7, wherein the second reflective layer has a thickness in the range of 5 nm -15 nm.

9. A multi-stack optical data storage medium according to claim 7 or 8, wherein the second reflective layer mainly comprises a metal selected from the group of Ag, Au, Cu, Al.

15

10. A multi-stack optical data storage medium according to any one of claims 1-9, wherein the effective reflection level of the stacks is at least 0.18 at a radiation beam wavelength of approximately 655 nm.

20

11. Use of an optical data storage medium as claimed in any one of the preceding claims for multi stack recording with a reflectivity level of the first recording stack  $L_0$  as such of at least 0.5 and modulation of recorded marks in the  $L_0$  recording layer of at least 0.6 at a radiation beam wavelength of approximately 655 nm.

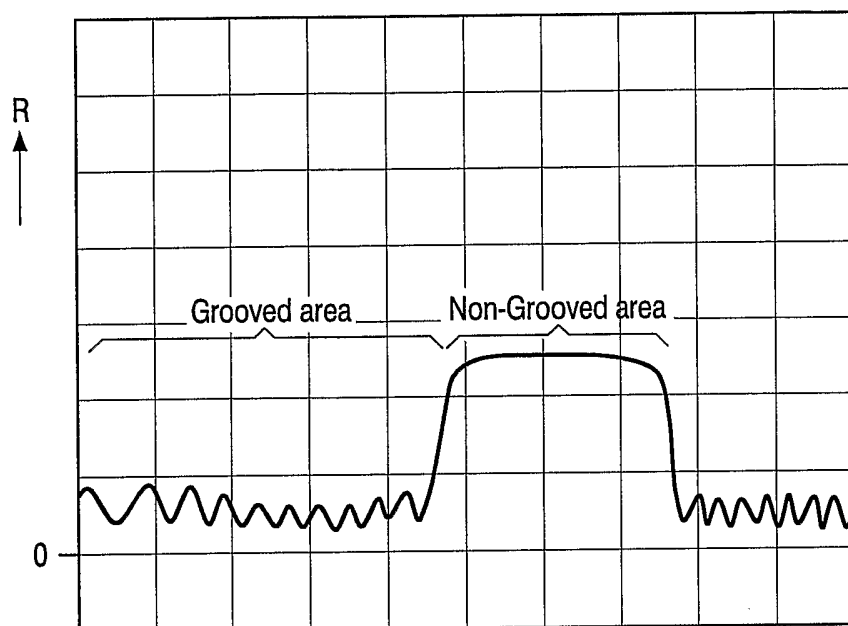


FIG. 1

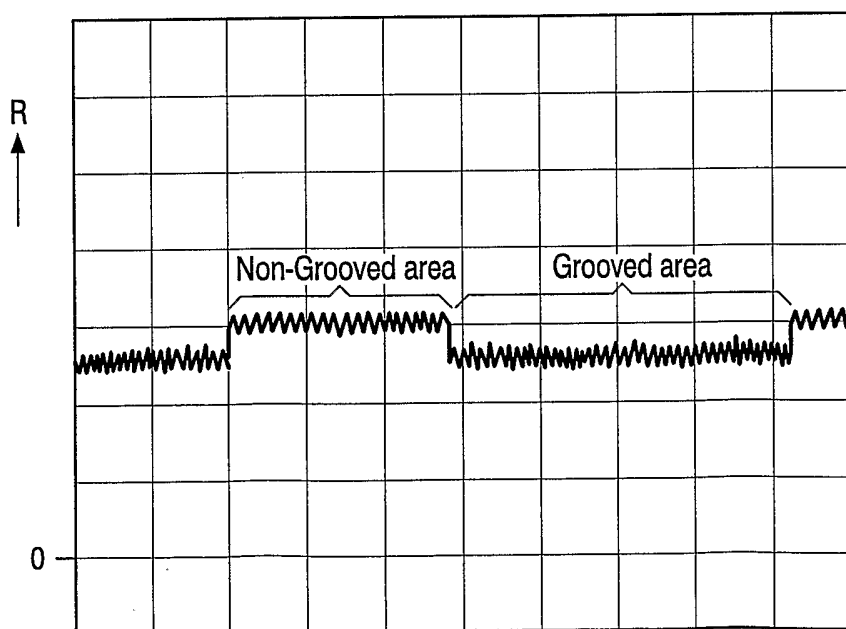


FIG. 2

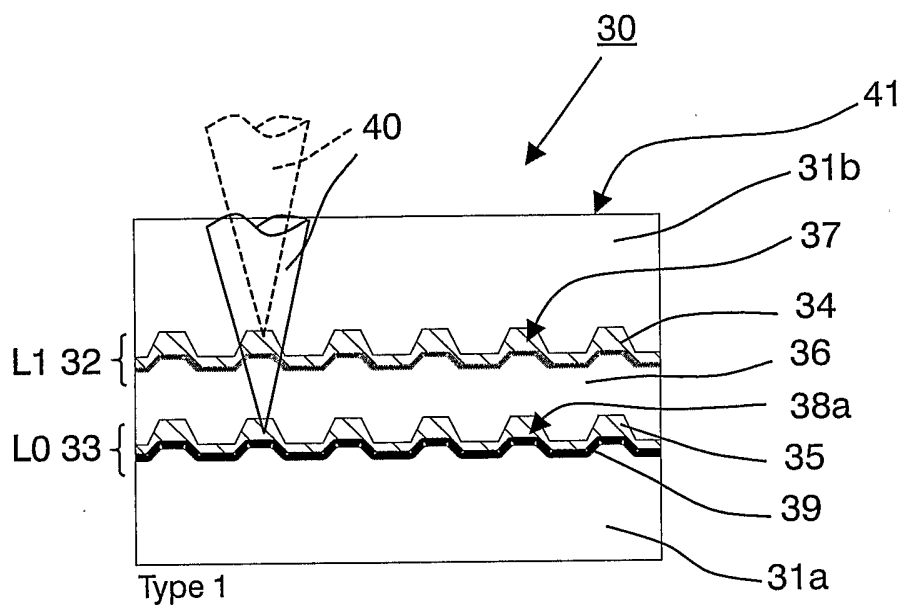


FIG.3

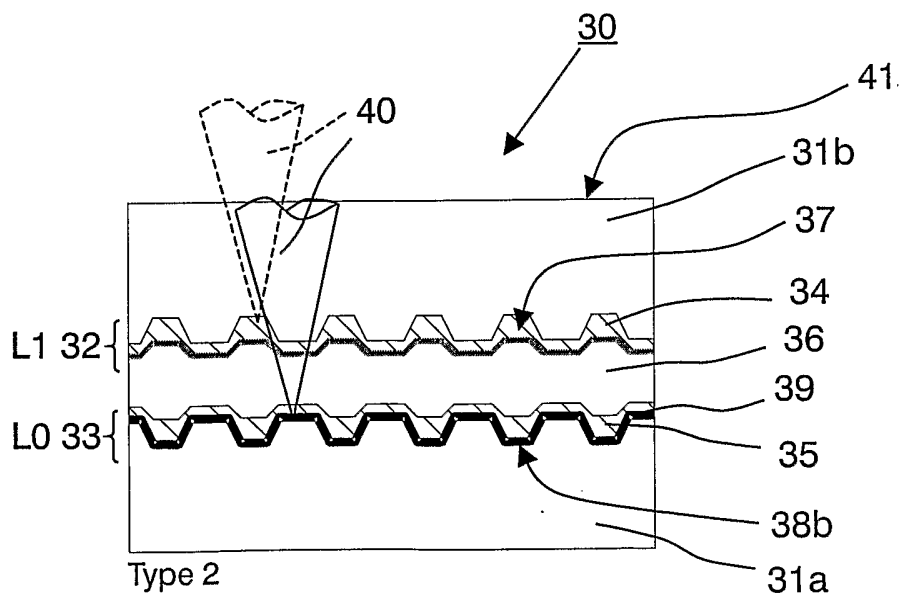


FIG.4

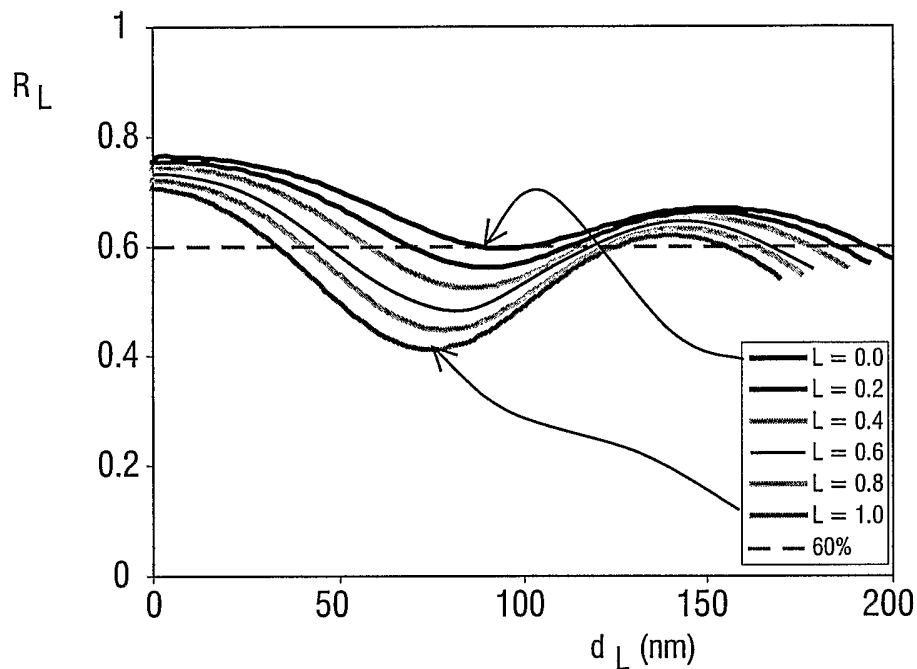


FIG.5a

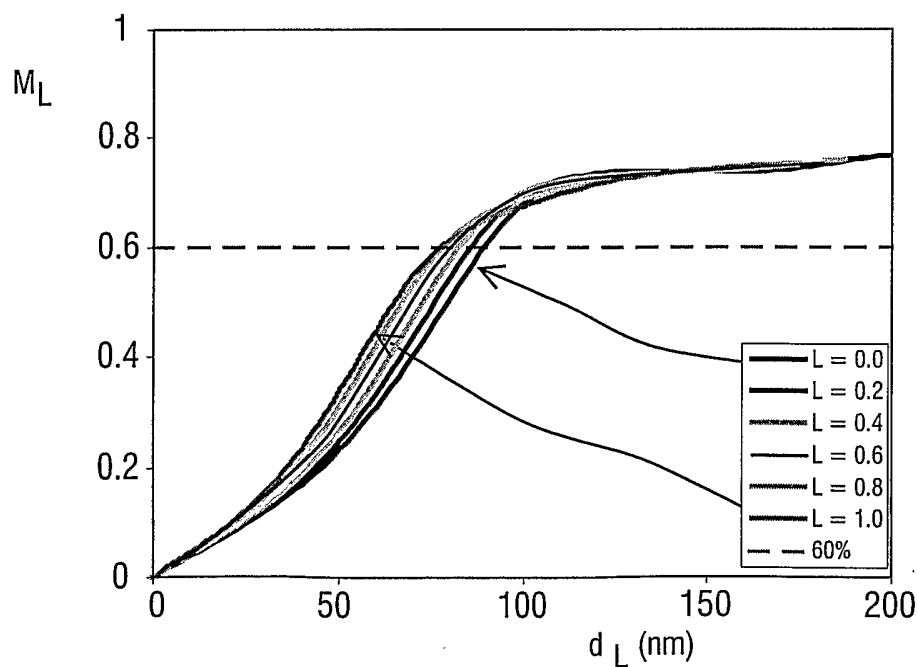


FIG.5b

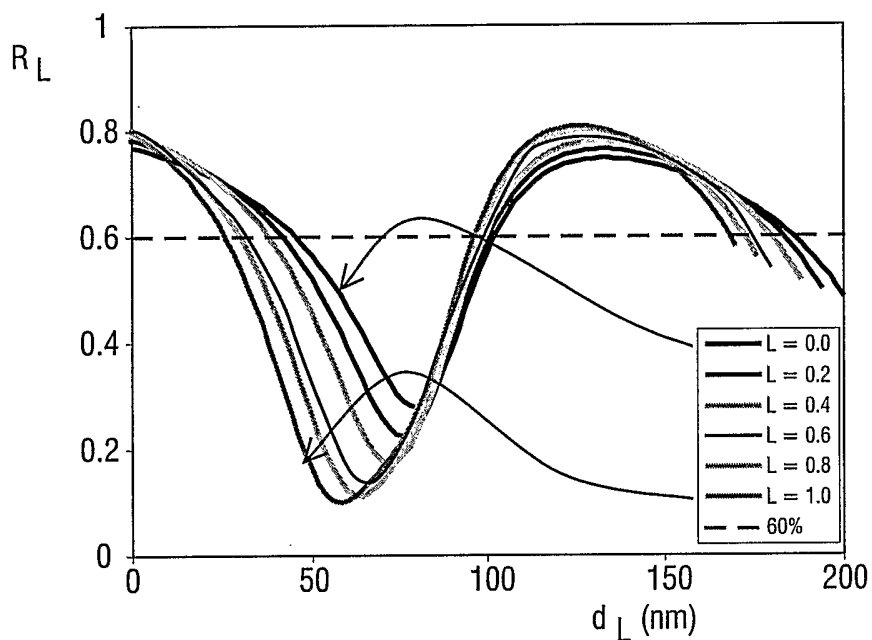


FIG.6a

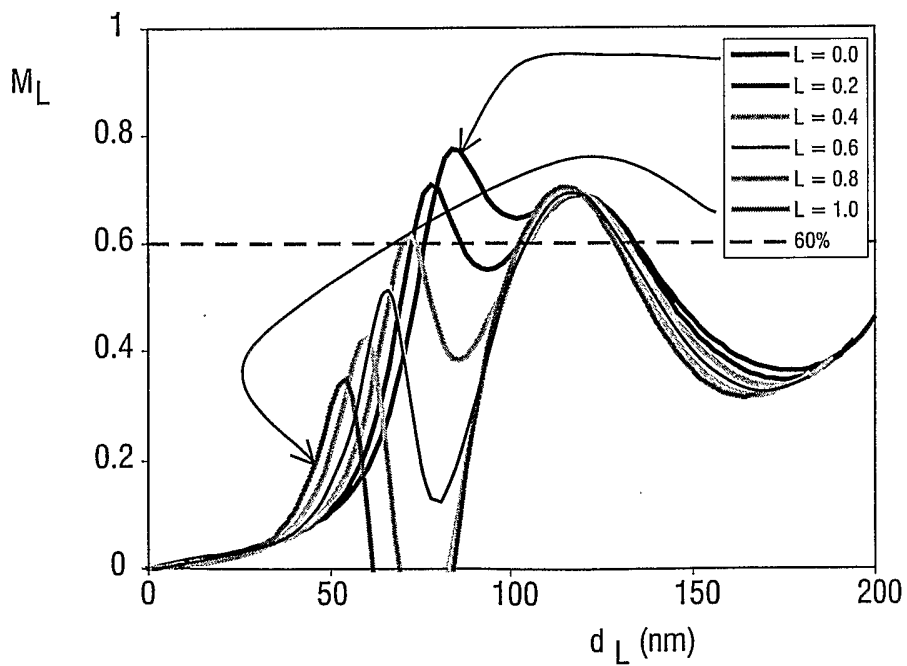


FIG.6b

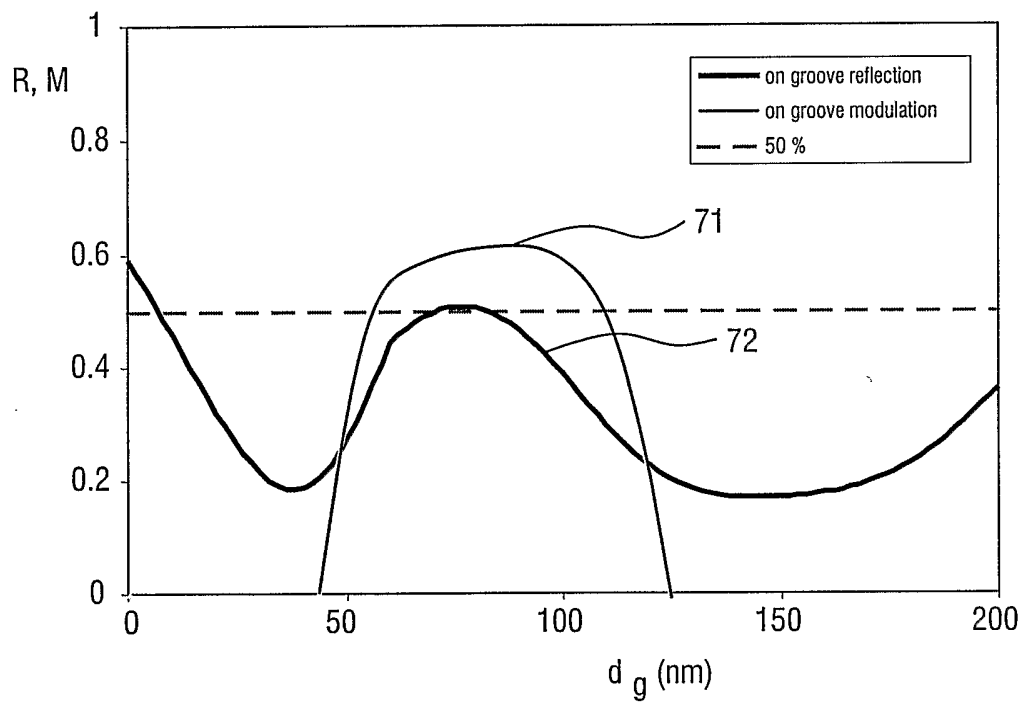


FIG.7

INTERNATIONAL SEARCH REPORT

Int'l Application No  
PCT/IB 03/02832

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 G11B7/007 G11B7/24

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 957 477 A (MATSUSHITA ELECTRIC IND CO LTD) 17 November 1999 (1999-11-17)	1,2,5-11
Y	paragraphs '0022!-'0040!, '0059!, '0069!-'0071!; figure 2	3,4
X	US 5 764 619 A (NISHIUCHI KENICHI ET AL) 9 June 1998 (1998-06-09)	1,3,5-11
Y	column 11, line 7 -column 18, line 56; figures 1,5,19,20; examples 5,6	2,4
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

27 October 2003

Date of mailing of the international search report

06/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Hermann, R

## INTERNATIONAL SEARCH REPORT

Inte I Application No

PCT/IB 03/02832

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NAGATA K ET AL: "REWRITABLE DUAL-LAYER PHASE-CHANGE OPTICAL DISK" JAPANESE JOURNAL OF APPLIED PHYSICS, PUBLICATION OFFICE JAPANESE JOURNAL OF APPLIED PHYSICS. TOKYO, JP, vol. 38, no. 3B, March 1999 (1999-03), pages 1679-1686, XP000905979 ISSN: 0021-4922 the whole document ---	1,5-11
Y	EP 1 174 869 A (FUJI PHOTO FILM CO LTD) 23 January 2002 (2002-01-23) the whole document ---	2-4
A	US 5 581 539 A (HORIE MICHIKAZU ET AL) 3 December 1996 (1996-12-03) abstract ---	1-10
E	WO 03 060894 A (TIEKE BENNO ;KONINKL PHILIPS ELECTRONICS NV (NL); MARTENS HUBERT C) 24 July 2003 (2003-07-24) page 8, line 24 -page 10, line 2; claims 1-3,6,9; figures 2,3 ---	1,3,4
E	WO 03 083845 A (KONINKL PHILIPS ELECTRONICS NV ;MARTENS HUBERTUS C F (NL)) 9 October 2003 (2003-10-09) page 7, line 28 -page 8, line 30; figures 2-4B -----	1,3

## INTERNATIONAL SEARCH REPORT

Inte | Application No

PCT/IB 03/02832

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0957477	A	17-11-1999	CN 1236156 A ,B	24-11-1999
			EP 0957477 A2	17-11-1999
			JP 3250989 B2	28-01-2002
			JP 2000036130 A	02-02-2000
			JP 2001273674 A	05-10-2001
			TW 448435 B	01-08-2001
			US 6456584 B1	24-09-2002
			<hr/>	
US 5764619	A	09-06-1998	CN 1157048 A	13-08-1997
			EP 1213709 A1	12-06-2002
			EP 1217617 A1	26-06-2002
			EP 0764323 A2	26-03-1997
			WO 9631875 A2	10-10-1996
			JP 10505188 T	19-05-1998
			KR 248096 B1	15-03-2000
			SG 74605 A1	22-08-2000
			SG 74034 A1	18-07-2000
			US 2002150032 A1	17-10-2002
			US 6226239 B1	01-05-2001
			US 6434095 B1	13-08-2002
			US 6027594 A	22-02-2000
			<hr/>	
EP 1174869	A	23-01-2002	JP 2001344812 A	14-12-2001
			EP 1174869 A2	23-01-2002
			US 2002006105 A1	17-01-2002
<hr/>				
US 5581539	A	03-12-1996	JP 8096416 A	12-04-1996
			JP 3413986 B2	09-06-2003
			JP 8102089 A	16-04-1996
			JP 8279187 A	22-10-1996
			CN 1140304 A	15-01-1997
			DE 19529621 A1	25-04-1996
			DE 19549636 C2	17-07-2003
			JP 3165354 B2	14-05-2001
			JP 8106653 A	23-04-1996
			JP 3376807 B2	10-02-2003
			JP 8321078 A	03-12-1996
			<hr/>	
WO 03060894	A	24-07-2003	WO 03060894 A1	24-07-2003
			WO 03060895 A1	24-07-2003
			WO 03083845 A1	09-10-2003
<hr/>				
WO 03083845	A	09-10-2003	WO 03060894 A1	24-07-2003
			WO 03083845 A1	09-10-2003
<hr/>				