




(86) Date de dépôt PCT/PCT Filing Date: 2015/06/17
(87) Date publication PCT/PCT Publication Date: 2016/01/07
(45) Date de délivrance/Issue Date: 2023/08/08
(85) Entrée phase nationale/National Entry: 2016/12/20
(86) N° demande PCT/PCT Application No.: US 2015/036288
(87) N° publication PCT/PCT Publication No.: 2016/003653
(30) Priorité/Priority: 2014/06/30 (US14/319,576)

(51) Cl.Int./Int.Cl. A61M 5/168 (2006.01),
A61M 5/14 (2006.01), A61M 5/40 (2006.01),
A61M 39/22 (2006.01)
(72) Inventeur/Inventor:
MANSOUR, GEORGE, US
(73) Propriétaire/Owner:
CAREFUSION 303, INC., US
(74) Agent: MARKS & CLERK

(54) Titre : CHAMBRE COMPTE-GOUTTES AYANT DE MULTIPLES ORIFICES D'ENTREE DE FLUIDE
(54) Title: DRIP CHAMBER WITH MULTIPLE PORTS FOR FLUID INPUT

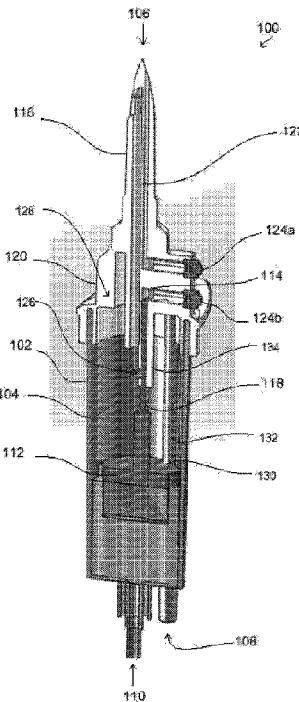

(57) Abrégé/Abstract:

A drip chamber is described that is used in medical infusion therapy, wherein the drip chamber utilizes valving to control flow of one or more fluids to a patient. The drip chamber includes a body forming a chamber, wherein fluid may enter via two or more flow ports, and an output port, where fluid may exit the chamber. A float controls fluid flow through one or more flow ports into the chamber such that the flow exiting the chamber may be limited to a single fluid or a combination of the fluids entering the chamber. The float is configured to be retained within the chamber, and the float moves within the chamber based on a level of fluid within the chamber. The control characteristics of the float are determinable by attributing specific buoyancy and dimensions to the float.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(10) International Publication Number

WO 2016/003653 A1

(43) International Publication Date
7 January 2016 (07.01.2016)

(51) International Patent Classification:
A61M 5/14 (2006.01) *A61M 39/22* (2006.01)
A61M 5/40 (2006.01)

(21) International Application Number:
PCT/US2015/036288

(22) International Filing Date:
17 June 2015 (17.06.2015)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
14/319,576 30 June 2014 (30.06.2014) US

(71) Applicant: CAREFUSION 303, INC. [US/US]; 3750 Torrey View Court, San Diego, California 92130 (US).

(72) Inventor: MANSOUR, George; 4501 Wall Street, Ontario, California 91761 (US).

(74) Agent: HALES, M. Todd; McDermott Will & Emery LLP, 4 Park Plaza, Suite 1700, Irvine, California 92614 (US).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DRIP CHAMBER WITH MULTIPLE PORTS FOR FLUID INPUT

(57) Abstract: A drip chamber is described that is used in medical infusion therapy, wherein the drip chamber utilizes valving to control flow of one or more fluids to a patient. The drip chamber includes a body forming a chamber, wherein fluid may enter via two or more flow ports, and an output port, where fluid may exit the chamber. A float controls fluid flow through one or more flow ports into the chamber such that the flow exiting the chamber may be limited to a single fluid or a combination of the fluids entering the chamber. The float is configured to be retained within the chamber, and the float moves within the chamber based on a level of fluid within the chamber. The control characteristics of the float are determinable by attributing specific buoyancy and dimensions to the float.

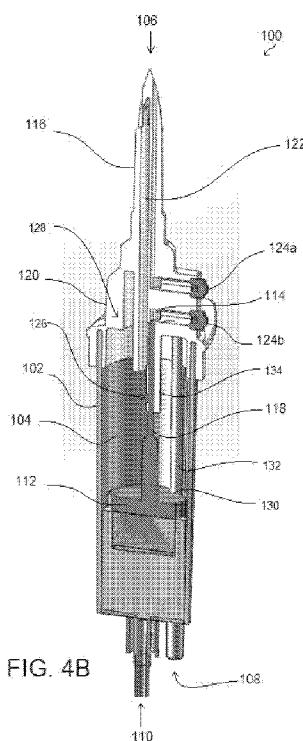

WO 2016/003653 A1

WO 2016/003653 A1



Published:

- *with international search report (Art. 21(3))*

DRIP CHAMBER WITH MULTIPLE PORTS FOR FLUID INPUT

BACKGROUND

[0001] This description relates in general to the field of medical fluid connectors, and in particular to a flow control drip chamber connector for use in medical infusion therapy.

[0002] Medical infusion therapy involves the administration of medication through a needle or catheter. The medication may be administered using intravenous, intramuscular, or epidural techniques. Typically, infusion therapy includes a fluid source coupled through tubing to a patient's intravenous needle or a catheter. The fluid, which may comprise medication or any other fluid, is usually dripped from the fluid source, through a fluid pathway, and into the patient. Typically, a primary fluid source and one or more secondary fluid sources may be joined to the fluid pathway between the source and the patient.

[0003] The primary and secondary fluid sources are joined in the fluid pathway such that the secondary fluid may be delivered concurrently the primary fluid. Alternatively, flow of the primary fluid may be halted during delivery of the secondary fluid and restarted after flow of the secondary fluid has ceased.

SUMMARY

[0004] An aspect of the present disclosure provides a passive start drip chamber device comprising: a chamber fluidly coupled to first and second input flow ports and an output flow port; a float disposed within the chamber, the float configured to move between an occluding configuration, wherein the first input flow port is occluded, and an open configuration, wherein the first input flow port is not occluded, based on a level of fluid within the chamber.

[0005] According to certain implementations of the present disclosure, a passive start drip chamber device comprises: a body with an interior chamber, the body having a first input flow port, a second input flow port, and an output flow port, the first input flow port comprises an opening fluidly coupled with the interior chamber; a float within the interior chamber, the float comprising a portion configured to extend into the opening; wherein the float is configured to rise and fall in the chamber based on a fluid level within the chamber, such that the portion moves relative to the opening between a closed configuration, wherein fluid through the first input flow port is occluded by the portion, and an open configuration, wherein the portion is withdrawn from the opening such that fluid is conducted through the opening and into to the chamber.

[0005a] In accordance with an aspect of an embodiment, there is provided a passive start drip chamber device comprising: a body comprising a top portion, a bottom portion, and a chamber fluidly coupled to a first input flow port at the bottom portion of the body, a second input flow port at the top portion of the body, and an output flow port; a first input flow path coupled to and extending from the first input flow port to the top portion of the body such that a fluid flow through the first input flow path enters the chamber through the top portion of the body; and a float disposed within the chamber, the float configured to move between an occluding configuration, wherein the first input flow path is occluded, and an open configuration, wherein the first input flow path is not occluded, based on a level of fluid within the chamber.

[0005b] In accordance with another aspect of an embodiment, there is provided a passive start drip chamber device comprising: a body with an interior chamber, the body having a first input flow port at a bottom portion of the body, a second input flow port at a top portion of the body, and an output flow port, a first input flow path coupled to the first input flow port and comprising an opening fluidly coupled with a top portion of the interior chamber, the first input flow path extending from the first input flow port to the top portion of the body such that a fluid flow through the first input flow path enters the chamber through the opening; and a float within the interior chamber, the float comprising an occluding portion configured to extend into the opening; wherein the float is configured to rise and fall in the chamber based on a fluid level within the chamber, such that the portion

moves relative to the opening between a closed configuration, wherein fluid through the first input flow path is occluded by the portion, and an open configuration, wherein the portion is withdrawn from the opening such that fluid is conducted through the opening and into the chamber.

[0005c] In accordance with yet another aspect of an embodiment, there is provided a passive start drip chamber device comprising: a body having a top portion and a bottom portion, a chamber formed between the top and bottom portions of the body, a first input flow port at the bottom portion of the body, a second input flow port at the top portion of the body, and an output flow port, wherein a first input flow path is coupled to and extends from the first input flow port to a channel at the top portion of the body; and a float positioned within the chamber, between the channel and the output flow port, the float configured to move toward and away from the channel based on a fluid level within the chamber, such that in an occluding configuration, the channel is occluded by the float, and in an open configuration, the channel is not occluded.

[0005d] In accordance with yet another aspect of an embodiment, there is provided a passive start drip chamber device comprising: a body comprising a chamber formed between a top portion and a bottom portion of the body, the chamber fluidly coupled to a primary flow port at the bottom portion of the body for entry of a first liquid into the chamber, a secondary flow port at the top portion of the body for entry of a second liquid into the chamber, and an output flow port to permit any of the first and second liquid to exit the chamber; and a primary flow path coupled to the primary flow port and disposed from the primary flow port at the bottom portion of the body to a top portion of the body such that the first liquid moves from the primary flow port at the bottom portion of the body through the primary flow path and enters the chamber through the top portion of the body; and a float valve disposed within the chamber and configured to move, based on a level of liquid within the chamber, between an occluding configuration, wherein the primary flow path is occluded, and an open configuration, wherein the primary flow path is not occluded.

[0005e] In accordance with yet another aspect of an embodiment, there is provided a passive start drip chamber device comprising: a chamber fluidly coupled to a first input flow port for entry of a first liquid into the chamber, a second input flow port for entry of a second liquid into the chamber, and an output flow port to permit any of the first and second liquid to exit the chamber; and a float valve disposed within the chamber, wherein the float valve is configured to move, based on a level of liquid within the chamber, between an occluding configuration, wherein the first input flow port is occluded and the second input flow port not occluded, and an open configuration, wherein the first and second input flow ports are not occluded.

[0006] Additional features and advantages of the subject technology will be set forth in the description below, and in part will be apparent from the description, or may be learned by practice of the subject technology. The advantages of the subject technology will be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

[0007] It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory and are intended to provide further explanation of the subject technology as claimed.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] The accompanying drawings, which are included to provide further understanding of the subject technology and are incorporated in and constitute a part of this description, illustrate aspects of the subject technology and, together with the specification, serve to explain principles of the subject technology.

[0009] FIG. 1 illustrates a perspective view of embodiments of a passive start drip chamber in accordance with aspects of the present disclosure.

[0010] FIG. 2 illustrates a perspective view of embodiments of a passive start drip chamber in accordance with aspects of the present disclosure.

[0011] FIG. 3A illustrates a front section view of embodiments of a passive start drip chamber in an open configuration in accordance with aspects of the present disclosure.

[0012] FIG. 3B illustrates a perspective section view of embodiments of a passive start drip chamber in an open configuration in accordance with aspects of the present disclosure.

[0013] FIG. 4A illustrates a front section view of embodiments of a passive start drip chamber in an occluded configuration in accordance with aspects of the present disclosure.

[0014] FIG. 4B illustrates a perspective section view of embodiments of a passive start drip chamber in an occluded configuration in accordance with aspects of the present disclosure.

DETAILED DESCRIPTION

[0015] In the following detailed description, specific details are set forth to provide an understanding of the subject technology. It will be apparent, however, to one ordinarily skilled in the art that the subject technology may be practiced without some of these specific details. In other instances, well-known structures and techniques have not been shown in detail so as not to obscure the subject technology.

[0016] A phrase such as "an aspect" does not imply that such aspect is essential to the subject technology or that such aspect applies to all configurations of the subject technology. A disclosure relating to an aspect may apply to all configurations, or one or more configurations. An aspect may provide one or more examples of the disclosure. A phrase such as "an aspect" may refer to one or more aspects and vice versa. A phrase such as "an embodiment" does not imply that such embodiment is essential to the subject

technology or that such embodiment applies to all configurations of the subject technology. A disclosure relating to an embodiment may apply to all embodiments, or one or more embodiments. An embodiment may provide one or more examples of the disclosure. A phrase such as "an embodiment" may refer to one or more embodiments and vice versa. A phrase such as "a configuration" does not imply that such configuration is essential to the subject technology or that such configuration applies to all configurations of the subject technology. A disclosure relating to a configuration may apply to all configurations, or one or more configurations. A configuration may provide one or more examples of the disclosure. A phrase such as "a configuration" may refer to one or more configurations and vice versa.

[0017] The present disclosure relates to a passive start drip chamber for use in medical infusion therapy. FIG. 1 illustrates embodiments of a passive start drip chamber device 100 configured to control flow of a primary fluid source 908 and secondary fluid source 906 to a patient (not shown). The passive start drip chamber device 100 may be fluidly coupled to a secondary fluid source 906 and the fluid pathway 910 between a primary fluid source 908 and a patient. Upon coupling, flow from the primary fluid source 908 may be diverted to the passive start drip chamber device 100. The passive start drip chamber device 100 may then control flow of the primary fluid source 908 and the secondary fluid source 906 to the patient. Referring to FIG. 2, embodiments are illustrated having a plurality of passive start drip chamber devices 100 and secondary fluid sources 906 fluidly coupled to a fluid pathway 910 between a primary fluid source 908 and a patient (not shown).

[0018] Referring to FIGS. 3A-4B, the passive start drip chamber device 100 comprises a body 102 forming a chamber 104, two or more flow ports where fluid may enter the chamber 104 from a fluid source (e.g., an intravenous bag ("IV bag") or a line connected to an IV bag), and an output port 110 where fluid may exit the chamber 104. In some embodiments, the body 102 comprises a port where a primary fluid 908 may enter the drip chamber, a port where a secondary fluid 906 may enter the drip chamber, and a port for fluid to exit 110 the drip chamber. Each 906/908 port is fluidly connected to the

chamber 104 within the body 102. In some embodiments, a secondary flow port 106 is disposed at a top of the body 102 (e.g., an end above or opposite the output port), while a primary flow port 108 and output flow port 110 are disposed along the body 102. The primary flow port 108 is fluidly coupled to a flow path 114 disposed through the body 102 such that fluid from the primary flow port 108 enters a top portion of the chamber 104. In some embodiments, the portion of the body 102 comprising the flow path 114 extends as a channel 134 from the top portion of the chamber 104, and in some embodiments, the portion of the body 102 comprising the flow path 114 extends as a channel 134 within an interior of the chamber 104 from the top portion of the chamber 104. The secondary flow port 106 is configured to couple with a secondary fluid source 906 such as a fluid bag. The secondary flow port 106 may be coupled with a fluid bag using a fluid fitting, including a luer-type fitting. In some embodiments, the secondary flow port 106 comprises an intravenous bag spike 116 having a lumen extending therein to fluidly couple the chamber with a fluid bag.

[0019] Referring to FIG. 4B, flow from two or more fluid sources to a patient is controlled within the body 102. More specifically, flow of a primary fluid into the chamber 104 is reduced or halted as a secondary fluid enters the chamber 104. The flow of a primary fluid into the chamber 104 is stopped by the closing of a valve, fluid pathway, or fluid conduit within the chamber 104. Referring to FIG. 4B, as the flow of secondary fluid into the chamber 104 reduces or ceases, the fluid level within the chamber decreases, and the valve, fluid pathway, or fluid conduit opens and the primary fluid may once again flow into the chamber 104. By reducing or stopping flow of the primary fluid during flow of the secondary fluid, and then restarting flow of the primary fluid after flow of the secondary fluid has completed, complete and accurate delivery of the secondary fluid to the patient can be assured and provided with little or no subsequent adjustment by a caregiver.

[0020] The body 102 may be composed of a malleable yet resilient material that allows the walls of the body 102 to be flexible. For example, the walls may be sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or structures within the chamber. In some embodiments, the walls of the body 102

may be squeezed to expel air or other gasses from within the chamber 104. Air may be expelled into the secondary fluid source, or through a valve 128, such as a hydrophobic filter, to the atmosphere. The body 102 and chamber 104 may be any size that achieves the desired flow rate and volume. For example, the chamber 104 volume may be selected to achieve a specific flow rate or to retain a specific valve size. The wall thickness of the body 102 may be selected to achieve a specific resiliency.

[0021] In some embodiments, the body 102 may have one or more flow ports in alternate or additional locations on the body 102. For example, the primary flow port 108 may be coupled to the body 102 parallel to the secondary flow port 106. In some embodiments, the secondary flow port 106 may be formed as a cap 120 coupled to the body 102 such that the cap 120 encloses the top portion of the chamber 104. In some embodiments, the cap 120 is removably coupled to the body, thereby providing access to the chamber 104. The cap 120 can include an auxiliary flow path 122. The auxiliary flow path 122 may be disposed through the cap, between the secondary flow port 106 and an access plug 124a on an external surface of the cap 120. The cap 120 may include an additional access plug 124b, providing access to the flow path 114 of the primary flow port 108.

[0022] In some embodiments, the valve includes a float 112 disposed within the chamber 104 between the secondary flow port 106 at the top of the chamber 104 and the output flow port 110 at the bottom of the chamber 104. The float 112 may be any shape but is preferably shaped to fit within the chamber 104 and may be configured to move axially between the top and bottom of the chamber 104.

[0023] Referring to FIG. 4B, the float 112 may be a cylinder having one or more axial grooves 130 on the outer surface, wherein the axial grooves are configured to mate with a rail, guide, or protrusion 132 along a surface of the chamber 104. The mating of the groove 130 and rail 132 allow the float to move axially within the chamber, yet prevent torsional rotation of the float. In some embodiments, the grooves 130 may be on an

internal surface of the chamber, and the rail, guide, or protrusions 132 may be on the outer surface of the float 112.

[0024] The diameter of the float 112 may be selected to assure stability within the chamber during movement, yet allow fluid to flow around the float 112. In some embodiments, the grooves 130 or indentations provide a fluid flow path around the float 112. In some embodiments, the chamber 104 comprises an annular ring or seat such that the output port 110 becomes fluidly sealed when the float 112 is in a lowest position within the chamber, thereby preventing or reducing the likelihood of air from passing through the chamber 104 to the patient or to a pump.

[0025] The float 112 may comprise specific buoyancy, causing it to raise or lower with a specific fluid level. The float 112 may be solid or hollow, and may comprise air or foam. Preferably, the float 112 material will not degrade in the environment of the chamber 104. In some embodiments, the buoyancy of the float 112 is adjustable. For example, the float 112 may comprise a dial or selector to adjust buoyancy.

[0026] Referring to FIGS. 4A-4B, a portion of the float 112 may include a protrusion 118 that extends from the float 112 toward the top of the chamber. In some embodiments, the protrusion can extend in other directions, depending on the relative orientation of the float with respect to flow channels of the device. At least a portion of the protrusion 118 extends into the flow path 114 of the primary flow port 108 at the top of the drip chamber 104. When the float 112 is at a lowest position adjacent to the output flow port 110, for example, when no flow from the secondary flow port 106 is present, the protrusion 118 partially extends into the flow path 114. In some embodiments, a portion of the cap 120 extends into the chamber 104, down from a top portion of the chamber, and comprises the flow path 114. The portion of the cap 120 that extends into the chamber 104 may further comprise a channel 134 that provides fluid communication between the flow path 114 and the chamber 104. The channel 134 may be disposed along the flow path 114 and through the portion of the cap 120 that extends into the chamber 104.

[0027] When the protrusion 118 is only partially extended into the channel 134, the aperture 126 allows fluid to flow through the primary flow port 108, through the flow path 114 and channel 134, and through the aperture 126 into the chamber 104. As flow from the secondary flow port 106 enters the chamber 104, the float 112 rises in the drip chamber 104. As the float 112 rises within the chamber 104, the protrusion 118 advances along the channel 134 thereby blocking flow through the aperture 126, occluding the flow path 114, and halting flow from the primary flow port 108 into the chamber 104. Upon a reduction or cessation of flow from the secondary flow port 106 into the chamber 104 the float 112 lowers, thereby retracting or withdrawing the protrusion 118 along the channel 134, exposing the aperture 126, and allowing flow from the primary flow port 108 to enter the chamber 104 and ultimately exit from the output port 110.

[0028] In some embodiments, the float 112 includes two or more protrusions 118, whereby two or more flow ports into the chamber 104 may be controlled. For example, the float 112 may include two protrusions 118 having varying lengths. When the float 112 rises, the longer protrusion 118 would occlude a first fluid flow port before the shorter protrusion occludes a second fluid flow port. In this example, flow from the second fluid flow port into the chamber 104 would continue until the float 112 rises to a level that causes the shorter protrusion 118 to also occlude the second fluid flow port.

[0029] In some embodiments, the body 102 comprises two or more chambers 104 and floats 112, allowing for two or more primary or secondary fluids to be coupled with the passive start drip chamber device 100. In some embodiments, a lower float 112 and upper float 112 are linearly disposed within the chamber 104, allowing for control of several fluid flows into the chamber 104. For example, the lower float 112 may have a protrusion 118 that extends through and aperture in the upper float 112. Alternatively, the upper float 112 may have a surface indentation configured to allow the protrusion 118 of the lower float 112 to move along side of the upper float 112. In some embodiments, a first float 112 and second float 112 are disposed in parallel within the chamber 104. For example, each float 112 may comprise a protrusion 118 to control a flow port leading into the chamber 104.

[0030] The foregoing description is provided to enable a person skilled in the art to practice the various configurations described herein. While the subject technology has been particularly described with reference to the various figures and configurations, it should be understood that these are for illustration purposes only and should not be taken as limiting the scope of the subject technology.

[0031] There may be many other ways to implement the subject technology. Various functions and elements described herein may be partitioned differently from those shown without departing from the scope of the subject technology. Various modifications to these configurations will be readily apparent to those skilled in the art, and generic principles defined herein may be applied to other configurations. Thus, many changes and modifications may be made to the subject technology, by one having ordinary skill in the art, without departing from the scope of the subject technology.

[0032] As used herein, the phrase "at least one of" preceding a series of items, with the term "and" or "or" to separate any of the items, modifies the list as a whole, rather than each member of the list (i.e., each item). The phrase "at least one of" does not require selection of at least one of each item listed; rather, the phrase allows a meaning that includes at least one of any one of the items, and/or at least one of any combination of the items, and/or at least one of each of the items. By way of example, the phrases "at least one of A, B, and C" or "at least one of A, B, or C" each refer to only A, only B, or only C; any combination of A, B, and C; and/or at least one of each of A, B, and C.

[0033] Furthermore, to the extent that the term "include," "have," or the like is used in the description or the claims, such term is intended to be inclusive in a manner similar to the term "comprise" as "comprise" is interpreted when employed as a transitional word in a claim. The word "exemplary" is used herein to mean "serving as an example, instance, or illustration." Any embodiment described herein as "exemplary" is not necessarily to be construed as preferred or advantageous over other embodiments.

[0034] A reference to an element in the singular is not intended to mean “one and only one” unless specifically stated, but rather “one or more.” The term “some” refers to one or more. All structural and functional equivalents to the elements of the various configurations described throughout this disclosure that are known or later come to be known to those of ordinary skill in the art intended to be encompassed by the subject technology. Moreover, nothing disclosed herein is intended to be dedicated to the public regardless of whether such disclosure is explicitly recited in the above description.

[0035] While certain aspects and embodiments of the subject technology have been described, these have been presented by way of example only, and are not intended to limit the scope of the subject technology. Indeed, the novel methods and systems described herein may be embodied in a variety of other forms without departing from the spirit thereof. The accompanying claims and their equivalents are intended to cover such forms or modifications as would fall within the scope and spirit of the subject technology.

[0036] Described herein are at least the following concepts:

Concept 1. A passive start drip chamber device comprising:

a chamber fluidly coupled to first and second input flow ports and an output flow port;

a float disposed within the chamber, the float configured to move between an occluding configuration, wherein the first input flow port is occluded, and an open configuration, wherein the first input flow port is not occluded, based on a level of fluid within the chamber.

Concept 2. The device of concept 1, wherein the float comprises an elongate member that occludes the first input flow port when the float is in the occluding configuration.

Concept 3. The device of concept 2, wherein the elongate member resides within a flow path channel of the first input flow port, and axial movement of the float within the chamber translates to axial movement of the elongate member along the flow path channel.

Concept 4. The device of concept 1, wherein the float is configured to move from the occluding configuration toward the open configuration when fluid flow through the second input flow port reduces such that the level of fluid within the chamber drops below a filled threshold.

Concept 5. The device of concept 1, wherein the float is configured to move from the open configuration toward the occluding configuration when the level of fluid within the chamber exceeds a drained threshold.

Concept 6. The device of concept 1, wherein the first input flow port comprises a channel configured to conduct fluid to the chamber, and the float comprises an occluding portion disposed within the channel that moves along the channel and occludes or opens the port when the float is in the respective occluding or open configurations.

Concept 7. The device of concept 1, wherein at least a portion of a wall of the chamber is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or structures within the chamber.

Concept 8. The device of concept 1, wherein the second input port comprises a fluid connector configured to fluidly couple with a fluid source.

Concept 9. The device of concept 8, wherein the fluid connector comprises an intravenous bag spike having a lumen extending therein to conduct fluid.

Concept 10. The device of concept 1, further comprising a valve fluidly coupled to the chamber, the valve configured to release a gas from within the chamber.

Concept 11. The device of concept 1, wherein a top of the chamber, opposite the output flow port, comprises a removable cap.

Concept 12. The chamber of concept 11, wherein the removable cap comprises at least one of the first or second input flow ports.

Concept 13. The device of concept 1, wherein each of the float and the chamber comprise either an axial groove or a corresponding protrusion, the groove and protrusion configured to matingly align the float within the chamber.

Concept 14. The device of concept 1, wherein the float is configured to occlude the output flow port when the level of fluid within the chamber drops below a drained threshold.

Concept 15. A passive start drip chamber device comprising:

a body with an interior chamber, the body having a first input flow port, a second input flow port, and an output flow port, the first input flow port comprises an opening fluidly coupled with the interior chamber;

a float within the interior chamber, the float comprising a portion configured to extend into the opening;

wherein the float is configured to rise and fall in the chamber based on a fluid level within the chamber, such that the portion moves relative to the opening between a closed configuration, wherein fluid through the first input flow port is occluded by the portion, and an open configuration, wherein the portion is withdrawn from the opening such that fluid is conducted through the opening and into to the chamber.

Concept 16. The device of concept 15, further comprising a channel fluidly coupled to the opening, wherein the float portion is configured to extend along and move within the channel.

Concept 17. The device of concept 15, wherein at least a portion of the chamber wall is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or structures within the chamber.

Concept 18. The device of concept 15, further comprising a valve coupled to the chamber, the valve configured to release a gas from within the chamber.

Concept 19. The device of concept 15, wherein a top portion of the chamber, opposite the output flow port, comprises a removable cap.

Concept 20. The device of concept 19, wherein the removable cap comprises at least one of the first or second input flow ports.

CLAIMS

WHAT IS CLAIMED IS:

1. A passive start drip chamber device comprising:
 - a body comprising a top portion, a bottom portion, and a chamber fluidly coupled to a first input flow port at the bottom portion of the body, a second input flow port at the top portion of the body, and an output flow port;
 - a first input flow path coupled to and extending from the first input flow port to the top portion of the body such that a fluid flow through the first input flow path enters the chamber through the top portion of the body; and
 - a float disposed within the chamber, the float configured to move between an occluding configuration, wherein the first input flow path is occluded, and an open configuration, wherein the first input flow path is not occluded, based on a level of fluid within the chamber.
2. The device of claim 1, wherein the float comprises an elongate member that occludes the first input flow path when the float is in the occluding configuration.
3. The device of claim 2, wherein the elongate member resides within a flow path channel of the first input flow path, and axial movement of the float within the chamber translates to axial movement of the elongate member along the flow path channel.
4. The device of any one of claims 1 to 3, wherein the float is configured to move from the occluding configuration toward the open configuration when fluid flow through the second input flow port reduces such that the level of fluid within the chamber drops below a filled threshold.
5. The device of any one of claims 1 to 4, wherein the float is configured to move from the open configuration toward the occluding configuration when the level of fluid within the chamber exceeds a drained threshold.
6. The device of any one of claims 1 to 5, wherein the first input flow path comprises a channel configured to conduct fluid to the chamber, and the float comprises an occluding portion disposed within the channel that moves along the channel and occludes or opens the first input flow path when the float is in the respective occluding or open configurations.

7. The device of any one of claims 1 to 6, wherein at least a portion of a wall of the body is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall of the body or another structure within the chamber.

8. The device of any one of claims 1 to 7, wherein the second input flow port comprises a fluid connector configured to fluidly couple with a fluid source.

9. The device of claim 8, wherein the fluid connector comprises an intravenous bag spike having a lumen extending therein to conduct fluid.

10. The device of any one of claims 1 to 9, further comprising a valve fluidly coupled to the chamber, the valve configured to release a gas from within the chamber.

11. The device of any one of claims 1 to 10, wherein a top of the chamber, opposite the output flow port, comprises a removable cap.

12. The device of any one of claim 11, wherein the removable cap comprises at least one of the first or second input flow ports.

13. The device of any one of claims 1 to 12, wherein each of the float and the chamber comprise either an axial groove or a corresponding protrusion, the groove and protrusion configured to matingly align the float within the chamber.

14. The device of any one of claims 1 to 13, wherein the float is configured to occlude the output flow port when the level of fluid within the chamber drops below a drained threshold.

15. The device of any one of claims 1 to 14, wherein, in the occluding configuration, the level of fluid within the chamber is at a first level, and in the open configuration, the level of fluid within the chamber is at a second level, less than the first level.

16. The device of any one of claims 1 to 14, wherein, in the occluding configuration, the float resists entry of fluid from the second input flow port into the chamber, and in the open configuration, the float permits entry of fluid from the first and second input flow port into the chamber.

17. A passive start drip chamber device comprising:

a body with an interior chamber, the body having a first input flow port at a bottom portion of the body, a second input flow port at a top portion of the body, and an output flow port,

a first input flow path coupled to the first input flow port and comprising an opening fluidly coupled with a top portion of the interior chamber, the first input flow path extending from the first input flow port to the top portion of the body such that a fluid flow through the first input flow path enters the chamber through the opening; and;

a float within the interior chamber, the float comprising an occluding portion configured to extend into the opening;

wherein the float is configured to rise and fall in the chamber based on a fluid level within the chamber, such that the portion moves relative to the opening between a closed configuration, wherein fluid through the first input flow path is occluded by the portion, and an open configuration, wherein the portion is withdrawn from the opening such that fluid is conducted through the opening and into the chamber.

18. The device of claim 17, further comprising a channel fluidly coupled to the opening, wherein the occluding portion is configured to extend along and move within the channel.

19. The device of claim 17 or claim 18, wherein at least a portion of a wall of the body is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or another structure within the chamber.

20. The device of any one of claims 17 to 19, further comprising a valve coupled to the chamber, the valve configured to release a gas from within the chamber.

21. The device of any one of claims 17 to 20, wherein the top portion of the interior chamber, opposite the output flow port, comprises a removable cap.

22. The device of claim 21, wherein the removable cap comprises at least one of the first or second input flow ports.

23. A passive start drip chamber device comprising:

a body having a top portion and a bottom portion, a chamber formed between the top and bottom portions of the body, a first input flow port at the bottom portion of the body, a second input flow port at the top portion of the body, and an output flow port, wherein a first input flow path is coupled to and extends from the first input flow port to a channel at the top portion of the body; and

a float positioned within the chamber, between the channel and the output flow port, the float configured to move toward and away from the channel based on a fluid level within the chamber, such that in an occluding configuration, the channel is occluded by the float, and in an open configuration, the channel is not occluded.

24. The passive start drip chamber device of claim 23, wherein the first input flow path extends through the channel.

25. The passive start drip chamber device of claim 23 or claim 24, wherein the float comprises an elongate member that extends from the float toward the top portion of the body, the elongate member configured to occlude the channel of the body when the float is in the occluding configuration.

26. The passive start drip chamber device of any one of claims 23 to 25, wherein the float is configured to move toward the occluding configuration when a first volume of fluid is within the chamber, and the float is configured to move toward the open configuration when a second volume of fluid, less than the first volume, is within the chamber.

27. The passive start drip chamber device of any one of claims 23 to 26, wherein the float comprises a groove that extends along an outer surface of the float, the groove configured to permit a fluid to move through the chamber, between the top and bottom portions of the body.

28. The passive start drip chamber device of any one of claims 23 to 26, wherein the float comprises an elongate groove or an elongate protrusion, and the chamber comprise the other of the elongate groove or the elongate protrusion, wherein the elongate protrusion and the elongate groove are configured to matingly align the float within the chamber.

29. The passive start drip chamber device of any one of claims 23 to 28, wherein the top portion of the body comprises an intravenous bag spike having a lumen fluidly coupled with the second input flow port.

30. The passive start drip chamber device of any one of claims 23 to 29, further comprising a valve coupled to the chamber, the valve configured to release a gas from within the chamber.

31. The passive start drip chamber device of any one of claims 23 to 30, wherein a wall of the body, between the top and bottom portions of the body, is sufficiently resilient to permit elastic deformation when collapsed to engage an opposing wall or another structure within the chamber.

32. A passive start drip chamber device comprising:

a body comprising a chamber formed between a top portion and a bottom portion of the body, the chamber fluidly coupled to a primary flow port at the bottom portion of the body for entry of a first liquid into the chamber, a secondary flow port at the top portion of the body for entry of a second liquid into the chamber, and an output flow port to permit any of the first and second liquid to exit the chamber; and

a primary flow path coupled to the primary flow port and disposed from the primary flow port at the bottom portion of the body to a top portion of the body such that the first liquid moves from the primary flow port at the bottom portion of the body through the primary flow path and enters the chamber through the top portion of the body; and

a float valve disposed within the chamber and configured to move, based on a level of liquid within the chamber, between an occluding configuration, wherein the primary flow path is occluded, and an open configuration, wherein the primary flow path is not occluded.

33. The passive start drip chamber device of claim 32, wherein the float valve comprises an elongate member that occludes the primary flow port when the float valve is in the occluding configuration.

34. The passive start drip chamber device of claim 33, wherein the elongate member resides within a flow path channel of the primary flow port, and axial movement of the float valve within the chamber translates to axial movement of the elongate member along the flow path channel.

35. The passive start drip chamber device of claim 34, wherein the elongate member occludes the flow path channel when the float valve is in the occluding configuration.

36. The passive start drip chamber device of claim 34 or claim 35, wherein the flow path channel extends through the top portion of the body into the chamber, and wherein the primary flow path extends through the flow path channel.

37. The passive start drip chamber device of any one of claims 32 to 36, wherein the float valve is configured to move from the open configuration toward the occluding configuration when the level of liquid within the chamber exceeds a drained threshold.

38. The passive start drip chamber device of any one of claims 32 to 37, wherein at least a portion of a wall of the chamber is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or another structure within the chamber.

39. The passive start drip chamber device of any one of claims 32 to 38, wherein each of the float valve and the chamber comprise either an axial groove or a corresponding protrusion, the groove and protrusion configured to matingly align the float valve within the chamber.

40. The passive start drip chamber device of any one of claims 32 to 38, wherein the float valve comprises a groove that extends along an outer surface of the float valve, the groove configured to permit a fluid to move through the chamber, between the top and bottom portion of the body.

41. The passive start drip chamber device of any one of claims 32 to 40, wherein the secondary flow port comprises an intravenous bag spike having a lumen extending therein to conduct fluid.

42. The passive start drip chamber device of any one of claims 32 to 41, further comprising a valve fluidly coupled to the chamber, the valve configured to release a gas from within the chamber.

43. The passive start drip chamber device of any one of claims 32 to 42, wherein a top of the chamber, opposite the output flow port, comprises a removable cap.

44. The passive start drip chamber device of any one of claims 32 to 43, wherein, in the occluding configuration, the level of liquid within the chamber is at a first level, and in the open configuration, the level of liquid within the chamber is at a second level, less than the first level.

45. The passive start drip chamber device of any one of claims 32 to 44, wherein, in the occluding configuration, the float valve resists entry of fluid from the primary flow port into the chamber, and in the open configuration, the float valve permits entry of fluid from the primary and secondary flow port into the chamber.

46. The passive start drip chamber device of any one of claims 32 to 45, wherein the secondary flow port is at the top portion of the body, and the output flow port is at the bottom portion of the body, and the primary flow path is at the bottom portion of the body.

47. A passive start drip chamber device comprising:

a chamber fluidly coupled to a first input flow port for entry of a first liquid into the chamber, a second input flow port for entry of a second liquid into the chamber, and an output flow port to permit any of the first and second liquid to exit the chamber; and

a float valve disposed within the chamber, wherein the float valve is configured to move, based on a level of liquid within the chamber, between an occluding configuration, wherein the first input flow port is occluded and the second input flow port not occluded, and an open configuration, wherein the first and second input flow ports are not occluded.

48. The device of claim 47, wherein the float comprises an elongate member that occludes the first input flow port when the float is in the occluding configuration.

49. The device of claim 48, wherein the elongate member resides within a flow path channel of the first input flow port, and axial movement of the float within the chamber translates to axial movement of the elongate member along the flow path channel.

50. The device of any one of claims 47 to 49, wherein the float is configured to move from the occluding configuration toward the open configuration when fluid flow

through the second input flow port reduces such that a level of fluid within the chamber drops below a filled threshold.

51. The device of any one of claims 47 to 49, wherein the float is configured to move from the open configuration toward the occluding configuration when a level of fluid within the chamber exceeds a drained threshold.

52. The device of any one of claims 47 to 51, wherein the first input flow port comprises a channel configured to conduct fluid to the chamber, and the float comprises an occluding portion disposed within the channel that moves along the channel and occludes or opens the first input flow port when the float is in the respective occluding or open configurations.

53. The device of any one of claims 47 to 52, wherein at least a portion of a wall of the chamber is sufficiently resilient to permit elastic deformation when the wall is collapsed to engage an opposing wall or another structure within the chamber.

54. The device of any one of claims 47 to 53, wherein the second input flow port comprises a fluid connector configured to fluidly couple with a fluid source.

55. The device of claim 54, wherein the fluid connector comprises an intravenous bag spike having a lumen extending therein to conduct fluid.

56. The device of any one of claims 47 to 55, further comprising a valve fluidly coupled to the chamber, the valve configured to release a gas from within the chamber.

57. The device of any one of claims 47 to 56, wherein a top of the chamber, opposite the output flow port, comprises a removable cap.

58. The device of any one of claims 47 to 57, wherein each of the float and the chamber comprise either an axial groove or a corresponding protrusion, the groove and protrusion configured to matingly align the float within the chamber.

59. The device of any one of claims 47 to 49, wherein the float is configured to occlude the output flow port when a level of fluid within the chamber drops below a drained threshold.

60. The device of any one of claims 47 to 49, wherein, in the occluding configuration, a level of fluid within the chamber is at a first level, and in the open configuration, the level of fluid within the chamber is at a second level, less than the first level.

61. The device of any one of claims 47 to 60, wherein, in the occluding configuration, the float valve resists entry of fluid from the second input flow port into the chamber, and in the open configuration, the float valve permits entry of fluid from the first and second input flow port into the chamber.

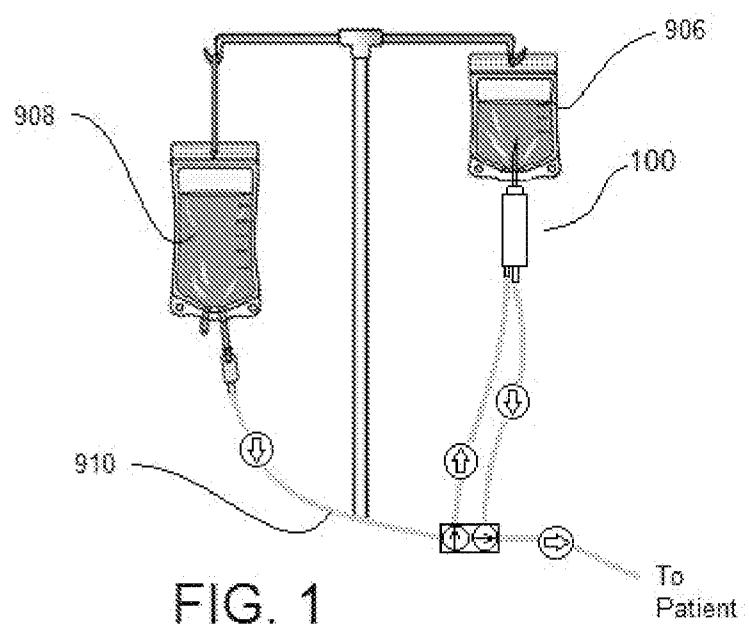


FIG. 1

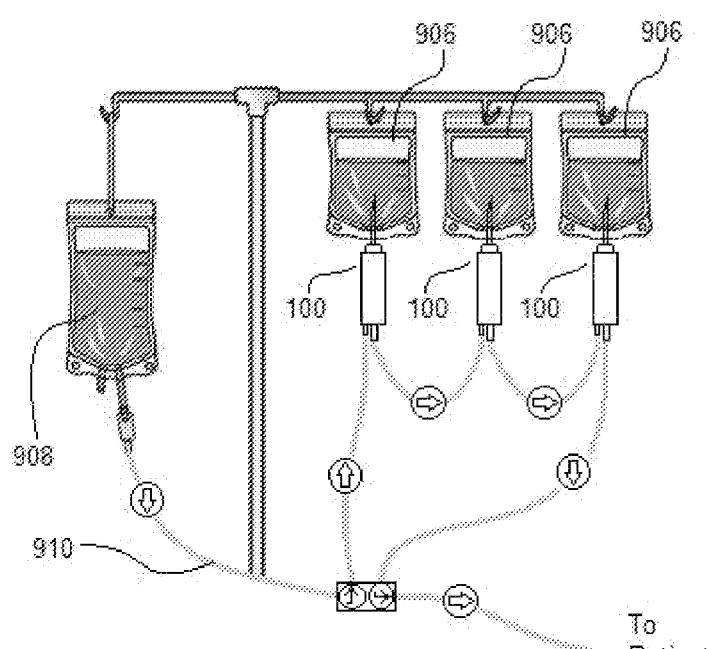
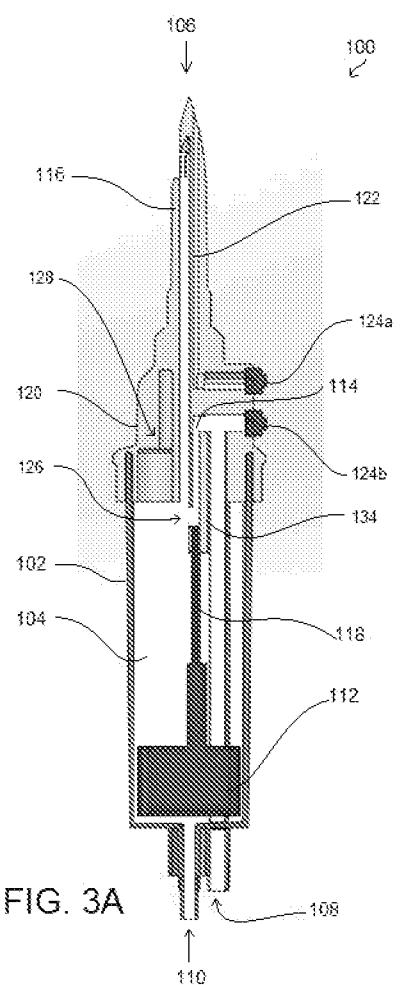


FIG. 2



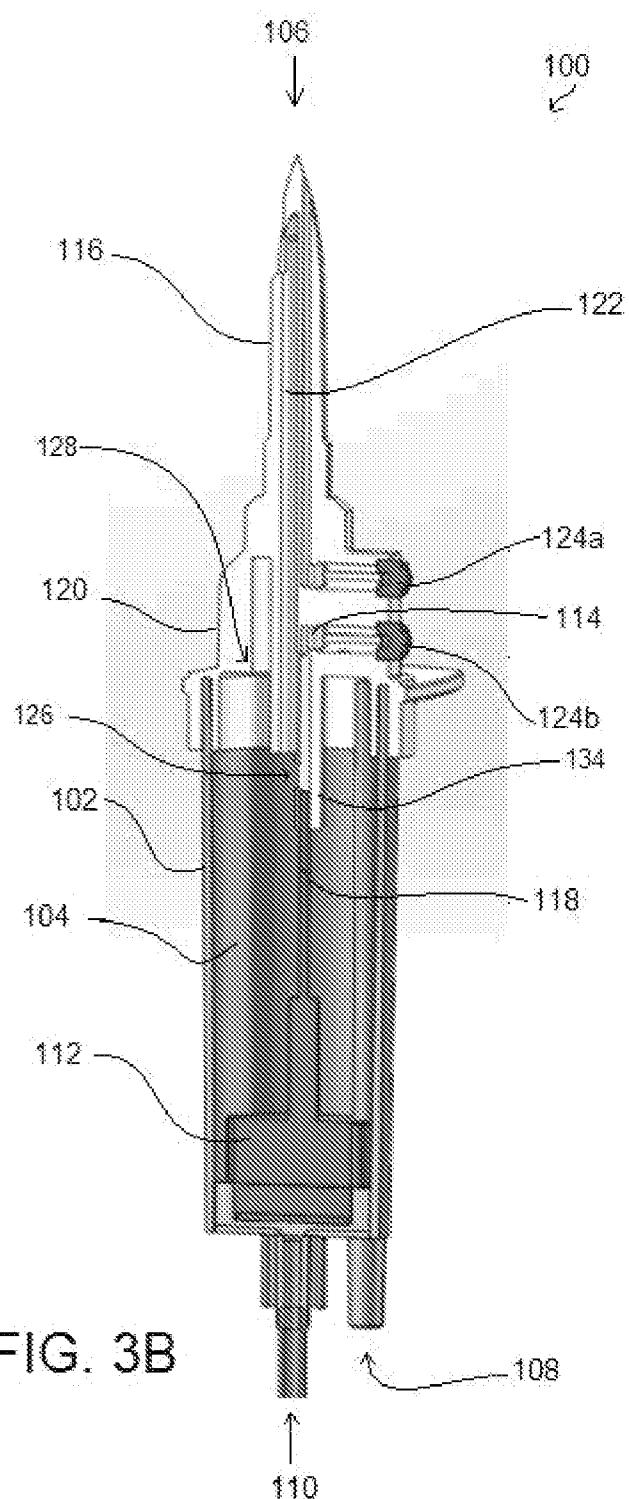


FIG. 3B

