

(43) International Publication Date
27 September 2012 (27.09.2012)

(51) International Patent Classification:

B26F 1/32 (2006.01) *B26F 1/14* (2006.01)
B26F 1/02 (2006.01) *F17C 13/12* (2006.01)

(21) International Application Number:

PCT/US2011/042521

(22) International Filing Date:

30 June 2011 (30.06.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

61/454,801 21 March 2011 (21.03.2011) US
 61/492,906 3 June 2011 (03.06.2011) US

(71) **Applicant** (for all designated States except US): **FLUID N MOTION, LLC** [US/US]; 1750 W. Carriage Square, Suite 100, Taylorsville, Utah 84119 (US).

(72) Inventors; and

(75) **Inventors/Applicants** (for US only): **DUNYON, Christopher Leon** [US/US]; 1889 Cameron Dr., West Haven, Utah 84401 (US). **DUNYON, Bret** [US/US]; 1632 South Stewart Street, Salt Lake City, Utah 84101 (US).

(74) **Agent**: **BELL, Richard L.**; Olympic Patent Works PLLC, P.O. Box 4277, Seattle, Washington 98194-0277 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: VACUUM RELEASE SYSTEMS

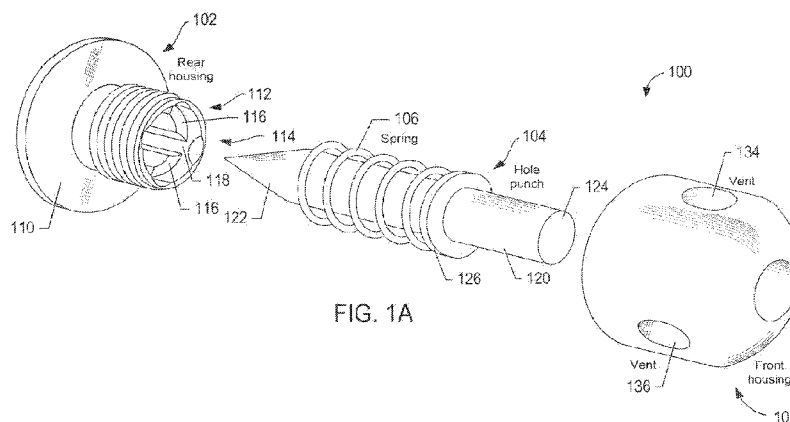


FIG. 1A

(57) **Abstract**: Vacuum release systems that allow rapid, uninterrupted flow of a liquid through a first opening in a container when the container is inverted are disclosed. The vacuum release systems includes a holes punch and can be secured to the outer surface of the container. When the liquid-filled container is inverted, pressure is applied to the hole punch to form a second opening in the side of the container. The second opening releases the vacuum by allowing air to flow into the container, which, in turn, allows rapid, uninterrupted flow of the liquid through the first opening in the container.

VACUUM RELEASE SYSTEMS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the benefit of Provisional Application No.
5 61/454,801, filed March 21, 2011 and Provisional Application No. 61/492,906, filed
June 3, 2011.

TECHNICAL FIELD

This disclosure is directed to systems for releasing a vacuum in an open
10 inverted container.

BACKGROUND

A liquid can be slowly and steadily drained through a single opening in a
container by tilting the container so that air can also flow into the container through the
15 opening to fill the volume occupied by the liquid flowing out of the container. However,
in an effort to increase the flow rate of the liquid from the container, one typically inverts
the container but the liquid contents block the opening, preventing air from entering the
container. As a result, a vacuum forms within the container which is repeatedly released
when small amounts of the liquid falls through the opening followed by corresponding
20 volumes of air that rapidly rush into the container through the same opening, briefly
stopping the flow of the liquid. This repeated interruption in the flow of the liquid causes
the container to jolt up and down and sideways as the mass of the liquid contents rapidly
changes with each quick release of a small amount of the liquid through the opening.
The jolts subside and a smooth steady flow of the liquid eventually occurs after much of
25 the liquid is emptied and can no longer prevent the flow of air into the container.

SUMMARY

Vacuum release systems that allow rapid, uninterrupted flow of a liquid
through a first opening in a container when the container is inverted are disclosed. The
30 vacuum release systems includes a hole punch and can be secured to the outer surface of
the container. When the liquid-filled container is inverted, pressure applied to the hole

punch forms a second opening in the side of the container. The second opening releases the vacuum by allowing air to flow into the container through the second opening, which, in turn, allows the liquid contents to be rapidly emptied from the container through the first opening without interruption in the flow.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Figures 1A-1B show exploded perspective and cross-sectional views of an example vacuum release system.

Figure 2 shows a front plan view of an example rear housing of a vacuum
10 release system.

Figure 3 shows a cross-sectional view of the example vacuum release system shown in Figure 1 fully assembled.

Figure 4 shows cross-sectional views of two examples of rear housings.

Figures 5A-5F show isometric and cross-sectional views of an
15 implementation of the example vacuum release system shown in Figure 1.

Figures 6A-6B show exploded and partially assembled perspective views, respectively, of an example vacuum release system.

Figures 7A-7C show views of an implementation of the vacuum release system shown in Figure 6 fully assembled.

20 Figures 8A-8C show views of an example vacuum release system.

Figure 9 shows a top plan view of the vacuum release system shown in Figure 8 fully assembled.

DETAILED DESCRIPTION

25 Various vacuum release systems embodiments are now described. Figures 1A-1B show exploded perspective and cross-sectional views of an example vacuum release system 100. The system 100 includes a rear housing 102, a hole punch 104, a coiled spring 106, and a front housing 108. The rear housing 102 includes a ring-shaped perforated plate 110 and a threaded male end 112. The perforated plate 110 and male end
30 112 include an opening 114 with guides 116 separated by grooves 118 to receive the hole punch 104. Figure 1B also reveals how the perforated plate 110 is curved. For example,

the perforated plate 110 can have a cylindrical concave shape. The punch 104 includes a shaft 116 with a tapered end 122, a butt end 124, and a ring 126 located along the shaft. The front housing 108 includes an opening that extends the length of the front housing. In the particular, as shown in Figure 1B, the opening includes a threaded female section 128 dimensioned to receive the threaded male end 112 of the rear housing 102, an intermediate cylindrical section 130 dimensioned to receive the ring 126 of the punch 104, and a narrower third cylindrical section 132 dimensioned to receive the shaft 120 of the punch 104. The front housing 108 also includes four symmetrically distributed vents, two of which 134 and 136 are shown. The vents open into the intermediate opening 130 and are oriented substantially perpendicular to the central axis of the opening 130 in the front housing 108. The front housing 108 is not limited to having four vents. In other embodiments, the front housing 108 can have as few as one vent or two or more vents. As shown in the example of Figures 1A-1B, the diameter of the spring 106 is dimensioned to receive the shaft 120 of the punch 104 along the cylindrical axis of the spring.

Figure 2 shows a front plan view of the example rear housing 102. The guides 116 extend the length of the opening 114 and are curved to receive the cylindrical shaft of the punch 104. Figure 2 also reveals semicircular-shaped grooves that extend the length of the opening 114 and separate the guides 116. In the example of Figure 2, the rear housing 102 includes four guides 116 separated by four symmetrically distributed grooves 118. The number of guides and grooves in the opening 114 is not limited to four and the guides and grooves do not have to be symmetrically distributed. In other embodiments, the opening 114 may have a single C-shaped guide and one groove or the opening 114 may have two or more guides separated by grooves that extend the length of the opening 114.

Figure 3 shows a cross-sectional view of the example vacuum release system 100 fully assembled. The cross-sectional view shows the male end 112 of the rear housing 102 inserted into the female section 128 of the front housing 108 to form a housing for the spring 106 and the punch 104. When the male end 112 is fully screwed into the threaded female section 128 of the front housing 108, a ring-shaped gap 302 exists between the perforated plate 110 of the rear housing 102 and the base of the front

housing 108. The third section 132 and guides 116 form a cylindrical guide to direct the motion of the punch 104 when pressure is applied to the butt end 124. Figure 3 also reveals that a first end of the spring 106 abuts the ring 126 of the punch 104 and a second end of the spring 106 abuts the end of the male end 112 of the rear housing 102.

5 The perforated plate 110 of the rear housing 102 is not limited to a cylindrical concave shape shown in the cross-sectional view of Figures 1B and 3. Figure 4 shows cross-sectional views of two example rear housings 402 and 404. The rear housing 402 includes a flat perforated plate 406, while the rear housing 404 includes a cylindrical convex-shaped perforated plate 408.

10 Figures 5A-5F show isometric and cross-sectional views of an example implementation of the vacuum release system 100. In Figure 5A, the system 100 is secured near the base of a liquid-filled container 502 with a sleeve 504 that wraps around the base of the container 502. The container 502 includes a small first opening 506 through which the liquid contents of the container are to be emptied. Although, the sleeve 504 is shown as a wrap that encompasses a portion of the cylindrical wall of the container 502, the sleeve can include a base (not shown) so that the sleeve can encase the bottom and cylindrical wall of the container. The sleeve can be composed of a fabric, foam, or an insulating material. Figure 5B shows a cross-sectional view of the system 100 firmly attached to a portion 508 of the cylindrical wall of the container 502. The sleeve 504 includes an aperture through which the male end 112 of the rear housing 110 is inserted. As shown in the cross-sectional view, the perforated plate 110 of the rear housing 102 is disposed between the wall 508 and the sleeve 504 and a portion of the sleeve 504 surrounding the aperture substantially fills the cylindrical-shaped gap 302 between the perforated plate 110 and the base of the front housing 108. In Figure 5C, the container 502 is inverted to empty the liquid contents through the first opening 506. When the container 502 is inverted, as shown in Figure 5C, a vacuum forms inside the container 502, which is released when pressure is applied to the hole punch 104 so that the tapered end 122 of the punch punctures or forms a second opening 510 in the wall 508 of the container 502, as shown in Figure 5D. Figure 5D also reveals that the spring 106 is compressed between the edge of the male end 112 of the pack plate 102 and the ring 126 of the punch 104. When the pressure applied to the punch 104 is released, the

15
20
25
30

spring 106 restores the position of the punch 104, as shown in the cross-sectional view of Figure 5F. In Figures 5E-5F, the vacuum is released as the liquid begins to empty through the first opening 506 and air is drawn into the container 502 through the vents 134 and 136 in the front housing 108. Figure 5F reveals that air passes through the vents 134 and 136 to the opening 130 of the front housing 108 and the opening 114 in the rear housing 102 to reach the interior of the container 502. As shown in Figure 5E, the second opening 510 releases the vacuum formed in the inverted container 502 by allowing air to flow into the container 502 through the vents 134 and 136 of the front housing 108. As a result, the liquid contents of the container 502 can rapidly flow uninterrupted through the first opening 506.

Vacuum release systems are not intended to be limited to the configuration and type of components associated with the vacuum release system 100. Figures 6A-6B show exploded and partially assembled perspective views, respectively, of an example vacuum release system 600. The system 600 includes a rear housing 602, a hole punch 604, a coiled spring 606, a front housing 608, and a cap 610. In Figure 6B, the rear housing 602 is shown separate from the other components of the system 600 to reveal that the rear housing 602 includes a ring-shaped perforated plate 612 and a cylinder 614 that opens into the opening of the perforated plate 612 and has a base 616 with a number of vents 618 formed around a central opening 620. The punch 604 includes a shaft 622, a tapered end 624, and a ring 626 disposed at the end of the shaft near the tapered end 624. The front housing 608 includes vents 628 distributed around a central opening 630 that is dimensioned to receive the shaft 622 of the punch 604. The vents 628 in the front housing 608 and vents 618 in the rear housing 602 allow air to flow along the central axis of the system 600. As shown in Figure 6B, the cap 610 is attached to the butt end of the punch and the spring 606 is positioned along the shaft 622 between the cap 610 and the front housing 608. The cap 610 can be attached to the end of the shaft 622 with an adhesive, weld, or the cap 610 and the end portion of the shaft 622 can be threaded so the cap 610 is screwed onto the end of the punch 604.

Operation of the system 600 is analogous to operation of the system 100 described above with reference to Figure 5. Figures 7A-7C show views of an example implementation of the system 600 fully assembled. Figure 7A shows the system 600

attached to a portion of a wall 702 of a container (not shown) and a portion of a sleeve 704 that wraps around the container. The sleeve 704 can be positioned away from a first opening in the container, as described above with reference to Figure 5A. The sleeve 704 includes an aperture through which the cylinder 614 of the rear housing 602 is inserted.

5 As shown in Figure 7A, the spring 606 is slightly compressed between the front housing 608 and the cap 610 and thereby exerts an outward directed force that holds the system 600 together by forcing the ring 622 of the punch 604 against the base 616 of the cylinder 614. As a result, the ring-shaped perforated plate 612 of the rear housing 602 is driven toward the front housing 608 compressing portions of the sleeve 704 between the
10 perforated plate 612 and the front housing 608. As shown in Figure 7B, when the container is inverted, as described above with reference to Figure 5B, pressure applied to the cap 610 compresses the spring 606 so the punch 604 can puncture or form a second opening 706 in the wall 702. When the pressure applied to the punch 604 is released, the spring 606 restores the position of the punch 604, as shown in the cross-sectional view of
15 Figure 7C. The vacuum formed in the container when the container is inverted is released as air is drawn into the container through the vents 628 in the front housing 608 and vents 618 in the rear housing 602 along the central axis of the system 600, enabling the liquid contents of the container to rapidly exit the container through the first opening.

Figures 8A-8B show exploded perspective and top plan views, respectively, of an example vacuum release system 800. The system 800 includes a rear
20 housing 802, a hole punch 804, a coiled spring 806, and a front housing 808. In Figure 8A, the rear housing 802 includes a ring-shaped perforated plate 812 and a cylinder 814 that has a perforated base 816 with a number of vents 818 distributed around a central opening 820. The exterior of the cylinder 814 also includes three concentric, tapered ribs or flanges 822. The punch 804 includes a shaft 824, a tapered end 826, and a ring 828 disposed along the shaft 824. In Figure 8B, the front housing 808 includes a cylindrical female end 830 for receiving the cylinder 814, as shown in and described below with reference to Figure 9. Figure 8C also shows a front view of the front housing 808. The front housing 808 includes vents 832 distributed around a central opening 834 (also
25 shown in Figure 8A) dimensioned to receive the shaft 824 of the punch 804. The openings 820 and 834 form a guide to direct the punch 824. The vents 832 in the front
30

housing 808 and vents 818 in the rear housing 802 allow air to flow along the central axis of the system 800.

Figure 9 shows a top plan view of the system 800 fully assembled. The rear housing 802 is joined with the front housing 808 to form a housing for the spring 806 and the punch 804. The spring 806 is located along the shaft 824 between the ring 828 and the base 816 of the rear housing 802. The system 800 attaches to a wall 902 of a container (not shown) and a sleeve 904 that wraps around the container. The sleeve can be positioned away from a first opening in the container, as described above with reference to Figure 5A. The sleeve includes an aperture through which the male end 814 of the rear housing 802 and the female end of the front housing 808 are inserted. A portion of the sleeve 904 surrounding the aperture is located within a gap between the perforated plate 812 and the front housing 808. The rear housing 802 is secured to the front housing when the male end 814 of the rear housing 802 is inserted into the female end 830 of the front housing. Alternatively, the male cylinder 814 and the front cylinder 830 can be threaded so that cylinder 814 can be screwed into the cylinder 830 to form a housing for the spring 806 and the punch 804. As shown in Figure 9, the spring 806 is compressed between the ring 828 and the base 816 of the rear housing 802 thereby exerting an outward directed force that keeps the punch 804 extended. The system 800 is operated in the same manner as the systems 100, 600, and 800 by applying pressure to the punch 804 to form a second opening in the container wall.

Note that in the above described examples, the hole punches are described as having cylindrical shaped shafts and the rear and front housings include circular shaped openings dimensioned to receive the shafts and operate as guides along which the punch slides. However, embodiments of the vacuum release systems are not intended to be so limited. Hole punches can also have square, rectangular, triangular, or any other polygonal cross-sectional shape, and the corresponding openings in the rear and front housings can be similarly shaped to receive the cross-sectional shapes of the shafts.

The above describe rear and front housings, hole punches, and caps can be composed of any combination of plastics, thermoplastics, aluminum, steel, or any other suitable material. The rear and front housings, hole punches, and caps can be fabricated

using any combination of injection molding and/or machining to achieve the desire shape and size of the vacuum release system components.

The foregoing description, for purposes of explanation, used specific nomenclature to provide a thorough understanding of the disclosure. However, it will be
5 apparent to one skilled in the art that the specific details are not required in order to practice the systems and methods described herein. The foregoing descriptions of specific examples are presented for purposes of illustration and description. They are not intended to be exhaustive of or to limit this disclosure to the precise forms described. Obviously, many modifications and variations are possible in view of the above
10 teachings. The examples are shown and described in order to best explain the principles of this disclosure and practical applications, to thereby enable others skilled in the art to best utilize this disclosure and various examples with various modifications as are suited to the particular use contemplated. It is intended that the scope of this disclosure be defined by the following claims and their equivalents:

CLAIMS

1. A vacuum release system comprising:
5 a hole punch having a shaft and a ring located along the shaft;
a coiled spring having a first end and a second end; and
a housing including two aligned and opposing openings, wherein the housing
encloses the spring and a portion of the hole punch with the shaft disposed within the two
openings and the spring located along the shaft such the first end abuts the ring and the
10 second end abuts the housing surrounding one of the openings.
2. The system of claim 1, wherein the housing further comprises at least one first
vent located in the housing around one of the openings and at least one second vent
located in the housing around the other opening, wherein the at least one first vent is
15 opposite the at least one second vent.
3. The system of claim 1, wherein the housing further comprises at least one vent
located in the housing substantially perpendicular to the shaft of the punch.
- 20 4. The system of claim 1, wherein the two openings are guides to steady and direct
the punch.
5. A vacuum release system comprising:
a hole punch having a shaft with a tapered end, a butt end, and a ring located
25 along the shaft;
a rear housing having a first opening dimensioned to receive the shaft of the
punch;
a front housing having a second opening dimensioned to receive the shaft;
a spring located along the shaft; wherein the front housing and rear housing are
30 connected with the first opening aligned with the second opening to form a guide to

steady and direct the punch, and wherein the punch is oriented with the tapered end toward the rear housing and the butt end extending from the front housing.

6. The system of claim 5, wherein the rear housing further comprises a threaded section in which the second opening is located and the front housing further comprises a threaded female section in which the first opening is located.

7. The system of claim 5, wherein the rear housing further comprises guides separated by grooves, the guides dimensioned to receive the shaft of the punch.

8. The system of claim 5, wherein the front housing further comprises at least one vent located away from the first opening and the rear housing further comprises at least one vent located away from the second opening to allow air to flow through the at least one vent in the front housing and the at least one vent in the rear housing.

9. The system of claim 5, wherein the housing further comprises at least one vent located in the housing substantially perpendicular to the shaft of the punch.

10. The system of claim 5, wherein the spring is located along the shaft between the ring and the rear housing.

11. The system of claim 5, further comprises a cap attached to the butt end of the punch, wherein the spring is located along the shaft between the front housing and the cap.

12. A method to release a vacuum in an inverted, liquid filled container, the method comprising:

attaching a vacuum release system to the outside of the container away from a first opening in the container, the system including a hole punch;

inverting the container so that the first opening is directed substantially downward; and

applying pressure to the punch to form a second opening in the container, wherein the second opening allows air to enter the container to release a vacuum so that the liquid rapidly flows uninterrupted through the first opening.

5 13. The method of claim 12, further comprises releasing pressure applied to the punch to remove the punch from the second opening.

14. The method of claim 12, wherein attaching the vacuum release system to the outside of the container further comprises:

10 placing a sleeve around the container away from the first opening, the sleeve having an aperture;


attaching the system to the sleeve so that the rear housing is located between the sleeve and the container and the opening in the rear housing is aligned with the aperture in the sleeve; and

15 attaching the front housing to the rear housing so that the punch is oriented with the tapered end directed toward the container.

15. The method of claim 12, wherein the vacuum release system includes:

a coiled spring having a first end and a second end; and

20 a housing including two aligned and opposing openings, wherein the housing encloses the spring and a portion of the hole punch, the hole punch having a shaft and a ring located along the shaft, the shaft disposed within the two openings and the spring located along the shaft such the first end abuts the ring and the second end abuts the housing surrounding one of the openings.

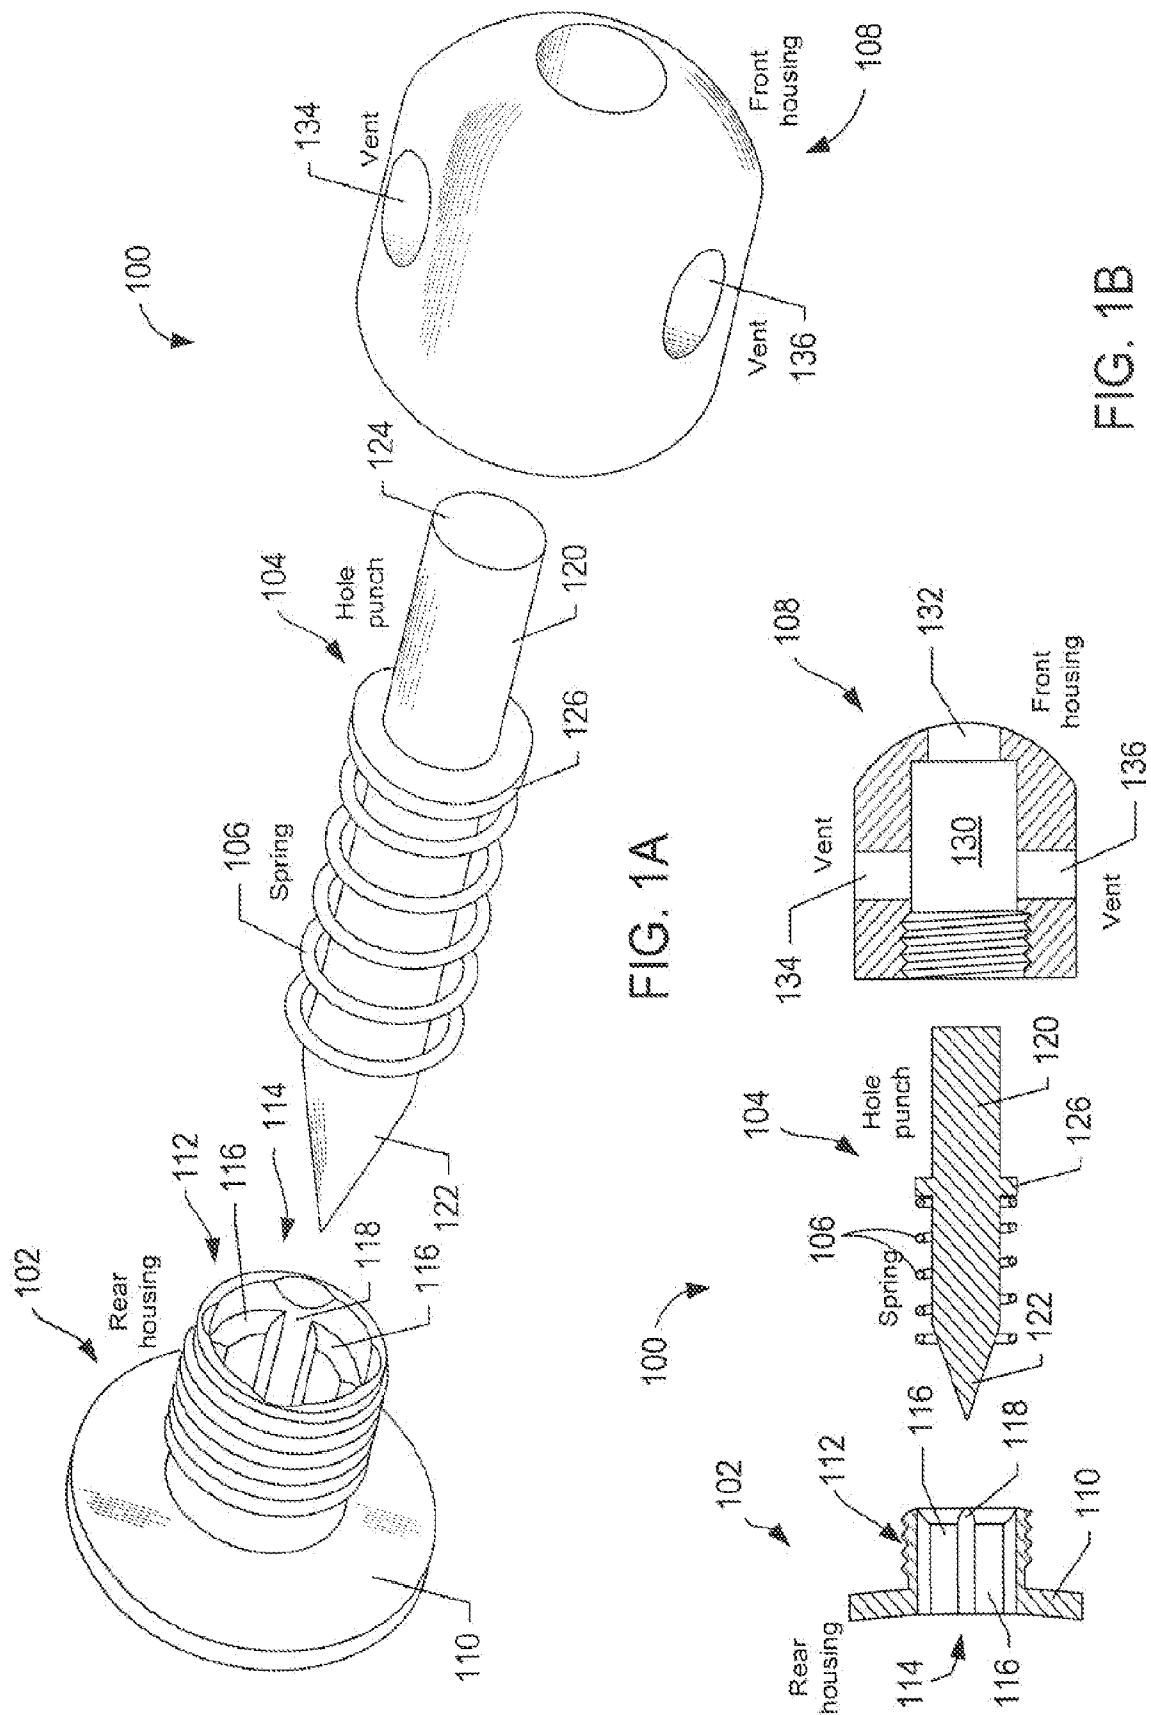

മ

FILE

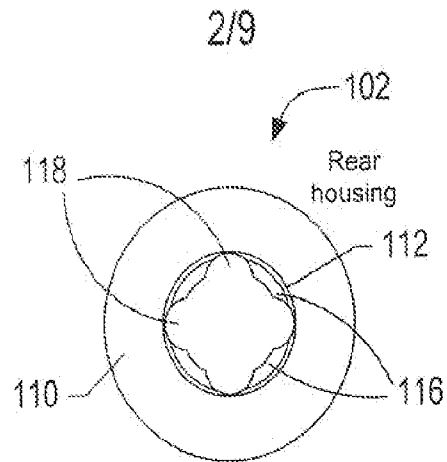


FIG. 2

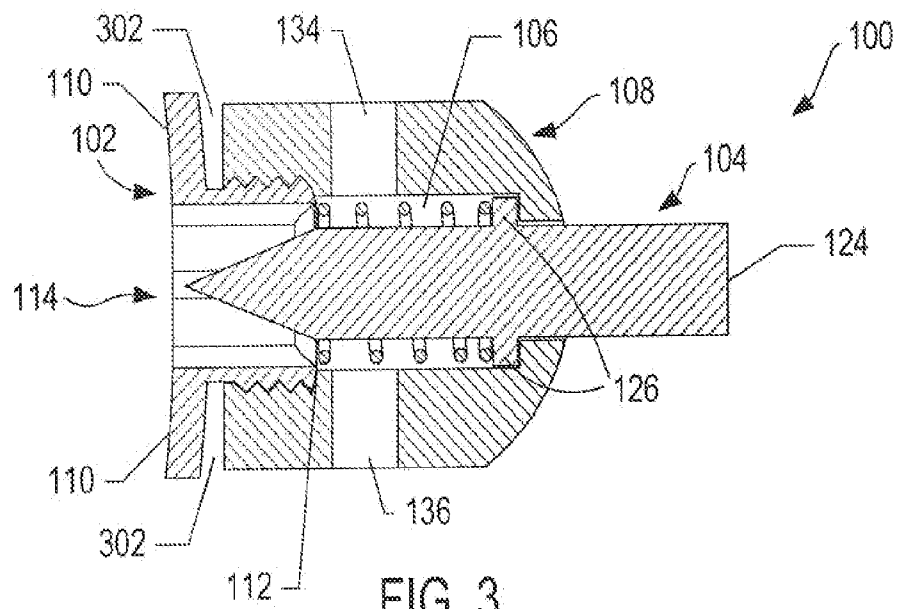


FIG. 3

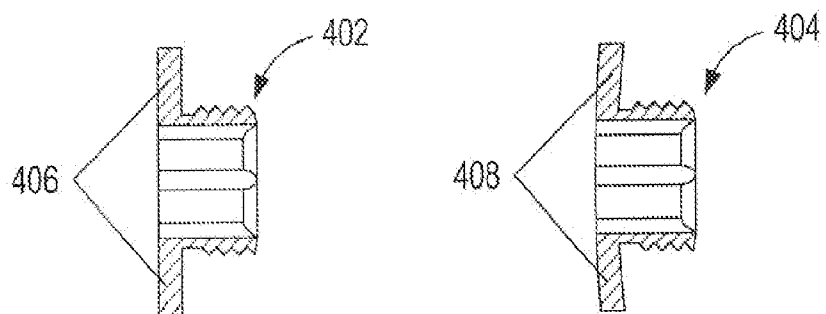


FIG. 4

3/9

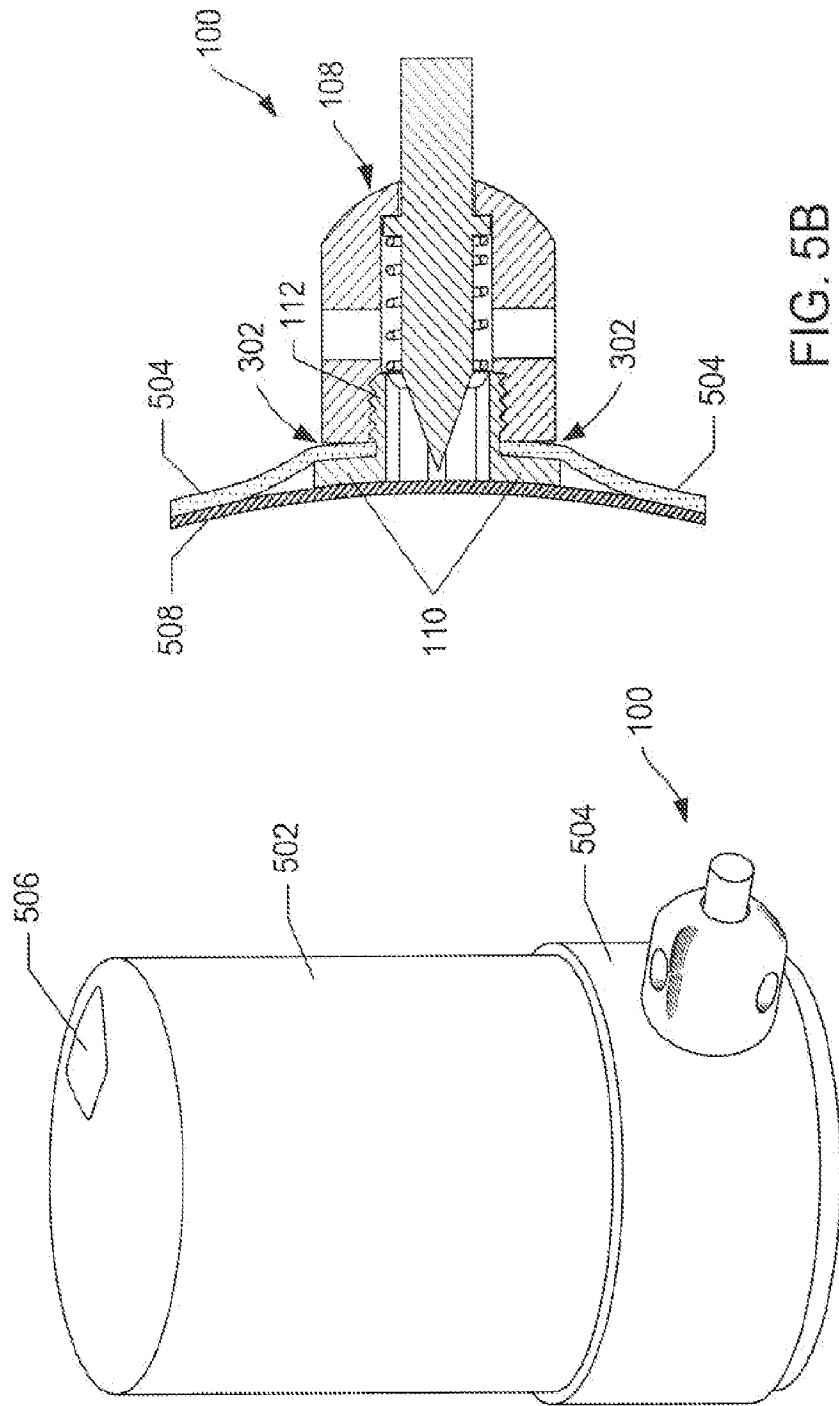


FIG. 5A

FIG. 5B

4/9

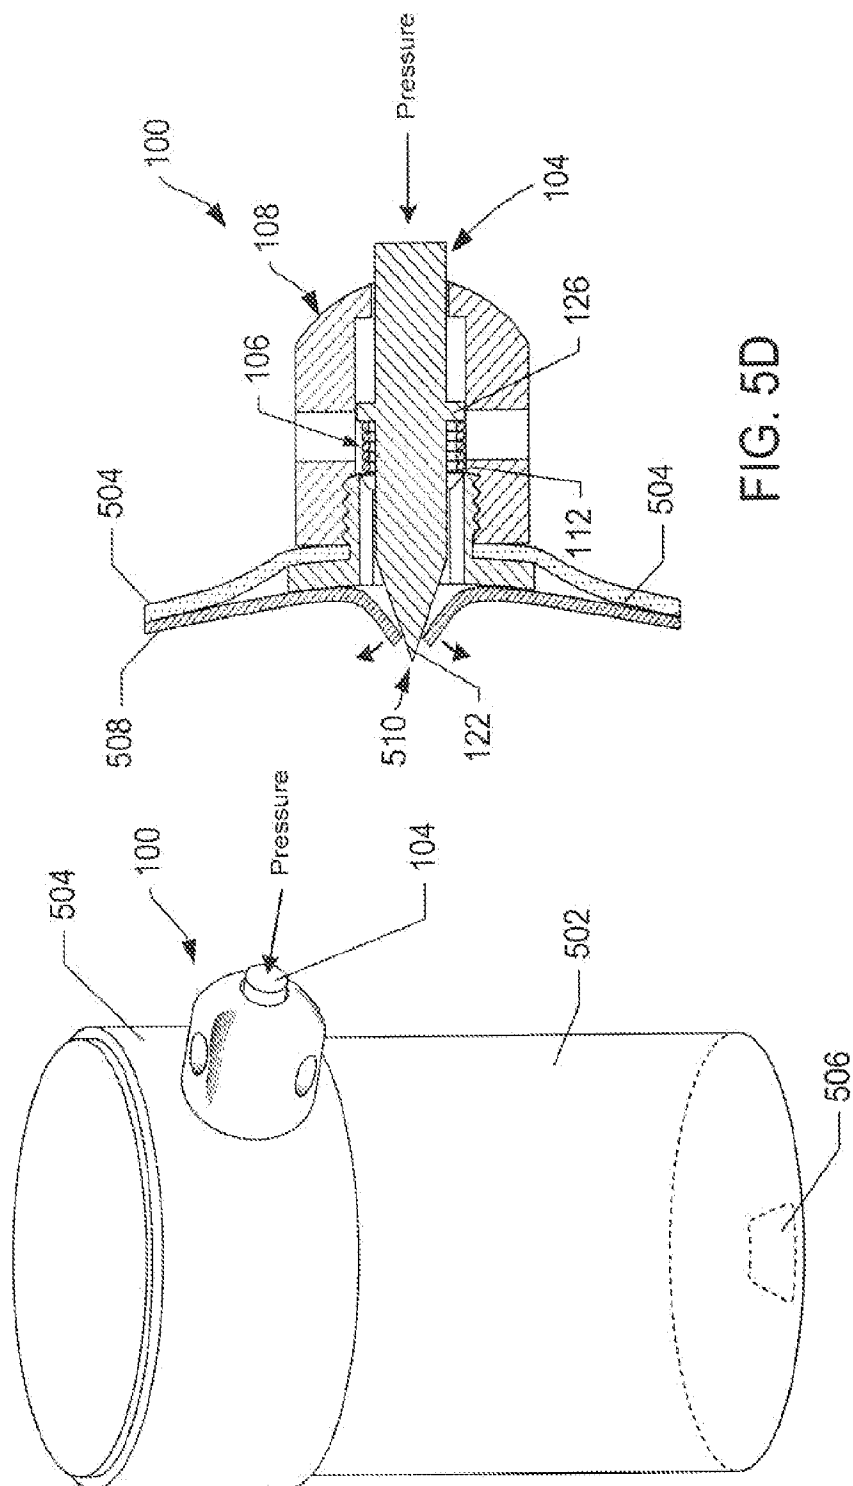


FIG. 5D

FIG. 5C

5/9

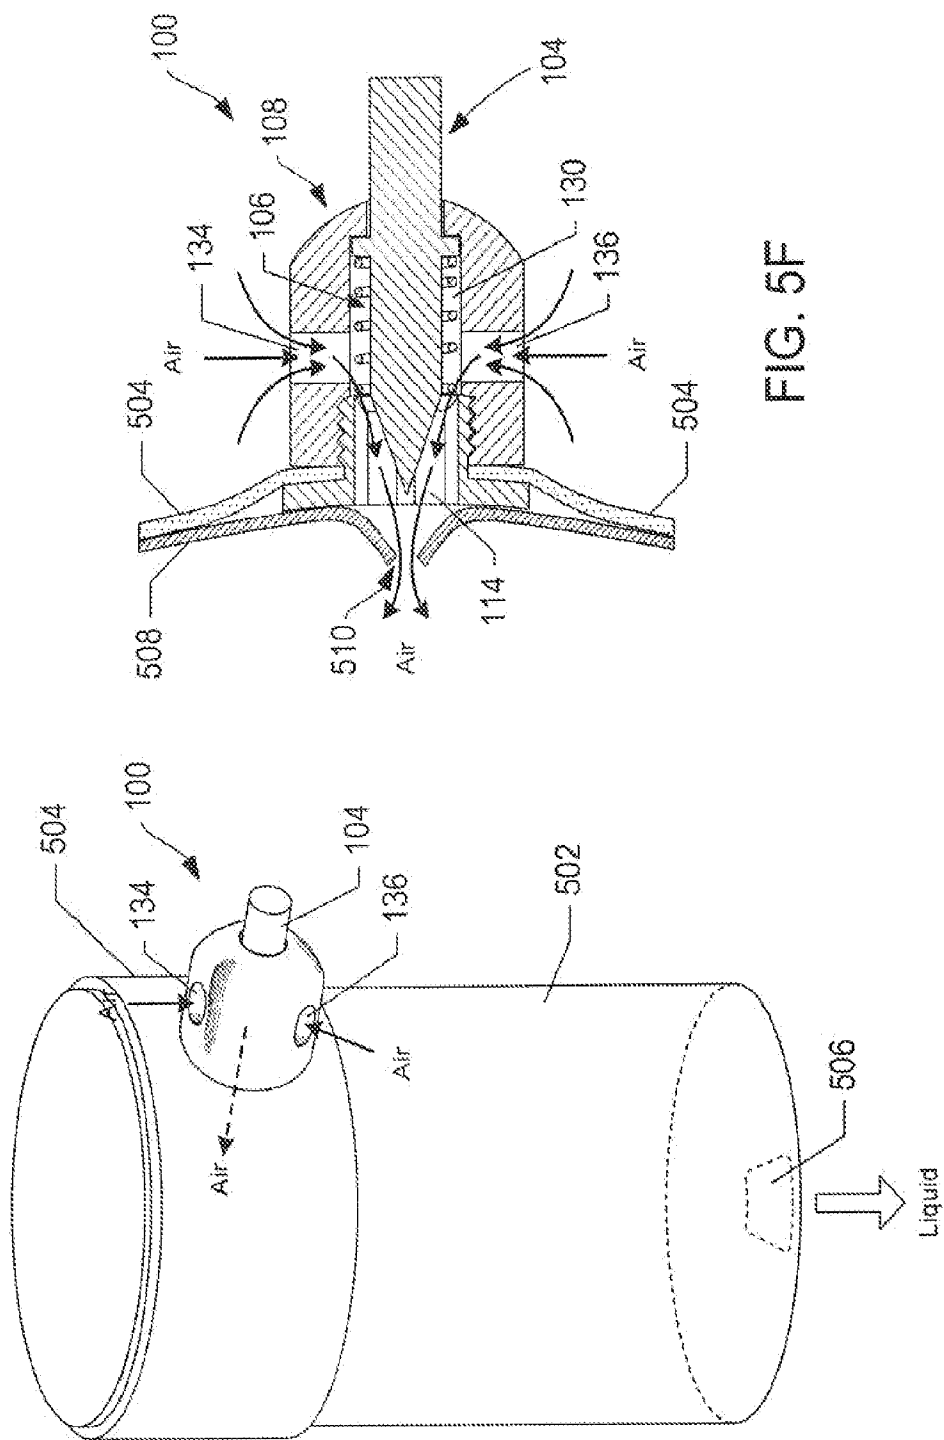


FIG. 5F

FIG. 5E

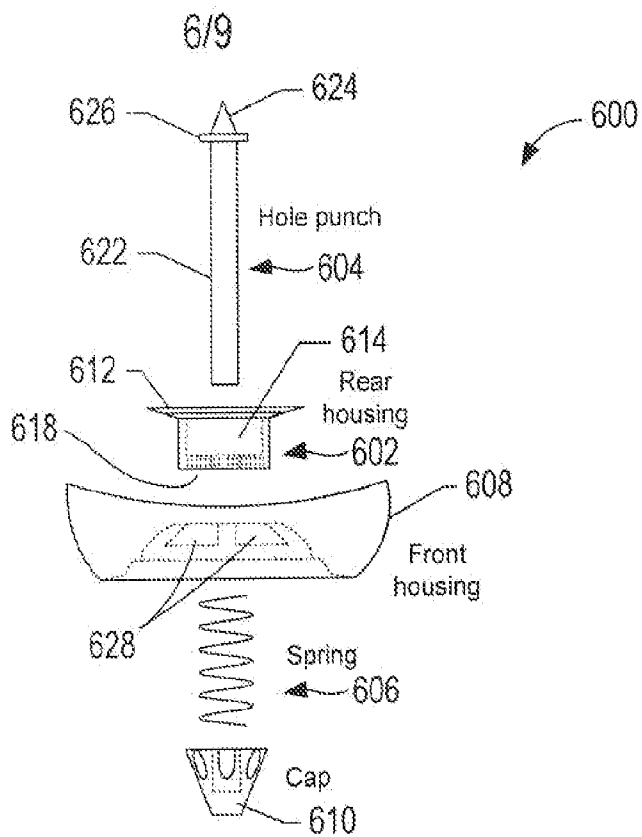


FIG. 6A

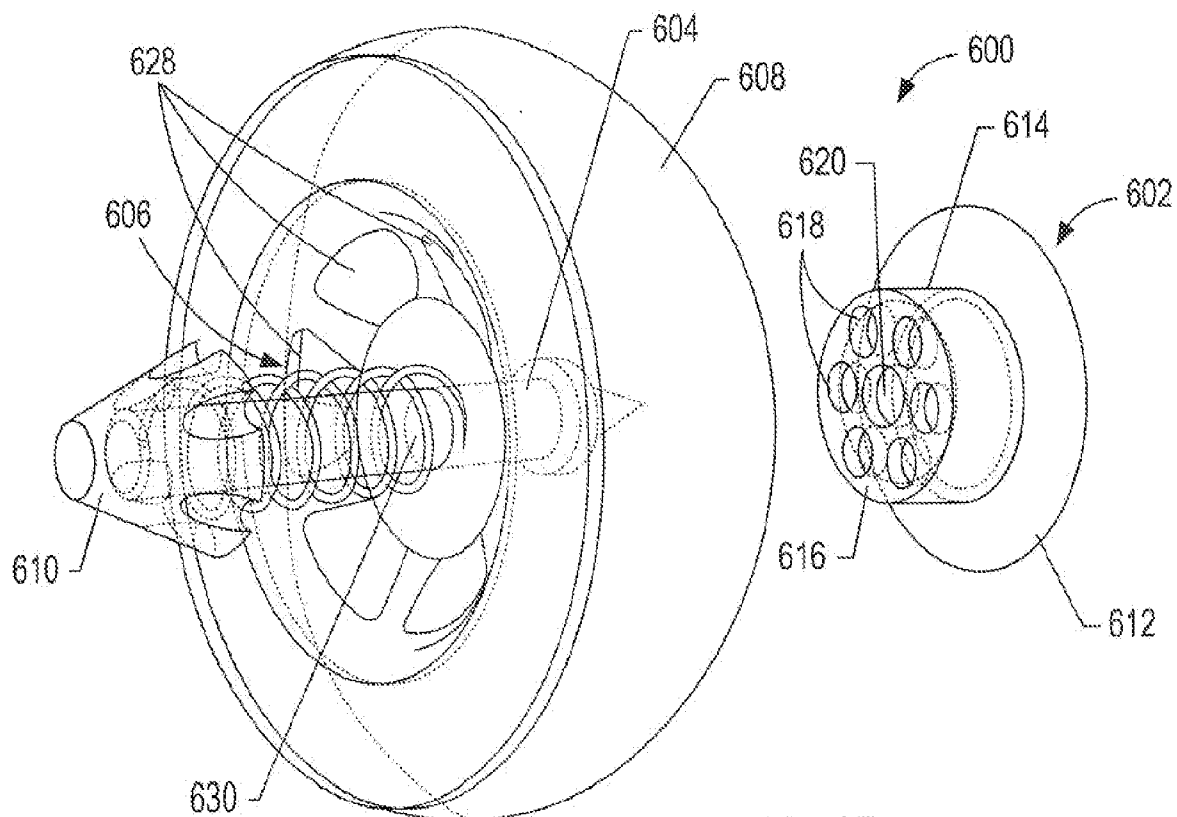


FIG. 6B

7/9

600

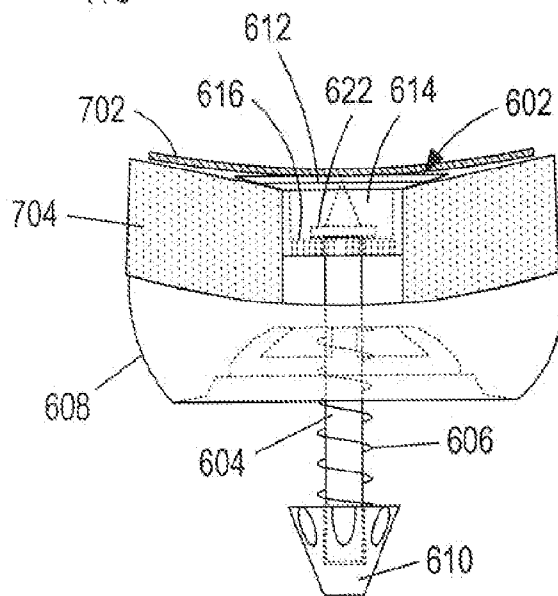


FIG. 7A

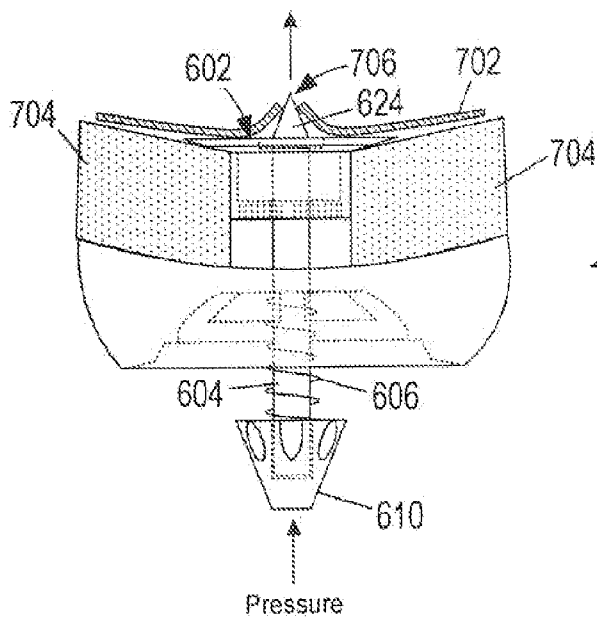


FIG. 7B

600



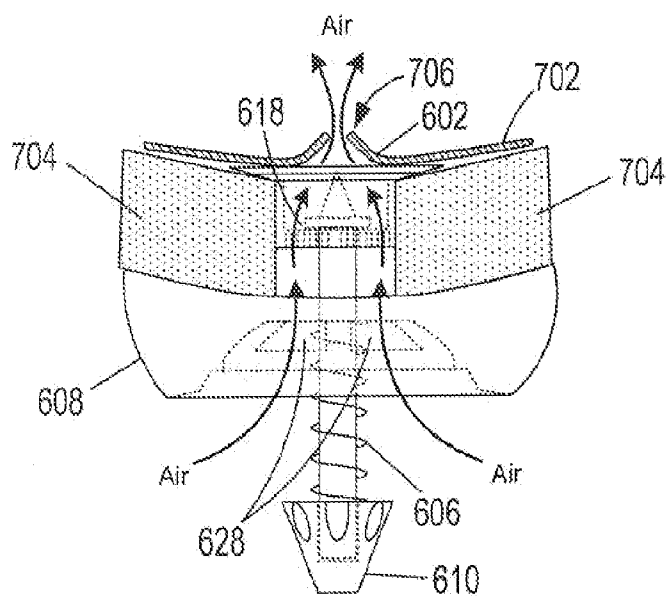


FIG. 7C

8/9

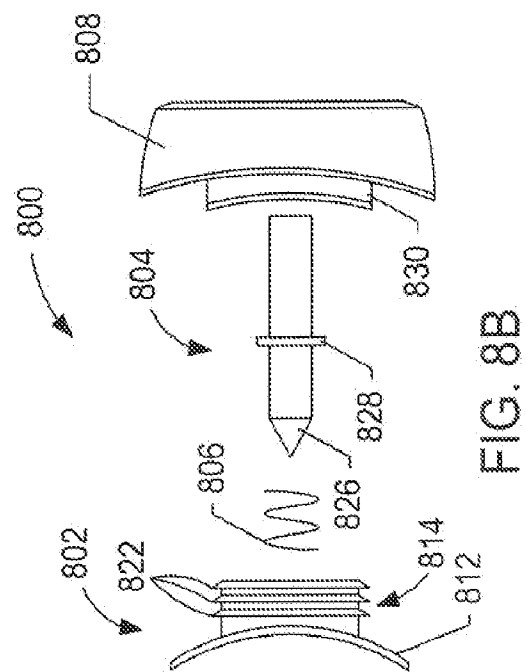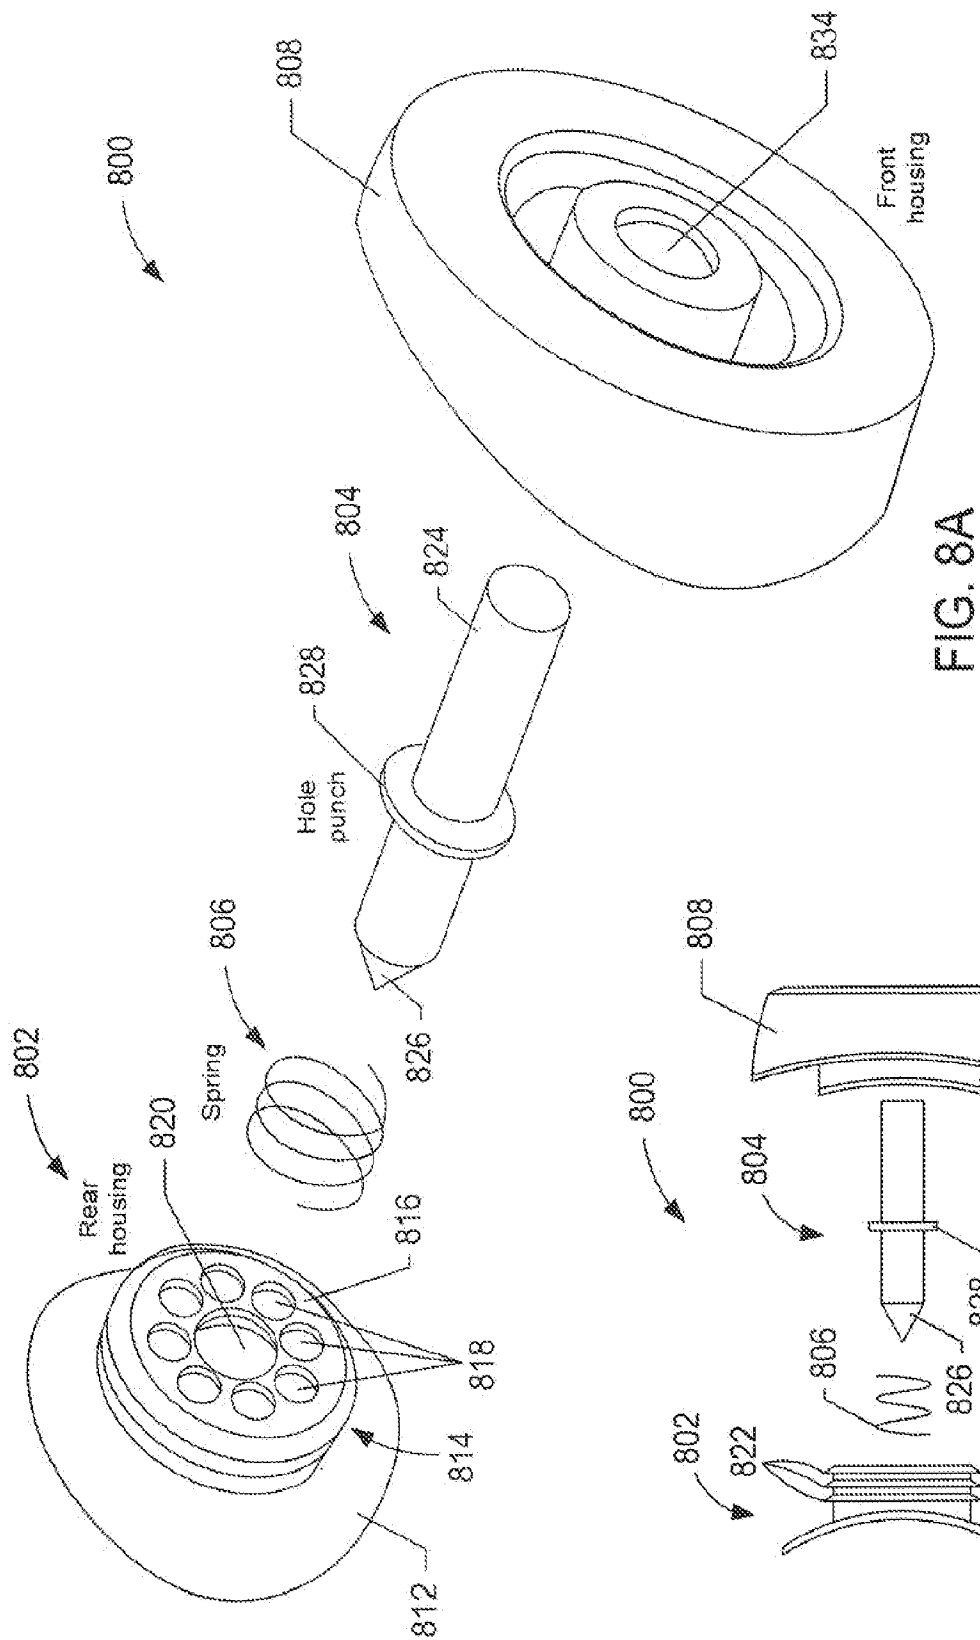

9/9

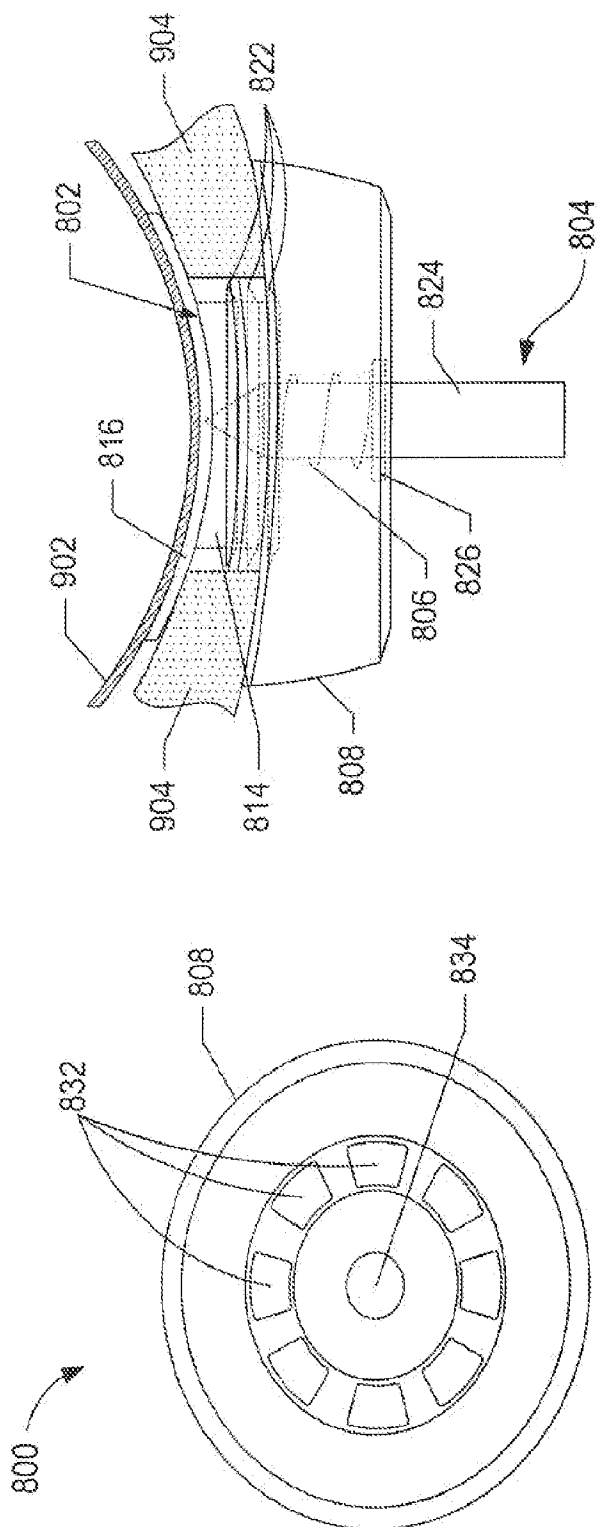


FIG. 9

FIG. 8C

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/042521**A. CLASSIFICATION OF SUBJECT MATTER****B26F 1/32(2006.01)i, B26F 1/02(2006.01)i, B26F 1/14(2006.01)i, F17C 13/12(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B26F 1/32; B26F 1/24; B41J 2/175; B26F 1/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords: vacuum, release, spring

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 2006-0236552 A1 (MARK GILES) 26 October 2006 See abstract, paragraph [0103], and figures 1-3.	1,4-7,10 2,3,8,9,11-15
A	US 2006-0150789 A1 (ANDREW RUSSELL) 13 July 2006 See abstract, paragraphs [0020]-[0022], and figures 1-5.	1-15
A	US 2006-0042101 A1 (PAUL ROEFS) 02 March 2006 See abstract and figure 9.	1-15
A	US 2003-0142180 A1 (CURT G. GONZALES) 31 July 2003 See abstract and figure 6.	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

26 MARCH 2012 (26.03.2012)

Date of mailing of the international search report

27 MARCH 2012 (27.03.2012)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 189 Cheongsu-ro,
Seo-gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

Park Sang Hyun

Telephone No. 82-42-481-5434



INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2011/042521

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2006-0236552 A1	26.10.2006	WO 2006-116123 A1	02.11.2006
US 2006-0150789 A1	13.07.2006	US 7328731 B2	12.02.2008
US 2006-0042101 A1	02.03.2006	None	
US 2003-0142180 A1	31.07.2003	CN 100448677 C0	07.01.2009
		CN 1860030 A	08.11.2006
		CN 1860030 C0	24.12.2008
		CN 1860032 A	08.11.2006
		DE 60317120 D1	13.12.2007
		DE 60317120 T2	19.06.2008
		EP 1332883 A2	06.08.2003
		EP 1332883 A3	26.05.2004
		EP 1332883 B1	31.10.2007
		EP 1651444 A1	03.05.2006
		EP 1651444 B1	21.02.2007
		EP 1654122 A1	10.05.2006
		EP 1670644 A1	21.06.2006
		EP 1670644 B1	03.10.2007
		EP 1958780 A2	20.08.2008
		EP 1958780 A3	22.10.2008
		EP 1958780 B1	04.01.2012
		EP 2279868 A1	02.02.2011
		EP 2279868 A9	23.03.2011
		JP 04-564576 B2	06.08.2010
		JP 2007-500617 A	18.01.2007
		JP 2007-500620 A	18.01.2007
		JP 2007-500621 A	18.01.2007
		JP 2009-298153 A	24.12.2009
		JP 4564576 B2	20.10.2010
		US 2004-0021751 A1	05.02.2004
		US 2004-0183870 A1	23.09.2004
		US 2004-0183871 A1	23.09.2004
		US 2004-0183873 A1	23.09.2004
		US 2007-0070156 A1	29.03.2007
		US 2010-0182385 A1	22.07.2010
		US 2010-0231664 A1	16.09.2010
		US 6648460 B2	18.11.2003
		US 6962408 B2	08.11.2005
		US 7147310 B2	12.12.2006
		US 7452061 B2	18.11.2008
		US 7744202 B2	29.06.2010
		US 7959271 B2	14.06.2011
		US 8070274 B2	06.12.2011
		US 8075117 B2	13.12.2011
		WO 2005-011984 A1	10.02.2005
		WO 2005-011986 A1	10.02.2005
		WO 2005-011987 A1	10.02.2005

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2011/042521

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2005-011988 A2	10.02.2005
		WO 2005-011988 A3	10.02.2005