

(19) **DANMARK**

(10) **DK/EP 3084091 T3**



(12)

## Oversættelse af europæisk patentskrift

Patent- og  
Varemærkestyrelsen

- 
- (51) Int.Cl.: **E 04 B 1/80 (2006.01)** **E 04 B 1/74 (2006.01)**
- (45) Oversættelsen bekendtgjort den: **2018-06-06**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2018-02-28**
- (86) Europæisk ansøgning nr.: **14820753.3**
- (86) Europæisk indleveringsdag: **2014-12-22**
- (87) Den europæiske ansøgnings publiceringsdag: **2016-10-26**
- (86) International ansøgning nr.: **EP2014003461**
- (87) Internationalt publikationsnr.: **WO2015090616**
- (30) Prioritet: **2013-12-20 DE 102013021703** **2014-01-29 DE 102014101056**  
**2014-02-12 DE 102014101707**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Interbran Systems AG, Ahaweg 2, 76131 Karlsruhe, Tyskland**
- (72) Opfinder: **BÜTTNER, Siegmар, August-Bebel-Strasse 31, D-68519 Viernheim, Tyskland**  
**SCHÜMCHEN, Kurt, Bahnhof Strasse 39, D-53949 Dahlem, Tyskland**
- (74) Fuldmægtig i Danmark: **Dennemeyer & Associates S.A, P.O. Box 700425, DE-81304 Munich, Tyskland**
- (54) Benævnelse: **VARMEISOLERINGSPLADE**
- (56) Fremdragne publikationer:  
**EP-A2- 2 522 785**  
**WO-A1-2012/076492**  
**DE-A1-102011 113 287**  
**DE-U1-202011 050 487**  
**FR-A1- 2 936 583**  
**US-A1- 2003 077 438**



## THERMAL INSULATION PANEL

The invention in question relates to the technical field of thermal insulation, specifically the thermal insulation of buildings.

The invention in question relates to a thermal insulation composite system (ETICS), which has a thermal insulation panel and an insulating plaster system.

While the thermal insulation of buildings was seen as secondary for new builds and the acquisition of real estate until the 1980s, it has increasingly moved back into focus due to rising energy prices, an increased environmental awareness and not least due to legislative measures, such as the German Energy Saving Regulation (EnEV).

New builds and old buildings are predominantly insulated by means of a so-called external insulation, i.e. the external sides of the building are equipped with insulation material.

Normally, thermal insulation composite systems (ETICS) are preferably used for thermal insulation, said systems being constructed of a panel-shaped insulation material, a reinforcement layer being applied to the exterior of this and consisting of a reinforcement mortar and a reinforcement fabric and a finishing plaster. The insulation panels are usually designed on the basis of plastics, specifically rigid polystyrene foams (PS), such as polystyrene particle foam (EPS) or extruded polystyrene foam (XPS) or on the basis of rigid polyurethane foams (PUR). Thermal composite systems based on the above plastic insulation panels have outstanding insulating properties in ideal conditions, but have the disadvantage that they form a moisture barrier and moisture from the brickwork cannot be released into the environment, which often leads to the formation of mould and algae. In addition, the moisture increases the thermal conductivity of the system, which is why the theoretical heat transfer coefficients (U-values) according to EN ISO 6946 are often not achieved in practice.

In addition, such thermal insulation composite systems (ETICS) have thicknesses of 15 to 20 cm in order to achieve sufficient thermal insulation, which often leads to an optical impairment of the insulated facade and reduced incidence of light into the building through the windows. To reduce the thickness of the thermal composite system (ETICS), vacuum insulation panels (VIP) are being used increasingly in recent times, which enable effective thermal insulation with thermal insulation composite systems of a thickness of approx. 10 cm. However, these thermal insulation composite systems also have the crucial disadvantage that they are not open to diffusion, i.e. moisture from the brickwork cannot be emitted into the environment.

On the other hand, the alternatively used insulation materials that are open to diffusion, for example those based on mineral wool or natural, organic fibres such as wood, cork, hemp and reed fibres, are often lacking the necessary mechanical stability and structural integrity; these systems are in fact designed flexibly and not dimensionally stably. In addition, these systems have a considerably lower insulating effect in comparison with plastic panels and vacuum insulation panels.

Thermal insulation composite systems based on organic polymers or contain organic natural

products all have in common the fact that they are flammable and must be treated with special chemicals to reduce combustibility and flammability in general, which in turn however is often associated with increased environmental pollution and risk to health.

5 Insulating plasters are also used, which contain a binder and heat-insulating additives. Such insulating plasters are generally open to diffusion, i.e. moisture from the brickwork can be emitted to the environment; however, the insulating effect and mechanical load capacity of such insulating plasters is considerably reduced in comparison to thermal insulation composite systems, restricting the use of thermal insulating plasters to a few uses.

10 For this reason, there has been no lack of effort made in the prior art to improve existing insulating systems for the thermal insulation of buildings:

For example, DE 10 2012 101 931 A1 relates to a facade insulating system with a substructure in the timber frame construction, an insulating layer formed from mineral wool panels and a plaster layer, wherein a support fabric exists on the insulating layer which is intended to provide the insulation with an increased mechanical load capacity.

15 Furthermore, DE 10 2010 029 513 A1 relates to a thermal insulating powder mixture, which is made into thermal insulating moulded bodies and consists of a mixture of silicic acid and at least one fibrous material.

20 DE 10 2011 109 661 A1 relates to an insulating board and a special arrangement of a number of insulating boards on a building wall, which are connected by means of a capillary-active adhesive for moisture control.

While the aforementioned systems can improve at least specific individual aspects of conventional thermal insulation systems, they however do not make it possible to overcome the principle disadvantages of conventional thermal insulation systems.

25 Attempts have also been made as it were to improve the efficiency of thermal insulation systems by using special materials. In particular, attempts have been made to incorporate aerogels into insulation or insulation systems in order to increase their insulating effect. Aerogels are highly porous solids, more than 90 vol% of which consists of pores. Due to the extremely high porosity, aerogels are outstandingly suited, at least in theory, to thermal insulation and have thermal conductivity figures  $\lambda$  in the range of 0.012 to 0.020 W/(mK). The aerogel that are usually used for insulating purposes are made up of silicon dioxide or condensed silicic acid and are extracted from silicates by means of the sol-gel process. As well as the good thermal insulating properties, aerogels are also characterised by good sound insulation and non-flammability. Due to the high porosity, aerogels however only have an extremely low mechanical stability and are destroyed even under low mechanical loads.

35 Due to the good thermal insulation properties of silicate-based aerogels in particular, a number of attempts to incorporate aerogels into insulation have been carried out nonetheless. Aerogels are incorporated into insulation panels made of mineral wool among other things; a corresponding product is commercially available under the trade name Aerowolle®.

In addition, attempts have also been made to incorporate aerogels into insulating plasters, wherein the mechanical workability, particularly the application of the insulating plaster by means of plastering machines has proven to be difficult as the fragile aerogel particles are usually destroyed when being applied under pressure to the building wall.

5 DE 10 2011 119 029 A1 relates to an insulation for the production of an insulating element, wherein the insulation contains aerogel particles and at least one inorganic or organic binder. The binder content should be less than 3 vol%, with regard to the entire volume of the insulation, and the insulation also contains expanded or extruded polystyrene particles.

EP 2 522 785 A2 relates to a method and a system for the internal insulation of an external  
10 building wall. In the described method, at least one capillary-inactive thermal insulation panel that is open to diffusion is attached to the inner side of the external building wall to form a thermal insulation layer by means of an adhesive, wherein the adhesive is also used at the same time to form a moisture-regulating intermediate layer, which is able to absorb, temporarily store and re-emit moisture, particularly condensation that has arisen. The internal insulating  
15 system comprises at least one capillary-inactive thermal insulation panel that is open to diffusion and an adhesive to attach the thermal insulation panel to the inner side of the external building wall, wherein the adhesive also forms a moisture-regulating intermediate layer at the same time. Furthermore, the use of an adhesive to form a moisture-regulating intermediate layer in an internal insulating system is described.

20 In addition, FR 2 936 583 A1 relates to a panel for thermal insulation and/or for soundproofing and noise insulation. The panel for thermal and/or noise insulation is made up of at least one rigid wooden board or plasterboard and a thermal insulating multilayer structure being applied to this, which is permeable for water vapour. The multilayer structure has two reflective surfaces, which are permeable for water vapour. An open-pored thermal insulating structure is located  
25 between the reflective surfaces.

DE 10 2011 113 287 A1 relates to a thermal insulation module, which has a first calcium silicate layer and a second calcium silicate layer and a thermal insulation being positionable between the first calcium silicate layer and the second calcium silicate layer. In this context, it is provided that the thermal insulation is receivable in a receiving space between the calcium silicate layers,  
30 which is limitable by a frame arrangement, through which the first calcium silicate layer can be connected with the second calcium silicate layer and which is also made from calcium silicate.

Furthermore, US 2003/0077438 A1 relates to a composite material, which contains 5 to 97 vol% aerogel particles, at least one binder and at least one fibrous material, wherein the diameter of the aerogel particles is  $\geq 0.5$  mm. Furthermore, a method for the production of the composite  
35 material and its use are disclosed.

DE 20 2011 050 487 U1 relates to an insulation element with two surface substrates being spaced apart, having a distributed support structure arranged between them and transmitting forces into the surface, with at least one cavity, wherein the cavity is filled or designed to be

fillable with a heat-insulating optimised gas filling and is substantially sealed in a gas-tight manner.

Furthermore, WO 2006/076492 A1 relates to open-part melamine resin foams filled with nanoporous particles, specifically aerogels or aerosils, their production and their use.

- 5 Finally, the European patent application EP 2 402 150 A1 relates to an insulation component, which consists of at least one panel having the fibres, aerogel particles and at least one binder. To obtain an insulation component that is easy to handle and produce as well as exhibiting outstanding insulating properties, the panel comprises 20 to 40 wt.-% mineral wool fibres, 45 to 70 wt.-% aerogel particles and 8 to 12 wt.-% binder. The components are pressed and  
10 hardened such that a panel with a density of 130 kg/m<sup>3</sup> to 200 kg/m<sup>3</sup> is obtained.

However, even the aforementioned systems have not yet managed to decisively improve the principle disadvantages of using aerogels, namely the lower mechanical load capacity and the resulting reduced stability as well as the insulating effect of the insulation being considerably reduced in practice.

- 15 For this reason, the object of the present invention is to provide thermal insulating systems, wherein the previously described problems and disadvantages arising in connection with the prior art should be at least largely avoided or at least attenuated.

In addition, another object of the present invention is to provide thermal insulation composite systems that are open to diffusion, have a considerably reduced thickness in comparison to  
20 conventional systems while simultaneously exhibiting improved thermal insulation properties.

The above described task will be solved according to the invention by a thermal insulation composite system comprising a thermal insulation panel and an insulating plaster system as per claim 1; further advantageous refinements and embodiments of the invention are the subject of the respective dependent claims.

- 25 It goes without saying that the subsequent specification of values, figures and ranges are not intended to be limiting in this respect of values, figures and range information; rather, it is obvious to the person skilled in the art that there may be deviations from the stated ranges or information in a particular case or relating to the use without the context of the present invention being left.

- 30 Moreover, all values, parameters or similar mentioned below can basically be determined or defined using standard or standardized or explicitly specified determination methods or using determination methods commonly used by the person skilled in the art.

On this basis, the invention in question will be described in detail below.

- The object of the present invention – according to a first aspect of the present invention – is  
35 thus a thermal insulation composite system, having a thermal insulation panel and an insulating plaster system, wherein on a surface to be insulated first the thermal insulation panel is arranged, followed by the insulating plaster system,  
wherein the thermal insulation composite system has a thickness of 4 to 12 cm, wherein the

thermal insulation composite system has a thermal conductivity in the range of 0.017 to 0.040 W/(mK),

wherein the thermal insulation panel contains at least an aerogel and is open to diffusion along its principal insulation direction, wherein the aerogel is arranged in the loose filling in the thermal insulation panel and wherein the thermal insulation panel has a thickness of 1 to 8 cm,

wherein the insulating plaster system has a thickness of 1 to 5 cm, wherein the insulating plaster system has a one aerogel-containing insulating plaster layer and at least one additional insulating plaster layer not containing aerogel, wherein the one aerogel-containing insulating plaster layer has a layer thickness in the range of 1.5 to 3 cm and wherein the additional non-aerogel-containing insulating plaster layer has a layer thickness in the range of 0.2 to 1.5 cm, wherein the aerogel-containing insulating plaster layer has a lime-based binder and a cement-based binder.

The thermal insulation composite system according to the invention thus comprises a thermal insulation panel, which contains at least one aerogel and is open to diffusion along its principal insulation direction.

The thermal insulation panel thus permits a transportation of water vapour from the brickwork to the environment. The principal insulation direction of the thermal insulation panel thus runs vertically to the main surface, i.e. the largest surface of the thermal insulation panel, which is synonymously described as the flat surface or broad surface.

Within the scope of the present invention, it is provided that the aerogel is arranged in the loose filling in the thermal insulation panel. A particularly low water vapour diffusion resistance can thereby be achieved, as no binder prevents the diffusion of the water vapour.

In general, the thermal insulation panel has an aerogel with absolute particle sizes in the range of 1 to 8 mm, specifically 2 to 6 mm, preferably 3 to 5 mm. The use of aerogel with the above particle sizes permits a particularly good water vapour diffusion on one hand, while allowing a very effective insulating effect, wherein the particles are robust enough to withstand with damage vibrations during storage and transportation, cutting and assembling of the thermal insulation panel.

With regard to the water vapour diffusion resistance of the thermal insulation panel, this can vary over a wide range. However, within the scope of the present invention, it is preferable if the thermal insulation panel has a water vapour diffusion resistance coefficient  $\mu$ , determined in accordance with DIN EN ISO 12542 in the range of 1 to 8, specifically 1 to 6, preferably 2 to 5.

Thermal insulation panels made of polymer foams have considerably higher water vapour diffusion resistance coefficients, determined in accordance with DIN EN ISO 12542. In this way, rigid polyurethane foams and expanded polystyrene foam have  $\mu$ -values in the range of 50 to 80, while extruded polystyrene foam has  $\mu$ -values in the range of 80 to 180.

According to a preferred embodiment of the present invention, the thermal insulation panel has a thermal conductivity in the range of 0.008 to 0.040 W/(mK), particularly 0.010 to 0.035

W/(mK), preferably 0.011 to 0.030 W/(mK), more preferably 0.012 to 0.020 W/(mK). The thermal insulation panel according to the invention thereby virtually achieves the extremely low thermal conductivity of pure aerogel.

Furthermore, within the scope of the present invention, it is preferable if the thermal insulation panel has an at least substantially cuboid structure. This makes both the storage and assembly of the thermal insulation panels easier.

The thermal insulation panel has a thickness in the range of 1 to 8 cm, specifically 2 to 7 cm, preferably 2.5 to 6 cm, more preferably 3 to 5 cm. The thermal insulation panel has thereby a considerably reduced thickness in comparison with conventional thermal insulation panels based on polystyrene or polyurethane, wherein a 3-fold to 4-fold reduction is possible.

According to a preferred embodiment of the present invention, it is provided that the thermal insulation panel has a base plate, consisting of the narrow sides of the thermal insulation panel and an internal structure with gaps, specifically cavities. The base body can be formed as one piece or several pieces.

The thermal insulation panel preferably has an internal structure parallel to the principal insulation direction with gaps, specifically cavities, being open on at least one side, for receiving the aerogel. In doing so, it can be provided that the gaps are open on both sides and extend over the entire thickness of the thermal insulation panel. As a result of the internal structure with the cavities for receiving the aerogel, the thermal insulation panel receives an increased mechanical stability on one hand; on the other hand, the loose filling of the aerogel in the thermal insulation panel used according to the invention is divided into smaller units, whereby fewer strong forces act upon the aerogel particles during transportation and assembly, i.e. due to vibrations, and these are thus preserved.

According to a preferred embodiment of the present invention, the gaps are formed n-sided, particularly four-sided to eight-sided, preferably six-sided. As a result of the internal structure, alveolar cavities are thus preferably created in the thermal insulation panel, which are preferably completely opened vertically to the diffusion direction or to the principal thermal insulation direction.

Particularly good results are obtained thereby within the scope of the present invention, if the openings of the gaps have surface areas parallel to the main surface in the range of 1 to 64 cm<sup>2</sup>, particularly 3 to 36 cm<sup>2</sup>, preferably 4 to 16 cm<sup>2</sup>. A grid is preferably therefore formed within the thermal insulation panel as a result of the internal construction, in particular as a result of supports. This rasterization of the thermal insulation panel protects – as mentioned above – the aerogel on one hand, but also facilitates simple assembly of the thermal insulation panel at the building site or an adjustment of the dimensions of the thermal insulation panel in size and shape to the surface to be insulated.

In general, the base body of the thermal insulation panel has wood, plastics or mineral materials or exists at least substantially from this. Within the scope of the present invention, a plurality of



thermoplastic or thermoset plastics are suitable for forming the base body of the thermal insulation panel, in particular plastics based on (i) polyolefin, more preferably polyethylene (PE) or polypropylene (PP); (ii) polymethacrylates (PMA); (iii) polymethylmethacrylates (PMMA); (iv) polyvinyl chloride (PVC); (v) polyvinylidene halide, particularly polyvinylidene fluoride (PVDV) or polyvinylidene chloride (PVDC); (vi) acrylonitrile/butadiene/styrene copolymer (ABS); (vii) polyamides (PA), polycarbonates (PC); (viii) melamine formaldehyde resins; (ix) epoxy resins; (x) phenolic resins or (xi) urea resins can be used.

Within the scope of the present invention, it is however preferable if the base body of the thermal insulation panel is made of mineral materials, as the thermal insulation panel exhibits the flammability class of A1 or A2 in accordance with DIN 4102 in this case. According to another preferred embodiment, the base body of the thermal insulation panel exists at least substantially of wood; this has the advantage that a high stability is achieved with a relatively low weight and also a further improved permeability for gases, in particular water vapour, is achieved.

In general, the openings of the gaps are at least partially sealed, in particular by means of a trickle guard. In this context, it is provided

that a surface structure being open to diffusion, specifically open to flow, is arranged on the broad surfaces of the thermal insulation panel, wherein it is preferable that the surface structure covers the broad surfaces of the thermal insulation panel. An at least partial or sectional sealing of the opening of the gaps by means of a trickle guard, in particular with a surface structure, prevents an unwanted dropping of the aerogel from the gaps of the thermal insulation panel on one hand. On the other hand, an only sectional covering of the opening ensures an unobstructed diffusion of water vapour through the thermal insulation panel. The surface structure preferably completely covers the broad surface of the thermal insulation panel.

Within the scope of the present invention, it is preferred if the surface structure is a textile or mineral, preferably a mineral, surface structure, in particular a fabric, woven fabric, knitted fabric, meshwork, stitch-bonded fabric, fleece and/or a felt, or a lattice. In this context, it is preferred if the surface structure is a fabric with a mesh size or lattice spacing of 0.5 to 5 mm, particularly 1 to 4 mm, preferably 1.5 to 3 mm, more preferably 1.7 to 2.5 mm, wherein a fibreglass fabric is preferably used.

The above mentioned surface structures are all open to diffusion or open to flow and allow an unobstructed passage of water vapour. In addition, the use of a surface structure, particularly a fibreglass fabric, with the aforementioned mesh sizes serves not only as a trickle guard against unintended dropping of the aerogel from the gaps of the thermal insulation panel but also in fact as a reinforcement at the same time for a coating being applied to the thermal insulation panel or to a plaster being applied to the thermal insulation panel, particularly a thermal insulating plaster, wherein this can be anchored to the surface structure when using a plaster but does not penetrate the panel. The thermal insulation panel used according to the invention thereby

provides a thermal insulation composite system into which it is integrated with an increased mechanical stability.

Within the scope of the present invention, the thermal insulation panel is generally applied to the surface to be insulated by means of an adhesive, particularly by means of a 2-component adhesive, especially with a methyl methacrylate basis or polyurethane basis. The use of adhesives in comparison to the use of insulation fixings has the advantage that the thermal insulation panel and consequently a thermal insulation composite system into which it is integrated is not damaged and the formation of a thermal bridge through the insulation fixing is also prevented.

As mentioned above, the thermal insulation composite system (ETICS) has an aforementioned thermal insulation panel and an insulating plaster system. It is thereby provided according to the invention that the thermal insulation panel is arranged on a surface to be insulated and hereafter the insulating plaster system is arranged, i.e. on the external side or on the side of the thermal insulation panel facing away from the surface to be insulated.

The insulating plaster systems used according to the invention are multi-layer heat-insulating systems based on plaster.

The thermal insulation composite system according to the invention is specifically characterised in that it only has an extremely slight thickness, is open to diffusion for water vapour and also has a very high mechanical resilience, wherein comparable or even improved insulating properties are achieved despite the slight layer thickness as compared to conventional thermal insulation composite systems.

The thermal insulation composite system has a thickness of 4 to 12 cm, specifically 5 to 10 cm, preferably 5.5 to 9 cm, more preferably 6 to 8 cm. The layer thickness is thereby dependant on the site conditions, such as the condition of the brickwork and the surroundings.

As a result of the thermal insulation composite system according to the invention, as compared to conventional thermal insulation composite systems having layer thicknesses in the range of 18 to 20 cm, an efficient thermal insulation with a thickness of less than one-third of thermal insulation composite systems. According to a preferred embodiment of the present invention, the thermal insulation composite system has a water vapour diffusion resistance coefficient  $\mu$ , determined in accordance with DIN EN ISO 12542 in the range of 4 to 12, particularly 5 to 10, preferably 6 to 8.

Furthermore, within the scope of the present invention, it is provided that the thermal insulation composite system has a thermal conductivity in the range of 0.017 to 0.040 W/(mK), preferably 0.020 to 0.035 W/(mK), more preferably 0.022 to 0.027 W/(mK).

Particularly good results are obtained within the scope of the present invention if special insulating plaster systems based on aerogel-containing insulating plasters, as described below, are used.

According to the invention, preferably used insulating plasters can be obtained on the basis of

innovative material dry mixes.

A dry building material mix, specifically a plaster mortar, preferably for the production of an insulating plaster, is described below, wherein the material dry mix contains at least one aerogel.

- 5 Within the scope of the present invention, it is thereby preferable if the aerogel is designed on a silicate basis, consists specifically at least substantially of silicon dioxide, is preferably a pure silicon dioxide aerogel.

The aerogel can be made water-repellent if applicable, which positively influences the hydrophobic properties of the insulation and the production of the aerogel on one hand, but also  
10 reduces the porosity of the aerogel on the other hand, thus attenuating the insulating effect – albeit only slightly. In addition, a water-repellent aerogel no longer conforms to the fuel class A1 as per DIN EN 13501-1 and DIN 4102-1, being instead class A2, i.e. evidence of the actual non-flammability of the aerogel must be produced.

The aerogel can be made water-repellent using conventional methods, which are familiar to the  
15 person skilled in the art such that further embodiments can be dispensed with at this point. Exemplary reference can be made, for example, to U. K. H. Bangi, A. V. Rao und A. P. Rao "A new route for preparation of sodium-silicate-based hydrophobic silica aerogels via ambient-pressure drying", Sei. Technol. Adv. Mater. 9, 2008.

With the preferred dry building material mix according to the invention, insulating plasters are  
20 available that exhibit a considerably improved mechanical stability as compared to conventional aerogel-containing insulating plasters.

As with conventional, aerogel-free plaster systems, the dry building material mix can be made into an insulating plaster by simply mixing with water, said insulating plaster can be mechanically applied to building walls and has considerably improved thermal insulation  
25 properties alone and as part of the thermal insulation composite system as compared with the prior art.

In addition, the one aerogel-containing insulating plaster is open to diffusion, i.e. moisture from the brickwork can be emitted to the environment, whereby the purely theoretically achievable heat transfer coefficients of the insulation are actually also achieved.

30 In general, the material dry mix contains the aerogel in quantities of 1 to 50 wt.-%, specifically 2 to 45 wt.-%, preferably 3 to 40 wt.-%, more preferably 5 to 35 wt.-%, particularly preferably 10 to 30 wt.-%, very particularly preferably 15 to 25 wt.-%, in relation to the dry building material mix. Specifically in the above mentioned mixture ranges, particularly stable and durable insulating plasters are obtained, which have considerably improved insulating properties as compared to  
35 conventional insulating plaster systems.

Particularly good results are obtained within the scope of the present invention if the aerogel contained in the dry building material mix has a particle size of 0.01 to 10 mm, specifically 0.05 to 8 mm, preferably 0.1 to 7 mm, more preferably 0.2 to 6 mm, particularly preferably 0.5 to 5

mm, very particularly preferably 0.5 to 4 mm, extremely preferably 0.5 to 2 mm. The aerogels used particularly within the scope of the present invention with particle sizes in the aforementioned ranges generally have a relatively high mechanical stability on one hand and are particularly compatible with the other particles contained within the dry building material mix on the other hand.

The aerogel usually has a bulk density of 0.05 to 0.30 g/cm<sup>3</sup>, particularly 0.08 to 0.27 g/cm<sup>3</sup>, preferably 0.12 to 0.25 g/cm<sup>3</sup>, more preferably 0.13 to 0.22 g/cm<sup>3</sup>, particularly preferably 0.14 to 0.20 g/cm<sup>3</sup> very particularly preferably 0.15 to 0.16 g/cm<sup>3</sup>.

Particularly good results are obtained within the scope of the present invention if the aerogel has an absolute pore diameter in the range of 2 to 400 nm, particularly 5 to 300 nm, preferably 8 to 200 nm, more preferably 10 to 130 nm, particularly preferably 10 to 70 nm. Aerogels which have pore sizes in the aforementioned range exhibit an extremely low thermal conductivity on one hand and a comparatively high mechanical stability on the other.

According to a preferred embodiment of the present invention, the aerogel is at least substantially dimensionally stable under the contract conditions of the prepared dry building material mix, i.e. particularly as insulating plaster. It is thereby particularly advantageous if at least 70 wt.-%, preferably at least 80 wt.-%, more preferably at least 90 wt.-%, particularly preferably at least 95 wt.-% of the used aerogel particles remain dimensionally stable under contract conditions. It is a feature of the aerogel used according to the invention that the aerogel particles, particularly upon mechanical application specifically with the help of plastering machines effecting a pressure of up to 7 or 8 bar on the aerogel particles, remain dimensionally stable and are not destroyed, which leads to the particularly good thermal insulation properties with simultaneously high mechanical residence of the insulating plaster according to the invention.

With aerogels that have the aforementioned parameters and properties, a particularly more mechanically resistant, durable and outstanding heat-insulating insulating plaster can be obtained. In particular, the aerogel particles exhibit a considerably higher mechanical load capacity and resistance when incorporated into the plaster or into the dry building material mix than is the case with comparable products of prior art to date.

Within the scope of the present invention, preferably used water-repellent aerogels also have a contact angle with water of 110 to 165°. Furthermore, the thermal conductivity of such preferably used water-repellent aerogels can be in the range of 0.015 to 0.032 W/(mK), particularly 0.019 to 0.025 W/(mK), preferably 0.020 to 0.022 W/(mK). Particularly good results are also obtained within the scope of the present invention if the thermal conductivity of the aerogels is within the range of 0.015 to 0.016 W/(mK).

In addition, it can be provided within the scope of the present invention that the dry building material mix also contains at least one aggregate.

The additives applied or used within the scope of the present invention are known as such to

the person skilled in the art. The term "additive" should be taken to mean specifically concrete aggregates according to DIN 1045 within the scope of the present invention. The additives are fillers with particle sizes that are suitable for the respective production of binders. For further information about the term "aggregate", reference can be made specifically to Römpp

5 Chemielexikon, 10th Edition, Georg-Thieme-Verlag, Stuttgart/New York, Volume 1, 1998, Pages 419 and 420, keyword: "Concrete aggregate" and to the literature referenced there, the particular content is hereby completely implicit by its reference.

If the dry building material mix contains an aggregate, this is generally selected from natural or artificial stones, metals or glasses. In this context, particularly good results are obtained within

10 the scope of the present invention if the aggregate is a lightweight aggregate, particularly with a gross grain density of maximum  $2.0 \text{ kg/dm}^3$ . It has hereby been proven to be preferable if the lightweight aggregate is selected from the group of volcanic rock, perlite, vermiculite, pumice, glass foam or expanded glass, expanded clay, expanded shale, polystyrene, tuff, expanded mica, lava rock, lava sand, foam plastics and their compounds, preferably perlite.

15 At the same time, particularly good results are obtained within the scope of the present invention if the lightweight aggregate has a particle size of maximum 4 mm, particularly maximum 3 mm. Lightweight aggregates with the aforementioned particle sizes, specifically in the case of perlite, can interact with aerogel particles – without being bound by this theory –, wherein the aerogel is embedded particularly in the cavities existing between the individual

20 perlite particles in the dry building material mix and in the insulating plaster and protected there from mechanical destruction.

If the dry building material mix contains a lightweight aggregate, it can be provided that the dry building material mix contains the lightweight aggregate in quantities of 20 to 90 wt.-%, specifically 30 to 80 wt.-%, preferably 40 to 75 wt.-%, more preferably 45 to 70 wt.-%,

25 particularly preferably 50 to 65 wt.-%, in relation to the dry building material mix.

Particularly good results are obtained within the scope of the present invention if the dry building material mix contains the aerogel and the lightweight aggregate in a weight-based ration of aerogel to lightweight aggregate of 6 : 1 to 1 : 50, particularly 5 : 1 to 1 : 40, preferably 2 : 1 to 1 : 25, more preferably 1 : 1 to 1 : 13, particularly preferably 1 : 2 to 1 : 6, very particularly

30 preferably 1 : 2 to 1 : 4.

Particularly in the aforementioned weight-based ratios of aerogel to lightweight aggregate, it can be seen that the aerogel particles are preserved in the insulating plaster, particularly even during mechanical application.

In general, the dry building material mix contains at least one binder. In particular, particularly

35 good results are achieved if the dry building material mix contains the binder in quantities of 5 to 98 wt.-%, particularly 8 to 75 wt.-%, preferably 10 to 50 wt.-%, more preferably 12 to 40 wt.-%, particularly preferably 15 to 35 wt.-%. The dry building material mix and the thermal insulating plaster contain the binder thereby preferably in a rather lessor amount, while the aerogel and

aggregates exist in a considerably higher amount, which leads to considerably improved thermal insulation properties.

Within the scope of the present invention, the dry building material mix has two different binders.

The dry building material mix has a lime-based binder, particularly hydraulic lime, and a cement-based binder, particularly white cement. Mixtures of the aforementioned binders have a particularly good binding behaviour, have a consistency and viscosity that guarantees good applicability of the insulating plaster and leads to an outstanding final stability despite the high proportion of aggregates. In addition, the lime content also inhibits the formation of mould and algae due to its high alkalinity. The insulating plaster, which can be obtained with the dry building material mix, is open to diffusion such that a formation of mould is countered from the outset, but the use of a lime-based binder also suppresses the formation of mould and algae in the case that the insulating plaster is applied under unfavourable conditions.

A hydraulic lime is to be understood within the scope of the present invention as a mixture of burnt lime (calcium hydroxide) with hydraulic factors, such as calcium silicates and calcium aluminates or iron oxide. The hydraulic proportion of the binder hardens through hydration and requires no carbon dioxide for binding. The binder hereby obtains a high initial strength, while the non-hydraulic part of the lime slowly hardens or binds by means of diffusion of carbon dioxide into the insulating plaster.

If the dry building material mix contains a lime-based binder, then it has been proven effective if the dry building material mix contains the lime-based binder in quantities of 4 to 97 wt.-%, particularly 5 to 75 wt.-%, preferably 7 to 50 wt.-%, more preferably 8 to 40 wt.-%, particularly preferably 10 to 30 wt.-%, very particularly preferably 15 to 30 wt.-%, in relation to the dry building material mix.

At the same time, good results are obtained within the scope of the present invention if the dry building material mix contains the cement-based binder in quantities of 1 to 20 wt.-%, particularly 1 to 15 wt.-%, preferably 1.5 to 12 wt.-%, more preferably 1.5 to 10 wt.-%, particularly preferably 2 to 8 wt.-%, very particularly preferably 2 to 5 wt.-%, in relation to the dry building material mix.

According to a particularly advantageous embodiment of the present invention, the dry building material mix contains the lime-based binder and the cement-based binder in a weight-based ratio of lime-based binder to cement-based binder of 1 : 5 to 30 : 1, particularly 1 : 2 to 20 : 1, preferably 1 : 1 to 15 : 1, more preferably 2 : 1 to 10 : 1, particularly preferably 3 : 1 to 8 : 1, very particularly preferably 4 : 1 to 7 : 1.

Furthermore, it can be provided within the scope of the present invention that the dry building material mix contains at least one additive, particularly at least one admixture. It can hereby be provided that the additive is selected from the group of plasticizers, thickeners, delayers, activators, stabilising agents (stabilisers), rheological suspending agents, admixtures for adjusting the water retention capacity (water retention agents), dispersing agents, sealing

agents, air-entraining agents and their compounds.

With regard to the quantity of additive in the preferably used dry building material mix according to the invention, this can vary over a wide range. However, good results are particularly obtained within the scope of the present invention if the dry building material mix contains the additive in quantities of 0.01 to 10 wt.-%, particularly 0.1 to 5 wt.-%, preferably 0.3 to 3 wt.-%, more preferably 0.5 to 1 wt.-%, in relation to the dry building material mix.

Within the scope of the present invention, particularly good results are particularly obtained with a dry building material mix which contains

- (A) the aerogel in quantities of 3 to 40 wt.-%, particularly 5 to 35 wt.-%, preferably 10 to 30 wt.-%, more preferably 15 to 25 wt.-%, in relation to the dry building material mix,
- (B) a lightweight aggregate, particularly perlite, in quantities of 30 to 80 wt.-%, particularly 40 to 75 wt.-%, preferably 45 to 70 wt.-%, more preferably 50 to 65 wt.-%, in relation to the dry building material mix,
- (C) at least one lime-based binder, particularly hydraulic lime, in quantities of 7 to 50 wt.-%, particularly 8 to 40 wt.-%, preferably 10 to 30 wt.-%, more preferably 15 to 30 wt.-%, in relation to the dry building material mix,
- (D) at least one cement-based binder, particularly white cement, in quantities of 1.5 to 12 wt.-%, particularly 1.5 to 10 wt.-%, preferably 2 to 8 wt.-%, more preferably 2 to 5 wt.-%, in relation to the dry building material mix, and
- (E) at least one additive in quantities of 0.01 to 10 wt.-%, particularly 0.1 to 5 wt.-%, preferably 0.3 to 3 wt.-%, more preferably 0.5 to 1 wt.-%, in relation to the dry building material mix.

In addition, it can be provided within the scope of the present invention that the dry building material mix has a bulk density in the range of 100 to 400 kg/m<sup>3</sup>, particularly 150 to 350 kg/m<sup>3</sup>, preferably 175 to 300 kg/m<sup>3</sup>, more preferably 200 to 250 kg/m<sup>3</sup>.

The previously described dry building material mix, particularly the plaster mortar, permits the production of a preferred insulating plaster according to the invention, particularly a thermal insulating plaster, for thermal insulation of structures, particularly of buildings.

A one aerogel-containing insulating plaster is preferable according to the invention, particularly a thermal insulating plaster, for thermal insulation of structures and buildings, which can be obtained from a previously described dry building material mix, particularly a plaster mortar. It can be hereby particularly provided that the insulating plaster can be obtained by mixing a previously described dry building material mix, particularly a plaster mortar, with water.

Within the scope of the present invention, particularly good results are obtained if the insulating plaster is obtainable by mixing with water in quantities of 70 to 150 wt.-%, specifically 80 to 130 wt.-%, preferably 90 to 110 wt.-%, relating to the dry building material mix. The insulating plaster can thus be mixed and handled like a conventional insulating plaster as known from the prior art.

Generally, the hardened one aerogel-containing insulating plaster already has an outstanding barrier effect against running water without further coating, whereas water vapour can diffuse relatively easily through the hardened insulating plaster. Thus the advantageously used hardened insulating plaster usually has a water absorption coefficient  $w$  in the range of 1.0 to 1.8 kg/(m<sup>2</sup> • h<sup>0.5</sup>), particularly 1.10 to 1.80 kg/(m<sup>2</sup> • h<sup>0.5</sup>), preferably 1.20 to 1.70 kg/(m<sup>2</sup> • h<sup>0.5</sup>).

In general, the one aerogel-containing insulating plaster is applied to the surface face to be treated by means of conventional methods, specifically by means of mechanical spraying methods. It is a feature of the insulating plaster used according to the invention that it can be applied despite its high content of aerogel by means of mechanical spraying methods, particularly by means of plastering machines onto the surface face to be insulated, particularly house walls. As previously stated, the preferred insulating plaster according to the invention is characterised in that the aerogel contained therein is at least substantially dimensionally stable under contract conditions, particularly during mechanical application, wherein at least 70 wt.-%, particularly at least 80 wt.-%, preferably at least 90 wt.-%, more preferably at least 95 wt.-% of the used aerogel particles remain dimensionally stable.

Within the scope of the present invention, a one aerogel-containing insulating plaster is used, which contains at least one aerogel and is particularly obtainable from a previously described dry building material mix, wherein the hardened one aerogel-containing insulating plaster has a thermal conductivity in the range of 0.02 to 0.055 W/(mK), particularly 0.022 to 0.050 W/(mK), preferably 0.024 to 0.045 W/(mK), more preferably 0.026 to 0.040 W/(mK), particularly preferably 0.028 to 0.032 W/(mK). The (thermal) insulating plaster thereby has thermal conductivities as are usually observed only in thermal insulation composite systems.

Generally, the hardened, one aerogel-containing insulating plaster has a compressive strength of 0.4 to 2.5 N/mm<sup>2</sup>, particularly 0.4 to 2.0 N/mm<sup>2</sup>, preferably 0.45 to 1.6 N/mm<sup>2</sup>, more preferably, 0.45 to 1.4 N/mm<sup>2</sup>. The aerogel-containing insulating plaster thus has an extremely high compressive strength for thermal insulating plasters.

Within the scope of the present invention, it is advantageous if the hardened, one aerogel-containing insulating plaster has a water vapour diffusion resistance coefficient  $\mu$ , determined in accordance with DIN EN ISO 12542, in the range of 2 to 9, particularly 3 to 7, preferably 4 to 6.

As previously mentioned, the insulating plaster is characterised in that it is open to diffusion and moisture can be emitted from the brickwork into the environment, which counteracts the formation of mould and algae and also increases the stability of the thermal insulating system.

Generally, the hardened, one aerogel-containing insulating plaster has a dry bulk density in the range of 200 to 350 kg/m<sup>3</sup>, particularly 225 to 325 kg/m<sup>3</sup>, preferably 250 to 300 kg/m<sup>3</sup>.

With regard to the layer thickness, with which the insulating plaster is applied to a surface, specifically to a building wall, this can vary over a wide range. The hardened insulating plaster can be applied with a layer thickness of 1 to 14 cm, particularly 1 to 8 cm, preferably 2 to 7 cm to the surface to be insulated, particularly the internal or external surface of a building wall. It is



thus further advantageous if the hardened insulating plaster is applied to the external surface of a building wall, i.e. is used as external insulation. The advantageously used thermal insulating plaster according to the invention can thereby be applied particularly directly to the brickwork, or the brickwork can be specifically prepared in advance, for example by applying a primer coat.

- 5 Primer coats, which reinforce the brickwork or improve the adhesion of plaster to the brickwork, are readily known to the person skilled in the art such that further embodiments can be dispensed with at this point.

With regards the layer thickness of the hardened one aerogel-containing insulating plaster, the aforementioned value ranges only apply for a single application not according to the invention of  
10 the insulating plaster or insulating plaster, which contains the insulating plaster according to the invention, whereas when using the insulating plaster according to the invention in a thermal insulation composite system (ETICS), particularly in a thermal insulation composite system (ETICS) containing a thermal insulation panel according to the invention, considerably lesser layer thicknesses of the preferred insulating plaster are used, as described below.

- 15 It is a feature of the one aerogel-containing insulating plaster that it can be used both for the internal and external area, particularly wherein outstanding heat insulating results with simultaneously very good mechanical load capacity are achieved even with the sole use of the insulating plaster or an insulating plaster system containing this in the field of external insulation. The sole application of the thermal insulating plaster or an insulating plaster system is  
20 recommended, for example, when the contours of a building need to be reproduced in exact detail. Otherwise a thermal insulation composite system (ETICS) according to the invention is preferred, as an even better thermal insulation can be achieved with this.

Within the scope of the present invention, it can also be provided that the hardened insulating plaster has the flammability A1 or A2 as per DIN 4102. As the advantageous insulating plaster  
25 according to the invention preferably has a purely mineral basis, it is not flammable and has the flammability A1 as per DIN 4102. When using water-repellent aerogels and organic additives, the preferred insulating plaster according to the invention is still not flammable, for which however proof must be provided, which corresponds to flammability A2 as per DIN 4102.

- Within the scope of the present invention, aerogel-containing insulating plaster systems are  
30 used. A multi-layer insulating plaster system is provided according to the invention, which has at least one insulating plaster system consisting of at least an at least one aerogel-containing insulating plaster, as previously described, and a surface coating, wherein the surface coating is arranged at least on one side of the insulating plaster layer facing away from the surface, specifically a building wall, being provided with the insulating plaster system.  
35 Hereby, it is preferred if the surface coating at least surface coating covers the side of the insulating plaster layer facing away from the surface provided with the insulating plaster system. The application of the surface to be insulated can thereby occur continuously or only in sections, wherein a continuous surface coating is preferred particularly on the external side of the

insulating plaster system, i.e. on the side of the insulating plaster system facing away from the surface to be insulated.

In general, the surface coating is watertight, particularly impervious to driving rain, and/or open to diffusion. Preferably used surface coatings according to the invention thus prevent the penetration of liquid water into the insulating plaster system, but facilitate on the other hand the diffusion of water vapour from the brickwork into the environment, whereby the brickwork is constantly dehumidified.

Particularly good results are obtained within the scope of the present invention if the surface coating has a layer thickness of 50 to 400  $\mu\text{m}$ , particularly 100 to 300  $\mu\text{m}$ , preferably 150 to 250  $\mu\text{m}$ . The surface coating can be thus produced by one-time or optionally by repeated application, i.e. the surface coating within the scope of the invention can exist of several layers, wherein the total thickness of the surface coating is however preferably within the aforementioned range.

Surface coatings on a polymer basis, specifically on an acrylate basis, have proven themselves to be particularly suitable. These are in fact permeable for water vapour, but still impermeable by liquid water and have an outstanding expandability of up to 150%. Such surface coatings thereby has a crack bridging effect, i.e. if cracks occur in the insulation, the surface coating will not inevitably crack in the same way and thus allow water to enter the insulating system, but rather its protective function will be maintained. This increases the stability of the insulating system or insulating plaster system considerably. Particularly suitable acrylate dispersions are available as water-based dispersions with a solid content of up to 60% and contain no organic solvent. Such acrylate dispersions are commercially available and readily familiar to the person skilled in the art.

In addition, it can be provided within the scope of the present invention that at least one primer coat is arranged between the aerogel-containing insulating plaster layer and the surface coating. The primer coat can likewise consist of one or several layers and has particularly a layer thickness of 25 to 100  $\mu\text{m}$ , specifically 35 to 75  $\mu\text{m}$ , preferably 45 to 60  $\mu\text{m}$ . In principle, all primers guaranteeing an improved adhesion of the surface coating to the material to be coated and also reinforcing the predominantly mineral-based plaster system are suitable as a primer. Such primer systems are known and familiar to the person skilled in the art. It is however preferred if the used primer is also open to diffusion, i.e. does not prevent dehumidification of the brickwork.

According to the present invention, at least one additional insulating plaster layer specifically not containing aerogel is arranged between the one aerogel-containing insulating plaster layer and the primer coat or the surface coating. In this connection, it is also preferred if the additional insulating plaster layer is arranged on the side of the one aerogel-containing insulating plaster facing away from the surface provided with the insulating plaster system.

The use of the further thermal insulating plaster specifically increases the mechanical load

capacity, such as the compressive strength of the entire insulating plaster system and also specifically protects the aerogel-containing insulating plaster when arranged on an external side.

5 The additional insulating plaster layer not containing aerogel has a layer thickness in the range of 0.2 to 1.5 cm, preferably 0.3 to 1.0 cm, more preferably 0.4 to 0.7 cm. Within the scope of the present invention, the additional insulating plaster layer, which does not contain an aerogel, is therefore only applied to the external side of the one aerogel-containing insulating plaster layer with an extremely thin layer thickness in order to protect said aerogel-containing insulating plaster layer against mechanical influences.

10 In addition, within the scope of the present invention, it is preferable if the additional insulating plaster layer has a thermal conductivity in the range of 0.02 to 0.12 W/(mK), particularly 0.03 to 0.10 W/(mK), preferably 0.05 to 0.09 W/(mK), more preferably 0.06 to 0.08 W/(mK).

Likewise, particularly good results are obtained within the scope of the present invention if the additional insulating plaster layer has a compressive strength of 1.3 to 4.0 N/mm<sup>2</sup>, particularly  
15 1.4 to 3.5 N/mm<sup>2</sup>, preferably 1.5 to 3.2 N/mm<sup>2</sup>, more preferably 1.6 to 3.0 N/mm<sup>2</sup>.

In general, the additional insulating plaster layer has a water vapour diffusion resistance coefficient  $\mu$ , determined in accordance with DIN EN ISO 12542, in the range of 3 to 10, particularly 4 to 8, preferably 5 to 7.

Furthermore, it can be provided that the additional insulating plaster layer has a dry bulk density  
20 in the range of 200 to 350 kg/m<sup>3</sup>, particularly 250 to 325 kg/m<sup>3</sup>, preferably 290 to 310 kg/m<sup>3</sup>.

By using the additional insulating plaster layer not containing aerogel, the mechanical properties of the insulating plaster system can be improved, wherein at the same time the insulation efficiency and the water vapour diffusion resistance of the insulating plaster system are only slightly influenced due to the low layer thickness of the additional insulating plaster layer.

25 According to a preferred embodiment of the present invention, the additional insulating plaster layer contains a lightweight aggregate. With regard to the quantity of lightweight aggregate in the additional insulating plaster layer, this can vary over a wide range. Particularly good results are however obtained if the additional insulating plaster layer contains a lightweight aggregate in quantities of 30 to 90 wt.-%, particularly 40 to 85 wt.-%, preferably 50 to 80 wt.-%, in relation to  
30 the additional insulating plaster or a corresponding dry building material mix.

In addition, the additional insulating plaster layer generally contains at least one binder. Within the scope of the present invention, it is however preferred when the additional insulating plaster layer contains at least one lime-based binder, particularly hydraulic lime, and at least one cement-based binder, particularly white cement. Thereby, it is preferable according to the  
35 invention if the additional insulating plaster layer contains the lime-based binder in quantities of 5 to 60 wt.-%, particularly 10 to 40 wt.-%, preferably 10 to 30 wt.-%, in relation to the additional insulating plaster or a corresponding dry building material mix and contains the cement-based binder in quantities of 1 to 15 wt.-%, particularly 2 to 10 wt.-%, preferably 3 to 5 wt.-%, in

relation to the additional insulating plaster or a corresponding dry building material mix.

The lightweight aggregate used for the additional insulating plaster layer has particularly a gross grain density of maximum  $2.0 \text{ kg/dm}^3$  and is particularly selected from the group of volcanic rock, perlite, vermiculite, pumice, glass foam or expanded glass, expanded clay, expanded shale, polystyrene, tuff, expanded mica, lava rock, lava sand, foam plastics and their compounds, preferably perlite, particularly with a grain density of maximum  $3 \text{ mm}$ , particularly maximum  $2 \text{ mm}$ .

With the above named weight ratios, very good resistances and a very good and consistent binding of the additional insulating plaster layer can be observed for one thing. In addition, the adhesion to the one aerogel-containing insulating plaster layer is also increased, as similar binder systems are preferably used in each case.

In general, a supporting layer is arranged between the one aerogel-containing insulating plaster layer and the additional insulating plaster layer. The supporting layer is particularly designed in the form of a reinforcement and is preferably a fibreglass fabric or a fibreglass network. The use of a supporting layer, particularly in the form of a reinforcement, also lends the insulating plaster system according to the invention further mechanical load capacity and avoids the formation of cracks, as stresses are compensated. Furthermore, a reinforcement enables the two insulating plaster layers to be directly in contact with each other and so they can form a particularly deep bond, wherein both insulating plaster layers are anchored on and in the reinforcement. The use of fibreglass fabrics or fibreglass networks is particularly advantageous as these are both alkali-resistant and non-flammable. Preferably, reinforcements, particularly fibreglass fabrics, are used with mesh sizes or a size of the mesh openings in the range of  $16 \text{ mm}^2$  to  $400 \text{ mm}^2$ , particularly  $49 \text{ mm}^2$  to  $300 \text{ mm}^2$ , preferably  $100 \text{ mm}^2$  to  $200 \text{ mm}^2$ .

A preferred insulating plaster system according to the invention has the following structure based on a surface provided with the insulating plaster system, i.e. from internal to external:

Insulating plaster layer, containing at least an aerogel,

Support layer,

Additional insulating plaster layer,

Primer coat and surface coating.

Such insulating plaster systems combine both a high insulation efficiency and a high mechanical load capacity.

The insulating plaster system within the scope of the present invention preferably has a water vapour diffusion resistance coefficient  $\mu$ , determined in accordance with DIN EN ISO 12542 in the range of 4 to 12, particularly 5 to 10, preferably 6 to 8.

In addition, it is preferred within the scope of the present invention if the insulating plaster system has the flammability A1 or A2 as per DIN 4102. The insulating plaster system according to the invention is thus non-flammable and consequently satisfies the highest fire protection regulations, which is why it can also be installed without problems in sensitive areas.

In general, the insulating plaster system has a layer thickness of 1.5 to 14 cm, particularly 2.5 to 9 cm, preferably 3.5 to 8 cm.

However, the aforementioned layer thicknesses or thicknesses of the insulating plaster system only apply if the insulating plaster system is applied directly onto a building wall, particularly a brickwork. If the insulating plaster system according to the invention is used as part of a thermal insulation composite (ETICS), it can have considerably lesser layer thicknesses. The insulating plaster system thus allows an effective thermal insulation with lesser layer thicknesses and an outstanding mechanical load capacity.

With the use according to the invention of the insulating plaster system in a thermal insulation composite system according to the invention, the aerogel-containing insulating plaster layer has a layer thickness in the range of 1.5 to 3 cm, more preferably 1.5 to 2.5 cm.

It is provided according to the invention that the additional insulating plaster layer not containing aerogel has a layer thickness in the range of 0.2 to 1.5 cm, preferably 0.3 to 1.0 cm, more preferably 0.4 to 0.7 cm. With the aforementioned layer thicknesses of the insulating plaster system or the insulating plaster layers as part of the thermal insulation composite system according to the invention, outstanding results are obtained within the scope of the present invention.

Ultimately, the thermal insulation composite system according to the invention can have an insulating plaster panel, which consists of a insulating plaster system as described above. In this case, the thermal insulation system according to the invention has a modular structure.

The usable insulating plaster panel according to the invention is particularly suitable for interior construction, particularly for roof constructions, especially for under-rafter and inter-rafter insulations.

If used in the interior area, different primers and coatings are usually used than in the field of external insulation. However, this is familiar to the person skilled in the art such that no further embodiments are required for this purpose.

With regard to the thickness of the insulating plaster panel usable according to the invention, this can vary over a wide range. Particularly good results are also obtained within the scope of the present invention if the insulating plaster panel has a thickness in the range of 1 to 5 cm, more preferably 2 to 4 cm.

For further details of the insulating plaster panel, reference can be made to the preceding embodiments, which apply accordingly in relation to the insulating plaster panel.

Further advantages, features, aspects and characteristics of the present invention will become apparent from the following description of a preferred embodiment according to the invention depicted in the drawings.

Whereby the figures show the following:

Fig. 1 shows the schematic structure of a usable thermal insulation panel 1 according to the invention.

Fig. 2 shows a schematic representation of a thermal insulation composite system 6 according to the invention, which is attached to a building wall 7;

Fig. 3 shows a schematic representation of a preferred thermal insulation composite system 6 according to the invention, which is attached to a building wall 7;

5 In particular, Figure 1 shows a preferred embodiment of the used thermal insulation panel 1. The thermal insulation panel 1 has a base plate, which is formed from the narrow sides 2 of the thermal insulation panel and an internal structure 3. The internal structure 3 forms hexagonal, particularly alveolar cavities 4, which extend homogeneously over the entire thickness of the thermal insulation panel 1 and contain an aerogel. The main surfaces or broad surfaces of the  
10 thermal insulation panel 1 are covered with a surface structure 5, particularly with a fibreglass fabric having a mesh width of 2 x 2 mm, particularly the broad surfaces of the thermal insulation panel 1 are covered with a surface structure. The fibreglass fabric serves on one hand as a trickle guard against unintended falling of the aerogel from the gaps 4 of the thermal insulation panel 1 and on the other hand as an anchor or reinforcement of plaster layers, wherein the  
15 plaster does not penetrate into the interior of the panel, at least not substantially into the interior of the panel.

Fig. 2 shows the thermal insulation composite system 6 according to the invention, which is attached to a house wall 7. The thermal insulation composite system 6 according to the invention consists of the thermal insulation panel 1 and an insulating plaster system 8 being  
20 attached to the exterior of this, wherein the insulating plaster system 8 has a multi-layered structure. At the same time, it is possible that the insulating plaster system 8 exists in the form of an insulating plaster panel and is for example screwed together with the thermal insulation panel. The thermal insulation composite system 6 is attached to the house wall 7 by means of a 2-component adhesive 9 and is designed to be both open to diffusion and impervious to driving  
25 rain.

Fig. 3 shows particularly a schematic representation of a preferred thermal insulation composite system 6 according to the invention, which consists of a thermal insulation panel 1 and a preferred insulating plaster system 8 according to the invention. The thermal insulation panel 1 is attached to the house wall 7 by means of a 2-component adhesive 9. The preferred insulating  
30 plaster system 8 according to the invention is applied directly onto the thermal insulation panel 1 in the direction of the principal insulation direction, i.e. onto the main surface or broad surface of the thermal insulation panel 1, wherein the at least one aerogel-containing insulating plaster layer 10 directly adjoins the insulating plaster panel 1. The insulating plaster system 8 according to the invention has at least one surface coating 11 along with the one aerogel-containing  
35 insulating plaster layer 10, said surface coating being impervious to driving rain and open to diffusion. Between the surface coating 11 and the insulating plaster layer 10, a primer coat 12 is provided, which provides a good adhesion between the surface coating 11 and the underlying layers of the insulating plaster system 8. Between the primer coat 12 and the insulating plaster

layer 10, a additional insulating plaster layer 13 containing no aerogels is arranged and between the insulating plaster layers 10 and 13, there is a supporting layer 14, which preferably consists of a fibreglass fabric with a mesh width of 13 x 13 mm. The thermal insulation composite system 6 according to the invention is designed to be open to diffusion and impervious to driving rain.

## 5 **Exemplified embodiments**

### **1. Production of a thermal insulation panel**

A panel-shaped 1 m x 0.5 m wooden construction with an alveolar internal construction, which has an alveolus width of 2 x 2 cm, is sealed on one side by means of a fibreglass fabric with a mesh with of 2 x 2 mm using adhesion. The alveoli of the internal construction are filled with a  
10 coarse-grained aerogel with particle sizes in the range of 3 to 5 mm and the second surface of the base construction is also sealed by means of adhesion with a fibreglass fabric with an alveolus width of 2 x 2 mm. The thickness of the thermal insulation panel is 5 cm.

### **2. Production of a thermal insulation composite system**

#### **2.1. Production of an aerogel-containing thermal insulating plaster**

##### 15 A) Production of the aerogel

The aerogel used for manufacturing an aerogel-containing insulating plaster is produced in a multi-stage method, comprising the following procedural steps:

##### 1. Production of the hydrosol

A commercial sodium-silicate solution is diluted with deionised water and then guided through a  
20 strongly acidic cation exchanger resin on the basis of sulfonated and divinyl benzene-crosslinked polystyrene. A hydrosol is obtained as a reaction product, in which the sodium ions of the silicate are almost completely replaced by protons. The completeness of the ion exchange reaction is checked by means of a conductivity measurement.

##### 2. Production of a hydrogel

The hydrosol obtained in procedural step 1 is heated to 50°C and displaced with N, N-Dimethylformamide with continuous stirring. To accelerate the applicable condensation reaction, molar aqueous ammonia solution is added to the mixture 6, until the solution reaches a weakly  
25 acidic pH value in the range of 4.2 to 4.9. The hydrosol is aged for several hours at a constant temperature to form the gel. Then the arising hydrogel is reduced to particle sizes in the range of 0.5 to 1 cm by adding deionised water at a consistent temperature and while stirring. The  
30 mixture containing the hydrogel is cooled to 35°C and aged again for several hours.

##### 3. Production of the alcogel

The hydrogel obtained in procedural step 3 is displaced with methanol until the volume ratios of water and methanol are about the same. Then the gel rests for several hours. Afterwards, a  
35 majority of the solvent is separated from the reaction mixture by means of filtration. The remaining residue is then displaced with methanol again. A slow solvent replacement takes place, during which water is replaced by methanol. The separation of the solvent mixture and the addition of methanol are repeated as necessary. An alcogel is developed, which matures at

a constant temperature for several hours.

The separated solvent mixture is transferred into a distillation apparatus and separated by means of distillation.

#### 4. Surface modification

- 5 The alcogel obtained in procedural step 3 is displaced with a mixture of hexamethyldisilazane and n-hexane at a constant temperature by means of stirring, wherein nitric acid is used as the catalyst. After 20 hours of reaction time, the surface reaction is largely complete.

#### 5. Solvent replacement

- 10 The reaction mixture obtained in procedural step 4 is separated from a majority of the solvent by means of filtration and the remaining residue is displaced with n-hexane. The step is repeated several times as necessary. In this way, the methanol is largely replaced by n-hexane.

The separated solvent mixture is transferred into a distillation apparatus and separated by means of distillation.

#### 6. Drying

- 15 The remaining solvent – mainly n-hexane – is removed by means of distillation and the alcogel granulate that is still moistened with solvent residue is dried for several hours from the reaction vessel and in a vacuum at 50°C while carefully stirring and agitating.

In this way, a silica aerogel with the following properties is obtained:

Particle size: 0.5 to 5 mm,

- 20 Density: 0.18 to 0.20 g/cm<sup>3</sup>,

Contact angle: 110 to 150°,

Thermal conductivity: 0.024 to 0.026 W/(mK),

Pore diameter: 100 to 300 nm,

Light transmittance: None.

- 25 The obtained aerogel is divided into the designed size fractions by means of sieving.

#### B) Production of the insulating plaster

A plaster mortar consisting of

Hydraulic lime (21 parts by weight),

White cement (3 parts by weight),

- 30 Perlite (55 parts by weight),

Aerogel, produced as previously described, with particle sizes in the range of 0.5 to 3 mm (20 parts by weight) and

Additives (1 part by weight)

with a bulk density of 250 kg/m<sup>3</sup> is made into an insulating plaster by mixing with water.

- 35 50 litres of the plaster mortar are mixed with 15 litres of water, wherein 40 litres of fresh mortar are obtained.

The aerogel-containing thermal insulating plaster has a thermal conductivity of 0.034 W/(mK).

The water absorption coefficient  $w$  is 1.24 kg/(m<sup>2</sup> • h<sup>0.5</sup>), i.e. the plaster is water-repellent.



## 2.2. Structure and attachment of the thermal insulation composite system

In total 9 of the thermal insulation panels produced according to 1.) are attached in an arrangement of 3 x 3 thermal insulation panels, i.e. three thermal insulation panels above each other and three thermal insulation panels next to each other, on a wall by means of a 2-component polyurethane adhesive. Punctiform application of the adhesion occurs. Then a 2 cm thick layer of the one aerogel-containing insulating plaster as produced in 2.1. is applied and then provided with a fibreglass reinforcement from a fibreglass fabric with a mesh width of 10 x 10 mm. After drying the thermal insulating plaster layer, a further thermal insulating plaster layer containing no aerogel is applied, with a layer thickness of 0.5 cm. This further thermal insulating plaster is a purely mineral plaster based on perlite, which is obtained from a plaster mortar, containing 50 to 80 vol% perlite, 10 to 30 vol% limestone, 3 to 5 vol% cement and 0.1 vol% cellulose by means of mixing with water.

After drying the further thermal insulating plaster layer, the surface of the thermal insulation composite system is provided with a primer. Then a surface coating based on acrylate is applied in the form of an aqueous acrylate dispersion with a dry layer thickness of 200 to 300 µm. The surface coating is water-repellent and impervious to driving rain as well as open to diffusion.

### List of reference signs:

- 1 Thermal insulation panel
- 2 Narrow edges of the thermal insulation panel
- 3 Internal structure of the thermal insulation panel
- 4 Gaps
- 5 Surface structure
- 6 Thermal insulation composite system
- 7 Building wall
- 8 Insulating plaster system
- 9 Adhesive
- 10 Insulating plaster layer, containing one aerogel
- 11 Surface coating
- 12 Primer coat
- 13 Additional insulating plaster layer
- 14 Support layer

## VARMEISOLERINGSPLADE

**Patentkrav:**

1. Varmeisoleringskompositsystem (6), der indeholder en varmeisoleringsplade (1) og et isoleringspudssystem (8), hvor først varmeisoleringspladen (1) og derefter isoleringspudssystemet (8) er placeret på en overflade (7), der skal isoleres,
- 5 hvor varmeisoleringskompositsystemet (6) har en tykkelse på 4 til 12 cm, idet varmeisoleringskompositsystemet (6) har en varmeledningsevne inden for et område på 0,017 til 0,040 W/(mK),
- hvor varmeisoleringspladen (1) indeholder i det mindste en aerogel og er diffusionsåben langs sin hovedisoleringsretning,
- 10 idet varmeisoleringspladen (1) har en tykkelse på 1 til 8 cm,
- hvor isoleringspudssystemet (8) har en tykkelse på 1 til 5 cm, idet isoleringspudssystemet (8) har et isoleringspudslag (10), der indeholder en aerogel, og i det mindste et yderligere isoleringspudslag (13), der ikke indeholder aerogel, idet isoleringspudslaget (10), der indeholder en aerogel, har en lagtykkelse inden for et område på 1,5 til 3 cm, og idet det yderligere isoleringspudslag (13), der ikke indeholder aerogel, har en lagtykkelse inden for et område på 0,2 til 1,5 cm, **kendetegnet ved, at** aerogelen er placeret i en løs fyldning i varmeisoleringspladen (1), og **at** isoleringspudslaget (10), der indeholder aerogel, indeholder et kalkbaseret bindemiddel og et cementbaseret bindemiddel.
- 15 2. Varmeisoleringskompositsystem (6) ifølge krav 1, kendetegnet ved, at isoleringspudssystemet (8) har en tykkelse på 1,5 til 4 cm, fortrinsvis 2 til 3 cm.
3. Varmeisoleringskompositsystem (6) ifølge krav 1 eller 2, kendetegnet ved følgende lagopbygning:
- varmeisoleringsplade (1),
- 25 isoleringspudslag (10), der indeholder mindst en aerogel,
- bærelag (14),
- yderligere isoleringspudslag (13),
- grundingslag (12) og
- overfladebelægning (11).

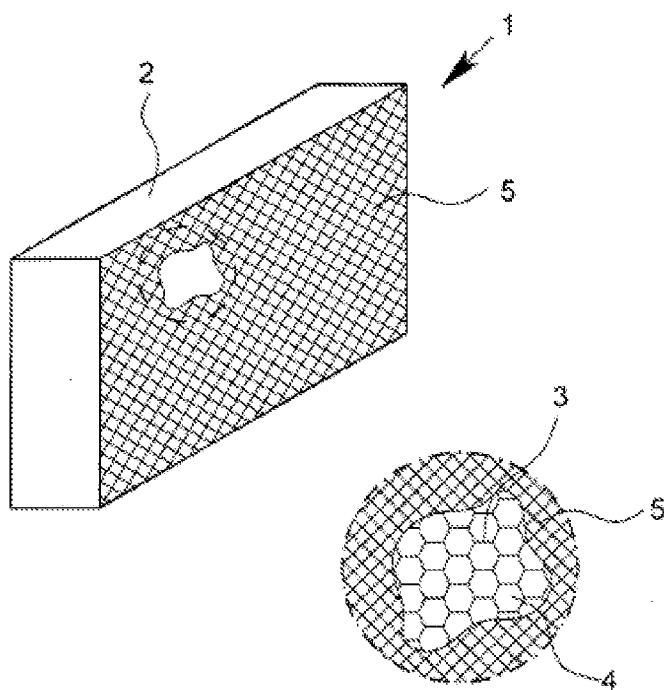


Fig. 1

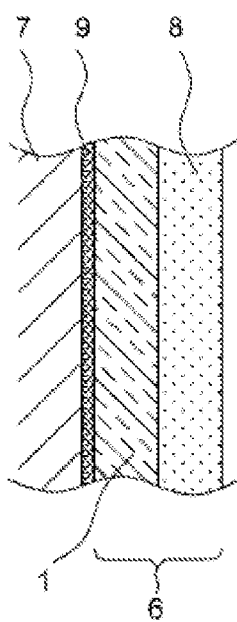


Fig. 2

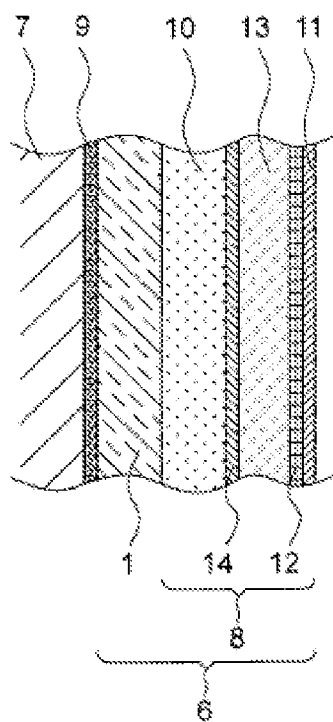


Fig. 3