



(51) International Patent Classification:

B01J 31/18 (2006.01) *B01J 31/14* (2006.01)

(21) International Application Number:

PCT/US2017/033137

(22) International Filing Date:

17 May 2017 (17.05.2017)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

15/165,267 26 May 2016 (26.05.2016) US

(71) Applicant: **CHEVRON PHILLIPS CHEMICAL COMPANY LP** [US/US]; 10001 Six Pines Drive, The Woodlands, Texas 77380 (US).

(72) Inventors: **KILGORE, Uriah**; 4006 Wildwood Valley Ct, Kingwood, Texas 77345 (US). **HUTCHISON, Steven**; 25318 Fairbrook Ln, Spring, Texas 77373 (US). **SYDORA, Orson**; 2518 Oakdale Street, Houston, Texas 77004 (US). **BISCHOF, Steven**; 20719 Delta Wood Tr., Humble, Texas

77346 (US). **FERN, Jared**; 2507 Laurel Ridge Dr., Kingwood, Texas 77345 (US). **MCDANIEL, Max**; 1601 Melmart Drive, Bartlesville, Oklahoma 74006 (US).


(74) Agent: **JOLLY, Lynda**; Chevron Phillips Chemical Company LP, 10001 Six Pines Drive, The Woodlands, Texas 77380 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,

(54) Title: ETHYLENE OLIGOMERIZATION CATALYST SYSTEMS USING CHEMICALLY-TREATED SOLID OXIDES

FIG. 1

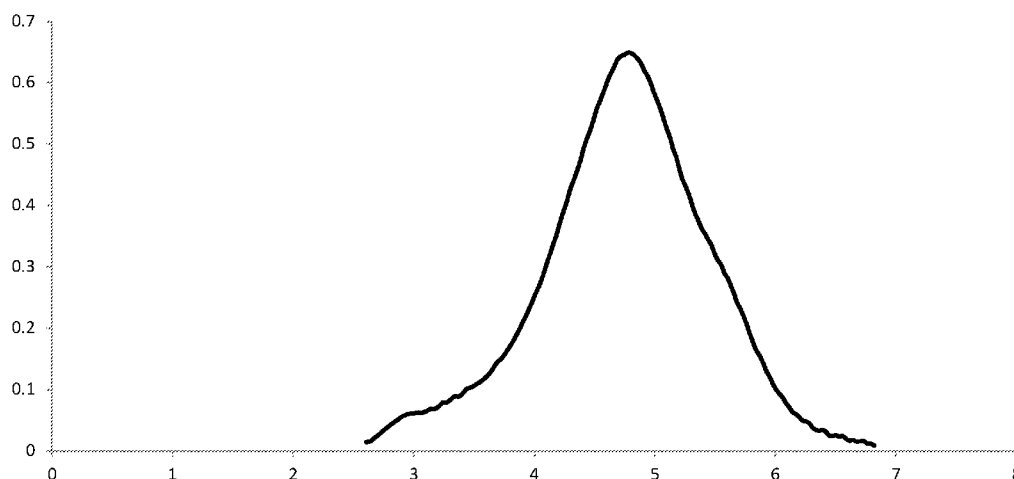

(57) Abstract: Disclosed herein are catalyst compositions containing a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound. These catalyst compositions can be used in an ethylene oligomerization process to produce a liquid oligomer product containing hexene and octene, as well as a solid polymer product with a molecular weight sufficiently high to permit easy separation of the liquid oligomer product from the solid polymer product.

UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

ETHYLENE OLIGOMERIZATION CATALYST SYSTEMS USING CHEMICALLY-TREATED SOLID OXIDES

5 BACKGROUND OF THE INVENTION

The oligomerization of ethylene to produce hexenes and/or octenes in a homogeneous process often can produce a by-product stream containing an ethylene-based polymer. In some circumstances, the polymer produced can cause reactor fouling, and associated costs, clean-up, and downtime. It would be beneficial to produce hexenes and/or octenes from ethylene using a process that is less
10 susceptible to reactor fouling and its related drawbacks. Accordingly, it is to these ends that the present invention is directed.

SUMMARY OF THE INVENTION

This summary is provided to introduce a selection of concepts in a simplified form that are
15 further described below in the detailed description. This summary is not intended to identify required or essential features of the claimed subject matter. Nor is this summary intended to be used to limit the scope of the claimed subject matter.

Catalyst systems containing a chemically-treated solid oxide are disclosed and described herein. Such catalyst systems can comprise a heteroatomic ligand transition metal compound
20 complex, a chemically-treated solid oxide, and an organoaluminum compound. Illustrative and non-limiting examples of heteroatomic ligand transition metal compound complexes can include diphosphino amine transition metal compound complexes, N²-phosphinyl amidine transition metal compound complexes, N²-phosphinyl formamidine transition metal compound complexes, and N²-phosphinyl guanidine transition metal compound complexes. Methods for preparing these catalyst
25 systems also are provided herein, and some of these methods can result in unexpected increases in catalyst system activity and productivity.

Embodiments of this invention also are directed to oligomerization processes, and these processes can comprise contacting ethylene, any of the catalyst systems disclosed herein, and an optional organic reaction medium, and forming an oligomer product. The oligomer product can
30 contain a liquid oligomer product and a solid polymer product, and beneficially, the oligomerization processes can be performed without reactor fouling and its related drawbacks.

Both the foregoing summary and the following detailed description provide examples and are explanatory only. Accordingly, the foregoing summary and the following detailed description should not be considered to be restrictive. Further, features or variations may be provided in addition to
35 those set forth herein. For example, certain aspects and embodiments may be directed to various feature combinations and sub-combinations described in the detailed description.

BRIEF DESCRIPTION OF THE FIGURES

The accompanying drawings, which are incorporated in and constitute a part of this disclosure, illustrate various embodiments of the present invention. In the drawings:

FIG. 1 presents a plot of the molecular weight distribution of the polymer product of Example 10, representative of polymer products produced using a catalyst system containing heteroatomic ligand transition metal compound complex A, a chemically-treated solid oxide, and an organoaluminum compound.

FIG. 2 presents a plot of the molecular weight distribution of the polymer product of Example 37, representative of polymer products produced using a catalyst system containing heteroatomic ligand transition metal compound complex B, a chemically-treated solid oxide, and an organoaluminum compound.

FIG. 3 presents a plot of the molecular weight distribution of a polymer product representative of polymer products produced using a homogeneous catalyst system containing a N²-phosphinyl amidine transition metal compound complex and MMAO-3A modified methylaluminoxane.

DEFINITIONS

To define more clearly the terms used herein, the following definitions are provided. Unless otherwise indicated, the following definitions are applicable to this disclosure. If a term is used in this disclosure but is not specifically defined herein, the definition from the IUPAC Compendium of Chemical Terminology, 2nd Ed (1997), can be applied, as long as that definition does not conflict with any other disclosure or definition applied herein, or render indefinite or non-enabled any claim to which that definition is applied. To the extent that any definition or usage provided by any document incorporated herein by reference conflicts with the definition or usage provided herein, the definition or usage provided herein controls.

Herein, features of the subject matter can be described such that, within particular aspects and/or embodiments, a combination of different features can be envisioned. For each and every aspect, and/or embodiment, and/or feature disclosed herein, all combinations that do not detrimentally affect the designs, compositions, processes, and/or methods described herein are contemplated with or without explicit description of the particular combination. Additionally, unless explicitly recited otherwise, any aspect, and/or embodiment, and/or feature disclosed herein can be combined to describe inventive processes and compositions consistent with the present disclosure.

Regarding claim transitional terms or phrases, the transitional term “comprising,” which is synonymous with “including,” “containing,” “having,” or “characterized by,” is open-ended and does not exclude additional, unrecited elements or method steps. The transitional phrase “consisting of” excludes any element, step, or ingredient not specified in the claim. The transitional phrase “consisting essentially of” limits the scope of a claim to the specified materials or steps and those that

do not materially affect the basic and novel characteristics of the claimed invention. A “consisting essentially of” claim occupies a middle ground between closed claims that are written in a “consisting of” format and fully open claims that are drafted in a “comprising” format. Absent an indication to the contrary, describing a composition or method as “consisting essentially of” is not to be construed as “comprising,” but is intended to describe the recited element that includes materials or steps which do not significantly alter the composition or method to which the term is applied. For example, an olefin feedstock consisting essentially of a material A can include impurities typically present in a commercially produced or commercially available sample of the recited compound or composition. When a claim includes different features and/or feature classes (for example, a method step, olefin feedstock features, and/or product features, among other possibilities), the transitional terms comprising, consisting essentially of, and consisting of apply only to the feature class to which it is utilized, and it is possible to have different transitional terms or phrases utilized with different features within a claim. For example, a method can comprise several recited steps (and other non-recited steps), but utilize an olefin feedstock consisting of specific components; alternatively, consisting essentially of specific components; or alternatively, comprising the specific components and other non-recited components. While compositions and methods are described in terms of “comprising” various components or steps, the compositions and methods can also “consist essentially of” or “consist of” the various components or steps, unless specifically stated otherwise. For example, a catalyst system consistent with certain embodiments of the present invention can comprise; alternatively, consist essentially of; or alternatively, consist of; a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound.

The terms “a,” “an,” and “the” are intended to include plural alternatives, e.g., at least one, unless otherwise specified. For instance, the disclosure of “an electron-withdrawing anion” is meant to encompass one, or combinations of more than one, electron-withdrawing anion (e.g., sulfate, chloride, fluoride, etc.), unless otherwise specified.

Generally, groups of elements are indicated using the numbering scheme indicated in the version of the periodic table of elements published in *Chemical and Engineering News*, 63(5), 27, 1985. In some instances, a group of elements can be indicated using a common name assigned to the group; for example, alkali metals for Group 1 elements, alkaline earth metals for Group 2 elements, transition metals for Group 3-12 elements, and halogens or halides for Group 17 elements.

For any particular compound or group disclosed herein, any name or structure presented is intended to encompass all conformational isomers, regioisomers, stereoisomers, and mixtures thereof that can arise from a particular set of substituents, unless otherwise specified. The name or structure also encompasses all enantiomers, diastereomers, and other optical isomers (if there are any), whether in enantiomeric or racemic forms, as well as mixtures of stereoisomers, as would be recognized by a skilled artisan, unless otherwise specified. For example, a general reference to hexene (or hexenes) includes all linear or branched, acyclic or cyclic, hydrocarbon compounds having six carbon atoms

and 1 carbon-carbon double bond; a general reference to pentane includes n-pentane, 2-methylbutane, and 2,2-dimethylpropane; and a general reference to a butyl group includes an n-butyl group, a sec-butyl group, an iso-butyl group, and a t-butyl group.

Within this disclosure, the normal rules of organic nomenclature prevail. For instance, when referencing substituted compounds or groups, references to substitution patterns are taken to indicate that the indicated group(s) is (are) located at the indicated position and that all other non-indicated positions are hydrogen. For example, reference to a 4-substituted phenyl group indicates that there is a non-hydrogen substituent located at the 4-position and hydrogens located at the 2, 3, 5, and 6 positions. References to compounds or groups having substitutions at positions in addition to the indicated position can be referenced using comprising or some other alternative language. For example, a reference to a phenyl group comprising a substituent at the 4-position refers to a group having a non-hydrogen substituent at the 4-position and hydrogen or any non-hydrogen substituent at the 2, 3, 5, and 6 positions.

The terms “contact product,” “contacting,” and the like, are used herein to describe compositions and methods wherein the components are contacted together in any order, in any manner, and for any length of time, unless otherwise specified. For example, the components can be contacted by blending or mixing. Further, unless otherwise specified, the contacting of any component can occur in the presence or absence of any other component of the compositions and methods described herein. Combining additional materials or components can be done by any suitable method. Further, the term “contact product” includes mixtures, blends, solutions, slurries, reaction products, and the like, or combinations thereof. Although “contact product” can, and often does, include reaction products, it is not required for the respective components to react with one another. Similarly, the term “contacting” is used herein to refer to materials which can be blended, mixed, slurried, dissolved, reacted, treated, or otherwise contacted in some other manner. Hence, “contacting” two or more components can result in a mixture, a reaction product, a reaction mixture, etc.

The terms “catalyst composition,” “catalyst mixture,” “catalyst system,” and the like, do not depend upon the actual product or composition resulting from the contact or reaction of the initial components of the disclosed or claimed catalyst composition/mixture/system, the nature of the active catalytic site, or the fate of the organoaluminum compound, the heteroatomic ligand transition metal compound complex, or the chemically-treated solid oxide, after combining these components. Therefore, the terms “catalyst composition,” “catalyst mixture,” “catalyst system,” and the like, encompass the initial starting components of the composition, as well as whatever product(s) may result from contacting these initial starting components. The terms “catalyst composition,” “catalyst mixture,” “catalyst system,” and the like, may be used interchangeably throughout this disclosure.

The term “hydrocarbon” whenever used in this specification and claims refers to a compound containing only carbon and hydrogen. The term “olefin” as used herein refers to a hydrocarbon that has

at least one carbon-carbon double bond that is not part of an aromatic ring or ring system. The term “olefin” includes aliphatic and aromatic, cyclic and acyclic, and/or linear and branched compounds having at least one carbon-carbon double bond that is not part of an aromatic ring or ring system, unless specifically stated otherwise. Olefins having only one, only two, only three, etc., carbon-carbon double bonds can be identified by use of the term “mono,” “di,” “tri,” etc., within the name of the olefin. The olefins can be further identified by the position of the carbon-carbon double bond(s). The term “alpha olefin” as used herein refers to any olefin that has a double bond between the first and second carbon atom of a contiguous chain of carbon atoms. The term “alpha olefin” includes linear and branched alpha olefins and alpha olefins which have more than one non-aromatic carbon-carbon double bond, unless expressly stated otherwise. The term “normal alpha olefin” as used herein refers to a linear aliphatic hydrocarbon mono-olefin having a double bond between the first and second carbon atom.

An “aromatic compound” refers to a compound containing a cyclically conjugated moiety that follows the Hückel ($4n+2$) rule and containing ($4n+2$) pi-electrons, where n is an integer from 1 to about 5. Aromatic compounds can be monocyclic or polycyclic, unless otherwise specified. Non-limiting examples of aromatic compounds include benzene, naphthalene, and toluene, among others.

The term oligomer refers to a product that contains from 2 to 20 monomer units. The terms “oligomerization product” and “oligomer product” include all products made by the “oligomerization” process, including the “oligomers” and products which are not “oligomers” (e.g., products which contain more than 20 monomer units, or solid polymer).

The term “oligomerization,” and its derivatives, refers to processes which produce an oligomer product comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % products comprising from 2 to 20 monomer units. In an example, an “oligomerization” process using ethylene as the monomer produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % oligomers having from 4 to 40 carbon atoms.

The term “trimerization,” and its derivatives, refers to a process which produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % products comprising three and only three monomer units. A “trimer” is a product which comprises three and only three monomer units. A “trimerization product” includes all products made by the trimerization process including trimer and product(s) which are not trimer (e.g., dimers or tetramers, solid polymer). In an example, a “trimerization” process using ethylene as the monomer produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % hexenes.

The term “tetramerization,” and its derivatives, refers to a process which produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % products comprising four and only four monomer units. A “tetramer” is a product which comprises four and only four monomer units. A “tetramerization product” includes all products made by the tetramerization process including tetramer and product(s) which are not tetramer (e.g., dimers or trimers, solid polymer). In

an example, a “tetramerization” process using ethylene as the monomer produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % octenes.

The term “trimerization and tetramerization,” and its derivatives, refers to a process which produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % products comprising three and/or four and only three and/or four monomer units. A “trimerization and tetramerization product” includes all products made by the “trimerization and tetramerization” process including trimer, tetramer, and product(s) which are not trimer and tetramer (e.g., dimers, solid polymer). In an example, a “trimerization and tetramerization” process using ethylene as the monomer produces a mixture of products comprising at least 20 wt. %, 35 wt. %, 50 wt. %, or 60 wt. % hexenes and octenes.

Catalyst system productivity is defined as kilograms of a product per gram of transition metal of the heteroatomic ligand transition metal compound complex utilized in the catalyst system. Catalyst system productivity can be stated in terms of various products. For example, in an ethylene oligomerization process utilizing a catalyst system comprising a heteroatomic ligand chromium compound complex, the catalyst system productivities that can be utilized can include (kg oligomer product)/(g Cr), (kg C₆ product)/(g Cr), (kg (C₆ + C₈) product)/(g Cr), and (kg polymer)/(g Cr), among other productivities.

Although any methods and materials similar or equivalent to those described herein can be used in the practice or testing of the invention, the typical methods and materials are herein described.

All publications and patents mentioned herein are incorporated herein by reference for the purpose of describing and disclosing, for example, the constructs and methodologies that are described in the publications, which might be used in connection with the presently described invention.

DETAILED DESCRIPTION OF THE INVENTION

The present invention is directed generally to new catalyst systems, methods for preparing the catalyst systems, methods for using the catalyst systems to oligomerize olefins, and the liquid oligomer and solid polymer products produced using such catalyst systems. In particular, the present invention relates to catalyst systems containing a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound, and to oligomerization process utilizing these catalyst systems.

As disclosed herein, the heterogeneous catalyst systems and processes of this invention can provide distinct advantages over homogeneous catalyst systems and processes in the ease of separation (e.g., solid-liquid separation techniques) of the liquid oligomer product from solid polymer product and/or from the (solid) components of the catalyst system. Moreover, and while not wishing to be bound by the following theory, it is believed that the processes of this invention can reduce or possibly eliminate reactor fouling. It is further believed, while not wishing to be bound by the

following theory, that the processes of this invention produce a solid polymer having sufficiently high molecular weight to reduce its adherence to reactor walls and other surfaces. It is also believed, while not wishing to be bound by the following theory, that the production of a solid polymer having a higher molecular weight, and the reduction of the polymer's adherence to reactor walls and other surfaces, can reduce or possibly eliminate reactor fouling. Further, and while not wishing to be bound by the following theory, it is believed that another beneficial aspect of this invention is that the solid polymer product can be insoluble in the organic reaction medium used in the oligomerization process. Additionally, and while not wishing to be bound by the following theory, it is believed that another beneficial aspect of this invention is that at least a portion of the solid polymer product can comprise solid particles of the chemically-treated solid oxide component of the catalyst system. Each of factors, either individually or in any combination, can lead to the reduction or possible elimination of reactor fouling and/or the ease of separation and recovery of the liquid oligomer product.

CATALYST SYSTEMS

Embodiments of this invention are directed to a catalyst system comprising a) a heteroatomic ligand transition metal compound complex, b) a chemically-treated solid oxide, and c) an organoaluminum compound. Generally, the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, and the organoaluminum compound are independent elements of the catalyst system and are described independently herein. The independent descriptions of the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, and the organoaluminum compound can be utilized without limitation, and in any combination, to further describe any catalyst system comprising a) a heteroatomic ligand transition metal compound complex, b) a chemically-treated solid oxide, and c) an organoaluminum compound.

Heteroatomic Ligand Transition Metal Compound Complexes

Generally, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein is composed of a heteroatomic ligand and a transition metal compound. The heteroatomic ligand and the transition metal compound are independent elements of the heteroatomic ligand transition metal compound complex and are independently described herein. The independent descriptions of the heteroatomic ligand and the transition metal compound can be utilized without limitation, and in any combination, to further describe the heteroatomic ligand transition metal compound complex of the catalyst systems described herein.

In an embodiment, the heteroatomic ligand can comprise, can consist essentially of, or can be, a diphosphino amine, an N²-phosphinyl amidine, an N²-phosphinyl formamidine, an N²-phosphinyl guanidine, or any combination thereof. In some embodiments, the heteroatomic ligand can comprise, can consist essentially of, or can be, a diphosphino amine; alternatively, an N²-phosphinyl amidine, an N²-phosphinyl formamidine, an N²-phosphinyl guanidine, or any combination thereof; alternatively,

an N²-phosphinyl amidine; alternatively, an N²-phosphinyl formamidine; or alternatively, an N²-phosphinyl guanidine. Consequently, in some embodiments, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, a diphosphino amine transition metal compound complex, an N²-phosphinyl amidine transition metal compound complex, an N²-phosphinyl formamidine transition metal compound complex, an N²-phosphinyl guanidine transition metal compound complex, or any combination thereof; alternatively, a diphosphino amine transition metal compound complex; alternatively, an N²-phosphinyl amidine transition metal compound complex, an N²-phosphinyl formamidine transition metal compound complex, an N²-phosphinyl guanidine transition metal compound complex, or any combination thereof; alternatively, an N²-phosphinyl amidine transition metal compound complex; alternatively, an N²-phosphinyl formamidine transition metal compound complex; or alternatively, an N²-phosphinyl guanidine transition metal compound complex.

Transition Metal Compounds

Generally, the transition metal compound of the heteroatomic ligand transition metal compound complex has the formula MX_p, where M represents the transition metal, X represents a monoanionic ligand, and p represent the number of monoatomic ligands (and the oxidation state of the transition metal, M). The transition metal (M), the monoanionic ligand (X), and p are independent elements of the transition metal compound and are independently described herein. The independent descriptions of the transition metal (M), the monoanionic ligand (X), and p can be utilized without limitation, and in any combination, to further describe the transition metal compound of the heteroatomic ligand transition metal compound complex.

Generally, the transition metal of the heteroatomic ligand transition metal compound complex can comprise, can consist essentially of, or can be, any transition metal. In an embodiment, the transition metal of the heteroatomic ligand transition metal compound complex can consist essentially of, or can be, a Group 5-10 transition metal; alternatively, a Group 6-10 transition metal; alternatively, a Group 6-9 transition metal; alternatively, a Group 6 transition metal; alternatively, a Group 8 transition metal; alternatively, a Group 9 transition metal; or alternatively, a Group 10 transition metal. In some embodiments, the transition metal compound can comprise vanadium, niobium, tantalum, chromium, molybdenum, tungsten, manganese, iron, cobalt, nickel, palladium, or platinum. In other embodiments, the transition metal compound can comprise chromium, molybdenum, tungsten, iron, cobalt, nickel, palladium, or platinum; alternatively, chromium, iron, cobalt, or nickel; or alternatively, iron or cobalt. In other embodiments, the transition metal compound can comprise chromium.

Generally, the transition metal of the transition metal compound (MX_p) can have any positive oxidation state available to the transition metal atom. In an embodiment, the transition metal can have an oxidation state of from +2 to +6; alternatively, from +2 to +4; or alternatively, from +2 to +3. In

some embodiments, the transition metal of the transition metal compound (MX_p) can have an oxidation state of +1; alternatively, +2; alternatively, +3; or alternatively, +4.

Each monoanionic ligand, X, of the transition metal compound independently can be any suitable monoanionic ligand or any monoanionic ligand disclosed herein. In an embodiment, the monoanionic ligand, X, can be a halide, a carboxylate, a β -diketonate, a hydrocarboxide, a nitrate, or a chlorate. In some embodiments, the monoanionic ligand, X, can be a halide, a carboxylate, a β -diketonate, or a hydrocarboxide. In any aspect or embodiment, the hydrocarboxide can be an alkoxide, an aryloxy, or an aralkoxide. Generally, hydrocarboxide (and subdivisions of hydrocarboxide) are the anion analogues of a hydrocarboxy group. In other embodiments, the monoanionic ligand, X, can be a halide, a carboxylate, a β -diketonate, or an alkoxide; or alternatively, a halide or a β -diketonate. In other embodiments, X can be a halide; alternatively, a carboxylate; alternatively, a β -diketonate; alternatively, a hydrocarboxide; alternatively, an alkoxide; or alternatively, an aryloxy. Generally, the number, p, of monoanions can equal the oxidation state of the metal atom. In an embodiment, the number, p, of monoanionic ligands, X, can be from 2 to 6; alternatively, from 2 to 4; alternatively, from 2 to 3; alternatively, 1; alternatively, 2; alternatively, 3; or alternatively, 4.

Generally, each halide monoanionic ligand, X, independently can be fluorine, chlorine, bromine, or iodine; or alternatively, chlorine, bromine, or iodine. In an embodiment, each halide monoanionic ligand, X, can be chlorine; alternatively, bromine; or alternatively, iodine.

Generally, the carboxylate can be a C_1 to C_{20} carboxylate, or alternatively, a C_1 to C_{10} carboxylate. In an embodiment, each carboxylate monoanionic ligand independently can be acetate, a propionate, a butyrate, a pentanoate, a hexanoate, a heptanoate, an octanoate, a nonanoate, a decanoate, an undecanoate, or a dodecanoate; or alternatively, a pentanoate, a hexanoate, a heptanoate, an octanoate, a nonanoate, a decanoate, an undecanoate, or a dodecanoate. In some embodiments, each carboxylate monoanionic ligand independently can be acetate, propionate, n-butyrate, valerate (n-pentanoate), neo-pentanoate, capronate (n-hexanoate), n-heptanoate, caprylate (n-octanoate), 2-ethylhexanoate, n-nonanoate, caprate (n-decanoate), n-undecanoate, or laurate (n-dodecanoate); alternatively, valerate (n-pentanoate), neo-pentanoate, capronate (n-hexanoate), n-heptanoate, caprylate (n-octanoate), 2-ethylhexanoate, n-nonanoate, caprate (n-decanoate), n-undecanoate, or laurate (n-dodecanoate); alternatively, capronate (n-hexanoate); alternatively, n-heptanoate; alternatively, caprylate (n-octanoate); or alternatively, 2-ethylhexanoate. In some embodiments, the carboxylate monoanionic ligand can be triflate (trifluoroacetate).

Generally, the β -diketonate can be any C_1 to C_{20} β -diketonate, or alternatively, any C_1 to C_{10} β -diketonate. In an embodiment, each β -diketonate independently can be acetylacetonate (i.e., 2,4-pentanedionate), hexafluoroacetylacetone (i.e., 1,1,1,5,5,5-hexafluoro-2,4-pentanedione), or benzoylacetonate; alternatively, acetylacetonate; alternatively, hexafluoroacetylacetone; or alternatively, benzoylacetonate.

Generally, the hydrocarboxide can be any C_1 to C_{20} hydrocarboxide, or alternatively, any C_1 to C_{10} hydrocarboxide. In an embodiment, each hydrocarboxide can be a C_1 to C_{20} alkoxide; alternatively, a C_1 to C_{10} alkoxide; alternatively, a C_6 to C_{20} aryloxide; or alternatively, a C_6 to C_{10} aryloxide. In an embodiment, each alkoxide monoanionic ligand independently can be methoxide, ethoxide, a propoxide, or a butoxide. In some embodiments, each alkoxide monoanionic ligand independently can be methoxide, ethoxide, isopropoxide, or tert-butoxide; alternatively, methoxide; alternatively, ethoxide; alternatively, iso-propoxide; or alternatively, tert-butoxide. In an aspect, the aryloxide can be phenoxide.

In a non-limiting aspect, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, a heteroatomic ligand chromium compound complex. In some particular non-limiting embodiments, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, a diphosphino amine chromium compound complex, an N^2 -phosphinyl amidine chromium compound complex, an N^2 -phosphinyl formamidine chromium compound complex, an N^2 -phosphinyl guanidine chromium compound complex, or any combination thereof; alternatively, a diphosphino amine chromium compound complex; alternatively, an N^2 -phosphinyl amidine chromium compound complex, an N^2 -phosphinyl formamidine chromium compound complex, an N^2 -phosphinyl guanidine chromium compound complex, or any combination thereof; alternatively, an N^2 -phosphinyl amidine chromium compound complex; alternatively, an N^2 -phosphinyl formamidine chromium compound complex; or alternatively, an N^2 -phosphinyl guanidine chromium compound complex.


In a non-limiting embodiment, the chromium compound of any heteroatomic ligand chromium compound complex described herein can comprise, can consist essentially of, or consist of, a chromium(II) halide, a chromium(III) halide, a chromium(II) carboxylate, a chromium(III) carboxylate, a chromium(II) β -diketonate, or a chromium(III) β -diketonate. In some non-limiting embodiments, the chromium compound of any heteroatomic ligand chromium compound complex described herein can comprise, can consist essentially of, or consist of, a chromium(II) halide, a chromium(II) carboxylate, or a chromium(II) β -diketonate; or alternatively, a chromium(III) halide, a chromium(III) carboxylate, or a chromium(III) β -diketonate. In other non-limiting embodiments, the chromium compound of any heteroatomic ligand chromium compound complex described herein can comprise, can consist essentially of, or consist of, a chromium(II) halide; alternatively, a chromium(III) halide; alternatively, a chromium (II) carboxylate; alternatively, a chromium(III) carboxylate; alternatively, a chromium(II) β -diketonate; or alternatively, a chromium(III) β -diketonate.

In a non-limiting embodiment, the chromium compound of any heteroatomic ligand chromium compound complex described herein can comprise, can consist essentially of, or consist of, chromium(II) chloride, chromium(III) chloride, chromium(II) fluoride, chromium(III) fluoride,


chromium(II) bromide, chromium(III) bromide, chromium(II) iodide, chromium(III) iodide, chromium(II) acetate, chromium(III) acetate, chromium(II) 2-ethylhexanoate, chromium(III) 2-ethylhexanoate, chromium(II) triflate, chromium(III) triflate, chromium(II) nitrate, chromium(III) nitrate, chromium(II) acetylacetonate, chromium(III) acetylacetonate, chromium(II) hexafluoroacetylacetonate, chromium(III) hexafluoroacetylacetonate, chromium(III) benzoylacetonate, or chromium(III) benzoylacetonate. In some non-limiting embodiments, the chromium compound of any heteroatomic ligand chromium compound complex described herein can comprise, can consist essentially of, or consist of, chromium(III) chloride, chromium(III) fluoride, chromium(III) bromide, chromium(III) iodide, chromium(III) chloride (THF) complex, chromium(III) acetate, chromium(III) 2-ethylhexanoate, chromium(III) triflate, chromium(III) nitrate, chromium(III) acetylacetonate, chromium(III) hexafluoroacetylacetonate, or chromium(III) benzoylacetonate. In further embodiments, the chromium compound can be chromium(III) chloride or chromium(III) acetylacetonate; alternatively, chromium(III) chloride; or alternatively, chromium(III) acetylacetonate.

15 *Diphosphino Amine Transition Metal Complexes*

In an aspect, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, a diphosphino amine transition metal compound complex having Structure PNPTMC1 or Structure PNPTMC2; alternatively, Structure PNPTMC1; or alternatively, Structure PNPTMC2.



Structure PNPTMC1



Structure PNPTMC2

In the diphosphino amine transition metal compound complex having Structure PNPTMC1 and Structure PNPTMC2, MX_p represents the transition metal compound of the diphosphino amine transition metal compound complex, while $[(R^{1s})(R^{2s})P]N(R^{5s})[P(R^{3s})(R^{4s})]$ and $[(R^{1s})(R^{2s})P][(R^{3s})(R^{4s})P]N(L^{1s})N[P(R^{1s})(R^{2s})P][P(R^{3s})(R^{4s})]$ represent the diphosphino amine of the diphosphino amine transition metal compound complex. Generally, the transition metal compound (MX_p) and each R^{1s} , R^{2s} , R^{3s} , R^{4s} , R^{5s} , and L^{1s} of the respective diphosphino amine of the diphosphino amine transition metal compound complex having Structure PNPTMC1 and Structure PNPTMC2 are independent elements of the diphosphino amine transition metal compound complex having Structure PNPTMC1 and Structure PNPTMC2 and are described independently herein. The independent descriptions of (MX_p), R^{1s} , R^{2s} , R^{3s} , R^{4s} , R^{5s} , and L^{1s} can be utilized without limitation, and in any combination, to further describe any the diphosphino amine transition metal compound complexes having Structure PNPTMC1 and/or Structure PNPTMC2.

Generally, each R^{1s} , R^{2s} , R^{3s} , and R^{4s} of the diposphino amine having Structure PNPTMC1 and/or Structure PNPTMC2 independently can be an organyl group; alternatively, an organyl group consisting of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, the organyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} ,
5 a C_1 to C_{10} , or a C_1 to C_5 organyl group. In an embodiment, the organyl group consisting of inert functional groups which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group consisting of inert functional groups. In an embodiment, the hydrocarbyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group. In further embodiments, R^{1s} and R^{2s} , and/or
10 R^{3s} and R^{4s} can be joined to form a ring or a ring system.

In an embodiment, each R^{1s} , R^{2s} , R^{3s} , and R^{4s} of Structure PNPTMC1 and/or Structure PNPTMC2 independently can be an alkyl group, a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, each R^{1s} , R^{2s} , R^{3s} , and R^{4s} of Structure PNPTMC1 and/or
15 Structure PNPTMC2 independently can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively, an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, each R^{1s} , R^{2s} , R^{3s} , and R^{4s} of Structure PNPTMC1 and/or Structure PNPTMC2 independently can be an alkyl group;
20 alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.

In any aspect or embodiment disclosed herein, each alkyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_1 to C_{20} , a C_1 to C_{10} , or a C_1 to C_5 alkyl group. In any aspect
25 or embodiment disclosed herein, each substituted alkyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_1 to C_{20} , a C_1 to C_{10} , or a C_1 to C_5 substituted alkyl group. In any aspect or embodiment disclosed herein, each cycloalkyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} cycloalkyl group. In any aspect or
embodiment disclosed herein, each substituted cycloalkyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} substituted cycloalkyl group. In
30 any aspect or embodiment disclosed herein, each aryl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} aryl group. In any aspect or embodiment disclosed herein, each substituted aryl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} substituted aryl group. In any aspect
35 or embodiment disclosed herein, each aralkyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a C_7 to C_{20} , a C_7 to C_{15} , or a C_7 to C_{10} aralkyl group. In any aspect or embodiment disclosed herein, each substituted aryl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and

R^{4s} independently can be a C₇ to C₂₀, a C₇ to C₁₅, or a C₇ to C₁₀ substituted aralkyl group. Each substituent of a substituted alkyl group (general or specific), a substituted cycloalkyl group (general or specific), a substituted aryl group (general or specific), and/or substituted aralkyl group (general or specific) can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarboxy groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe R^{1s}, R^{2s}, R^{3s}, and/or R^{4s}.

In an embodiment, one or more of R^{1s}, R^{2s}, R^{3s}, and R^{4s} can be a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group. In some embodiments, one or more of R^{1s}, R^{2s}, R^{3s}, and R^{4s} can be a methyl group, an ethyl group, an iso-propyl (2-propyl) group, a tert-butyl (2-methyl-2-propyl) group, or a neopentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, a n-propyl (1-propyl) group; alternatively, an iso-propyl (2-propyl) group; alternatively, a tert-butyl (2-methyl-2-propyl) group; or alternatively, a neopentyl (2,2-dimethyl-1-propyl) group. In some embodiments, the alkyl groups which can be utilized as R^{1s}, R^{2s}, R^{3s}, and R^{4s} can be substituted. Each substituent of a substituted alkyl group independently can be a halogen or a hydrocarboxy group; alternatively, a halogen; or alternatively, a hydrocarboxy group. Substituent halogens and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted alkyl group (general or specific) which can be utilized as R^{1s}, R^{2s}, R^{3s}, and/or R^{4s}.

In an embodiment, one or more of R^{1s}, R^{2s}, R^{3s}, and R^{4s} can be a cyclopentyl group, a substituted cyclopentyl group, a cyclohexyl group, or a substituted cyclohexyl group; alternatively, a cyclopentyl group or a substituted cyclopentyl group; or alternatively, a cyclohexyl group or a substituted cyclohexyl group; alternatively, a cyclopentyl group; alternatively, a substituted cyclopentyl group; alternatively, a cyclohexyl group; or alternatively, a substituted cyclohexyl group. In an embodiment, the substituted cycloalkyl group, which can be utilized for one of more of R^{1s}, R^{2s}, R^{3s}, and R^{4s}, can be a 2-substituted cyclohexyl group, a 2,6-disubstituted cyclohexyl group, a 2-substituted cyclopentyl group, or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group; or alternatively, a 2,6-disubstituted cyclopentyl group. In an embodiment, one or more substituents of a multi-substituted

cycloalkyl group utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} can be the same or different; alternatively, all the substituents of a multi-substituted cycloalkyl group can be the same; or alternatively, all the substituents of a multi-substituted cycloalkyl group can be different. Each substituent of a substituted cycloalkyl group (general or specific) having a specified number of ring carbon atoms independently
5 can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen, alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed
10 herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted cycloalkyl group (general or specific) which can be utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} .

In a non-limiting embodiment, any one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a cyclohexyl group, a 2-alkylcyclohexyl group, or a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl
15 group, a 2-alkylcyclopentyl group, or a 2,5-dialkylcyclopentyl group; alternatively, a cyclohexyl group; alternatively, a 2-alkylcyclohexyl group; alternatively, a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group; alternatively, a 2-alkylcyclopentyl group; or alternatively, a 2,5-dialkylcyclopentyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further
20 describe alkylcyclohexyl groups (general or specific), dialkylcyclohexyl groups (general or specific), alkylcyclopentyl groups (general or specific), and/or dialkylcyclopentyl groups (general or specific) which can be utilized as R^{1s} , R^{2s} , R^{3s} , and R^{4s} . Generally, the alkyl substituents of a disubstituted cyclohexyl or cyclopentyl group can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, any one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a
25 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, a 2-tert-butylcyclohexyl group, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In other non-limiting embodiments, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, or a 2-tert-butylcyclohexyl group; or
30 alternatively, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group.

In an embodiment, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group or a substituted phenyl group; alternatively, a phenyl group; or alternatively, a substituted phenyl group. In an embodiment, the substituted phenyl group which can be utilized for one or more of R^{1s} , R^{2s} , R^{3s} , and
35 R^{4s} , can be a 2-substituted phenyl group, a 3-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, a 3,5-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2-substituted phenyl group, a 4-substituted phenyl

group, a 2,4-disubstituted phenyl group, or a 2,6-disubstituted phenyl group; alternatively, a 3-substituted phenyl group or a 3,5-disubstituted phenyl group; alternatively, a 2-substituted phenyl group or a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group or a 2,6-disubstituted phenyl group; alternatively, a 2-substituted phenyl group; alternatively, a 3-substituted phenyl group; alternatively, a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group; alternatively, a 2,6-disubstituted phenyl group; alternatively, a 3,5-disubstituted phenyl group; or alternatively, a 2,4,6-trisubstituted phenyl group. In an embodiment, one or more substituents of a multi-substituted phenyl group utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} can be the same or different; alternatively, all the substituents can be the same; or alternatively, all the substituents can be different. Each substituent of a substituted phenyl group (general or specific) independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy group can be utilized without limitation to further describe a substituted phenyl group (general or specific) which can be utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} .

In a non-limiting embodiment, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group, a 2-alkylphenyl group, a 3-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, a 3,5-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group or a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 3-alkylphenyl group or a 3,5-dialkylphenyl group; alternatively, a 2-alkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 2-alkylphenyl group; alternatively, a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group; alternatively, a 2,6-dialkylphenyl group; or alternatively, a 2,4,6-trialkylphenyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe any alkyl substituted phenyl group which can be utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} . Generally, the alkyl substituents of dialkylphenyl groups (general or specific) or trialkylphenyl groups (general or specific) can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} independently can be a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, a 2-tert-butylphenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group, a

2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, or a 2-tert-butylphenyl group; or alternatively, a phenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group.

5 In a non-limiting embodiment, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group, a 2-alkoxyphenyl group, or a 4-alkoxyphenyl group. In some non-limiting embodiments, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, a 2-tert-butoxyphenyl group, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group; alternatively, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, or a 2-tert-butoxyphenyl group; or alternatively, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group.

10 In a non-limiting embodiment, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group, a 2-halophenyl group, a 4-halophenyl group, or a 2,6-dihalophenyl group. Generally, the halides of a dihalophenyl group can be the same, or alternatively, the halides can be different. In some embodiments, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a phenyl group, a 2-fluorophenyl group, a 4-fluorophenyl group, or a 2,6-difluorophenyl group.

15 In an embodiment, one or more of R^{1s} , R^{2s} , R^{3s} , and R^{4s} can be a benzyl group or a substituted benzyl group; alternatively, a benzyl group; or alternatively, a substituted benzyl group. Each substituent of a substituted benzyl group independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen, alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted benzyl group (general or specific) which can be utilized as R^{1s} , R^{2s} , R^{3s} , and/or R^{4s} .

20 Generally, R^{5s} of the diphosphino amine transition metal compound complex having Structure PNPTMC1 can be an organyl group; alternatively, an organyl group consisting of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, the organyl group which can be utilized as R^{5s} can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group. In an embodiment, the organyl group consisting of inert functional groups which can be utilized as R^{5s} can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group consisting of inert functional groups. In an embodiment, the hydrocarbyl group which can be utilized as R^{5s} can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group.

In an embodiment, R^{5s} of Structure PNPTMC1 can be an alkyl group, a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, R^{5s} of Structure PNPTMC1 can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively, an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, R^{5s} of Structure PNPTMC1 can be an alkyl group; alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.

In any aspect or embodiment disclosed herein, the alkyl group which can be utilized as R^{5s} can be a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ alkyl group. In any aspect or embodiment disclosed herein, the substituted alkyl group which can be utilized as R^{5s} can be a C₁ to C₃₀, a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ substituted alkyl group. In any aspect or embodiment disclosed herein, the cycloalkyl group which can be utilized as R^{5s} can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ cycloalkyl group. In any aspect or embodiment disclosed herein, the substituted cycloalkyl group which can be utilized as R^{5s} can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ substituted cycloalkyl group. In any aspect or embodiment disclosed herein, the aryl group which can be utilized as R^{5s} can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ aryl group. In any aspect or embodiment disclosed herein, the substituted aryl group which can be utilized as R^{5s} can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ substituted aryl group. In any aspect or embodiment disclosed herein, each aralkyl group which can be utilized as R^{5s} can be a C₇ to, a C₇ to C₁₅, or a C₇ to C₁₀ aralkyl group. In any aspect or embodiment disclosed herein, the substituted aryl group which can be utilized as R^{5s} can be a C₇ to C₂₀, a C₇ to, or a C₇ to C₁₀ substituted aralkyl group. Each substituent of a substituted alkyl group (general or specific), substituted cycloalkyl group (general or specific), substituted aryl group (general or specific), and/or substituted aralkyl group (general or specific) can be a halogen, hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxyl group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted R^{5s} group.

In an embodiment, R^{5s} can be a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group. In some embodiments, R^{5s} can be a methyl group, an ethyl group, an n-propyl (1-propyl) group, an isopropyl (2-propyl) group, an n-butyl (1-butyl) group, a *sec*-butyl (2-butyl) group, an isobutyl (2-methyl-1-propyl) group, a *tert*-butyl (2-

5 methyl-2-propyl) group, an n-pentyl (1-pentyl) group, a 2-pentyl group, a 3-pentyl group, a 2-methyl-1-butyl group, a *tert*-pentyl (2-methyl-2-butyl) group, a 3-methyl-1-butyl group, a 3-methyl-2-butyl group, or a neo-pentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group, an ethyl group, an iso-propyl (2-propyl) group, a *tert*-butyl (2-methyl-2-propyl) group, or a neopentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, a n-propyl (1-propyl) group; alternatively, an iso-propyl (2-propyl) group; alternatively, a *tert*-butyl (2-methyl-2-propyl) group; or alternatively, a neopentyl (2,2-dimethyl-1-propyl) group. In some embodiments, the alkyl groups which can be utilized as R^{5s} can be substituted. Each substituent of a substituted alkyl group independently can be a halogen or a hydrocarboxy group; alternatively, a halogen; or
10 alternatively, a hydrocarboxy group. Substituent halogens and substituent hydrocarboxy groups (general and specific) are independently described herein and these substituent groups can be utilized without limitation to further describe a substituted alkyl group (general or specific) which can be utilized as R^{5s}.

In an embodiment, R^{5s} can be a cyclopentyl group, a substituted cyclopentyl group, a
15 cyclohexyl group, a substituted cyclohexyl group; alternatively, a cyclopentyl group or a substituted cyclopentyl group; alternatively, a cyclohexyl group or a substituted cyclohexyl group; alternatively, a cyclopentyl group; alternatively, a substituted cyclopentyl group; alternatively, a cyclohexyl group; or alternatively, a substituted cyclohexyl group. In further embodiments, R^{5s} can be a 2-substituted cyclohexyl group, a 2,6-disubstituted cyclohexyl group, a 2-substituted cyclopentyl group, or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2-substituted cyclopentyl group; alternatively, a 2,6-disubstituted cyclohexyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group; or alternatively, a 2,6-disubstituted cyclopentyl group. In an embodiment, one or more substituents of a multi-substituted cycloalkyl group utilized as R^{5s} can be the same or different; alternatively, all the substituents of a multi-substituted cycloalkyl group can be the same; or alternatively, all the substituents of a multi-substituted cycloalkyl group can be different.
25 Each substituent of a cycloalkyl group (general or specific) having a specified number of ring carbon atoms independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups
30 (general and specific), and substituent hydrocarboxy groups (general and specific) are independently described herein and these substituent groups can be utilized without limitation to further describe a substituted cycloalkyl group (general or specific) which can be utilized as R^{5s}.
35

In a non-limiting embodiment, R^{5s} can be a cyclohexyl group, a 2-alkylcyclohexyl group, or a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group, a 2-alkylcyclopentyl group, or a 2,5-dialkylcyclopentyl group; alternatively, a cyclohexyl group; alternatively, a 2-alkylcyclohexyl group; alternatively, a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group; alternatively, a 2-alkylcyclopentyl group; or alternatively, a 2,5-dialkylcyclopentyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe alkylcyclohexyl groups (general or specific), dialkylcyclohexyl groups (general or specific), alkylcyclopentyl groups (general or specific), and/or dialkylcyclopentyl groups (general or specific) which can be utilized as R^{5s}. Generally, the alkyl substituents of a disubstituted cyclohexyl or cyclopentyl group can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R^{5s} can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, a 2-tert-butylcyclohexyl group, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In other non-limiting embodiments, R^{5s} can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, or a 2-tert-butylcyclohexyl group; or alternatively, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In an embodiment, R^{5s} can be a cyclopentyl group, a 2-methylcyclopentyl group, a cyclohexyl group, or a 2-methylcyclohexyl group; alternatively, a cyclopentyl group or a cyclohexyl group; or alternatively, a 2-methylcyclopentyl group or a 2-methylcyclohexyl group.

In an embodiment, R^{5s} can be a phenyl group or a substituted phenyl group; alternatively, a phenyl group; or alternatively, a substituted phenyl group. In some embodiments, R^{5s} can be a 2-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2-substituted phenyl group or a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2,4-disubstituted phenyl group or a 2,6-disubstituted phenyl group; alternatively, a 2-substituted phenyl group; alternatively, a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group; alternatively, a 2,6-disubstituted phenyl group; or alternatively, a 2,4,6-trisubstituted phenyl group. In an embodiment, one or more substituents of a multi-substituted phenyl group utilized as R^{5s} can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different. Each substituent of a substituted phenyl group (general or specific) independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups

(general and specific), and substituent hydrocarboxy groups (general and specific) are independently described herein and these substituent groups can be utilized without limitation to further describe a substituted phenyl group (general or specific) which can be utilized as R^{5s}.

In a non-limiting embodiment, R^{5s} can be a phenyl group, a 2-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe any alkyl substituted phenyl group which can be utilized as R^{5s}. Generally, the alkyl substituents of dialkylphenyl groups (general or specific) or trialkylphenyl groups (general or specific) can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R^{5s} can be a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, a 2-tert-butylphenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group, a 2-methylphenyl group, a 2,6-dimethylphenyl group, or a 2,4,6-trimethylphenyl group.

Generally, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be an organylene group; alternatively, an organylene group consisting of inert functional groups; or alternatively, a hydrocarbylene group. In an embodiment, the organylene group which can be utilized as L^{1s} can be a C₁ to C₂₀, a C₁ to C₁₅, or a C₁ to C₁₀ organylene group. In an embodiment, the organylene group consisting of inert functional groups which can be utilized as L^{1s} can be a C₁ to C₂₀, a C₁ to C₁₅, or a C₁ to C₁₀ organylene group consisting of inert functional groups. In an embodiment, the hydrocarbylene group which can be utilized as L^{1s} can be a C₁ to C₂₀, a C₁ to C₁₅, or a C₁ to C₁₀ hydrocarbylene group. In an embodiment, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be a C₁ to C₂₀ alkylene group, or alternatively, a C₁ to C₁₀ alkylene group.

In an embodiment, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be -(CR^PR^{P'})_m- where each R^P and R^{P'} can independently be hydrogen, methyl, ethyl, propyl, isopropyl, or butyl groups and m can be an integer from 1 to 12. In some embodiments, L^{1s} can be a methylene group (-CH₂-), an ethylene group (-CH₂CH₂-), a propylene group (-CH₂CH₂CH₂-), a -CH(CH₃)CH₂- group, -C(CH₃)₂- group, a butylene group (-CH₂CH₂CH₂-CH₂-), or a -CH₂CH(CH₃)-CH₂- group. In other embodiments, L^{1s} can be a methylene group (-CH₂-), an ethylene group (-CH₂CH₂-), or a -CH(CH₃)CH₂-group; alternatively, a methylene group(-CH₂-); alternatively, an ethylene group (-CH₂CH₂-); alternatively, a propylene group (-CH₂CH₂CH₂-); alternatively, a -CH(CH₃)CH₂- group; alternatively, a -C(CH₃)₂- group; or alternatively, a -CH₂CH(CH₃)-CH₂- group.


In an embodiment, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be 1,2-cyclohexylene, a substituted 1,2-cyclohexylene, 1,3-cyclohexylene, a substituted 1,3-cyclohexylene, 1,4-

cyclohexylene, a substituted 1,4-cyclohexylene, 3,3'-bicyclohexylene, a substituted 3,3'-bicyclohexylene, 4,4'-bicyclohexylene, a substituted 4,4'-bicyclohexylene, bis(3-cyclohexylene)methane, a substituted bis(3-cyclohexylene)methane, bis(4-cyclohexylene)methane, a substituted bis(4-cyclohexylene)methane, 1,2-bis(3-cyclohexylene)ethane, a substituted 1,2-bis(3-cyclohexylene)ethane, 1,2-bis(4-cyclohexylene)ethane, a substituted 1,2-bis(4-cyclohexylene)ethane, 1,2-bis(3-cyclohexylene)propane, a substituted 1,2-bis(3-cyclohexylene)propane, 1,2-bis(4-cyclohexylene)propane, a substituted 1,2-bis(4-cyclohexylene)propane, 2,2-bis(3-cyclohexylene)propane, a substituted 2,2-bis(3-cyclohexylene)propane, 2,2-bis(4-cyclohexylene)propane, or a substituted 2,2-bis(4-cyclohexylene)propane. In some embodiments, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be a substituted 1,2-cyclohexylene, a substituted 1,3-cyclohexylene, a substituted 1,4-cyclohexylene, a substituted 3,3'-bicyclohexylene, a substituted 4,4'-bicyclohexylene, a substituted bis(3-cyclohexylene)methane, a substituted bis(4-cyclohexylene)methane, a substituted 1,2-bis(3-cyclohexylene)ethane, a substituted 1,2-bis(4-cyclohexylene)ethane, a substituted 1,2-bis(3-cyclohexylene)propane, a substituted 1,2-bis(4-cyclohexylene)propane, a substituted 2,2-bis(3-cyclohexylene)propane, or a substituted 2,2-bis(4-cyclohexylene)propane. In an embodiment, each substituent of a substituted cyclohexylene, a substituted bis(cyclohexylene)methane, a substituted bis(cyclohexylene)ethane, or a substituted 1,2-bis(3-cyclohexylene)propane which can be utilized as L^{1s} can be a hydrocarbyl group. Substituent groups (general and specific) are independently disclosed herein and can be utilized without limitation to further describe a substituted cyclohexylene (general or specific), a substituted bis(cyclohexylene)methane (general or specific), a substituted bis(cyclohexylene)ethane (general or specific), or a substituted 1,2-bis(3-cyclohexylene)propane (general or specific) which can be utilized as L^{1s}.


In an embodiment, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be 1,2-phenylene, a substituted 1,2-phenylene, 1,3-phenylene, a substituted 1,3-phenylene, 1,4-phenylene, a substituted 1,4-phenylene, 3,3'-biphenylene, a substituted 3,3'-biphenylene, 4,4'-biphenylene, a substituted 4,4'-biphenylene, bis(3-phenylene)methane, a substituted bis(3-phenylene)methane, bis(4-phenylene)methane, a substituted bis(4-phenylene)methane, 1,2-bis(3-phenylene)ethane, a substituted 1,2-bis(3-phenylene)ethane, 1,2-bis(4-phenylene)ethane, a substituted 1,2-bis(4-phenylene)ethane, 1,2-bis(3-phenylene)propane, a substituted 1,2-bis(3-phenylene)propane, 1,2-bis(4-phenylene)propane, a substituted 1,2-bis(4-phenylene)propane, 2,2-bis(3-phenylene)propane, a substituted 2,2-bis(3-phenylene)propane, 2,2-bis(4-phenylene)propane, or a substituted 2,2-bis(4-phenylene)propane. In some embodiments, L^{1s} of the diphosphino amine having Structure PNPTMC2 can be a substituted 1,2-phenylene, a substituted 1,3-phenylene, a substituted 1,4-phenylene, a substituted 3,3'-biphenylene, a substituted 4,4'-biphenylene, a substituted bis(3-phenylene)methane, a substituted bis(4-phenylene)methane, a substituted 1,2-bis(3-phenylene)ethane, a substituted 1,2-bis(4-phenylene)ethane, a substituted 1,2-bis(3-phenylene)propane, a substituted 1,2-bis(4-phenylene)propane, a substituted 2,2-bis(3-phenylene)propane, or a substituted 2,2-bis(4-phenylene)propane. In an embodiment, each

substituent of a substituted phenylene (general or specific), a substituted biphenylene (general or specific), a substituted bis(phenylene)methane (general or specific), a substituted bis(phenylene)ethane (general or specific), and/or a substituted bis(phenylene)propane (general or specific) which can be utilized as L^{1s} can be a hydrocarbyl group. Substituent hydrocarbyl groups (general and specific) are independently disclosed herein and can be utilized without limitation to further describe a substituted phenylene (general or specific), a substituted biphenylene (general or specific), a substituted bis(phenylene)methane (general or specific), a substituted bis(phenylene)ethane (general or specific), and/or a substituted bis(phenylene)propane (general or specific) which can be utilized as L^{1s} .

In some particular embodiments, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, a diphosphino amine chromium compound complex, having Structure PNPCr1 or Structure PNPCr2; alternatively, Structure PNPCr1; or alternatively, Structure PNPCr2. Generally, R^{1s} , R^{2s} , R^{3s} , R^{4s} , R^{5s} , L^{1s} , X, and p for the diphosphino amine chromium compound complexes can be any group disclosed herein for the respective diphosphino amine transition metal compound complexes having Structure PNPTMC1 and/or Structure PNPTMC2.




Structure PNPCr1




Structure PNPCr2


In a non-limiting embodiment, the diphosphinoamine ligand of the diphosphino amine transition metal compound complex can be any one or more of PNP 1, PNP 2, PNP 3, PNP 4, PNP 5, and PNP 6 (Ph is phenyl). In some non-limiting embodiments, the diphosphino amine transition metal compound complex can be a chromium compound complex of any one or more of PNP 1, PNP 2, PNP 3, PNP 4, PNP 5, and PNP 6. In other non-limiting embodiments, the diphosphino amine transition metal compound complex can be a chromium(III) chloride or chromium(III) acetylacetonate complex of any one or more of PNP 1, PNP 2, PNP 3, PNP 4, PNP 5, and PNP 6.




PNP 1




PNP 2




PNP 3



PNP 4










PNP 5



N²-phosphinyl Amidine, N²-phosphinyl Formamidine, and N²-phosphinyl Guanidine Ligands

In an aspect, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, an N²-phosphinyl formamidine transition metal compound complex having the Structure NPFTMC1, an N²-phosphinyl amidine transition metal compound complex having the Structure NPATMC1, or an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC1, GuTMC2, GuTMC3, GuTMC4, or GuTMC5. In an embodiment, the heteroatomic ligand transition metal compound complex of the catalyst systems described herein can comprise, can consist essentially of, or can be, an N²-phosphinyl formamidine transition metal compound complex having the Structure NPFTMC1; alternatively, an N²-phosphinyl amidine transition metal compound complex having the Structure NPATMC1; or alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC1, GuTMC2, GuTMC3, GuTMC4, or GuTMC5; alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC1; alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC2; alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC3; alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC4; or alternatively, an N²-phosphinyl guanidine transition metal compound complex having the Structure GuTMC5.

**Structure NPFTMC1****Structure NPATMC1****Structure GuTMC1****Structure GuTMC2****Structure GuTMC3****Structure GuTMC4****Structure GuTMC5**

Within the N²-phosphinyl formamidine transition metal compound complexes and the N²-phosphinyl amidine transition metal compound complexes, the nitrogen participating in a double bond

with the central carbon atom is referred to as the N¹ nitrogen and the nitrogen atom participating in a single bond with the central carbon atom is referred to as the N² nitrogen. Similarly, within the N²-phosphinyl guanidine transition metal compound complexes, the nitrogen participating in a double bond with the central carbon atom of the guanidine core is referred to as the N¹ nitrogen, the nitrogen atom participating in a single bond with the central carbon atom of the guanidine core and a bond with the phosphorus atom of the phosphinyl group is referred to as the N² nitrogen, and the remaining nitrogen atom participating in a single bond with the central carbon atom of the guanidine core is referred to as the N³ nitrogen. It should be noted that the guanidine group of the guanidine in the N²-phosphinyl guanidine transition metal complexes can be a portion of a larger group which does not contain guanidine in its name. For example, while the compound 7-dimethylphosphinylimidazo[1,2-a]imidazole could be classified as a compound having an imidazo[1,2-a]imidazole core (or a compound having a phosphinylimidazo[1,2-a]imidazole group), 7-dimethylphosphinylimidazo[1,2-a]imidazole would still be classified as a compound having a guanidine core (or as a compound having a guanidine group), since it contains the defined general structure of the guanidine compound.

R¹, R³, R⁴, and R⁵ within the N²-phosphinyl formamidine transition metal complexes having Structure NPFTMC1, the N²-phosphinyl amidine transition metal complexes having Structure NPATMC1, and the N²-phosphinyl guanidine transition metal complexes having the Structures GuTMC1, GuTMC2, GuTMC3, GuTMC4, and/or GuTMC5 are independently described herein and can be utilized without limitation to further describe the N²-phosphinyl formamidine transition metal complexes having Structure NPFTMC1, the N²-phosphinyl amidine transition metal complexes having Structure NPATMC1, and/or the N²-phosphinyl guanidine transition metal complexes having the Structures GuTMC1, GuTMC2, GuTMC3, GuTMC4, and/or GuTMC5. Similarly, R² within the N²-phosphinyl amidine chromium compound complexes having Structure NPACr1 are independently described herein and can be utilized without limitation to further describe the N²-phosphinyl amidine chromium compound complexes having Structure NPACr1. Similarly, R^{2a}, R^{2b}, L¹², L²², and L²³ within the N²-phosphinyl guanidine transition metal complexes having the Structures GuTMC1, GuTMC2, GuTMC3, GuTMC4, or GuTMC5 are independently described herein and can be utilized without limitation to further describe the N²-phosphinyl guanidine transition metal complexes having the Structures GuTMC1, GuTMC2, GuTMC3, GuTMC4, and/or GuTMC5. MX_p, Q, and q of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and the N²-phosphinyl guanidine transition metal complexes are independently described herein and can be utilized in any combination, and without limitation, to further describe the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and the N²-phosphinyl guanidine transition metal complexes. Additionally, MX_p, Q, and q can be combined, without limitation, with the independently described R¹, R², R³, R⁴, R⁵, R^{2a}, R^{2b}, L¹², L¹², and L²³ to further describe the N²-phosphinyl formamidine transition metal complexes, the

N²-phosphinyl amidine transition metal complexes, and the N²-phosphinyl guanidine transition metal complexes which have an R¹, R², R³, R⁴, R⁵, R^{2a}, R^{2b}, L¹², L¹², and/or L²³ group.

Generally, R¹ of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes which have an R¹ group can be an organyl group; alternatively, an organyl group consisting essentially of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, the R¹ organyl group of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be a C₁ to C₂₀, a C₁ to C₁₅, a C₁ to C₁₀, or a C₁ to C₅ organyl group. In an embodiment, the R¹ organyl group consisting essentially of inert functional groups of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be a C₁ to C₂₀, a C₁ to C₁₅, a C₁ to C₁₀, or a C₁ to C₅ organyl group consisting essentially of inert functional groups. In an embodiment, the R¹ hydrocarbyl group of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be a C₁ to C₂₀, a C₁ to C₁₅, a C₁ to C₁₀, or a C₁ to C₅ hydrocarbyl group.

In an embodiment, R¹ of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be an alkyl group, a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, R¹ of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively, an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, R¹ of the N²-phosphinyl formamidine transition metal complexes, the N²-phosphinyl amidine transition metal complexes, and/or the N²-phosphinyl guanidine transition metal complexes, which have an R¹ group, can be an alkyl group; alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.

In any aspect or embodiment disclosed herein, the alkyl group which can be utilized as R¹ can be a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ alkyl group. In any aspect or embodiment disclosed herein, the substituted alkyl group which can be utilized as R¹ can be a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ substituted alkyl group. In any aspect or embodiment disclosed herein, the cycloalkyl group which

can be utilized as R¹ can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ cycloalkyl group. In any aspect or embodiment disclosed herein, the substituted cycloalkyl group which can be utilized as R¹ can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ substituted cycloalkyl group. In any aspect or embodiment disclosed herein, the aryl group which can be utilized as R¹ can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ aryl group. In any aspect or embodiment disclosed herein, the substituted aryl group which can be utilized as R¹ can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ substituted aryl group. In any aspect or embodiment disclosed herein, the aralkyl group which can be utilized as R¹ can be a C₇ to C₂₀, a C₇ to C₁₅, or a C₇ to C₁₀ aralkyl group. In any aspect or embodiment disclosed herein, the substituted aralkyl group which can be utilized as R¹ can be a C₇ to C₂₀ substituted aralkyl group; alternatively, a C₇ to C₁₅ substituted aralkyl group; or alternatively, a C₇ to C₁₀ substituted aralkyl group. Each substituent of a substituted alkyl group (general or specific), a substituted cycloalkyl group (general or specific), a substituted aryl group (general or specific), and/or substituted aralkyl group (general or specific) can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarboxy groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe R¹.

In an embodiment, R¹ can be a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group. In some embodiments, R¹ can be a methyl group, an ethyl group, an iso-propyl (2-propyl) group, a tert-butyl (2-methyl-2-propyl) group, or a neopentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, a n-propyl (1-propyl) group; alternatively, an iso-propyl (2-propyl) group; alternatively, a tert-butyl (2-methyl-2-propyl) group; or alternatively, a neopentyl (2,2-dimethyl-1-propyl) group. In some embodiments, the alkyl groups which can be utilized as R¹ can be substituted. Each substituent of a substituted alkyl group independently can be a halogen or a hydrocarboxy group; alternatively, a halogen; or alternatively, a hydrocarboxy group. Substituent halogens and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted alkyl group (general or specific) which can be utilized as R¹.

In an embodiment, R¹ can be a cyclopentyl group, a substituted cyclopentyl group, a cyclohexyl group, or a substituted cyclohexyl group; alternatively, a cyclopentyl group or a substituted cyclopentyl group; alternatively, a cyclohexyl group or a substituted cyclohexyl group; alternatively, a cyclopentyl group; alternatively, a substituted cyclopentyl group; alternatively, a cyclohexyl group; or alternatively, a substituted cyclohexyl group. In an embodiment, the substituted cycloalkyl group, which can be utilized as R¹, can be a 2-substituted cyclohexyl group, a 2,6-

disubstituted cyclohexyl group, a 2-substituted cyclopentyl group, or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2-substituted cyclopentyl group; alternatively, a 2,6-disubstituted cyclohexyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group; or alternatively, a 2,6-disubstituted cyclopentyl group. In an embodiment, one or more substituents of a multi-substituted cycloalkyl group utilized as R¹ can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different.

Each substituent of a substituted cycloalkyl group (general or specific) having a specified number of ring carbon atoms independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted cycloalkyl group (general or specific) which can be utilized as R¹.

In a non-limiting embodiment, R¹ can be a cyclohexyl group, a 2-alkylcyclohexyl group, or a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group, a 2-alkylcyclopentyl group, or a 2,5-dialkylcyclopentyl group; alternatively, a cyclohexyl group; alternatively, a 2-alkylcyclohexyl group; alternatively, a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group; alternatively, a 2-alkylcyclopentyl group; or alternatively, a 2,5-dialkylcyclopentyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe alkylcyclohexyl (general and specific), dialkylcyclohexyl (general and specific), alkylcyclopentyl (general and specific), and/or dialkylcyclopentyl (general and specific) groups which can be utilized as R¹. Generally, the alkyl substituents of a disubstituted cyclohexyl or cyclopentyl group can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R¹ can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, a 2-tert-butylcyclohexyl group, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In other non-limiting embodiments, R¹ can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, or a 2-tert-butylcyclohexyl group; or alternatively, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group.

In an embodiment, R^1 can be a phenyl group or a substituted phenyl group; alternatively, a phenyl group; or alternatively, a substituted phenyl group. In an embodiment, the substituted phenyl group which can be utilized as R^1 can be a 2-substituted phenyl group, a 3-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, a 3,5-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, or a 2,6-disubstituted phenyl group; alternatively, a 3-substituted phenyl group or a 3,5-disubstituted phenyl group; alternatively, a 2-substituted phenyl group or a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group or a 2,6-disubstituted phenyl group; alternatively, a 2-substituted phenyl group; alternatively, a 3-substituted phenyl group; alternatively, a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group; alternatively, a 2,6-disubstituted phenyl group; alternatively, a 3,5-disubstituted phenyl group; or alternatively, a 2,4,6-trisubstituted phenyl group. In an embodiment, one or more substituents of a multi-substituted phenyl group utilized as R^1 can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different. Each substituent of a substituted phenyl group (general or specific) independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy group can be utilized without limitation to further describe a substituted phenyl group (general or specific) which can be utilized as R^1 .

In a non-limiting embodiment, R^1 can be a phenyl group, a 2-alkylphenyl group, a 3-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, a 3,5-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group or a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group; alternatively, a 3-alkylphenyl group or a 3,5-dialkylphenyl group; alternatively, a 2-alkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 2-alkylphenyl group; alternatively, a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group; alternatively, a 2,6-dialkylphenyl group; or alternatively, a 2,4,6-trialkylphenyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe any alkyl substituted phenyl group which can be utilized as R^1 . Generally, the alkyl substituents of dialkylphenyl groups (general or specific) or trialkylphenyl groups (general or specific) can be the same, or alternatively, the alkyl substituents can be different. In some

non-limiting embodiments, R^1 can be a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, a 2-tert-butylphenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, or a 2-tert-butylphenyl group; or alternatively, a phenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group.

In an embodiment, R^1 can be a benzyl group or a substituted benzyl group; alternatively, a benzyl group; or alternatively, a substituted benzyl group. Each substituent of a substituted benzyl group independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted benzyl which can be utilized as R^1 .

Generally, R^2 of the N^2 -phosphinyl amidine transition metal compound complexes can be an organyl group; alternatively, an organyl group consisting essentially of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, R^2 of the N^2 -phosphinyl amidine transition metal complexes can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to, or a C_1 to C_5 organyl group. In an embodiment, R^2 of the N^2 -phosphinyl amidine transition metal compound complexes can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group consisting essentially of inert functional groups. In an embodiment, R^2 of the N^2 -phosphinyl amidine transition metal compound complexes can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group.

In an embodiment, R^2 of the N^2 -phosphinyl amidine transition metal compound complexes can be an alkyl group, a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, R^2 can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively, an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, R^2 can be an alkyl group; alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.

In any aspect or embodiment disclosed herein, R^2 can be a C_1 to C_{20} , a C_1 to C_{10} , or a C_1 to C_5 alkyl group. In any aspect or embodiment disclosed herein, the substituted alkyl group which can be utilized as R^2 can be a C_1 to C_{20} , a C_1 to C_{10} , or a C_1 to C_5 substituted alkyl group. In any aspect or embodiment disclosed herein, the cycloalkyl group which can be utilized as R^2 can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} cycloalkyl group. In any aspect or embodiment disclosed herein, the substituted cycloalkyl group which can be utilized as R^2 can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} substituted cycloalkyl group. In any aspect or embodiment disclosed herein, the aryl group which can be utilized as R^2 can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} aryl group. In any aspect or embodiment disclosed herein, the substituted aryl group which can be utilized as R^2 can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} substituted aryl group. In any aspect or embodiment disclosed herein, the aralkyl group which can be utilized as R^2 can be a C_7 to C_{20} , a C_7 to C_{15} , or a C_7 to C_{10} aralkyl group. In any aspect or embodiment disclosed herein, the substituted aralkyl group which can be utilized as R^2 can be a C_7 to C_{20} , a C_7 to C_{15} , or a C_7 to C_{10} substituted aralkyl group. Each substituent of a substituted alkyl group (general or specific), a substituted cycloalkyl group (general or specific), a substituted aryl group (general or specific), and/or substituted aralkyl group (general or specific) can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarboxy groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe R^2 .

In an embodiment, R^2 can be a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group. In some embodiments, R^2 can be a methyl group, an ethyl group, an iso-propyl (2-propyl) group, a tert-butyl (2-methyl-2-propyl) group, or a neopentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, a n-propyl (1-propyl) group; alternatively, an iso-propyl (2-propyl) group; alternatively, a tert-butyl (2-methyl-2-propyl) group; or alternatively, a neopentyl (2,2-dimethyl-1-propyl) group. In some embodiments, the alkyl groups which can be utilized as R^2 can be substituted. Each substituent of a substituted alkyl group independently can be a halogen or a hydrocarboxy group; alternatively, a halogen; or alternatively, a hydrocarboxy group. Substituent halogens and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted alkyl group which can be utilized as R^2 .

In an embodiment, R^2 can be a cyclopentyl group, a substituted cyclopentyl group, a cyclohexyl group, or a substituted cyclohexyl group; alternatively, a cyclopentyl group or a substituted cyclopentyl group; or alternatively, a cyclohexyl group or a substituted cyclohexyl group;

alternatively, a cyclopentyl group; alternatively, a substituted cyclopentyl group; alternatively, a cyclohexyl group; or alternatively, a substituted cyclohexyl group. In an embodiment, the substituted cycloalkyl group, which can be utilized as R^2 , can be a 2-substituted cyclohexyl group, a 2,6-disubstituted cyclohexyl group, a 2-substituted cyclopentyl group, or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2-substituted cyclopentyl group; alternatively, a 2,6-disubstituted cyclohexyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group; or alternatively, a 2,6-disubstituted cyclopentyl group. In an embodiment, one or more substituents of a multi-substituted cycloalkyl group utilized as R^2 can be the same or different; alternatively, all the substituents of a multi-substituted cycloalkyl group can be the same; or alternatively, all the substituents of a multi-substituted cycloalkyl group can be different. Each substituent of a cycloalkyl group having a specified number of ring carbon atoms independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted cycloalkyl group (general or specific) which can be utilized as R^2 .

In a non-limiting embodiment, R^2 can be a cyclohexyl group, a 2-alkylcyclohexyl group, or a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group, a 2-alkylcyclopentyl group, or a 2,5-dialkylcyclopentyl group; alternatively, a cyclohexyl group; alternatively, a 2-alkylcyclohexyl group; alternatively, a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group; alternatively, a 2-alkylcyclopentyl group; or alternatively, a 2,5-dialkylcyclopentyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe alkylcyclohexyl groups (general or specific), dialkylcyclohexyl groups (general or specific), alkylcyclopentyl groups (general or specific), and/or dialkylcyclopentyl groups (general or specific) which can be utilized as R^2 . Generally, the alkyl substituents of a disubstituted cyclohexyl or cyclopentyl group can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R^2 can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, a 2-tert-butylcyclohexyl group, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In other non-limiting embodiments, R^2 can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a

2-isopropylcyclohexyl group, or a 2-tert-butylcyclohexyl group; or alternatively, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group.

In an embodiment, R^2 can be a phenyl group or a substituted phenyl group; alternatively, a phenyl group; or alternatively, a substituted phenyl group. In an embodiment, the substituted phenyl group can be a 2-substituted phenyl group, a 3-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, a 3,5-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, or a 2,6-disubstituted phenyl group; alternatively, a 3-substituted phenyl group or a 3,5-disubstituted phenyl group; alternatively, a 2-substituted phenyl group or a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group or a 2,6-disubstituted phenyl group; alternatively, a 2-substituted phenyl group; alternatively, a 3-substituted phenyl group; alternatively, a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group; alternatively, a 2,6-disubstituted phenyl group; alternatively, a 3,5-disubstituted phenyl group; or alternatively, a 2,4,6-trisubstituted phenyl group. In an embodiment, one or more substituents of a multi-substituted phenyl group utilized as R^2 can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different. Each substituent of a substituted phenyl group (general or specific) independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted phenyl group (general or specific) which can be utilized as R^2 .

In a non-limiting embodiment, R^2 can be a phenyl group, a 2-alkylphenyl group, a 3-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, a 3,5-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group or a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 3-alkylphenyl group or a 3,5-dialkylphenyl group; alternatively, a 2-alkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 2-alkylphenyl group; alternatively, a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group; alternatively, a 2,6-dialkylphenyl group; or alternatively, a 2,4,6-trialkylphenyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further

describe any alkyl substituted phenyl group which can be utilized as R^2 . Generally, the alkyl substituents of dialkylphenyl groups (general or specific) or trialkylphenyl groups (general or specific) can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R^2 can be a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, a 2-tert-butylphenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, or a 2-tert-butylphenyl group; or alternatively, a phenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group.

In a non-limiting embodiment, R^2 can be a phenyl group, a 2-alkoxyphenyl group, or a 4-alkoxyphenyl group. In some non-limiting embodiments, R^2 can be a phenyl group, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, a 2-tert-butoxyphenyl group, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group; alternatively, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, or a 2-tert-butoxyphenyl group; or alternatively, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group.

In a non-limiting embodiment, R^2 can be a phenyl group, a 2-halophenyl group, a 4-halophenyl group, or a 2,6-dihalophenyl group. Generally, the halides of a dihalophenyl group can be the same, or alternatively, the halides can be different. In some embodiments, R^2 can be a phenyl group, a 2-fluorophenyl group, a 4-fluorophenyl group, or a 2,6-difluorophenyl group.

In an embodiment, R^2 can be a benzyl group or a substituted benzyl group; alternatively, a benzyl group; or alternatively, a substituted benzyl group. Each substituent of a substituted benzyl group independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy group can be utilized without limitation to further describe a substituted benzyl which can be utilized as R^2 .

Generally, R^{2a} and/or R^{2b} of the N^2 -phosphinyl guanidine transition metal compound complexes which have an R^{2a} and/or R^{2b} group independently can be hydrogen or an organyl group; alternatively, hydrogen; or alternatively, an organyl group. In another aspect, R^{2a} and/or R^{2b} independently can be hydrogen or an organyl group consisting essentially of inert functional groups;

alternatively, hydrogen; or alternatively, an organyl group consisting essentially of inert functional groups. In yet another aspect, R^{2a} and/or R^{2b} independently can be hydrogen or a hydrocarbyl group; alternatively, hydrogen; or alternatively, a hydrocarbyl group.

5 In an embodiment, the R^{2a} and R^{2b} organyl groups of the N^2 -phosphinyl guanidine transition metal compound complexes, which have an R^{2a} and/or R^{2b} organyl group, independently can be a C_1 to C_{20} organyl group; alternatively, a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group. In some embodiments, the R^{2a} and/or R^{2b} organyl groups consisting of inert functional group of the N^2 -phosphinyl guanidine transition metal complexes, which have an R^{2a} and/or R^{2b} organyl consisting of inert functional groups, independently can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl
10 group consisting essentially of inert functional groups. In other embodiments, the R^{2a} and/or R^{2b} hydrocarbyl groups of the N^2 -phosphinyl guanidine transition metal compound complexes, which have an R^{2a} and/or R^{2b} hydrocarbyl group, independently can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group.

In an embodiment, R^{2a} and R^{2b} of the N^2 -phosphinyl guanidine transition metal compound
15 complexes independently can be an alkyl group, a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, R^{2a} and R^{2b} can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively,
20 an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, R^{2a} and R^{2b} independently can be an alkyl group; alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.


25 In any aspect or embodiment disclosed herein, R^{2a} and R^{2b} independently can be C_1 to C_{20} , a C_1 to C_{10} , or a C_1 to C_5 alkyl group. In any aspect or embodiment disclosed herein, the cycloalkyl group which can be utilized as R^{2a} and/or R^{2b} independently can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} cycloalkyl group. In any aspect or embodiment disclosed herein, the substituted cycloalkyl group which can be utilized as R^{2a} and/or R^{2b} independently can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10}
30 substituted cycloalkyl group. In any aspect or embodiment disclosed herein, the aryl group which can be utilized as R^{2a} and/or R^{2b} independently can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} aryl group. In any aspect or embodiment disclosed herein, the substituted aryl group which can be utilized as R^{2a} and/or R^{2b} independently can be a C_6 to C_{20} , a C_6 to C_{15} , or a C_6 to C_{10} substituted aryl group. Each substituent of a substituted cycloalkyl group (general or specific) and/or a substituted aryl group
35 (general or specific) can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl

group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarboxy groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe R^{2a} and/or R^{2b} .

5 In an aspect, R^1 and R^{2a} of the N^2 -phosphinyl guanidine transition metal complexes can be joined to form a group, L^{12} , wherein L^{12} , the N^1 nitrogen atom, and the N^3 nitrogen atom can form a ring or a ring system. In another aspect, R^3 and R^{2b} of the N^2 -phosphinyl guanidine transition metal compound complexes can be joined to form a group, L^{23} , wherein L^{23} , the N^2 nitrogen atom, and the N^3 nitrogen atom can form a ring or a ring system. In an embodiment, L^{12} and/or L^{23} independently
 10 can be an organylene group; alternatively, an organylene group consisting of inert functional groups; or alternatively, a hydrocarbylene group. The organylene group which can be utilized as L^{12} and/or L^{23} independently can be a C_2 to C_{20} , a C_2 to C_{15} , a C_2 to C_{10} , or a C_2 to C_5 organylene group. The organylene group consisting of inert functional groups which can be utilized as L^{12} and/or L^{23} independently can be a C_2 to C_{20} , a C_2 to C_{15} , a C_2 to C_{10} , or a C_2 to C_5 organylene group consisting of
 15 inert functional groups. The hydrocarbylene group which can be utilized as L^{12} and/or L^{23} independently can be a C_2 to C_{20} , a C_2 to C_{15} , a C_2 to C_{10} , or a C_2 to C_5 hydrocarbylene group.

In an embodiment, L^{12} and/or L^{23} can have any structure provided in Table 1. In some embodiments, L^{12} and/or L^{23} can have Structure 1L, Structure 2L, Structure 3L, Structure 4L, or Structure 5L. In some embodiments, L^{12} and/or L^{23} can have Structure 2L or Structure 3L;
 20 alternatively, Structure 4L or Structure 5L. In other embodiments, L^{12} and/or L^{23} can have Structure 1L; alternatively, Structure 2L; alternatively, Structure 3L; alternatively, Structure 4L; or alternatively, Structure 5L. In some embodiments, L^{12} and/or L^{23} can have Structure 6L. It should be noted that when L^{12} has Structure 6L, the corresponding R^{2b} is null because of the double bond link (depicted as real but can be delocalized through aromatic resonance) with the N^3 nitrogen atom of the
 25 N^2 -phosphinyl guanidine metal complex.

Table 1 –Structures for Linking Groups L^{12} and/or L^{23} .

$-(CR^{L1}R^{L2})_m-$	$-CR^{L3}R^{L4}-CR^{L5}R^{L6}-$	$-CR^{L3}R^{L4}-CR^{L7}R^{L8}-CR^{L5}R^{L6}-$
Structure 1L	Structure 2L	Structure 3L
		
$-CR^{11L}=CR^{12L}-$	Structure 5L	$=CR^{L27}-CR^{L28}=CR^{L29}-$
Structure 4L		Structure 6L

Within the structures of Table 1, the undesignated valencies represent the points at which L^{12} and/or L^{23} , when present, attach to the respective nitrogen atoms of the N^2 -phosphinyl guanidine transition metal compound complex. Generally, m can be an integer ranging from 2 to 5. In further embodiments, m can be 2 or 3; alternatively, m can be 2; or alternatively, m can be 3. R^{L1} and R^{L2} of the linking group having Structure 1L, R^{L3} , R^{L4} , R^{L5} , and R^{L6} of the linking group having Structure 2L, R^{L3} , R^{L4} , R^{L5} , R^{L6} , R^{L7} , and R^{L8} of the linking group having Structure 3L, R^{L11} and R^{L12} of the linking group having Structure 4L, R^{L23} , R^{L24} , R^{L25} , and R^{L26} of the linking group having Structure 5L, and R^{L27} , R^{L28} , and R^{L29} of the linking group having Structure 6L independently can be a hydrogen or a non-hydrogen substituent group; or alternatively, hydrogen. Non-hydrogen substituent groups (general and specific) are independently disclosed herein and can be utilized without limitation to further describe the linking group having Structure 1L, Structure 2L, Structure 3L, Structure 4L, and/or Structure 5L. In an embodiment, L^{12} and/or L^{23} can be an eth-1,2-ylene group ($-\text{CH}_2\text{CH}_2-$), an ethen-1,2-ylene group ($-\text{CH}=\text{CH}-$), a prop-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}_2-$), a 1-methylethen-1,2-ylene group ($-\text{C}(\text{CH}_3)=\text{CH}-$), a but-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}(\text{CH}_3)-$), a 3-methylbut-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{C}(\text{CH}_3)_2-$), or a phen-1,2-ylene group. In some non-limiting embodiments, L^{12} and/or L^{23} be an eth-1,2-ylene group ($-\text{CH}_2\text{CH}_2-$), a prop-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}_2-$), a 1-methylethen-1,2-ylene group ($-\text{C}(\text{CH}_3)=\text{CH}-$), a but-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}(\text{CH}_3)-$), or a 3-methylbut-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{C}(\text{CH}_3)_2-$); alternatively, an eth-1,2-ylene group ($-\text{CH}_2\text{CH}_2-$), an ethen-1,2-ylene group ($-\text{CH}=\text{CH}-$), a prop-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}_2-$), or a phen-1,2-ylene group; alternatively, an eth-1,2-ylene group ($-\text{CH}_2\text{CH}_2-$) or a prop-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}_2-$); alternatively, an ethen-1,2-ylene group ($-\text{CH}=\text{CH}-$) or a phen-1,2-ylene group. In other embodiments, L^{12} and/or L^{23} can be an eth-1,2-ylene group ($-\text{CH}_2\text{CH}_2-$); alternatively, an ethen-1,2-ylene group ($-\text{CH}=\text{CH}-$); alternatively, a prop-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}_2-$); alternatively, a 1-methylethen-1,2-ylene group ($-\text{C}(\text{CH}_3)=\text{CH}-$); alternatively, a but-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{CH}(\text{CH}_3)-$); alternatively, a 3-methylbut-1,3-ylene group ($-\text{CH}_2\text{CH}_2\text{C}(\text{CH}_3)_2-$); or alternatively, a phen-1,2-ylene group. In some embodiments, L^{12} and/or L^{23} can be a $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$ group.

In an embodiment, L^{12} can have a structure that can comprise at least one substituent located on the carbon atom attached to the N^1 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex; alternatively, can comprise only one substituent located on the carbon atom attached to the N^1 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex; or alternatively, can comprise two substituents located on the carbon atom attached to the N^1 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex. In another embodiment, L^{12} can have a structure that can consist of one substituent located on the carbon atom attached to the N^1 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex; or alternatively, can consist of two substituents located on the carbon atom attached to the N^1 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex.

In an embodiment, R^{2a} and R^{2b} of the N^2 -phosphinyl guanidine transition metal compound complexes can be joined to form a group, L^{22} , wherein R^{2a} , R^{2b} , and the N^3 nitrogen (or L^{22} and the N^3 nitrogen) form a ring or ring system. In an embodiment, L^{22} of the N^2 -phosphinyl guanidine transition metal compound complexes having an L^{22} group can be an organylene group; alternatively, an organylene group consisting of inert functional groups; or alternatively, a hydrocarbylene group. The organylene group which can be utilized as L^{22} can be a C_3 to C_{20} , a C_3 to C_{15} , or a C_3 to C_{10} organylene group. The organylene group consisting of inert functional groups which can be utilized as L^{22} can be a C_3 to C_{20} , a C_3 to C_{15} , or a C_3 to C_{10} organylene group consisting of inert functional groups. The hydrocarbylene group which can be utilized as L^{22} can be a C_4 to C_{20} , a C_4 to C_{15} , or a C_4 to C_{10} hydrocarbylene group.

In an embodiment, L^{22} can have any structure provided in Table 2. In some embodiments, L^{22} can have Structure 11L, Structure 12L, Structure 13L, Structure 14L, or Structure 15L. In other embodiments, L^{22} can have Structure 11L; alternatively, Structure 12L; alternatively, Structure 13L; alternatively, Structure 14L; or alternatively, Structure 15L.

Table 2 – Structures for Linking Group L^{22} .

$-(CR^{L31}R^{L32})_n-$	$-CR^{L41}R^{L42}-CR^{L45}R^{L46}-CR^{L47}R^{L48}-CR^{L43}R^{L44}-$
Structure 11L	Structure 12L
$-CR^{L41}R^{L42}-CR^{L45}R^{L46}-CR^{L49}R^{L50}-CR^{L47}R^{L48}-CR^{L43}R^{L44}-$	
Structure 13L	
$-CR^{L41}R^{L42}-CR^{L45}R^{L46}-O-CR^{L47}R^{L48}-CR^{L43}R^{L44}-$	$-CR^{L51}=CR^{L53}-CR^{L54}=CR^{L52}-$
Structure 14L	Structure 15L

Within the structures of Table 2, the undesignated valencies represent the points at which L^{22} of the N^2 -phosphinyl guanidine transition metal compound complexes, when present, attach to the N^3 nitrogen atom of the N^2 -phosphinyl guanidine transition metal compound complex. Generally, n can be an integer ranging from 4 to 7. In further embodiments, n can be 4 or 5; alternatively, n can be 4; or alternatively, n can be 5. R^{L31} and R^{L32} of the linking group having Structure 11L, R^{L41} , R^{L42} , R^{L43} , R^{L44} , R^{L45} , R^{L46} , R^{L47} , and R^{L48} of the linking group having Structure 12L, R^{L41} , R^{L42} , R^{L43} , R^{L44} , R^{L45} , R^{L46} , R^{L47} , R^{L48} , R^{L49} , and R^{L50} of the linking group having Structure 13L, R^{L41} , R^{L42} , R^{L43} , R^{L44} , R^{L45} , R^{L46} , R^{L47} , and R^{L48} of the linking group having Structure 14L, and R^{L41} , R^{L42} , R^{L43} , R^{L44} , R^{L45} , R^{L46} , R^{L47} , and R^{L48} of the linking group having Structure 15L, independently can be a hydrogen or a non-hydrogen substituent group; or alternatively, hydrogen. Non-hydrogen substituent groups (general and specific) are independently disclosed herein and can be utilized without limitation to further describe the linking group having Structure 11L, Structure 12L, Structure 13L, Structure 14L, and/or Structure 15L. In an embodiment, L^{22} can be a but-1,4-ylene group, a pent-1,4-ylene group, a pent-

1,5-ylene group, a hex-2,5-ylene group, a hex-1,5-ylene group, a hept-2,5-ylene group, a buta-1,3-dien-1,4-ylene group, or a bis(eth-2-yl)ether group; alternatively, a but-1,4-ylene group, a pent-1,5-ylene group, or a bis(eth-2-yl)ether group; alternatively, a but-1,4-ylene group; alternatively, a pent-1,5-ylene group; alternatively, a buta-1,3-dien-1,4-ylene group; or alternatively, a bis(eth-2-yl)ether group.

Generally, R^3 of the N^2 -phosphinyl formamidine transition metal compound complexes, the N^2 -phosphinyl amidine transition metal compound complexes, and/or the N^2 -phosphinyl guanidine transition metal compound complexes which have an R^3 group can be hydrogen or an organyl group; alternatively, hydrogen or an organyl group consisting essentially of inert functional groups; alternatively, hydrogen or a hydrocarbyl group; alternatively, hydrogen; alternatively, an organyl group; alternatively, an organyl group consisting essentially of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, the organyl group which can be utilized as R^3 can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group. In an embodiment, the organyl group consisting of inert functional groups which can be utilized as R^3 can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group consisting essentially of inert functional groups. In an embodiment, the hydrocarbyl group which can be utilized as R^3 can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group. In other embodiments, R^3 can be a C_1 to C_{30} , a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 alkyl group. In yet other embodiments, R^3 can be a phenyl group or a C_6 to C_{30} substituted phenyl group; alternatively, a phenyl group or a C_6 to C_{20} substituted phenyl group; alternatively, a phenyl group or a C_6 to C_{15} substituted phenyl group; or alternatively, a phenyl group or a C_6 to C_{10} substituted phenyl group. Substituent groups (general and specific) are provided herein and these general substituent groups can be utilized to further describe the substituted phenyl groups which can be utilized as R^3 .

Generally, R^4 and/or R^5 of the N^2 -phosphinyl formamidine transition metal compound complexes, the N^2 -phosphinyl amidine transition metal compound complexes, and/or the N^2 -phosphinyl guanidine transition metal compound complexes independently can be an organyl group; alternatively, an organyl group consisting essentially of inert functional groups; or alternatively, a hydrocarbyl group. In an embodiment, the R^4 and/or R^5 organyl groups independently can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group. In an embodiment, the R^4 and/or R^5 organyl group consisting essentially of inert functional groups independently can be a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 organyl group consisting essentially of inert functional groups. In an embodiment, the R^4 and/or R^5 hydrocarbyl groups independently can be a C_1 to C_{30} hydrocarbyl group; alternatively, a C_1 to C_{20} , a C_1 to C_{15} , a C_1 to C_{10} , or a C_1 to C_5 hydrocarbyl group. In further embodiments, R^4 and/or R^5 can be joined to form a ring or a ring system.

In an embodiment, R^4 and/or R^5 of the N^2 -phosphinyl formamidine transition metal compound complexes, the N^2 -phosphinyl amidine transition metal compound complexes, and/or the N^2 -phosphinyl guanidine transition metal compound complexes independently can be an alkyl group,

a substituted alkyl group, a cycloalkyl group, a substituted cycloalkyl group, an aryl group, a substituted aryl group, an aralkyl group, or a substituted aralkyl group. In some embodiments, R⁴ and/or R⁵ independently can be an alkyl group or a substituted alkyl group; alternatively, a cycloalkyl group or a substituted cycloalkyl group; alternatively, an aryl group or a substituted aryl group; alternatively, an aralkyl group or a substituted aralkyl group; or alternatively, an alkyl group, a cycloalkyl group, an aryl group, or an aralkyl group. In other embodiments, R⁴ and/or R⁵ independently can be an alkyl group; alternatively, a substituted alkyl group; alternatively, a cycloalkyl group; alternatively, a substituted cycloalkyl group; alternatively, an aryl group; alternatively, a substituted aryl group; alternatively, an aralkyl group; or alternatively, a substituted aralkyl group.

In any aspect or embodiment disclosed herein, each alkyl group which can be utilized as R⁴ and R⁵ independently can be a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ alkyl group. In any aspect or embodiment disclosed herein, each substituted alkyl group which can be utilized as R⁴ and R⁵ independently can be a C₁ to C₂₀, a C₁ to C₁₀, or a C₁ to C₅ substituted alkyl group. In any aspect or embodiment disclosed herein, each cycloalkyl group which can be utilized as R⁴ and R⁵ independently can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ cycloalkyl group. In any aspect or embodiment disclosed herein, each substituted cycloalkyl group which can be utilized as R⁴ and R⁵ independently can be a C₄ to C₂₀, a C₄ to C₁₅, or a C₄ to C₁₀ substituted cycloalkyl group. In any aspect or embodiment disclosed herein, each aryl group which can be utilized as R⁴ and R⁵ independently can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ aryl group. In any aspect or embodiment disclosed herein, each substituted aryl group which can be utilized as R⁴ and R⁵ independently can be a C₆ to C₂₀, a C₆ to C₁₅, or a C₆ to C₁₀ substituted aryl group. In any aspect or embodiment disclosed herein, each aralkyl group which can be utilized R⁴ and R⁵ independently can be a C₇ to C₂₀, a C₇ to C₁₅, or a C₇ to C₁₀ aralkyl group. In any aspect or embodiment disclosed herein, each substituted aralkyl group which can be utilized as R⁴ and R⁵ independently can be a C₇ to C₂₀, a C₇ to C₁₅, or a C₇ to C₁₀ substituted aralkyl group. Each substituent of a substituted alkyl group (general or specific), a substituted cycloalkyl group (general or specific), a substituted aryl group (general or specific), and/or substituted aralkyl group (general or specific) can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarboxy groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe R⁴ and/or R⁵.

In an embodiment, R⁴ and R⁵ independently can be a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group. In some embodiments, R⁴ and R⁵ independently can be a methyl group, an ethyl group, an iso-propyl (2-

propyl) group, a tert-butyl (2-methyl-2-propyl) group, or a neopentyl (2,2-dimethyl-1-propyl) group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, a n-propyl (1-propyl) group; alternatively, an iso-propyl (2-propyl) group; alternatively, a tert-butyl (2-methyl-2-propyl) group; or alternatively, a neopentyl (2,2-dimethyl-1-propyl) group. In some embodiments, the alkyl groups which can be utilized as R⁴ and R⁵ can be substituted. Each substituent of a substituted alkyl group independently can be a halogen or a hydrocarboxy group; alternatively, a halogen; or alternatively, a hydrocarboxy group. Substituent halogens and substituent hydrocarboxy groups are independently disclosed herein. These substituent halogens and substituent hydrocarboxy groups (general and specific) can be utilized without limitation to further describe a substituted alkyl group which can be utilized as R⁴ and/or R⁵ independently.

In an embodiment, R⁴ and R⁵ independently can be a cyclopentyl group, a substituted cyclopentyl group, a cyclohexyl group, or a substituted cyclohexyl group; alternatively, a cyclopentyl group or a substituted cyclopentyl group; alternatively, a cyclohexyl group or a substituted cyclohexyl group; alternatively, a cyclopentyl group; alternatively, a substituted cyclopentyl group; alternatively, a cyclohexyl group; or alternatively, a substituted cyclohexyl group. In an embodiment, the substituted cycloalkyl group which can be utilized for R⁴ and R⁵ can be a 2-substituted cyclohexyl group, a 2,6-disubstituted cyclohexyl group, a 2-substituted cyclopentyl group, or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group or a 2-substituted cyclopentyl group; alternatively, a 2,6-disubstituted cyclohexyl group or a 2,6-disubstituted cyclopentyl group; alternatively, a 2-substituted cyclohexyl group; alternatively, a 2,6-disubstituted cyclohexyl group; alternatively, a 2-substituted cyclopentyl group; or alternatively, a 2,6-disubstituted cyclopentyl group. In an embodiment, one or more substituents of a multi-substituted cycloalkyl group utilized as R⁴ and R⁵ can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different. Each substituent of a cycloalkyl group (general or specific) having a specified number of ring carbon atoms independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted cycloalkyl group (general or specific) which can be utilized as R⁴ and/or R⁵.

In a non-limiting embodiment, R⁴ and R⁵ independently can be a cyclohexyl group, a 2-alkylcyclohexyl group, or a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group, a 2-alkylcyclopentyl group, or a 2,5-dialkylcyclopentyl group; alternatively, a cyclohexyl group;

alternatively, a 2-alkylcyclohexyl group; alternatively, a 2,6-dialkylcyclohexyl group; alternatively, a cyclopentyl group; alternatively, a 2-alkylcyclopentyl group; or alternatively, a 2,5-dialkylcyclopentyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe alkylcyclohexyl groups (general or specific), dialkylcyclohexyl groups (general or specific), alkylcyclopentyl groups (general or specific), and/or dialkylcyclopentyl groups (general or specific) which can be utilized as R⁴ and R⁵. Generally, the alkyl substituents of a disubstituted cyclohexyl or cyclopentyl group can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R⁴ and R⁵ independently can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, a 2-tert-butylcyclohexyl group, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group. In other non-limiting embodiments, R⁴ and R⁵ independently can be a 2-methylcyclohexyl group, a 2-ethylcyclohexyl group, a 2-isopropylcyclohexyl group, or a 2-tert-butylcyclohexyl group; or alternatively, a 2,6-dimethylcyclohexyl group, a 2,6-diethylcyclohexyl group, a 2,6-diisopropylcyclohexyl group, or a 2,6-di-tert-butylcyclohexyl group.

In an embodiment, R⁴ and R⁵ independently can be a phenyl group or a substituted phenyl group; alternatively, a phenyl group; or alternatively, a substituted phenyl group. In an embodiment, the substituted phenyl group which can be utilized for R⁴ and R⁵ can be a 2-substituted phenyl group, a 3-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, a 2,6-disubstituted phenyl group, a 3,5-disubstituted phenyl group, or a 2,4,6-trisubstituted phenyl group; alternatively, a 2-substituted phenyl group, a 4-substituted phenyl group, a 2,4-disubstituted phenyl group, or a 2,6-disubstituted phenyl group; alternatively, a 3-substituted phenyl group or a 3,5-disubstituted phenyl group; alternatively, a 2-substituted phenyl group or a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group or a 2,6-disubstituted phenyl group; alternatively, a 2-substituted phenyl group; alternatively, a 3-substituted phenyl group; alternatively, a 4-substituted phenyl group; alternatively, a 2,4-disubstituted phenyl group; alternatively, a 2,6-disubstituted phenyl group; alternatively, a 3,5-disubstituted phenyl group; or alternatively, a 2,4,6-trisubstituted phenyl group. In an embodiment, one or more substituents of a multi-substituted phenyl group utilized as R⁴ and R⁵ can be the same or different; alternatively, all the substituents can be the same, or alternatively, all the substituents can be different. Each substituent of a substituted phenyl group (general or specific) independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen, alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general and specific), and substituent hydrocarboxy groups (general and specific) are independently disclosed herein. These substituent halogens, substituent

hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted phenyl group (general or specific) which can be utilized as R⁴ and/or R⁵.

In a non-limiting embodiment, R⁴ and R⁵ independently can be a phenyl group, a 2-alkylphenyl group, a 3-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, a 3,5-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group, a 4-alkylphenyl group, a 2,4-dialkylphenyl group, a 2,6-dialkylphenyl group, or a 2,4,6-trialkylphenyl group; alternatively, a 2-alkylphenyl group or a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 3-alkylphenyl group or a 3,5-dialkylphenyl group; alternatively, a 2-alkylphenyl group or a 2,6-dialkylphenyl group; alternatively, a 2-alkylphenyl group; alternatively, a 4-alkylphenyl group; alternatively, a 2,4-dialkylphenyl group; alternatively, a 2,6-dialkylphenyl group; or alternatively, a 2,4,6-trialkylphenyl group. Alkyl substituent groups (general and specific) are independently described herein and these alkyl substituent groups can be utilized, without limitation, to further describe any alkyl substituted phenyl group which can be utilized as R⁴ and R⁵. Generally, the alkyl substituents of dialkylphenyl groups (general or specific) or trialkylphenyl groups (general or specific) can be the same, or alternatively, the alkyl substituents can be different. In some non-limiting embodiments, R⁴ and R⁵ independently can be a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, a 2-tert-butylphenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group, a 2-methylphenyl group, a 2-ethylphenyl group, a 2-n-propylphenyl group, a 2-isopropylphenyl group, or a 2-tert-butylphenyl group; or alternatively, a phenyl group, a 2,6-dimethylphenyl group, a 2,6-diethylphenyl group, a 2,6-di-n-propylphenyl group, a 2,6-diisopropylphenyl group, a 2,6-di-tert-butylphenyl group, a 2-isopropyl-6-methylphenyl group, or a 2,4,6-trimethylphenyl group.

In a non-limiting embodiment, R⁴ and/or R⁵ can be a phenyl group, a 2-alkoxyphenyl group, or a 4-alkoxyphenyl group. In some non-limiting embodiments, R⁴ and/or R⁵ can be a phenyl group, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, a 2-tert-butoxyphenyl group, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group; alternatively, a 2-methoxyphenyl group, a 2-ethoxyphenyl group, a 2-isopropoxyphenyl group, or a 2-tert-butoxyphenyl group; or alternatively, a 4-methoxyphenyl group, a 4-ethoxyphenyl group, a 4-isopropoxyphenyl group, or a 4-tert-butoxyphenyl group.

In a non-limiting embodiment, R⁴ and R⁵ independently can be a phenyl group, a 2-halophenyl group, a 4-halophenyl group, or a 2,6-dihalophenyl group. Generally, the halides of a dihalophenyl group can be the same, or alternatively, the halides can be different. In some embodiments, R⁴ and R⁵ independently can be a phenyl group, a 2-fluorophenyl group, a 4-fluorophenyl group, or a 2,6-difluorophenyl group.

In an embodiment, R^4 and R^5 independently can be a benzyl group or a substituted benzyl group; alternatively, a benzyl group; or alternatively, a substituted benzyl group. Each substituent of a substituted benzyl group independently can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. Substituent halogens, substituent hydrocarbyl groups (general or specific), and substituent hydrocarboxy groups (general or specific) are independently disclosed herein. These substituent halogens, substituent hydrocarbyl groups, and substituent hydrocarboxy groups can be utilized without limitation to further describe a substituted benzyl which can be utilized as R^4 and/or R^5 .

Generally, the neutral ligand, Q, of the N^2 -phosphinyl formamidine transition metal compound complexes, the N^2 -phosphinyl amidine transition metal compound complexes, and/or the N^2 -phosphinyl guanidine transition metal compound complexes, if present, independently can be any neutral ligand that forms an isolatable compound with the N^2 -phosphinyl formamidine transition metal compound complex, the N^2 -phosphinyl amidine transition metal compound complex, and/or the N^2 -phosphinyl guanidine transition metal compound complex. In an aspect, each neutral ligand independently can be a nitrile or an ether; alternatively, a nitrile; or alternatively, an ether. The number of neutral ligands, q, can be any number that forms an isolatable compound with the N^2 -phosphinyl formamidine transition metal compound complexes, the N^2 -phosphinyl amidine transition metal compound complexes, and/or the N^2 -phosphinyl guanidine transition metal compound complexes. In an aspect, the number of neutral ligands can be from 0 to 6; alternatively, from 0 to 3; alternatively, 0; alternatively, 1; alternatively, 2; alternatively, 3; or alternatively, 4.

Generally, each nitrile ligand independently can be a C_2 to C_{20} or a C_2 to C_{10} nitrile. In an embodiment, each nitrile ligand independently can be a C_2 to C_{20} aliphatic nitrile, a C_7 to C_{20} aromatic nitrile, a C_8 to C_{20} aralkane nitrile, or any combination thereof; alternatively, a C_2 to C_{20} aliphatic nitrile; alternatively, a C_7 to C_{20} aromatic nitrile; or alternatively, a C_8 to C_{20} aralkane nitrile. In some embodiments, each nitrile ligand independently can be a C_2 to C_{10} aliphatic nitrile, a C_7 to C_{10} aromatic nitrile, a C_8 to C_{10} aralkane nitrile, or any combination thereof; alternatively, a C_1 to C_{10} aliphatic nitrile; alternatively, a C_7 to C_{10} aromatic nitrile; or alternatively, a C_8 to C_{10} aralkane nitrile. In an embodiment, each aliphatic nitrile independently can be acetonitrile, propionitrile, a butyronitrile, benzonitrile, or any combination thereof; alternatively, acetonitrile; alternatively, propionitrile; alternatively, a butyronitrile; or alternatively, benzonitrile.

Generally, each ether ligand independently can be a C_2 to C_{40} , a C_2 to C_{30} , or a C_2 to C_{20} ether. In an embodiment, each ether ligand independently can be a C_2 to C_{40} aliphatic ether, a C_3 to C_{40} aliphatic cyclic ether, a C_4 to C_{40} aromatic cyclic ether; alternatively, a C_2 to C_{40} aliphatic acyclic ether or a C_3 to C_{40} aliphatic cyclic ether; alternatively, a C_2 to C_{40} aliphatic acyclic ether; alternatively, a C_3 to C_{40} aliphatic cyclic ether; or alternatively, a C_4 to C_{40} aromatic cyclic ether. In some embodiments,

each ether ligand independently can be a C₂ to C₃₀ aliphatic ether, a C₃ to C₃₀ aliphatic cyclic ether, a C₄ to C₃₀ aromatic cyclic ether; alternatively, a C₂ to C₃₀ aliphatic acyclic ether or a C₃ to C₃₀ aliphatic cyclic ether; alternatively, a C₂ to C₃₀ aliphatic acyclic ether; alternatively, a C₃ to C₃₀ aliphatic cyclic ether; or alternatively, a C₄ to C₃₀ aromatic cyclic ether. In other embodiments, each ether ligand

5 independently can be a C₂ to C₂₀ aliphatic ether, a C₃ to C₂₀ aliphatic cyclic ether, or a C₄ to C₂₀ aromatic cyclic ether; alternatively, a C₂ to C₂₀ aliphatic acyclic ether or a C₃ to C₂₀ aliphatic cyclic ether; alternatively, a C₂ to C₂₀ aliphatic acyclic ether; alternatively, a C₃ to C₂₀ aliphatic cyclic ether; or alternatively, a C₄ to C₂₀ aromatic cyclic ether. In some embodiments, each ether ligand

10 independently can be dimethyl ether, diethyl ether, a dipropyl ether, a dibutyl ether, methyl ethyl ether, a methyl propyl ether, a methyl butyl ether, tetrahydrofuran, a dihydrofuran, 1,3-dioxolane, tetrahydropyran, a dihydropyran, a pyran, a dioxane, furan, benzofuran, isobenzofuran, isobenzofuran, dibenzofuran, diphenyl ether, a ditolyl ether, or any combination thereof; alternatively, dimethyl ether, diethyl ether, a dipropyl ether, a dibutyl ether, methyl ethyl ether, a methyl propyl ether, a methyl butyl ether, or any combination thereof; alternatively, tetrahydrofuran, a dihydrofuran, 1,3-dioxolane,

15 tetrahydropyran, a dihydropyran, a pyran, a dioxane, or any combination thereof; alternatively, furan, benzofuran, isobenzofuran, isobenzofuran, dibenzofuran, or any combination thereof; alternatively, diphenyl ether, a ditolyl ether, or any combination thereof; alternatively, dimethyl ether; alternatively, diethyl ether; alternatively, a dipropyl ether; alternatively, a dibutyl ether; alternatively, methyl ethyl ether; alternatively, a methyl propyl ether; alternatively, a methyl butyl ether; alternatively,


20 tetrahydrofuran; alternatively, a dihydrofuran; alternatively, 1,3-dioxolane; alternatively, tetrahydropyran; alternatively, a dihydropyran; alternatively, a pyran; alternatively, a dioxane; alternatively, furan; alternatively, benzofuran; alternatively, isobenzofuran; alternatively, isobenzofuran; alternatively, dibenzofuran; alternatively, diphenyl ether; or alternatively, a ditolyl ether.

25 In some particular embodiments, the heteroatomic ligand transition metal compound complex can comprise, can consist essentially of, or can be, an N²-phosphinyl formamidine chromium compound complex having the Structure NPFCr1, an N²-phosphinyl amidine chromium compound complex having the Structure NPACr1, or an N²-phosphinyl guanidine chromium compound complex having the Structure GuCr1, GuCr2, GuCr3, GuCr4, or GuCr5; alternatively, an N²-phosphinyl


30 formamidine chromium compound complex having the Structure NPFCr1; alternatively, an N²-phosphinyl amidine chromium compound complex having the Structure NPACr1; or alternatively, an N²-phosphinyl guanidine chromium compound complex having the Structure GuCr1, GuCr2, GuCr3, GuCr4, or GuCr5; alternatively, an N²-phosphinyl guanidine chromium compound complex having the Structure GuCr1; alternatively, an N²-phosphinyl guanidine chromium compound complex having

35 the Structure GuCr2; alternatively, an N²-phosphinyl guanidine chromium compound complex having the Structure GuCr3; alternatively, an N²-phosphinyl guanidine chromium compound complex having


the Structure GuCr4; or alternatively, an N²-phosphinyl guanidine chromium compound complex having the Structure GuCr5.




Structure NPFCr1




Structure NPACr1




Structure GuCr1




Structure GuCr2



Structure GuCr3




Structure GuCr4




Structure GuCr5

Generally, R¹, R², R^{2a}, R^{2b}, R³, R⁴, R⁵, L¹², L²³, L²³, X, p, Q, and q for the N²-phosphinyl formamidine chromium compound complexes, N²-phosphinyl amidine chromium compound complexes, and N²-phosphinyl guanidine chromium compound complexes can be any group disclosed herein for the respective N²-phosphinyl formamidine transition metal compound complexes, N²-phosphinyl amidine transition metal compound complexes, and N²-phosphinyl guanidine transition metal compound complexes.


In a non-limiting embodiment, the N²-phosphinyl formamidine chromium compound complex can be any one or more of NPFCr I, NPFCr II, NPFCr III, NPFCr IV, NPFCr V, and NPFCr VI. In a non-limiting embodiment, the N²-phosphinyl amidine chromium compound complex can be any one or more of NPACr I, NPACr II, NPACr III, NPACr IV, NPACr V, NPACr VI, NPACr VII, NPACr VIII, NPACr IX, NPACr X, NPACr XI, and NPACr XII. In a non-limiting embodiment, the N²-phosphinyl guanidine chromium compound complex can be any one or more of GuFCr I, GuCr II, GuCr III, GuCr IV, GuCr V, and GuCr VI.




NPFCr I




NPFCr II




NPFCr III




NPFCr IV




NPFCr V




NPFCr VI




NPACr I




NPACr II




NPACr III




NPACr IV




NPACr V




NPACr VI




NPACr VII




NPACr VIII




NPACr IX




NPACr X




NPACr XI




NPACr XII




NPACr I




NPACr I




NPACr I




NPACr I




GuCr I




GuCr II




GuCr III



GuCr IV



GuCr V



GuCrV I

In a non-limiting embodiments, the chromium compound, CrX_3 , of any of NPFCr I, NPFCr II, NPFCr III, NPFCr IV, NPFCr V, NPFCr VI, NPACr I, NPACr II, NPACr III, NPACr IV, NPACr V, NPACr VI, NPACr VII, NPACr VIII, NPACr IX, NPACr X, NPACr XI, NPACr XII, GuFCr I, GuCr II, GuCr III, GuCr IV, GuCr V, and GuCr VI can be chromium(III) chloride or chromium(III) acetylacetonate; alternatively, chromium(III) chloride; or alternatively, chromium(III) acetylacetonate.

Chemically-Treated Solid Oxides

In the catalyst systems and oligomerization processes disclosed herein, any suitable chemically-treated solid oxide can be employed, whether one chemically-treated solid oxide or a mixture or combination of two or more different chemically-treated solid oxides. In one embodiment, the chemically-treated solid oxide can comprise a solid oxide treated with an electron-withdrawing anion. Alternatively, in another embodiment, the chemically-treated solid oxide can comprise a solid oxide treated with an electron-withdrawing anion, the solid oxide containing a Lewis-acidic metal ion. Non-limiting examples of suitable chemically-treated solid oxides are disclosed in, for instance, U.S. Patent Nos. 7,294,599, 7,601,665, 7,884,163, 8,309,485, 8,623,973, 8,703,886, and 9,023,959.

The solid oxide can encompass oxide materials such as alumina, "mixed oxides" thereof such as silica-alumina, coatings of one oxide on another, and combinations and mixtures thereof. The mixed oxides such as silica-alumina can be single or multiple chemical phases with more than one metal combined with oxygen to form the solid oxide. Examples of mixed oxides that can be used to form a chemically-treated solid oxide, either singly or in combination, can include, but are not limited to, silica-alumina, silica-titania, silica-zirconia, alumina-titania, alumina-zirconia, zinc-aluminate, alumina-boria, silica-boria, aluminophosphate-silica, and titania-zirconia. The solid oxide used herein also can encompass oxide materials such as silica-coated alumina, as described in U.S. Patent No. 7,884,163 (e.g., Sasol Siral[®] 28, Sasol Siral[®] 40, etc.)

Accordingly, in one embodiment, the solid oxide can comprise silica, alumina, silica-alumina, silica-coated alumina, aluminum phosphate, aluminophosphate, heteropolytungstate, titania, silica-titania, zirconia, silica-zirconia, magnesia, boria, zinc oxide, any mixed oxide thereof, or any combination thereof. In another embodiment, the solid oxide can comprise alumina, silica-alumina, silica-coated alumina, aluminum phosphate, aluminophosphate, heteropolytungstate, titania, silica-titania, zirconia, silica-zirconia, magnesia, boria, or zinc oxide, as well as any mixed oxide thereof, or any mixture thereof. The solid oxides contemplated herein can have any suitable surface area, pore volume, and particle size, as would be recognized by those of skill in the art. In another embodiment, the solid oxide can comprise silica, alumina, titania, zirconia, magnesia, boria, zinc oxide, any mixed oxide thereof, or any combination thereof. In yet another embodiment, the solid oxide can comprise silica-alumina, silica-coated alumina, silica-titania, silica-zirconia, alumina-boria, or any combination thereof. In still another embodiment, the solid oxide can comprise silica, alumina, silica-alumina,

silica-coated alumina, or any mixture thereof; alternatively, silica; alternatively, alumina; alternatively, silica-alumina; or alternatively, silica-coated alumina.

The silica-coated alumina solid oxide materials which can be used in the catalyst systems and oligomerization processes often are alumina-rich, for instance, the weight ratio of alumina to silica (alumina:silica) in the silica-coated alumina can be in a range from 1.05:1 to 50:1, from 1.1:1 to 50:1, or from 1.2:1 to 50:1. In one embodiment, the weight ratio of alumina:silica in the silica-coated alumina can be in a range from 1.05:1 to 25:1; alternatively, from 1.05:1 to 12:1; alternatively, from 1.05:1 to 6:1; or alternatively, from 1.05:1 to 4:1. In another embodiment, the weight ratio of alumina:silica in the silica-coated alumina can be in a range from 1.1:1 to 25:1; alternatively, from 1.1:1 to 12:1; alternatively, from 1.1:1 to 7:1; or alternatively, from 1.1:1 to 3:1. In yet another embodiment, the weight ratio of alumina:silica in the silica-coated alumina can be in a range from 1.2:1 to 25:1; alternatively, from 1.2:1 to 12:1; alternatively, from 1.2:1 to 6:1; alternatively, from 1.2:1 to 4:1; or alternatively, from 1.2:1 to 3:1. In still another embodiment, the weight ratio of alumina:silica in the silica-coated alumina can be in a range from 1.3:1 to 25:1; alternatively, from 1.3:1 to 12:1; alternatively, from 1.3:1 to 6:1; alternatively, from 1.3:1 to 4:1; or alternatively, from 1.3:1 to 3:1.

The electron-withdrawing component used to treat the solid oxide can be any component that can increase the Lewis or Brønsted acidity of the solid oxide upon treatment (as compared to the solid oxide that is not treated with at least one electron-withdrawing anion). According to one embodiment, the electron-withdrawing component can be an electron-withdrawing anion derived from a salt, an acid, or other compound, such as a volatile organic compound, that serves as a source or precursor for that anion. Examples of electron-withdrawing anions can include, but are not limited to, sulfate, bisulfate, fluoride, chloride, bromide, iodide, fluorosulfate, fluoroborate, phosphate, acetate, fluorophosphate, trifluoroacetate, triflate, fluoroaluminate, fluorozirconate, fluorotitanate, phospho-tungstate, tungstate, and molybdate, including mixtures and combinations thereof. In addition, other ionic or non-ionic compounds that serve as sources for these electron-withdrawing anions also can be employed. It is contemplated that the electron-withdrawing anion can be, or can comprise, fluoride, chloride, bromide, phosphate, triflate, bisulfate, or sulfate, or any combination thereof, in some embodiments provided herein. In other embodiments, the electron-withdrawing anion can comprise sulfate, bisulfate, fluoride, chloride, bromide, iodide, fluorosulfate, fluoroborate, phosphate, acetate, fluorophosphate, trifluoroacetate, triflate, fluoroaluminate, fluorozirconate, fluorotitanate, or combinations thereof. Yet, in other embodiments, the electron-withdrawing anion can comprise sulfate, fluoride, chloride, or combinations thereof; alternatively, sulfate; alternatively, fluoride and chloride; or alternatively, fluoride.

The chemically-treated solid oxide generally can contain from 1 to 30 wt. % of the electron-withdrawing anion, based on the weight of the chemically-treated solid oxide. In particular embodiments provided herein, the chemically-treated solid oxide can contain from 1 to 20 wt. %,

from 2 to 20 wt. %, from 3 to 20 wt. %, from 2 to 15 wt. %, from 3 to 15 wt. %, from 3 to 12 wt. %, from 4 to 10 wt. %, or from 5 to 9 wt. %, of the electron-withdrawing anion, based on the total weight of the chemically-treated solid oxide.

In an embodiment, the chemically-treated solid oxide can comprise fluorided alumina, chlorided alumina, bromided alumina, sulfated alumina, fluorided silica-alumina, chlorided silica-alumina, bromided silica-alumina, sulfated silica-alumina, fluorided silica-zirconia, chlorided silica-zirconia, bromided silica-zirconia, sulfated silica-zirconia, fluorided silica-titania, fluorided silica-coated alumina, fluorided-chlorided silica-coated alumina, sulfated silica-coated alumina, or phosphated silica-coated alumina, as well as any mixture or combination thereof. In another embodiment, the chemically-treated solid oxide employed in the catalyst systems and oligomerization processes described herein can be, or can comprise, a fluorided solid oxide and/or a sulfated solid oxide, non-limiting examples of which can include fluorided alumina, sulfated alumina, fluorided silica-alumina, sulfated silica-alumina, fluorided silica-zirconia, fluorided silica-coated alumina, fluorided-chlorided silica-coated alumina, or sulfated silica-coated alumina, as well as combinations thereof. In yet another embodiment, the chemically-treated solid oxide can comprise fluorided alumina; alternatively, chlorided alumina; alternatively, sulfated alumina; alternatively, fluorided silica-alumina; alternatively, sulfated silica-alumina; alternatively, fluorided silica-zirconia; alternatively, chlorided silica-zirconia; alternatively, sulfated silica-coated alumina; alternatively, fluorided-chlorided silica-coated alumina; or alternatively, fluorided silica-coated alumina. In some embodiments, the chemically-treated solid oxide can comprise a fluorided solid oxide, while in other embodiments, the chemically-treated solid oxide can comprise a sulfated solid oxide.

Various processes can be used to form chemically-treated solid oxides useful in the present invention. Methods of contacting the solid oxide with the electron-withdrawing component, suitable electron withdrawing components and addition amounts, impregnation with metals or metal ions (e.g., zinc, nickel, vanadium, titanium, silver, copper, gallium, tin, tungsten, molybdenum, zirconium, or combinations thereof), various calcining procedures and conditions (e.g., calcining temperatures in a range from 300 °C to 900 °C, from 400 °C to 800 °C, or from 500 °C to 700 °C), calcination times (e.g., calcination times in a range from 1 minute to 24 hours, from 5 minutes to 10 hours, or from 20 minutes to 6 hours), calcination equipment (e.g., calcination equipment such as a rotary kiln, muffle furnace, or fluidized bed, among other methods of conveying heat), and calcination atmospheres (e.g., dry or humid calcination atmospheres, oxidizing calcination atmospheres such as air or oxygen, reducing calcination atmospheres such as carbon monoxide or hydrogen, or non-reactive calcination atmospheres like nitrogen or argon) are disclosed in, for example, U.S. Patent Nos. 6,107,230, 6,165,929, 6,294,494, 6,300,271, 6,316,553, 6,355,594, 6,376,415, 6,388,017, 6,391,816, 6,395,666, 6,524,987, 6,548,441, 6,548,442, 6,576,583, 6,613,712, 6,632,894, 6,667,274, 6,750,302, 7,294,599, 7,601,665, 7,884,163, and 8,309,485. Other suitable processes and procedures for preparing

chemically-treated solid oxides (e.g., chemically-treated silica-coated aluminas, such as fluorided silica-coated alumina) are well known to those of skill in the art.

Organoaluminum Compounds

5 Generally, the organoaluminum compound utilized in the catalyst systems disclosed herein can be any organoaluminum compound which can catalyze the formation of an oligomer product. In an aspect, the organoaluminum compound can comprise an aluminoxane, an alkylaluminum compound, or a combination thereof; alternatively, an aluminoxane; or alternatively, an alkylaluminum compound. In an embodiment, the alkylaluminum compound can be a
10 trialkylaluminum, an alkylaluminum halide, an alkylaluminum alkoxide, or any combination thereof. In some embodiments, the alkylaluminum compound can be a trialkylaluminum, an alkylaluminum halide, or any combination thereof; alternatively, a trialkylaluminum, an alkylaluminum halide, or any combination thereof; or alternatively, a trialkylaluminum. In other embodiments, the alkylaluminum compound can be a trialkylaluminum; alternatively, an alkylaluminum halide; or alternatively, an
15 alkylaluminum alkoxide.

 In an aspect, each alkyl group of any alkylaluminum compound disclosed herein (trialkylaluminum, alkylaluminum halide, or alkylaluminum alkoxide) independently can be, comprise, or consist essentially of, a C₁ to C₂₀ alkyl group; alternatively, a C₁ to C₁₀ alkyl group; or alternatively, a C₁ to C₆ alkyl group. In an embodiment, each alkyl group of any alkylaluminum
20 compound disclosed herein independently can be, comprise, or consist essentially of, a methyl group, an ethyl group, a propyl group, a butyl group, a pentyl group, a hexyl group, a heptyl group, or an octyl group; alternatively, a methyl group, an ethyl group, a butyl group, a hexyl group, or an octyl group. In some embodiments, each alkyl group independently can be, comprise, or consist essentially of, a methyl group, an ethyl group, an n-propyl group, an n-butyl group, an iso-butyl group, an n-
25 hexyl group, or an n-octyl group; alternatively, a methyl group, an ethyl group, an n-butyl group, or an iso-butyl group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, an n-propyl group; alternatively, an n-butyl group; alternatively, an iso-butyl group; alternatively, an n-hexyl group; or alternatively, an n-octyl group.

 In an aspect, each halide of any alkylaluminum halide disclosed herein can be, comprise, or
30 consist essentially of, chloride, bromide, or iodide. In some embodiments, each halide of any alkylaluminum halide disclosed herein can be, comprise, or consist essentially of, chloride or bromide; or alternatively, chloride.

 In an aspect, each alkoxide group of any alkylaluminum alkoxide disclosed herein independently can be, comprise, or consist essentially of, a C₁ to C₂₀ alkoxy group; alternatively, a C₁
35 to C₁₀ alkoxy group; or alternatively, a C₁ to C₆ alkoxy group. In an embodiment, each alkoxide group of any alkylaluminum alkoxide disclosed herein independently can be, comprise, or consist essentially of, a methoxy group, an ethoxy group, a propoxy group, a butoxy group, a pentoxy group,

a hexoxy group, a heptoxy group, or an octoxy group; alternatively, a methoxy group, an ethoxy group, a butoxy group, a hexoxy group, or an octoxy group. In some embodiments, each alkoxide group of any alkylaluminum alkoxide disclosed herein independently can be, comprise, or consist essentially of, a methoxy group, an ethoxy group, an n-propoxy group, an n-butoxy group, an iso-butoxy group, an n-hexoxy group, or an n-octoxy group; alternatively, a methoxy group, an ethoxy group, an n-butoxy group, or an iso-butoxy group; alternatively, a methoxy group; alternatively, an ethoxy group; alternatively, an n-propoxy group; alternatively, an n-butoxy group; alternatively, an iso-butoxy group; alternatively, an n-hexoxy group; or alternatively, an n-octoxy group.

In a non-limiting embodiment, the trialkylaluminum compound can be, comprise, or consist essentially of, trimethylaluminum, triethylaluminum, tripropylaluminum, tributylaluminum, trihexylaluminum, trioctylaluminum, or mixtures thereof. In some non-limiting embodiments, the trialkylaluminum compound can be, comprise, or consist essentially of, trimethylaluminum, triethylaluminum, tripropylaluminum, tri-n-butylaluminum, tri-isobutylaluminum, trihexylaluminum, tri-n-octylaluminum, or mixtures thereof; alternatively, triethylaluminum, tri-n-butylaluminum, tri-isobutylaluminum, trihexylaluminum, tri-n-octylaluminum, or mixtures thereof; alternatively, triethylaluminum, tri-n-butylaluminum, trihexylaluminum, tri-n-octylaluminum, or mixtures thereof. In other non-limiting embodiments, the trialkylaluminum compound can be, comprise, or consist essentially of, trimethylaluminum; alternatively, triethylaluminum; alternatively, tripropylaluminum; alternatively, tri-n-butylaluminum; alternatively, tri-isobutylaluminum; alternatively, trihexylaluminum; or alternatively, tri-n-octylaluminum.

In a non-limiting embodiment, the alkylaluminum halide can be, comprise, or consist essentially of, diethylaluminum chloride, diethylaluminum bromide, ethylaluminum dichloride, ethylaluminum sesquichloride, or mixtures thereof. In some non-limiting embodiments, the alkylaluminum halide can be, comprise, or consist essentially of, diethylaluminum chloride, ethylaluminum dichloride, ethylaluminum sesquichloride, or mixtures thereof. In other non-limiting embodiments, the alkylaluminum halide can be, comprise, or consist essentially of, diethylaluminum chloride; alternatively, diethylaluminum bromide; alternatively, ethylaluminum dichloride; or alternatively, ethylaluminum sesquichloride.

In particular aspects of this invention, the organoaluminum compound can comprise trimethylaluminum (TMA), triethylaluminum (TEA), tri-n-propylaluminum (TNPA), tri-n-butylaluminum (TNBA), triisobutylaluminum (TIBA), tri-n-hexylaluminum, tri-n-octylaluminum (TNOA), diisobutylaluminum hydride, diethylaluminum ethoxide, diethylaluminum chloride, or combinations thereof.

Aluminoxanes

In a non-limiting embodiment, the aluminoxane can have a repeating unit characterized by the Formula I:



wherein R' is a linear or branched alkyl group. Alkyl groups for the aluminoxane compounds are independently described herein and can be utilized without limitation to further describe the aluminoxanes having Formula I. Generally, n of Formula I can be greater than 1, or alternatively, greater than 2. In an embodiment, n can range from 2 to 15, or alternatively, n can range from 3 to 10.

In a non-limiting embodiment, the aluminoxane can be, comprise, or consist essentially of, methylaluminoxane (MAO), ethylaluminoxane, modified methylaluminoxane (MMAO), n-propylaluminoxane, iso-propyl-aluminoxane, n-butylaluminoxane, sec-butylaluminoxane, iso-butylaluminoxane, t-butylaluminoxane, 1-pentyl-aluminoxane, 2-pentyl-aluminoxane, 3-pentyl-aluminoxane, iso-pentyl-aluminoxane, neopentylaluminoxane, or mixtures thereof. In some non-limiting embodiments, the aluminoxane can be, comprise, or consist essentially of, methylaluminoxane (MAO), modified methylaluminoxane (MMAO), isobutyl aluminoxane, t-butyl aluminoxane, or mixtures thereof. In other non-limiting embodiments, the aluminoxane can be, comprise, or consist essentially of, methylaluminoxane (MAO); alternatively, ethylaluminoxane; alternatively, modified methylaluminoxane (MMAO); alternatively, n-propylaluminoxane; alternatively, iso-propyl-aluminoxane; alternatively, n-butylaluminoxane; alternatively, sec-butylaluminoxane; alternatively, iso-butylaluminoxane; alternatively, t-butyl aluminoxane; alternatively, 1-pentyl-aluminoxane; alternatively, 2-pentylaluminoxane; alternatively, 3-pentyl-1aluminoxane; alternatively, iso-pentyl-aluminoxane; or alternatively, neopentylaluminoxane.

PROCESSES FOR PREPARING THE CATALYST SYSTEMS

Generally, the process for preparing the catalyst system can comprise (or consist essentially of, or consist of) contacting a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound to form a catalyst system mixture. In some embodiments the catalyst system mixture can be aged for a period of time. Typically, the minimum aging time can be 5 seconds, 10 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, or 20 minutes; additionally or alternatively, the maximum aging time can be 48 hours, 36 hours, 24 hours, 18 hours, 12 hours, 6 hours, 4 hours, or 2 hours. Generally, the aging time can be in a range from any minimum time disclosed herein to any maximum time disclosed herein. Accordingly, suitable non-limiting ranges for the aging time can include the following: from 5 seconds to 48 hours, from 10 seconds to 36 hours, from 30 seconds to 24 hours, from 1 minute to 18 hours, from 5 minutes to 6 hours, from 10 minutes to 4 hours, or from 20 minutes to 2 hours. Other appropriate ranges for the aging time are readily apparent from this disclosure. In further embodiments, the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, and the organoaluminum compound can be contacted and/or aged at any suitable temperature, ranging from sub-ambient temperatures, to

ambient temperature (approximately 25 °C), to elevated temperatures. While not limited thereto, the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, and the organoaluminum compound can be contacted and/or aged at a temperature in a range from 0 °C to 100 °C, from 10 °C to 75 °C, from 15 °C to 60 °C, or from 20 °C to 40 °C. In these and other
5 embodiments, these temperature ranges also are meant to encompass circumstances where the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, and the organoaluminum compound can be contacted and/or the catalyst system aged at a series of different temperatures, instead of at a single fixed temperature, falling within the respective ranges.

Various catalyst system preparation processes relating to how the heteroatomic ligand
10 transition metal compound complex (one or more), the chemically-treated solid oxide (one or more), and the organoaluminum compound (one or more) can be contacted are disclosed and described herein. While these processes for preparing the catalyst systems may be referred to as a first process, second process, third process etc., these designations do not imply that there is any preference or advantage to the process for preparing the catalyst system. A first process for preparing the catalyst
15 system can comprise (or consist essentially of, or consist of): (i) contacting a chemically-treated solid oxide and an organoaluminum compound for a first period of time to form a precontacted mixture; and (ii) contacting the precontacted mixture with a heteroatomic ligand transition metal compound complex for a second period of time to form the catalyst system.

A second process for preparing a catalyst system in accordance with this invention can
20 comprise: (i) contacting a heteroatomic ligand transition metal compound complex and an organoaluminum compound for a first period of time to form a precontacted mixture; and (ii) contacting the precontacted mixture with a chemically-treated solid oxide for a second period of time to form the catalyst system.

Generally, the features of any of the first and second processes for preparing the catalyst
25 system disclosed herein (e.g., the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, the organoaluminum compound, the first period of time, and the second period of time, among others) are independently described herein, and these features can be combined in any combination to further describe the disclosed first and second processes for preparing the catalyst system. Moreover, other process steps can be conducted before, during, and/or
30 after any of the steps listed in the disclosed first and second processes for preparing the catalyst system, unless stated otherwise. Additionally, catalyst systems produced in accordance with the disclosed first and second processes for preparing the catalyst system are within the scope of this disclosure and are encompassed herein.

The duration of the precontacting step (the first period of time) in the first and second
35 processes for preparing the catalyst system is not limited to any particular period of time. Likewise, assuming that the catalyst system is not intended for long term storage, which could extend for days or weeks, the second period of time is not limited to any particular period of time. The appropriate

first period of time and second period of time independently can depend upon, for example, the relative amounts of the respective catalyst system components, the temperatures at which the components are contacted, the presence of diluents or solvents in the contacting steps, and the degree of mixing, among other variables. Typically, however, the minimum first period of time and second period of time, independently, can be 5 seconds, 10 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, or 20 minutes; additionally or alternatively, the maximum first period of time and second period of time, independently, can be 48 hours, 36 hours, 24 hours, 18 hours, 12 hours, 6 hours, 4 hours, or 2 hours. Generally, the first period of time and the second period of time can be in a range from any minimum time disclosed herein to any maximum time disclosed herein. Accordingly, suitable non-limiting ranges for the first period of time and the second period of time independently can include the following: from 5 seconds to 48 hours, from 10 seconds to 36 hours, from 30 seconds to 24 hours, from 1 minute to 18 hours, from 5 minutes to 6 hours, from 10 minutes to 4 hours, or from 20 minutes to 2 hours. Other appropriate ranges for the first period of time and the second period of time are readily apparent from this disclosure.

Steps (i) and (ii) of the first and second processes for preparing the catalyst system can be conducted at any suitable temperature, ranging from sub-ambient temperatures, to ambient temperature (approximately 25 °C), to elevated temperatures. While not limited thereto, step (i) and step (ii), independently can be conducted at a temperature in a range from 0 °C to 100 °C, from 10 °C to 75 °C, from 15 °C to 60 °C, or from 20 °C to 40 °C. In these and other embodiments, these temperature ranges also are meant to encompass circumstances where step (i) or step (ii) is conducted at a series of different temperatures, instead of at a single fixed temperature, falling within the respective ranges.

In the first and second processes for preparing the catalyst system, the respective catalyst system components can be in any suitable phase and contacted in any manner. For instance, the chemically-treated solid oxide can be contacted with the other catalyst system components as a dry solid, or alternatively, as a slurry in a suitable diluent. Likewise, the organoaluminum compound can be contacted with the other catalyst system components as a neat liquid, or alternatively, as a solution in a suitable diluent.

A third process for preparing a catalyst system in accordance with this invention can comprise: (i) contacting a chemically-treated solid oxide and a first organoaluminum compound for a first period of time to form a first mixture; (ii) contacting a heteroatomic ligand transition metal compound complex and a second organoaluminum compound for a second period of time to form a second mixture; and (iii) contacting the first mixture with the second mixture for a third period of time to form the catalyst system.

Generally, the features of the third process for preparing the catalyst system (e.g., the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, the organoaluminum compound, the first period of time, the second period of time, and the third period of

time, among others) are independently described herein, and these features can be combined in any combination to further describe the third process for preparing the catalyst system. Moreover, other process steps can be conducted before, during, and/or after any of the steps listed in the disclosed third process for preparing the catalyst system, unless stated otherwise. Additionally, catalyst systems
5 produced in accordance with this process are within the scope of this disclosure and are encompassed herein.

The duration of the organoaluminum precontacting steps (the first period of time and the second period of time) in the process for preparing the catalyst system is not limited to any particular period of time. Likewise, assuming that the catalyst system is not intended for long term storage,
10 which could extend for days or weeks, the third period of time is not limited to any particular period of time. The appropriate first period of time, second period of time, and third period of time independently can depend upon, for example, the relative amounts of the respective catalyst system components, the temperatures at which the components are contacted, the presence of diluents or solvents in the contacting steps, and the degree of mixing, among other variables. Typically,
15 however, the minimum first period of time, second period of time, and third period of time, independently, can be 5 seconds, 10 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, or 20 minutes; additionally or alternatively, the maximum first period of time, second period of time, and third period of time, independently, can be 48 hours, 36 hours, 24 hours, 18 hours, 12 hours, 6 hours, 4 hours, or 2 hours. Generally, the first period of time, the second period of time, and the third period
20 of time independently can be in a range from any minimum time disclosed herein to any maximum time disclosed herein. Accordingly, suitable non-limiting ranges for the first period of time, the second period of time, and the third period of time can include the following: from 5 seconds to 48 hours, from 10 seconds to 36 hours, from 30 seconds to 24 hours, from 1 minute to 18 hours, from 5 minutes to 6 hours, from 10 minutes to 4 hours, or from 20 minutes to 2 hours. Other appropriate
25 ranges for the first period of time, the second period of time, and the third period of time are readily apparent from this disclosure.

As with the other processes for preparing catalyst systems in accordance with this invention, steps (i), (ii), and (iii) of the third process for preparing the catalyst system can be conducted at any suitable temperature, and the respective catalyst system components can be in any suitable phase and
30 contacted in any manner, as would be recognized by one of skill in the art. Moreover, the first organoaluminum compound in step (i) can be the same as or different from the second organoaluminum compound in step (ii).

A fourth process for preparing the catalyst system can comprise (or consist essentially of, or consist of): i) contacting the chemically-treated solid oxide and the heteroatomic ligand transition
35 metal compound complex for a first period of time to form a precontacted mixture, ii) contacting the precontacted mixture with the organoaluminum compound for a second period of time to form the catalyst system. Generally, the features of the fourth process for preparing the catalyst system (e.g.,

the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, the organoaluminum compound, the first period of time, and the second period of time, among others) are independently described herein, and these features can be combined in any combination to further describe the fourth process for preparing the catalyst system. Moreover, other process steps can be conducted before, during, and/or after any of the steps listed in the disclosed fourth process for preparing the catalyst system, unless stated otherwise. Additionally, catalyst systems produced in accordance with this process are within the scope of this disclosure and are encompassed herein.

The duration of the first period of time and the second period of time in the fourth process for preparing the catalyst system is not limited to any particular period of time. Likewise, assuming that the catalyst system is not intended for long term storage, which could extend for days or weeks, the second period of time is not limited to any particular period of time. The appropriate first period of time and second period of time independently can depend upon, for example, the relative amounts of the respective catalyst system components, the temperatures at which the components are contacted, the presence of diluents or solvents in the contacting steps, and the degree of mixing, among other variables. Typically, however, the minimum first period of time and second period of time, independently, can be 5 seconds, 10 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, or 20 minutes; additionally or alternatively, the maximum first period of time and second period of time, independently, can be 48 hours, 36 hours, 24 hours, 18 hours, 12 hours, 6 hours, 4 hours, or 2 hours. Generally, the first period of time and the second period of time independently can be in a range from any minimum time disclosed herein to any maximum time disclosed herein. Accordingly, suitable non-limiting ranges for the first period of time and the second period of time, independently, can include the following: from 5 seconds to 48 hours, from 10 seconds to 36 hours, from 30 seconds to 24 hours, from 1 minute to 18 hours, from 5 minutes to 6 hours, from 10 minutes to 4 hours, or from 20 minutes to 2 hours. Other appropriate ranges for the first period of time and the second period of time are readily apparent from this disclosure.

Steps (i) and (ii) of the fourth processes for preparing the catalyst system can be conducted at any suitable temperature, ranging from sub-ambient temperatures, to ambient temperature (approximately 25 °C), to elevated temperatures. While not limited thereto, step (i) and step (ii), independently can be conducted at a temperature in a range from 0 °C to 100 °C, from 10 °C to 75 °C, from 15 °C to 60 °C, or from 20 °C to 40 °C. In these and other embodiments, these temperature ranges also are meant to encompass circumstances where step (i) or step (ii) is conducted at a series of different temperatures, instead of at a single fixed temperature, falling within the respective ranges.

In the fourth process for preparing the catalyst system, the respective catalyst system components can be in any suitable phase and contacted in any manner. For instance, the chemically-treated solid oxide can be contacted with the other catalyst system components as a dry solid, or alternatively, as a slurry in a suitable diluent. Likewise, the organoaluminum compound can be

contacted with the other catalyst system components as a neat liquid, or alternatively, as a solution in a suitable diluent.

A fifth process for preparing the catalyst system can comprise (or consist essentially of, or consist of) simultaneously contacting the chemically-treated solid oxide, the organoaluminum compound, and the heteroatomic ligand transition metal compound complex for a period of time to form the catalyst system. Generally, the features of the fifth process for preparing the catalyst system (e.g., the heteroatomic ligand transition metal compound complex, the chemically-treated solid oxide, the organoaluminum compound, and the period of time, among others) are independently described herein, and these features can be combined in any combination to further describe the fifth process for preparing the catalyst system. Moreover, other process steps can be conducted before, during, and/or after any of the steps listed in the disclosed fifth process for preparing the catalyst system, unless stated otherwise. Additionally, catalyst systems produced in accordance with this process are within the scope of this disclosure and are encompassed herein.

The duration of the period of time in the fifth process for preparing the catalyst system is not limited to any particular period of time. Likewise, assuming that the catalyst system is not intended for long term storage, which could extend for days or weeks, the period of time is not limited to any particular period of time. The appropriate period of time can depend upon, for example, the relative amounts of the respective catalyst system components, the temperatures at which the components are contacted, the presence of diluents or solvents in the contacting steps, and the degree of mixing, among other variables. Typically, however, the minimum period of time can be 5 seconds, 10 seconds, 30 seconds, 1 minute, 5 minutes, 10 minutes, or 20 minutes; additionally or alternatively, the maximum period of time can be 48 hours, 36 hours, 24 hours, 18 hours, 12 hours, 6 hours, 4 hours, or 2 hours. Generally, the period of time can be in a range from any minimum time disclosed herein to any maximum time disclosed herein. Accordingly, suitable non-limiting ranges for the period of time can include the following: from 5 seconds to 48 hours, from 10 seconds to 36 hours, from 30 seconds to 24 hours, from 1 minute to 18 hours, from 5 minutes to 6 hours, from 10 minutes to 4 hours, or from 20 minutes to 2 hours. Other appropriate ranges for the period of time are readily apparent from this disclosure.

In the fifth processes for preparing the catalyst system can be formed at any suitable temperature, ranging from sub-ambient temperatures, to ambient temperature (approximately 25 °C), to elevated temperatures. While not limited thereto, the catalyst system can be formed at a temperature in a range from 0 °C to 100 °C, from 10 °C to 75 °C, from 15 °C to 60 °C, or from 20 °C to 40 °C. In these and other embodiments, these temperature ranges also are meant to encompass circumstances where the catalyst system is formed at a series of different temperatures, instead of at a single fixed temperature, falling within the respective ranges.

In the fifth process for preparing the catalyst system, the respective catalyst system components can be in any suitable phase and contacted in any manner. For instance, the chemically-

treated solid oxide can be contacted with the other catalyst system components as a dry solid, or alternatively, as a slurry in a suitable diluent. Likewise, the organoaluminum compound can be contacted with the other catalyst system components as a neat liquid, or alternatively, as a solution in a suitable diluent.

Unexpectedly, these processes for preparing catalyst systems can result in improvements in catalyst activity. For instance, the productivity of the catalyst system prepared by any of these three processes (in kg (C₆+C₈)/g transition metal, kg (C₆+C₈)/g transition metal/hr, or kg (C₆+C₈)/g Al) can be greater (e.g., by at least 10%, at least 25%, at least 50%, at least 100%, from 10% to 500% greater, from 25% to 200% greater, from 50% to 300% greater, etc.) than that of a catalyst system obtained by contacting the chemically-treated solid oxide and the heteroatomic ligand transition metal compound complex to form a first mixture, and then contacting the first mixture with the organoaluminum compound, or a catalyst system obtained by simultaneously contacting the chemically-treated solid oxide, the heteroatomic ligand transition metal compound complex, and the organoaluminum compound. This comparison is meant to be at the same oligomerization conditions (e.g., oligomerization temperature, ethylene pressure, etc.) and with the same catalyst system components (e.g., same amount/type of heteroatomic ligand transition metal compound, same amount/type of organoaluminum, same amount/type of chemically-treated solid oxide, such as fluorided silica-coated alumina or sulfated alumina, etc.). The same oligomerization conditions refer to using cyclohexane as a diluent, with an oligomerization temperature of 70 °C, an ethylene pressure of 875 psig, and a hydrogen pressure of 50 psig. Hence, the only difference is the method used to produce the catalyst system, i.e., the order or sequence of contacting the respective catalyst components.

Generally, in the catalyst systems and methods of their preparation disclosed herein, the weight ratio of chemically-treated solid oxide(s) to organoaluminum compound(s) can be in a range from 1:10 to 1000:1, or from 1:5 to 1000:1. If more than one organoaluminum compound and/or more than one chemically-treated solid oxide are employed, this ratio is based on the total weight of each respective component. In an embodiment, the weight ratio of the chemically-treated solid oxide to the organoaluminum compound can be in a range from 1:1 to 500:1, from 1:1 to 200:1, or from 1:1 to 100:1.

Likewise, the weight ratio of transition metal(s) of the heteroatomic ligand transition metal compound complex(es) to chemically-treated solid oxide(s) can be in a range from 1:1 to 1:1,000,000, or from 1:5 to 1:250,000. If more than one transition metal (or heteroatomic ligand transition metal compound complex) and/or more than one chemically-treated solid oxide are employed, this ratio is based on the total weight of each respective component. In an embodiment, the weight ratio of the transition metal of the heteroatomic ligand transition metal compound complex to the chemically-treated solid oxide can be in a range from 1:10 to 1:10,000, or from 1:20 to 1:1000.

In some embodiments, the catalyst systems and methods of their preparation are substantially free of aluminoxane compounds. In these embodiments, the catalyst system has catalyst activity or

productivity, as discussed herein, in the substantial absence of an aluminoxane. For example, a catalyst system of the present invention can consist essentially of a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound, wherein no other materials are present in the catalyst system which would increase/decrease the activity or productivity of the catalyst system by more than about 10% from the catalyst activity or productivity of the catalyst system in the absence of said materials (e.g., aluminoxane materials). Herein, substantially free of aluminoxane compounds or the substantial absence of an aluminoxane means that the catalyst system contain less than 5 wt.%, 2.5 wt.%, 1 wt.%, 0.5 wt.%, 0.25 wt.%, or 0.1 wt.% aluminoxane, based upon the total amount of organoaluminum compound in the catalyst system.

PROCESSES FOR PREPARING AN OLIGOMER PRODUCT

Embodiments of this invention are directed to ethylene oligomerization processes, the production of an oligomer product, and the formation and recovery of a liquid oligomer product; or alternatively, the production of an oligomer product, and the formation and recovery of a liquid oligomer product and a solid polymer product. Typical properties for the liquid oligomer, portions of the liquid oligomer product, and the solid polymer product are disclosed herein and can be used without limitation to further describe the ethylene oligomerization processes describe herein. One such process can comprise (or consist essentially of, or consist of) (a) contacting ethylene, any of the catalyst systems disclosed herein, and an optional organic reaction medium, and (b) forming an oligomer product. Another process consistent with this invention can comprise (or consist essentially of, or consist of) (a) preparing a catalyst system in accordance with any method disclosed herein, (b) contacting the catalyst system prepared in step (a) with ethylene and an optional organic reaction medium, and (c) forming an oligomer product. In an embodiment of the ethylene oligomerization process described herein, the oligomer product can be formed in a reaction zone.

Generally, the features of the processes described herein (e.g., the catalyst system, the method of preparing the catalyst system, the organic reaction medium, the materials comprising and/or features of the oligomer product, the oligomerization (trimerization, tetramerization, or trimerization and tetramerization) conditions under which the oligomer (trimerization, tetramerization, or trimerization and tetramerization) product is formed, the reaction zone, among others) are independently described herein, and these features can be combined without limitation, and in any combination, to further describe the disclosed processes. Moreover, additional process steps can be performed before, during, and/or after any of the steps of any of the processes disclosed herein, unless stated otherwise.

In some embodiments, the oligomer product can be formed in the presence of an organic reaction medium. When employed, any suitable organic reaction medium can be used. In an embodiment, the organic reaction medium can be a hydrocarbon. Hydrocarbons can include, for example, aliphatic hydrocarbons, aromatic hydrocarbons, petroleum distillates, or combinations

thereof; alternatively, aliphatic hydrocarbons; or alternatively, aromatic hydrocarbons. Aliphatic hydrocarbons which can be used as an organic reaction medium include C₃ to C₂₀ aliphatic hydrocarbons; alternatively C₄ to C₁₅ aliphatic hydrocarbons; or alternatively, C₅ to C₁₀ aliphatic hydrocarbons. The aliphatic hydrocarbons can be cyclic or acyclic and/or can be linear or branched, unless otherwise specified. In some embodiments, the aliphatic hydrocarbon which can be utilized as the organic reaction medium can be a hydrocarbon olefin (linear or branched, or terminal or internal). Non-limiting examples of suitable acyclic aliphatic hydrocarbon reaction medium that can be utilized singly or in any combination include propane, iso-butane, n-butane, butane (n-butane or a mixture of linear and branched C₄ acyclic aliphatic hydrocarbons), pentane (n-pentane or a mixture of linear and branched C₅ acyclic aliphatic hydrocarbons), hexane (n-hexane or a mixture of linear and branched C₆ acyclic aliphatic hydrocarbons), heptane (n-heptane or a mixture of linear and branched C₇ acyclic aliphatic hydrocarbons), octane (n-octane or a mixture of linear and branched C₈ acyclic aliphatic hydrocarbons), or combinations thereof; alternatively, iso-butane, n-butane, butane (n-butane or a mixture of linear and branched C₄ acyclic aliphatic hydrocarbons), pentane (n-pentane or a mixture of linear and branched C₅ acyclic aliphatic hydrocarbons), hexane (n-hexane or a mixture of linear and branched C₆ acyclic aliphatic hydrocarbons), heptane (n-heptane or a mixture of linear and branched C₇ acyclic aliphatic hydrocarbons), octane (n-octane or a mixture of linear and branched C₈ acyclic aliphatic hydrocarbons), or combinations thereof; alternatively, iso-butane, n-butane, butane (n-butane or a mixture of linear and branched C₄ acyclic aliphatic hydrocarbons), pentane (n-pentane or a mixture of linear and branched C₅ acyclic aliphatic hydrocarbons), heptane (n-heptane or a mixture of linear and branched C₇ acyclic aliphatic hydrocarbons), octane (n-octane or a mixture of linear and branched C₈ acyclic aliphatic hydrocarbons), or combinations thereof; alternatively, propane; alternatively, iso-butane; alternatively, n-butane; alternatively, butane (n-butane or a mixture of linear and branched C₄ acyclic aliphatic hydrocarbons); alternatively, pentane (n-pentane or a mixture of linear and branched C₅ acyclic aliphatic hydrocarbons); alternatively, hexane (n-hexane or a mixture of linear and branched C₆ acyclic aliphatic hydrocarbons); alternatively, heptane (n-heptane or a mixture of linear and branched C₇ acyclic aliphatic hydrocarbons); or alternatively, octane (n-octane or a mixture of linear and branched C₈ acyclic aliphatic hydrocarbons). In other embodiments, the acyclic aliphatic reaction medium can be a product of the oligomerization (1-hexene and/or 1-octene). Non-limiting examples of suitable cyclic aliphatic hydrocarbon reaction medium include cyclohexane and methyl cyclohexane; alternatively, cyclohexane; or alternatively, methylcyclohexane. Aromatic hydrocarbons which can be useful as an organic reaction medium include C₆ to C₂₀ aromatic hydrocarbons, or alternatively, C₆ to C₁₀ aromatic hydrocarbons. Non-limiting examples of suitable aromatic hydrocarbons that can be utilized singly or in any combination include benzene, toluene, xylene (including ortho-xylene, meta-xylene, para-xylene, or mixtures thereof), and ethylbenzene, or combinations thereof; alternatively, benzene; alternatively, toluene; alternatively, xylene (including ortho-xylene, meta-xylene, para-xylene or mixtures thereof); or alternatively, ethylbenzene.

The oligomer product can be formed at any suitable temperature or a temperature in any range disclosed herein. Often, the oligomer product can be formed at a minimum temperature of 0 °C, 20 °C, 30 °C, 40 °C, 45 °C, or 50 °C; additionally or alternatively, at a maximum temperature of 165 °C, 160 °C, 150 °C, 140 °C, 130 °C, 115 °C, 100 °C, or 90 °C. Generally, the temperature at which the oligomer product is formed can be in a range from any minimum temperature disclosed herein to any maximum temperature disclosed herein. Accordingly, suitable non-limiting ranges can include the following: from 0 °C to 165 °C, from 20 °C to 160 °C, from 20 °C to 115 °C, from 40 °C to 160 °C, from 40 °C to 140 °C, from 50 °C to 150 °C, from 50 °C to 140 °C, from 50 °C to 130 °C, from 50 °C to 100 °C, from 45 °C to 115 °C, from 45 °C to 100 °C, or from 45 °C to 90 °C. Other appropriate temperatures and temperature ranges at which the oligomer product can be formed are readily apparent from this disclosure.

The oligomer product can be formed at any suitable pressure or a pressure in any range disclosed herein. For example, the oligomer product can be formed at a minimum pressure (or ethylene partial pressure) of 50 psig (344 kPa), 100 psig (689 kPa), 200 psig (1.4 MPa), or 250 psig (1.5 MPa); additionally or alternatively, at a maximum pressure (or ethylene partial pressure) of 4,000 psig (27.6 MPa), 3,000 psig (20.9 MPa), 2,000 psig (13.8 MPa), or 1,500 psig (10.3 MPa). Generally, the pressure (or ethylene partial pressure) at which the oligomer product is formed can be in a range from any minimum pressure disclosed herein to any maximum pressure disclosed herein. Accordingly, suitable non-limiting ranges can include the following: from 50 psig (344 kPa) to 4,000 psig (27.6 MPa), from 100 psig (689 kPa) to 3,000 psig (20.9 MPa), from 100 psig (689 kPa) to 2,000 psig (13.8 MPa), from 200 psig (1.4 MPa) to 2,000 psig (13.8 MPa), from 200 psig (1.4 MPa) to 1,500 psig (10.3 MPa), or from 250 psig (1.5 MPa) to 1,500 psig (10.3 MPa). Other appropriate pressures (or ethylene partial pressures) at which the oligomer product can be formed are readily apparent from this disclosure.

In some embodiments, the oligomer product can be formed in the substantial absence of hydrogen. In these embodiments, the oligomer product is formed in the substantial absence of added hydrogen. As one of ordinary skill in the art would recognize, hydrogen can be generated in-situ by transition metal-based catalyst systems in various olefin oligomerization processes, and the amount generated can vary depending upon the specific catalyst system and heteroatomic ligand transition metal compound complex employed, the type of oligomerization process used, the oligomerization reaction conditions utilized, and so forth. Herein the substantial absence of hydrogen is defined as forming the oligomer product at partial pressure of added hydrogen of less than less than 1 psig (6.9 kPa), 0.5 psig (3.45 kPa), 0.25 psig (1.72 kPa), or 0.1 psig (0.69 kPa).

In other embodiments, it may be desirable to form the oligomer product in the presence of a of added hydrogen, for instance, to modify the molecular weight of the solid polymer, etc. In some embodiments, the productivity of the catalyst system can be increased by performing the oligomerization in the presence of hydrogen. Accordingly, in these embodiments, the oligomer

product can be formed in the presence of hydrogen, i.e., ethylene, the catalyst system, hydrogen, and an optional organic reaction medium can be contacted to form the oligomer product as described herein. For instance, the oligomer product can be formed at a hydrogen partial pressure of at least 1 psig (6.9 kPa), 5 psig (34 kPa), 10 psig (69 kPa), 25 psig (172 kPa), or 50 psig (345 kPa); additionally or alternatively, the oligomer product can be formed at a maximum hydrogen partial pressure of 2000 psig (13.8 MPa), 1750 psig (12.1 MPa), 1500 psig (10.3 MPa), 1250 psig (8.6 MPa), 1000 psig (6.9 MPa), 750 psig (5.2 MPa), 500 psig (3.4 MPa), or 400 psig (2.8 MPa). Generally, the hydrogen partial pressure can range from any minimum hydrogen partial pressure disclosed herein to any maximum hydrogen partial pressure disclosed herein. Therefore, suitable non-limiting ranges for the hydrogen partial pressure can include the following ranges: from 1 psig (6.9 kPa) to 2000 psig (13.8 MPa), from 1 psig (6.9 kPa) to 1750 psig (12.1 MPa), from 5 psig (34 kPa) to 1500 psig (10.3 MPa), from 5 psig (34 kPa) to 1250 psig (8.6 MPa), from 10 psig (69 kPa) to 1000 psig (6.9 MPa), from 10 psig (69 kPa) to 750 psig (5.2 MPa), from 10 psig (69 kPa) to 500 psig (3.5 MPa), from 25 psig (172 kPa) to 750 psig (5.2 MPa), from 25 psig (172 kPa) to 500 psig (3.4 MPa), from 25 psig (172 kPa) to 400 psig (2.8 MPa), or from 50 psig (345 kPa) to 500 psig (3.4 MPa). Other appropriate hydrogen partial pressures at which the oligomer product can be formed are readily apparent from this disclosure.

The reaction zone in which the oligomer product can be formed can comprise any suitable reactor. Non-limiting examples of reactors can include a stirred tank reactor, a plug flow reactor, or any combination thereof; alternatively, a fixed bed reactor, a continuous stirred tank reactor, a loop slurry reactor, a solution reactor, a tubular reactor, a recycle reactor, or any combination thereof. In an embodiment, the reaction zone can have more than one reactor in series or in parallel, and including any combination of reactor types and arrangements. Moreover, the oligomerization process used to form the oligomer product can be a continuous process or a batch process, or any reactor or vessel within the oligomerization reaction system can be operated continuously or batchwise.

The process described herein can include a step of discharging a reaction zone effluent comprising the oligomer product; alternatively, the oligomer product and the catalyst system; alternatively, the oligomer product and the solid polymer; or alternatively, the oligomer product, the solid polymer, and the catalyst system. In further embodiments the reaction zone effluent can further comprise ethylene and/or the optional organic reaction medium. In some processes described herein, the catalyst system can be deactivated. Deactivating the catalyst system can comprise contacting the reaction zone effluent with a suitable catalyst system deactivating agent, or subjecting the oligomer product to suitable process steps to deactivate the catalyst system, or a combination of both. The reaction zone effluent wherein the catalyst system has been deactivated can be referred to as a deactivated reaction zone effluent. The catalyst system deactivating agent can comprise (or consist essentially of, or consist of) water, an alcohol compound, an amine compound, or any combination thereof; alternatively, water; alternatively, an alcohol compound; or alternatively, an amine

compound. In an embodiment, the alcohol compound can be a monoalcohol compound, a diol compound, a polyol compound, or any combination thereof. In some embodiments, the alcohol compound can comprise, consist essentially of, or consist of, a C₁ to C₂₀ mono alcohol. In some embodiments, the alcohol compound can comprise, consist essentially of, or consist of, methanol, ethanol, a propanol, a butanol, a pentanol, a hexanol, a heptanol, an octanol, a nonanol, a decanol, an undecanol, or mixtures thereof. In some embodiments, the alcohol compound can comprise, consist essentially of, or consist of, methanol, ethanol, 1-propanol, 2-propanol, 1-butanol, 2-butanol, isobutanol, sec-butanol, t-butanol, 1-hexanol, 2-hexanol, 3-hexanol, 1-heptanol, 2-heptanol, 3-heptanol, 4-heptanol, 1-octanol, 2-octanol, 3-octanol, 4-octanol, 2-ethyl-1-hexanol, 2-methyl-3-heptanol, 1-decanol, 2-decanol, 3-decanol, 4-decanol, 5-decanol, 1-undecanol, 2-undecanol, 7-methyl-2-decanol, a 1-dodecanol, a 2-dodecanol, 2-ethyl-1-decanol, or mixtures thereof.

Additionally or alternatively, the catalyst system can be deactivated by contact with an aqueous base solution or aqueous acid solution (e.g., an aqueous Group 1 metal hydroxide solution or an aqueous mineral acid solution). Such deactivation processes to deactivate the catalyst system can also potentially remove a portion, or substantially all, of the metal catalyst system components from the oligomer product.

In some embodiments, the oligomer product can be formed in the substantial absence of aluminoxanes. In these embodiments, the oligomerization process can be conducted in the absence of these aluminoxane materials. For example, the process can be conducted wherein no other materials are present which would increase/decrease the activity or productivity of the catalyst system by more than about 10% from the catalyst activity or productivity of the catalyst system in the absence of said materials (e.g., aluminoxane materials). Herein, the substantial absence of aluminoxane means that the catalyst system contain less than 5 wt.%, 2.5 wt.%, 1 wt.%, 0.5 wt.%, 0.25 wt.%, or 0.1 wt.% aluminoxane, based upon the total amount of organoaluminum compound in the process.

In accordance with the processes of this invention, the productivity of the catalyst system under oligomerization conditions generally can be greater than 25,000 grams, greater than 50,000 grams, greater than 100,000 grams, greater than 150,000 grams, or greater than 200,000 grams, and often up to 350,000-500,000 grams, of C₆+C₈ per gram of transition metal (from the heteroatomic ligand transition metal compound complex). For the purpose of determining the productivity, the conditions under the oligomer product is formed can include a triethylaluminum co-catalyst, using cyclohexane as the reaction medium and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.

Additionally or alternatively, the productivity of the catalyst system under oligomerization conditions generally can be greater than 1,000 grams, greater than 2,500 grams, greater than 10,000 grams, greater than 25,000 grams, greater than 50,000 grams, or greater than 100,000 grams, and often up to 150,000-250,000 grams, of ethylene polymer per gram of transition metal (from the heteroatomic ligand transition metal compound complex). For the purpose of determining the

productivity, the conditions under the oligomer product is formed can include a triethylaluminum co-catalyst, using cyclohexane as the reaction medium and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.

Unexpectedly, the first, second, and third processes for preparing the catalyst system disclosed herein can result in improvements in the productivity of the catalyst system when utilized in the disclosed ethylene oligomerization processes in comparison to the fourth and fifth processes for preparing the catalyst system disclosed herein. The oligomerization productivity of the catalyst systems prepared by the first, second, and third catalyst system preparation processes (in kg (C₆+C₈)/g transition metal, kg (C₆+C₈)/g transition metal/hr, or kg (C₆+C₈)/g Al) can be greater (e.g., by at least 10%, at least 25%, at least 50%, at least 100%, from 10% to 500% greater, from 25% to 200% greater, from 50% to 300% greater, etc.) than that of a catalyst system obtained by contacting the chemically-treated solid oxide and the heteroatomic ligand transition metal compound complex to form a first mixture, and then contacting the first mixture with the organoaluminum compound; or a catalyst system obtained by simultaneously contacting the chemically-treated solid oxide, the heteroatomic ligand transition metal compound complex, and the organoaluminum compound. This comparison is meant to be at the same oligomerization conditions (e.g., oligomerization temperature, ethylene pressure, etc.) and with the same catalyst system components (e.g., same amount/type of heteroatomic ligand transition metal compound, same amount/type of organoaluminum, same amount/type of chemically-treated solid oxide, such as fluorided silica-coated alumina or sulfated alumina, etc.). Accordingly, the same oligomerization conditions can encompass identical catalyst system components, catalyst system component ratios, and ethylene oligomerization conditions. Alternatively, and for the purpose of determining the productivity, the same ethylene oligomerization conditions can refer to using cyclohexane as the reaction medium, with an oligomerization temperature of 70 °C, an ethylene pressure of 875 psig, and a hydrogen pressure of 50 psig. Hence, the only difference is the method used to produce the catalyst system, i.e., the order or sequence of contacting the respective catalyst components. While it has been discovered that there are unexpected advantages to using the first, second, and third catalyst system preparation processes over the fourth and fifth catalyst system preparation processes, this in no way implies that the fourth and fifth catalyst system preparation processes cannot be used in the ethylene oligomerization process described herein.

Consistent with embodiments of this invention, the oligomer product can comprise a liquid oligomer product and a solid polymer product. That is, the liquid oligomer product is a liquid at standard temperature (25 °C) and pressure (1 atm), and the solid polymer product is a solid at standard temperature (25 °C) and pressure (1 atm). As one of skill in the art would readily recognize, many of the materials disclosed herein can exist in a different phase when subjected to different processing conditions (e.g., different temperatures, different pressures).

In the processes described herein, the processes can further comprise a step of isolating the liquid oligomer product, e.g., from the reaction zone effluent, from the deactivated reaction zone

effluent, from the solid polymer product, from the organic reaction medium, etc., using any suitable technique. Additionally or alternatively, the process can further comprise a step of isolating the solid polymer product, e.g., from the reaction zone effluent, the deactivated reaction zone effluent, from the liquid oligomer product, from the organic reaction medium, etc., using any suitable technique.

5 Various suitable separation techniques can be employed, as would be recognized by those of skill in the art. In an embodiment, and not limited thereto, a filtration process, an evaporation process, or a distillation process can be used, as well as combinations of more than one separation technique.

In some embodiments, the process can further comprise a step of separating the solid polymer product – which comprises at least a portion of the catalyst system (or deactivated catalyst system) –
10 e.g., from the reaction zone effluent, the deactivated reaction zone effluent, from the liquid oligomer product, from the organic reaction medium, etc., using any suitable liquid-solid separation technique, such as a filtration process. Additional separation techniques can be employed, if desired.

Advantageously, the solid polymer product, in particular embodiments of this invention, can be insoluble in the organic reaction medium used in the oligomerization process. For instance, the
15 organic reaction medium can be any hydrocarbon organic reaction medium disclosed herein, such as cyclohexane or methylcyclohexane, among others. In further embodiments, and also advantageously, at least a portion of the solid polymer product can comprise particles of the chemically-treated solid oxide.

Advantageously, the oligomerization processes disclosed herein can be performed without
20 reactor fouling, for instance, there is no or substantially no reactor fouling in the reactor, whether a stirred tank reactor, a plug flow reactor, or any combination thereof; or alternatively, a fixed bed reactor, a continuous stirred tank reactor, a loop slurry reactor, a solution reactor, a tubular reactor, a recycle reactor, or any multi-reactor combination thereof. While not wishing to be bound by the following theory, it is believed that the molecular weight of the solid polymer product is such that the
25 polymer produced does not readily adhere to reactor surfaces, and therefore does not cause reactor fouling. The end result can be increased reactor run times and greater production efficiency.

Typically, although not a requirement, the amount of the solid polymer product in the oligomer product (liquid oligomer product + solid polymer product) can fall within a range from 2 to 80 wt. %. In an embodiment, the minimum amount of solid polymer product in the oligomer product
30 can be 2, 5, 10, or 15 wt. %. In an embodiment, the maximum amount of solid polymer product in the oligomer product can be 80, 75, 70, 65, or 60 wt. %. Generally, the amount of solid polymer product in the oligomer product can range from any minimum amount of solid polymer product in the oligomer product described herein to any maximum amount of solid polymer product in the oligomer product. For instance, the amount of the solid polymer product, based on the total weight of the
35 oligomer product, can be from 2 to 65 wt. %, from 2 to 30 wt. %, from 5 to 65 wt. %, from 5 to 30 wt. %, from 10 to 70 wt. %, from 10 to 60 wt. %, from 10 to 40 wt. %, or from 15 to 55 wt. %. Other

appropriate amounts of the solid polymer product in the oligomer product are readily apparent from this disclosure.

This invention is also directed to, and encompasses, the liquid oligomer product produced by any of the oligomerization processes disclosed herein. This liquid oligomer product can be characterized, generally, as follows. The liquid oligomer product can contain C₆ olefins; alternatively, C₈ olefins; or alternatively, C₆ and C₈ olefins. Based on the weight of the liquid oligomer product, the amount of C₆ and/or C₈ olefins (C₆ olefins, C₈ olefins, or total C₆ + C₈ olefins) typically falls within a range from 70 to 99.9 wt. %, from 80 to 99.9 wt. %, or from 90 to 99.9 wt. %, and more typically falls within a range from 92 to 99.9 wt. %, from 94 to 99.9 wt. %, or from 95 to 99.9 wt. %.

Selectivity to α -olefins in the liquid oligomer product is also unexpectedly high. In an embodiment, the C₆ olefins, of a liquid oligomer product comprising at least 10 wt. % C₆ olefins, can contain 1-hexene in an amount ranging from 90 to 99.99 mol %, from 95 to 99.99 mol %, from 98 to 99.99 mol %, from 99 to 99.99 mol %, or from 99 to 99.9 mol %. Likewise, in an embodiment, the C₈ olefins, of a liquid oligomer product comprising at least 10 wt. % C₈ olefins, can contain 1-octene in an amount ranging from 90 to 99.99 mol %, from 95 to 99.99 mol %, from 97 to 99.99 mol %, from 97 to 99.9 mol %, or from 98 to 99.99 mol %.

This invention is also directed to, and encompasses, the solid polymer product produced by any of the processes disclosed herein. This solid polymer product can be characterized by the amount of ethylene in the solid polymer product, the peak molecular weight (Mp) of the solid polymer product, and/or number-average molecular weight (Mn) of the solid polymer product. These features are independently described herein and these independently described features can be used without limitation, and in any combination, to describe the solid polymer product. The solid polymer product contains an ethylene polymer (e.g., ethylene homopolymer, ethylene copolymer, etc.) with at least 90 mol %, or at least 92 mol % ethylene, and more often, at least 95 mol %, at least 98 mol %, or at least 99 mol %, ethylene. In some embodiments, the solid polymer product is essentially an ethylene homopolymer. The solid polymer product typically can have a peak molecular weight (Mp) in a range from 30,000 to 200,000 g/mol, from 35,000 to 180,000 g/mol, from 30,000 to 170,000 g/mol, from 35,000 to 170,000 g/mol, from 40,000 to 200,000 g/mol, from 40,000 to 180,000 g/mol, from 40,000 to 160,000 g/mol, or from 45,000 to 165,000 g/mol. Additionally or alternatively, the solid polymer product can have a number-average molecular weight (Mn) in a range from 5,000 to 30,000 g/mol, from 5,000 to 25,000 g/mol, from 5,000 to 20,000 g/mol, from 7,000 to 25,000 g/mol, from 7,000 to 20,000 g/mol, from 8,000 to 30,000 g/mol, from 8,000 to 25,000 g/mol, or from 8,000 to 20,000 g/mol.

In particular embodiments of this invention, the process can further comprise a step of forming polymer pellets from the solid polymer product. The step of forming polymer pellets can comprise processing the solid polymer product through a pelletizing die (non-limiting examples

include strand, underwater, water ring, etc.) using any suitable apparatus. For instance, an extruder, a single screw extruder, a twin screw extruder, a gear pump, or other suitable apparatus can be used.

Articles of manufacture can be formed from, and/or can comprise, the solid polymer product produced in accordance with this invention. Articles which can comprise polymers of this invention include, but are not limited to, an agricultural film, an automobile part, a bottle, a drum, a fiber or fabric, a food packaging film or container, a food service article, a fuel tank, a geomembrane, a household container, a liner, a molded product, a medical device or material, a pipe, a sheet or tape, a toy, and the like. Various processes can be employed to form these articles. Non-limiting examples of these processes include injection molding, blow molding, rotational molding, film extrusion, sheet extrusion, profile extrusion, thermoforming, and the like. Additionally, additives and modifiers are often added to the solid polymer product in order to provide beneficial polymer processing or end-use product attributes. Such processes and materials are described in *Modern Plastics Encyclopedia*, Mid-November 1995 Issue, Vol. 72, No. 12; and *Film Extrusion Manual – Process, Materials, Properties*, TAPPI Press, 1992; the disclosures of which are incorporated herein by reference in their entirety.

Substituent Groups

Various aspects and embodiments described herein may refer to substituted groups or compounds. In an embodiment, each substituent (or non-hydrogen substituent) of any aspect or embodiment calling for a substituent can be a halogen, a hydrocarbyl group, or a hydrocarboxy group; alternatively, a halogen or a hydrocarbyl group; alternatively, a halogen or a hydrocarboxy group; alternatively, a hydrocarbyl group or a hydrocarboxy group; alternatively, a halogen; alternatively, a hydrocarbyl group; or alternatively, a hydrocarboxy group. In an embodiment, each hydrocarbyl substituent can be a C₁ to C₁₀ hydrocarbyl group, or alternatively, a C₁ to C₅ hydrocarbyl group. In an embodiment, each hydrocarboxy group or substituent of any aspect or embodiment calling for a group or substituent can be a C₁ to C₁₀ hydrocarboxy group, or alternatively, a C₁ to C₅ hydrocarboxy group. In an embodiment, any halide substituent of any aspect or embodiment calling for a substituent can be fluoride, chloride, bromide, or iodide; alternatively, fluoride or chloride. In some embodiments, any halide substituent of any aspect or embodiment calling for a substituent can be fluoride; alternatively, chloride; alternatively, bromide; or alternatively, iodide.

In an embodiment, any hydrocarbyl substituent of any aspect or embodiment calling for a substituent can be an alkyl group, an aryl group, or an aralkyl group; alternatively, an alkyl group; alternatively, an aryl group; or alternatively, an aralkyl group. In an embodiment, any alkyl substituent of any aspect or embodiment calling for a substituent can be a methyl group, an ethyl group, an n-propyl group, an isopropyl group, an n-butyl group, a sec-butyl group, an isobutyl group, a tert-butyl group, an n-pentyl group, a 2-pentyl group, a 3-pentyl group, a 2-methyl-1-butyl group, a tert-pentyl group, a 3-methyl-1-butyl group, a 3-methyl-2-butyl group, or a neo-pentyl group;

alternatively, a methyl group, an ethyl group, an isopropyl group, a tert-butyl group, or a neo-pentyl group; alternatively, a methyl group; alternatively, an ethyl group; alternatively, an isopropyl group; alternatively, a tert-butyl group; or alternatively, a neo-pentyl group. In an embodiment, any aryl substituent of any aspect or embodiment calling for a substituent can be a phenyl group, a tolyl group, a xylyl group, or a 2,4,6-trimethylphenyl group; alternatively, a phenyl group; alternatively, a tolyl group, alternatively, a xylyl group; or alternatively, a 2,4,6-trimethylphenyl group. In an embodiment, any aralkyl substituent of any aspect or embodiment calling for a substituent can be benzyl group or an ethylphenyl group (2-phenyleth-1-yl or 1-phenyleth-1-yl); alternatively, a benzyl group; alternatively, an ethylphenyl group; alternatively a 2-phenyleth-1-yl group; or alternatively, a 1-phenyleth-1-yl group.

In an embodiment, any hydrocarboxy substituent of any aspect or embodiment calling for a substituent can be an alkoxy group, an aryloxy group, or an aralkoxy group; alternatively, an alkoxy group; alternatively, an aryloxy group or an aralkoxy group. In an embodiment, any alkoxy substituent of any aspect or embodiment calling for a substituent can be a methoxy group, an ethoxy group, an n-propoxy group, an isopropoxy group, an n-butoxy group, a sec-butoxy group, an isobutoxy group, a tert-butoxy group, an n-pentoxy group, a 2-pentoxy group, a 3-pentoxy group, a 2-methyl-1-butoxy group, a tert-pentoxy group, a 3-methyl-1-butoxy group, a 3-methyl-2-butoxy group, or a neo-pentoxy group; alternatively, a methoxy group, an ethoxy group, an isopropoxy group, a tert-butoxy group, or a neo-pentoxy group; alternatively, a methoxy group; alternatively, an ethoxy group; alternatively, an isopropoxy group; alternatively, a tert-butoxy group; or alternatively, a neo-pentoxy group. In an embodiment, any aryloxy substituent of any aspect or embodiment calling for a substituent can be a phenoxy group, a toloxy group, a xyloxy group, or a 2,4,6-trimethylphenoxy group; alternatively, a phenoxy group; alternatively, a toloxy group; alternatively, a xyloxy group; or alternatively, a 2,4,6-trimethylphenoxy group. In an embodiment, any aralkoxy substituent of any aspect or embodiment calling for a substituent can be a benzoxy group.

EXAMPLES

The invention is further illustrated by the following examples, which are not to be construed in any way as imposing limitations to the scope of this invention. Various other aspects, embodiments, modifications, and equivalents thereof which, after reading the description herein, may suggest themselves to one of ordinary skill in the art without departing from the spirit of the present invention or the scope of the appended claims.

Fluorided silica-coated alumina chemically-treated solid oxides were prepared as follows. Bohemite was obtained from W.R. Grace & Company under the designation "Alumina A" and having a surface area of 300 m²/g, a pore volume of 1.3 mL/g, and an average particle size of 100 microns. The alumina was first calcined in dry air at 600 °C for 6 hours, cooled to ambient temperature, and then contacted with tetraethylorthosilicate in isopropanol to equal 25 wt. % SiO₂. After drying, the

silica-coated alumina was calcined at 600 °C for 3 hours. Fluorided silica-coated alumina (7 wt. % F) was prepared by impregnating the calcined silica-coated alumina with an ammonium bifluoride solution in methanol, drying, and then calcining for 3 hours at 600 °C in dry air. Afterward, the fluorided silica-coated alumina (FSCA) was collected and stored under dry nitrogen, and was used without exposure to the atmosphere.


Sulfated alumina chemically-treated solid oxides were prepared as follows from the same base alumina grade used to produce FSCA. The base alumina material was impregnated to incipient wetness with an aqueous solution of ammonium sulfate to equal 15% sulfate. This mixture was then placed in a flat pan and allowed to dry under vacuum at approximately 110 °C for 16 hours. To calcine the resultant powdered mixture, the material was fluidized in a stream of dry air at 550 °C for 6 hours. Afterward, the sulfated alumina (SA) was collected and stored under dry nitrogen, and was used without exposure to the atmosphere.

TMA was obtained from Sigma-Aldrich as a 2 molar solution in heptane and utilized as received. TEA was obtained from Sigma-Aldrich (≥ 22.5 wt. % aluminum) and utilized as received. TIBA was obtained from AkzoNobel (≥ 13.4 wt. % aluminum) and utilized as received. TNOA was obtained from AkzoNobel (≥ 7.0 wt. % aluminum) and utilized as received. MMAO-3A was obtained from AkzoNobel (7 wt. % aluminum) and utilized as received.


The base material for the silica used in Examples 17-18 had a surface area of 300 m²/g, a pore volume of 1.6 mL/g, and an average particle size of 100 microns. This material was calcined in nitrogen at 600 °C for 3 hours, cooled to ambient temperature, and then the silica was stored under dry nitrogen and used without exposure to the atmosphere.

Solvents/diluent utilized in the examples were sparged with nitrogen prior to use and stored over 13X sieves glovebox having a nitrogen atmosphere. All catalyst system activations were carried out in the glovebox having a nitrogen atmosphere.

Each example provided herein utilized either heteroatomic chromium chloride complex A or heteroatomic chromium chloride complex B:



Complex A



Complex B

In Activation Method A, the heteroatomic ligand chromium compound complex in ethylbenzene (EB) was mixed with either triethylaluminum (TEA) or trimethylaluminum (TMA) for 30 minutes. No aluminoxane or chemically-treated solid oxide was present.

In Activation Method B, the heteroatomic ligand chromium compound complex in ethylbenzene (EB) was combined first with the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, FSCA) for 30 minutes to form a mixture. TEA then was added to the mixture, and the catalyst system was stirred for 30 minutes.

5 In Activation Method C, TEA or triisobutylaluminum (TIBA) was first combined with the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, FSCA) in cyclohexane (CyH) and stirred for 30 minutes to form a precontacted mixture, then the precontacted mixture was combined with the heteroatomic ligand chromium compound complex in ethylbenzene (EB) and stirred for 30 minutes.

10 In Activation Method D, an alkylaluminum compound (TEA, TMA, TIBA, or TNOA) was first combined with the heteroatomic ligand chromium compound complex in ethylbenzene (EB) and stirred for 30 minutes to form a precontacted mixture, then the mixture was combined with the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, FSCA) in CyH and stirred for 30 or 60 minutes.

15 In Activation Method E, an alkylaluminum (TEA, TMA, or TNOA) was combined with the heteroatomic ligand chromium compound complex in ethylbenzene (EB) and stirred for 30 minutes to form a first mixture. An alkylaluminum (TEA, TMA, or TNOA) in cyclohexane (CyH) was combined with the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, or FSCA) and stirred for 30 minutes to form a second mixture. Then, the first mixture and the second mixture
20 were combined and stirred for 30 minutes.

In Activation Method F, a modified methyl aluminoxane (MMAO-3A) was combined with the heteroatomic ligand chromium compound complex in ethylbenzene (EB).

In Activation Method G, the heteroatomic ligand chromium compound complex and TEA were simultaneously added to the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, FSCA) in CyH and stirred for 30 minutes.
25

In Activation Method H, MMAO-3A was first combined with the support or chemically-treated solid oxide (e.g., silica, SA, Bohemite, FSCA) in cyclohexane (CyH) and stirred for 10 minutes to form a precontacted mixture, then the precontacted mixture was combined with the heteroatomic ligand chromium compound complex in ethylbenzene (EB) and stirred for 30 minutes.

30 Molecular weights and molecular weight distributions were obtained using a PL-GPC 220 (Polymer Labs, an Agilent Company) system equipped with a IR4 detector (Polymer Char, Spain) and three StyragelTM HMW-6E GPC columns (Waters, MA) running at 145 °C. The flow rate of the mobile phase 1,2,4-trichlorobenzene (TCB) containing 0.5 g/L 2,6-di-*t*-butyl-4-methylphenol (BHT) was set at 1 mL/min, and polymer solution concentrations were in the range of 1.0-1.5 mg/mL,
35 depending on the molecular weight. Sample preparation was conducted at 150 °C for nominally 4 hours with occasional and gentle agitation, before the solutions were transferred to sample vials for injection. An injection volume of about 200 µL was used. The integral calibration method was used

to deduce molecular weights and molecular weight distributions using a Chevron Phillips Chemical Company's HDPE polyethylene resin, MARLEX® BHB5003, as the standard. The integral table of the standard was pre-determined in a separate experiment with SEC-MALS. Mp is the peak molecular weight, Mn is the number-average molecular weight, Mw is the weight-average molecular weight, and Mz is the z-average molecular weight.

Polymer C-13 NMR sample preparation and data collection were performed as follows. A 0.55 gram sample of the solid polymer sample, 1.20 g of 1,4-dichlorobenzene-d4 (98% D) and 2.5 mL of 1,2,4-trichlorobenzene (distilled and dosed with 0.034 wt. % butylated hydroxytoluene) were charged to a 10 mm NMR tube. The 10 mm NMR tube containing the polymer sample mixture was then heated in a heating block at 128 °C with occasional stirring using a stainless steel stirrer to ensure homogeneous mixing of polymer sample into solution. The sample was then left in the heating block at 112 °C for 16 hours to ensure complete disentanglement of polymer chains. The final concentration of the polymer in the C-13 NMR sample was ~10 wt. %. The C13 NMR analysis was then performed using a 500 MHz Oxford Magnet. Data collection and processing were performed using a Bruker 10mm BBO probe and Advance III HD console using the following data collection parameters:

F2 – Acquisition Parameters

INSTRUM	spect	
PROBHD	10 mm PABBO BB	
PULPROG	zgdc	
TD	49018	
SOLVENT	C6D6	
NS	6489	
DS	8	
SWH	8169.935	Hz
FIDRES	0.166672	Hz
AQ	2.9999015	sec
RG	35.5	
DW	61.200	usec
DE	6.50	usec
TE	398.1	K
D1	7.00000000	sec
D11	0.03000000	sec
TDO	12	

===== CHANNEL f1 =====

SF01	125.6986968	MHz
NUC1	13C	
P1	15.00	usec
PLW1	63.00000000	W

```

===== CHANNEL f2 =====
SF02                499.8814996  MHz
NUC2                 1H
CPDPRG[2]           waltz65
PCPD2                80.00  usec
PLW2                 25.00000000  W
PLW12                1.76390004  W

```

```

F2 – Processing parameters
SI                    131072
SF                    125.6948915  MHz
WDW                   EM
SSB                   0
LB                    1.00  Hz
GB                    0
PC                    4.00

```

Ethylene oligomerizations were performed as follows. Cyclohexane, 200 mL, was added to an activated catalyst system that was activated according to one of the activation methods A-H. The activated catalyst system mixture was the charged to an evacuated autoclave reactor (0.5 L stainless steel ZipperClave[®] Autoclave) held at 60 °C. The reactor was then charged with 50 psig H₂ and 875 psig ethylene. Stirring of the autoclave reactor content was started by activating an air driven autoclave stirrer motor. The autoclave reactor contents were then allowed to reach the desired reaction temperature and the reaction temperature was maintained by use of internal cooling coils and if necessary an external water bath. As the reaction proceeded, ethylene was fed to the reactor on demand to maintain the autoclave reactor pressure for the desired reaction time. At reaction completion, water cooling was applied to the autoclave reactor. When the autoclave reactor contents temperature reached 35 °C, the unreacted ethylene and hydrogen gas were vented from the reactor. A liquid sample (~2 mL) of the reactor contents was then collected, filtered, and analyzed by GC-FID. The reactor solids were collected by filtering the reaction mixture and cleaning the reactor walls and cooling coil.

The liquid reactor content samples were analyzed on an Agilent 7890-LTM equipped with an Agilent DB-5msUI column (Agilent P/N 222-5532UILTM) with a 30 m length, 0.25 ID, and 0.25 µm film thickness and a flame ionization detector.

Table 3 summarizes the catalyst systems, oligomerization conditions, oligomer product properties, and catalyst productivities for Examples 1-45. As shown in Table 3, Examples 1-2 did not utilize an aluminoxane or chemically-treated solid oxide activator, and these catalyst systems had low productivity of the C₆+C₈ product. Likewise, Examples 17-18 and 32 utilized a solid oxide that was not chemically-treated, and this also resulted in low productivity of the C₆+C₈ product.

For Examples 3-16, 19-22, and 30-31 (using Complex A), it was unexpectedly found that the method of catalyst preparation and catalyst activation had an impact on the amount of oligomer product produced (liquid NAO product + polymer product). Pre-contacting or pre-mixing the chemically-treated solid oxide and the organoaluminum compound (before adding in the heteroatomic ligand transition metal compound complex), and pre-contacting or pre-mixing the heteroatomic ligand transition metal compound complex and the organoaluminum (before adding in the chemically-treated solid oxide) both resulted in improved productivity. Additionally, the combination of these two pre-contacting or pre-mixing steps – i.e., pre-contacting or pre-mixing the chemically-treated solid oxide and a first organoaluminum compound to form a first mixture; pre-contacting or pre-mixing the heteroatomic ligand transition metal compound complex and a second organoaluminum compound to form a second mixture; and then combining the first mixture with the second mixture to form the catalyst system – also resulted in significantly improved catalyst productivities.

As shown by Examples 3-16, 19-22, and 30-31 (using Complex A) in Table 3, the catalyst systems containing a chemically-treated solid oxide were very efficient in oligomerizing ethylene to produce C₆+C₈ oligomer product. Surprisingly high catalyst system productivities were achieved, generally ranging from 40,000 to 380,000 grams of C₆+C₈ product per gram of chromium. Of the liquid oligomer product, the wt. % of total C₆+C₈ products ranged from 97.5 to 99.3 wt. %, and the wt. % of C₆ olefins ranged from 95.8 to 97.3 wt. %. Selectivity to α -olefins was also extremely high: the C₆ oligomer product contained from 99.2 to 99.7 mol % 1-hexene, and the C₈ oligomer product contained from 89 to 99.4 mol % 1-octene (and mostly in the 97 to 99.4 mol % range).

Interestingly, particularly as compared to Examples 23-27 that utilized an alumoxane activator and produced less than 1 wt. % polymer, the catalyst systems containing a chemically-treated solid oxide (Examples 3-16, 19-22, and 30-31) produced increased amounts of a solid polymer product, generally ranging from 15 to 57 wt. %, based on the total weight of the oligomer product. Catalyst system productivities for producing the solid polymer product – for Examples 3-16, 19-22, and 30-31 – ranged from 14,000 to 167,000 grams of polymer product per gram of chromium.

As shown by Examples 33-45 (using Complex B) in Table 3, the catalyst systems containing a chemically-treated solid oxide were very efficient in oligomerizing ethylene to produce C₆+C₈ oligomer product. Surprisingly high catalyst system productivities were achieved, generally ranging from 46,000 to 112,000 grams of C₆+C₈ product per gram of chromium (excluding Example 40). Of the liquid oligomer product, the wt. % of total C₆+C₈ products ranged from 96.5 to 98 wt. %, and the wt. % of C₆ olefins ranged from 73.5 to 79.4 wt. %. Selectivity to α -olefins was also extremely high: the C₆ oligomer product contained from 92.5 to 96.3 mol % 1-hexene, and the C₈ oligomer product contained from 93.3 to 97.7 mol % 1-octene.

Examples 33-45 produced amounts of a solid polymer product generally ranging from 20 to 70 wt. %, based on the total weight of the oligomer product. Catalyst system productivities for

producing the solid polymer product – for Examples 33-45 – ranged from 12,000 to 61,000 grams of polymer product per gram of chromium.

Examples 28-29 utilized an aluminoxane instead of a trialkylaluminum compound, such as TEA or TIBA. These examples demonstrate that aluminoxanes can be used as organoaluminum compounds in catalyst systems containing a chemically-treated solid oxide.

Table 4 summarizes the molecular weight characterization of the solid polymer produced in some of the examples in Table 3. For catalyst systems using a chemically-treated solid oxide, relatively high molecular weight polymer was produced, with Mn's ranging from 10,000 to 17,000 g/mol, Mp's ranging from 51,000 to 145,000 g/mol, Mw's ranging from 158,000 to 369,000 g/mol, and Mz's ranging from 939,000 to 2,233,000 g/mol. **FIG. 1** and **FIG. 2** illustrate the molecular weight distributions (amount of polymer versus logarithm of molecular weight) for the ethylene polymers of Example 10 and Examples 37, respectively, demonstrating the high molecular weight produced using the catalyst systems described herein. In contrast, **FIG. 3** illustrates the molecular weight distribution (amount of polymer versus logarithm of molecular weight) for a polymer product produced using a homogeneous catalyst system containing a N²-phosphinyl amidine transition metal compound complex and MMAO-3A modified methylaluminoxane (see e.g., U.S. Patent No. 8,680,003), demonstrating that only very low molecular weight polymer (Mp of 1,000-2,000 g/mol) was produced with MAO-based catalyst systems (in the absence of a chemically-treated solid oxide). Furthermore, no reactor fouling was noted during any of the oligomerization experiments of Examples 3-16, 19-22, 30-31, and 33-45, which utilized catalyst systems containing a chemically-treated solid oxide.

Table 5 present NMR data that demonstrates the high molecular weight polymer product produced with catalyst systems using a chemically-treated solid oxide was predominantly ethylene homopolymer (>99 mol % ethylene), with very little comonomer side chains.

Table 3						
Example	1	2	3	4	5	6
Catalyst System						
Activation Method	A	A	B	C	C	C
Complex	A	A	A	A	A	A
mmol complex	0.0060	0.0060	0.0060	0.0060	0.0060	0.0060
Complex Alkylaluminum	-	-	-	-	-	-
Complex Alkylaluminum Mass (mg)	-	-	-	-	-	-
Support	-	-	FSCA	FSCA	FSCA	FSCA
Support Mass (mg)	-	-	350	350	350	350
Support Alkylaluminum	-	-	-	TEA	TIBA	TIBA
Support Alkylaluminum (mg)	-	-	-	75	40	80
Free Alkylaluminum (g)	TEA	TMA	TEA	-	-	-
Free Alkylaluminum Mass (mg)	40	40	40	-	-	-
Total Alkylaluminum (mg)	40	40	40	75	40	80
Catalyst System Al:Cr molar ratio	59	89	59	110	34	68
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1.02	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875	875	875
Hydrogen Pressure (psig)	50	50	50	50	50	50
Time (min)	20	20	20	20	20	20
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	4	3	49	66	39	51
g polymer	1.32	0	35.4	37.5	52	43.5
polymer (mass%)	24.43%	0.00%	41.76%	36.14%	57.13%	45.86%
C# dist data (mass %)						
C ₆	97.0	97.4	97.3	96.5	96.3	95.8
C ₈	1.0	0.9	1.5	1.8	2.2	1.8
C ₁₀	1.9	1.7	1.2	1.5	1.3	2.1
C ₁₂	0.0	0.0	0.0	0.1	0.2	0.3
C ₁₄₊	0.0	0.0	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	98.1	98.3	98.8	98.3	98.5	97.6
C ₆ Purity (mol % 1-hexene)	98.47	98.94	99.68	99.63	99.69	99.71
C ₈ Purity (mol % 1-octene)	58.60	100	97.46	97.73	97.14	98.03
Methylcyclopentane (mass %)	0.35	0.97	0.05	0.06	0.10	0.06
Methylenecyclopentane (mass %)	0.00	0.00	0.03	0.03	0.05	0.03
Productivities						
(g Liquid Product)/(mMol Chromium)	682	456	8,252	11,073	6,520	8,582
[g (C ₆ +C ₈)]/(g Cr)	12,873	8,619	156,785	209,432	123,544	161,109
[g (C ₆ +C ₈)]/(g Cr)/hr	38,619	25,857	470,355	628,295	370,633	483,327
[g (C ₆ +C ₈)]/(g Aluminum)	423	179	5155	3671	7064	4606
(g polymer)/(g product)	0.323	0	0.717	0.566	1.33	0.847
(g polymer)/(g Chromium)	4,242	0	113,766	120,515	167,114	139,798

Table 3				
Example	7	8	9	10
Catalyst System				
Activation Method	D	D	D	D
Complex #	A	A	A	A
mmol complex	0.0060	0.0060	0.0060	0.0060
Complex Alkylaluminum	TEA	TMA	TMA	TMA
Complex Alkylaluminum Mass (mg)	40	21.6	10.8	5.5
Support	FSCA	FSCA	FSCA	FSCA
Support Mass (mg)	350	350	350	350
Support Alkylaluminum	-	-	-	-
Support Alkylaluminum (mg)	-	-	-	-
Free Alkylaluminum (g)	-	-	-	-
Free Alkylaluminum Mass (mg)	-	-	-	-
Total Alkylaluminum (mg)	40	21.6	10.8	5.5
Catalyst System Al:Cr molar ratio	59	47	23	12
Catalyst Solvent	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5
Oligomerization Conditions				
Diluent	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875
Hydrogen Pressure (psig)	50	50	50	50
Time (min)	20	20	20	20
Temperature (°C)	70	70	70	70
Oligomer Product				
g liquid NAO product	111	25	71	62
g polymer	46.6	7.37	26.5	23.5
polymer (mass%)	29.48%	22.53%	27.18%	27.52%
C# dist data (mass %)				
C ₆	96.4	96.2	96.4	96.8
C ₈	1.2	1.8	1.9	1.8
C ₁₀	2.3	2.0	1.3	1.3
C ₁₂	0.0	0.0	0.4	0.1
C ₁₄₊	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	97.7	98.0	98.3	98.6
C ₆ Purity (mol % 1-hexene)	99.62	99.61	99.57	99.61
C ₈ Purity (mol % 1-octene)	98.80	99.35	99.33	98.52
Methylcyclopentane (mass %)	0.04	0.12	0.07	0.06
Methylenecyclopentane (mass %)	0.02	0.03	0.03	0.04
Productivities				
(g Liquid Product)/(mMol Chromium)	18,631	4,234	11,864	10,343
[g (C ₆ +C ₈)]/(g Cr)	349,914	79,788	224,168	196,115
[g (C ₆ +C ₈)]/(g Cr)/hr	1,049,742	239,365	672,504	588,344
[g (C ₆ +C ₈)]/(g Aluminum)	11501	3071	17236	29761
(g polymer)/(g product)	0.418	0.291	0.373	0.380
(g polymer)/(g Chromium)	149,760	23,685	85,164	75,523

Table 3						
Example	11	12	13	14	15	16
Catalyst System						
Activation Method	E	E	E	E	E	E
Complex #	A	A	A	A	A	A
mmol complex	0.0060	0.0060	0.0060	0.0060	0.0060	0.0060
Complex Alkylaluminum	TEA	TEA	TEA	TEA	TEA	TEA
Complex Alkylaluminum Mass (mg)	40	40	40	40	40	40
Support	FSCA	FSCA	FSCA	SA	SA	SA
Support Mass (mg)	350	350	350	350	350	350
Support Alkylaluminum	TEA	TEA	TEA	TEA	TEA	TEA
Support Alkylaluminum (mg)	35	70	25	35	70	25
Free Alkylaluminum (g)	-	-	-	-	-	-
Free Alkylaluminum Mass (mg)	-	-	-	-	-	-
Total Alkylaluminum (mg)	75	110	65	75	110	65
Catalyst System Al:Cr molar ratio	110	161	95	110	161	95
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875	875	875
Hydrogen Pressure (psig)	50	50	50	50	50	50
Time (min)	20	20	20	20	20	20
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	121	115	109	16	14	17
g polymer	34.5	32.9	35.5	21.4	16.1	21.1
polymer (mass%)	22.24%	22.22%	24.63%	57.41%	53.65%	55.77%
C# dist data (mass %)						
C ₆	96.3	96.3	96.3	96.8	96.9	96.9
C ₈	1.2	1.3	1.2	1.4	1.4	1.4
C ₁₀	2.5	2.2	2.4	1.5	1.5	1.5
C ₁₂	0.1	0.2	0.1	0.3	0.2	0.2
C ₁₄₊	0.0	0.0	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	97.5	97.6	97.5	98.2	98.3	98.3
C ₆ Purity (mol % 1-hexene)	99.65	99.66	99.65	99.28	99.36	99.44
C ₈ Purity (mol % 1-octene)	97.03	97.70	97.83	94.81	89.78	92.24
Methylcyclopentane (mass %)	0.04	0.05	0.05	0.14	0.14	0.12
Methylenecyclopentane (mass %)	0.02	0.03	0.02	0.05	0.03	0.03
Productivities						
(g Liquid Product)/(mMol Chromium)	20,163	19,242	18,157	2,653	2,325	2,796
[g (C ₆ +C ₈)]/(g Cr)	377,876	361,073	340,508	50,121	43,937	52,889
[g (C ₆ +C ₈)]/(g Cr)/hr	1,133,628	1,083,219	1,021,524	150,364	131,811	158,667
[g (C ₆ +C ₈)]/(g Aluminum)	6624	4316	6888	879	525	1070
(g polymer)/(g product)	0.286	0.286	0.327	1.35	1.16	1.26
(g polymer)/(g Chromium)	110,874	105,732	114,088	68,774	51,741	67,810

Table 3						
Example	17	18	19	20	21	22
Catalyst System						
Activation Method	E	E	E	E	E	E
Complex #	A	A	A	A	A	A
mmol complex	0.0060	0.0060	0.0060	0.0060	0.0060	0.0060
Complex Alkylaluminum	TEA	TEA	TMA	TMA	TMA	TIBA
Complex Alkylaluminum Mass (mg)	40	40	10.8	5.5	5.5	12
Support	Silica	Silica	FSCA	FSCA	FSCA	FSCA
Support Mass (mg)	350	350	350	350	350	350
Support Alkylaluminum	TEA	TEA	TMA	TMA	TMA	TIBA
Support Alkylaluminum (mg)	35	70	33.2	10.8	21.6	35
Free Alkylaluminum (g)	-	-	-	-	-	-
Free Alkylaluminum Mass (mg)	-	-	-	-	-	-
Total Alkylaluminum (mg)	75	110	44	16.3	27.1	47
Catalyst System Al:Cr molar ratio	110	161	95	35	59	31
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875	875	875
Hydrogen Pressure (psig)	50	50	50	50	50	50
Time (min)	20	20	20	20	20	20
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	3	1	30	33	19	95
g polymer	5.14	2.78	5.73	12.04	4.54	40.7
polymer (mass%)	61.86%	67.01%	15.90%	26.74%	19.57%	30.10%
C# dist data (mass %)						
C ₆	95.9	93.7	97.2	97.1	97.1	96.7
C ₈	2.1	3.5	1.9	1.8	2.2	1.3
C ₁₀	2.0	2.8	0.9	1.0	0.7	1.9
C ₁₂	0.0	0.0	0.0	0.2	0.0	0.1
C ₁₄₊	0.0	0.0	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	98.0	97.2	99.1	98.9	99.3	98.0
C ₆ Purity (mol % 1-hexene)	98.76	97.11	99.56	99.58	99.54	99.55
C ₈ Purity (mol % 1-octene)	86.10	53.70	98.01	98.86	98.34	97.78
Methylcyclopentane (mass %)	0.51	0.58	0.10	0.08	0.11	0.05
Methylenecyclopentane (mass %)	0.00	0.00	0.03	0.03	0.04	0.02
Productivities						
(g Liquid Product)/(mMol Chromium)	530	229	5,067	5,513	3,117	15,794
[g (C ₆ +C ₈)]/(g Cr)	9,981	4,276	96,522	104,808	59,519	297,591
[g (C ₆ +C ₈)]/(g Cr)/hr	29,942	12,828	289,565	314,424	178,558	892,774
[g (C ₆ +C ₈)]/(g Aluminum)	175	51	1825	5349	1828	14482
(g polymer)/(g product)	1.62	2.03	0.189	0.365	0.243	0.431
(g polymer)/(g Chromium)	16,519	8,934	18,415	38,693	14,590	130,799

Table 3					
Example	23	24	25	26	27
Catalyst System					
Activation Method	F	F	F	F	F
Complex #	A	A	A	A	A
mmol complex	0.0060	0.0060	0.0060	0.0060	0.0060
Complex Alkylaluminum	-	-	-	-	-
Complex Alkylaluminum Mass (mg)	-	-	-	-	-
Support	-	-	-	-	-
Support Mass (mg)	-	-	-	-	-
Support Alkylaluminum	-	-	-	-	-
Support Alkylaluminum (mg)	-	-	-	-	-
Free Alkylaluminum (g)	MMAO	MMAO	MMAO	MMAO	MMAO
Free Alkylaluminum Mass (mg)	1.275	1.275	1.275	1.275	1.275
Total Alkylaluminum (mg)	1,275	1,275	1,275	1,275	1,275
Catalyst System Al:Cr molar ratio	554	554	554	554	554
Catalyst Solvent	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions					
Diluent	CyH	CyH	MeCyH	MeCyH	CyH
Diluent Volume (mL)	200	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875	875
Hydrogen Pressure (psig)	50	50	50	50	50
Time (min)	20	20	20	20	20
Temperature (°C)	70	70	70	70	70
Oligomer Product					
g liquid NAO product	145	146	122	136	148
g polymer	0.11	0.04	0.64	0.2	0.08
polymer (mass%)	0.08%	0.03%	0.52%	0.15%	0.05%
C# dist data (mass %)					
C ₆	94.5	94.2	95.1	94.3	94.5
C ₈	1.0	1.0	1.4	1.1	1.0
C ₁₀	4.4	4.4	3.4	4.6	4.5
C ₁₂	0.0	0.4	0.1	0.1	0.1
C ₁₄₊	0.0	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	95.6	95.2	96.5	95.3	95.5
C ₆ Purity (mol % 1-hexene)	99.48	99.63	99.53	99.45	99.46
C ₈ Purity (mol % 1-octene)	97.85	99.18	99.26	96.77	98.52
Methylcyclopentane (mass %)	0.04	0.03	0.04	0.03	0.04
Methylenecyclopentane (mass %)	0.01	0.01	0.02	0.01	0.01
Productivities					
(g Liquid Product)/(mMol Chromium)	24301	24372	20413	22757	24738
[g (C ₆ +C ₈)]/(g Cr)	446554	446082	378995	417270	454128
[g (C ₆ +C ₈)]/(g Cr)/hr	1339662	1338245	1136986	1251810	1362385
[g (C ₆ +C ₈)]/(g Aluminum)	1557	1555	1321	1455	1583
(g polymer)/(g product)	0.000756	0.000274	0.005212	0.001467	0.000540
(g polymer)/(g Chromium)	354	129	2057	643	257

Table 3						
Example	28	29	30	31	32	33
Catalyst System						
Activation Method	H	H	D	E	E	D
Complex #	A	A	A	A	A	B
mmol complex	0.0060	0.0060	0.0060	0.0060	0.0060	0.0031
Complex Alkylaluminum			TNOA	TNOA	TEA	TEA
Complex Alkylaluminum Mass (mg)	0	0	0.11	0.055	0.04	0.020
Support	FSCA	FSCA	FSCA	FSCA	Bohemite	FSCA
Support Mass (mg)	0.35	0.35	0.35	0.35	0.35	0.175
Support Alkylaluminum	MMAO	MMAO	NA	TNOA	TEA	NA
Support Alkylaluminum (mg)	0.085	0.17		0.055	0.035	0
Free Alkylaluminum (g)						
Free Alkylaluminum Mass (mg)						
Total Alkylaluminum (mg)	0.085	0.17	NA	NA		
Catalyst System Al:Cr molar ratio	37	74	50	50	110	57
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	875	875	875	875	50	50
Hydrogen Pressure (psig)	50	50	50	50	875	875
Time (min)	20	20	20	20	20	60
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	50.1	61.0	82	74	0.0	13
g polymer	61	48	25	35	116	3.9
polymer (mass%)	54.92%	44.04%	23.29%	32.30%	100.0	23.28%
C# dist data (mass %)						
C ₆	96.1	96.4	96.6	96.7	0.0	79.4
C ₈	2.3	2.2	1.3	1.6	0.0	18.6
C ₁₀	1.4	1.4	2.0	1.7	0.0	2.0
C ₁₂	0.2	0.0	0.0	0.0	0.00	0.0
C ₁₄₊	0.0	0.0	0.0	0.0	100.00	0.0
(C ₆ +C ₈) (mass %)	98.4	98.6	98.0	98.3	0.00	98.0
C ₆ Purity(mol % 1-hexene)	99.67	99.67	99.53	99.59	NA	95.88
C ₈ Purity (mol % 1-octene)	97.78	98.39	94.86	95.42	NA	97.72
Methylcyclopentane (mass %)	0.07	0.09	0.05	0.05	NA	2.79
Methylenecyclopentane (mass %)	0.04	0.04	0.03	0.03	NA	0.82
Productivities						
(g Liquid Product)/(mMol Chromium)	8,367	10,194	13,703	12,366	0	4,164
[g (C ₆ +C ₈)]/(g Cr)	158,343	193,336	258,165	233,695	-	78,469
[g (C ₆ +C ₈)]/(g Cr)/hr	475,030	580,009	774,495	701,086	-	78,469
[g (C ₆ +C ₈)]/(g Aluminum)	8281	5055	10433	9444	0	2666
(g polymer)/(g product)	1.22	0.79	0.30	0.48	NA	0.30
(g polymer)/(g Chromium)	196,038	154,259	80,022	113,445	372,793	24,290

Table 3						
Example	34	35	36	37	38	39
Catalyst System						
Activation Method	D	D	D	D	B	C
Complex #	B	B	B	B	B	B
mmol complex	0.0031	0.0031	0.0031	0.0031	0.0031	0.0031
Complex Alkylaluminum	TEA	TEA	TEA	TEA	NA	NA
Complex Alkylaluminum Mass (mg)	0.040	0.030	0.030	0.030	0.000	0.000
Support	FSCA	FSCA	FSCA	FSCA	FSCA	FSCA
Support Mass (mg)	0.175	0.175	0.175	0.175	0.175	0.175
Support Alkylaluminum	NA	NA	NA	NA	TEA	TEA
Support Alkylaluminum (mg)	0	0	0	0	0.03	0.03
Free Alkylaluminum (g)						
Free Alkylaluminum Mass (mg)						
Total Alkylaluminum (mg)						
Catalyst System Al:Cr molar ratio	113	85	85	85	85	85
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1	1
Activation Time (hours)	0.5	0.5	1	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	50	50	50	50	50	50
Hydrogen Pressure (psig)	875	875	875	875	875	875
Time (min)	60	60	60	75	60	60
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	13	18	16	19	15	16
g polymer	6.2	6.1	5	6.6	7.1	9.8
polymer (mass%)	32.28%	25.66%	23.51%	26.22%	31.74%	37.63%
C# dist data (mass %)						
C ₆	78.6	79.1	78.4	78.6	78.8	78.3
C ₈	19.2	18.8	19.1	18.6	18.4	19.0
C ₁₀	2.2	2.1	2.1	2.2	2.1	2.3
C ₁₂	0.0	0.0	0.4	0.6	0.6	0.5
C ₁₄₊	0.0	0.0	0.0	0.0	0.0	0.0
(C ₆ +C ₈) (mass %)	97.8	97.9	97.5	97.2	97.2	97.3
C ₆ Purity(mol % 1-hexene)	95.99	95.77	95.88	95.68	96.30	96.46
C ₈ Purity (mol % 1-octene)	96.71	97.49	97.48	97.30	97.46	97.40
Methylcyclopentane (mass %)	2.71	2.88	2.79	2.74	2.64	2.78
Methylenecyclopentane (mass %)	0.64	0.76	0.75	1.03	0.50	0.19
Productivities						
(g Liquid Product)/(mMol Chromium)	4,212	5,723	5,268	6,015	4,946	5,261
[g (C ₆ +C ₈)]/(g Cr)	79,220	107,745	98,770	112,439	92,446	98,441
[g (C ₆ +C ₈)]/(g Cr)/hr	79,220	107,745	98,770	89,951	92,446	98,441
[g (C ₆ +C ₈)]/(g Aluminum)	1345	2440	2237	2546	2094	2229
(g polymer)/(g product)	0.48	0.35	0.31	0.36	0.46	0.60
(g polymer)/(g Chromium)	38,615	37,992	31,141	41,106	44,220	61,036

Table 3						
Example	40	41	42	43	44	45
Catalyst System						
Activation Method	E	G	D	D	D	D
Complex #	B	B	B	B	B	B
mmol complex	0.0031	0.0031	0.0031	0.0031	0.0031	0.0031
Complex Alkylaluminum	TEA	TEA	TIBA	TIBA	TIBA	TIBA
Complex Alkylaluminum Mass (mg)	0.015	0.030	0.030	0.040	0.055	0.075
Support	FSCA	FSCA	FSCA	FSCA	FSCA	FSCA
Support Mass (mg)	0.175	0.175	0.175	0.175	0.175	0.175
Support Alkylaluminum	TEA	NA	NA	NA	NA	NA
Support Alkylaluminum (mg)	0.015	0	0	0	0	0
Free Alkylaluminum (g)						
Free Alkylaluminum Mass (mg)						
Total Alkylaluminum (mg)						
Catalyst System Al:Cr molar ratio	85	85	49	65	90	122
Catalyst Solvent	EB	EB	EB	EB	EB	EB
Solvent Mass (g)	1	1	1	1	1	1
Activation Time (hours)	0.5	0.5	0.5	0.5	0.5	0.5
Oligomerization Conditions						
Diluent	CyH	CyH	CyH	CyH	CyH	CyH
Diluent Volume (mL)	200	200	200	200	200	200
Ethylene Pressure (psig)	50	50	875	875	875	875
Hydrogen Pressure (psig)	875	875	50	50	50	50
Time (min)	60	60	60	60	60	60
Temperature (°C)	70	70	70	70	70	70
Oligomer Product						
g liquid NAO product	1	14	8	12	14	14
g polymer	2.5	5	2	4.5	4.5	4.1
polymer (mass%)	70.63%	26.52%	20.81%	28.03%	24.58%	22.97%
C# dist data (mass %)						
C ₆	73.5	78.1	78.4	79.5	78.7	78.5
C ₈	23.0	19.1	19.4	18.2	18.6	18.4
C ₁₀	3.5	2.1	2.2	2.3	2.3	2.2
C ₁₂	0.0	0.6	0.0	0.0	0.3	0.0
C ₁₄₊	0.0	0.0	0.0	0.0	0.0	0.9
(C ₆ +C ₈) (mass %)	96.5	97.2	97.8	97.7	97.4	96.9
C ₆ Purity (mol % 1-hexene)	92.50	95.95	94.23	95.09	94.72	94.00
C ₈ Purity (mol % 1-octene)	93.34	97.27	97.01	97.14	97.47	96.40
Methylcyclopentane (mass %)	3.66	2.83	2.69	2.61	2.71	2.62
Methylenecyclopentane (mass %)	1.54	0.59	2.41	1.71	1.94	2.50
Productivities						
(g Liquid Product)/(mMol Chromium)	337	4,487	2,465	3,742	4,472	4,452
[g (C ₆ +C ₈)]/(g Cr)	6,249	83,872	46,384	70,273	83,728	82,934
[g (C ₆ +C ₈)]/(g Cr)/hr	6,249	83,872	46,384	70,273	83,728	82,934
[g (C ₆ +C ₈)]/(g Aluminum)	142	1899	1825	2074	1797	1305
(g polymer)/(g product)	2.40	0.36	0.26	0.39	0.33	0.30
(g polymer)/(g Chromium)	15,571	31,141	12,456	28,027	28,027	25,536

Table 4

Example	Mn/1000 (g/mol)	Mw/1000 (g/mol)	Mz/1000 (g/mol)	Mv/1000 (g/mol)	Mp/1000 (g/mol)	Mw/Mn	IB	IVc
1	12.93	217.95	1439.88	156.5	58.24	16.86	1.875	2.332
5	16.64	174.79	939.91	133.66	69.04	10.5	1.517	2.08
10	13.08	182.1	1192.15	133.99	58.24	13.92	1.542	2.084
11	14.12	158.9	978.05	118.74	51.97	11.25	1.443	1.909
14	10.77	191.67	1341.03	138.67	63.26	17.80	1.812	2.136
15	10.97	184.27	1344.04	132.12	54.30	16.80	1.813	2.063
17	13.91	214.54	1028.03	161.70	73.67	15.42	1.882	2.388
22	16.07	159.13	1038.11	119.37	53.31	9.9	1.489	1.916
35	15.79	352.61	1990.62	258.26	144.25	22.3	--	--
37	12.60	368.69	2232.15	263.23	120.36	29.3	--	--

Table 5

Example	Side Chains				Ethylene mol%	LB /1000 TC	SCB /1000 TC	Chain ENDS		Internal Unsaturation	
	Propylene mol%	1-Butene mol%	1-Hexene mol%					Sat /1000 TC	Vinyl /1000 TC	trans /1000 TC	cis /1000 TC
10	0.05%	0.00%	0.07%		99.88%	0.1	0.6	0.98	0.44	0	0.35
11	0.10%	0.00%	0.16%		99.74%	0.1	1.3	1.33	0.39	0	0.48

In Examples 46 and 47, ethylene oligomerizations were performed using the chromium(III) complex of the diphosphino amine ligand having Structure PNP 5. In Example 46, the catalyst system was prepared by combining 2 mg of the chromium(III) complex of the diphosphino amine ligand having Structure PNP 5, 1 mL of benzene, and 0.725 grams of MMAO-3. The catalyst system mixture was then aged at room temperature for 30 minutes. The aged catalyst system mixture was then mixed into cyclohexane, 200 mL, which was then charged to an evacuated autoclave reactor (0.5 L stainless steel ZipperClave[®] Autoclave) held at 70 °C. The reactor was then charged with 50 psig H₂ and 875 psig ethylene. Ethylene was then oligomerized at 70 °C, with stirring (through an air driven autoclave stirrer motor). The ethylene oligomerization temperature was maintained by use of internal cooling coils and if necessary an external water bath. As the reaction proceeded, ethylene was fed to the reactor on demand to maintain the autoclave reactor pressure for the reaction time of 20 minutes. At ethylene oligomerization completion, water cooling was applied to the autoclave reactor. When the autoclave reactor contents temperature reached 35 °C, the unreacted ethylene and hydrogen gas were vented from the reactor. A liquid sample (~2 mL) of the reactor contents was then collected, filtered, and analyzed by GC-FID. The reactor solids were collected by filtering the reaction mixture and cleaning the reactor walls and cooling coil. Analysis of the reactor contents showed that the ethylene oligomerization produced 47 grams of liquid oligomer product containing 27.4 wt. % C₆ product (of which 83.4 wt. % was 1-hexene) and 69.6 wt. % C₈ product (of which 99.29 wt. % was 1-octene), and 0.23 grams of polymer.

In Example 47, the catalyst system was prepared using Activation Method E by 1) preparing a first mixture by combining 2 mg of the chromium(III) complex of the diphosphino amine ligand having Structure PNP 5, 1 mL of benzene, and 0.2 grams of TEA and aging the first mixture for 30 minutes; 2) preparing a second mixture containing 200 mg of FSCA and 10 mL cyclohexane containing 0.02 g TEA and then aging the second mixture for 30 minutes; 3) combining the first and second mixtures and aging the combined mixture for 30 minutes to produce the catalyst system mixture. The ethylene oligomerization was conducted as described in Example 46. Analysis of the reactor contents of Example 47 showed that the ethylene oligomerization produced 10 grams of liquid oligomer product containing 47.3 wt. % C₆ product (of which 89.41 wt. % was 1-hexene) and 49.8 wt. % C₈ product (of which 97.9 wt. % was 1-octene), and 19.6 grams of polymer. Example 47 demonstrates that using a chemically-treated solid oxide provides for the concurrent co-production of ethylene oligomers and polyethylene without substantial reactor fouling and/or plugging.

The invention is described above with reference to numerous aspects and embodiments, and specific examples. Many variations will suggest themselves to those skilled in the art in light of the above detailed description. All such obvious variations are within the full intended scope of the appended claims. Other embodiments of the invention can include, but are not limited to, the following (embodiments are described as “comprising” but, alternatively, can “consist essentially of” or “consist of”):

Embodiment 1. A catalyst system comprising:

- a) a heteroatomic ligand transition metal compound complex;
- b) a chemically-treated solid oxide; and
- c) an organoaluminum compound.

Embodiment 2. The catalyst system in embodiment 1, wherein the chemically-treated solid oxide comprises a solid oxide treated with an electron-withdrawing anion, e.g., any solid oxide and any electron-withdrawing anion disclosed herein.

Embodiment 3. The catalyst system in embodiment 1, wherein (a) the solid oxide comprises silica, alumina, silica-alumina, silica-coated alumina, aluminum phosphate, aluminophosphate, heteropolytungstate, titania, zirconia, magnesia, boria, zinc oxide, a mixed oxide thereof, or any mixture thereof, and (b) the electron-withdrawing anion comprises sulfate, bisulfate, fluoride, chloride, bromide, iodide, fluorosulfate, fluoroborate, phosphate, acetate, fluorophosphate, trifluoroacetate, triflate, fluorozirconate, fluorotitanate, phospho-tungstate, or any combination thereof.

Embodiment 4. The catalyst system in embodiment 2 or 3, wherein the solid oxide comprises silica, alumina, silica-alumina, silica-coated alumina, or a mixture thereof.

Embodiment 5. The catalyst system in embodiment 2 or 3, wherein the solid oxide comprises silica-coated alumina.

Embodiment 6. The catalyst system in any one of embodiments 2-5, wherein the electron-withdrawing anion comprises sulfate, fluoride, chloride, or any combination thereof.

Embodiment 7. The catalyst system in any one of embodiments 2-6, wherein the electron-withdrawing anion comprises sulfate.

Embodiment 8. The catalyst system in any one of embodiments 2-6, wherein the electron-withdrawing anion comprises fluoride, chloride, or both.

Embodiment 9. The catalyst system in embodiment 1, wherein the chemically-treated solid oxide comprises fluorided alumina, chlorided alumina, bromided alumina, sulfated alumina, fluorided silica-alumina, chlorided silica-alumina, bromided silica-alumina, sulfated silica-alumina, fluorided silica-zirconia, chlorided silica-zirconia, bromided silica-zirconia, sulfated silica-zirconia, fluorided silica-titania, fluorided silica-coated alumina, fluorided-chlorided silica-coated alumina, sulfated silica-coated alumina, phosphated silica-coated alumina, or any combination thereof.

Embodiment 10. The catalyst system in embodiment 1, wherein the chemically-treated solid oxide comprises a fluorided solid oxide, a sulfated solid oxide, or a combination thereof.

Embodiment 11. The catalyst system in embodiment 1, wherein the chemically-treated solid oxide comprises fluorided alumina, sulfated alumina, fluorided silica-alumina, sulfated silica-alumina, 5 fluorided silica-coated alumina, fluorided-chlorided silica-coated alumina, sulfated silica-coated alumina, or any combination thereof.

Embodiment 12. The catalyst system in embodiment 1, wherein the chemically-treated solid oxide comprises fluorided silica-coated alumina.

Embodiment 13. The catalyst system in embodiment 1, wherein the chemically-treated solid 10 oxide comprises sulfated alumina.

Embodiment 14. The catalyst system in any one of embodiments 2-13, wherein the chemically-treated solid oxide further comprises any metal or metal ion disclosed herein, e.g., zinc, nickel, vanadium, titanium, silver, copper, gallium, tin, tungsten, molybdenum, zirconium, or any combination thereof.

Embodiment 15. The catalyst system in any one of the preceding embodiments, wherein the 15 organoaluminum compound comprises any organoaluminum compound disclosed herein.

Embodiment 16. The catalyst system in any one of the preceding embodiments, wherein the organoaluminum compound comprises an aluminosilane; alternatively, an alkylaluminum compound; or alternatively, a trialkylaluminum compound.

Embodiment 17. The catalyst system in embodiment 15, wherein the organoaluminum 20 compound comprises trimethylaluminum, triethylaluminum, tri-n-propylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, diisobutylaluminum hydride, diethylaluminum ethoxide, diethylaluminum chloride, or any combination thereof.

Embodiment 18. The catalyst system in embodiment 17, wherein the alkylaluminum 25 compound comprises triethylaluminum.

Embodiment 19. The catalyst system in any one of the preceding embodiments, wherein the catalyst system is substantially free of aluminosilane compounds.

Embodiment 20. The catalyst system in any one of the preceding embodiments, wherein the heteroatomic ligand transition metal compound complex comprises any transition metal disclosed 30 herein, e.g., a Group 5-10 transition metal.

Embodiment 21. The catalyst system in any one of the preceding embodiments, wherein the heteroatomic ligand transition metal compound complex comprises chromium, iron, nickel, or cobalt, either singly or in combination.

Embodiment 22. The catalyst system in any one of the preceding embodiments, wherein the 35 heteroatomic ligand transition metal compound complex comprises a diphosphino amine transition metal compound complex, an N²-phosphinyl amidine transition metal compound complex, an N²-

phosphinyl formamidine transition metal compound complex, an N²-phosphinyl guanidine transition metal compound complex, or any combination thereof.

Embodiment 23. The catalyst system in any one of the preceding embodiments, wherein the heteroatomic ligand transition metal compound complex comprises a diphosphino amine chromium compound complex, an N²-phosphinyl amidine chromium compound complex, an N²-phosphinyl formamidine chromium compound complex, an N²-phosphinyl guanidine chromium compound complex, or any combination thereof.

Embodiment 24. The catalyst system in any one of embodiments 1-23, wherein the heteroatomic ligand transition metal compound complex comprises an N²-phosphinyl amidine chromium compound complex, or alternatively, a diphosphino amine chromium compound complex.

Embodiment 25. The catalyst system in any one of embodiments 1-23, wherein the heteroatomic ligand transition metal compound complex comprises an N²-phosphinyl formamidine chromium compound complex.

Embodiment 26. The catalyst system in any one of embodiments 1-23, wherein the heteroatomic ligand transition metal compound complex comprises an N²-phosphinyl guanidine chromium compound complex.

Embodiment 27. The catalyst system in any one of the preceding embodiments, wherein the weight ratio of the transition metal of the heteroatomic ligand transition metal compound complex (or complexes) to the chemically-treated solid oxide (or oxides) is in any range of weight ratios disclosed herein, e.g., from 1:1 to 1:1,000,000, from 1:10 to 1:10,000, from 1:20 to 1:1000, etc.

Embodiment 28. The catalyst system in any one of the preceding embodiments, wherein the weight ratio of the chemically-treated solid oxide (or oxides) to the organoaluminum compound (or compounds) is in any range of weight ratios disclosed herein, e.g., from 1:5 to 1000:1, from 1:3 to 200:1, from 1:1 to 100:1, etc.

Embodiment 29. A process for preparing a catalyst system in any one of embodiments 1-28, the process comprising contacting, in any order, a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound to form a catalyst system mixture.

Embodiment 30. A process for preparing the catalyst system in any one of embodiments 1-28 comprising: (i) contacting a chemically-treated solid oxide and an organoaluminum compound for a first period of time to form a precontacted mixture; and (ii) contacting the precontacted mixture with a heteroatomic ligand transition metal compound complex for a second period of time to form the catalyst system; or alternatively, (i) contacting a heteroatomic ligand transition metal compound complex and an organoaluminum compound for a first period of time to form a precontacted mixture; and (ii) contacting the precontacted mixture with a chemically-treated solid oxide for a second period of time to form the catalyst system.

Embodiment 31. The process in embodiment 30, wherein the first period of time is in any range of first time periods disclosed herein, e.g., at least 5 seconds, at least 5 minutes, at least 10 minutes, from 5 seconds to 48 hours, from 5 minutes to 6 hours, etc.

Embodiment 32. The process in any one of embodiments 30-31, wherein the second period
5 of time is in any range of second time periods disclosed herein, e.g., at least 5 seconds, at least 5 minutes, at least 10 minutes, from 5 seconds to 48 hours, from 5 minutes to 6 hours, etc.

Embodiment 33. A process for preparing the catalyst system in any one of embodiments 1-28 comprising:

(i) contacting a chemically-treated solid oxide and a first organoaluminum compound for a
10 first period of time to form a first mixture;

(ii) contacting a heteroatomic ligand transition metal compound complex and a second organoaluminum compound for a second period of time to form a second mixture; and

(iii) contacting the first mixture with the second mixture for a third period of time to form the catalyst system.

Embodiment 34. The process in embodiment 33, wherein the first period of time and the
15 second period of time are independently in any range of first and second time periods disclosed herein, e.g., at least 5 seconds, at least 5 minutes, at least 10 minutes, from 5 seconds to 48 hours, from 5 minutes to 6 hours, etc.

Embodiment 35. The process in embodiment 33 or 34, wherein the third period of time is in
20 any range of third time periods disclosed herein, e.g., at least 5 seconds, at least 5 minutes, at least 10 minutes, from 5 seconds to 48 hours, from 5 minutes to 6 hours, etc.

Embodiment 36. The process in any one of embodiments 33-35, wherein the first organoaluminum compound and the second first organoaluminum compound are different, or alternatively, the first organoaluminum compound and the second first organoaluminum compound
25 are the same.

Embodiment 37. A catalyst system produced by the process of any one of embodiments 29-36.

Embodiment 38. A process comprising a) contacting i) ethylene, ii) the catalyst system in any one of embodiments 1-28, and iii) optionally an organic reaction medium, and b) forming an oligomer
30 product.

Embodiment 39. A process comprising a) preparing a catalyst system according to the process in any one of embodiments 29-36; b) contacting the catalyst system prepared in step a) with ethylene and optionally an organic reaction medium; and c) forming an oligomer product.

Embodiment 40. The process in embodiment 39, wherein a productivity of the catalyst
35 system (in kg (C₆+C₈)/g transition metal, kg (C₆+C₈)/g transition metal/hr, or kg (C₆+C₈)/g Al) is greater (by any amount disclosed herein, e.g., at least 10%, at least 25%, at least 100%, etc.) than that of a similar process wherein a catalyst system is prepared by contacting the chemically-treated solid

oxide and the heteroatomic ligand transition metal compound complex to form an mixture, and then contacting the first mixture with the organoaluminum compound; or simultaneously contacting the chemically-treated solid oxide, the heteroatomic ligand transition metal compound complex, and the organoaluminum compound.

Embodiment 41. The process in embodiment 39, wherein a productivity of the catalyst system (in kg (C₆+C₈)/g transition metal, kg (C₆+C₈)/g transition metal/hr, or kg (C₆+C₈)/g Al) is from 10% to 500% greater, or from 25% to 200% greater, etc., than that of a similar process wherein a catalyst system is prepared by contacting the chemically-treated solid oxide and the heteroatomic ligand transition metal compound complex to form an mixture, and then contacting the first mixture with the organoaluminum compound; or simultaneously contacting the chemically-treated solid oxide, the heteroatomic ligand transition metal compound complex, and the organoaluminum compound.

Embodiment 42. The process in any one of embodiments 38-41, wherein the oligomer product is formed at an oligomerization temperature in any oligomerization temperature range disclosed herein, e.g., from 0 °C to 165 °C, from 20 °C to 160 °C, from 40 °C to 160 °C, from 50 °C to 150 °C, from 50 °C to 140 °C, from 50 °C to 130 °C, from 45 °C to 100 °C, from 45 °C to 90 °C, etc.

Embodiment 43. The process in any one of embodiments 38-42, wherein the oligomer product is formed at a reaction pressure (or ethylene partial pressure) in any range disclosed herein, e.g., from 50 psig (344 kPa) to 4,000 psig (27.6 MPa), from 100 psig (689 kPa) to 3,000 psig (20.9 MPa), from 200 psig (1.4 MPa) to 2,000 psig (13.8 MPa), from 250 psig (1.5 MPa) to 1,500 psig (10.3 MPa), etc.

Embodiment 44. The process in any one of embodiments 38-43, wherein the oligomer product is formed in the substantial absence of hydrogen (e.g., no added hydrogen).

Embodiment 45. The process in any one of embodiments 38-43, wherein the oligomer product is formed in the presence of hydrogen.

Embodiment 46. The process in embodiment 45, wherein the oligomer product is formed at a hydrogen partial pressure in any range disclosed herein, e.g., from 1 psig (6.9 kPa) to 2000 psig (13.8 MPa), from 5 psig (34 kPa) to 1500 psig (10.3 MPa), from 10 psig (69 kPa) to 1000 psig (6.9 MPa), from 10 psig (69 kPa) to 500 psig (3.5 MPa), from 25 psig (172 kPa) to 500 psig (3.4 MPa), etc.

Embodiment 47. The process in any one of embodiments 38-46, wherein a productivity of the catalyst system is in any range disclosed herein, e.g., greater than 25,000 grams, greater than 50,000 grams, greater than 100,000 grams, greater than 150,000 grams, etc., of C₆+C₈ per gram of transition metal, under oligomerization conditions, with a triethylaluminum co-catalyst, using cyclohexane as a diluent and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.

Embodiment 48. The process in any one of embodiments 38-47, wherein a productivity of the catalyst system is in any range disclosed herein, e.g., greater than 1,000 grams, greater than 2,500 grams, greater than 10,000 grams, greater than 50,000 grams, etc., of ethylene polymer per gram of

transition metal, under oligomerization conditions, with a triethylaluminum co-catalyst, using cyclohexane as a diluent and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.

Embodiment 49. The process in any one of embodiments 38-48, wherein the oligomer
5 product is formed in the substantial absence of aluminoxanes.

Embodiment 50. The process in any one of embodiments 38-49, wherein the oligomer product is formed in the presence of an organic reaction medium, e.g., any organic reaction medium disclosed herein, e.g., a hydrocarbon (for instance, cyclohexane or methylcyclohexane), a halogenated hydrocarbon, or any combination thereof.

10 Embodiment 51. The process in any one of embodiments 38-50, wherein the oligomer product is formed in a reaction system comprising a stirred tank reactor, a plug flow reactor, or any combination thereof; alternatively, a fixed bed reactor, a continuous stirred tank reactor, a loop slurry reactor, a solution reactor, a tubular reactor, a recycle reactor, or any combination thereof.

15 Embodiment 52. The process in any one of embodiments 38-51, wherein the process further comprises a step of deactivating the catalyst system using any suitable technique or any technique disclosed herein.

Embodiment 53. The process in any one of embodiments 38-52, wherein the oligomer product comprises a liquid oligomer product (liquid at standard temperature and pressure) and a solid polymer product (solid at standard temperature and pressure).

20 Embodiment 54. The process in embodiment 53, wherein the weight percentage of the solid polymer product, based on the total weight of the oligomer product, is in any range disclosed herein, e.g., from 2 wt. % to 80 wt. %, from 2 wt. % to 65 wt. %, from 2 wt. % to 30 wt. %, from 5 wt. % to 65 wt. %, from 5 wt. % to 30 wt. %, from 10 wt. % to 40 wt. %, etc.

25 Embodiment 55. The process in any one of embodiments 53-54, wherein the liquid oligomer product comprises C₆ and C₈ olefins.

Embodiment 56. The process in any one of embodiments 53-55, wherein the liquid oligomer product comprises an amount of C₆ and C₈ olefins (total) in any range disclosed herein, e.g., from 70 to 99.9 wt. %, from 80 to 99.9 wt. %, from 90 to 99.9 wt. %, from 92 to 99.9 wt. %, from 96 to 99.9 wt. %, etc.

30 Embodiment 57. The process in any one of embodiments 53-56, wherein the liquid oligomer product comprises an amount of C₆ olefins in any range disclosed herein, e.g., from 70 to 99.9 wt. %, from 80 to 99.9 wt. %, from 90 to 99.9 wt. %, from 92 to 99.9 wt. %, from 95 to 99.9 wt. %, etc.

35 Embodiment 58. The process in any one of embodiments 53-57, wherein the oligomer product and the liquid oligomer product comprise a C₆ oligomer product comprising an amount of 1-hexene in any range disclosed herein, e.g., from 90 to 99.99 mol %, from 95 to 99.99 mol %, from 98 to 99.99 mol %, from 99 to 99.99 mol %, etc.

Embodiment 59. The process in any one of embodiments 53-58, wherein the oligomer product and the liquid oligomer product comprise a C₈ oligomer product comprising an amount of 1-octene in any range disclosed herein, e.g., from 90 to 99.99 mol %, from 95 to 99.99 mol %, from 97 to 99.99 mol %, from 98 to 99.99 mol %, etc.

5 Embodiment 60. The process in any one of embodiments 53-59, wherein the solid polymer product comprises an ethylene polymer (e.g., an ethylene homopolymer).

Embodiment 61. The process in any one of embodiments 53-60, wherein the solid polymer product has a Mn in any range of Mn's disclosed herein, e.g., from 5,000 to 25,000 g/mol, from 5,000 to 20,000 g/mol, from 8,000 to 25,000 g/mol, from 8,000 to 20,000 g/mol, etc.

10 Embodiment 62. The process in any one of embodiments 53-61, wherein the solid polymer product has a Mp in any range of Mp's disclosed herein, e.g., from 30,000 to 200,000 g/mol, from 30,000 to 170,000 g/mol, from 35,000 to 170,000 g/mol, from 40,000 to 160,000 g/mol, etc.

Embodiment 63. The process in any one of embodiments 53-62, wherein the solid polymer product is insoluble in the organic reaction medium, e.g., a hydrocarbon (for instance, cyclohexane or methylcyclohexane), a halogenated hydrocarbon, or any combination thereof.

15 Embodiment 64. The process in any one of embodiments 53-63, wherein at least a portion of the solid polymer product comprises chemically-treated solid oxide particles.

Embodiment 65. The process in any one of embodiments 53-64, wherein the process further comprises a step of isolating the liquid oligomer product, e.g., from the solid polymer product, from the organic reaction medium, etc., using any suitable technique or any technique disclosed herein, e.g., a filtration process, an evaporation process, a distillation process, as well as combinations thereof.

20 Embodiment 66. The process in any one of embodiments 53-65, wherein the process further comprises a step of isolating the solid polymer product, e.g., from the liquid oligomer product, from the organic reaction medium, etc., using any suitable technique or any technique disclosed herein, e.g., a filtration process, an evaporation process, a distillation process, as well as combinations thereof.

25 Embodiment 67. The process in any one of embodiments 53-66, wherein the process further comprises a step of separating solid polymer product comprising at least a portion of the catalyst system (or deactivated catalyst system), e.g., from the liquid oligomer product, from the organic reaction medium, etc., using any suitable liquid-solid separation technique or any technique disclosed herein, e.g., a filtration process, an evaporation process, a distillation process, as well as combinations thereof.

30 Embodiment 68. The process in any one of embodiments 38-67, wherein the process is performed without reactor fouling, e.g., no reactor fouling (without substantial reactor fouling, substantially no reactor fouling) in any reactor or multi-reactor system disclosed herein, e.g., a stirred tank reactor, a plug flow reactor, or any combination thereof; or alternatively, a fixed bed reactor, a

continuous stirred tank reactor, a loop slurry reactor, a solution reactor, a tubular reactor, a recycle reactor, or any combination thereof .

Embodiment 69. A liquid oligomer product (liquid at standard temperature and pressure) produced by the process in any one of embodiments 38-68.

5 Embodiment 70. A solid polymer product (solid at standard temperature and pressure) produced by the process in any one of embodiments 38-68.

Embodiment 71. An article comprising (or formed from) the solid polymer product in embodiment 70.

10 Embodiment 72. The article in embodiment 71, wherein the article is an agricultural film, an automobile part, a bottle, a drum, a fiber or fabric, a food packaging film or container, a food service article, a fuel tank, a geomembrane, a household container, a liner, a molded product, a medical device or material, a pipe, a sheet or tape, or a toy.

CLAIMS

We claim:

5

1. A catalyst system comprising:
 - a) a heteroatomic ligand transition metal compound complex;
 - b) a chemically-treated solid oxide; and
 - c) an organoaluminum compound.
- 10 2. The catalyst system of claim 1, wherein the solid oxide comprises silica, alumina, silica-alumina, silica-coated alumina, or a mixture thereof.
3. The catalyst system of claim 1, wherein the chemically-treated solid oxide comprises a fluorided solid oxide, a sulfated solid oxide, or a combination thereof.
- 15 4. The catalyst system of claim 1, wherein the chemically-treated solid oxide comprises fluorided alumina, sulfated alumina, fluorided silica-alumina, sulfated silica-alumina, fluorided silica-coated alumina, fluorided-chlorided silica-coated alumina, sulfated silica-coated alumina, or any combination thereof.
- 20 5. The catalyst system of any one of claims 1-4, wherein the organoaluminum compound comprises trimethylaluminum, triethylaluminum, tri-n-propylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-n-hexylaluminum, tri-n-octylaluminum, diisobutylaluminum hydride, diethylaluminum ethoxide, diethylaluminum chloride, or any combination thereof.
- 25 6. The catalyst system of any one of claims 1-5, wherein the catalyst system is substantially free of aluminoxane compounds.
7. The catalyst system of any one of claims 1-6, wherein the heteroatomic ligand transition metal compound complex comprises a diphosphino amine transition metal compound complex, an N²-phosphinyl amidine transition metal compound complex, an N²-phosphinyl formamidine transition metal compound complex, an N²-phosphinyl guanidine transition metal compound complex, or any combination thereof.
- 30 8. The catalyst system of any one of claims 1-7, wherein the heteroatomic ligand transition metal compound complex comprises a diphosphino amine chromium compound complex, an N²-phosphinyl amidine chromium compound complex, an N²-phosphinyl formamidine chromium compound complex, an N²-phosphinyl guanidine chromium compound complex, or any combination thereof.

9. The catalyst system of any one of claims 1-8, wherein the weight ratio of the transition metal of the heteroatomic ligand transition metal compound complex to the chemically-treated solid oxide is in any range of from 1:10 to 1:10,000.
10. The catalyst system of any one of claims 1-9, wherein the weight ratio of the chemically-treated solid oxide to the organoaluminum compound is in a range of from 1:3 to 200:1.
11. A process for preparing a catalyst system of any one of claims 1-10, the process comprising contacting, in any order, a heteroatomic ligand transition metal compound complex, a chemically-treated solid oxide, and an organoaluminum compound to form a catalyst system mixture.
12. A process for preparing the catalyst system of any one of claims 1-10 comprising:
- (i) contacting a chemically-treated solid oxide and an organoaluminum compound for a first period of time to form a precontacted mixture; and
 - (ii) contacting the precontacted mixture with a heteroatomic ligand transition metal compound complex for a second period of time to form the catalyst system;
- or
- (i) contacting a heteroatomic ligand transition metal compound complex and an organoaluminum compound for a first period of time to form a precontacted mixture; and
 - (ii) contacting the precontacted mixture with a chemically-treated solid oxide for a second period of time to form the catalyst system.
13. A process for preparing the catalyst system of any one of claims 1-10 comprising:
- (i) contacting a chemically-treated solid oxide and a first organoaluminum compound for a first period of time to form a first mixture;
 - (ii) contacting a heteroatomic ligand transition metal compound complex and a second organoaluminum compound for a second period of time to form a second mixture; and
 - (iii) contacting the first mixture with the second mixture for a third period of time to form the catalyst system.
14. A process comprising:
- a) contacting
 - i) ethylene,
 - ii) the catalyst system in any one of claims 1-10, and
 - iii) optionally an organic reaction medium, and
 - b) forming an oligomer product.
15. A process comprising:
- a) preparing a catalyst system according to the process of any one of claims 11-13;

- b) contacting the catalyst system prepared in step a) with ethylene and optionally an organic reaction medium; and
 - c) forming an oligomer product.
16. The process of claim 14 or 15, wherein a productivity of the catalyst system is greater than
5 50,000 grams of C₆+C₈ per gram of transition metal, under oligomerization conditions, with a triethylaluminum co-catalyst, using cyclohexane as a diluent and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.
17. The process of any one of claims 14-16, wherein a productivity of the catalyst system is greater
10 than 10,000 grams of ethylene polymer per gram of transition metal, under oligomerization conditions, with a triethylaluminum co-catalyst, using cyclohexane as a diluent and 50 psig hydrogen pressure, and with an oligomerization temperature of 70 °C and an ethylene pressure of 875 psig.
18. The process of any one of claims 14-17, wherein the oligomer product is formed in the substantial absence of aluminoxanes.
- 15 19. The process of any one of claims 14-18, wherein the oligomer product is formed in the presence of an organic reaction medium.
20. The process of any one of claims 14-19, wherein the oligomer product comprises a liquid oligomer product and a solid polymer product.
21. The process of claim 20, wherein the weight percentage of the solid polymer product, based on
20 the total weight of the oligomer product, is in the range of from 5 wt. % to 65 wt. %.
22. The process of claim 20 or 21, wherein the liquid oligomer product comprises C₆ and C₈ olefins.
23. The process in any one of claims 20-22, wherein the liquid oligomer product comprises an amount of C₆ and C₈ olefins in a range of from 92 to 99.9 wt. %.
24. The process of any one of claims 20-23, wherein the solid polymer product comprises an
25 ethylene polymer.
25. The process of any one of claims 20-24, wherein the solid polymer product has a Mn in a range of from 5,000 to 25,000 g/mol and a Mp in a range of from 30,000 to 200,000 g/mol.
26. The process in any one of claims 20-25, wherein at least a portion of the solid polymer product comprises chemically-treated solid oxide particles.
- 30 27. The process of any one of claims 20-26, wherein the process further comprises a step of isolating the liquid oligomer product from the solid polymer product and/or the organic reaction medium.

28. The process of any one of claims 20-27, wherein the process further comprises a step of isolating the solid polymer product from the liquid oligomer product and/or the organic reaction medium.
29. The process of any one of claims 14-28, wherein the process is performed without reactor fouling.
- 5

FIG. 1

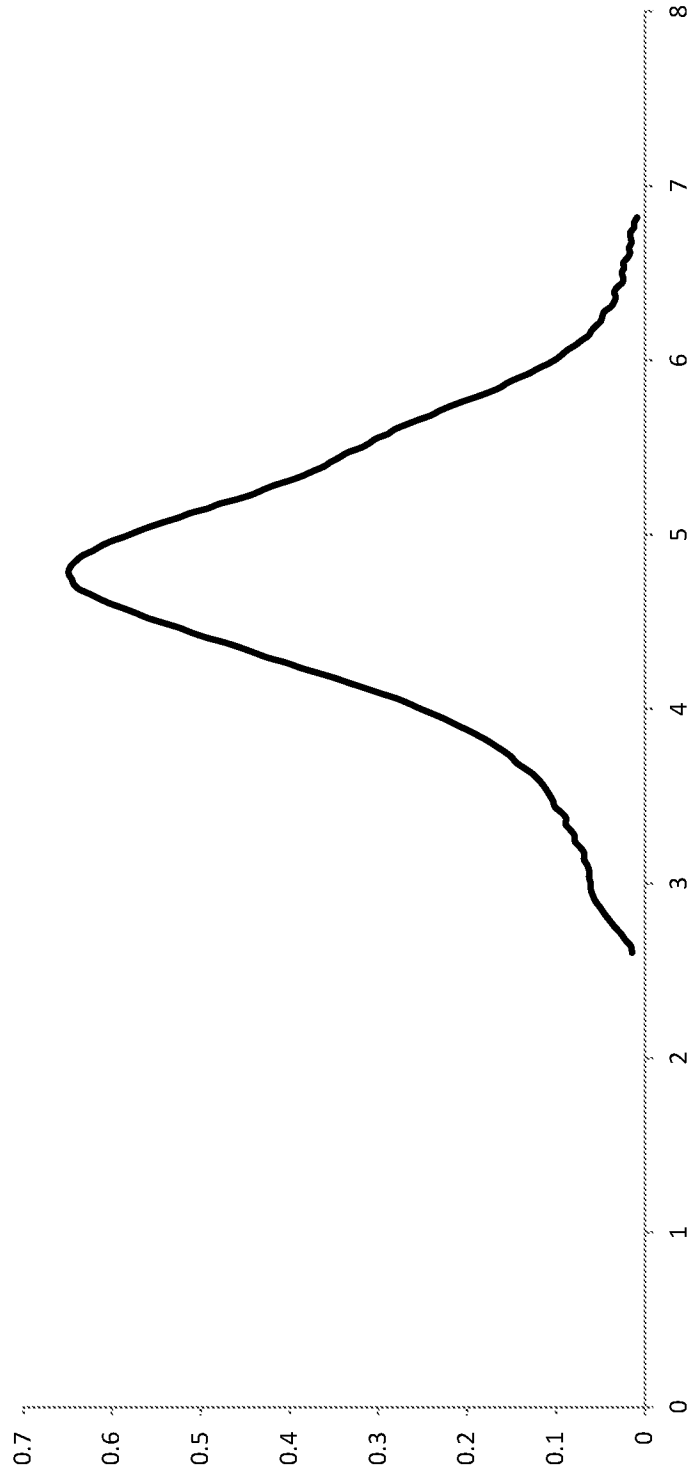


FIG. 2


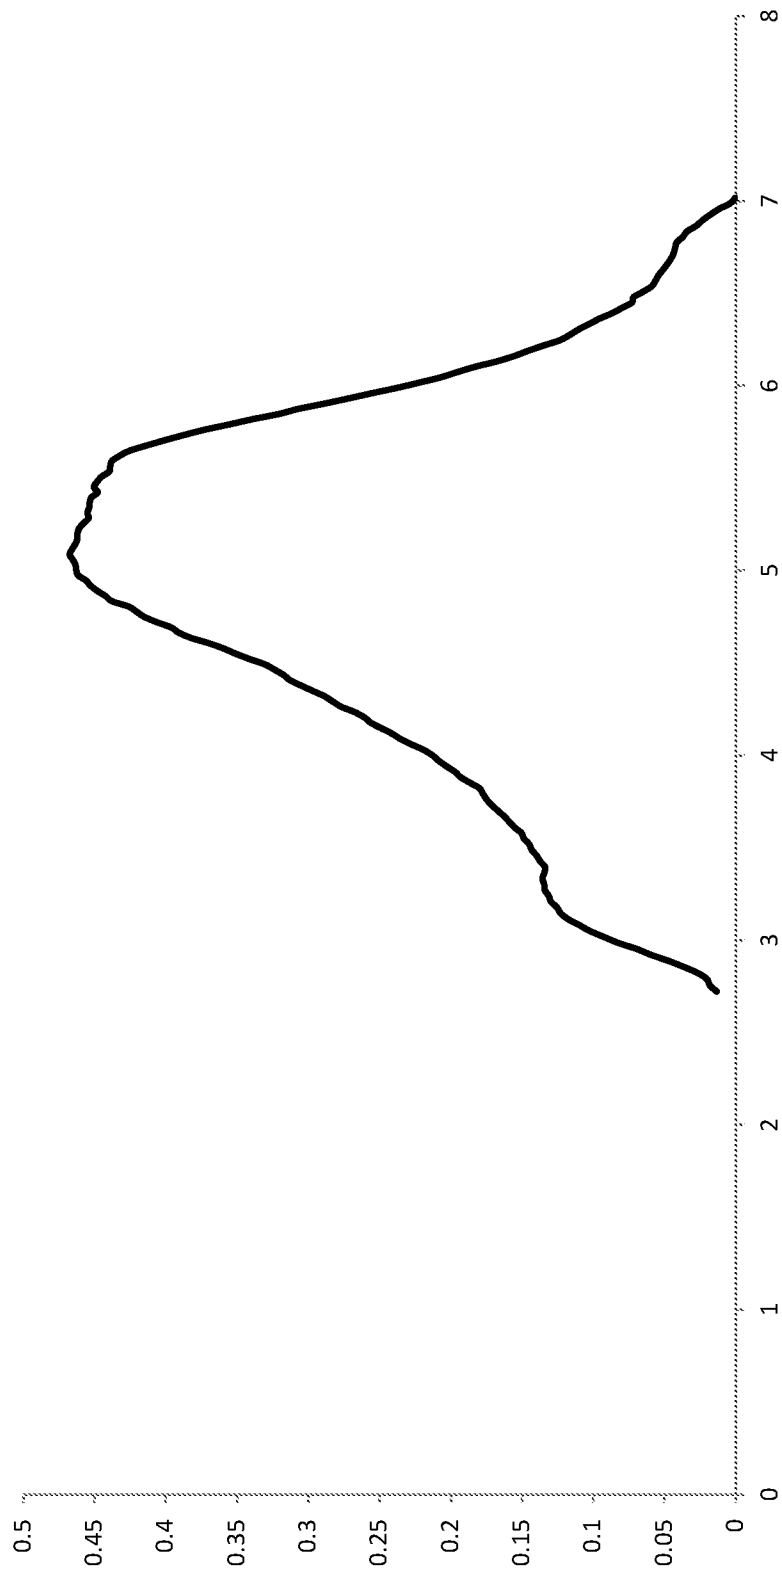


FIG. 3

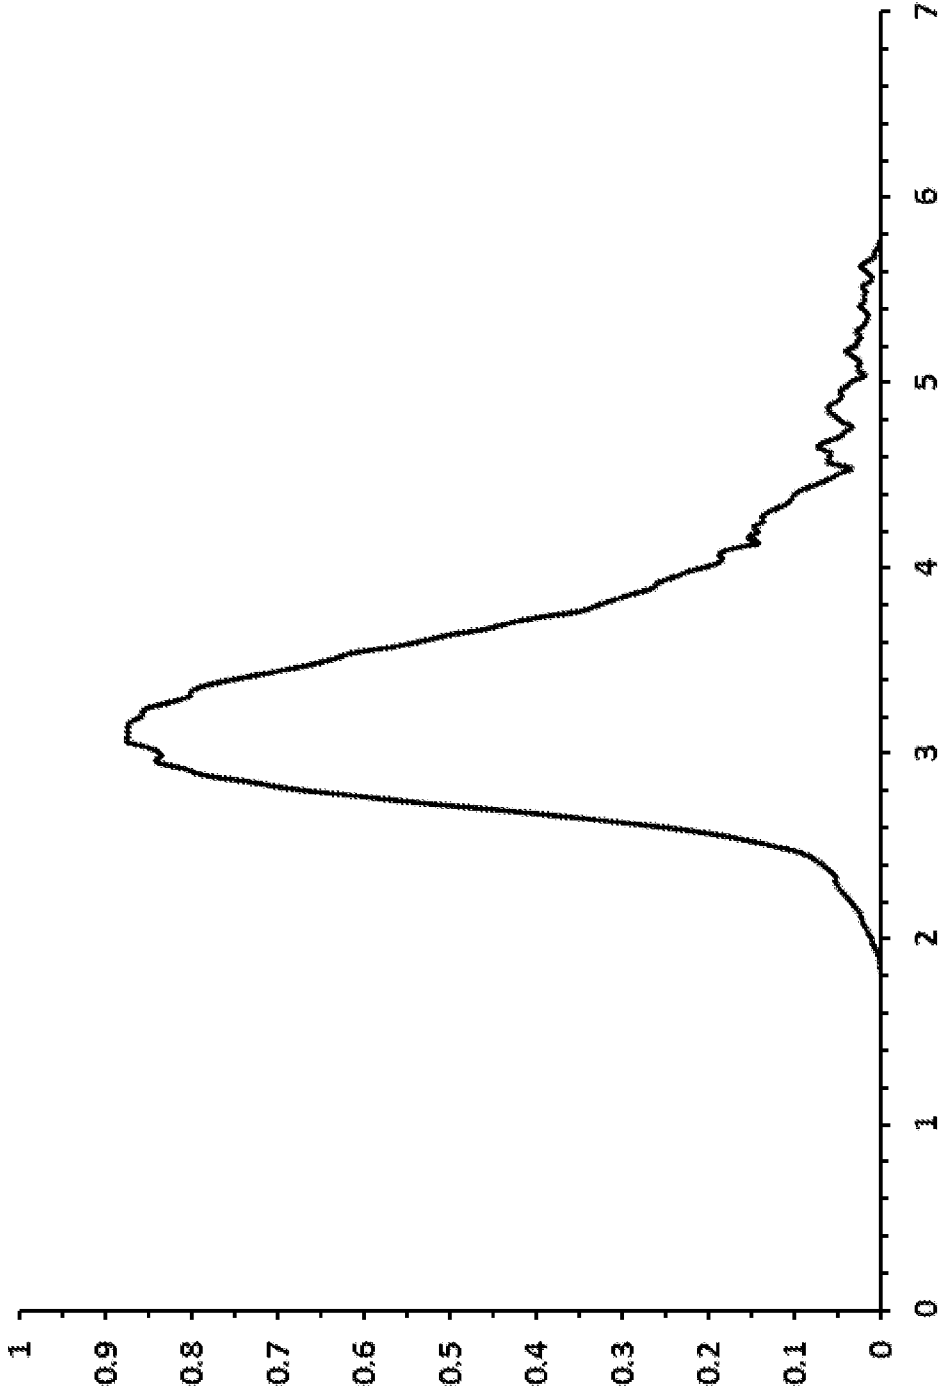

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2017/033137

A. CLASSIFICATION OF SUBJECT MATTER

INV. B01J31/18 B01J31/14
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

B01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/008515 A1 (CHEVRON PHILLIPS CHEMICAL CO [US]; MCDANIEL MAX P [US]; THORN MATTHEW) 21 January 2010 (2010-01-21) claims 1, 8, 11, 14, 18; examples 5,6 -----	1-6, 9-11, 14-26,29
X	US 2014/296453 A1 (HLAVINKA MARK L [US] ET AL) 2 October 2014 (2014-10-02) paragraph [0151]; claims 18, 20; examples 14-22 -----	1-6, 9-11, 14-26,29
X	WO 2006/113272 A1 (CHEVRON PHILLIPS CHEMICAL CO [US]; JAYARATNE KUMI C [US]; JENSEN MICHA) 26 October 2006 (2006-10-26) claims 1, 10; example 9 ----- -/-	1-6, 9-11, 14-26,29



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 June 2017

Date of mailing of the international search report

05/07/2017

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Klaes, Daphne

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2017/033137

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2014/243491 A1 (DING ERRUN [US] ET AL) 28 August 2014 (2014-08-28) claim 24; examples 7-61 -----	1-6, 9-11, 14-26,29
X	WO 2013/168103 A1 (SASOL TECH PTY LTD [ZA]) 14 November 2013 (2013-11-14) page 2, line 26 - line 32; claim 20; example 21; table 21 page 3, line 10 - line 32 page 15, line 27 page 18, line 34 - page 19, line 2 -----	1-29
Y	AHMED ALZAMLY ET AL: "Synthesis, Structures, and Ethylene Oligomerization Activity of Bis(phosphanylamine)pyridine Chromium/Aluminate Complexes", ORGANOMETALLICS, vol. 32, no. 23, 9 December 2013 (2013-12-09), pages 7107-7115, XP55385128, US ISSN: 0276-7333, DOI: 10.1021/om4008289 the whole document -----	1-29
Y	SYDORA O L ET AL: "Selective ethylene tri-/tetramerization catalysts", ACS CATAL, AMERICAN CHEMICAL SOCIETY, US, vol. 2, no. 12, 7 December 2012 (2012-12-07), pages 2452-2455, XP008164444, ISSN: 2155-5435, DOI: 10.1021/CS300488T [retrieved on 2012-10-26] the whole document -----	1-29
Y	US 2013/317265 A1 (SMALL BROOKE L [US] ET AL) 28 November 2013 (2013-11-28) claim 1 -----	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/033137

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2010008515	A1	21-01-2010	
		AU 2009271628 A1	21-01-2010
		CA 2730726 A1	21-01-2010
		CN 101628243 A	20-01-2010
		CO 6341584 A2	21-11-2011
		EG 26533 A	04-02-2014
		EP 2310124 A1	20-04-2011
		ES 2529469 T3	20-02-2015
		KR 20110042056 A	22-04-2011
		RU 2011105195 A	20-08-2012
		US 2010010174 A1	14-01-2010
		US 2011065874 A1	17-03-2011
		US 2012108764 A1	03-05-2012
		WO 2010008515 A1	21-01-2010
US 2014296453	A1	02-10-2014	
		CN 103183700 A	03-07-2013
		EP 2797934 A1	05-11-2014
		US 2013172497 A1	04-07-2013
		US 2014296453 A1	02-10-2014
		WO 2013101476 A1	04-07-2013
WO 2006113272	A1	26-10-2006	
		AT 485311 T	15-11-2010
		AU 2006236780 A1	26-10-2006
		BR PI0610610 A2	13-07-2010
		CA 2604552 A1	26-10-2006
		CN 101184782 A	21-05-2008
		EP 1874828 A1	09-01-2008
		HK 1113583 A1	07-01-2011
		US 2006234857 A1	19-10-2006
		WO 2006113272 A1	26-10-2006
US 2014243491	A1	28-08-2014	
		BR 112013018910 A2	04-10-2016
		CA 2825394 A1	02-08-2012
		CN 102617759 A	01-08-2012
		EP 2668196 A1	04-12-2013
		US 2012190803 A1	26-07-2012
		US 2013085060 A1	04-04-2013
		US 2014243491 A1	28-08-2014
		WO 2012103057 A1	02-08-2012
		ZA 201305121 B	25-09-2014
WO 2013168103	A1	14-11-2013	
		CA 2866971 A1	14-11-2013
		CN 104271537 A	07-01-2015
		EP 2847149 A1	18-03-2015
		KR 20150006474 A	16-01-2015
		SG 11201407140S A	27-11-2014
		US 2015152200 A1	04-06-2015
		WO 2013168103 A1	14-11-2013
US 2013317265	A1	28-11-2013	
		AU 2010260128 A1	19-01-2012
		BR PI1013814 A2	12-04-2016
		BR 122013014965 A2	10-05-2016
		CA 2765158 A1	23-12-2010
		CN 102803312 A	28-11-2012
		EP 2443160 A1	25-04-2012
		JP 5620986 B2	05-11-2014
		JP 2012530185 A	29-11-2012
		JP 2015034294 A	19-02-2015
		JP 2016186089 A	27-10-2016

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2017/033137

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		KR 20120035164 A	13-04-2012
		KR 20160054042 A	13-05-2016
		KR 20160108608 A	19-09-2016
		NZ 597113 A	28-03-2014
		PH 12015501355 A1	12-10-2015
		RU 2012101476 A	27-07-2013
		RU 2013156050 A	27-06-2015
		SG 176790 A1	30-01-2012
		SG 10201403259S A	30-10-2014
		US 2010317904 A1	16-12-2010
		US 2013317265 A1	28-11-2013
		US 2016264493 A1	15-09-2016
		WO 2010147993 A1	23-12-2010
		ZA 201109175 B	29-04-2015
