

**(12) STANDARD PATENT
(19) AUSTRALIAN PATENT OFFICE**

(11) Application No. AU 2004268209 B2

(54) Title
Chamber support for pyrolytic waste treatment system

(51) International Patent Classification(s)
F23G 7/04 (2006.01) **F23J 1/00** (2006.01)
F23G 5/12 (2006.01) **F23M 5/02** (2006.01)

(21) Application No: **2004268209** (22) Date of Filing: **2004.08.10**

(87) WIPO No: **WO05/022038**

(30) Priority Data

(31) Number
60/497,397 (32) Date
2003.08.21 (33) Country
US

(43) Publication Date: **2005.03.10**
(44) Accepted Journal Date: **2009.06.11**

(71) Applicant(s)
International Environmental Solutions Corporation

(72) Inventor(s)
Torres, Raul De La;Cole, Cameron;Watts, Dan;Cole, Toby L.

(74) Agent / Attorney
Davies Collison Cave, Level 3 303 Coronation Drive Milton Business Centre, QLD, 4064

(56) Related Art
US 5258101 A
US 1454338 A

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
10 March 2005 (10.03.2005)

PCT

(10) International Publication Number
WO 2005/022038 A3

(51) International Patent Classification⁷: F23G 7/04, F23M 5/02

(21) International Application Number: PCT/US2004/027154

(22) International Filing Date: 10 August 2004 (10.08.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data: 60/497,397 21 August 2003 (21.08.2003) US

(71) Applicant (for all designated States except US): INTERNATIONAL ENVIRONMENTAL SOLUTIONS CORPORATION [US/US]; 26585 Sherman Road, Romoland, CA 92585 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): COLE, Cameron [US/US]; International Environmental Solutions Corporation, 26585 Sherman Road, Romoland, CA 92585 (US). TORRES, Raul de la [US/US]; International Environmental Solutions Corporation, 26585 Sherman Road, Romoland, CA 92585 (US). COLE, Toby, L. [US/US]; International Environmental Solutions Corporation, 26585 Sherman Road, Romoland, CA 92585 (US). WATTS,

Dan [US/US]; International Environmental Solutions Corporation, 26585 Sherman Road, Romoland, CA 92585 (US).

(74) Agent: FESSENMAIER, Martin; Rutan & Tucker, LLP, 611 Anton Blvd., Suite 1400, Costa Mesa, CA 92626 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

[Continued on next page]

(54) Title: CHAMBER SUPPORT FOR PYROLYtic WASTE TREATMENT SYSTEM

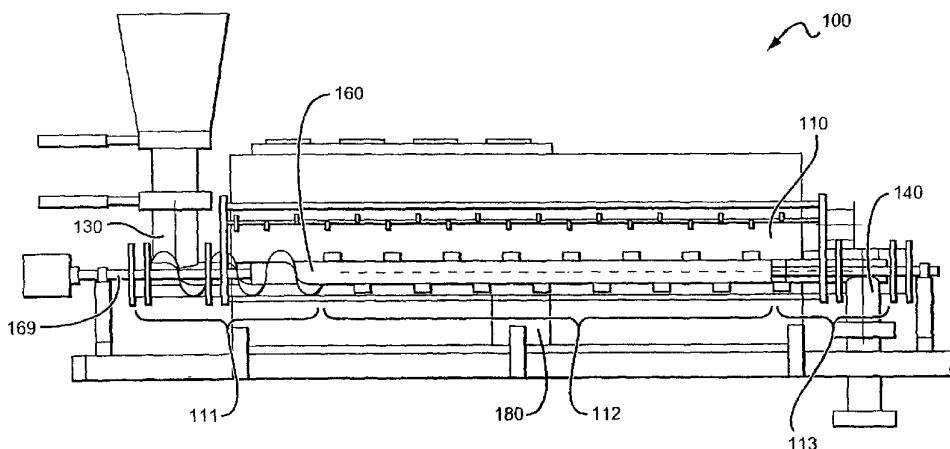

WO 2005/022038 A3

(57) Abstract: The inventive subject matter is directed toward a pyrolytic waste treatment system having a pyrolysis chamber supported in a manner that causes minimal movement or flexing of the chamber as the temperature of the chamber changes. Preferred solutions utilize support structures made from materials having low coefficients of thermal expansion, and structures adapted to allow chambers to expand and contract with temperature changes.

**(88) Date of publication of the international search report:**

7 July 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Date of publication of the amended claims:

15 September 2005

CHAMBER SUPPORT FOR PYROLYtic WASTE TREATMENT SYSTEM

This application claims the benefit of U.S. provisional application number 60/497397 filed on 21 August 2003 incorporated herein by reference in its entirety.

Field of The Invention

The field of the invention is pyrolytic waste treatment.

Background of The Invention

Pyrolysis is a known method for treatment of waste. Examples of pyrolytic waste treatment systems can be found in U.S. Patent Nos. 4,759,300, 5,653,183, 5,868,085, and 6,619,214. Unlike incineration, pyrolysis is the destructive decomposition of waste materials using indirect heat in the absence of oxygen. Burning wastes through incineration with direct flame in the presence of oxygen can be explosive, causing turbulence in the burning chamber, which fosters a recombination of released gases. Waste destruction in an oxygen-rich atmosphere makes conversion far less complete, is highly inefficient and creates harmful substances.

In contrast, the pyrolytic process employs high temperature in, most desirably, an atmosphere substantially free of oxygen (for example, in a practical vacuum), to convert the solid components of waste to a mixture of solids, liquids, and gases with proportions determined by operating temperature, pressure, oxygen content, and other conditions. The solid residue remaining after pyrolysis commonly is referred to as char. The vaporized product of pyrolysis is often further treated by a process promoting oxidation, which "cleans" the vapors to eliminate oils and other particulate matter there from, allowing the resultant gases then to be safely released to the atmosphere.

What has long been needed and heretofore has been unavailable is an improved pyrolytic waste treatment system that is highly efficient, is easy to maintain, is safe, reliable and capable of operation with a wide variety of compositions of waste materials, and that can be constructed and installed at relatively low cost. The thrust of the present invention is to provide such an improved pyrolytic waste treatment system.

Summary of the Invention

In accordance with the invention, there is provided a pyrolytic waste treatment system comprising an elongated pyrolysis chamber wherein the chamber is supported by at

least one support having a coefficient of thermal (linear) expansion less than $U 10^{-6}/^{\circ}\text{C}$. where U is 10, and wherein the at least one support comprises a ceramic or phenolic material.

The pyrolysis chamber may thereby be supported in a manner that causes minimal

5 movement or flexing of the chamber as the temperature of the chamber changes. As such the present invention assists in solving a problem associated with the tendency for retort feed screws or other materials movement mechanisms to bind as a result of movement or flexing of the retort as its temperature rises.

10 The chamber is preferably supported in such a manner that allows the chamber to expand lengthwise, however, does not allow the chamber to flex sufficiently to cause the feed mechanism to bind during operation of the system.

In another aspect, there is provided a method of treating waste using a pyrolysis

15 chamber comprising: heating the chamber while it contains waste to be treated; and while heating the chamber: supporting the chamber with one or more supports having coefficients of thermal expansion less than or equal to $U 10^{-6}/^{\circ}\text{C}$. where U is 10; and supporting the chamber in a manner that allows the chamber to expand lengthwise without flexing sufficiently to cause a feed mechanism to bind during heating of the chamber.

20

Various objects, features, aspects and advantages of the present invention will become more apparent from the following detailed description of preferred embodiments of the invention, along with the accompanying drawings in which like numerals represent like components.

25

Brief Description of the Drawing

Fig. 1 is a schematic of a pyrolytic waste treatment system.

Detailed Description

30 Movement and/or flexing of the pyrolysis chamber can cause the feed mechanism within the pyrolysis chamber to bind or otherwise work less efficiently. As such, it is

2A

desirable to minimize movement and flexing of the chamber. It is contemplated that two significant sources of such movement and flexing comes from dimensional changes in any structures used to support the chamber, and from dimensional changes in the chamber itself. In system 100 of **Fig. 1**, saddle support 180 supports pyrolysis chamber 110 in a manner that 5 allows expansion and contraction of the chamber as temperature changes, particularly along its length, and does not cause the chamber to buckle such as by bending, warping, or crumpling. An alternative support method might have a retort that is held in position within a

heating chamber by brackets, suspended by cables, or utilizes some other form of support mechanism.

It is contemplated that the use of a ceramic saddle provides an additional benefit as a result of having a relatively low coefficient of thermal conductivity in that it would tend to inhibit the flow of heat out of the bottom portion of the pyrolysis chamber by reducing the rate at which heat is conducted through the walls of the chamber at points at which the chamber contacts the saddle. Another benefit of the use of a ceramic saddle is that it is less likely to transfer heat along the length of the chamber. In contrast a steel saddle would be more likely to conduct heat along the length of the chamber.

Saddle 180 (or whatever support mechanism is used) preferably comprises one or more materials having low coefficients of thermal expansion so that it has minimal dimensional changes as its temperature changes. If used to provide center support as shown in figure 1, expansion of saddle 180 may result in the center portion of chamber 110 being pushed upward relative to the ends of the chamber. As such, ceramic and phenolic materials are particularly well suited for forming the saddle and brackets. It is contemplated that materials having a coefficient of thermal expansion less than $X \cdot 10^{-6}/^{\circ}\text{C}$ where X is 11.5 would prove advantageous. However, having X equal to 11, 10.5, 10, 9, 7, 5 or 4 would be more advantageous.

It is contemplated that alternative embodiments may have saddles that extend along different lengths of the retort chamber they support, and may comprise more than one saddle. As such, it is contemplated that some embodiments will comprise at least one saddle that extends along $X\%$ of the length of the chamber where X is 1, 5, 10, 20, 30, 50, 75, 90, 95, 99, and 100.

Although different embodiments may utilize different methods of supporting the chamber, structures and/or materials or combinations thereof, preferred embodiments will facilitate creation of a pyrolytic waste treatment system comprising an elongated pyrolysis chamber and a feed mechanism extending along at least a portion of the length of the chamber wherein the chamber is supported in such a manner that the chamber does not flex sufficiently to cause the feed mechanism to bind during operation of the system. Although the amount of flex that can cause binding will vary between different embodiments, it is contemplated that in many instances keeping the amount of flex down so that the chamber

4

stays within at least .25 inches of a supporting saddle (or other mechanism) will be sufficient. It is contemplated that during operation of the system the pyrolysis chamber will undergo change in temperature of at least 1400 degrees, and at times during operation the chamber may differ in temperature between two points positioned along its length by at least 300° degrees fahrenheit.

More particularly, if mechanical supports are used, such supports will preferably have a relatively low coefficient of thermal expansion. As such, such supports may be formed from ceramic or phenolic materials or composites. The types of supports used may vary but it contemplated that the use of an underlying saddle would prove beneficial. In such an instance it is preferred that the saddle supports substantially all of the chamber but does so in a fashion that allows the chamber to expand and/or contract along the length of the saddle. Alternatively a mechanism that suspends the chamber may be used. As an example, brackets, hangers, cables or some other means may be positioned along the length of the chamber to provide any necessary support. As with a saddle support, expansion and/or contraction of the chamber should be provided for.

Thus, specific embodiments and applications of a pyrolytic system have been disclosed. It should be apparent, however, to those skilled in the art that many more modifications besides those already described are possible without departing from the inventive concepts herein. The inventive subject matter, therefore, is not to be restricted except in the spirit of the appended claims. Moreover, in interpreting both the specification and the claims, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms "comprises" and "comprising" should be interpreted as referring to elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced.

The reference in this specification to any prior publication (or information derived from it), or to any matter which is known, is not, and should not be taken as an acknowledgment or admission or any form of suggestion that that prior publication (or information derived from it) or known matter forms part of the common general knowledge in the field of endeavour to which this specification relates.

THE CLAIMS DEFINING THE INVENTION ARE AS FOLLOWS:

1. A pyrolytic waste treatment system comprising an elongated pyrolysis chamber wherein the chamber is supported by at least one support having a coefficient of thermal (linear) expansion less than $U 10^{-6}/^{\circ}\text{C}$. where U is 10, and wherein the at least one support comprises a ceramic or phenolic material.
2. The system of claim 1, wherein the at least one support comprises at least one saddle positioned beneath the chamber.
3. The system of claim 1, wherein the at least one saddle extends along $X\%$ of the length of the chamber where X is 1, 5, 10, 20, 30, 50, 75, 90, 95, 99, and 100.
4. The system of claim 3, wherein the at least one saddle comprises a ceramic or phenolic material.
5. The system of claim 1, wherein the chamber is suspended by the at least one support.
6. The system of claim 1, wherein the chamber is supported by the at least one support in a manner that permits the chamber to expand and contract along its length.
7. The system of claim 1, wherein U is one of 7, 5, and 4.
8. A method of treating waste using a pyrolysis chamber comprising:
heating the chamber while it contains waste to be treated; and
while heating the chamber:
supporting the chamber with one or more supports having coefficients of thermal expansion less than or equal to $U 10^{-6}/^{\circ}\text{C}$. where U is 10; and
supporting the chamber in a manner that allows the chamber to expand lengthwise without flexing sufficiently to cause a feed mechanism to bind during heating of the

chamber.

9. The method of claim 8 wherein the one or more supports comprise a ceramic saddle positioned beneath the chamber.

5

10. A pyrolytic waste treatment system, substantially as described with reference to the drawings and/or examples.

11. A method of treating waste, substantially as described with reference to the
10 drawings and/or examples.

1/1

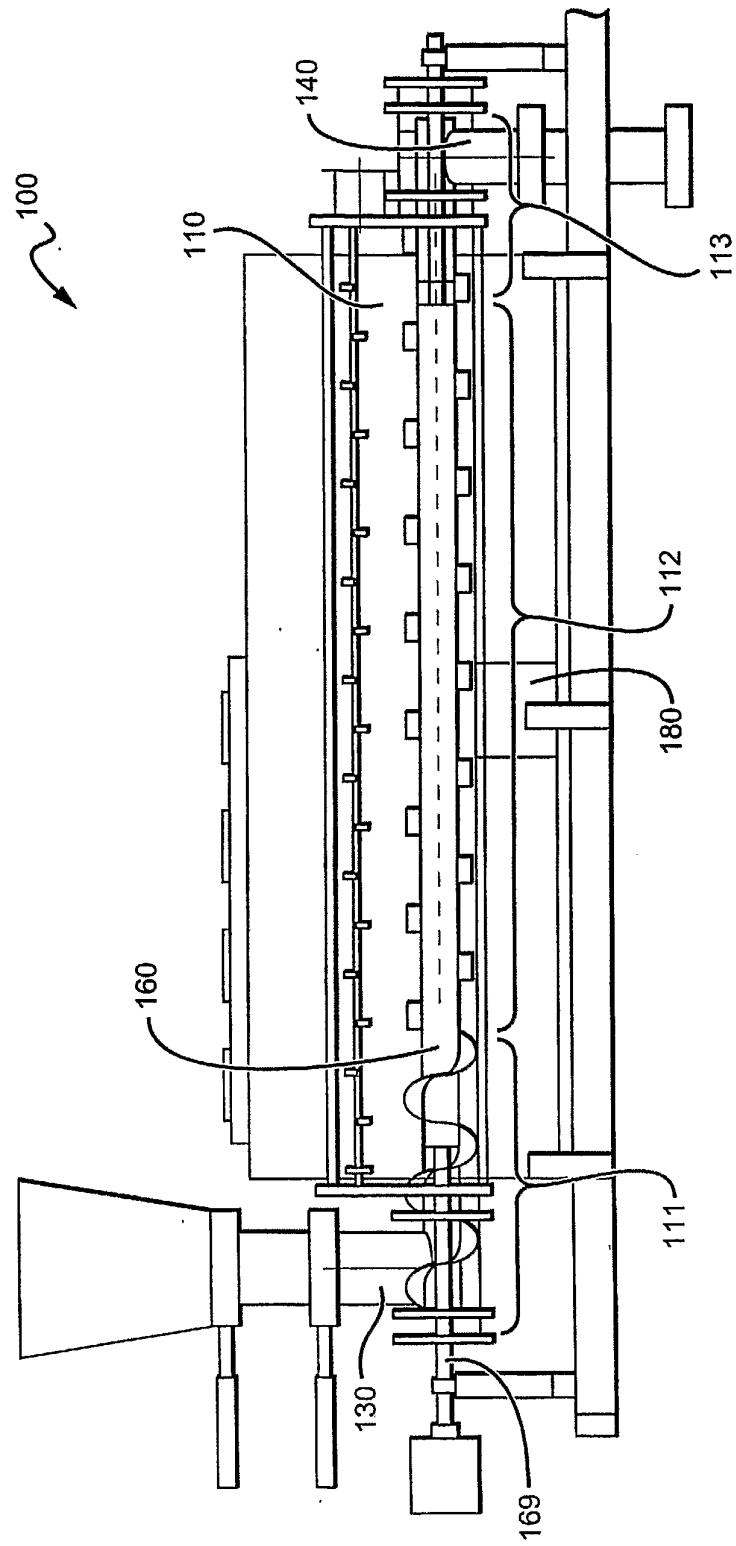


FIG. 1