

655965

P/00/008  
Section 29(1)  
Regulation 3.1(2)

AUSTRALIA  
Patents Act 1990

NOTICE OF ENTITLEMENT

We ASHLAND OIL, INC.

of P.O. Box 391, BL2, Ashland, KY 41114, U.S.A.

being the Applicant and Nominated Person in respect of an application for a patent for an invention entitled "Carbon Fiber Reinforced Coatings" (Application No. 12397/92) for the grant of a patent on the application, state the following:

1. The Nominated Person has, for the following reasons, gained entitlement from the actual inventor:

THE NOMINATED PERSON IS THE ASSIGNEE OF THE INVENTOR.

2. The Nominated Person has, for the following reasons, gained entitlement from the Applicant listed in the declaration under Article 8 of the PCT:

THE APPLICANT AND NOMINATED PERSON IS THE ASSIGNEE OF THE BASIC APPLICANT.

3. The basic application listed in the declaration under Article 8 of the PCT is the first application made in a Convention country in respect of the invention.

DATED: *27 May 1994*

ASHLAND OIL, INC.

*[Signature]*  
Patent Attorney for and  
on behalf of the Applicant.



**(12) PATENT ABRIDGMENT (11) Document No. AU-B-12397/92**  
**(19) AUSTRALIAN PATENT OFFICE (10) Acceptance No. 655965**

(54) Title  
**CARBON FIBER REINFORCED COATINGS**

International Patent Classification(s)

(51)<sup>5</sup> **H05B 003/36 B05D 005/12 D06N 007/00 E04F 015/12**  
**H05B 003/34 H05F 003/02**

(21) Application No. : **12397/92** (22) Application Date : **13.12.91**

(87) PCT Publication Number : **WO92/13648**

(30) Priority Data

(31) Number (32) Date (33) Country  
**653558 11.02.91 US UNITED STATES OF AMERICA**

(43) Publication Date : **27.09.92**

(44) Publication Date of Accepted Application : **19.01.95**

(71) Applicant(s)  
**ASHLAND OIL, INC.**

(72) Inventor(s)  
**RAY C HAMON**

(74) Attorney or Agent  
**FIRTH HACK & CO , GPO Box 1285K, MELBOURNE VIC 3001**

(56) Prior Art Documents  
**US 4438174**  
**US 4308568**

(57) Claim

1. A non-molded manufacture capable of being made in light colors comprising:

- a. a first layer of air-drying or polymerization-curing coating material which is substantially non-conductive to electricity, said first layer having a thickness of about 0.012 to 0.26 mm (0.5 to 10 mils);
- b. adhering to said first layer of coating material, a layer of carbon fibers being oriented in more than one direction so as to form a handleable matrix, said carbon fibers having a weight of about 2.4 to 120 grams per square meter (0.1 to 5 ounces per square yard), and being comprised of carbon fibers having a diameter of about 3 to 20 microns, and a fiber length of about 2.54 to 76.2 millimeters (1/10 to 3 inches).

- c. a second coating layer of a same or different air dry or polymerization curing resin coating material which is substantially non-conductive to electricity applied over said veil to cover substantially all portions of said veil; wherein said first layer and said second coating layer comprise urethanes, epoxies, alkyds, polyethylene, acrylics, vinyls, vinyl acetates, esters, sulfones, polysulfones, silicones, or polysilicones and has a thickness of about 0.025 to 1.27 mm (1 to 50 mils);

whereby either or both of said coating material layers can be pigmented and colored as desired, and said finished three-layer manufacture has an electrical conductivity of about 50 to 5 million ohms per square as measured at the exposed surface of said second coating layer.

6. A non-molding process capable of being made even in light colors for producing an electrically conductive surface comprising in combination the steps of:

- a. applying an air drying or polymerization curing resin coating material to a depth of about 0.012 to 0.26 mm (0.5 to 10 mils);
- b. while said air drying coating material is tacky and before it has fully cured, applying to said surface a veil of carbon fiber; said veil having a weight per square yard of about 2.4 to 120 grams per square meter (0.1 to 5 ounces per square yard), and being comprised of carbon fibers having a diameter of about 3 to 20 microns, and a fiber length of about 2.54 to 76.2 millimeters (1/10 to 3 inches), and pressing said veil to ensure good adherence to said first layer of coating material;
- c. applying a second layer of a same or different coating

**(11) AU-B-12397/92**  
**(10) 655965**

-3-

material and permitting said coating material to cure;  
whereby said compound 3-layer coating has a electro  
conductivity of about 50 to 5 million ohms per square as  
measured at the exposed surface of said second coating  
layer;

wherein said first layer and said second coating layer comprise urethanes,  
epoxies, alkyds, polyethylene, acrylics, vinyls, vinyl acetates, esters,  
sulfones, polysulfones, silicones, or polysilicones and have thicknesses of  
about 0.025 to 1.27 mm (1 to 50 mils);

**PC** ANNOUNCEMENT OF THE LATER PUBLICATION OF AMENDED CLAIMS  
(AND, WHERE APPLICABLE, STATEMENT UNDER ARTICLE 19)



12397/92

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> : B05D 5/12, H05F 3/02 E04F 15/12, D06N 7/00 H05B 3/34</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 92/13648</b> (43) International Publication Date: 20 August 1992 (20.08.92)</p>
<p>(21) International Application Number: PCT/US91.09341 (22) International Filing Date: 13 December 1991 (13.12.91) (30) Priority data: 653,558 11 February 1991 (11.02.91) US (71) Applicant: ASHLAND OIL, INC. [US/US]; P.O. Box 391, BL2, Ashland, KY 41114 (US). (72) Inventor: HAMON, Ray, C. ; 4714 Harvest Lane, Toledo, OH 43623 (US). (74) Agents: WILLSON, Richard, C., Jr.; P.O. Box 391, BL2, Ashland, KY 41114 (US) et al.</p>	<p>(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CI (OAPI patent), CM (OAPI patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC (European patent), MG, ML (OAPI patent), MN, MR (OAPI patent), MW, NL, NL (European patent), NO, PL, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent).</p> <p>Published With international search report. With amended claims.</p> <p>Date of publication of the amended claims: 01 October 1992 (01.10.92)</p> <p style="font-size: 2em; font-weight: bold;">655965</p>	
<p>(54) Title: CARBON FIBER REINFORCED COATINGS</p> <p>(57) Abstract</p> <p>Carbon fiber mats are embedded in a coating by first rolling on a coating of e.g. epoxy on the floor or wall, then applying sheets of fine carbon fibers, (optionally) removing the carbon fiber which is not adherent after the coating has dried, then applying one or more additional top coats of coating to additionally embed the carbon fibers. The result is an electrically conductive floor and/or wall coating system useful in antistatic rooms such as clean rooms, operating rooms, etc. Coatings can be solvent based or waterborne urethanes, epoxies, alkyds, polyethylenes, acrylics, vinyls, vinyl acetates, esters, polyesters, sulfones, polysulfones, silicones, polysilicones and others. The preferred mats are carbon fiber "veils" or "paper" generally having a density of about .75 oz./square yard.</p>		

OPI DATE 07/09/92

APPLN. ID 12397 / 92

] A0JP DATE 15/10/92

PCT NUMBER PCT/US91/09341



INTERNATIONAL

TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> :  <b>B05D 5/12, H05F 3/02</b>  <b>E04F 15/12, D06N 7/00</b>  <b>H05B 3/34</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 92/13648</b></p> <p>(43) International Publication Date: 20 August 1992 (20.08.92)</p>
<p>(21) International Application Number: PCT/US91/09341</p> <p>(22) International Filing Date: 13 December 1991 (13.12.91)</p> <p>(30) Priority data:          653,558 11 February 1991 (11.02.91) US</p> <p>(71) Applicant: ASHLAND OIL, INC. [US/US]; P.O. Box 391, BL2, Ashland, KY 41114 (US).</p> <p>(72) Inventor: HAMON, Ray, C. ; 4714 Harvest Lane, Toledo, OH 43623 (US).</p> <p>(74) Agents: WILLSON, Richard, C., Jr.; P.O. Box 391, BL2, Ashland, KY 41114 (US) et al.</p>		<p>(81) Designated States: AT, AT (European patent), AU, BB, BE (European patent), BF (OAPI patent), BG, BJ (OAPI patent), BR, CA, CF (OAPI patent), CG (OAPI patent), CH, CH (European patent), CI (OAPI patent), CM (OAPI patent), CS, DE, DE (European patent), DK, DK (European patent), ES, ES (European patent), FI, FR (European patent), GA (OAPI patent), GB, GB (European patent), GN (OAPI patent), GR (European patent), HU, IT (European patent), JP, KP, KR, LK, LU, LU (European patent), MC (European patent), MG, ML (OAPI patent), MN, MR (OAPI patent), MW, NL, NL (European patent), NO, PL, RO, SD, SE, SE (European patent), SN (OAPI patent), SU, TD (OAPI patent), TG (OAPI patent).</p> <p><b>Published</b>  <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: CARBON FIBER REINFORCED COATINGS</p> <p>(57) Abstract</p> <p>Carbon fiber mats are embedded in a coating by first rolling on a coating of e.g. epoxy on the floor or wall, then applying sheets of fine carbon fibers, (optionally) removing the carbon fiber which is not adherent after the coating has dried, then applying one or more additional top coats of coating to additionally embed the carbon fibers. The result is an electrically conductive floor and/or wall coating system useful in antistatic rooms such as clean rooms, operating rooms, etc. Coatings can be solvent based or waterborne urethanes, epoxies, alkyds, polyethylenes, acrylics, vinyls, vinyl acetates, esters, polyesters, sulfones, polysulfones, silicones, polysilicones and others. The preferred mats are carbon fiber "veils" or "paper" generally having a density of about .75 oz./square yard.</p>		

CARBON FIBER REINFORCED COATINGS

Background of Invention

I. Description of the Prior Art

"Microwave Transmission and Reflection of Carbon Fiber Mat" by J.F.Lindsey III, Southern Illinois University, describes microwave reflection and transmission of Ashland Carboflex® mat, a general purpose carbon fiber mat produced by Ashland Carbon Fibers, division of Ashland Oil, Inc., Ashland, Kentucky, and indicate very low power transmission characteristic with attenuation in excess of 65 dB and provides "excellent microwave shielding".

U.S. 4,308,568 to Whewell teaches antistatic conductive construction material useful for covering floors and walls comprising ground graphite and colloidal carbon particles. (It is understood that this technique makes only gray and dark colors and provides conductivity which is non-uniform.)

U.S. 3,121,825 to Abegg discloses conductive flooring containing a netting, preferably soldered, or continuous metal sheet with a thermosetting plastic applied over the conductive layer. This technique requires ground metal to be included in the formulation.

U.S. 2,323,461 to Donelson, U.S. 2,413,610 to Donelson, and U.S. 2,457,299 to Biemesderfer also relate to electrically conductive floors.



1  
2  
3  
4 Other patents showing laminates, mats, and sheets used in  
5 antistatic applications are: U.S. 4,724,187 to Ungar, U.S. 4,438,174 to  
6 Whewell, U.S. 4,472,474 to Grosheim, U.S. 4,728,395 to Boyd, U.S.  
7 4,219,608 to Conklin, U.S. 4,347,104 to Dressler, U.S. 4,540,624 to  
8 Cannady, U.S. 4,557,968 to Thronton, and U.S. 4,567,094 to Levin.  
9

10 None of the above patents combines the ease of formation with the  
11 resulting uniform highly conductive coating, capable of being made in even  
12 light colors, of the present invention.  
13  
14

#### 15 Summary of the Invention

##### 16 I. General Statement of the Invention

17 According to the present invention, carbon fiber mats (woven or  
18 non-woven) are embedded in a coating by first rolling on a coating of, for  
19 example, epoxy on the floor or wall or other substrate, then applying  
20 woven or nonwoven sheets of fine carbon fibers, (optionally) removing any  
21 carbon fiber which is not adherent after the coating has dried, then  
22 applying one or more additional top coats of coatings to additionally  
23 embed the carbon fiber. The result is electrically conductive floor, wall or  
24 other substrate coating system which is useful in antistatic rooms such as  
25 clean rooms, operating rooms, computer rooms, etc. The invention will  
26 additionally shield against microwave radiation, electromagnetic  
27 interference and radio frequency interference.  
28  
29  
30

31 Coatings can be solvent or waterborne urethanes, epoxies, alkyds,  
32 polyethylenes, acrylics, vinyls, vinyl acetates, esters, sulfones,  
33 polysulfones, silicones, polysilicones, polyacrylates, vinyl acrylics, styrene  
34 acrylics, laticies, and others. The preferred mats are carbon fiber "veils"  
35 and "paper" generally having a density of about 17.778 grams per square  
36 meter (0.75 ounces per square yard).  
37  
38  
39  
40



**SUBSTITUTE SHEET**



1  
2  
3 II. Utility of the Invention

4 The present invention is useful in almost any application where  
5 electrical shielding, microwave shielding, EMI or RFI shielding, or other use  
6 of conductive layer is required. The invention is distinguished not only by  
7 its ease of preparation, but also by its uniformly high electrical  
8 conductivity.  
9

10  
11 The invention is also valuable in the preparation of burglary-  
12 detection barriers where penetration may be observed by electrical  
13 characteristics of a wall, ceiling or floor to which the invention has been  
14 applied, as in U.S. 4,523,528. The invention may also be used for heating  
15 purposes so that an electrical current generates heat uniformly over a  
16 panel coated with the invention, as in, for example, U.S. 4,301,356 to  
17 Teanei, or may be applied to flexible substrates to form electrical heating  
18 strips as in U.S. 4,534,886 to Kraus.  
19

20  
21 Brief Description of the Drawings

22 Figure 1 is a schematic diagram of a substrate coated with the  
23 three-layer coating of the present invention.  
24

25  
26 Figure 2 is a schematic of the process of applying the three  
27 coatings of the present invention.  
28

29 Figure 3 is a schematic of a flexible substrate being coated with the  
30 three layers of the present invention.  
31

32  
33 Description of the Preferred Embodiments

34 Starting Materials:  
35  
36  
37



**SUBSTITUTE SHEET**

3a

The starting materials for the present invention will not be narrowly critical but will generally include:

- (a) Substrate; The substrates can be walls, floors, ceilings of all sorts of conventional construction materials, including hardboard, wallboard, plywood, plastic panels, machine

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40



**SUBSTITUTE SHEET**

1  
2  
3 housings, and even flexible materials as shown in Figure 3.

- 4  
5 (b) Coating materials; typical coatings include solvent or  
6 waterborne urethanes, epoxies, alkyds, polyethylenes,  
7 acrylics, vinyls, vinyl acetates, esters, sulfones, polysulfones,  
8 silicones, and polysilicones, among others. As the coating  
9 material itself is not involved in the conductivity property of  
10 the finished layered coating, the coating material need not be  
11 narrowly critical. The base coating and the top coating can  
12 be the same or all different. The top coating may be covered  
13 itself by additional coatings to provide pigmentation, or to  
14 provide leveling to compensate for the thickness of the  
15 carbon fibers.  
16  
17 (c) Carbon fiber;  
18 (d) Second coating material: can be the same or different as the  
19 coating material used to form the first layer; can be  
20 pigmented, or colored as desired, or can be clear, generally  
21 have a thickness in the range of about 0.025 to about 1.27  
22 mm (1 to about 50 mils).  
23  
24 (e) Finished coating material;  
25 (f) Other ingredients: pigments, additional conductive agents,  
26 electrodes, etc.  
27  
28 (g) Method of application: rolling, spraying, brushing, and most  
29 other conventional methods of applications of coatings can  
30 be employed. Rolling is particularly preferred, but spraying  
31 also is preferred.  
32

#### 33 EXAMPLE 1

34 (The Invention Practiced on a Vertical Wall)

35 Referring to Figure 1, a vertical wall 10 composed of common wall  
36 board is coated with a first coating 12 by means of a pressurized-paint-  
37 pot-feed roller, then allowed to dry until tacky to the touch. A thin veil of  
38 carbon fibers having fibers in many directions so as to have some  
39 dimensional stability, and having a density of about 8.89 grams per  
40



1  
2  
3  
4 square meter (3/8 of an ounce per square yard) is gently applied to the  
5 tacky vertical paint film in much the same manner as hanging wall paper.  
6 Strips of the veil are slightly overlapped as they are applied so a  
7 continuous conductive layer of carbon fibers is formed adhering to the  
8 tacky vertical coating. The carbon fibers are then rolled vigorously with a  
9 clean dry paint roller to ensure their adherence and to press them down  
10 into the tacky paint film. After the coating is well-dried according to its  
11 normal curing time, a second coating layer is applied over the carbon fiber  
12 veil. The build of the second layer is approximately 0.25 to 0.51 mm (10  
13 to 20 mils) and the carbon fiber layer is completely covered by the second  
14 layer. After the coating has completely dried, a finish coating of white-  
15 pigmented epoxy is applied and allowed to dry. The completed four-layer  
16 coating is white in appearance, firm, easily washable, and exhibits  
17 excellent shielding characteristics to both radio waves (RFI), microwave,  
18 and electromagnetic waves (EMI) with the attenuation being 50 decibels or  
19 below.  
20  
21  
22

#### 23 EXAMPLE II

24 (The Invention Embodying Electrodes)

25  
26 When a vertical substrate 10, as in Example I, is coated with a  
27 coating material 12 which is allowed to become tacky and a carbon fiber  
28 veil is applied as in Example I, electrodes 50 and 52 are run along the top  
29 and bottom of the tacky film before the finish coat is applied. These  
30 electrodes are strip copper and make good electrical contact with the  
31 carbon fibers embedded in the coating layers.  
32  
33

#### 34 EXAMPLE III

35 (Invention, Electrodes Used for Heating)

36  
37 When the electrodes of Example II are connected to a source of 6  
38 volts to 240 volts current, a warming of the entire panel formed by the  
39 substrate and the coating layers is observed due to the resistance of the  
40 carbon fiber.



EXAMPLE IV

(Invention, Electrodes Used for Burglary Detection)

When the electrodes 50 and 52 are connected to a suitable electrical detector any penetration of the coating causes a change in electrical resistivity, capacitance, or other electrical characteristic being measured. Connecting the measuring device to a high-low alarm provides a signal detecting penetration as in a burglary. When this coating system is applied to the floors, ceiling, and walls of a room, and the door is provided with a suitable magnetic switch or other alarm, a burglary-proof room is provided.

EXAMPLE V

Substrate: White poster board.

Paint: Fast dry green enamel alkyd from Toledo Paint and Chemical Company, Toledo, Ohio.

Carbon Fiber Matting: Carboflex® 17.778 grams/square meter (3/4 ounce/square yard) paper from Ashland Carbon Fibers, Ashland, Kentucky.

Procedure:

Using a paint brush, a coat of the green alkyd paint is applied to the poster board, and a sheet of the Carboflex® paper is laid over the wet paint on the board and the coating permitted to dry overnight (about 17 hours). Another coat of the green paint is then applied over the Carboflex® paper and permitted to dry. Using the Biddle test instrument Mark IV Conductive Test Kit, manufactured by James G. Biddle Co., Plymouth Meeting, PA 14462, the resistance of this coating was less than 10,000 ohms.

Coating:

Sears Weather Beater Satin Exterior Acrylic Latex House and Trim



**SUBSTITUTE SHEET**

1.  
2  
3 Paint, tint base 30 51904, tinted to color 293, provocream-ABC (90), series  
4 5100.  
5  
6

7 The substrate is coated with the paint and 21.262 grams (3/4  
8 ounce) carbon matting (veil), lot #20204 from Ashland Petroleum  
9 Company, Ashland, Kentucky, is applied and permitted to dry 30 minutes.  
10 A second coat of the same paint is applied using a squeegee to fill in the  
11 voids and smooth the surface. After this dries, a third coat just thick  
12 enough to smooth the surface and give a good uniform color, but still  
13 showing the carbon paper matting slightly is applied.  
14  
15

16 Seven different readings are made on various samples and  
17 locations using a Charles Waters Megger and the readings are from less  
18 than  $10^5$  ohms/square to  $10^7$  ohms/square.  
19  
20

21 When samples are tested using a Mark II conductive test kit from  
22 James G. Biddle Company, Plymouth Meeting Pennsylvania 19462, the  
23 readings of the samples with the epoxy overlayment substrate are all well  
24 below 10,000 ohms/square, and most were below about 5,000  
25 ohms/square.  
26  
27

#### 28 EXAMPLE VI

29 (Conductive Shielding and Protection from Static  
30 Electric Conditions)

31 Foam flocked fabric is produced with different types of fibers, as for  
32 example, cotton, nylon, silk, and paper. This conventionally produces a  
33 cloth that is versatile and has many uses, but is not conductive and does  
34 not dissipate electrical charges.  
35  
36

37 When carbon fibers are used to make a foam flock fabric (fine  
38 carbon fiber sprayed-on from a foam flock gun) either alone or combined  
39 with other fabrics, the resulting fabric is electrically conductive and  
40



**SUBSTITUTE SHEET**

dissipates electrical charges, and can be formulated to contain enough carbon fiber for fire resistance and fire retardance.

#### EXAMPLE VII

Figure 2 shows the application of layered coatings of the invention to a substrate 18 to which a conventional paint coating 19 has been applied with a roller. The carbon fiber matting 22 is shown being unrolled and then being rolled onto the tacky first paint coating with roller 20.

#### EXAMPLE VIII

(The Invention Applied onto a Flexible Substrate)

Figure 3 shows schematically apparatus for applying the layered coatings of the present invention to a flexible substrate 32 which is unrolled from a roll 30, passes between paint roll 34 and squeeze roll 35 where a conventional epoxy or other coating is applied, then passes between squeeze rolls 38 and 40 which press a carbon fiber veil from roll 36 into the tacky coating. Then passes under heat lamps 42 which cure the first coating and then through paint roll 46 and squeeze roll 48 where a second outer coating is applied, then through heat lamp 50 which cures the outer coating, and finally, to take-up roll 52 where the flexible substrate with the layered coating of the invention is rolled for shipment. The substrate can be sheet vinyl or other plastic, conventional woven cloth, e.g. fabric or synthetic fibers, nonwoven fabrics, etc. and the coating materials will be materials which are adhesive to the substrate and which retain flexibility when dry. In general, the coatings for use with the techniques as shown in Figure 3 will be fast-drying, polymerizable coatings, and the heat lamps may optionally be augmented or replaced by vapor-phase polymerization catalyst applicators to speed drying.

#### EXAMPLE IX

The invention is also valuable for heating tanks of all sizes. Many



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39

large and small storage tanks and tanks used in production and manufacturing processes have to be insulated and heated. This carbon veil can be used to produce the necessary heat required to keep the contents of the tanks from freezing. This is a highly efficient heating method that only requires low energy demands of 24 volts or less. This makes it very cost effective when compared to the present systems.

EXAMPLE X

The invention is also useful in the production of plastic or polymer buckets, drums, containers and pipes to make them groundable, e.g. hooking to a water line with a flexible wire such as copper. Plastic pipes and containers are very dangerous to use with flammable solvents because of the static electrical charges caused by the friction of the liquids against the plastic container. If the static electricity is discharged causing a spark, making a fire and possible explosion. Being able to ground these containers and pipes makes them as safe as metal pipes and containers that have to also be grounded. As plastic pipe and containers are made at present, they cannot be grounded, but incorporating carbon fibers makes them conductive, thus self-grounding.

EXAMPLE XI

The "Carboflex" brand carbon veil available from Ashland Carbon Fibers, Ashland, KY 41114, is useful to produce carpeting that is groundable and prevents the production of static electricity by the friction of walking, cleaning, etc. The carbon veil is woven, tied, adhered with polymer adhesives, or made an intricate part of the backing for carpeting. When the carpeting is grounded through the floor or framing of the building, the building is much safer, especially for the critical areas such as hospitals, computer rooms, electronical parts manufacturing areas, etc.

EXAMPLE XII

A sheet of Carboflex® veil 17.778 g/m<sup>2</sup>(3/4 oz./yd<sup>2</sup>), about 0.9144





11000

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20
- 21
- 22
- 23
- 24
- 25
- 26
- 27
- 28
- 29
- 30
- 31
- 32
- 33
- 34
- 35
- 36
- 37
- 38
- 39
- 40

9 a

m x 0.9144 m (3' x 3') is folded into a



0.3048 m x 0.9144 m (12" x 3') section. The two ends 0.3048 m (12" wide) are wrapped with aluminum tape that contains electrical lead cords. The cords are hooked to a 240 volt (two 120 volt hot wires and 1 neutral or ground wire) electrical supply. The carbon veil becomes very hot in a few seconds. The carbon veil vibrates at an intense speed and makes an audible humming sound. This experiment is performed outdoors and a large amount of heat is radiated from the carbon veil. However, the carbon veil does not glow red. Removing the power and the carbon veil cools quickly in the 15.56°C (60°) outside temperature. A 454.5924 grams (1 lb.) coffee can is wrapped with the sheet of carbon veil and fill it about 2/3 full of water. Again, the 240 volts of power is turned on. The water started a vigorous boil in about 4 minutes and 10 seconds. Measure the amperage required using an Amp Meter and the reading is about 3.5 amps.

#### Modifications

While not narrowly critical, the carbon fibers are preferably oriented in more than one direction so as to form a handleable matrix, and have a weight in the range of about 2.4 to about 120 grams per square meter (0.1 to about 5 ounces per square yard), and have an individual fiber diameter in the range of about 3 to 20 microns, and an individual fiber length in the range of about 2.54 to 76.2 millimeters (0.1 to 3 inches). The coating is generally applied to a thickness in the range of from about 0.012 to 0.26 mm (0.5 to 10 mils), and the compound 3-layer coating has an electrical conductivity preferably in the range of about 50 to 5 million ohms per square as measured at the exposed surface of the



second coating layer.

A particularly preferred embodiment of the invention is a non-molding process capable of being made even in light colors for producing an electrically conductive surface comprising in combination the steps of:

- (a) applying an air drying or polymerization curing resin coating material to a depth of about 0.012 to 0.26 mm (0.5 to 10 mils);
- (b) while said air drying coating material is tacky and before it has fully cured, applying to said surface a veil of carbon fiber; said veil having a weight per square yard of about 2.4 to 120 grams per square meter (0.1 to 5 ounces per square yard), and being comprised of carbon fibers having a diameter of about 3 to 20 microns, and a fiber length of about 2.54 to 76.2 millimeters (1/10 to 3 inches), and pressing said veil to ensure good adherence to said first layer of coating material;
- (c) applying a second layer of a same or different coating material and permitting said coating material to cure; whereby said compound 3-layer coating has a electro conductivity of about 50 to 5 million ohms per square as measured at the exposed surface of said second coating layer;

wherein said first layer and said second coating layer comprise urethanes, epoxies, alkyds, polyethylene, acrylics, vinyls, vinyl acetates, esters, sulfones, polysulfones, silicones, or polysilicones and have thicknesses of about 0.025 to 1.27 mm (1 to 50 mils).

Coating materials comprising epoxies are especially preferred.

What is claimed is:



**SUBSTITUTE SHEET**

CLAIMS

1  
2  
3  
4  
5 1. A non-molded manufacture capable of being made in light  
6 colors comprising:

- 7  
8 a. a first layer of air-drying or polymerization-curing  
9 coating material which is substantially non-conductive  
10 to electricity, said first layer having a thickness of  
11 about 0.012 to 0.26 mm (0.5 to 10 mils);  
12  
13  
14 b. adhering to said first layer of coating material, a layer  
15 of carbon fibers being oriented in more than one  
16 direction so as to form a handleable matrix, said  
17 carbon fibers having a weight of about 2.4 to 120  
18 grams per square meter (0.1 to 5 ounces per square  
19 yard), and being comprised of carbon fibers having a  
20 diameter of about 3 to 20 microns, and a fiber length  
21 of about 2.54 to 76.2 millimeters (1/10 to 3 inches).  
22  
23  
24 c. a second coating layer of a same or different air dry or  
25 polymerization curing resin coating material which is  
26 substantially non-conductive to electricity applied over  
27 said veil to cover substantially all portions of said veil;  
28 wherein said first layer and said second coating layer  
29 comprise urethanes, epoxies, alkyds, polyethylene,  
30 acrylics, vinyls, vinyl acetates, esters, sulfones,  
31 polysulfones, silicones, or polysilicones and has a  
32 thickness of about 0.025 to 1.27 mm (1 to 50 mils);  
33  
34

35  
36 whereby either or both of said coating material layers can be pigmented  
37 and colored as desired, and said finished three-layer manufacture has an  
38



**SUBSTITUTE SHEET**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

electrical conductivity of about 50 to 5 million ohms per square as measured at the exposed surface of said second coating layer.

2. A manufacture according to Claim 1 wherein the coatings are waterborne coatings.



1  
2  
3  
4  
5 3. A manufacture according to Claim 1 wherein both coating  
6 materials are the same.

7  
8 4. A manufacture according to Claim 1 wherein the coatings  
9 have a thickness of about 0.025 to 0.127 mm (1 to 5 mils).  
10

11  
12 5. A manufacture according to Claim 1 wherein the carbon fiber  
13 layer has a weight of about 4.74 to 47.4 grams per square meter (0.2 to 2  
14 ounces per square yard).  
15

16 6. A non-molding process capable of being made even in light  
17 colors for producing an electrically conductive surface comprising in  
18 combination the steps of:  
19

20  
21 a. applying an air drying or polymerization curing resin coating  
22 material to a depth of about 0.012 to 0.26 mm (0.5 to 10  
23 mils);  
24

25  
26 b. while said air drying coating material is tacky and before it  
27 has fully cured, applying to said surface a veil of carbon  
28 fiber; said veil having a weight per square yard of about 2.4  
29 to 120 grams per square meter (0.1 to 5 ounces per square  
30 yard), and being comprised of carbon fibers having a  
31 diameter of about 3 to 20 microns, and a fiber length of  
32 about 2.54 to 76.2 millimeters (1/10 to 3 inches), and  
33 pressing said veil to ensure good adherence to said first  
34 layer of coating material;  
35

36  
37 c. applying a second layer of a same or different coating  
38



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

material and permitting said coating material to cure;  
whereby said compound 3-layer coating has a electro  
conductivity of about 50 to 5 million ohms per square as  
measured at the exposed surface of said second coating  
layer;



1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40

wherein said first layer and said second coating layer comprise urethanes, epoxies, alkyds, polyethylene, acrylics, vinyls, vinyl acetates, esters, sulfones, polysulfones, silicones, or polysilicones and have thicknesses of about 0.025 to 1.27 mm (1 to 50 mils);

7. A manufacture according to Claim 1 wherein the coating materials comprise epoxies.





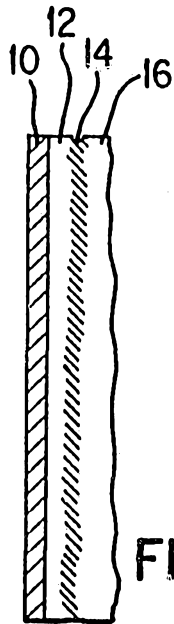


FIG. 1

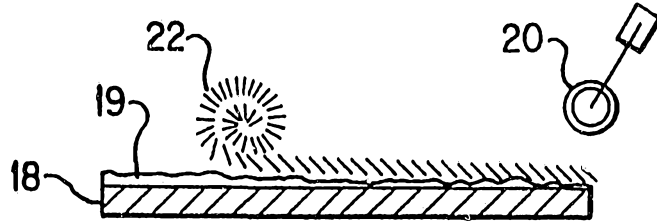


FIG. 2

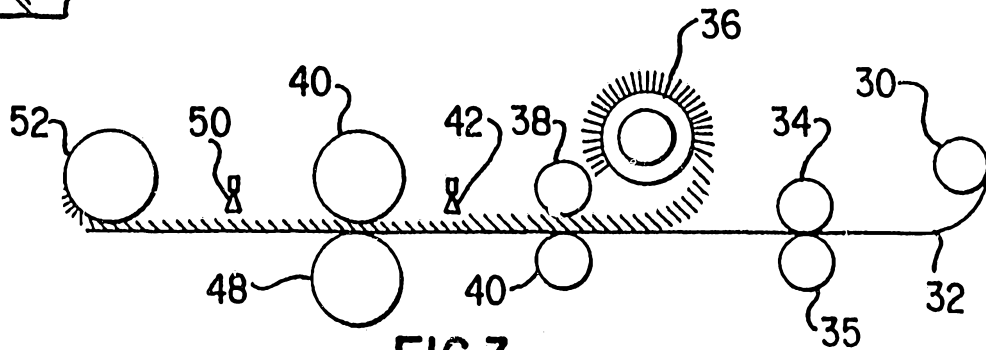


FIG. 3

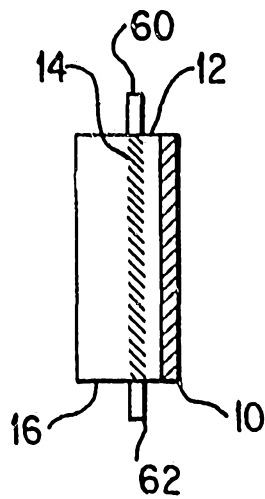



FIG. 4

**INTERNATIONAL SEARCH REPORT**

International Application No

PCT/US 91/09341

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
Int. Cl. 5 B05D5/12; H05B3/34	H05F3/02;	E04F15/12; D06N7/00
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
Int. Cl. 5	B05D ; H05B	H05F ; E04F ; D06N
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b>		
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
Y	US,A,4 438 174 (BRUCE R. WHEWELL) 20 March 1984 cited in the application see claims 5,6  ----	1, 9, 10
Y	US,A,4 308 568 (BRUCE R. WHEWELL) 29 December 1981 cited in the application see claims; figure 1  ----	1, 9, 10
A	WO,A,9 005 632 (STONHARD INC.) 31 May 1990 see claims 1,5,21  ----	1
<p><sup>10</sup> Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
12 MAY 1992	23.06.92	
International Searching Authority	Signature of Authorized Officer	
EUROPEAN PATENT OFFICE	GIRARD Y.A.	

ANNEX TO THE INTERNATIONAL SEARCH REPORT  
ON INTERNATIONAL PATENT APPLICATION NO. US 9109341  
SA 56267

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office (EPO) file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information. 12/05/92

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4438174	20-03-84	GB-A, B 2105653	30-03-83
US-A-4308568	29-12-81	AU-A- 6259680	30-09-82
WO-A-9005632	31-05-90	AU-A- 4629589	12-06-90

EPO FORM P007

For more details, consult this annex ; see Official Journal of the European Patent Office, No. 12/82