

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 August 2005 (11.08.2005)

PCT

(10) International Publication Number  
**WO 2005/073659 A1**

(51) International Patent Classification<sup>7</sup>: **F28F 1/32**,  
F28D 1/047

(21) International Application Number:  
PCT/US2005/001550

(22) International Filing Date: 13 January 2005 (13.01.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/761,448 20 January 2004 (20.01.2004) US

(71) Applicant (for all designated States except US): **OUT-OKUMPU HEATCRAFT USA LLC** [US/US]; 1715 Aaron Brenner Drive, Suite 726, Memphis, TN 38120 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MITCHELL, Paul, L.** [US/US]; 2662 Strider Road, Scobey, MS 38953 (US). **Haidenreich, Michael, E.** [US/US]; 396 N. Hidden Valley Road, Grenada, MS 38901 (US). **LOOMIS, Roger,**

**A.** [US/US]; 751 Palmer Drive, Hernando, MS 38632 (US). **HARRIS, James, R.** [US/US]; 5394 Pearidge Road, Grenada, MS 38901 (US). **DAVIS, David, L.** [US/US]; 24 Oak Meadow Drive, Grenada, MS 38901 (US). **LOLLAR, David, E.** [US/US]; 422 Bounds Drive, Grenada, MS 38901 (US).


(74) Agents: **PRINCIPE, David, L.** et al.; Hodgson Russ LLP, One M & T Plaza, Suite 2000, Buffalo, NY 14203-2391 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: BRAZED PLATE FIN HEAT EXCHANGER

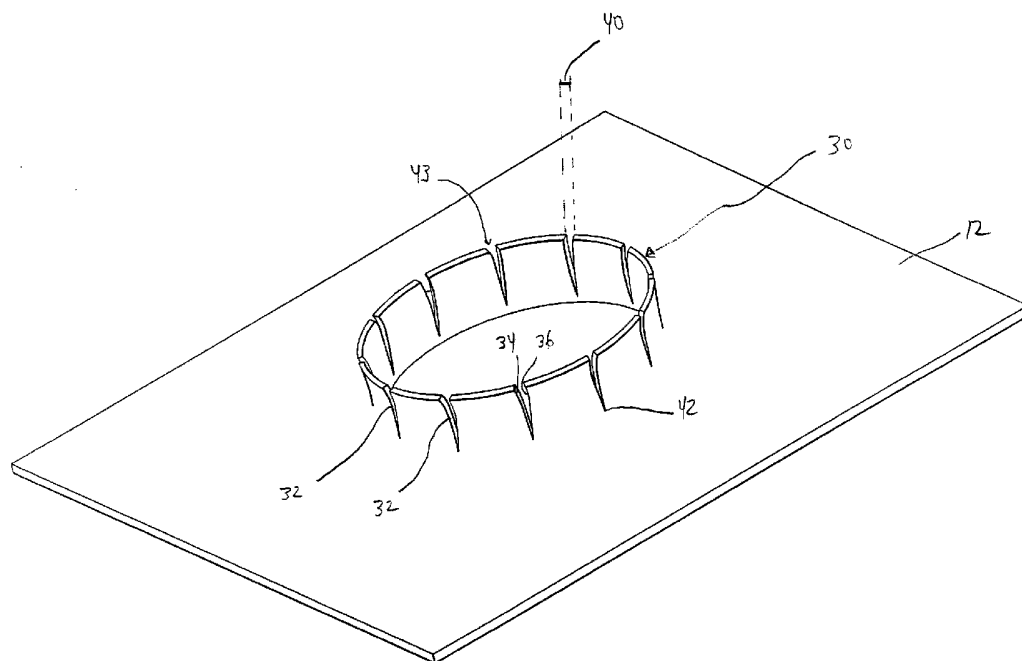

(57) Abstract: A fin collar (30) comprises a plurality of slits (32) disposed around a perimeter of the collar (30) enhances flux application and brazing clad flow into the tube to fin joint to provide an improved thermal and structural bond.

WO 2005/073659 A1



European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

**BRAZED PLATE FIN HEAT EXCHANGER**

## FIELD OF INVENTION

This invention is directed to heat exchanger fin  
5 collars, and more particularly to an improved fin collar  
for use in a brazed plate fin heat exchanger.

## BACKGROUND OF THE INVENTION

Plate fin and tube heat exchangers are used in a  
10 wide variety of applications including, but not limited  
to, air conditioning and refrigeration where it is  
desired to exchange heat between two fluids, usually a  
pure liquid or a liquid undergoing a phase change to or  
15 from a gas, flowing in the heat exchanger tubes and a  
gas, usually air, flowing around the heat exchanger plate  
fins and tube exteriors. In such a heat exchanger, a  
plurality of thin plate fins are arranged parallel to  
each other between two tube sheets. Heat exchanger tubes  
pass through holes in the tube sheets and plate fins.  
20 There is a firm fit between the tubes and the plate fins  
so that the effective surface area, and thus the heat  
transfer area, of the heat exchanger tubes is increased  
by the area of the plate fins. Because of this increase  
in surface area, a plate fin and tube heat exchanger  
25 offers improved heat transfer performance over a plain  
tube type heat exchanger of the same size.

A common method of manufacturing this type of heat  
exchanger is to first assemble a plurality of plate fins  
between two tube sheets, then lace a plurality of hair  
30 pin tubes through selected holes in the plate fins and  
similar holes in each of the tube sheets. Next, bells  
are formed in the end of hairpin tubes, then the legs of  
the tubes are expanded to insure a tight mechanical fit

between the tubes and plate fins.

In order to improve the thermal and structural bond resulting from mechanical joining of the tubes and plate fins, there is a need for a brazed plate fin heat exchanger with an improved braze joint at the tube-to-fin joint.

#### SUMMARY OF THE INVENTION

The present invention meets the above-described need by providing a fin collar having a shape that enhances flux application and brazing clad flow into the tube-to-fin joint to provide an improved thermal and structural bond.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated in the drawings in which like reference characters designate the same or similar parts throughout the figures of which:

Figure 1 is a perspective view of a plate fin heat exchanger of the present invention;

Figure 2 is a perspective view of a tube of the present invention disposed through several plate fins;

Figure 3 is a perspective view of a fin collar of the present invention;

Figure 4 is a perspective view of an alternate embodiment of the fin collar of the present invention;

Figure 5 is a perspective view of another alternate embodiment of the fin collar of the present invention;

Figure 6 is a perspective view of the fin collar of the present invention shown with a representation of the

air flow over the collar; and,

Figure 7 is a top plan view of the fin collar of Figure 6.

## 5 DETAILED DESCRIPTION

Fig. 1 depicts a plate fin and tube heat exchanger 10 containing plate fins 12 that embody the present invention. Each plate fin has a plurality of holes 16. A common method of manufacturing heat exchanger 10 is to first assemble a plurality of plate fins 12 between two tube sheets 18, then lace a plurality of hairpin tubes 20 through selected holes 16 in the plate fins 12 and similar holes 16 in each of tube sheets 18. The heat exchanger assembly is completed by fitting up a plurality of return bends 22 to the ends of hairpin tubes 20 so as to form one or more closed fluid flow paths through the tubes of the heat exchanger.

When installed and operating in a device such as an air conditioner, a first fluid, such as a refrigerant, flows through heat exchanger 10 via a fluid flow path or paths defined by interconnected hairpin tubes 20 and return bends 22. A second fluid, such as air, flows over and around plate fins 12 and tubes 20. If there is a temperature differential between the two fluids, then heat transfer from the warmer to the cooler of the two takes place through the tube walls and plate fins.

Turning to Fig. 2, a single tube 20 is shown disposed through a plurality of plate fins 12. Each plate fin 12 is provided with an upstanding fin collar 30 disposed around the openings 16. As shown, the collar 30 may be curved so that a convex surface 31 faces the tube

20. The number of plate fins 12 that can be placed around the tube 20 is determined by the height of the collar 30.

In order to manufacture the heat exchanger of the present invention, the tube 20 to fin 12 joint is brazed in a controlled atmosphere braze furnace. The brazing temperatures will range between 1070°F and 1120°F depending on the clad used.

The tube 20 may be constructed of an aluminum alloy that is clad or unclad. The tube 20 may be roll formed with a welded seam or a lock seam. As an alternative, the tube 20 may be extruded. The tube 20 may have a wall thickness of 0.016" to 0.05" depending on the tube diameter and the working pressure. The tube 20 may have a cross-sectional shape that is round, circular, oval, or the like. The tube material is a long life, high strength, corrosion resistant alloy. For extruded tubes, a 3003 aluminum alloy may be used. For roll formed tube an Alcan X-1000 may be used. The clad alloys may be 4045 or 4343 aluminum alloys.

The fins 12 and fin collar 30 may be constructed out of an aluminum alloy 3003 with a 4045 or 4343 alloy clad. If unclad, the fin may be constructed from an 1100 aluminum alloy. The fins may be constructed with a thickness of 0.003" to 0.016".

In addition to the aluminum alloys described above, the present invention may be used for brazing a copper fin to copper tubing or brazing an aluminum fin to copper tubing, as will be evident to those of ordinary skill in the art.

In Fig. 3, a first embodiment of the fin collar 30

of the present invention is shown. A plurality of slits 32 are disposed around the circumference of the fin collar 30. The slits 32 may be formed by removing material from the collar and may be disposed

5 equidistantly around the perimeter of the collar 30. The slit may extend from the top 43 of the collar 30 and terminate at a point approximately 0.02" from the underside of the fin. The slit 32 is defined by a pair of opposed walls 34 and 36. The walls 34 and 36 may be

10 angled such that the width 40 across the slit 32 gradually increases from the bottom 42 of the slit 32 to the top 43 of the collar 30. The slit 32 may range from 0.015" to 0.15" in width depending on the collar height and the number of slits. The slits 32 improve the tube-

15 to-fin joint both thermally and structurally.

With regard to structural properties at the joint, the fin collar 30 of the present invention enhances the flux application and the brazing clad flow because the slits 32 allow the cladding to flow through on both sides

20 of the collar 30.

With regard to heat transfer performance, the split fin collar 30 increases heat transfer between the air and tube surfaces. The slits 32 open access to a portion of the surface of the primary tube 20 for the air flow

25 allowing direct heat transfer from air to the tube 20 without the resistance from secondary sources. Ordinarily these portions of the primary tube 20 would be covered by a solid fin collar.

Turning to Fig. 4, an alternate embodiment of the

30 fin collar of the present invention is shown. Fin collar 40 has a rectangular-shaped slit 42. The slit 42 is

defined by a bottom wall 44 and opposed side walls 46 and 48. The bottom wall 44 may extend to a point approximately 0.02" from the underside of the fin 12. The collars 40 may have a curvature such that they have a convex shape on the side that faces the tubes 20.

In Fig. 5, another alternate embodiment of the fin collar of the present invention is shown. Fin collar 60 is elongated in the longitudinal (tube axis) direction. The collar 60 has a plurality of slits 62 defined therein. The slits 62 also have a rectangular shape and are defined by a bottom wall 64 and a pair of opposed side walls 66, 68. The bottom wall 64 may extend to a point approximately 0.02" from the underside of the fin 12.

In Figs. 6 and 7, the fin collar 30 of the present invention is shown with arrows 70 representing air flow around the collar 30 during use. The shape of the fin collar 30 provides interruptions around the circumference of the fin collar 30 perpendicular to air flow. The interruptions will provide turbulence, which is indicated by curved lines 80, in the boundary layer of air along the fin collar 30 which will increase the rate of heat transfer between the air and the tube 20. The increased turbulence will also occur around the area near the base of the fin collar 30 in the area of highest fin efficiency, increasing heat transfer rates in that area.

While the invention has been described in connection with certain embodiments, it is not intended to limit the scope of the invention to the particular forms set forth, but, on the contrary, it is intended to cover such alternatives, modifications, and equivalents as may be

included within the spirit and scope of the invention as defined by the appended claims.

## WHAT IS CLAIMED IS:

1. A heat exchanger, comprising:  
at least one plate fin having a first side, a second  
5 side, and at least one opening defined therein;  
at least one fin collar disposed on the plate fin  
around the at least one opening, the fin collar having an  
upstanding wall extending from the plate fin, the wall  
having a plurality of slits defined therein; and,  
10 at least one tube for conveying a pressurized fluid,  
the tube being disposed through the at least one opening  
in the plate fin.
2. The heat exchanger of Claim 1, wherein the at least  
15 one tube has a cross-sectional shape that is round.
3. The heat exchanger of Claim 1, wherein the at least  
one tube has a cross-sectional shape that is circular.
- 20 4. The heat exchanger of Claim 1, wherein the at least  
one tube has a cross-sectional shape that is oval.
5. The heat exchanger of Claim 1, wherein the plurality  
of slits are disposed substantially equidistantly around  
25 a perimeter of the collar.
6. The heat exchanger of Claim 1, wherein the plurality  
of slits are defined by a pair of opposed walls that are  
angled such that the slit is wider at a point distal to  
30 the plate fin than it is at a point proximal to the plate  
fin.

7. The heat exchanger of Claim 1, wherein the plurality of slits have a rectangular shape.
- 5 8. The heat exchanger of Claim 1, wherein the at least one fin collar is constructed of an aluminum alloy.
9. The heat exchanger of Claim 8, further comprising a cladding layer.
- 10 10. The heat exchanger of Claim 1, wherein the at least one tube is constructed of an aluminum alloy.
11. The heat exchanger of Claim 1, wherein the at least one plate fin is attached to the at least one tube by brazing.
- 15 12. The heat exchanger of Claim 1, wherein the at least one plate fin is attached to the at least one tube by brazing in a controlled atmosphere brazing oven.
- 20 13. The heat exchanger of Claim 1, wherein the at least one tube is constructed of copper.
- 25 14. The heat exchanger of Claim 1, wherein the at least one plate fin is constructed of copper.
15. The heat exchanger of Claim 1, wherein the fin collar is unclad.
- 30 16. A heat exchanger, comprising:

- 10 -

at least one plate fin having a first side, a second side and at least one opening defined therein;

at least one fin collar disposed on the plate fin around the at least one opening, the fin collar having an upstanding wall extending from the plate fin, the wall  
5 having a plurality of slits defined therein; and,

at least one tube for conveying a pressurized fluid, the tube being disposed through the opening in the plate fin and attached to the fin collar by brazing.

10

17. The heat exchanger of Claim 16, wherein the at least one tube has a cross-sectional shape that is round.

18. The heat exchanger of Claim 16, wherein the at least  
15 one tube has a cross-sectional shape that is circular.

19. The heat exchanger of Claim 16, wherein the at least one tube has a cross-sectional shape that is oval.

20. The heat exchanger of Claim 16, wherein the  
20 plurality of slits are disposed substantially equidistantly around a perimeter of the collar.

21. The heat exchanger of Claim 16, wherein the  
25 plurality of slits are defined by a pair of opposed walls that are angled such that the slit is wider at a point distal to the plate fin than it is at a point proximal to the plate fin.

30 22. The heat exchanger of Claim 16, wherein the plurality of slits have a rectangular shape.

- 11 -

23. The heat exchanger of Claim 16, wherein the at least one fin collar is constructed of an aluminum alloy.

24. The heat exchanger of Claim 23, further comprising a  
5 cladding layer.

25. The heat exchanger of Claim 16, wherein the at least one tube is constructed of an aluminum alloy.

10 26. The heat exchanger of Claim 16, wherein the at least one fin collar is attached to the at least one tube by brazing.

27. The heat exchanger of Claim 16, wherein the at least  
15 one plate fin is attached to the at least one tube by brazing in a controlled atmosphere brazing oven.

28. The heat exchanger of Claim 16, wherein the at least one tube is constructed of copper.

20

29. The heat exchanger of Claim 16, wherein the at least one plate fin is constructed of copper.

30. The heat exchanger of Claim 16, wherein the fin  
25 collar is unclad.

31. A method of forming a plate fin heat exchanger, comprising:

30 providing at least one plate fin having a first side, a second side, and at least one opening; at least one fin collar disposed on the plate fin around the at

- 12 -

least one opening, the fin collar having an upstanding wall extending from the plate fin, the wall having a plurality of slits defined therein; and at least one tube for conveying a pressurized fluid, the tube being  
5 disposed through the at least one opening and attached to the fin collar by brazing;

providing a cladding material for brazing the plate fin-to-tube joint; and,

10 brazing the plate fin-to-tube joint in a controlled atmosphere brazing oven.

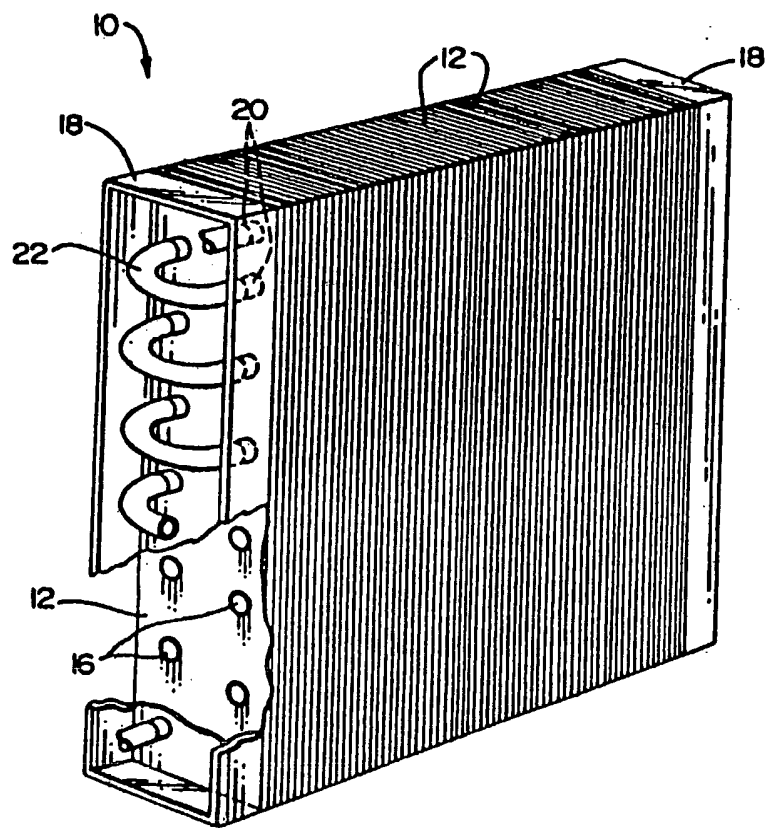


FIG. 1

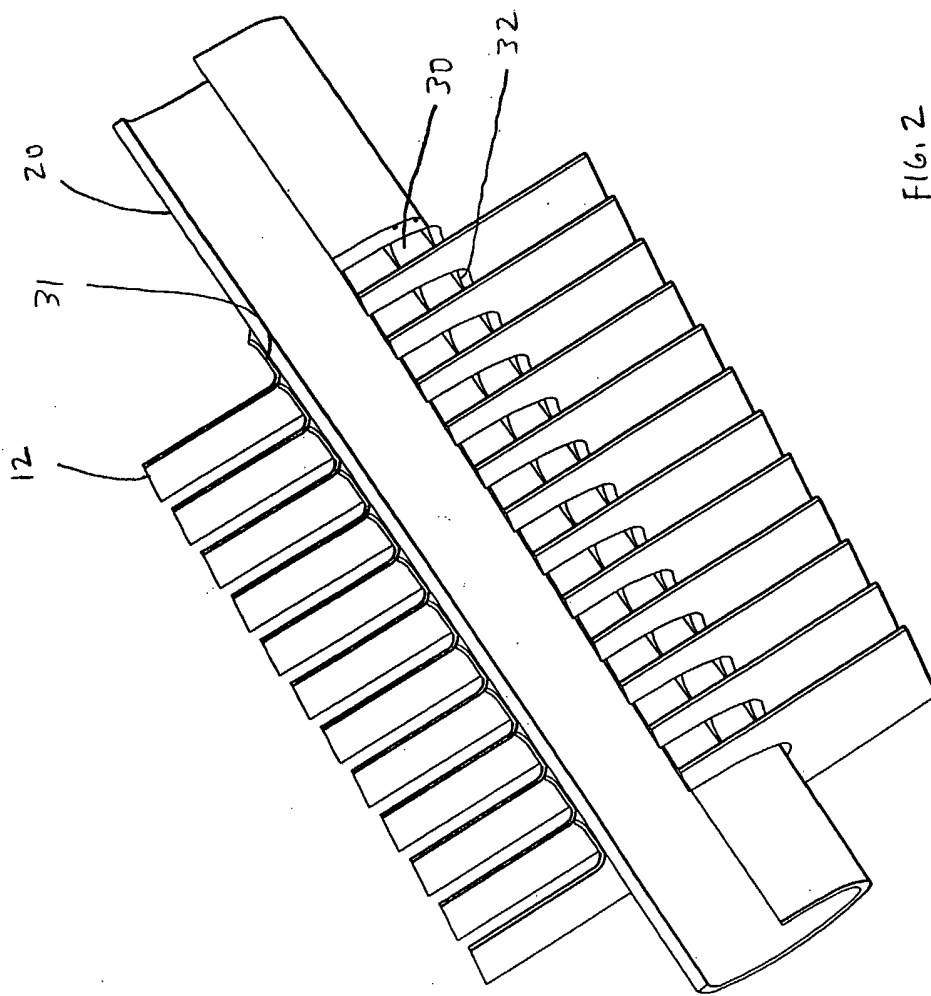


FIG. 2

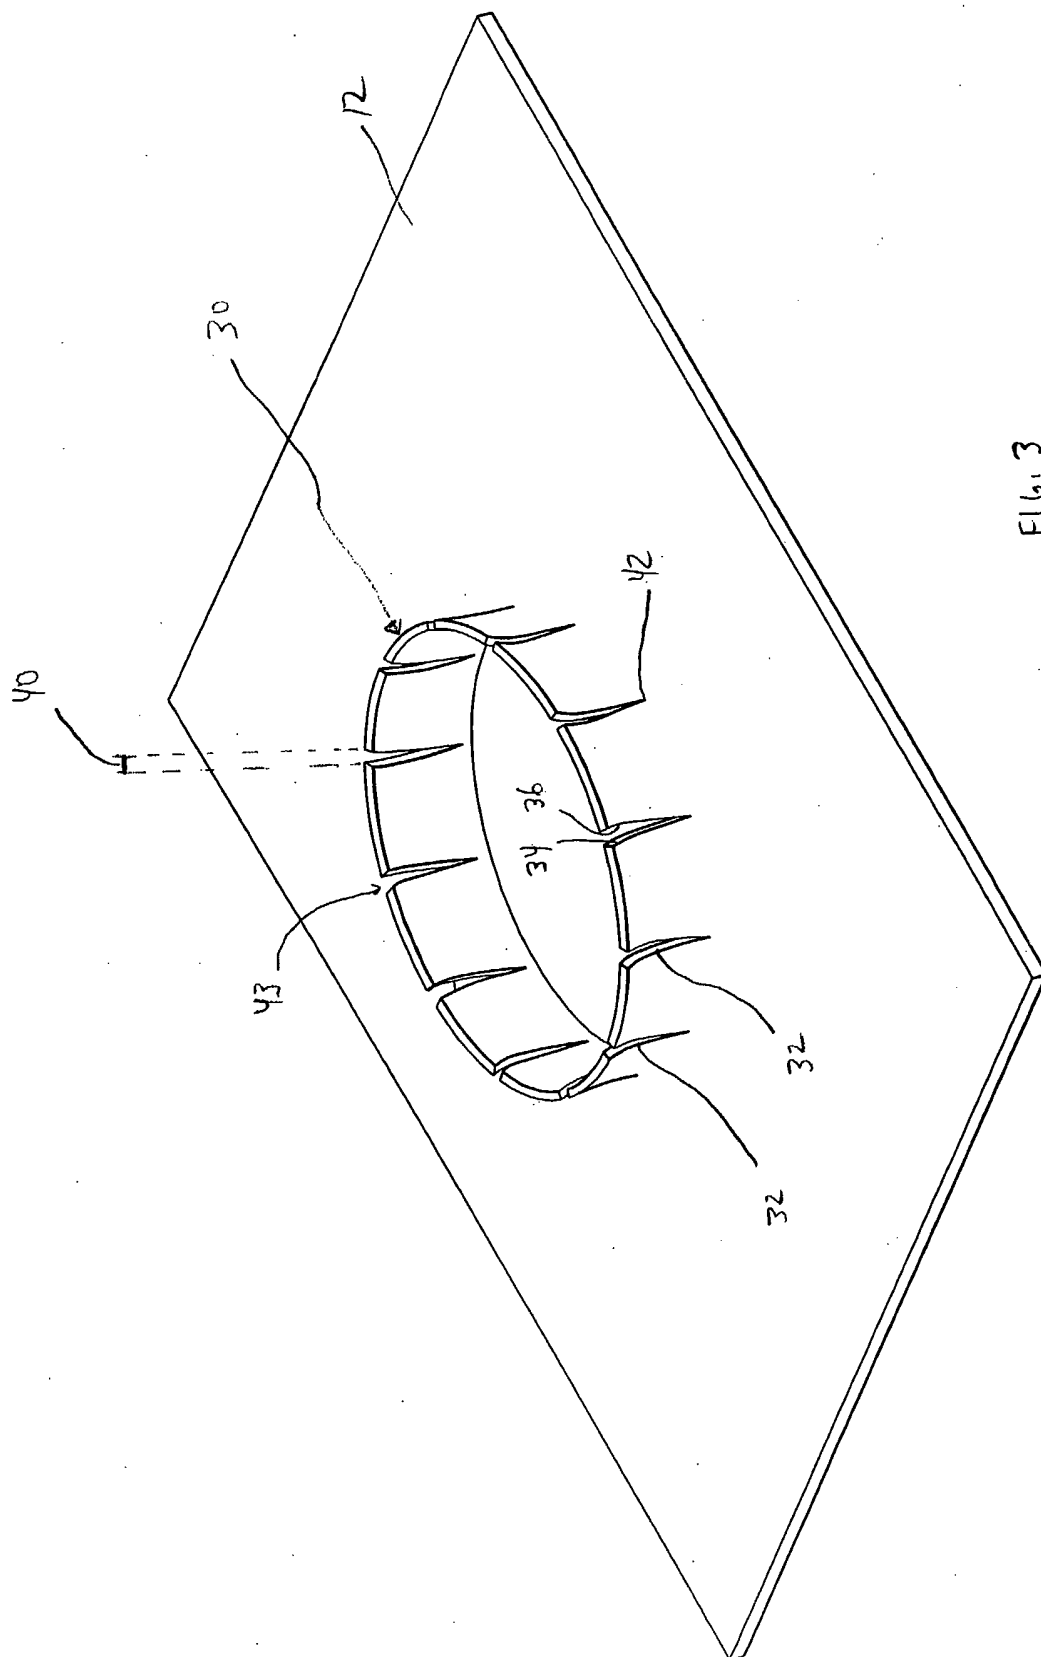


FIG. 3

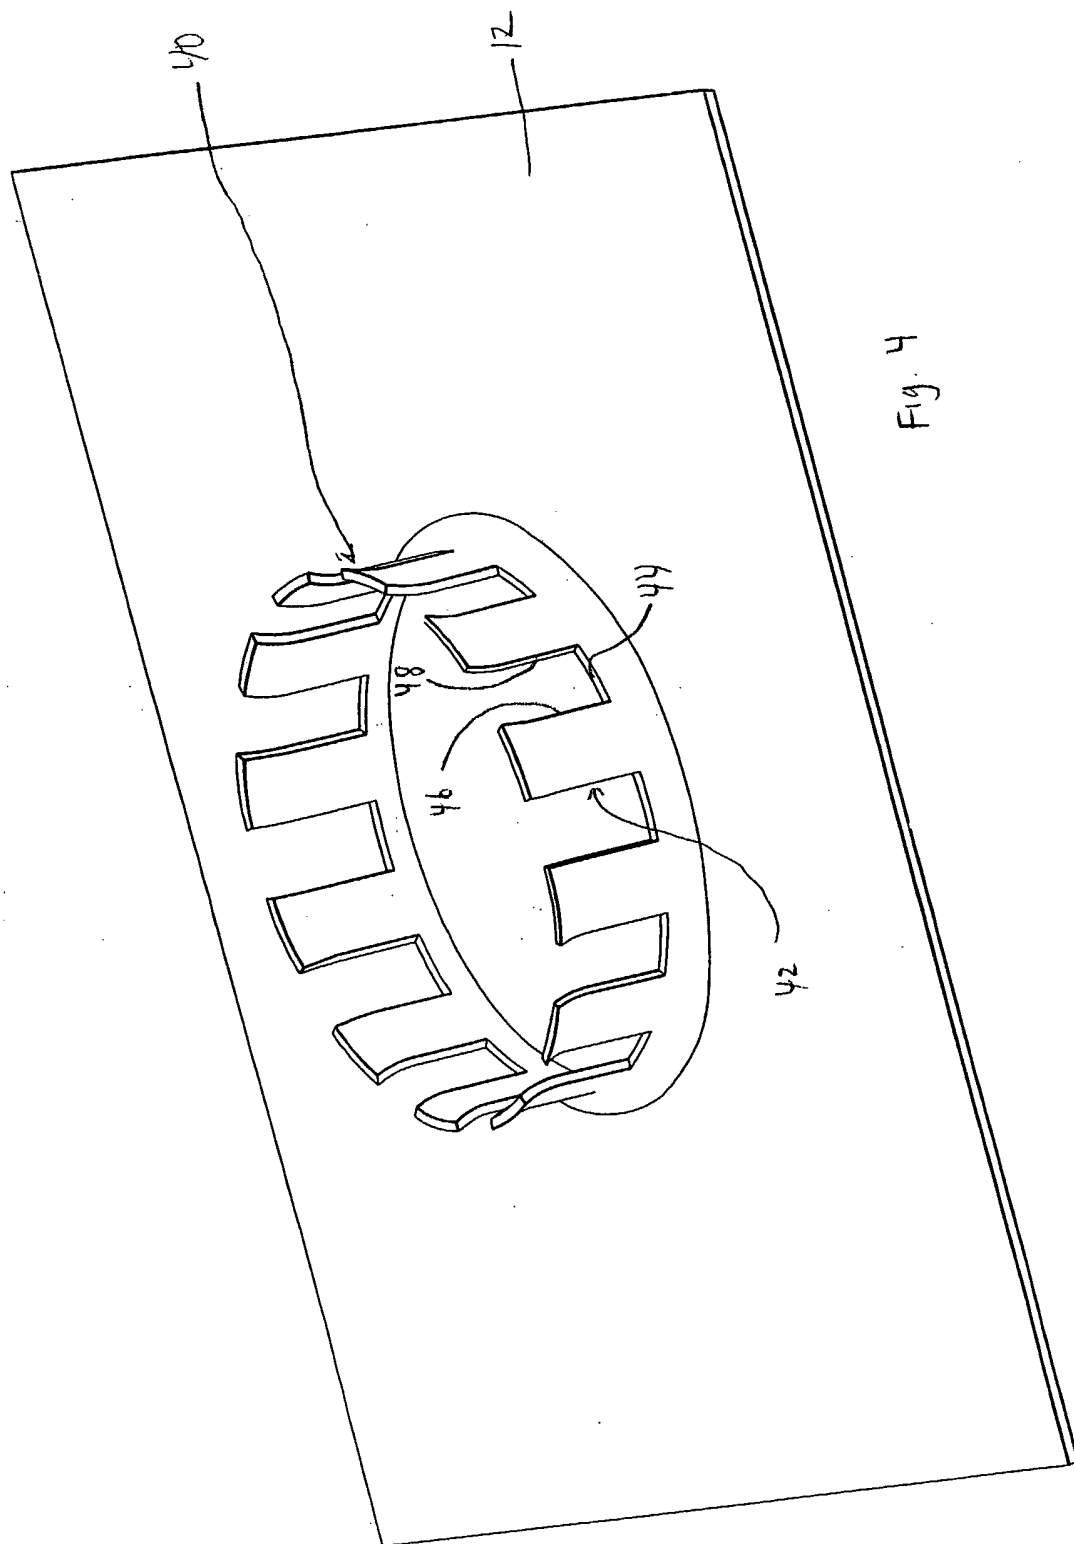


Fig. 4

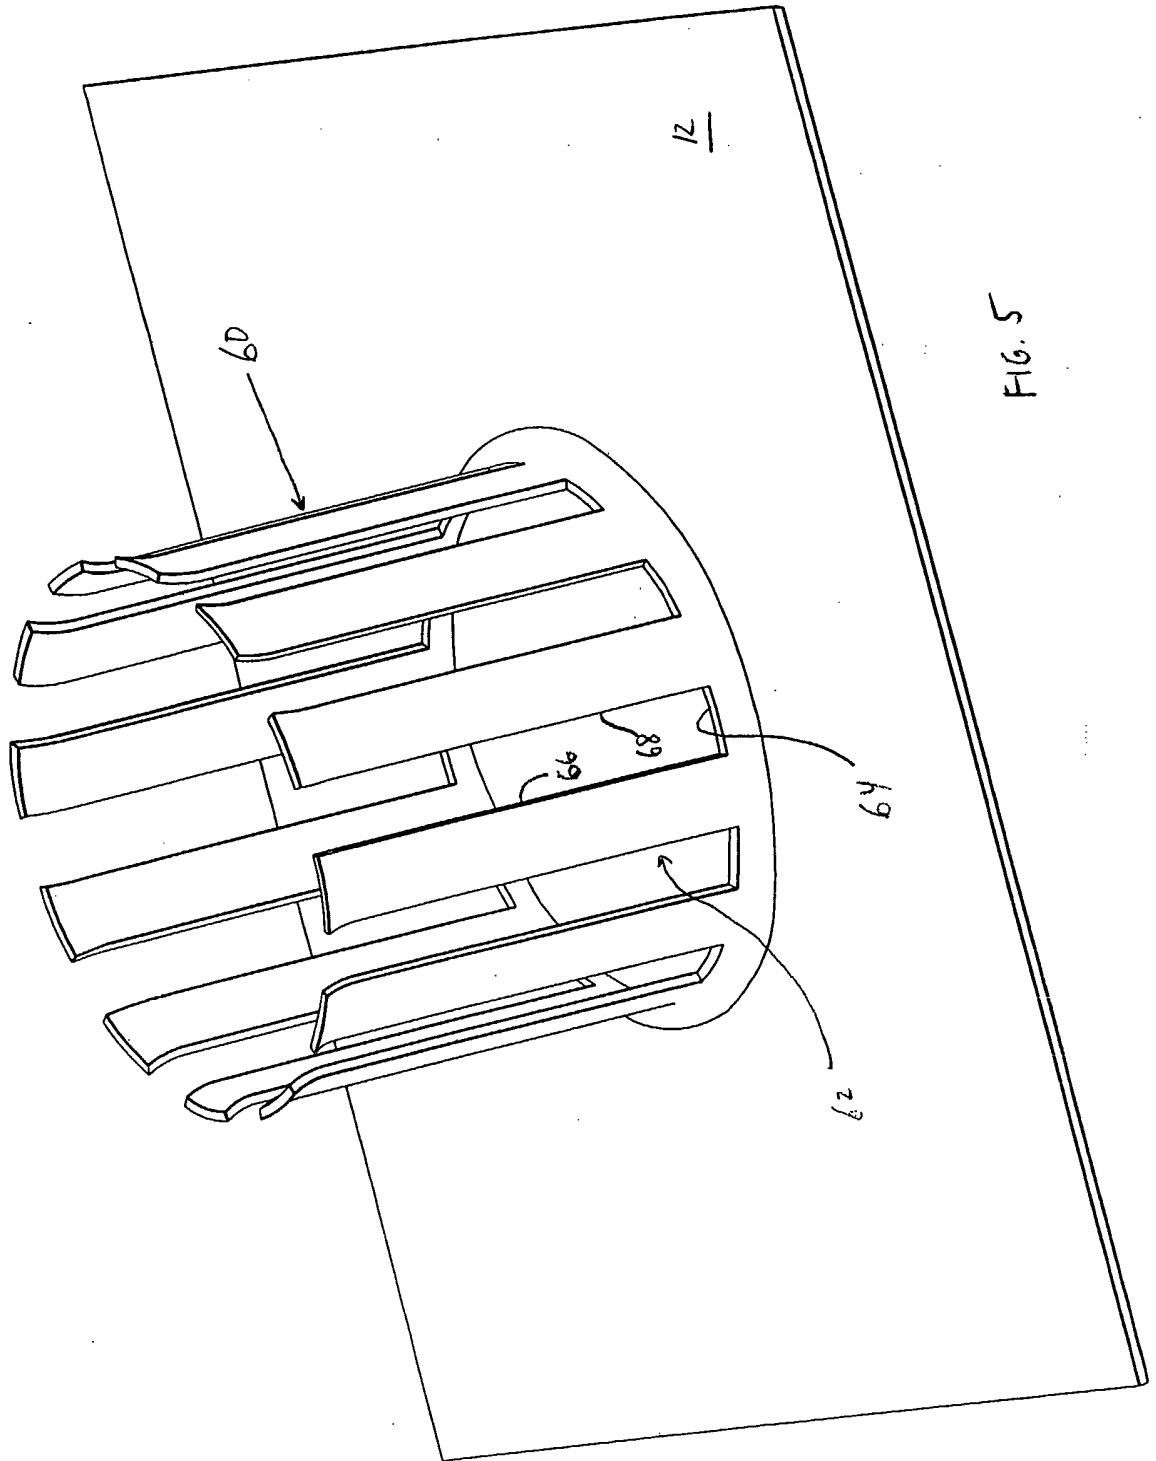


FIG. 5

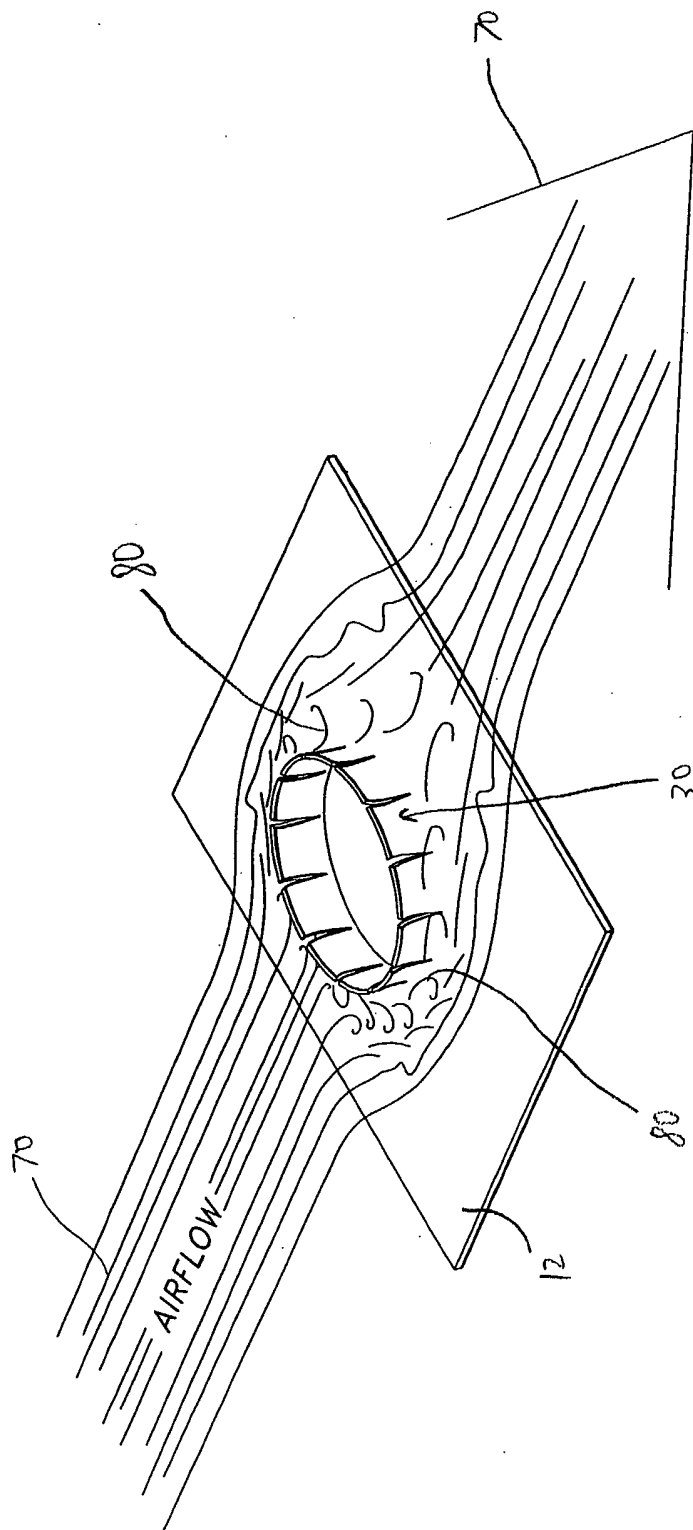


FIG. 6

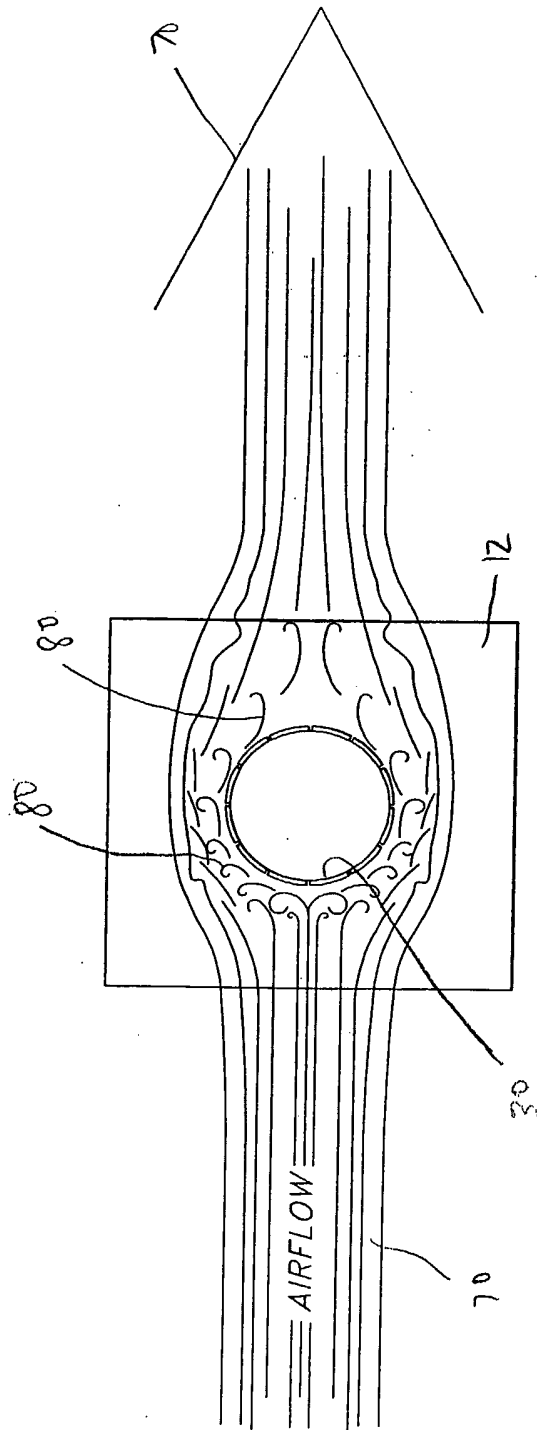


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2005/001550

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 F28F1/32 F28D1/047

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 F28F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 014, no. 404 (M-1018), 31 August 1990 (1990-08-31) -& JP 02 154992 A (SUMITOMO LIGHT METAL IND LTD), 14 June 1990 (1990-06-14)	1, 4-6, 9, 11, 12, 16, 19-21, 24, 26, 27, 31
Y	abstract; figures 10A,B -----	17, 18, 22
X	PATENT ABSTRACTS OF JAPAN vol. 002, no. 128 (M-037), 26 October 1978 (1978-10-26) -& JP 53 096556 A (HITACHI LTD), 23 August 1978 (1978-08-23)	1-3, 5, 7
Y	abstract; figure 7B -----	17, 18, 22
X	GB 2 110 811 A (GEORGE * SALTER AND CO LIMITED) 22 June 1983 (1983-06-22) page 1, line 92 - line 97; figures -----	1-3, 5, 6
	-/--	

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

19 May 2005

Date of mailing of the international search report

27/05/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Mootz, F

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2005/001550

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 10, 8 October 2003 (2003-10-08) -& JP 2003 161589 A (TOYO RADIATOR CO LTD), 6 June 2003 (2003-06-06) abstract; figures 2A,B -----	1,4-6, 11,16, 19-21,26
X	US 5 117 905 A (HESSE ET AL) 2 June 1992 (1992-06-02) figures -----	1-3,5,7

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International Application No  
PCT/US2005/001550

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 02154992	A	14-06-1990	NONE
JP 53096556	A	23-08-1978	NONE
GB 2110811	A	22-06-1983	NONE
JP 2003161589	A	06-06-2003	NONE
US 5117905	A	02-06-1992	DE 3728969 A1 09-03-1989
			DE 3870102 D1 21-05-1992
			DE 8717766 U1 15-03-1990
			EP 0305665 A1 08-03-1989