



(86) Date de dépôt PCT/PCT Filing Date: 2004/12/10
(87) Date publication PCT/PCT Publication Date: 2005/06/30
(45) Date de délivrance/Issue Date: 2014/07/29
(85) Entrée phase nationale/National Entry: 2006/06/14
(86) N° demande PCT/PCT Application No.: JP 2004/018851
(87) N° publication PCT/PCT Publication No.: 2005/058754
(30) Priorités/Priorities: 2003/12/18 (JP2003-421387);
2004/07/15 (JP2004-208462)

(51) Cl.Int./Int.Cl. *C01B 25/32* (2006.01),
A61L 27/00 (2006.01), *C04B 35/447* (2006.01)


(72) Inventeurs/Inventors:
FUJITA, TATSUSHI, JP;
TAMURA, KENICHI, JP;
MORISAKI, YURIKO, JP

(73) Propriétaire/Owner:
IMMUNO-SCIENCE CO., INC., JP

(74) Agent: NORTON ROSE FULBRIGHT CANADA
LLP/S.E.N.C.R.L., S.R.L.


(54) Titre : CORPS FRITTE OBTENU A PARTIR D'UN COMPOSE DE TITANE

(54) Title: SINTERED BODY OF TITANIUM COMPOUND

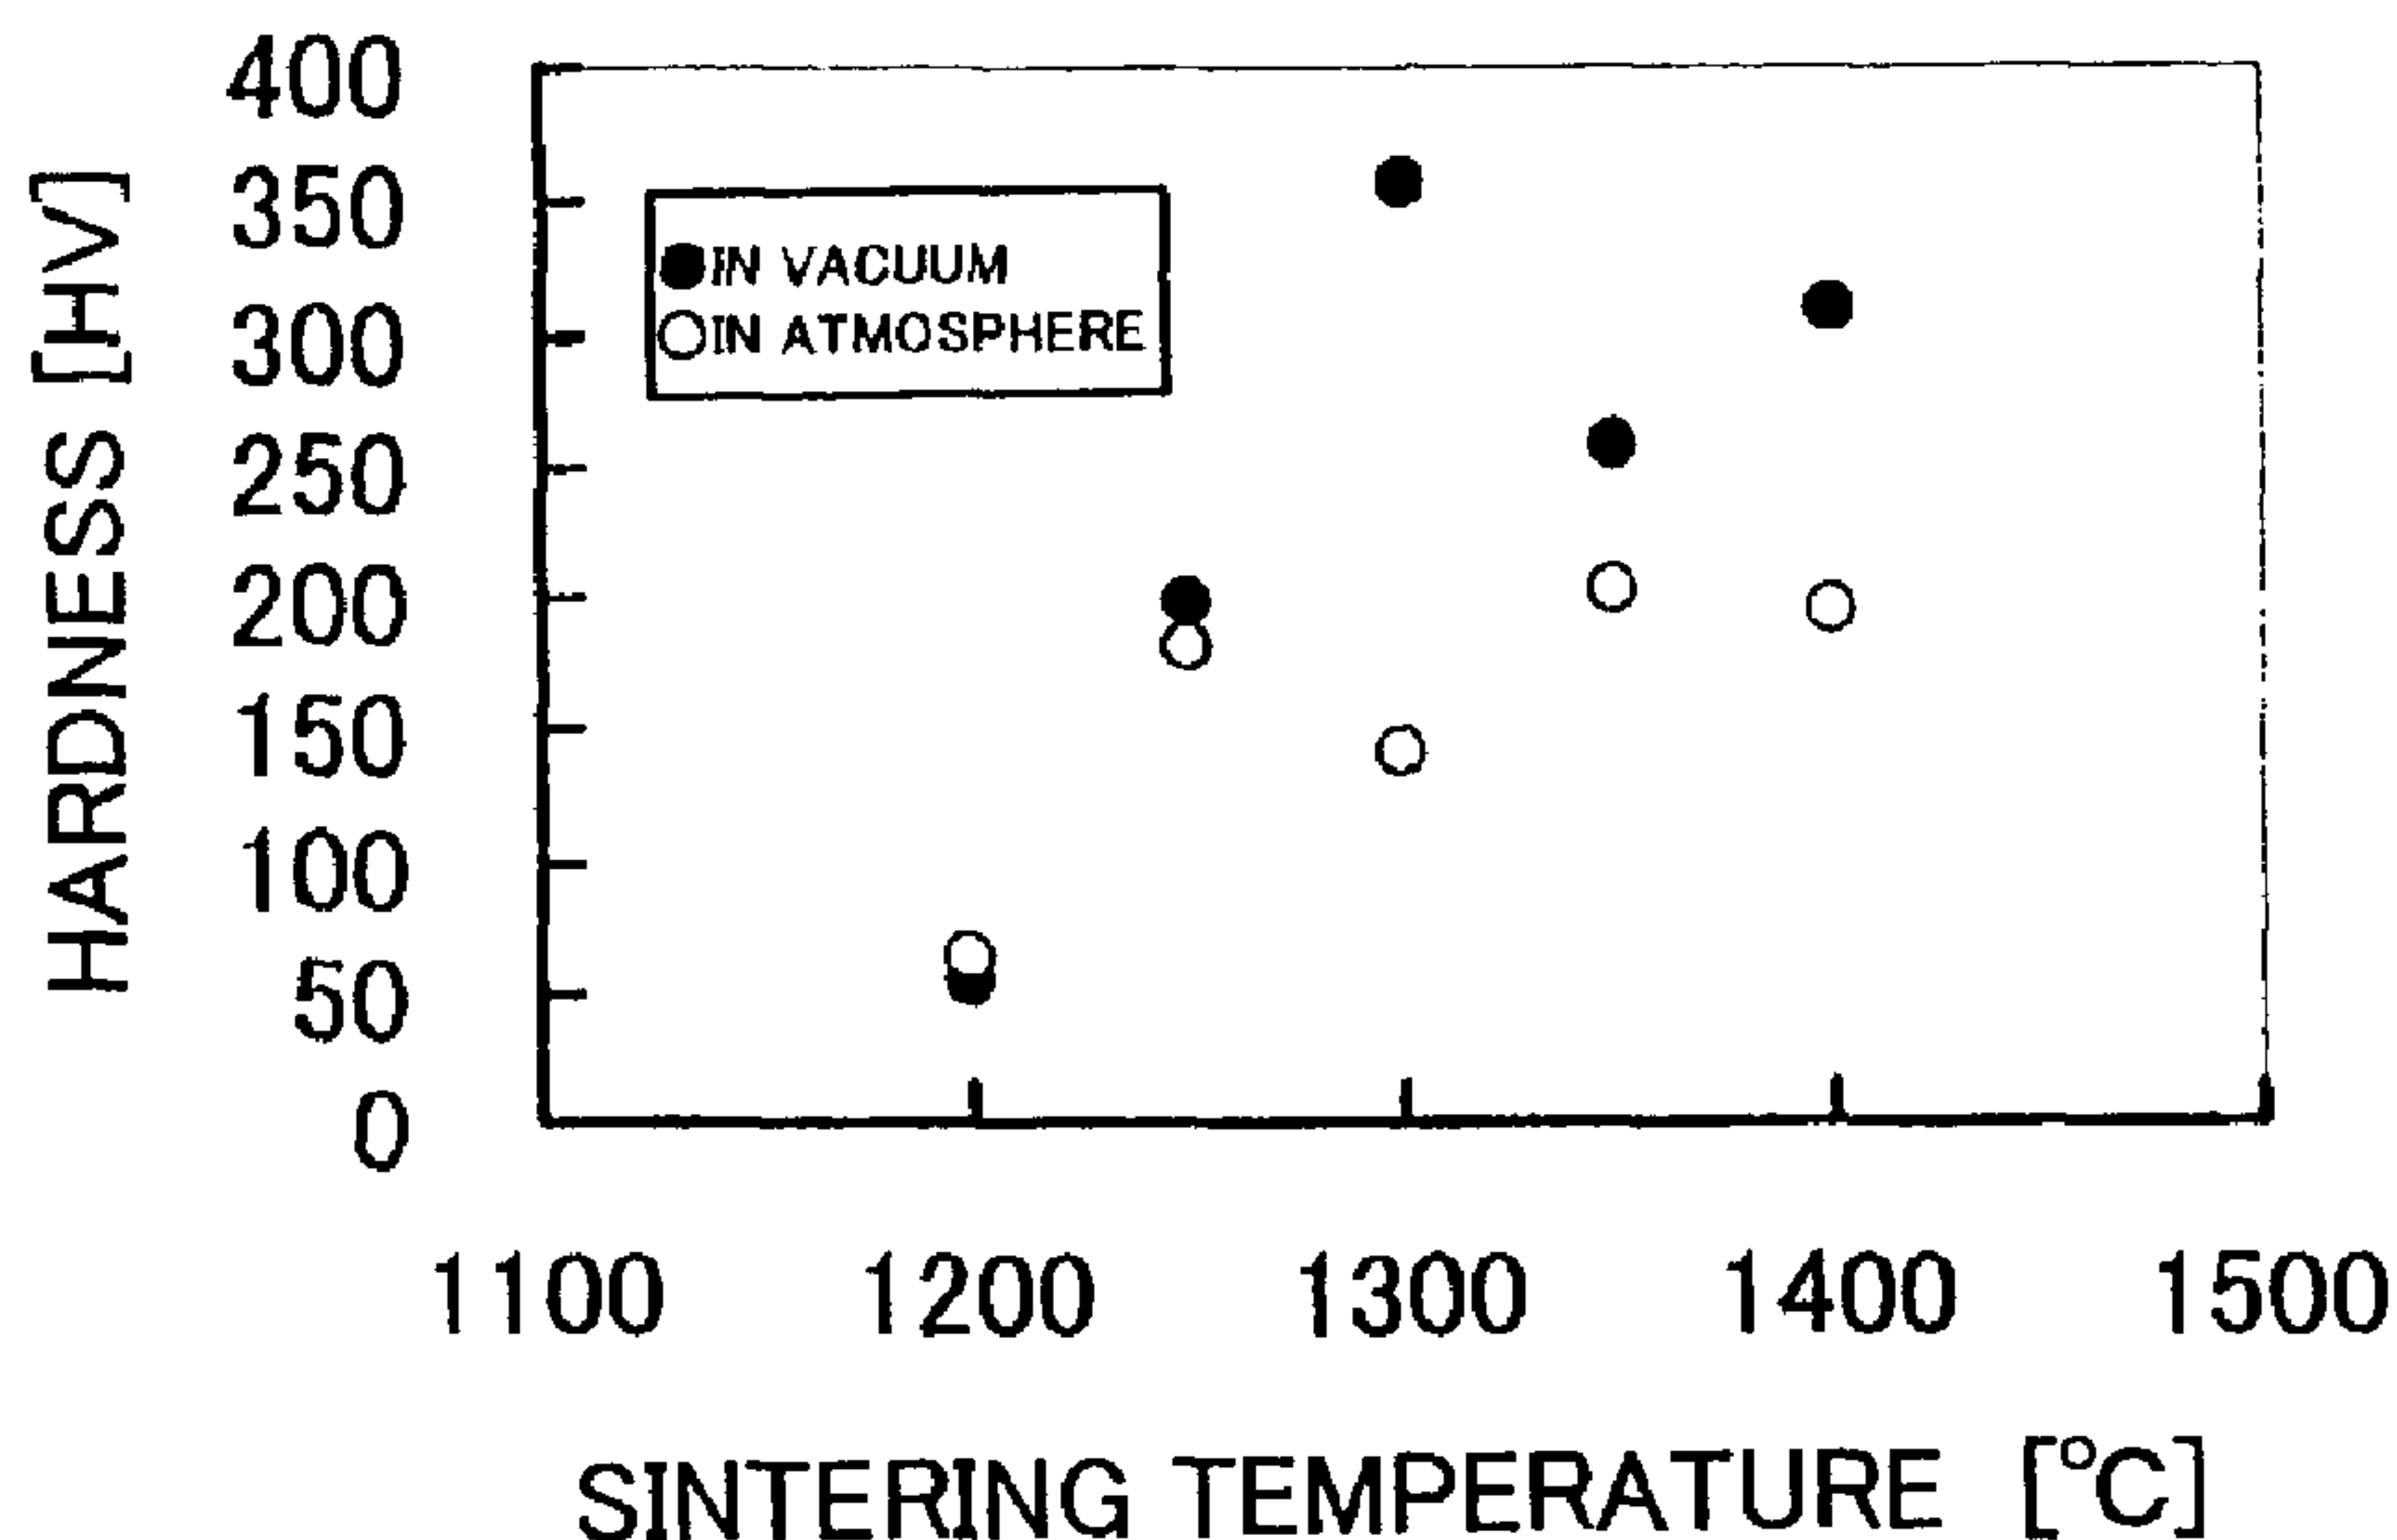

(57) Abrégé/Abstract:

The present invention provides a sintered body of titanium compound obtained by sintering the titanium compound and a method for producing the same. A titanium compound represented by the formula (1) or (2) below is sintered.

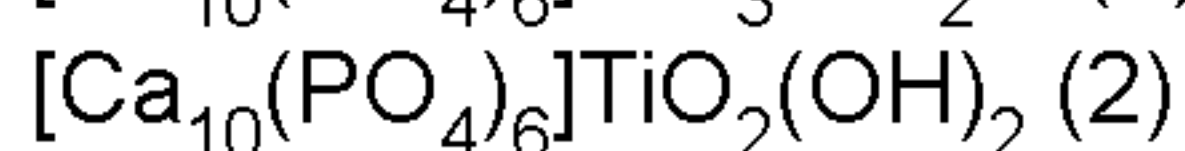

(In the formulae, n is an integer of from 0 to 3).

The obtained sintered body substantially consists of perovskite and whitlockite.

Abstract

The present invention provides a sintered body of titanium compound obtained by sintering the titanium compound and a method for producing the same. A titanium compound represented by the formula (1) or (2) below is sintered.



(In the formulae, n is an integer of from 0 to 3).

The obtained sintered body substantially consists of perovskite and whitlockite.

Description

Sintered body of titanium compound

Technical Field

The present invention relates to a novel titanium compound. Further, the present invention relates to a sintered body of a titanium compound obtained by sintering the titanium compound, and a method for producing the same. Further, the present invention relates to an artificial bone material, an artificial joint material, an artificial tooth material or an artificial dental root (implant) material, constituted of those sintered bodies of the titanium compound. Further, the present invention relates to an artificial bone, an artificial joint, an artificial tooth or an artificial dental root, comprising those sintered bodies of the titanium compound.

Background Art

Apatite has excellent bioaffinity and can directly be bonded to a bone tissue. Therefore, the apatite is widely used as a material for an artificial bone or an artificial dental root. Above all, calcium hydroxyapatite is a main component of a living hard tissue such as a bone or a tooth, and therefore is one of materials most well utilized. Further, it is known that β -tricalcium phosphate (hereinafter referred to as " β -TCP") is easily absorbed in a bone, and is easily substituted

with a new bone after being embedded in a living body.

On the other hand, it is known that titanium has excellent strength and has low reactivity to a living body, and for this reason, is widely used as a material for an artificial joint or an artificial dental root (JP-A-63-143057).

It is desirable that after once being embedded in the body, the material for an artificial joint, an artificial dental root, and the like is strongly bonded to a bone tissue, and is united with the bone tissue.

However, titanium has low reactivity to a living body as described above, but on the other hand, has low affinity with a living tissue. Therefore, it was difficult to unite titanium with a bone tissue.

For this reason, it has been conducted to cover a surface of titanium with apatite for the purpose of increasing adaptability of titanium to a bone tissue (for example, JP-A-3-186272).

In this case, however, it has been a current situation that a satisfactory bioadaptability is not obtained.

On the other hand, as other composite material using apatite and titanium, a titanium compound produced by a coprecipitation method is reported (JP-A-2000-327315 and JP-A-2001-302229). The titanium compound is in a form of powder, and a product obtained by sintering this has not been known.

Further, it is known that of inorganic substances, there

are some substances to be difficult to sinter the same alone as in β -TCP or the like. It is not known that the inorganic substance is mixed with the titanium compound above, and then sintered.

Disclosure of the Invention

The objects of the present invention are to provide a sintered body of a titanium compound obtained by sintering the titanium compound, and a method for producing the same. Further, the objects of the present invention are to provide a sintered body obtained by sintering a mixture of a titanium compound and an inorganic substance, and a method for producing the same.

The present inventors have found that a sintered body of a titanium compound can be obtained by sintering the titanium compound under specific conditions, and such a sintered body is suitable as a material for an artificial bone and the like, and have completed the present invention. Further, the present inventors have found that a sintered body can be obtained by sintering a mixture containing a titanium compound and an inorganic substance under specific conditions, and such a sintered body is suitable as a material for an artificial bone and the like, and have completed the present invention.

That is, the present invention is a titanium compound represented by the following formula (1) or (2):





(In the formulae, n is an integer of from 0 to 3).

Further, the present invention is a sintered body obtained by sintering a titanium compound.

Further, the present invention is the above-described sintered body, wherein the titanium compound is represented by the formula (1) or (2).

Further, the present invention is the above-described sintered body, wherein the titanium compound is produced by adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating.

Further, the present invention is a sintered body comprising perovskite and whitlockite.

Further, the present invention is a sintered body substantially consisting of perovskite and whitlockite.

Further, the present invention is the above-described sintered body, wherein the perovskite and whitlockite are obtained by sintering a titanium compound.

Further, the present invention is the above-described sintered body, wherein the titanium compound is represented by the formula (1) or (2).

Further, the present invention is the above-described sintered body, wherein the titanium compound is produced by adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating.

Further, the present invention is a method for producing a sintered body, comprising sintering a titanium compound.

Further, the present invention is the above-described production method, wherein the titanium compound is represented by the formula (1) or (2).

Further, the present invention is the above-described production method, wherein the titanium compound is produced by adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating.

Further, the present invention is the above-described production method, wherein the sintering is conducted at a temperature exceeding 800°C.

Further, the present invention is the above-described production method, wherein the sintering is conducted under an inert gas atmosphere and/or under reduced pressure.

Further, the present invention is the above-described production method, wherein the inert gas is xenon and/or argon.

Further, the present invention is the above-described production method, wherein the sintering is conducted under a pressure of 10^{-4} Pa or lower.

Further, the present invention is a sintered body obtained by sintering a mixture containing a titanium compound and an inorganic substance.

Further, the present invention is the above-described sintered body, wherein the titanium compound is represented by

the formula (1) or (2).

Further, the present invention is the above-described sintered body, wherein the titanium compound is produced by adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating.

Further, the present invention is the above-described sintered body, wherein the inorganic substance is at least one selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide and platinum.

Further, the present invention is a method for producing a sintered body, comprising sintering a mixture containing a titanium compound and an inorganic substance.

Further, the present invention is the above-described production method, wherein the titanium compound is represented by the formula (1) or (2).

Further, the present invention is the above-described production method, wherein the titanium compound is produced by adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating.

Further, the present invention is the above-described production method, wherein the inorganic substance is at least one selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate,

α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide and platinum.

Further, the present invention is the above-described production method, wherein the sintering is conducted at a temperature exceeding 800°C.

Further, the present invention is the above-described production method, wherein the sintering is conducted under an inert gas atmosphere and/or under reduced pressure.

Further, the present invention is the above-described production method, wherein the inert gas is xenon and/or argon.

Further, the present invention is the above-described production method, wherein the sintering is conducted under a pressure of 10^{-4} Pa or lower.

Further, the present invention is an artificial bone material, an artificial joint material, an artificial tooth material or an artificial dental root material, constituted of the above-described sintered body.

Further, the present invention is an artificial bone, an artificial joint, an artificial tooth or an artificial dental root, comprising the above-described sintered body.

In accordance with one aspect of the invention, there is provided a method for producing a sintered body comprising: sintering a powder of a titanium compound, wherein said powder of the titanium compound is produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion, wherein the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, and wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C .

In accordance with another aspect of the present invention, there is provided a method for producing a sintered body comprising: sintering a mixture comprising a powder of a titanium compound and an inorganic substance, wherein said powder of the titanium compound is produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion, wherein the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C .

In accordance with yet another aspect of the present invention, there is provided a use of a powder of a titanium compound to produce a sintered body, wherein said powder of the

titanium compound represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C , and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

In accordance with still another aspect of the present invention, there is provided a use of a mixture comprising a powder of a titanium compound and an inorganic substance to produce a sintered body, wherein said powder of the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C , and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

In accordance with yet still another aspect of the present invention, there is provided a use of a powder of a titanium compound to produce an artificial bone material, an artificial joint material, an artificial tooth material, an artificial dental root material, an artificial bone, an artificial joint, an artificial tooth or an artificial dental root, wherein said powder of the titanium compound is represented by the following

formula (1) or (2):



wherein n is an integer of from 0 to 3, and wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C, and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion,

In accordance with a further aspect of the present invention, there is provided a use of a mixture comprising a powder of a titanium compound and an inorganic substance to produce an artificial bone material, an artificial joint material, an artificial tooth material, an artificial dental root material, an artificial bone, an artificial joint, an artificial tooth or an artificial dental root wherein said powder of the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, and wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β-tricalcium phosphate, α-tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C, and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

Brief Description of the Drawings

The upper column of Fig. 1 is a view showing X ray diffraction result of the sintered body of a titanium compound of the present invention; the middle column is a view showing

X ray diffraction pattern of whitlockite; and the lower column is a view showing X ray diffraction pattern of perovskite.

Fig. 2 is a view showing the relationship between a sintering temperature of the sintered body of a titanium compound and microvickers hardness.

Fig. 3 is a view showing microvickers hardness of the sintered body of a mixture of the titanium compound and β -TCP.

Best Mode for Carrying Out the Invention

The titanium compound of the present invention is represented by the following formula (1) or (2), and has a structure of titanic acid apatite:



(In the formulae, n is an integer of from 0 to 3).



In the formula (1), n is from 0 to 3, and is preferably 1 or 2.

The titanium compound of the present invention can be produced by, for example, a coprecipitation method of adding an alkali to a solution containing a calcium ion, a titanium ion and phosphoric ion, thereby coprecipitating. Specifically, for example, phosphoric acid is added to an aqueous solution containing calcium nitrate, titanium sulfate and a small amount of an alkali component dissolved therein, followed by aqueous ammonia is added to adjust pH to the vicinity of 9, and the

suspension obtained is stirred at 80 to 100°C for 4 to 8 hours, thereby a dispersion of the titanium compound can be obtained. This solution is filtered, and the material filtered off is washed and dried, thereby a powder of the titanium compound of the present invention can be produced. In dissolving calcium nitrate and titanium sulfate, formation of calcium sulfate can be suppressed by adding a small amount of an alkali component.

As a reaction formula in this case, the following is considered.

Reaction Formula 1:

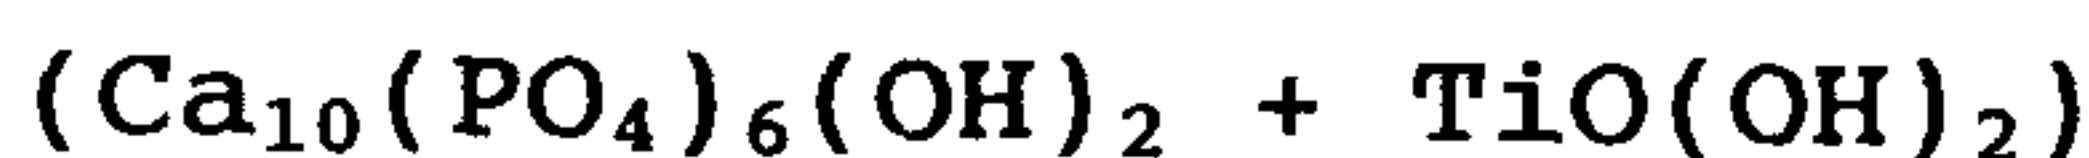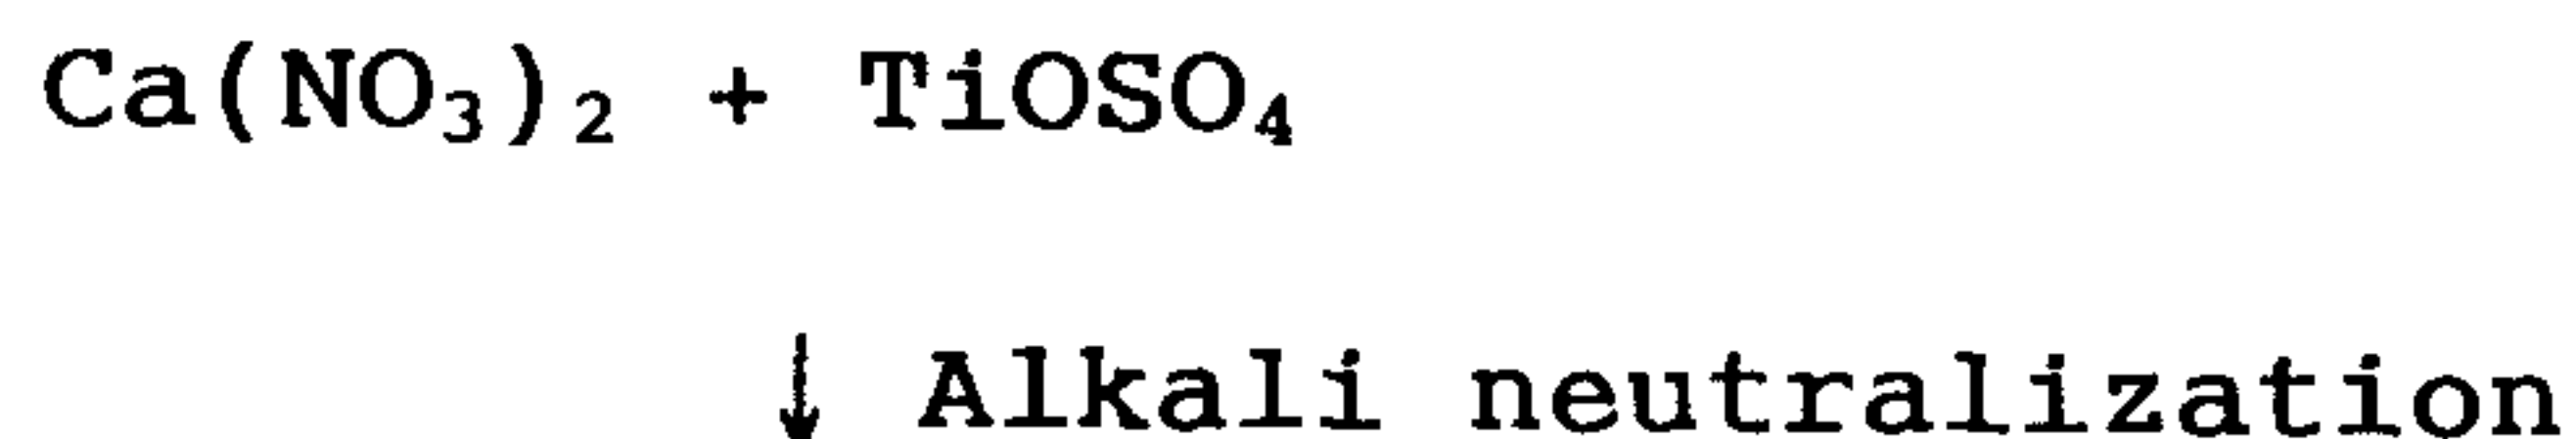

or



Next, the method for producing the sintered body of the titanium compound of the present invention is described.

The sintered body of the titanium compound of the present invention can be produced by sintering a powder of the titanium compound at a temperature exceeding 800°C. Where the temperature is 800°C or lower, there is the possibility that

the titanium compound cannot be sintered, or a sintered material easily disintegrates.

The upper limit of the sintering temperature is not particularly limited so long as the titanium compound can be sintered, but it is preferable to sinter at 1,500°C or lower.

Further, the sintered body of the titanium compound of the present invention is preferable to sinter the titanium compound under an inert gas atmosphere and/or under reduced pressure. The inert gas used here is preferably xenon and/or argon. Further, pressure when sintering is preferably atmospheric pressure (10^5 Pa) or lower, more preferably 10 Pa or lower, further preferably 10^{-2} Pa or lower, and most preferably 10^{-4} Pa or lower. In this case, the sintering may be conducted only under an inert gas atmosphere, or only under reduced pressure. However, it is more preferable that the sintering is conducted under an inert gas atmosphere and also under reduced pressure.

The sintering time is not particularly limited so long as the sintered body of the titanium compound is obtained. However, for example, the sintering time can be 15 minutes or more, preferably 12 hours or more, more preferably 24 hours or more, and further preferably 48 hours or more. There is the tendency that longer sintering time provides a sintered body having higher hardness. Further, the upper limit of the sintering time is not particularly limited, and can

appropriately be determined according the hardness of the sintered body, and the like. However, for example, the upper limit can be 72 hours or less, and preferably 36 hours or less.

For example, when sintering for 30 minutes under an atmospheric pressure, it is preferable to sinter at 1,250 to 1,450°C, and when sintering for 30 minutes at 10^{-4} Pa, it is preferable to sinter at 850 to 1,350°C.

The sintered body of the titanium compound of the present invention comprises perovskite (CaTiO_3) and whitlockite ($\text{Ca}_3(\text{PO}_4)_2$). In this case, it is preferable from the standpoint of hardness that α -tricalcium phosphate (hereinafter referred to as " α -TCP"), anatase titanium dioxide or hydroxylapatite is not substantially contained in the sintered body of the titanium compound.

As a reaction formula in this case, the following is considered.


Reaction Formula 2:



or



↓ Sintering

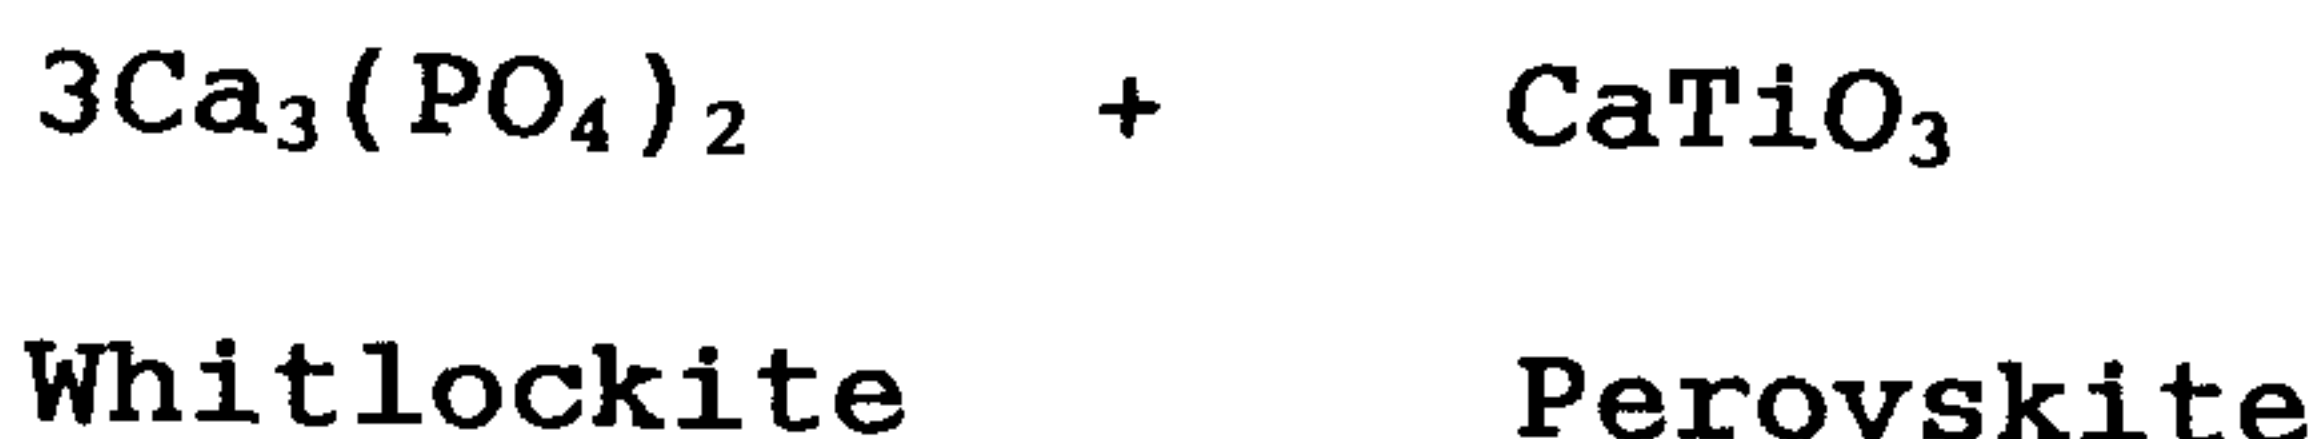

Next, the sintered body obtained by sintering a mixture of the titanium compound and the inorganic substance is

described.

The inorganic substance used in the present invention is not particularly limited so long as a sintered body can be obtained by mixing with the titanium compound. For example, calcium hydroxyapatite, calcium fluoroapatite, β -TCP, α -TCP, tetracalcium phosphate, metallic titanium, titanium oxide, platinum, and the like can be mentioned. Of those, β -TCP is preferable from the point that it can easily be substituted with a bone tissue in a living tissue. Further, those inorganic substances may be used alone or as mixtures of two or more thereof.

The sintered body of the mixture of the titanium compound and the inorganic substance of the present invention can be produced by sintering the mixture of the titanium compound and the inorganic substance at a temperature exceeding 800°C.

The mixing ratio of the titanium compound and the inorganic substance is not particularly limited so long as a sintered body of the mixture is obtained. Weight ratio of titanium compound : inorganic substance can be 99:1 to 1:99, preferably 95:5 to 30:70, and more preferably 90:10 to 50:50.

Inert gas, pressure, temperature range, time, and the like used when sintering are appropriately determined depending on properties of the inorganic substance or its mixing ratio, but can be nearly the same as the conditions when producing the sintered body of the titanium compound as described above.

Example 1

Production of Titanium Compound:

0.1 mol of calcium nitrate ($\text{Ca}(\text{NO}_3)_2$) and 0.1 mol of titanium sulfate (TiSO_4) were dissolved in about 500 ml of water, followed by neutralizing with an alkali. After adding 0.06 mol of phosphoric acid (H_3PO_4), aqueous ammonia was added to adjust pH to 9.0, followed by stirring at 100°C for 6 hours. The precipitates obtained was filtered off, and dried, thereby obtaining about 10 g of a powder of the titanium compound represented by the formula (1) or (2).

Example 2

Sintering of Titanium Compound:

About 3 g of the powder of the titanium compound obtained in Example 1 was kneaded with purified water, and placed in a mold, molded, and then air-dried. The air-dried product was dried in a drying oven at 100°C for 24 hours. The dried sample was placed in a vacuum heat-treating machine, and held at various temperatures under an atmospheric pressure or in vacuum (10^{-4} Pa) for 30 minutes to sinter the same. After stopping the heating, the sample was allowed to stand to room temperature. Regarding the sample sintered in vacuum, it was allowed to stand to room temperature, and after introducing argon gas, and was taken out. Regarding the sintered body of the titanium compound obtained, crystal analysis by X ray diffraction was conducted. Fig. 1 shows the result of X ray diffraction in the case of

sintering at 1,300°C in vacuum. Further, Fig. 1 also shows X ray diffraction patterns of perovskite and whitlockite. Further, the results are summarized in Table 1.

It is seen from Table 1 that in the case of sintering at 1,300°C and 1,400°C under atmospheric pressure, a sintered body substantially consisting of perovskite and whitlockite is obtained, and at from 900°C to 1,300°C under vacuum, a sintered body substantially consisting of perovskite and whitlockite is obtained.

Further, due to that those sintered bodies of the titanium compounds substantially consist of perovskite and whitlockite, it was proven that the titanium compound represented by the formula (1) or (2) changed perovskite and whitlockite by the above reaction formulae.

TABLE 1

Sintering Temperature (°C)	Under atmospheric Pressure	Under vacuum
Before sintering	Hydroxyapatite (Ti compound was slightly confirmed)	
600	-	Hydroxyapatite
800	Whitlockite Anatase TiO ₂ Hydroxyapatite	Whitlockite Perovskite Hydroxyapatite
900	-	Whitlockite Perovskite
950	-	Whitlockite Perovskite
1000	Whitlockite Anatase TiO ₂ Hydroxyapatite	Whitlockite Perovskite
1100	Whitlockite Perovskite Hydroxyapatite	Whitlockite Perovskite
1200	Whitlockite Perovskite Hydroxyapatite	Whitlockite Perovskite
1300	Whitlockite Perovskite	Whitlockite Perovskite
1400	Whitlockite Perovskite	Whitlockite Perovskite α -TCP
1500	Whitlockite Perovskite α -TCP	Whitlockite Perovskite α -TCP

Example 3

About 3 g of a powder of a titanium compound produced by a coprecipitation method was kneaded with purified water, placed in a mold, molded, and then air-dried. The air-dried product was dried in a drying oven at 100°C for 24 hours. The dried sample was placed in a vacuum heat-treating machine, and held at various temperatures under an atmospheric pressure or in vacuum (10^{-4} Pa) for 15 minutes to sinter the same. After

stopping the heating, the sample was allowed to stand to room temperature. Regarding the sample sintered in vacuum, it was allowed to stand to room temperature, and after introducing argon gas, and was taken out. Regarding the obtained sintered body of the titanium compound, microvickers hardness was measured. The results are shown in Fig. 2.

It is seen from Fig. 2 that a sintered body of a titanium compound, having high hardness is obtained. Further, it is seen that a sintered body having higher hardness can be obtained in the case of sintering in vacuum, as compared with the case of sintering under atmospheric pressure.

Example 4

About 3 g of a mixture obtained by mixing a powder of a titanium compound produced by a coprecipitation method and a powder of β -TCP as an inorganic substance was kneaded with purified water, molded and dried in the same manner as in Example 3. The dried sample was held at 1,350°C under a pressure of 10^{-4} Pa for 15 minutes to sinter the same. The content of β -TCP to the whole amount of the mixture was 25 wt%. After stopping the heating, the sample was allowed to stand to room temperature, and after introducing argon gas, was taken out. Regarding the obtained sintered body of a mixture of the titanium compound and β -TCP, microvickers hardness was measured at three portions. The results are shown in Fig. 3.

It is seen from Fig. 3 that β -TCP, which is difficult to

sinter alone, can be sintered by mixing with a titanium compound. Further, it is seen that the obtained sintered body of a mixture of the titanium compound and β -TCP has hardness equal to or higher than the case of the titanium compound alone.

Industrial Applicability

The sintered body of the titanium compound of the present invention has high hardness, and can be used as an artificial bone material, an artificial joint material, an artificial tooth material or an artificial dental root (implant) material. Further, the sintered body of the titanium compound of the present invention can be processed to form an artificial bone, an artificial joint, an artificial tooth or an artificial dental root. Further, an artificial bone, an artificial joint, an artificial tooth or an artificial dental root can be obtained by sintering the sintered body of the titanium compound of the present invention into the desired shape of an artificial bone, an artificial joint, an artificial tooth or an artificial dental root.

CLAIMS:

1. A method for producing a sintered body comprising:

sintering a powder of a titanium compound, wherein said powder of the titanium compound is produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion,

wherein the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, and

wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C.

2. A method according to claim 1, comprising sintering a mixture comprising said powder of the titanium compound and an inorganic substance, wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C.

3. The method according to claim 1 or 2, comprising sintering the powder of the titanium compound or the mixture under an inert gas atmosphere.

4. The method according to any one of claims 1 to 3, comprising sintering the powder of the titanium compound or the mixture under atmospheric pressure conditions or below atmospheric pressure.

5. The method according to any one of claims 1 to 4, comprising sintering the powder of the titanium compound or the mixture under a pressure of 10^{-4} Pa or low.

6. The method according to any one of claims 3 to 5, wherein the inert gas is at least one of xenon and argon.

7. The method according to any one of claims 1 to 6, comprising sintering the powder of the titanium compound or the mixture for a period between 15 minutes and 72 hours.

8. The method according to any one of claims 2 to 7, wherein the weight ratio of the powder titanium compound: inorganic substance in the mixture is between 95:5 to 30:70.

9. The method according to any one of claims 2 to 8, wherein the weight ratio of the powder titanium compound: inorganic substance in the mixture is between 90:10 to 50:50.

10. Use of a powder of a titanium compound to produce a sintered body, wherein said powder of the titanium compound represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3,

wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C, and

produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

11. The use according to claim 10, wherein said powder of the titanium compound and an inorganic substance to produce a mixture and the sintered body, wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium

phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C, and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

12. Use of a powder of a titanium compound to produce an artificial bone material, an artificial joint material, an artificial tooth material, an artificial dental root material, an artificial bone, an artificial joint, an artificial tooth or an artificial dental root, wherein said powder of the titanium compound is represented by the following formula (1) or (2):



wherein n is an integer of from 0 to 3, and

wherein the powder of the titanium compound is sintered at a temperature exceeding 800°C, and

produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion,

13. The use according to claim 12, wherein said powder of the titanium compound and an inorganic substance to produce a mixture and the artificial bone material, the artificial joint material, the artificial tooth material, the artificial dental root material, the artificial bone, the artificial joint, the artificial tooth or the artificial dental root, wherein said inorganic substance is selected from the group consisting of calcium hydroxyapatite, calcium fluoroapatite, β -tricalcium phosphate, α -tricalcium phosphate, tetracalcium phosphate, metallic titanium, titanium oxide, platinum and mixture thereof, and wherein the mixture is sintered at a temperature exceeding 800°C, and produced by coprecipitation wherein an alkali is added to a solution comprising a calcium ion, a titanium ion and phosphoric ion.

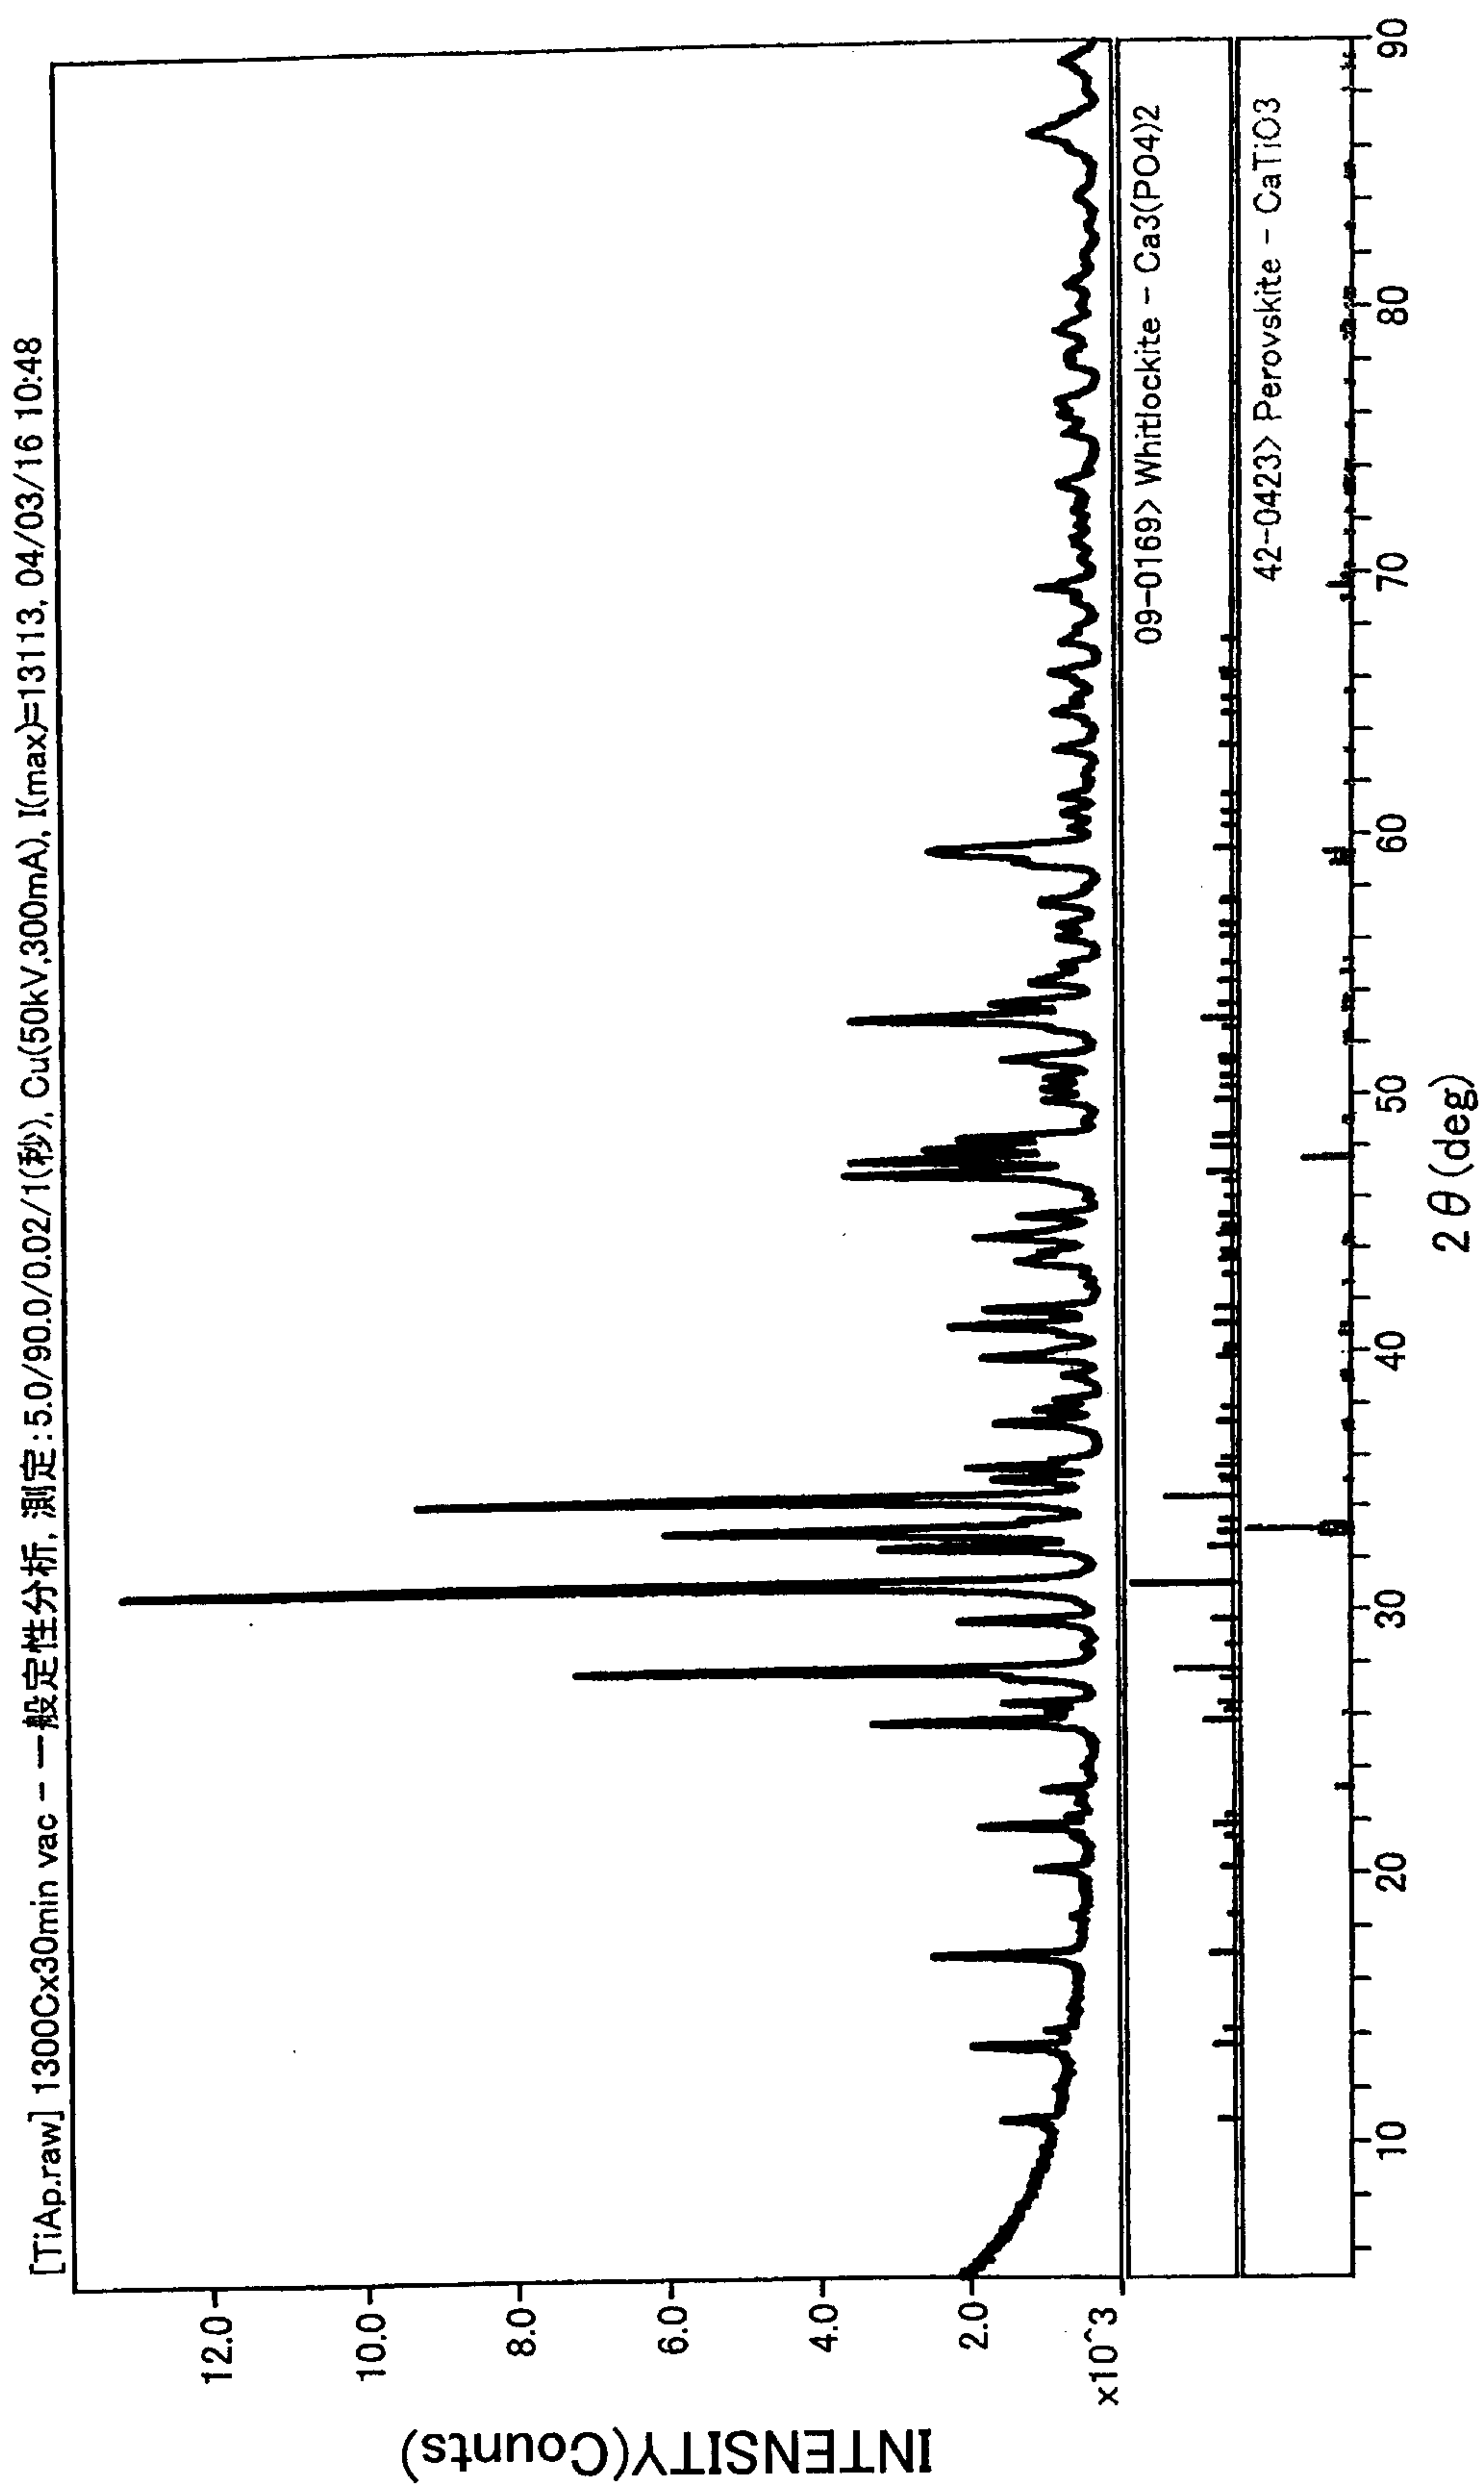


FIG. 1

2/2

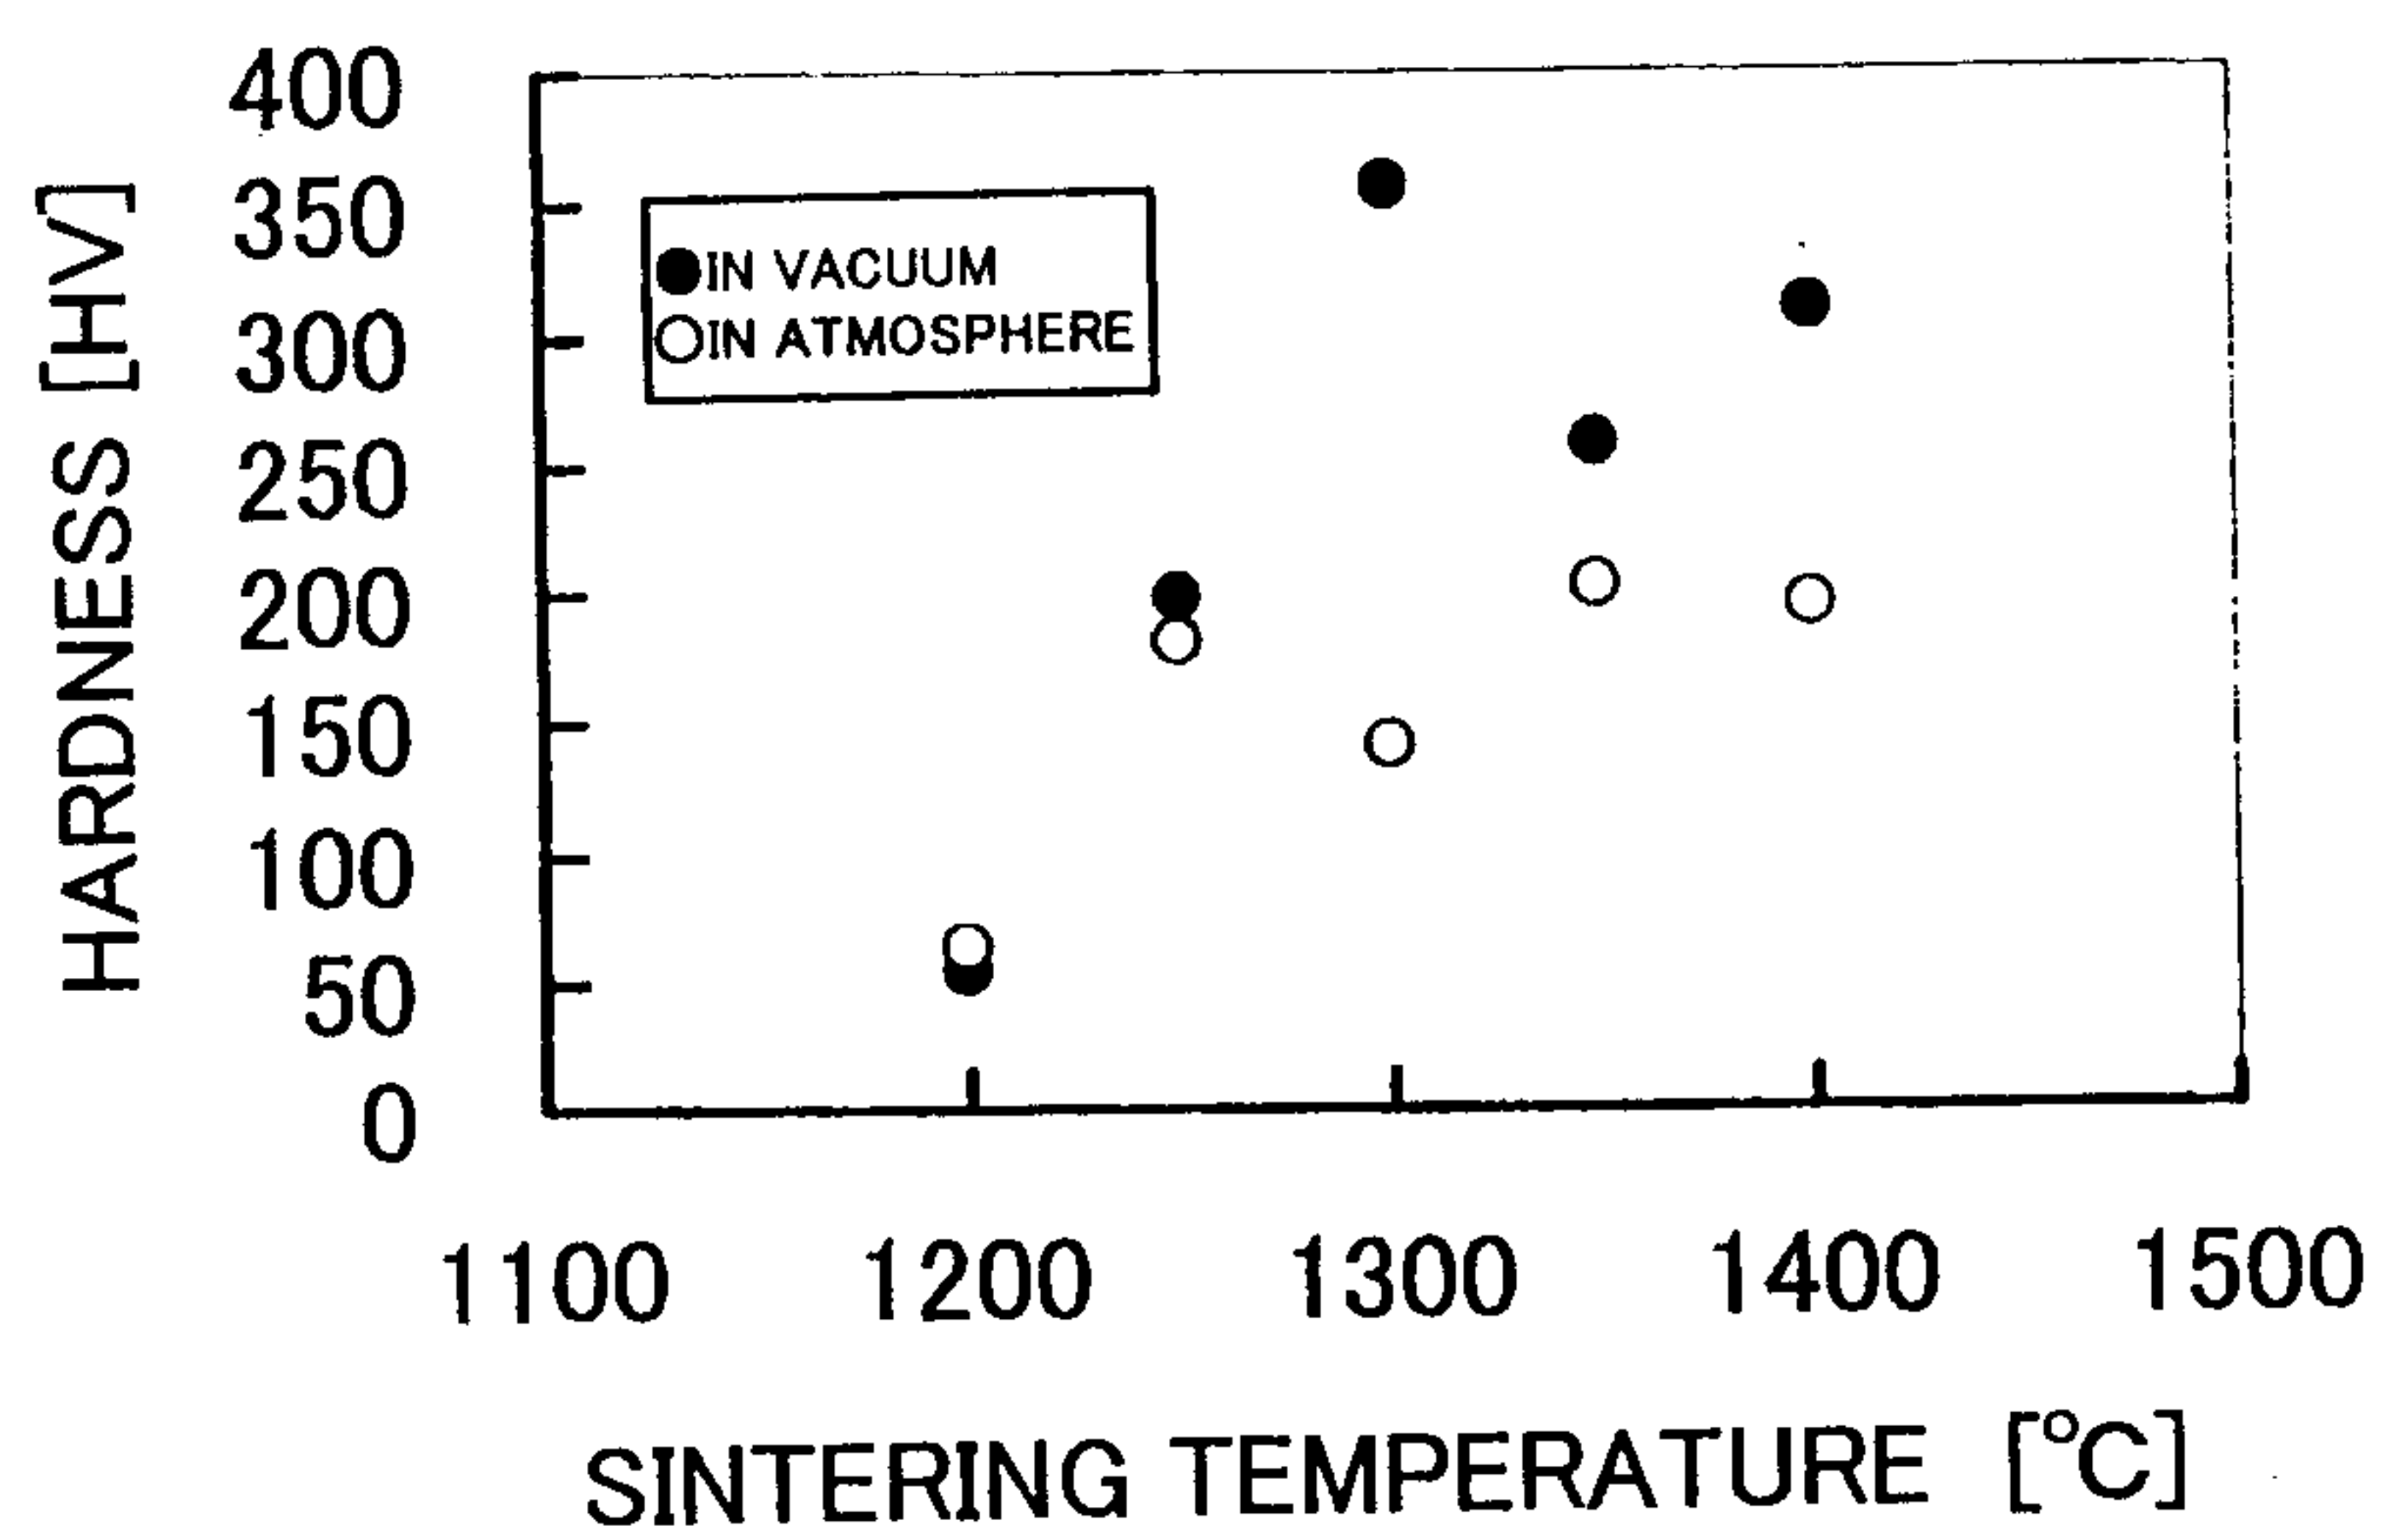


FIG. 2

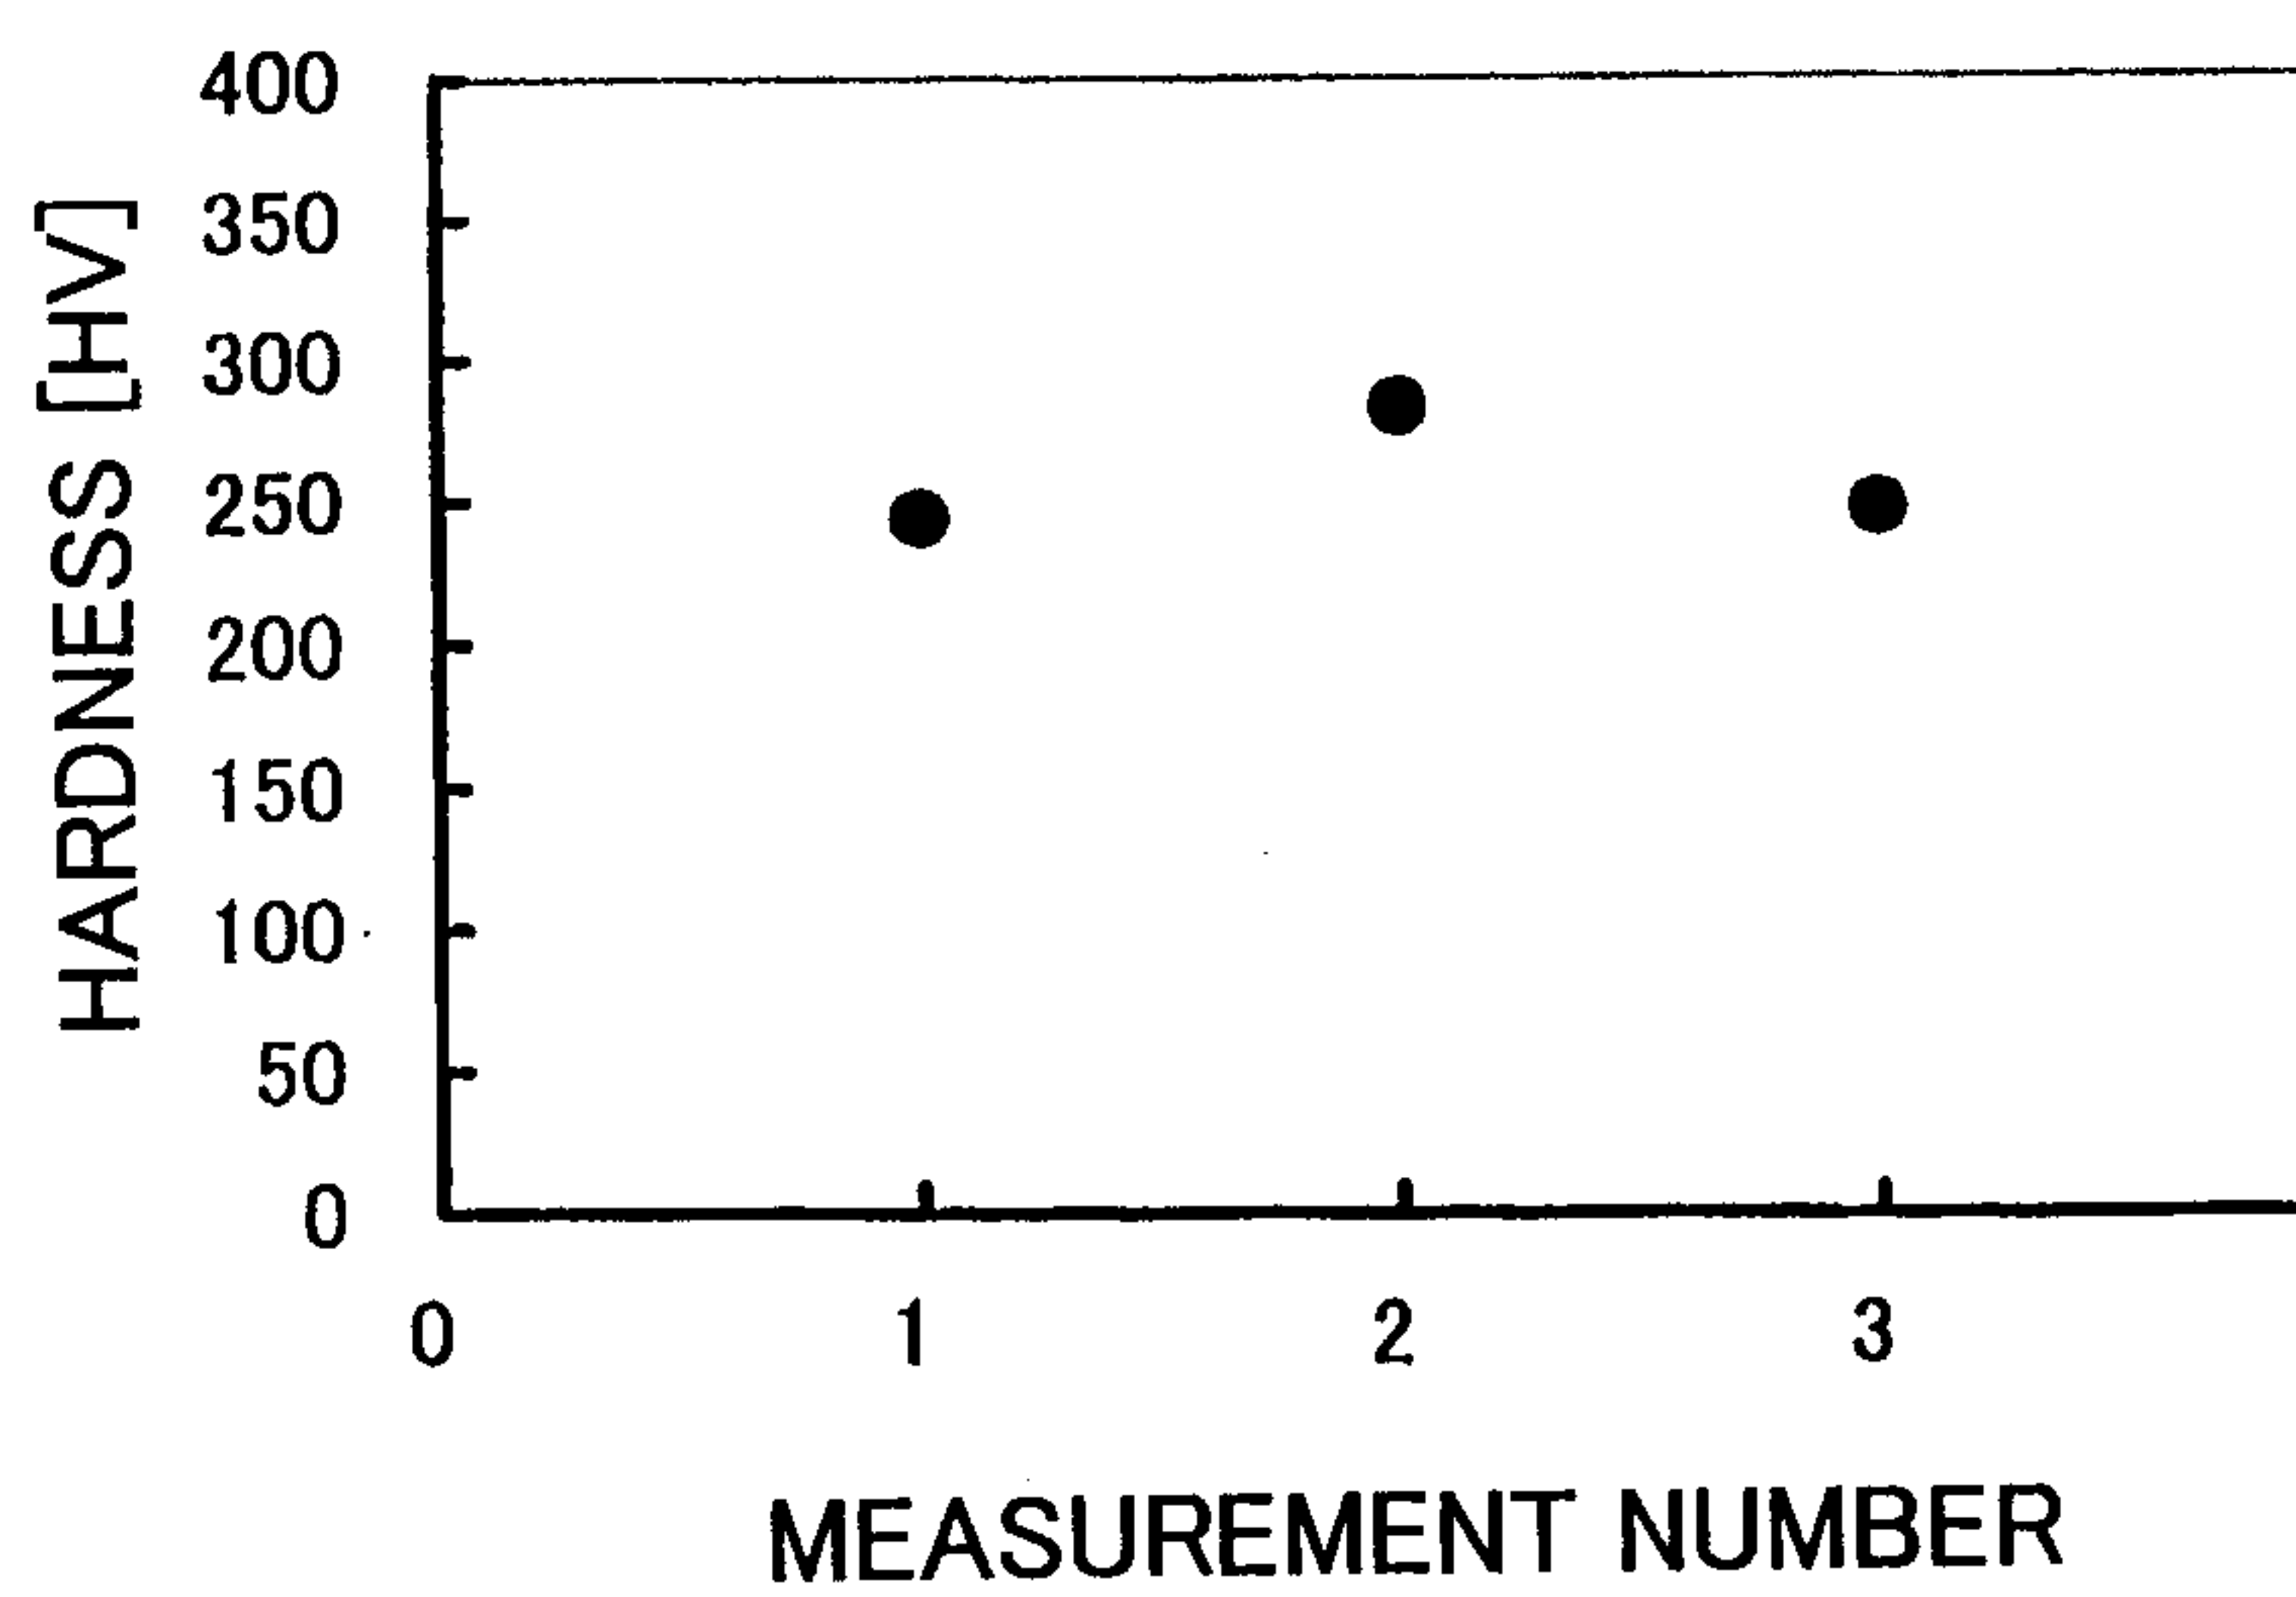


FIG. 3

