



(86) Date de dépôt PCT/PCT Filing Date: 2007/06/14  
 (87) Date publication PCT/PCT Publication Date: 2008/02/21  
 (45) Date de délivrance/Issue Date: 2014/09/30  
 (85) Entrée phase nationale/National Entry: 2009/01/23  
 (86) N° demande PCT/PCT Application No.: US 2007/013900  
 (87) N° publication PCT/PCT Publication No.: 2008/020908  
 (30) Priorité/Priority: 2006/08/16 (US60/838,062)

(51) Cl.Int./Int.Cl. *F17D 1/08* (2006.01),  
*B01F 17/12* (2006.01), *B65G 53/00* (2006.01),  
*C09K 8/584* (2006.01), *E21B 21/14* (2006.01),  
*F15D 1/02* (2006.01), *F17D 1/17* (2006.01)  
 (72) Inventeurs/Inventors:  
 VARADARAJ, RAMESH, US;  
 THOMAS, EUGENE R., US  
 (73) Propriétaire/Owner:  
 EXXONMOBIL UPSTREAM RESEARCH COMPANY,  
 US  
 (74) Agent: BORDEN LADNER GERVAIS LLP

(54) Titre : FLUX ANNULAIRE CENTRAL DE PETROLE BRUT LOURD DANS DES PIPELINES DE TRANSPORT ET  
 Puits de production  
 (54) Title: CORE ANNULAR FLOW OF HEAVY CRUDE OILS IN TRANSPORTATION PIPELINES AND PRODUCTION  
 WELLBORES

(57) **Abrégé/Abstract:**

A method is provided for enhancing the shear stability of a high-viscosity fluid-water flow system, such as a core annular flow system. The method employs a family of demulsifier additives for maintaining separation of the fluids in biphasic flow. The additive family is sodium salts of polynuclear aromatic sulfonic acids. In one aspect, the high-viscosity fluid is heavy oil. A method of transporting heavy oil through a tubular body is also provided. The method includes pumping the heavy oil through the tubular body within an annular flow of water, and subjecting the water in the tubular body to a salt of a polynuclear, aromatic sulfonic acid additive so as to improve shear stability of the heavy oil and water.

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
21 February 2008 (21.02.2008)

PCT

(10) International Publication Number  
**WO 2008/020908 A3**

## (51) International Patent Classification:

*C09K 8/52* (2006.01)      *C09K 8/584* (2006.01)  
*C09K 8/54* (2006.01)      *E21B 21/14* (2006.01)

## (21) International Application Number:

PCT/US2007/013900

(22) International Filing Date: 14 June 2007 (14.06.2007)

(25) Filing Language: English

(26) Publication Language: English

## (30) Priority Data:

60/838,062      16 August 2006 (16.08.2006)      US

(71) Applicant (for all designated States except US): **EXXON-MOBIL UPSTREAM RESEARCH COMPANY** [US/US]; P.O. Box 2189, CORP-URC-SW337, Houston, TX 77252-2189 (US).

## (72) Inventors; and

(75) Inventors/Applicants (for US only): **VARADARAJ, Ramesh** [US/US]; 18 Aberdeen Circle, Flemington, NJ 08842 (US). **THOMAS, Eugene, R.** [US/US]; 6429 Rutgers, Houston, TX 77005 (US).

(74) Agents: **BROWN, Adam, P.** et al.; ExxonMobil Upstream Research Company, P.O. Box 2189, CORP-URC-SW337, Houston, TX 77252-2189 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Declarations under Rule 4.17:

- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))
- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))

## Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

4 September 2008

(54) Title: CORE ANNULAR FLOW OF HEAVY CRUDE OILS IN TRANSPORTATION PIPELINES AND PRODUCTION WELLBORES

(57) Abstract: A method is provided for enhancing the shear stability of a high-viscosity fluid-water flow system, such as a core annular flow system. The method employs a family of demulsifier additives for maintaining separation of the fluids in biphasic flow. The additive family is sodium salts of polynuclear aromatic sulfonic acids. In one aspect, the high-viscosity fluid is heavy oil. A method of transporting heavy oil through a tubular body is also provided. The method includes pumping the heavy oil through the tubular body within an annular flow of water, and subjecting the water in the tubular body to a salt of a polynuclear, aromatic sulfonic acid additive so as to improve shear stability of the heavy oil and water.

WO 2008/020908 A3

**CORE ANNULAR FLOW OF HEAVY CRUDE OILS IN  
TRANSPORTATION PIPELINES AND PRODUCTION WELLBORES**

**[0001]**

**BACKGROUND OF THE INVENTION**

**Field of the Invention**

**[0002]** The present invention relates to the field of fluid flow. More specifically, the present invention relates to the flow of viscous fluids in a fluid transportation system. An example is the flow of heavy crude oil in tubular transport bodies.

**Background of the Invention**

**[0003]** The production of heavy oil reserves is becoming increasingly useful to the petroleum industry. This is because the increasing value of oil reserves makes the production of heavier hydrocarbons more cost-effective. The cost of producing and then transporting heavy oil is greater than the costs for lighter oils because of its high viscosity. High fluid viscosity leads to increased friction within the fluid transportation system due to the shear stresses acting between the surfaces or walls of tubular members and the fluid being transported. This causes pressure drops in the fluid transportation system. In extreme situations, the viscous fluid being transported can stick to the walls of the tubular members, particularly at points of sharp flow direction change.

**[0004]** Most heavy oil and bitumen is transported by providing an additive to reduce the oil viscosity. The most common methods for reducing viscosity involve either blending the heavy oil with a low viscosity hydrocarbon diluent, or upgrading the heavy oil through early conversion and/or separation.

**[0005]** A known concept for reducing pressure drops for fluid transportation systems carrying heavy oil is to use core annular flow. The method involves forming

- 2 -

a biphasic flow system wherein a higher viscosity fluid is the "core," and a lower viscosity fluid is injected as a surrounding "annulus." The biphasic fluid is introduced into the fluid transportation system, such as a pipeline, and propagated through the length of the fluid transportation system. For heavy oil transport, the heavy oil is the core and water is the annulus.

**[0006]** Core annular flow of heavy oil has been tested; however, such core annular flows in fluid transportation systems have not been widely practiced. One obstacle is that conventional tubing and pipeline conduits have an affinity for adhesion of heavy oil. Several patents describe the reduction of friction within the pipeline flow regime. For instance, U.S. Pat. No. 3,520,313 discloses the use of so-called polymeric drag reducers. These polymeric drag reducers include polyacrylamides, polyalkylene oxides, polyvinyl acetates, and polyvinyl sulfonic acids. U.S. Pat. No. 3,977,469 discloses the placement of an oleophobic film-forming agent in the water phase. This oleophobic film-forming agent is an aqueous solution of a water-soluble salt selected from silicates, borates, carbonates, sulfates, phosphates and mixtures thereof. Further, U.S. Pat. No. 5,385,175 discloses the use of a conduit wherein the inner surface is substantially hydrophobic and oleophobic.

**[0007]** Also, various patents describe the use of hardware and flow systems for moving biphasic fluid. Examples include U.S. Pat. No. 3,502,103; U.S. Pat. No. 3,826,279; U.S. Pat. No. 3,886,972; and U.S. Pat. No. 3,977,469. These tools and systems are utilized to reduce contact between the oil and pipe walls, resulting in lower pressure drops and higher, more stable flow rates.

**[0008]** Fluid stabilizers have been added to core flow systems in an attempt to facilitate the movement of oil through the annular water regime. For instance, G.B. Pat. No. 159,533 describes the use of stabilizers, such as silicates ( $\text{Na}_2\text{SiO}_3$ ), phosphates, borates, and sulfates. U.S. Pat. No. 5,988,198 (the '198 patent) describes the use of colloidal silica and clay as part of a self-lubricating flow system. The '198 patent particularly provides a process for transporting de-aerated bitumen froth containing 20 to 40% by volume froth water. The froth water contains colloidal-size particles with amphiphilic properties, which are particles that are hydrophilic but readily

- 3 -

stick to the crude oil. The particles are carried through the pipeline to establish self-lubricated core-annular flow of the de-aerated bitumen froth. U.S. Pat. No. 3,892,252 discloses a method for increasing the flow capacity of a pipeline used to transport fluids by introducing a micellar system into the fluid flow. The micellar system comprises a surfactant, water and a hydrocarbon, and may be carried through fluids or a pig.

**[0009]** The economics of core annular flow have been further hindered by the large quantities of water utilized and the difficulties in maintaining the core annular flow regime under shear. In this respect, the shear forces acting at the water-heavy oil interface induce destabilization of the fluids. Therefore, a need exists for an improved core annular flow system. Further, a need exists for a core annular flow system wherein the shear-induced destabilization of the oil-water interface is reduced.

### SUMMARY OF THE INVENTION

**[0010]** A method is provided for enhancing the shear stability of a high-viscosity fluid-water flow system. The method employs a family of demulsifier additives used in maintaining separation of the fluids in the biphasic flow system. The additive family is sodium salts of polynuclear aromatic sulfonic acids, referred to sometimes as "PASS additives." In one aspect, the high-viscosity fluid is heavy oil. Preferably, the biphasic flow system is a core annular flow system.

**[0011]** The oil in the fluids may be any heavy oil, including heavy crude oil and bitumen. The oil may contain other materials such as stabilizing fine solids (including silica, clay, and/or BaSO<sub>4</sub>), as well as asphaltenes, naphthenic acid compounds, resins, and mixtures thereof. The water may be any aqueous solution, including brine.

**[0012]** Preferably, the additive is derived from the chemical formula:



where:

- "Ar" is a homonuclear or heteronuclear aromatic ring of at least 6 carbon atoms,
- "X" is selected from Group I and II elements of the long form of The Periodic Table of Elements, and

- 4 -

- "n" ranges from 1 to 10.

**[0013]** The salt may, for instance, be a sodium salt, a potassium salt, a calcium salt, or a magnesium salt. Preferably, the polynuclear, aromatic sulfonic acid contains no alkyl substituents.

**[0014]** The core annular flow system may be used, for example, in a pipeline for transporting hydrocarbons. Alternatively, the core annular flow system may be used in production tubing in a wellbore. Alternatively still, the core annular flow system may be used in a flowline as part of a gathering system.

**[0015]** Non-limiting examples of suitable PASS additives include:

- 1-naphthalene sulfonic acid;
- 2,6 naphthalene disulfonic acid;
- 1,5 naphthalene disulfonic acid;
- 1,3,6 naphthalene trisulfonic acid; and
- 1,3,6,8-pyrene tetrasulfonic acid.

**[0016]** The PASS additives may also be mixtures of two or more sodium salts of polynuclear, aromatic sulfonic acids.

**[0017]** A method of transporting heavy oil through a tubular body or member is also provided. In one aspect, the method includes placing a heavy oil in the tubular body, pumping the heavy oil through the tubular body within an annular flow of water, and subjecting the water in the tubular body to a salt of a polynuclear, aromatic sulfonic acid additive so as to improve shear stability of the heavy oil and water. The tubular body is preferably a pipeline for transporting the heavy oil.

**[0018]** The salt of a polynuclear, aromatic sulfonic acid may be a PASS additive, as described above. In one aspect, the PASS additive is mixed with water or a solvent as a delivery carrier. The solvent may be crude oil distillates boiling in the range of about 70° C (Celsius) to about 450° C, alcohols, ethers, or mixtures thereof. The

- 5 -

solvent may be present in an amount of from about 35% weight (wt.) to about 75% wt. in the additive.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

**[0019]** So that the manner in which the features of the present invention can be better understood, certain drawings, charts, micrographs and flow charts are appended hereto. It is to be noted, however, that the drawings illustrate only selected embodiments of the inventions and are therefore not to be considered limiting of scope, for the inventions may admit to other equally effective embodiments and applications.

**[0020]** Figure 1 is chemical structures of certain illustrative polyaromatic sulfonic acids with the sodium salts of these compounds being evaluated.

**[0021]** Figure 2 shows results of a thermogravimetric analysis (TGA) of certain of the sodium salts of the compounds of Figure 1.

**[0022]** Figure 3 is a Fourier Transform Infrared spectrum of 2,6-naphthalene disulfonic acid disodium salt, comparing thermal stability before and after TGA.

**[0023]** Figure 4 is an adsorption isotherm for 1,3,6-NTSS adsorption on Athabasca asphaltenes.

**[0024]** Figure 5 is a graph of shear stability of a water-bitumen mixture, wherein the percent of free water was plotted as a function of shear rate and three different bitumen samples were compared – a control with no additive, a bitumen sample treated with sodium silicate, and a bitumen sample treated with 1,3,6-NTSS.

**[0025]** Figure 6 is a graph of the effect of NTSS PASS additive concentration on free water in a bitumen sample.

**[0026]** Figure 7 is a bar graph comparing certain demulsifier additives, wherein samples treated with a PASS additive have a higher free water percentage than samples treated with previously known demulsifiers.

- 6 -

**[0027]** Figure 8 is a bar graph comparing certain PASS additives, wherein comparisons are made to determine percentages of free water in solution obtained. The 50/50 mixture of NMSS/NDSS PASS molecules produced a higher free water percentage than the 2-NMSS or 2,6-NDSS additives alone.

**[0028]** Figure 9 provides screen shots of comparative water droplet tests along with two micrographs comparing water droplet coalescence. One sample was an untreated oil, while the other was an oil treated with 1,3,6-NTSS PASS additive.

### **DETAILED DESCRIPTION OF CERTAIN EMBODIMENTS**

#### **Definitions**

**[0029]** As used herein, the term "biphasic flow system" refers to a fluid flow system for the transportation of two fluids having a different viscosity. In a preferred example, the two fluids are water and any hydrocarbon having a viscosity different than water. Such a system may be run through any tubular body or member, such as a pipe, including but not limited to production strings in a wellbore, transportation pipelines, or flow lines at a gathering station.

**[0030]** The term "core annular flow system" refers to a biphasic fluid flow system in which a high viscosity fluid, such as heavy oil is transported within an annulus of water.

**[0031]** The term "shear stability" means the ability to maintain a biphasic fluid flow system.

**[0032]** The term "polynuclear aromatic sulfonic acid" refers to any group of organic compounds having multiple aromatic rings and a sulfonic functional group.

**[0033]** The term "demulsification" means an action by a demulsifier to break emulsions. The term "demulsifier" refers to any surface active agent that acts to break emulsions or separate water from oil or cause water droplets to be attracted to one another.

- 7 -

**[0034]** The term "bitumen" means any naturally occurring, non-crystalline solid or viscous hydrocarbon material that is substantially soluble in carbon disulfide.

**[0035]** "Hydrocarbons" are organic material with molecular structures containing carbon and hydrogen. Hydrocarbons may also include other elements, such as, but not limited to, halogens, metallic elements, nitrogen, oxygen, and/or sulfur.

**[0036]** "Oil" means a fluid containing a mixture of condensable hydrocarbons.

**[0037]** The term "heavy oil" refers to viscous hydrocarbon fluids, having a viscosity generally greater than about 100 centipoise at ambient conditions (15° C and 1 atmospheric (atm) pressure). Heavy oil generally has American Petroleum Institute (API) gravity below about 20°, and most commonly about 10° to 20°. Heavy oil may include carbon and hydrogen, as well as smaller concentrations of sulfur, oxygen, and nitrogen. Heavy oil may also include aromatics or other complex ring hydrocarbons. For purposes of this disclosure, the term "heavy oil" includes bitumen and tar sands.

**[0038]** The term "wellbore" refers to a hole in a formation made by drilling or insertion of a conduit into the formation. A wellbore may have a substantially circular cross section, or other cross-sectional shapes (e.g., circles, ovals, squares, rectangles, triangles, slits, or other regular or irregular shapes). As used herein, the terms "well" and "opening," when referring to an opening in the formation may be used interchangeably with the term "wellbore."

**[0039]** The terms "production fluids" or "produced fluids" refer to fluids produced from a hydrocarbon-bearing formation. Such fluids may carry solid materials, and may include fluids and solids previously injected during drilling or well treatment. Such fluids may or may not contain organic acids such as asphaltenes.

**[0040]** "High viscosity fluid" means a fluid having a viscosity greater than about 100 centipoise at ambient conditions (15° C and 1 atm pressure).

- 8 -

**Description of Specific Embodiments**

**[0041]** A method is provided for enhancing the shear stability of a high-viscosity fluid – water biphasic flow system. As noted above, the term “biphasic flow system” refers to a fluid flow system for the transportation of water and any hydrocarbon having a viscosity different than water. Such a system may be run through any tubular body or member (e.g. pipe), including but not limited to a production string in a wellbore, a transportation pipeline, or a flow line at a gathering station.

**[0042]** Preferably, the biphasic flow system is a core annular flow system. As noted above, the term “core annular flow system” refers to a biphasic flow system in which a high viscosity fluid, such as heavy oil, is transported within an annulus of water.

**[0043]** The method employs a family of demulsifier additives used in maintaining separation of the fluids in the biphasic flow system. The additive family comprises sodium salts of polynuclear aromatic sulfonic acids. These may be referred to in shorthand as “PASS additives” or as “PASS compounds.” The PASS additives are used to provide improved core annular flow of heavy crude oil. More specifically, the PASS additives enhance the shear stability of a heavy oil – water interface in a core annular system.

**[0044]** The aqueous phase of the flow system comprises water. The water may constitute “brine,” and may include dissolved inorganic salts of chloride, sulfates and carbonates of Group I and II elements of the long form of The Periodic Table of Elements. Organic salts can also be present in the aqueous phase. However, it is preferred that fresh water be used.

**[0045]** It is preferred that the PASS additives have the structure:



wherein:

- “Ar” is a homonuclear or heteronuclear aromatic ring of at least 6 carbon atoms,

- 9 -

- "X" is selected from the group consisting of Group I or Group II of the long form of The Periodic Table of Elements; and
- "n" ranges from 1 to 10.

**[0046]** Preferably, the "X" element is sodium, potassium, calcium or magnesium.

**[0047]** **Figure 1** presents a series of chemical structures for different molecules. Each molecule represents an illustrative aromatic sulfonic acid. The aromatic compounds demonstrated in **Figure 1** are:

- 1-naphthalene sulfonic acid (1-NSS) **12**,
- 2,6-naphthalene disulfonic acid (2,6-NDSS) **14**,
- 1,5-naphthalene disulfonic acid (1,5-NDSS) **16**,
- 1,3,6-naphthalene trisulfonic acid (1,3,6-NTSS) **18**, and
- 1,3,6,8-pyrene tetra sulfonic acid (1,3,6,8-PTSS) **20**.

**[0048]** It is understood that the numerical listings before the compounds indicates the position of the substituent on the aromatic rings. However, other positions on the rings may be suitable. Thus, the above listing is merely illustrative.

**[0049]** Polynuclear aromatic sulfonic acid compounds such as those of **Figure 1** are available from Aldrich Chemical Company, Inc. of Milwaukee, Wisconsin. They are available as sodium salts of the aromatic sulfonic acids. Sodium salts of the polynuclear aromatic sulfonic acids, such as those shown in **Figure 1**, exhibit a surprising and unique combination of properties that render them effective for heavy oil – water core annular system stabilization.

**[0050]** Applicant has conducted tests to confirm the suitability of sodium salts of the polynuclear aromatic sulfonic acid compounds as a demulsifying agent in the oil industry. In the demulsification of crude oil and water, certain characteristics of demulsifiers are desirable. For instance, demulsifiers should be water soluble. Demulsifiers should also be thermally stable to temperatures over 100° C, and preferably up to even 500° C. Also, a demulsifier should not decrease the interfacial

- 10 -

tension between heavy oil and water. These characteristics are also beneficial for enhancing the shear stability of a heavy oil – water core annular system.

**[0051]** Properties of certain sodium salts of the polynuclear aromatic sulfonic acids are discussed herein. **Figure 2** demonstrates a Thermogravimetric Analyses (TGA) test for sodium salts of four PASS additives. The four PASS compounds are:

- 2,6- naphthalene disulfonic acid sodium salt (denoted at **22**),
- 2- naphthalene sulfonic acid sodium salt (denoted at **24**),
- 1,3,6- naphthalene trisulfonic acid sodium salt hydrate (denoted at **26**), and
- 1,5- naphthalene disulfonic acid sodium salt hydrate (denoted at **28**).

**[0052]** Chemical structures for the four PASS molecules **22**, **24**, **26**, **28** are shown at the top of **Figure 2** and denoted as **22A**, **24A**, **26A**, and **28A** respectively.

**[0053]** The thermogravimetric analysis (TGA) chart of **Figure 2** provides a plot of temperature **20** (measured in degrees Celsius) on the x-axis, versus percent (by weight) of solution **21** on the y-axis. It is shown that as temperature increases **20**, the weight percent **21** drops, but by less than 10% in each case. Therefore, it is demonstrated that the PASS compounds are thermally stable. Indeed, the PASS compounds were thermally stable even up to 450° C.

**[0054]** **Figure 3** demonstrates another test conducted on a PASS compound. A Fourier Transform Infrared (FTIR) spectrum was performed on the PASS additive 2,6-naphthalene sulfonic acid disodium salt (2,6-NDSS). Separate FTIR tests were performed before and after TGA. Thus, two different spectra are presented. The spectra are plotted on a graph of peak intensity on the y-axis **30** and Emission/Wavenumber (measured in  $\text{cm}^{-1}$ ) on the x-axis **31**. The spectrum before addition of the PASS additive is shown at **32**, while the spectrum after addition of the PASS additive is shown at **34**.

**[0055]** It can be seen from **Figure 3** that the two spectra **32**, **34** have very similar fingerprints. Except for the loss of water of hydration **36**, no change is observed in

- 11 -

the FTIR spectrum 32. This indicates that the additives are thermally stable and fail to degrade upon heating up to 500° C. This also shows that the PASS compounds are water soluble.

**[0056]** Next, an interfacial tension, or IFT, test was conducted. A tensiometer was used in connection with a Pendant Drop method to test heavy oil – water interfacial tension. Two different fluids were tested. The table below lists the measured oil – water interfacial tension of an untreated Athabasca bitumen versus an Athabasca bitumen treated with 1-wt% (weight percent) solution of the sodium salt of naphthalene trisulfonic acid (1,3,6-NTSS). Testing was done for both fluids at 70°C.

<u>Interface</u>	<u>IFT @ 70°C</u> (dynes/cm)
<b>Athabasca Bitumen / Water</b>	<b>1.5 to 2.0</b>
<b>Athabasca Bitumen / Water + 1% 1,3,6-NTSS</b>	<b>1.5 to 2.0</b>

**[0057]** It can be seen that no decrease in interfacial tension between the heavy oil and water is observed. In this respect, the IFT of each fluid was 1.5 to 2.0 dynes/centimeter (cm). This confirms that the PASS compounds do not exhibit a tendency to emulsify water into heavy oil. This is a desirable characteristic for a heavy oil demulsifier.

**[0058]** Another attribute of PASS molecules identified herein is strong adsorption onto the surface of heavy oil asphaltenes. To test this characteristic, asphaltenes were separated from Athabasca bitumen by the standard separation process of solvent de-asphalting with n-heptane. The separated asphaltenes were used as the adsorbent and 1,3,6-NTSS was used as the adsorbate. The following adsorption experiment was then conducted, as described below.

- 12 -

**[0059]** Seven solutions of 1,3,6-NTSS in the concentration range of  $10^{-4}$  to  $10^{-3}$  moles/liter were prepared. To 0.5 grams of powdered asphaltenes was added 5 milliliters (ml) of the aqueous adsorbate solution. Each mixture was shaken on a wrist shaker for 30 minutes. After mixing, the concentration of 1,3,6-NTSS in the water phase was determined by UV-Visible absorption spectroscopy. An adsorption isotherm was generated.

**[0060]** Figure 4 provides an adsorption isotherm for NTSS adsorption on Athabasca asphaltenes. A Cartesian coordinate plotting NTSS solution concentration 40 (measured in moles) against NTSS particles adsorbed 41 (also measured in moles) is presented. It can be seen from Figure 4 that as the concentration 40 of the PASS compound increases, the adsorption 41 also increases in linear relation 42. Specifically, an adsorption equilibrium constant of 0.85 was measured. This value indicates strong adsorption of the 1,3,6-NTSS to heavy oil asphaltenes.

**[0061]** Next, testing was conducted to determine whether the PASS molecules alter the wetting character of heavy oil. Effective wetting of heavy oil without a reduction in heavy oil–water interfacial tension is desirable for an effective demulsifier of heavy oils. To make this determination, a contact angle wetting experiment was performed.

**[0062]** First, untreated Athabasca bitumen was coated on a glass slide. A water droplet was then placed onto the coated slide. The contact angle between oil and water was measured. A contact angle to water was measured as  $130^{\circ}$ . This indicates that the surface of bitumen is hydrophobic.

**[0063]** Next the Athabasca bitumen was treated with 1,3,6-NTSS. 5.0 g (acceleration due to gravity) of bitumen was mixed with 1 ml of a 0.1% NTSS solution at  $70^{\circ}$  C. The mixture was heated to  $100^{\circ}$  C to evaporate off the water. The treated Athabasca bitumen was then coated on a separate glass slide. A contact angle to water of  $0^{\circ}$  was observed. Thus, the PASS molecule altered the wetting character of heavy oil. The contact angle experiment confirms the excellent wetting property of the PASS compounds.

- 13 -

**[0064]** The experiments described above demonstrate that PASS molecules possess the fundamental properties necessary to provide stability to a heavy oil – water core annular flow system. The amount of additive to be used for treatment in a flow regime ranges from about 0.001% wt. to about 5.0% wt. based combined amount of oil and water in the flow system. In one aspect, the PASS additive is provided at a range of about 10 parts per million (ppm) to about 2,000 ppm. Preferably, the PASS additives are present in the emulsion at about 100 ppm to about 1,000 ppm.

**[0065]** When injecting a PASS additive into a biphasic flow system, a delivery solvent may optionally be employed. Such solvents may include crude oil distillates boiling in the range of about 70° C to about 450° C, alcohols, ethers and mixtures thereof. The delivery solvent is present in an amount of from about 35% wt. to about 75% wt. in the additive. When utilized, the delivery solvent may be included in the about 0.001% wt. to about 5.0% wt. demulsifier added to the emulsion.

### **EXPERIMENTAL**

**[0066]** Laboratory experiments were conducted to demonstrate shear induced stability for Bitumen-Water biphasic systems stabilized with PASS molecules.

#### **Example 1: 1,3,6-NTSS as an Additive**

**[0067]** In Example 1, demulsification tests were conducted on an Athabasca bitumen. Three samples were prepared. In one sample, the bitumen was left untreated; in a second sample the bitumen was treated with sodium silicate; and in a third sample, the bitumen was treated with the PASS additive 1,3,6-NTSS. Sodium silicate was chosen for the comparative second sample because it has been used commercially as an additive for core annular flow of heavy oil.

**[0068]** To prepare the three samples, 9 grams of hot (80° C) froth Athabasca bitumen was added to 1 ml of water (with or without stabilizer). The mixtures were allowed to contact for 5 minutes and cool to 25° C. Each mixture was then sheared using a Silverson mixer for 5 minutes at 25° C over a shear rate range of 650 to 4,000

- 14 -

reciprocal seconds ( $s^{-1}$ ). After completion of mixing, the free water that remained in the jar as phase-separated liquid was removed using a pipette, and measured.

**[0069]** **Figure 5** provides a graph of shear stability of a bitumen - water interface. On the x-axis, shear rate **50** is charted from 0 to 5,000  $s^{-1}$ . On the y-axis, the percent of free water **51** is provided. Three separate lines are demonstrated, representing:

- No additive (untreated bitumen) as a “control” (denoted as **52**);
- 0.1 wt. % sodium silicate additive - treated bitumen (denoted as **54**); and
- 0.1 wt. % 1,3,6-NTSS additive - treated bitumen (denoted as **56**).

**[0070]** It can be first seen from **Figure 5** that the control sample is represented by line **52**. The control sample had the lowest relative percentage of free water **51**. The control **52** had an initial free water concentration of 30%. As the shear rate was increased, substantial emulsion was generated at about 1,960  $s^{-1}$ .

**[0071]** Next, the sodium silicate - treated sample is illustrated by line **54**. The sodium silicate - treated solution experienced an initial free water amount of 60%. This was at the lowest shear rate **50** of 650  $s^{-1}$ . As shear rate **50** increased, the sodium silicate - treated Bitumen emulsified at about 3,200  $s^{-1}$ .

**[0072]** Finally, the 1,3,6-NTSS - treated Bitumen sample maintained the highest water separation. This is represented by line **56**. The initial free water was about 90% at the 650  $s^{-1}$  shear rate, and reached a substantial emulsion at a shear rate **50** of about 3,200  $s^{-1}$ . It can be observed that the 1,3,6-NTSS additive exhibited superior performance to both the solution with no additive and the solution with sodium silicate as a demulsifying additive.

### **Example 2: 1,3,6-NTSS With Additive Concentration Varied**

**[0073]** In another experiment, the concentration of the 1,3,6-NTSS PASS additive was varied in an oil - water mixture. The free water retention after 1,960  $s^{-1}$  shearing for 5 minutes was determined. The results are shown in **Figure 6**.

- 15 -

**[0074]** In **Figure 6**, NTSS concentration **60** is provided along the x-axis in weight percent of the solution. The NTSS concentration **60** is measured against the percentage of free water **61** in the solution. It can be seen that the percentage of free water **61** in solution peaks at approximately 62 % when the NTSS concentration **60** is at about 0.06 weight percent. After the NTSS concentration **60** increases to about 0.06 weight percent, the percentage of free water **61** begins to decline. It is thus concluded that a wt. % of 0.5 to 0.6 of the additive provides maximum stabilization. Stated another way, a lower additive treat rate provides the best separation results. This is a cost benefit to the use of the PASS additive.

**Example 3: Comparison of PASS Additives With Known Additives**

**[0075]** Another experiment was conducted to evaluate the uniqueness and novelty of the PASS type chemical structures. To conduct the experiment, a base mixture of froth treated Athabasca bitumen was provided. The mixture was further mixed with distilled water. The ratio was about 90% wt. water and about 10% wt. oil. The mixture was tested at 25° C.

**[0076]** Five different Athabasca bitumen solutions were prepared in this manner and tested. One sample was left untreated, while the other four were treated with a demulsifying agent. The concentration for each additive was 0.0002 mol. %. After the samples were prepared, a shear rate of  $1,960 \text{ s}^{-1}$  was applied at 300 rpm. This shear rate is considered severe compared to actual field conditions that are experienced. The percent of free water **71** remaining was then analyzed, with the results shown in **Figure 7**.

**[0077]** Bars are shown in **Figure 7** for the following water / bitumen samples:

- No additive (denoted as **70**);
- Toluene mono sodium salt additive (denoted as **72**);
- C<sub>12</sub> Benzene sodium salt additive (denoted as **74**);
- Sodium salt of naphthalene trisulfonic acid (denoted as **76**); and
- Sodium salt of pyrene tetra sulfonic acid (denoted as **78**).

- 16 -

**[0078]** It can be seen from **Figure 7** that the PASS-type additives **76, 78** provided substantially greater percentages of free water than either the control **70** or the other additives **72, 74**. The PASS family of molecules, i.e., the salts of naphthalene and pyrene sulfonic acid **76, 78**, were superior performers compared to the toluene **72** and the alkyl benzene **74** counterparts. In this respect, the percent of free water **71** remained higher for the PASS family of molecules **76** and **78**.

**Example 4: Comparison of PASS Additives With a Mixture of PASS Additives**

**[0079]** In yet another experiment, the performance of selected PASS molecules was compared. **Figure 8** provides a bar graph comparing the selected PASS-type molecules.

**[0080]** To conduct the experiment, a base mixture of froth treated Athabasca bitumen was again provided. The mixture was further mixed with distilled water. The ratio was about 90% wt. water and about 10% wt. oil. The mixture was tested at 25° C.

**[0081]** Several PASS molecules were added to the oil/water samples. The concentration for each additive was 0.00022 mol. %. In **Figure 8**, bars for the following additives are shown:

- No additive (denoted as **80**);
- Sodium salt of 2-naphthalene monosulfonic acid (2-NMSS) (denoted as **82**);
- Sodium salt of 2,6-naphthalene disulphonic acid (2,6-NDSS) (denoted as **84**);  
and
- 50/50 mixture of 2-NMSS and 2,6-NDSS (denoted as **86**).

**[0082]** It can be seen that the 50/50 mixture of NMSS / NDSS **86** provided an enhanced performance than either the sodium salt of 2-naphthalene monosulfonic acid **82** or the sodium salt of 2,6-naphthalene disulphonic acid **84** alone. The NMSS / NDSS mixture **86** generated a free water percentage **81** of approximately 65%. Thus, it is observed that mixtures of PASS molecules provide opportunities for performance enhancement.

**Example 5: Water Droplet Test**

**[0083]** Still another experiment provides a water droplet test conducted on an oil water mixture. The oil was subjected to particle size analyses to detect the dispersed water droplets using the LASENTEC® particle video monitoring (PVM) and focused beam laser reflection (FBR) methods. The results of the experiment are demonstrated in **Figure 9**.

**[0084]** First, **Figure 9** provides droplet size distribution charts **90**, **92** in which water droplet size (in microns) in an untreated oil **90** is compared to water droplet size of an oil treated with 1,3,6-NTSS PASS additive **92**. Each sample was sheared at a rate of  $1,960 \text{ s}^{-1}$ . It is seen in the second chart **92** that the NTSS additive not only maintained the core annular system stability during shearing, but additionally, whatever water was emulsified at  $1,960 \text{ s}^{-1}$  shear is emulsified as relatively larger droplets.

**[0085]** Second, two micrographs **94**, **96** are also provided in **Figure 9**. The top micrograph **94** shows untreated oil, and the bottom micrograph **96** shows the PASS additive treated oil. It is observed in the second micrograph **96** that water droplets **95** in the treated oil were flocculated in contrast to the well dispersed water droplets **95'** in the no-additive case shown in micrograph **94**.

**[0086]** Shear-induced destabilization of a heavy oil - water core annular system presents a technical barrier to the movement of heavy oils. However, the observed results presented herein demonstrate that PASS molecules provide an effective additive to stabilize a heavy oil - water core annular system. The scope of the claims should not be limited by particular embodiments set forth herein, but should be construed in a manner consistent with the specification as a whole.

**CLAIMS:**

1. A method for enhancing the shear stability of a high-viscosity fluid-water biphasic flow system, comprising:

injecting an additive into the biphasic flow system, the additive comprising a salt of a polynuclear aromatic sulfonic acid, wherein the additive has the structure:



wherein:

“Ar” is a homonuclear or heteronuclear aromatic ring of at least 6 carbon atoms,

“X” is selected from Group I and II elements of the long form of The Periodic Table of Elements, and

“n” ranges from 1 to 10,

wherein the biphasic flow system is a core annular flow system, and wherein the core annular flow system is a pipeline for transporting hydrocarbons, a production tubing in a wellbore or a flowline in a gathering system for hydrocarbons.

2. The method of claim 1, wherein the high-viscosity fluid comprises heavy oil.
3. The method of claim 2, wherein the heavy oil is bitumen.
4. The method of claim 1, wherein “X” is selected from the group of elements consisting of sodium, potassium, calcium and magnesium.
5. The method of claim 1, wherein the salt is a sodium salt.
6. The method of claim 1, wherein the salt is one of a sodium salt, a potassium salt, a calcium salt and a magnesium salt.

7. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is a polynuclear aromatic group that contains no alkyl substituents.
8. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is 1-naphthalene sulfonic acid.
9. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is 2,6-naphthalene disulfonic acid.
10. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is 1,5-naphthalene disulfonic acid.
11. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is 1,3,6-naphthalene trisulfonic acid.
12. The method of claim 1, wherein the polynuclear aromatic sulfonic acid additive is 1,3,6,8-pyrene tetrasulfonic acid.
13. The method of claim 1, wherein the additive is a mixture of two or more sodium salts of polynuclear aromatic sulfonic acids.
14. The method of claim 1, wherein the amount of additive present in the biphasic flow system is from about 0.001% weight (wt.) to about 5.0% wt. based on the combined amount of oil and water in the flow system.
15. The method of claim 1, wherein the amount of additive present in the flow system is from about 10 parts per million (ppm) to 2,000 ppm.

- 20 -

16. A method of transporting heavy oil through a tubular body, comprising:  
placing a heavy oil in a tubular body that is a pipeline for transporting the heavy oil, a production tubing in a wellbore or a flowline in a gathering system for hydrocarbons;  
pumping the heavy oil through the tubular body within an annular flow of water;  
subjecting the water in the tubular body to a salt of a polynuclear aromatic sulfonic acid additive so as to improve shear stability of the heavy oil and water,  
wherein the additive has the structure:



wherein:

“Ar” is a homonuclear or heteronuclear aromatic ring of at least 6 carbon atoms,

“X” is selected from Group I and II elements of the long form of The Periodic Table of Elements, and

“n” ranges from 1 to 10.

17. The method of claim 16, wherein “X” is selected from the group of elements consisting of sodium, potassium, calcium and magnesium.
18. The method of claim 16, wherein the salt is one of a sodium salt, a potassium salt, a calcium salt and a magnesium salt.
19. The method of claim 18, wherein the polynuclear aromatic sulfonic acid additive is a polynuclear aromatic group that contains no alkyl substituents.
20. The method of claim 16, wherein the polynuclear aromatic sulfonic acid additive is 1-naphthalene sulfonic acid.

21. The method of claim 16, wherein the polynuclear aromatic sulfonic acid additive is 2,6 naphthalene disulfonic acid.
22. The method of claim 16, wherein the polynuclear aromatic sulfonic acid additive is 1,5-naphthalene disulfonic acid.
23. The method of claim 16, wherein the polynuclear aromatic sulfonic acid additive is 1,3,6-naphthalene trisulfonic acid.
24. The method of claim 16, wherein the polynuclear aromatic sulfonic acid additive is 1,3,6,8-pyrene tetrasulfonic acid.
25. The method of claim 16, wherein the additive is a mixture of two or more sodium salts of polynuclear aromatic sulfonic acids.
26. The method of claim 16, wherein the additive is mixed with a solvent as a delivery carrier.
27. The method of claim 26, wherein the solvent is one of crude oil distillates boiling in the range of about 70° C to about 450° C, alcohols, ethers, and any mixtures thereof.
28. The method of claim 26, wherein the delivery solvent is present in an amount of from about 35% weight (wt.) to about 75% wt. in the additive.
29. The method of claim 16, wherein the additive is mixed with water as a delivery carrier.

1/5

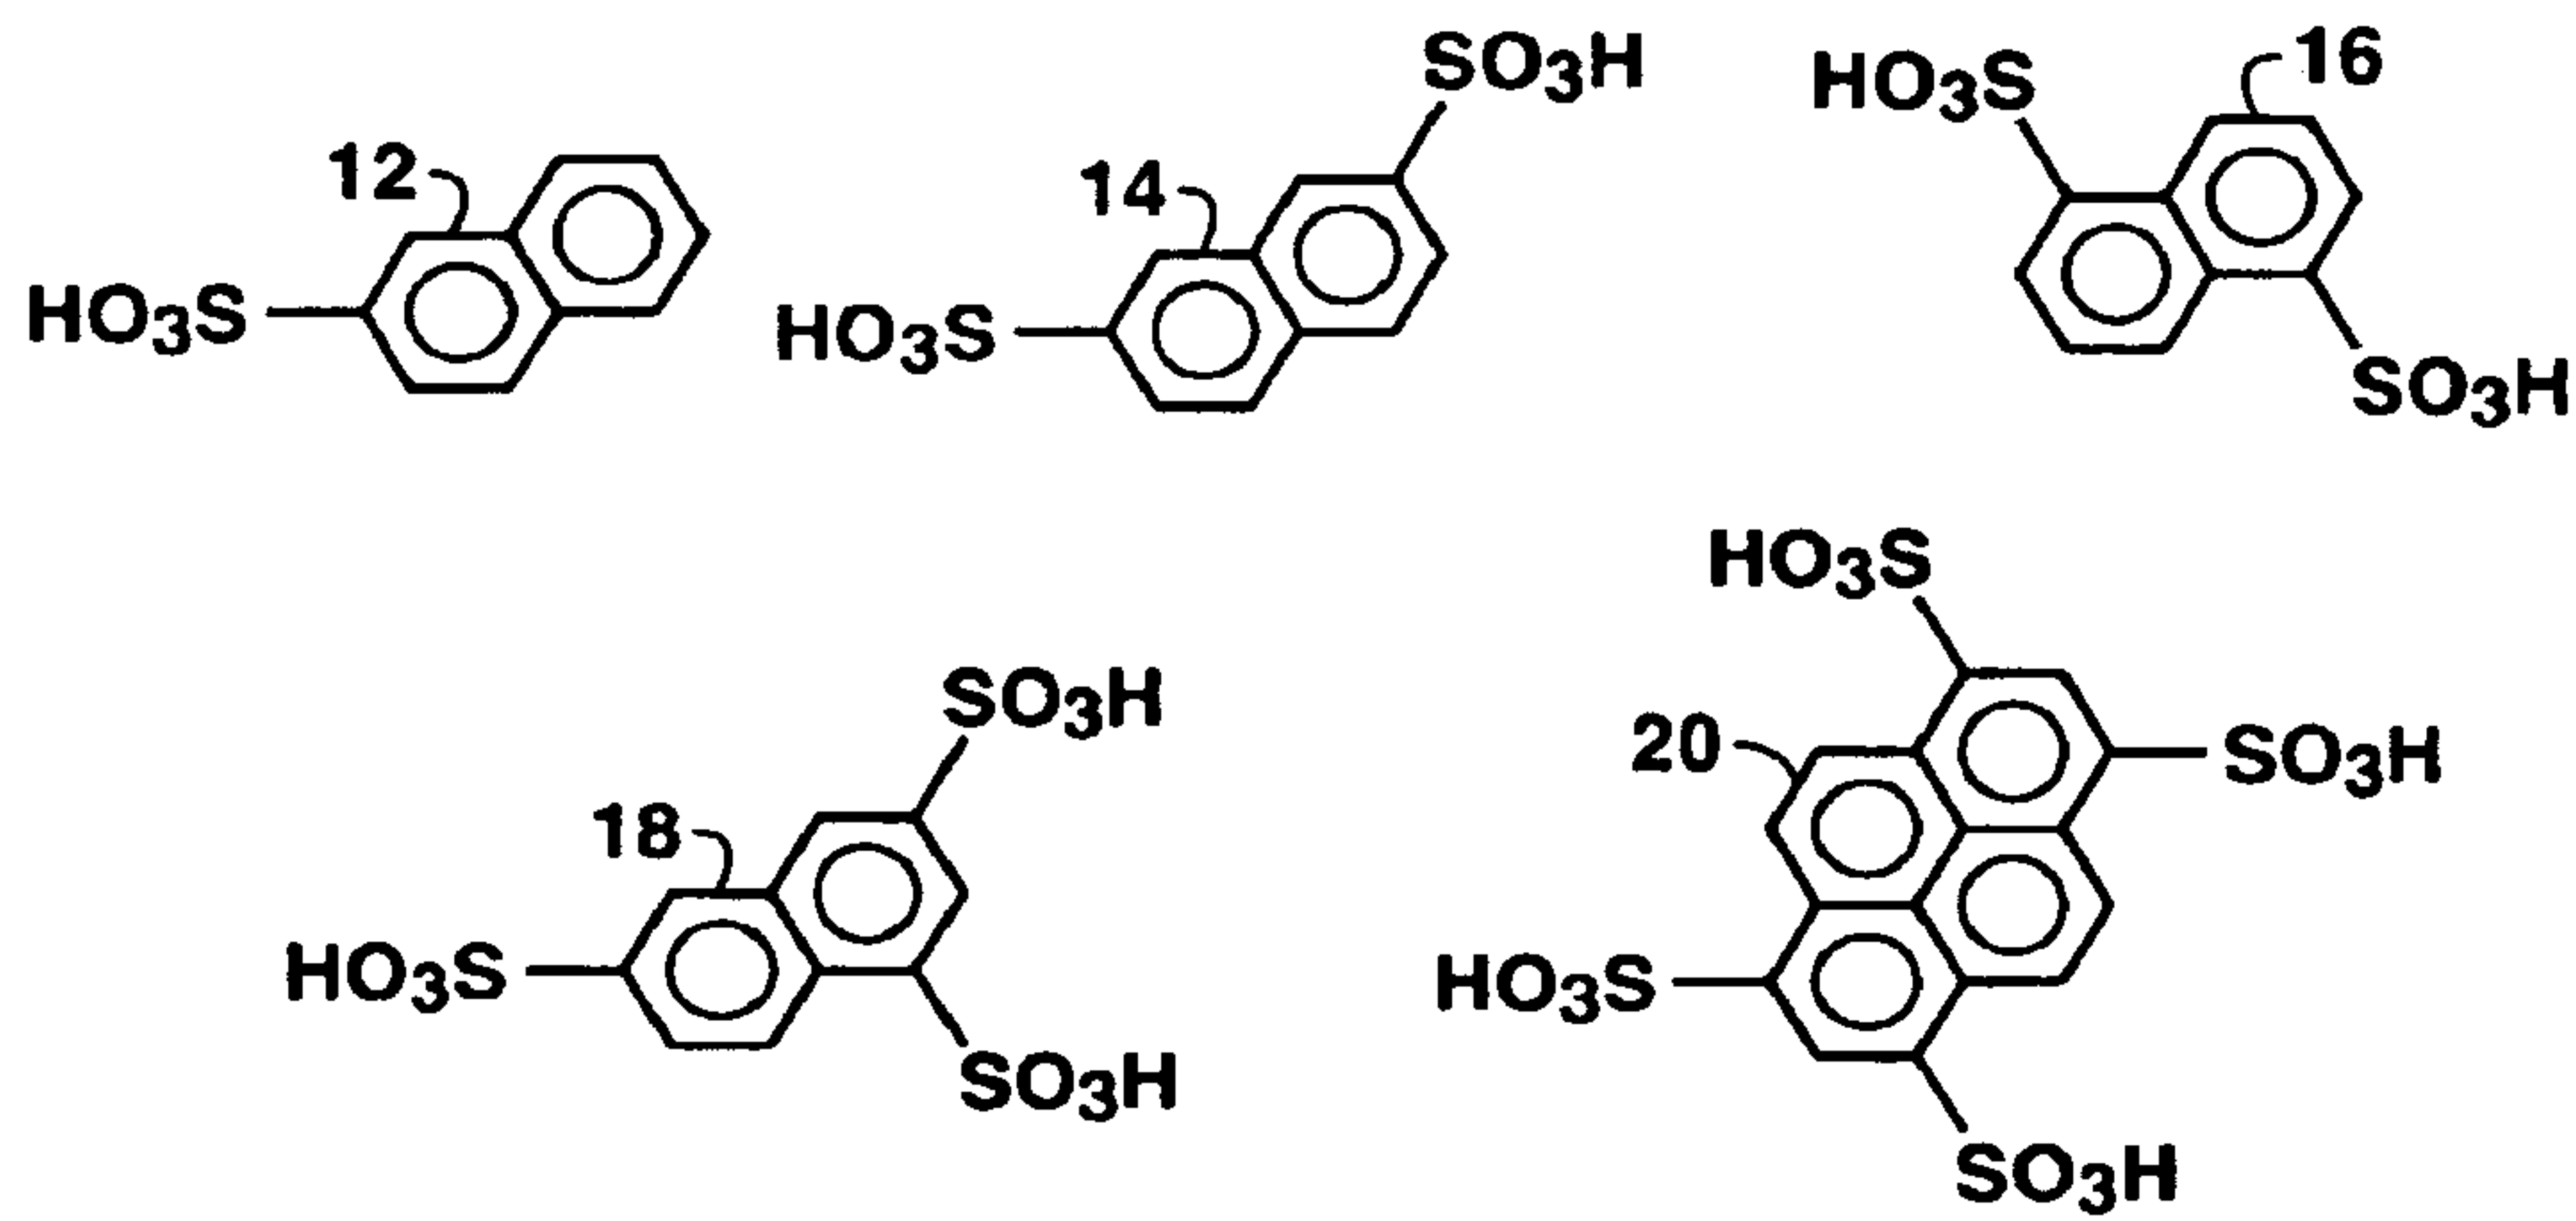


FIG. 1

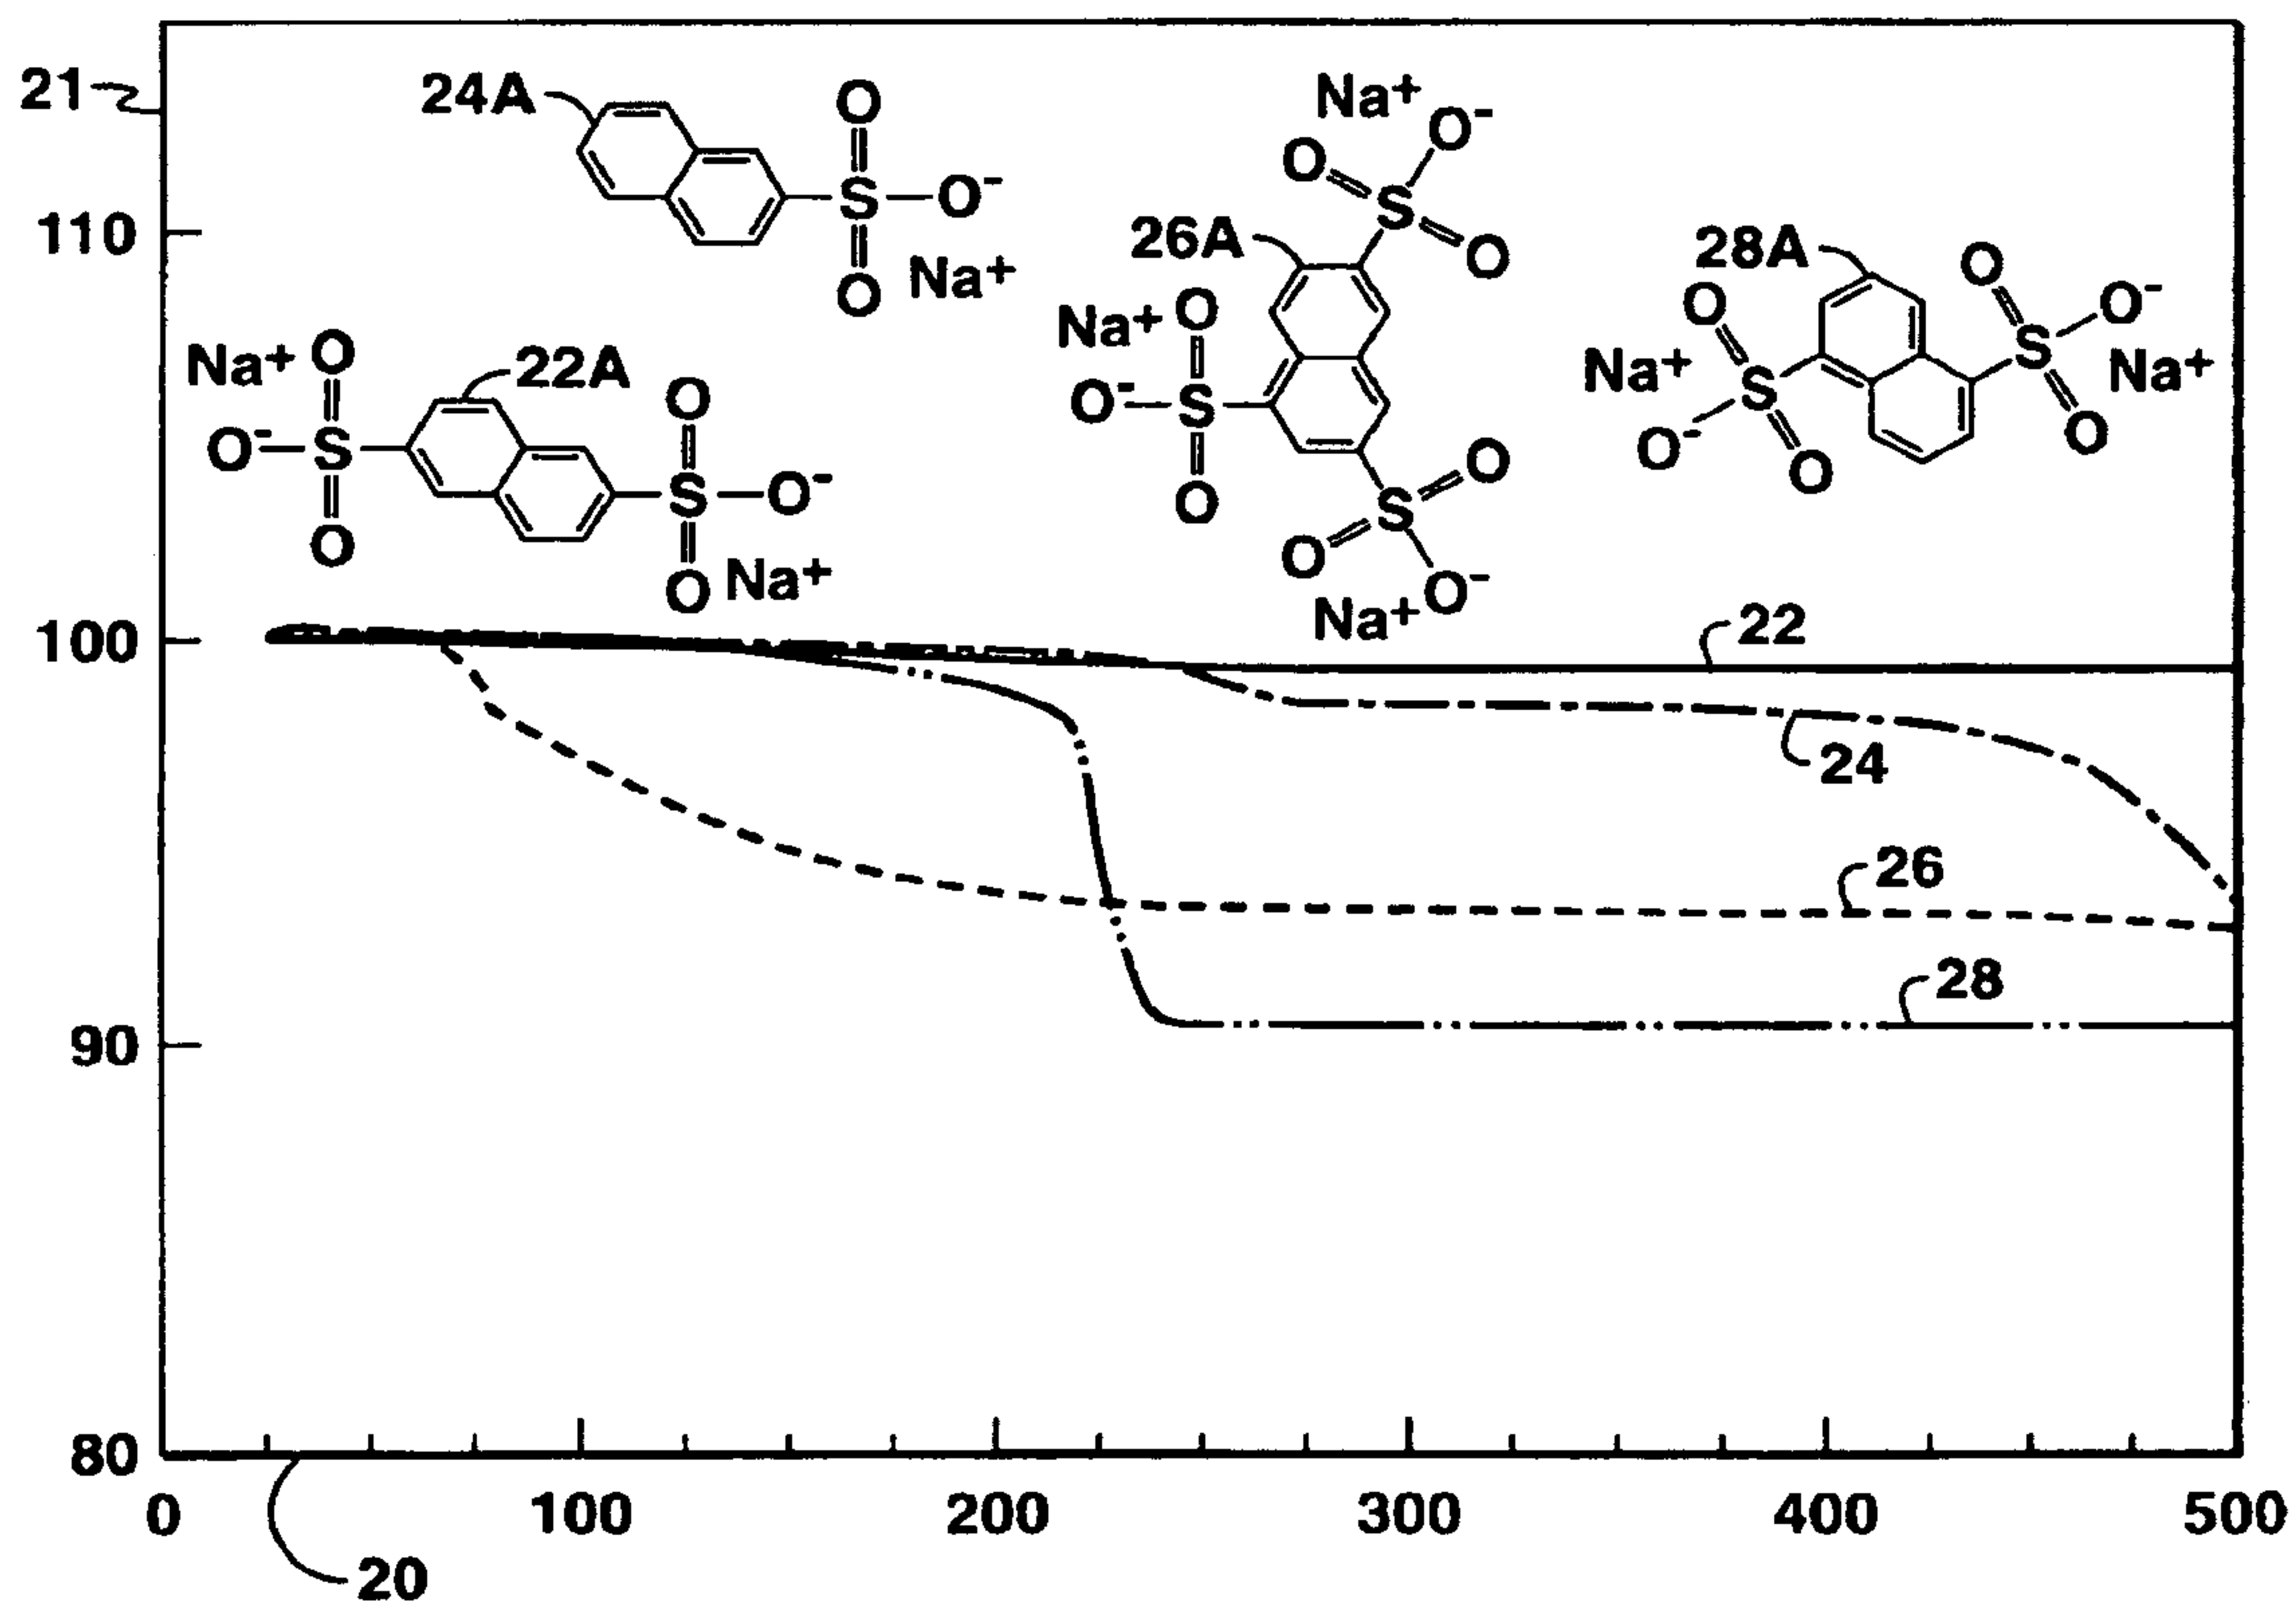


FIG. 2

2/5

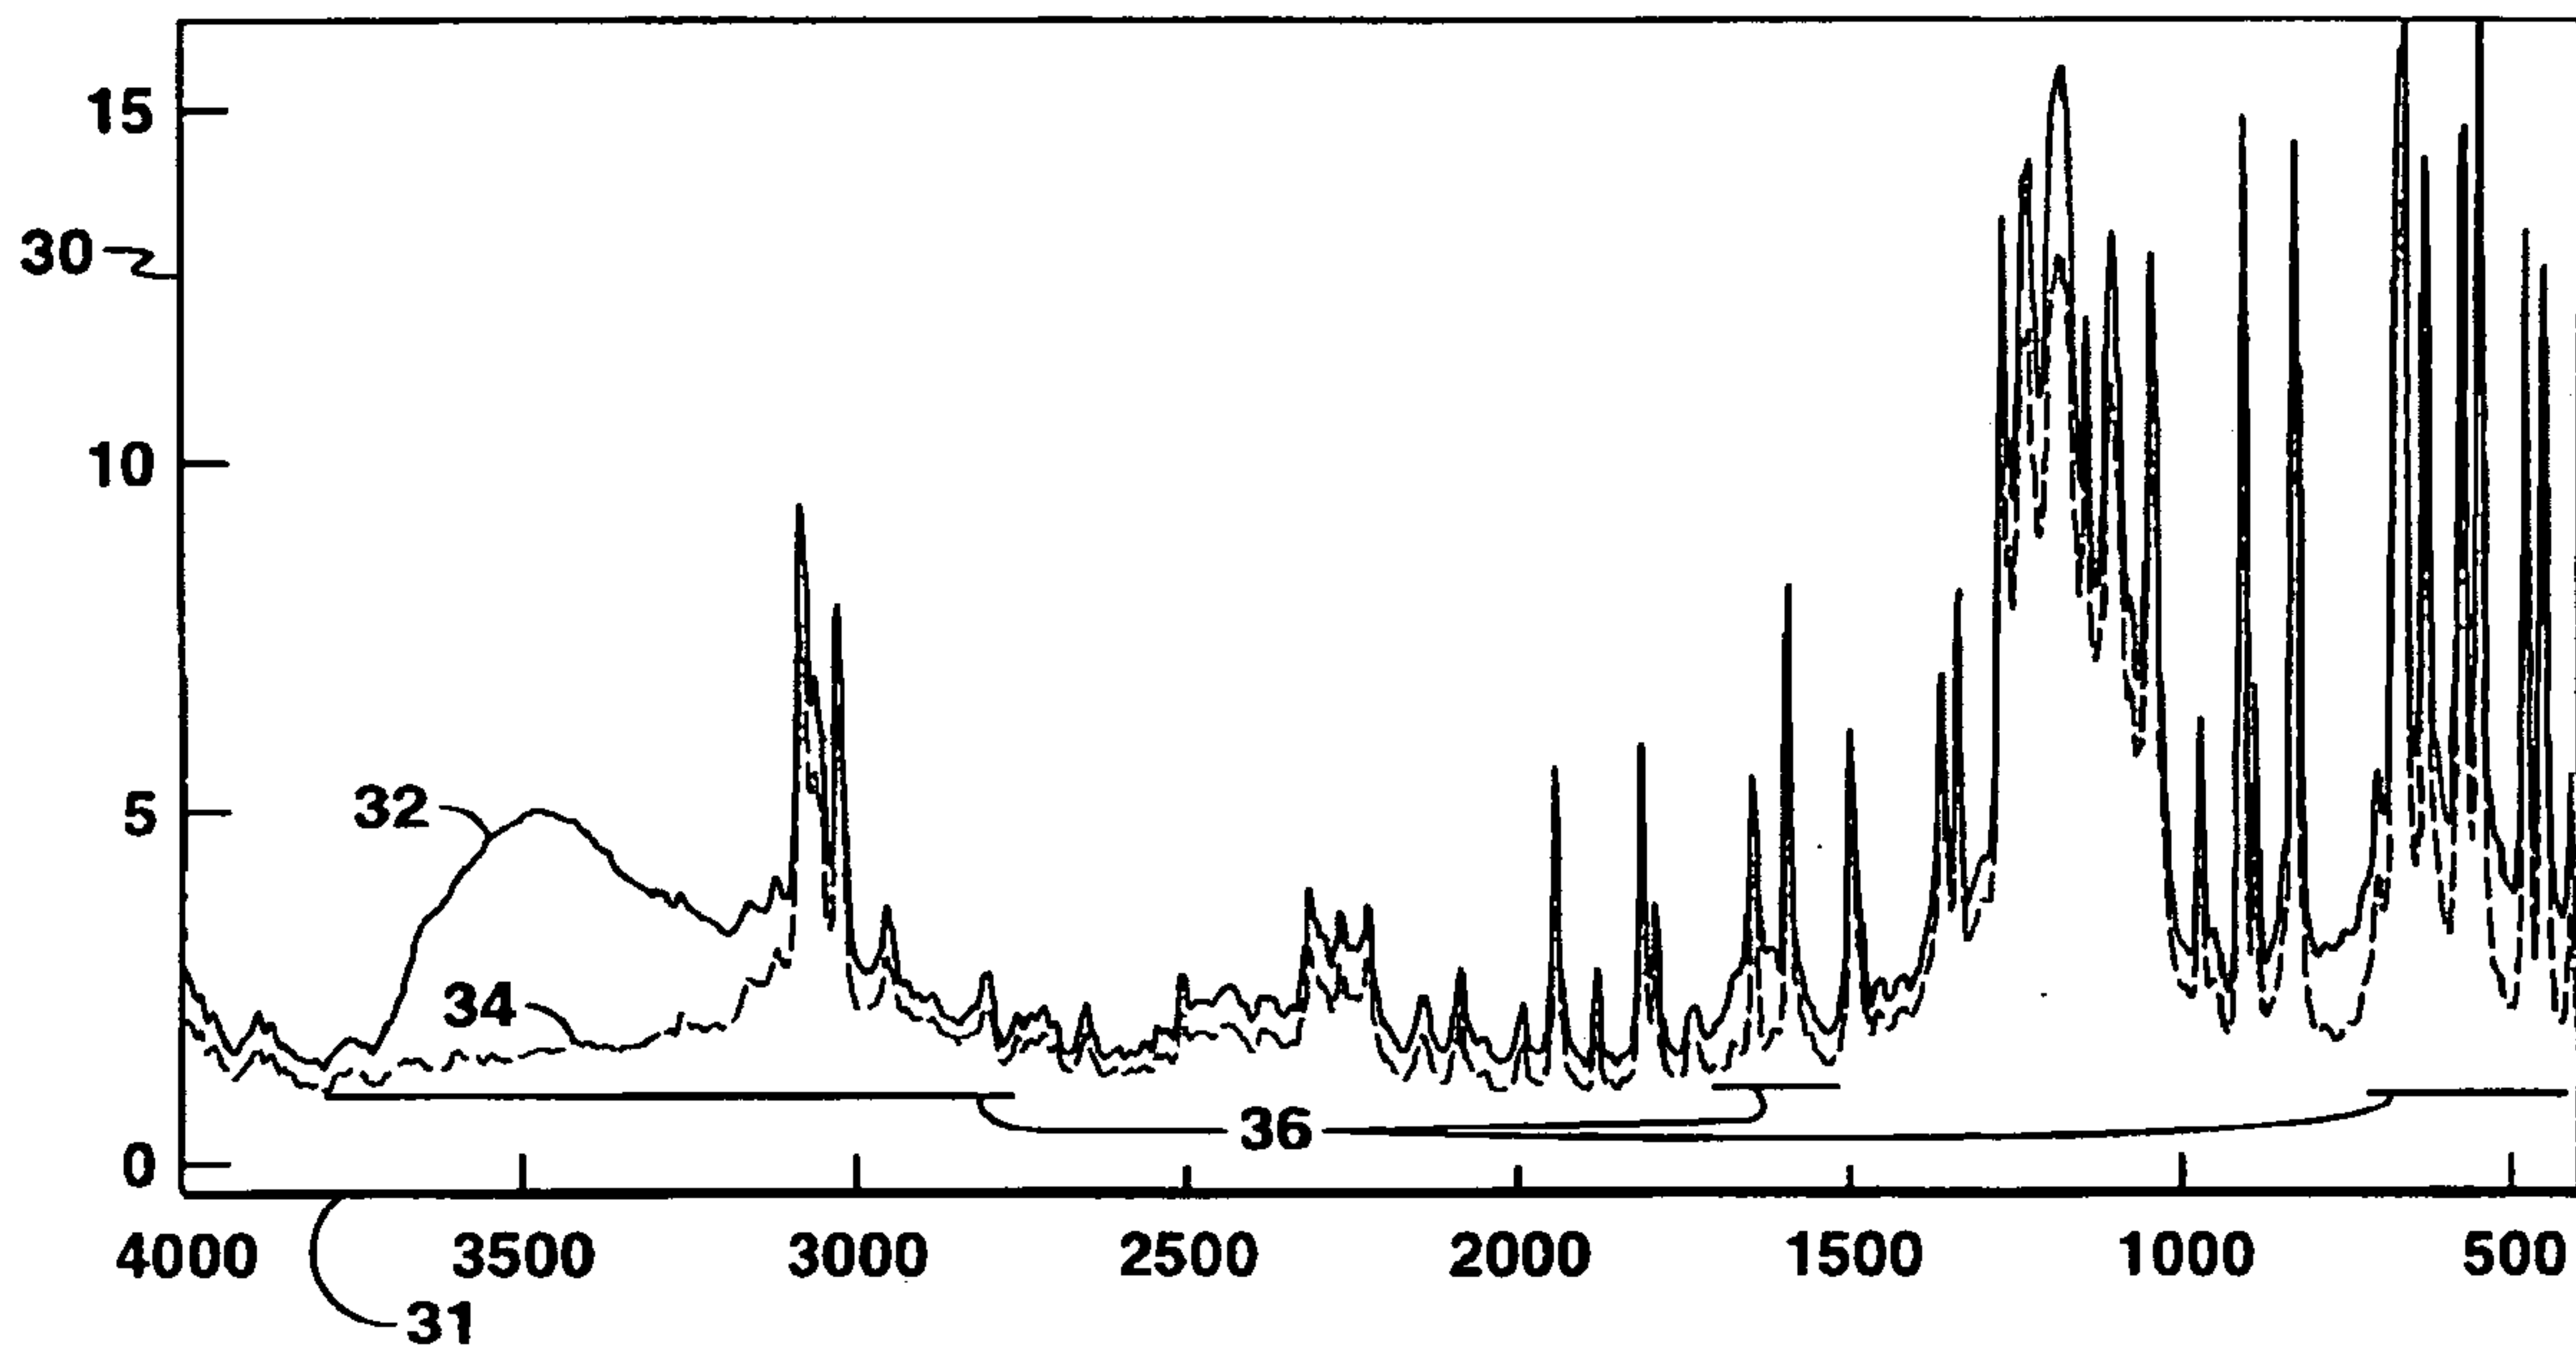


FIG. 3

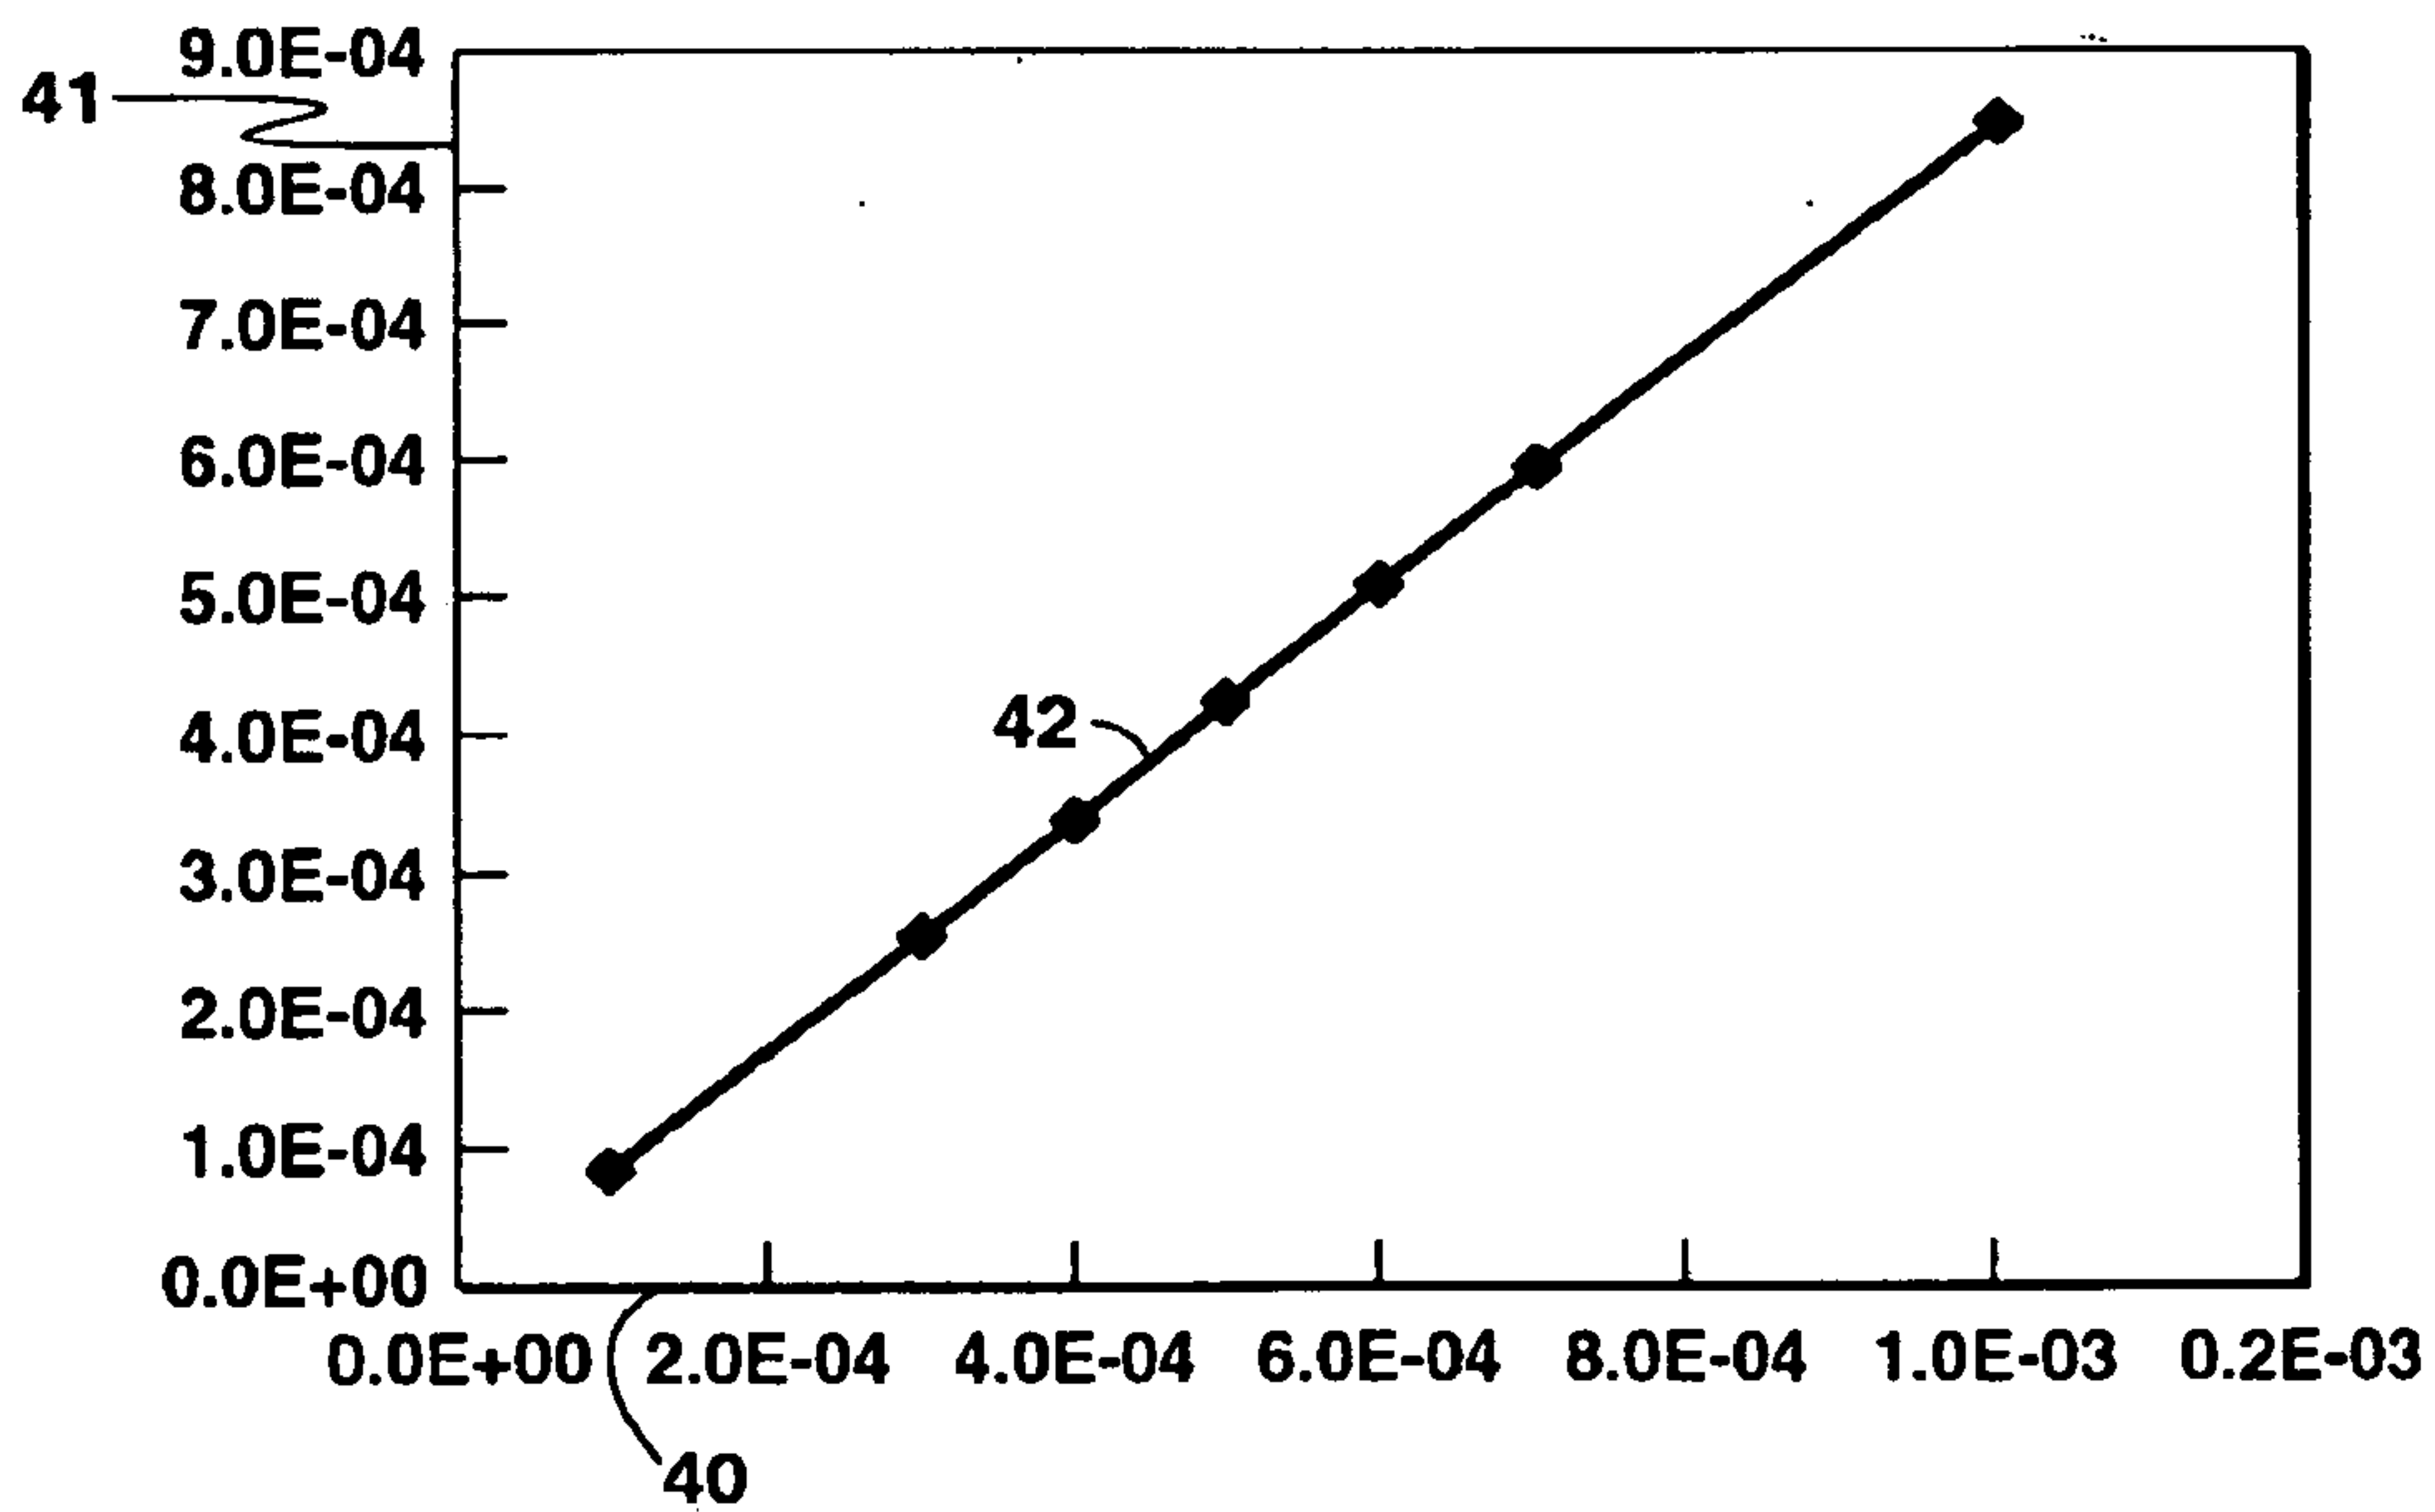


FIG. 4

3/5

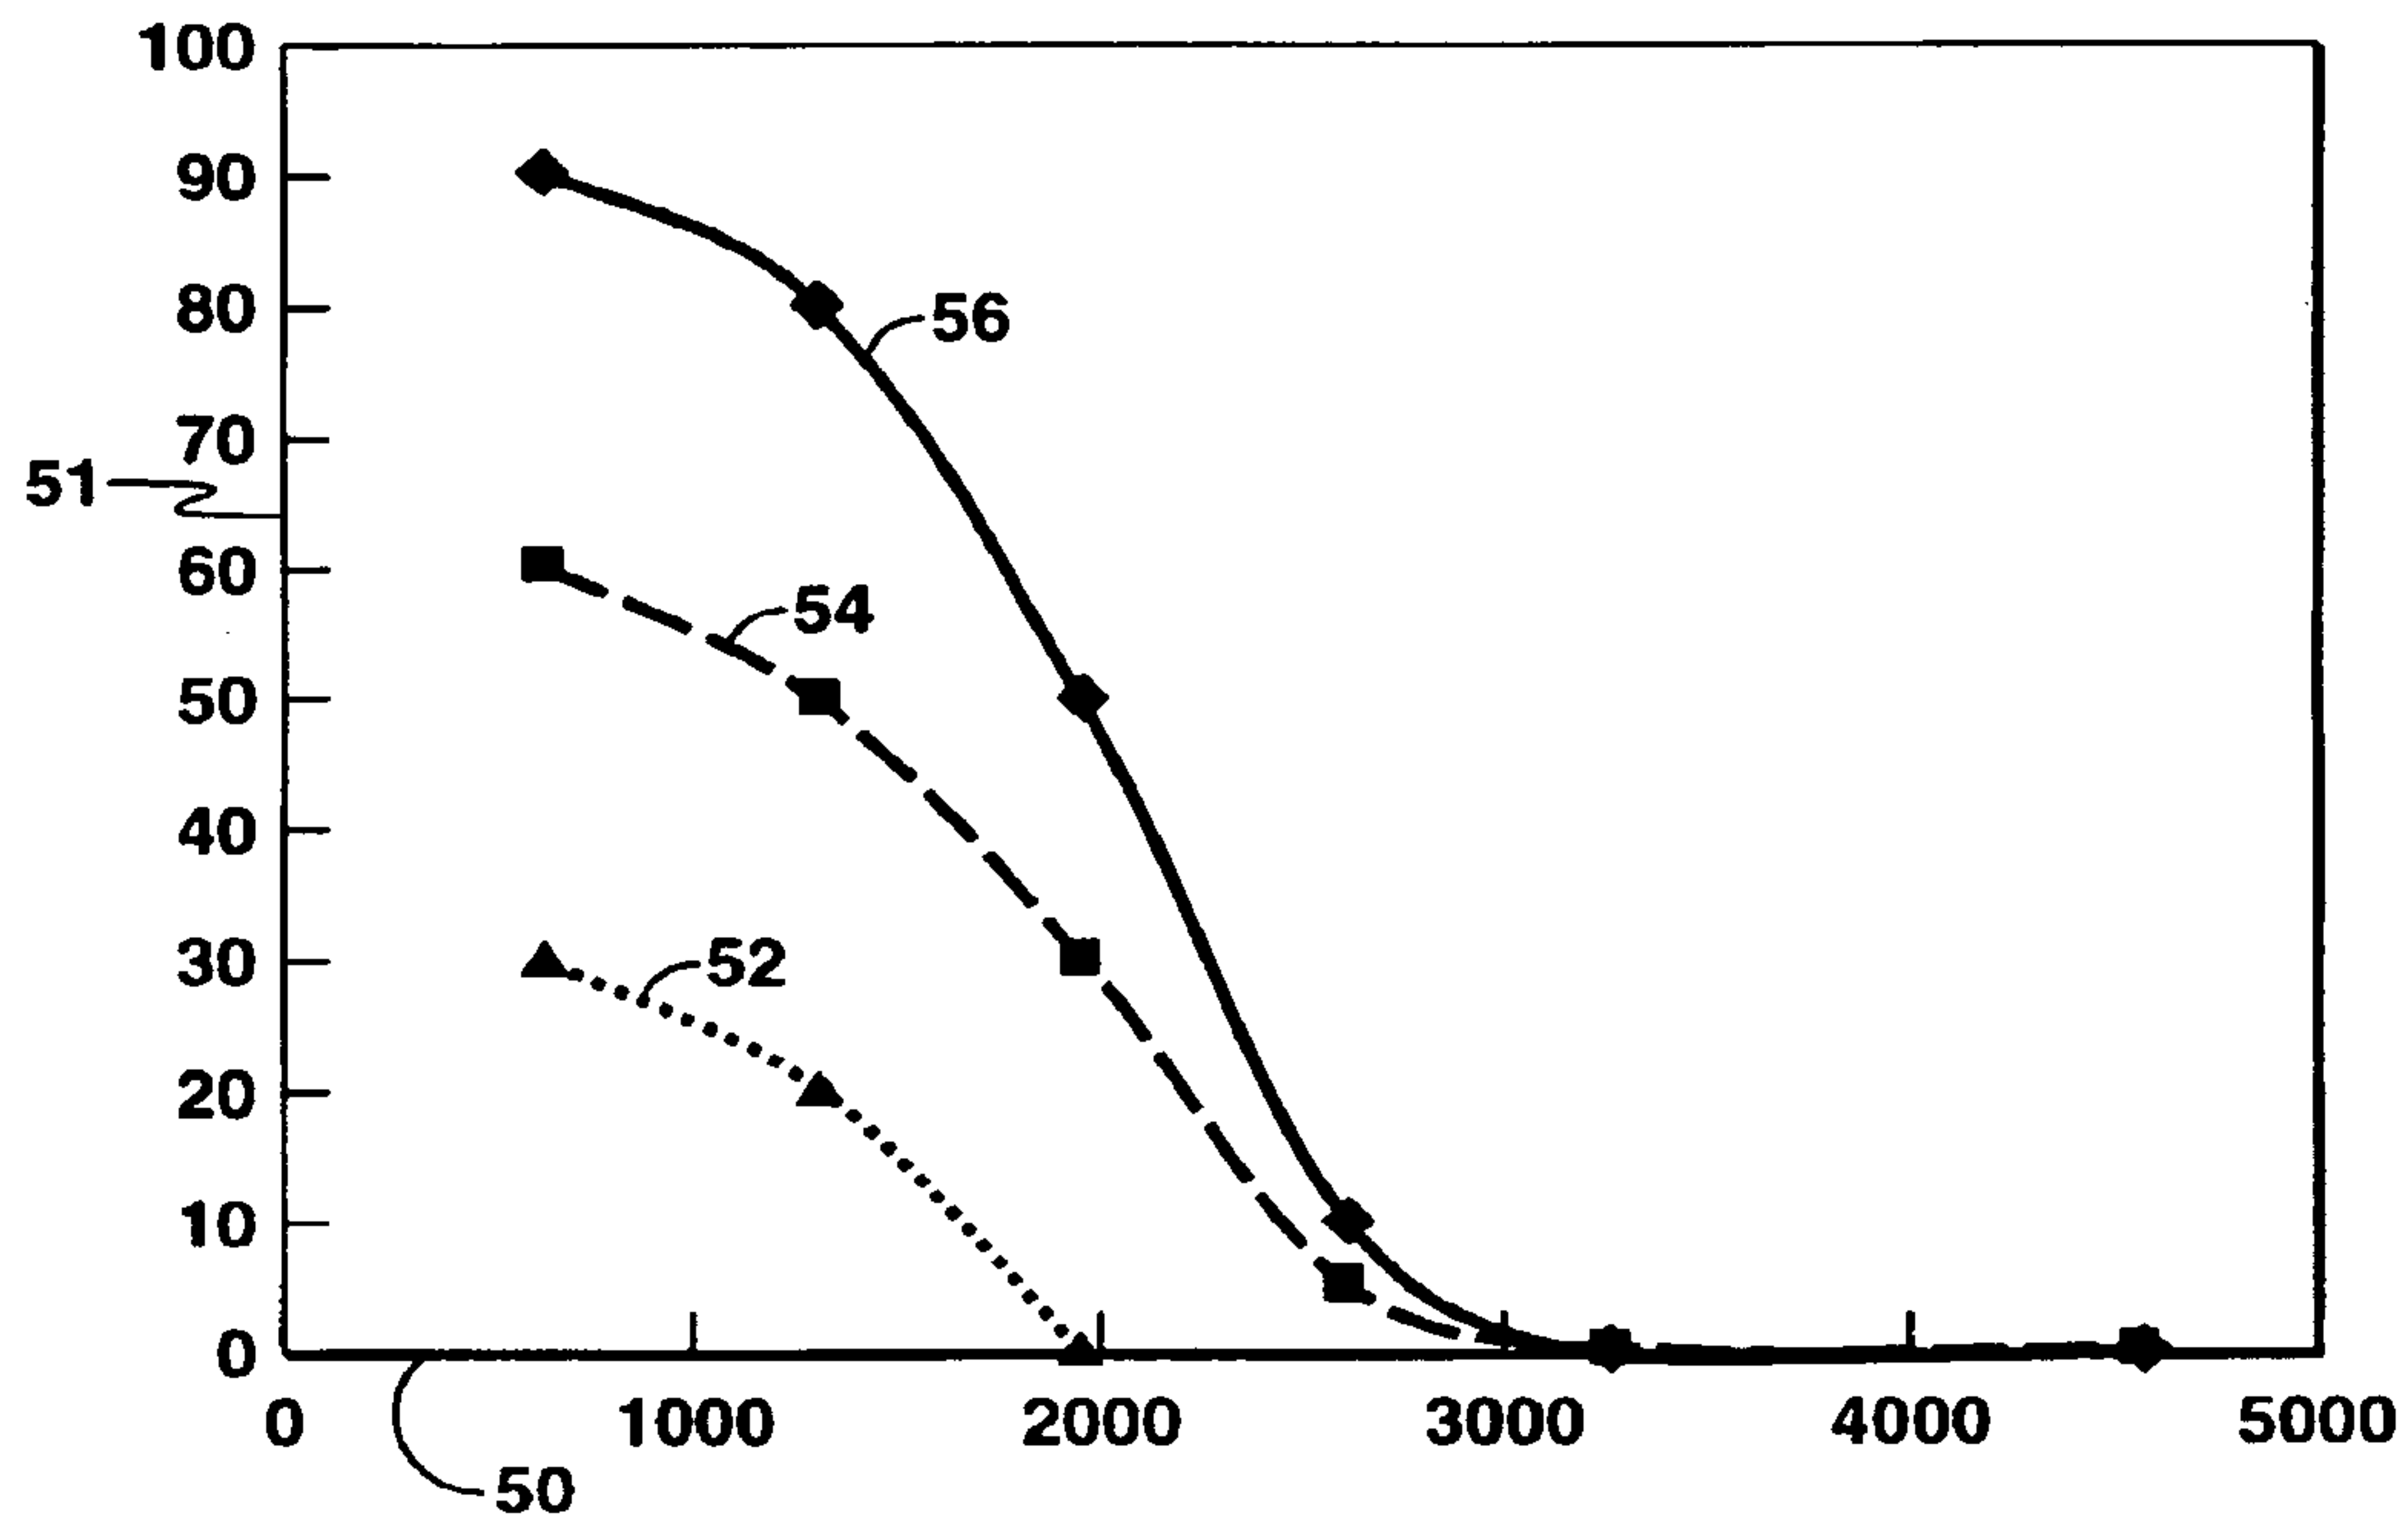


FIG. 5

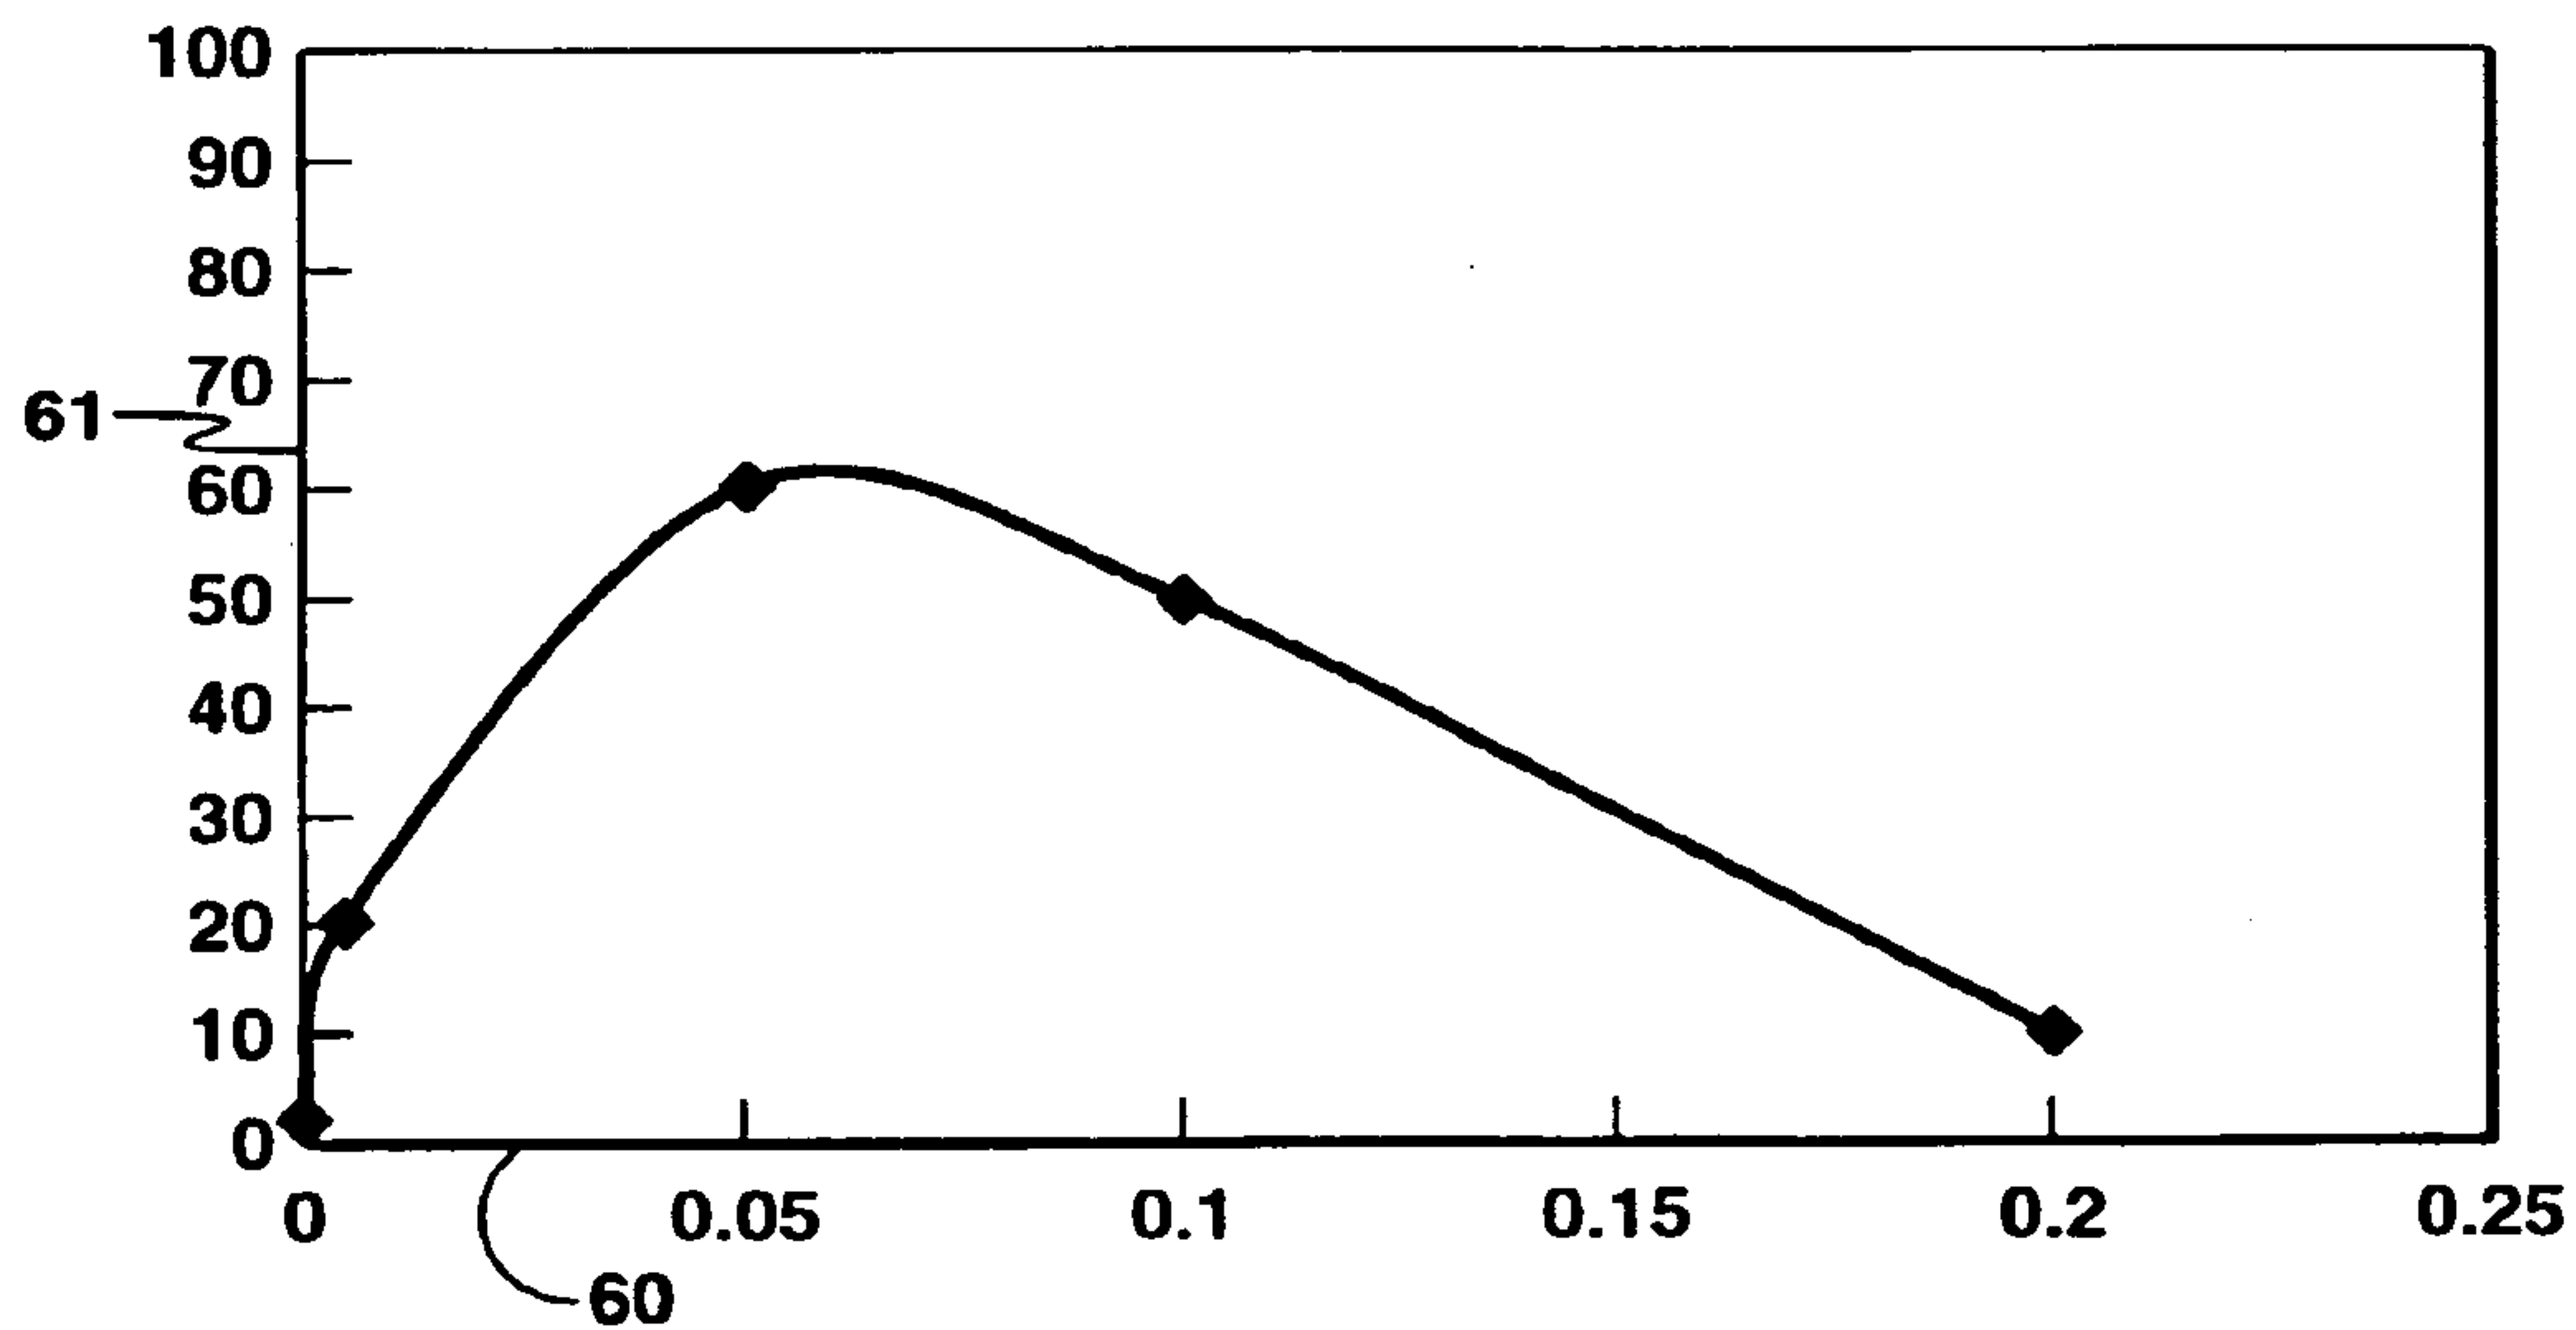


FIG. 6

4/5

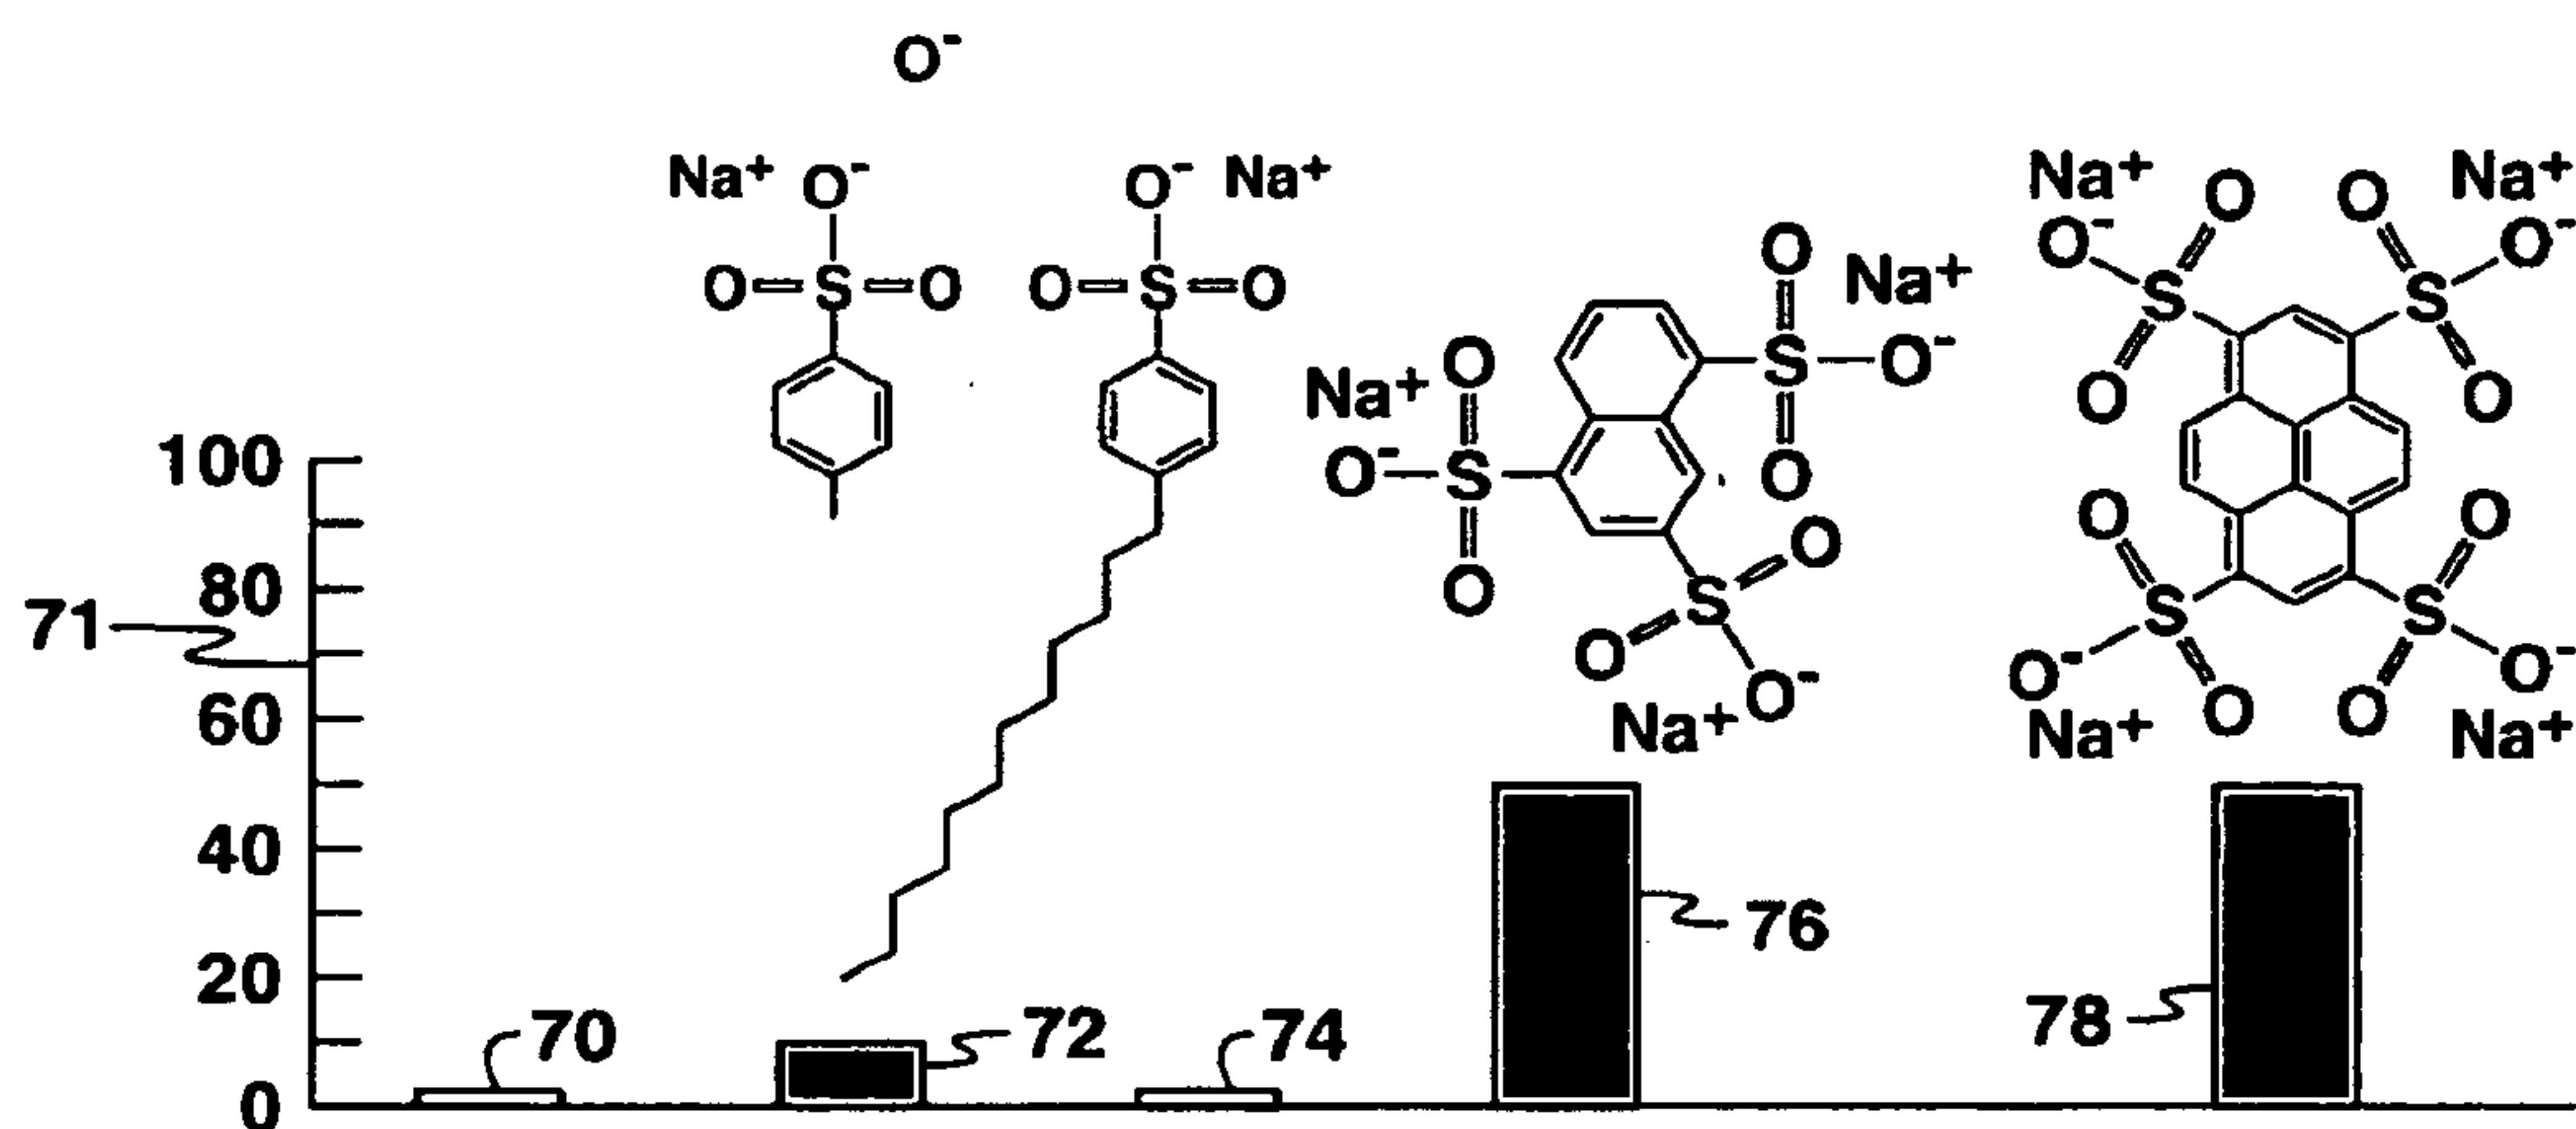


FIG. 7

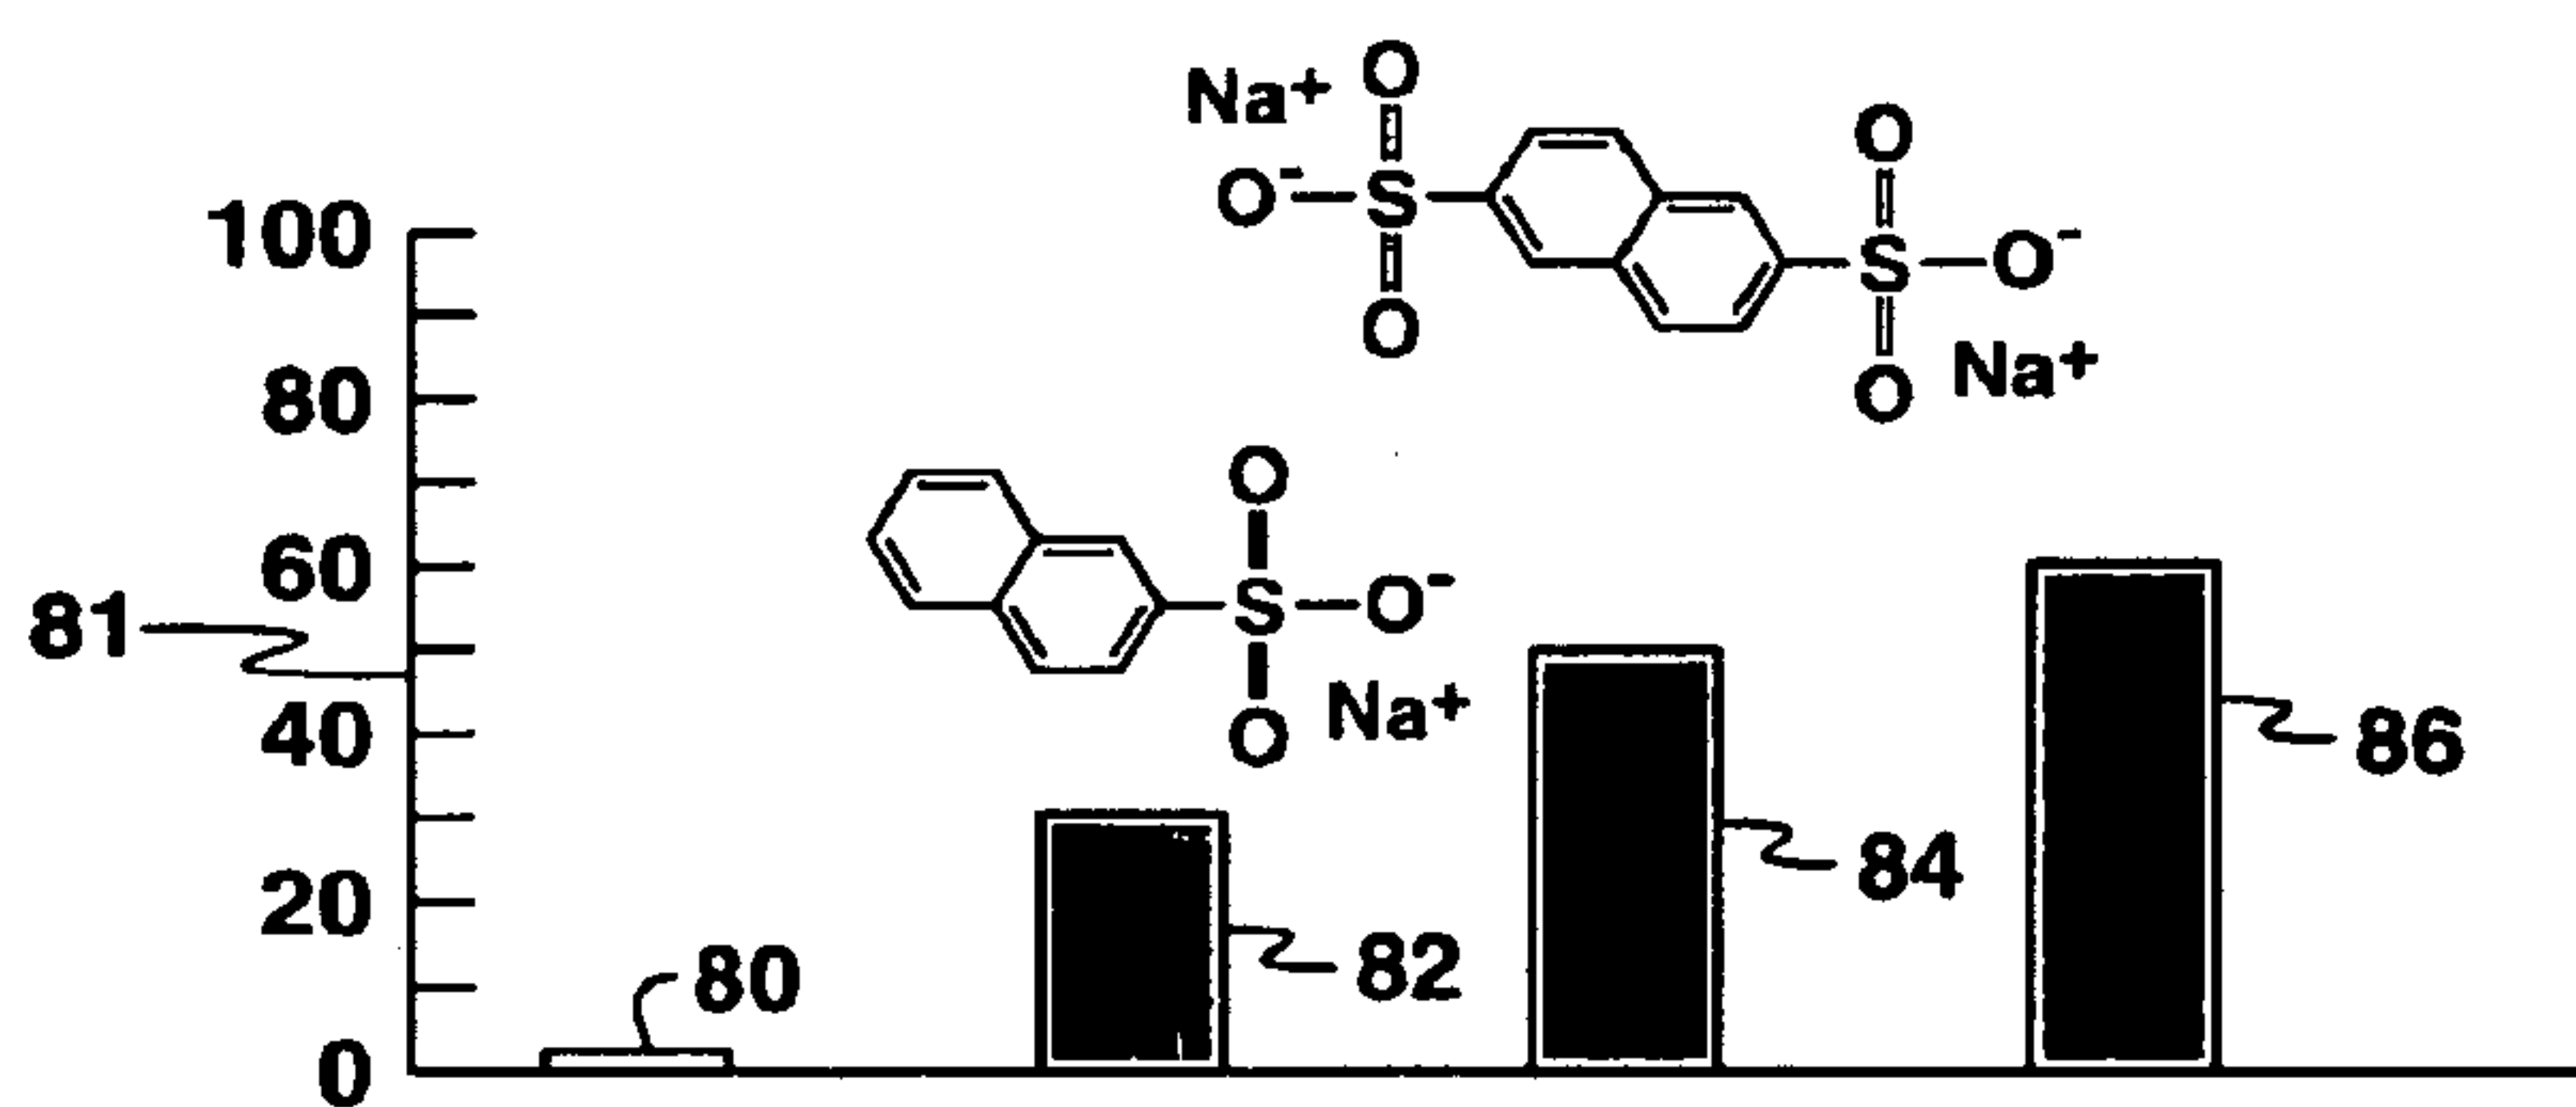


FIG. 8

5/5

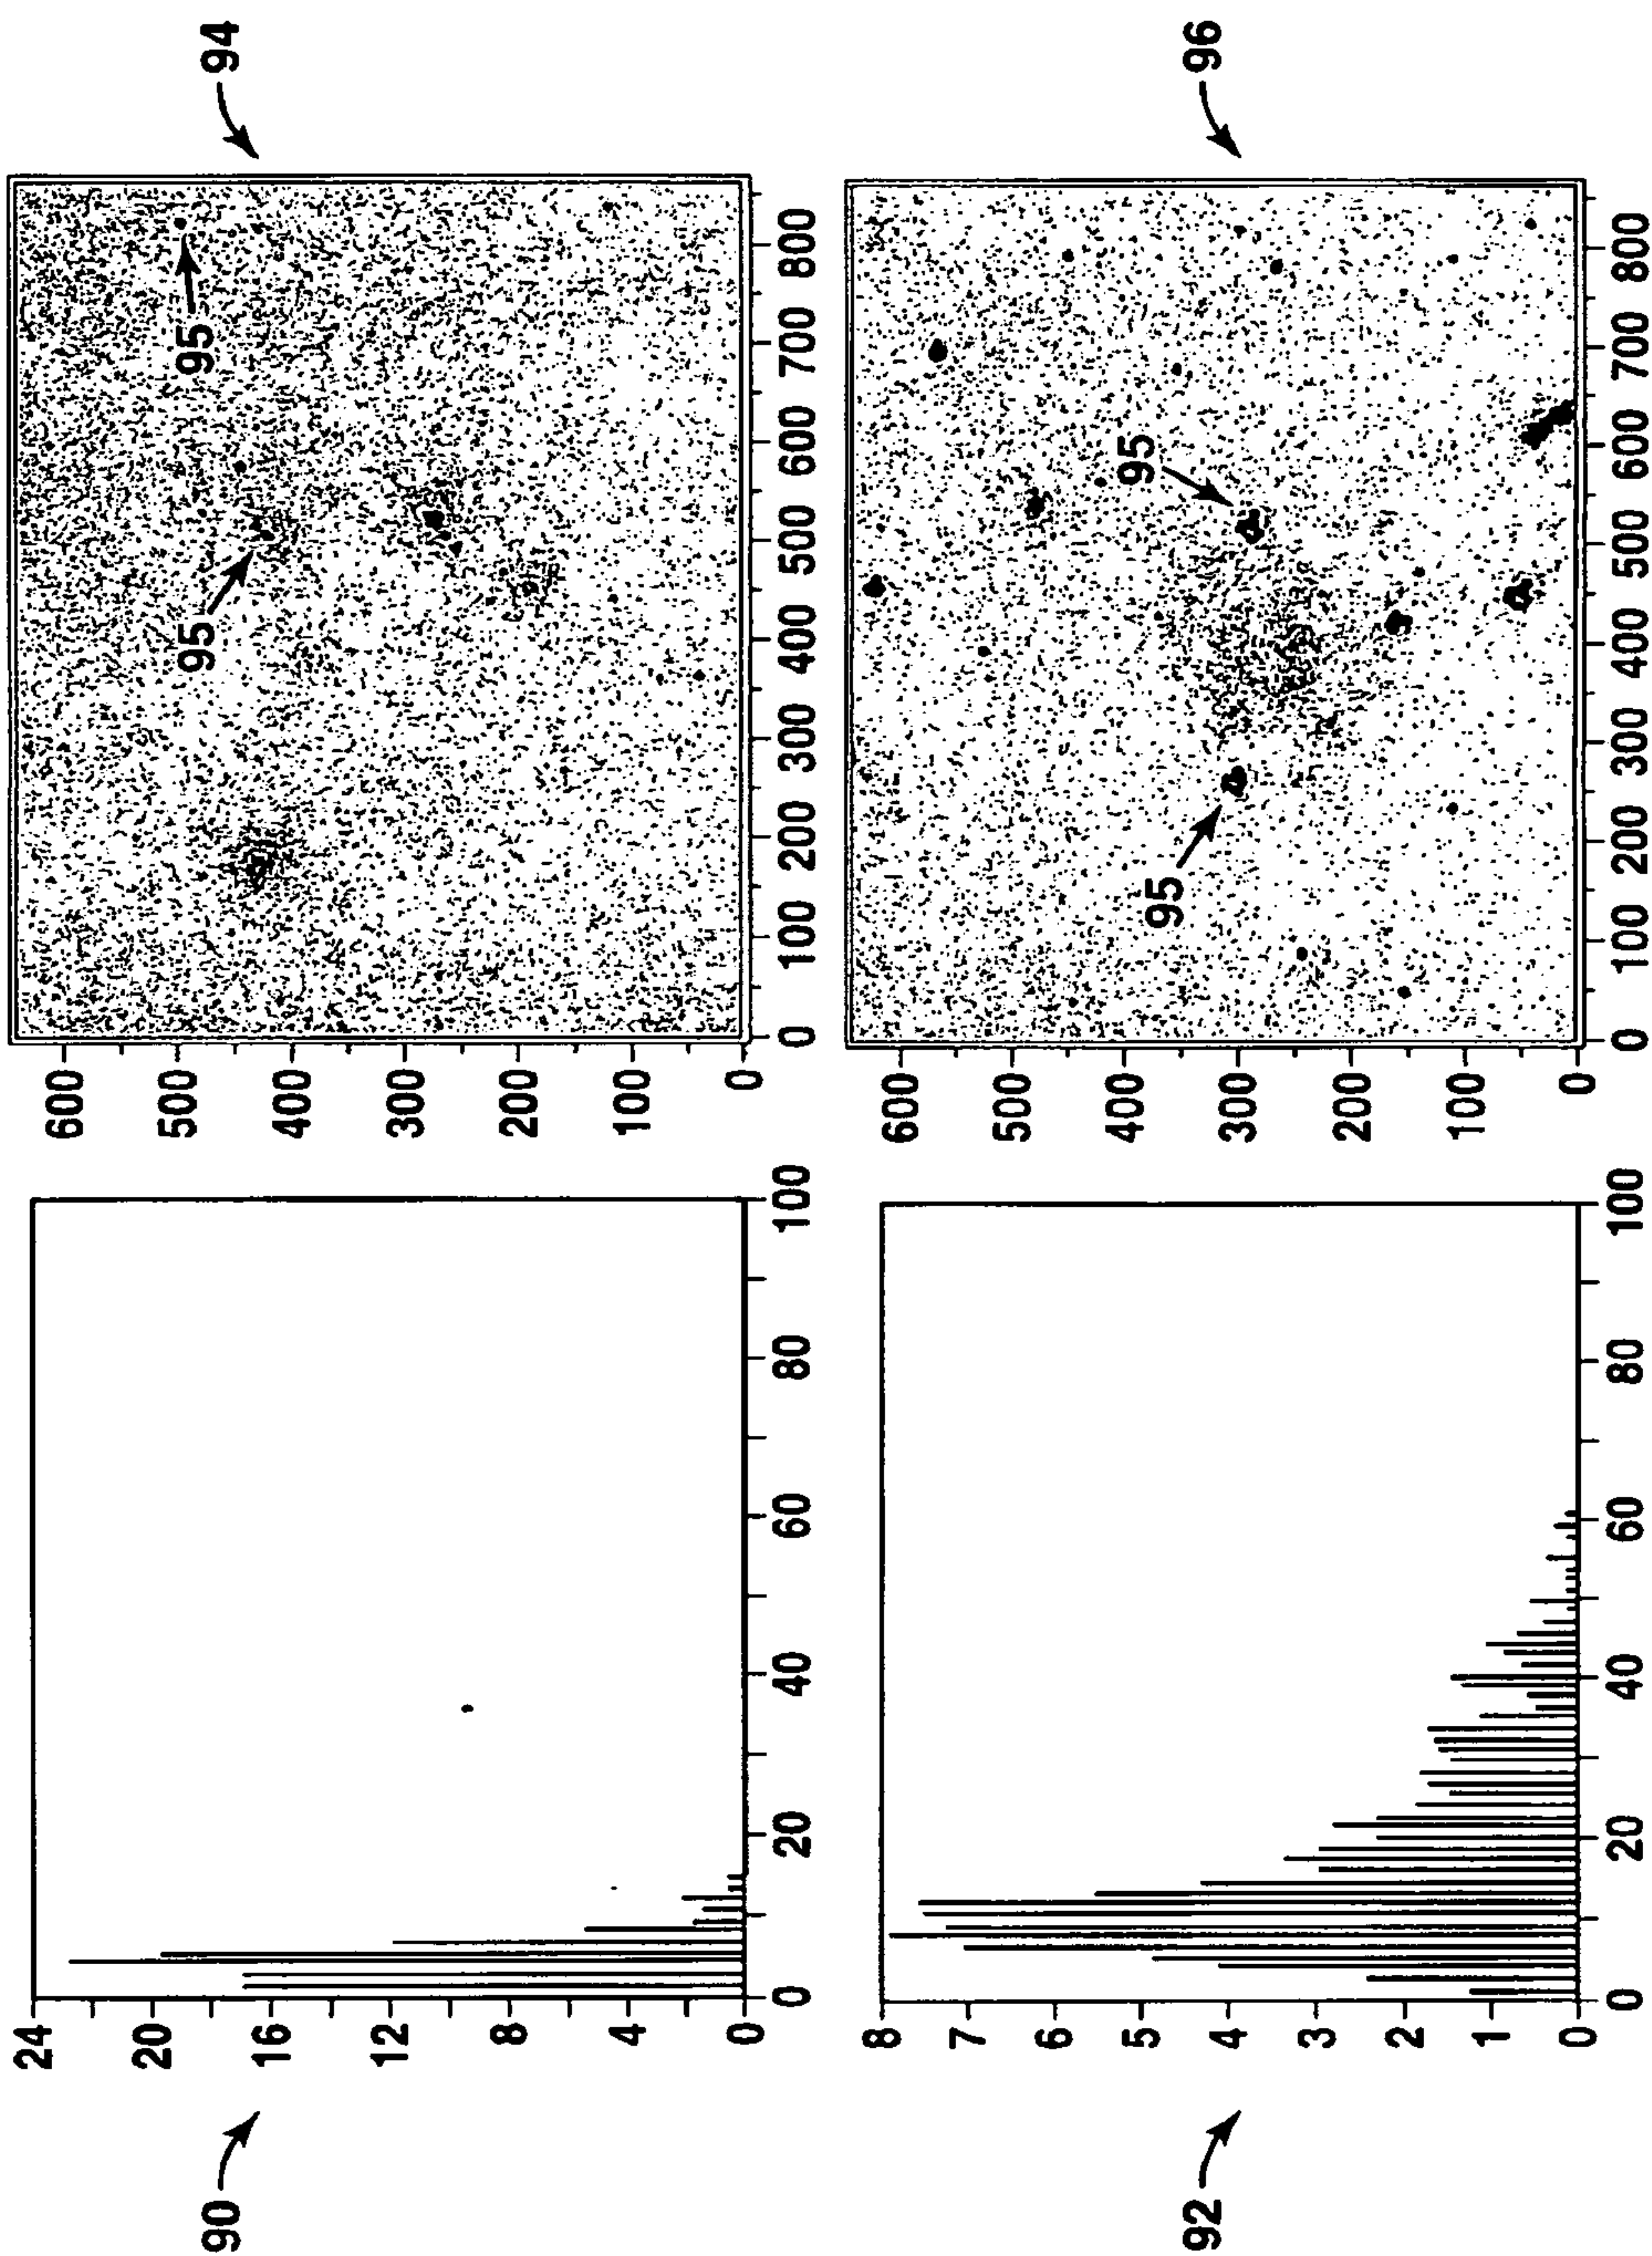


FIG. 9