

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization

International Bureau

(43) International Publication Date
20 April 2023 (20.04.2023)



(10) International Publication Number
WO 2023/062006 A1

(51) International Patent Classification:

C10G 29/20 (2006.01) *C10L 1/224* (2006.01)

C10L 1/222 (2006.01) *C10L 1/16* (2006.01)

C10L 10/04 (2006.01) *C10L 1/24* (2006.01)

C10L 1/232 (2006.01) *C10L 10/18* (2006.01)

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

Published:

— *with international search report (Art. 21(3))*

(21) International Application Number:

PCT/EP2022/078249

(22) International Filing Date:

11 October 2022 (11.10.2022)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

21202907.8 15 October 2021 (15.10.2021) EP

(71) Applicant: **BASF SE** [DE/DE]; Carl-Bosch-Strasse 38, 67056 Ludwigshafen Am Rhein (DE).

(72) Inventors: **WAGNER, Jochen**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE). **HOFFMANN, Silvia**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE). **GOTTSCHLING, Ingo**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE). **HANSCH, Markus**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE). **BAUMGAERTNER, Timo**; Carl-Bosch-Strasse 38, 67056 Ludwigshafen (DE).

(74) Agent: **BASF IP ASSOCIATION**; BASF SE GBI - C006, 67056 Ludwigshafen (DE).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: REDUCTION OF ASPHALTENES FROM MARINE FUELS

(57) Abstract: The present invention discloses a process for reduction of asphaltenes from marine fuels using quaternary ammonium compounds in certain marine fuels, the use of such quaternary ammonium compounds, and certain marine fuels comprising such quaternary ammonium compounds.



WO 2023/062006 A1

REDUCTION OF ASPHALTENES FROM MARINE FUELS

Description

5 The present invention discloses a process for reduction of asphaltenes from marine fuels using quaternary ammonium compounds in certain marine fuels, the use of such quaternary ammonium compounds, and certain marine fuels comprising such quaternary ammonium compounds.

10 Asphaltenes are a widespread constituent of crude oils and refinery stream thereof. In fuels with a certain composition such asphaltenes tend to precipitate from the fuels causing fouling of equipment in contact with the fuel, unless they are dissolved or dispersed.

The nature, chemical, and physical properties of asphaltenes are described in US 5214224, furthermore US 5214224 discloses certain copolymers for the dispersion of asphaltenes. Re-
15 gardless of their chemical composition and constitution asphaltenes in the context of the present invention are determined in accordance with ASTM D3279 and are defined as that part of a marine fuel which is determined according to this method.

WO 2014/193692 A1 discloses a method of asphaltene control in a hydrocarbon fluid using cer-
20 tain quaternary ammonium compounds. *Inter alia* as hydrocarbon fluids marine fuel oils are mentioned, the composition of such oils is not explicitly disclosed, it is mentioned that such oils include aliphatic or liquid aromatic oils.

It was an object of the present invention to provide a method for further reducing fouling caused
25 by asphaltenes in marine fuels.

The object was achieved by the use of at least one quaternary ammonium compound for dis-
solving or dispersing asphaltenes in marine fuels comprising
- 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), pref-
30 erably 5 to 60, more preferably 10 to 50 wt%
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469),
preferably 20 to 80, more preferably 30 to 70 wt%, and
- 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP 469),
preferably 3 to 25, more preferably 5 to 20 wt%,
35 with the proviso that the sum of saturates, aromatics, and asphaltenes is less than 100 wt%,
wherein
the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more than 6.0,

more preferably not more than 5.5, very more preferably not more than 5.0, even more preferably not more than 4.5, and especially not more than 4.0.

Another object of the present invention is a marine fuel composition, comprising

- 5 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%,
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP 469),
10 preferably 3 to 25, more preferably 5 to 20 wt%, and
- 50 to 2000 ppm by weight of at least one quaternary ammonium compound, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight,

wherein

- the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more than 6.0,
15 more preferably not more than 5.5, very more preferably not more than 5.0, even more preferably not more than 4.5, and especially not more than 4.0.

Another object of the present invention is a process for reducing or preventing fouling caused by asphaltenes in marine fuels comprising

- 20 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP 469), preferably 5 to 60, more preferably 10 to 50 wt%,
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP 469),
25 preferably 3 to 25, more preferably 5 to 20 wt%, and

wherein

- the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more than 6.0,
more preferably not more than 5.5, very more preferably not more than 5.0, even more preferably not more than 4.5, and especially not more than 4.0

- 30 by adding 50 to 2000 ppm by weight of at least one quaternary ammonium compound to the said marine fuel, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight.

- In a preferred embodiment of this process according to the invention it is possible to reduce the
35 potential total sediment (TSP) value, determined according to ISO 10307-2:2009(E), procedure A, of the unadditised marine fuel by at least 25 %, preferably by at least 30 %, more preferably

by at least 35 %, and even by at least 40 % by adding the indicated amounts of at least one quaternary ammonium compound to the said marine fuel.

5 The basis underlying this invention is the observation that quaternary ammonium compounds are more effective in dissolving or dispersing asphaltenes in marine fuels with a lower content of aromatics than in those with a higher content.

Therefore, the use of quaternary ammonium compounds is preferred in marine fuels with a content of aromatics and polyaromatics according to IP 469 of not more than 50 wt%, more preferably not more than 45 wt%.

For the sake of simplicity within this text aromatics and polyaromatics according to IP 469 are collectively referred to as "aromatics" and polyaromatics are deemed to be included, even if not explicitly mentioned.

15 With regard to marine fuels saturates, aromatics, and asphaltenes refer to those compounds which are determined according to the respective SARA analysis.

It should be mentioned that the content of asphaltenes is independent of the content of saturates, aromatics, and resins in the marine fuel, so that the amounts of asphaltenes (determined according to SARA analysis using TLC-FID, IP 469) in the marine fuel is from 1 to 30 wt% asphaltenes, preferably from 3 to 25, and more preferably from 5 to 20 wt% irrespective of the content of saturates, aromatics, and/or resins.

25 The invention is described in further detail as follows:

Marine Fuel

30 The fuel is a marine fuel, such as MGO (Marine gas oil), MDO (Marine diesel oil), IFO (Intermediate fuel oil), MFO (Marine fuel oil), or HFO (Heavy fuel oil). Further examples for marine fuel are IFO 380 (an Intermediate fuel oil with a maximum viscosity of 380 centistokes at 50 °C (<3.5% sulphur)), IFO 180 (an Intermediate fuel oil with a maximum viscosity of 180 centistokes (<3.5% sulphur)), LS 380 (a Low-sulphur (<1.0%) intermediate fuel oil with a maximum viscosity of 380 centistokes), LS 180 (a Low-sulphur (<1.0%) intermediate fuel oil with a maximum viscosity of 180 centistokes), LSMGO (a Low-sulphur (<0.1%) Marine Gas Oil, which is often be used in European Ports and Anchorages according to EU Sulphur directive 2005/33/EC), or ULSMGO (a Ultra-Low-Sulphur Marine Gas Oil, also referred to as Ultra-Low-Sulfur Diesel (sul-

phur 0.0015% max). Further suitable marine fuels are according to DIN ISO 8217 of the category ISO-F- DMX, DMA, DFA, DMZ, DFZ, or DFB, or ISO-F RMA, RMB, RMD, RME, RMG, or RMK. Further suitable marine fuel is distillate marine diesel or residual marine diesel.

- 5 The viscosity of the fuel, such as the marine fuel, can vary in a broad range, such as in the range from 1 to 10,000 mm²/s at 40 °C (ISO 3104) or 1 to 1000 mm²/s at 50°C (ISO 3104). Unless mentioned otherwise the viscosity is always measured at 50 °C throughout this text.

10 In a preferred embodiment the marine fuel is a very low sulfur fuel oil (VLSFO) with a sulfur content of not more than 0.5 %.

The sulphur content of a marine fuel depends on the crude oil origin and the refining process. When a fuel burns, sulphur is converted into sulphur oxides. These oxides reach the lubricating oil via the blow-by gas and are corrosive to engine piston liners (see: Monique B. Vermeire, 15 "Everything You Need to Know About Marine Fuels", published by Chevron Global Marine Products, June 2012)

For technical and ecological reasons low sulfur fuel are of increasing interest. Suitable low sulfur fuels may contain less than 1, 0.5, 0.2, or 0.1 wt% sulfur. An example is Shell® ULSFO with 20 less than 0.1 wt% sulfur.

Quaternary ammonium compounds

25 The at least one quaternary nitrogen component refer, in the context of the present invention, to nitrogen compounds quaternized in the presence of an acid or in an acid-free manner, preferably obtainable by addition of a compound comprising at least one oxygen- or nitrogen-containing group reactive with an anhydride and additionally at least one quaternizable amino group onto a polycarboxylic anhydride compound and subsequent quaternization.

30 In most cases the quaternary nitrogen component is an ammonium compound, however in the context of the present document morpholinium, piperidinium, piperazinium, pyrrolidinium, imidazolium or pyridinium cations are also encompassed by the phrase "quaternary nitrogen component".

35 The quaternary ammonium compounds are preferably of the formula



in which

A⁻ stands for an anion, preferably a carboxylate R⁵COO⁻ or a carbonate R⁵O-COO⁻,

5

and

R¹, R², R³, R⁴, and R⁵ independently of another are an organic residue with from 1 to 100 carbon atoms, substituted or unsubstituted, linear or branched alkyl, alkenyl or hydroxyalkyl residue with 1 to 100, more preferably 1 to 75, even more preferably 1 to 30, most preferably 1 to 25 and especially 1 to 20 carbon atoms,

10

R⁵ additionally may be substituted or unsubstituted cycloalkyl or aryl residues bearing 5 to 20, preferably 5 to 12 carbon atoms.

15

The organic residues R¹ to R⁵ independently of another are preferably unsubstituted.

20

It is also possible that the anion may be multiply charged negatively, e.g. if anions of dibasic acids are used, in this case the stoichiometric ratio of the ammonium ions to the anions corresponds to the ratio of positive and negative charges.

The same is true for salts in which the cation bears more than one ammonium ion, e.g. of the substituents connect two or more ammonium ions.

25

In the organic residues the carbon atoms may be interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups, and may be substituted by C₆-C₁₂-aryl, C₅-C₁₂-cycloalkyl or a five- or six-membered, oxygen-, nitrogen- and/or sulphur-containing heterocycle or two of them together form an unsaturated, saturated or aromatic ring which may be interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups, where the radicals mentioned may each be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles.

30

Two of the residues R¹ to R⁴ may together form an unsaturated, saturated or aromatic ring, preferably a five-, six- or seven-membered ring (including the nitrogen atom of the ammonium ion).

35

In this case the ammonium cation may be a morpholinium, piperidinium, piperazinium, pyrrolidinium, imidazolium or pyridinium cation.

In these definitions

5

C₁–C₂₀-alkyl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, 2-ethylhexyl, 2,4,4-trimethylpentyl, decyl, dodecyl, tetradecyl, heptadecyl, octadecyl, eicosyl, 1,1-dimethylpropyl, 1,1-dimethylbutyl, 1,1,3,3-tetramethylbutyl, benzyl, 1-phenylethyl, 2-phenylethyl, α,α-dimethylbenzyl, benzhydryl, p-tolylmethyl, 1-(p-butylphenyl)ethyl, p-chlorobenzyl, 2,4-dichlorobenzyl, p-methoxybenzyl, m-ethoxybenzyl, 2-cyanoethyl, 2-cyanopropyl, 2-methoxycarbonyl ethyl, 2-ethoxycarbonyl ethyl, 2-butoxycarbonylpropyl, 1,2-di-(methoxycarbonyl)ethyl, 2-methoxyethyl, 2-ethoxyethyl, 2-butoxyethyl, diethoxymethyl, diethoxyethyl, 1,3-dioxolan-2-yl, 1,3-dioxan-2-yl, 2-methyl-1,3-dioxolan-2-yl, 4-methyl-1,3-dioxolan-2-yl, 2-isopropoxyethyl, 2-butoxypropyl, 2-octyloxyethyl, chloromethyl, 2-chloroethyl, trichloromethyl, trifluoromethyl, 1,1-dimethyl-2-chloroethyl, 2-methoxyisopropyl, 2-ethoxyethyl, butylthiomethyl, 2-dodecylthioethyl, 2-phenylthioethyl, 2,2,2-trifluoroethyl, 2-hydroxyethyl, 2-hydroxypropyl, 3-hydroxypropyl, 4-hydroxybutyl, 6-hydroxyhexyl, 2-aminoethyl, 2-aminopropyl, 3-aminopropyl, 4-aminobutyl, 6-aminoethyl, 2-methylaminoethyl, 2-methylaminopropyl, 3-methylaminopropyl, 4-methylaminobutyl, 6-methylaminoethyl, 2-dimethylaminoethyl, 2-dimethylaminopropyl, 3-dimethylaminopropyl, 4-dimethylaminobutyl, 6-dimethylaminoethyl, 2-hydroxy-2,2-dimethylethyl, 2-phenoxyethyl, 2-phenoxypropyl, 3-phenoxypropyl, 4-phenoxybutyl, 6-phenoxyhexyl, 2-methoxyethyl, 2-methoxypropyl, 3-methoxypropyl, 4-methoxybutyl, 6-methoxyhexyl, 2-ethoxyethyl, 2-ethoxypropyl, 3-ethoxypropyl, 4-ethoxybutyl or 6-ethoxyhexyl, and

C₂–C₂₀-alkyl interrupted by one or more oxygen and/or sulphur atoms and/or one or more substituted or unsubstituted imino groups is, for example, 5-hydroxy-3-oxa-pentyl, 8-hydroxy-3,6-dioxaoctyl, 11-hydroxy-3,6,9-trioxaundecyl, 7-hydroxy-4-oxaheptyl, 11-hydroxy-4,8-dioxaundecyl, 15-hydroxy-4,8,12-trioxapentadecyl, 9-hydroxy-5-oxanonyl, 14-hydroxy-5,10-oxatetradecyl, 5-methoxy-3-oxapentyl, 8-methoxy-3,6-dioxaoctyl, 11-methoxy-3,6,9-trioxaundecyl, 7-methoxy-4-oxaheptyl, 11-methoxy-4,8-dioxaundecyl, 15-methoxy-4,8,12-trioxapentadecyl, 9-methoxy-5-oxanonyl, 14-methoxy-5,10-oxatetradecyl, 5-ethoxy-3-oxapentyl, 8-ethoxy-3,6-dioxaoctyl, 11-ethoxy-3,6,9-trioxaundecyl, 7-ethoxy-4-oxaheptyl, 11-ethoxy-4,8-dioxaundecyl, 15-ethoxy-4,8,12-trioxapentadecyl, 9-ethoxy-5-oxanonyl or 14-ethoxy-5,10-oxatetradecyl.

If two radicals form a ring, they can together be 1,3-propylene, 1,4-butylene, 1,5-pentylene, 2-oxa-1,3-propylene, 1-oxa-1,3-propylene, 2-oxa-1,3-propylene, 1-oxa-1,3-propenylene, 1-aza-1,3-propenylene, 1-C₁-C₄-alkyl-1-aza-1,3-propenylene, 1,4-buta-1,3-dienylene, 1-aza-1,4-buta-1,3-dienylene or 2-aza-1,4-buta-1,3-dienylene.

5

The number of oxygen and/or sulphur atoms and/or imino groups is not subject to any restrictions. In general, there will be no more than 5 in the radical, preferably no more than 4 and very particularly preferably no more than 3.

10 Furthermore, there is generally at least one carbon atom, preferably at least two carbon atoms, between any two heteroatoms.

Substituted and unsubstituted imino groups can be, for example, imino, methylimino, isopropylimino, n-butylimino or tert-butylimino.

15

Furthermore,

functional groups can be carboxy, carboxamide, hydroxy, di(C₁-C₄-alkyl)amino, C₁-C₄-alkyloxycarbonyl, cyano or C₁-C₄-alkyloxy,

20

C₆-C₁₂-aryl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, phenyl, tolyl, xylyl, α-naphthyl, β-naphthyl, 4-diphenyl, chlorophenyl, dichlorophenyl, trichlorophenyl, difluorophenyl, methylphenyl, dimethylphenyl, trimethylphenyl, ethylphenyl, diethylphenyl, isopropylphenyl, tert-butylphenyl, dodecylphenyl, methoxyphenyl, dimethoxyphenyl, ethoxyphenyl, hexyloxyphenyl, methylnaphthyl, isopropylphenyl, chloronaphthyl, ethoxynaphthyl, 2,6-dimethylphenyl, 2,4,6-trimethylphenyl, 2,6-dimethoxyphenyl, 2,6-dichlorophenyl, 4-bromophenyl, 2- or 4-nitrophenyl, 2,4- or 2,6-dinitrophenyl, 4-dimethylaminophenyl, 4-acetylphenyl, methoxyethylphenyl or ethoxymethylphenyl,

30

C₅-C₁₂-cycloalkyl which may be substituted by functional groups, aryl, alkyl, aryloxy, alkyloxy, halogen, heteroatoms and/or heterocycles is, for example, cyclopentyl, cyclohexyl, cyclooctyl, cyclododecyl, methylcyclopentyl, dimethylcyclopentyl, methylcyclohexyl, dimethylcyclohexyl, diethylcyclohexyl, butylcyclohexyl, methoxycyclohexyl, dimethoxycyclohexyl, diethoxycyclohexyl, butylthiocyclohexyl, chlorocyclohexyl, dichlorocyclohexyl, dichlorocyclopentyl or a saturated or unsaturated bicyclic system such as norbornyl or norbornenyl,

35

a five- or six-membered, oxygen-, nitrogen- and/or sulphur-containing heterocycle is, for example, furyl, thienyl, pyrrolyl, pyridyl, indolyl, benzoxazolyl, dioxolyl, dioxyl, benzimidazolyl, benzothiazolyl, dimethylpyridyl, methylquinolyl, dimethylpyrrolyl, methoxyfuryl, dimethoxypyridyl, difluoropyridyl, methylthienyl, isopropylthienyl or tert-butylthienyl and

5

C₁ to C₄-alkyl is, for example, methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl or tert-butyl.

The residues R¹ to R⁵ are preferably C₂-C₁₈-alkyl or C₆-C₁₂-aryl, more preferably C₄-C₁₆-alkyl or C₆-C₁₂-aryl, and even more preferably C₄-C₁₆-alkyl or C₆-aryl.

10

The residues R¹ to R⁵ may be saturated or unsaturated, preferably saturated.

Preferred residues R¹ to R⁵ do not bear any heteroatoms other than carbon or hydrogen.

15 Preferred examples of R¹ to R⁴ are methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, tert-butyl, pentyl, hexyl, heptyl, octyl, 2-ethylhexyl, 2,4,4-trimethylpentyl, 2-propylheptyl, decyl, dodecyl, tetradecyl, heptadecyl, octadecyl, eicosyl, 1,1-dimethylpropyl, 1,1-dimethylbutyl, 1,1,3,3-tetramethylbutyl, benzyl, 1-phenylethyl, 2-phenylethyl, α,α-dimethylbenzyl, benzhydryl, p-tolylmethyl or 1-(p-butylphenyl)ethyl.

20

In a preferred embodiment at least one of the residues R¹ to R⁴ is selected from the group consisting of 2-hydroxyethyl, hydroxyprop-1-yl, hydroxyprop-2-yl, 2-hydroxybutyl or 2-hydroxy-2-phenylethyl.

25 In one embodiment R⁵ is a polyolefin-homo- or copolymer, preferably a polypropylene, polybutene or polyisobutene residue, with a number-average molecular weight (M_n) of 85 to 20000, for example 113 to 10 000, or 200 to 10000 or 350 to 5000, for example 350 to 3000, 500 to 2500, 700 to 2500, or 800 to 1500. Preferred are polypropenyl, polybutenyl and polyisobutenyl radicals, for example with a number-average molecular weight M_n of 3500 to 5000, 350 to 3000,
30 500 to 2500, 700 to 2500 and 800 to 1500 g/mol.

Preferred examples of anions A⁻ are the anions of acetic acid, propionic acid, butyric acid, 2-ethylhexanoic acid, trimethylhexanoic acid, 2-propylheptanoic acid, isononanoic acid, versatic acids, decanoic acid, undecanoic acid, dodecanoic acid, saturated or unsaturated fatty acids
35 with 12 to 24 carbon atoms, or mixtures thereof, salicylic acid, oxalic acid mono-C₁-C₄-alkyl ester, phthalic acid mono-C₁-C₄-alkyl ester, C₁₂-C₁₀₀-alkyl- and -alkenyl succinic acid, especially dodecenyly succinic acid, hexadecenyly succinic acid, eicosenyly succinic acid, and polyisobutenyl

succinic acid. Further examples are methyl carbonate, ethyl carbonate, n-butyl carbonate, 2-hydroxyethyl carbonate, and 2-hydroxypropyl carbonate.


In one preferred embodiment the nitrogen compounds quaternized in the presence of an acid or
5 in an acid-free manner are obtainable by addition of a compound which comprises at least one oxygen- or nitrogen-containing group reactive with an anhydride and additionally at least one quaternizable amino group onto a polycarboxylic anhydride compound and subsequent quaternization, especially with an epoxide, e.g. styrene or propylene oxide, in the absence of free acid, as described in WO 2012/004300, or with a carboxylic ester, e.g. dimethyl oxalate or methyl
10 salicylate. Suitable compounds having at least one oxygen- or nitrogen-containing group reactive with anhydride and additionally at least one quaternizable amino group are especially polyamines having at least one primary or secondary amino group and at least one tertiary amino group, especially N,N-dimethyl-1,3-propane diamine, N,N-dimethyl-1,2-ethane diamine or N,N,N'-trimethyl-1,2-ethane diamine. Useful polycarboxylic anhydrides are especially dicarboxylic
15 acids such as succinic acid, having a relatively long-chain hydrocarbyl substituent, preferably having a number-average molecular weight M_n for the hydrocarbyl substituent of 200 to 10.000, in particular of 350 to 5000. Such a quaternized nitrogen compound is, for example, the reaction product, obtained at 40°C, of polyisobutenylsuccinic anhydride, in which the polyisobutenyl radical typically has an M_n of 1000, with 3-(dimethylamino)propylamine, which constitutes a polyisobutenylsuccinic monoamide and which is subsequently quaternized with dimethyl oxalate or
20 methyl salicylate or with styrene oxide or propylene oxide in the absence of free acid.

Further quaternized nitrogen compounds suitable as compounds are described in
WO 2006/135881 A1, page 5, line 13 to page 12, line 14;
25 WO 10/132259 A1, page 3, line 28 to page 10, line 25;
WO 2008/060888 A2, page 6, line 15 to page 14, line 29;
WO 2011/095819 A1, page 4, line 5 to page 9, line 29;
GB 2496514 A, paragraph [00012] to paragraph [00041];
WO 2013/117616 A1, page 3, line 34 to page 11, line 2;
30 WO 14/202425 A2, page 3, line 14 to page 5, line 9;
WO 14/195464 A1, page 15, line 31 to page 45, line 26 and page 75, lines 1 to 4;
WO 15/040147 A1, page 4, line 34 to page 5, line 18 and page 19, line 11 to page 50, line 10;
WO 14/064151 A1, page 5, line 14 to page 6, line 17 and page 16, line 10 to page 18, line 12;
WO 2013/064689 A1, page 18, line 16 to page 29, line 8; and
35 WO 2013/087701 A1, page 13, line 25 to page 19, line 30,
WO 13/000997 A1, page 17, line 4 to page 25, line 3,
WO 12/004300, page 5, lines 20 to 30, page 8, line 1 to page 10, line 10, and page 19, line 29

to page 28, line 3,
each of which is incorporated herein by reference.

In one embodiment the quaternized ammonium compound is of formula


5

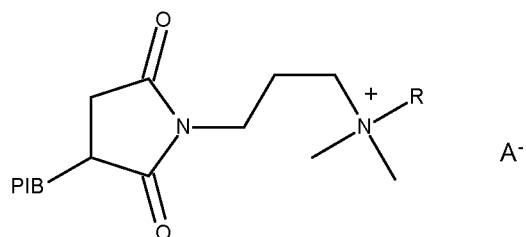

wherein in this formula

- 10 PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,
R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl or 2-hydroxypropyl,
and
A⁻ stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined
15 above, more preferably acetate, salicylate or methyloxalate.

In another preferred embodiment the quaternized ammonium compound is of formula

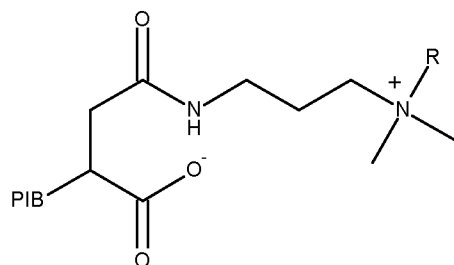


20

wherein in this formula

- PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,
25 R stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl.

In another embodiment the quaternized compound is of formula

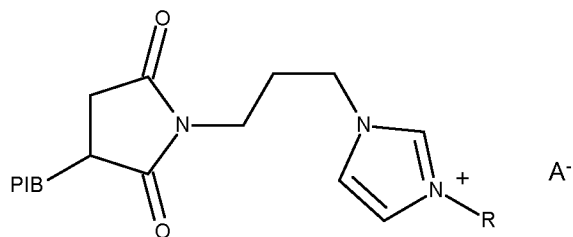


5 wherein in this formula

PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,

R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl, and

10 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably salicylate or methyloxalate.

In another embodiment the quaternized ammonium compound is of formula

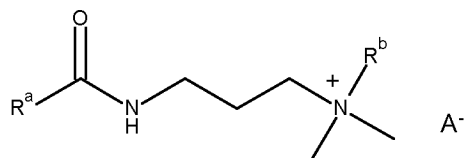

15

wherein in this formula


20 R^a stands for C_1 - C_{20} -alkyl, preferably C_9 - to C_{17} -alkyl, more preferably for undecyl, tridecyl, pentadecyl or heptadecyl,

R^b stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl or 2-hydroxybutyl, and

A^- stands for an anion, preferably carboxylate R^5COO^- , as defined above, more preferably R^5COO^- being a carboxylate of a fatty acid, especially A^- being acetate, 2-ethylhexanoate, oleate, polyisobutenyl succinate or monoesters of polyisobutenyl succinate.

25


In one embodiment the quaternized ammonium compound is of formula

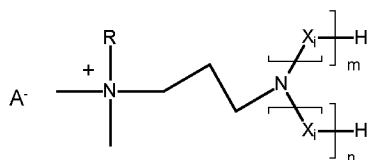

wherein in this formula

- 5 X_i for $i = 1$ to n and 1 to m are independently of another selected from the group consisting of -
 $\text{CH}_2\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-CH}(\text{CH}_3)\text{-O-}$, $-\text{CH}(\text{CH}_3)\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-C}(\text{CH}_3)_2\text{-O-}$, $-\text{C}(\text{CH}_3)_2\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-}$
 $\text{CH}(\text{C}_2\text{H}_5)\text{-O-}$, $-\text{CH}(\text{C}_2\text{H}_5)\text{-CH}_2\text{-O-}$ and $-\text{CH}(\text{CH}_3)\text{-CH}(\text{CH}_3)\text{-O-}$, preferably selected from the group
 consisting of $-\text{CH}_2\text{-CH}(\text{CH}_3)\text{-O-}$, $-\text{CH}(\text{CH}_3)\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-C}(\text{CH}_3)_2\text{-O-}$, $-\text{C}(\text{CH}_3)_2\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-}$
 $\text{CH}(\text{C}_2\text{H}_5)\text{-O-}$, $-\text{CH}(\text{C}_2\text{H}_5)\text{-CH}_2\text{-O-}$ and $-\text{CH}(\text{CH}_3)\text{-CH}(\text{CH}_3)\text{-O-}$, more preferably selected from the
 10 group consisting of $-\text{CH}_2\text{-CH}(\text{CH}_3)\text{-O-}$, $-\text{CH}(\text{CH}_3)\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-C}(\text{CH}_3)_2\text{-O-}$, $-\text{C}(\text{CH}_3)_2\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-}$
 $\text{CH}(\text{C}_2\text{H}_5)\text{-O-}$ and $-\text{CH}(\text{C}_2\text{H}_5)\text{-CH}_2\text{-O-}$, most preferably selected from the group consisting of
 $-\text{CH}_2\text{-CH}(\text{C}_2\text{H}_5)\text{-O-}$, $-\text{CH}(\text{C}_2\text{H}_5)\text{-CH}_2\text{-O-}$, $-\text{CH}_2\text{-CH}(\text{CH}_3)\text{-O-}$ and $-\text{CH}(\text{CH}_3)\text{-CH}_2\text{-O-}$, and especially
 selected from the group consisting of $-\text{CH}_2\text{-CH}(\text{CH}_3)\text{-O-}$ and $-\text{CH}(\text{CH}_3)\text{-CH}_2\text{-O-}$,
- 15 m and n independently of another are positive integers, with the proviso that the sum ($m + n$) is
 from 2 to 50, preferably from 5 to 40, more preferably from 10 to 30, and especially from 15 to
 25,
- R stands for an C_1 - to C_4 -alkyl, preferably methyl, and
- 20 A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate $\text{R}^5\text{O-COO}^-$ as defined
 above, more preferably salicylate or methyloxalate.

In another preferred embodiment the quaternized ammonium compound is of formula




wherein in this formula

- R^a and R^b independently of another stand for $\text{C}_1\text{-C}_{20}$ -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably
- 30 R^a stands for $\text{C}_1\text{-C}_{20}$ -alkyl, preferably ethyl, n-butyl, n-octyl, n-dodecyl, tetradecyl or hexadecyl,
 and R^b stands for hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl,


A⁻ stands for an anion, preferably carboxylate R⁵COO⁻ or a carbonate R⁵O-COO⁻ as defined above, more preferably C₁₂-C₁₀₀-alkyl- and -alkenyl succinic acid, especially dodecenyl succinic acid, hexadecenyl succinic acid, eicosenyl succinic acid, and polyisobutenyl succinic acid.

5 Preferred quaternary ammonium compounds are selected from the group consisting of


- quaternized ammonium compounds of formula

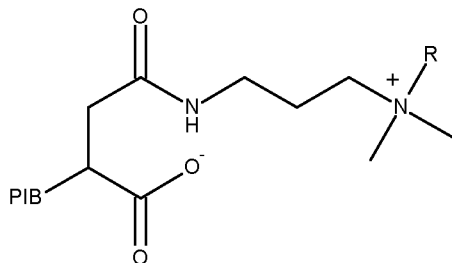

10 - and quaternized ammonium compounds of formula



very preferred are quaternized ammonium compounds of formula

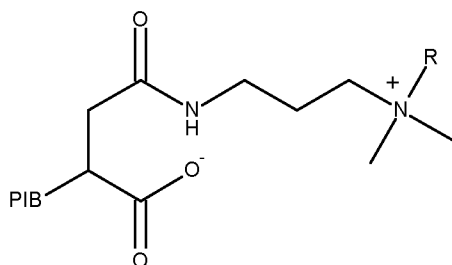

15

Usually at least one quaternary ammonium compound is used in the marine fuel, for example one to three, preferably one or two and especially one quaternary ammonium compound.

20 The at least one quaternary ammonium compound is used in the marine fuels in amounts of from 50 to 2000 ppm by weight, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight.

In exceptional cases, especially for testing purposes, the at least one quaternary ammonium compound is used in the marine fuels in amounts of from 20 to 5000 ppm by weight, preferably from 30 to 4000, and more preferably from 40 to 3000 ppm by weight.

- 5 In general the at least one quaternary ammonium compound is metered into the marine fuel as a solution in at least one solvent, for example, nonpolar organic solvents such as aromatic and aliphatic hydrocarbons, for example toluene, xylenes, white spirit and products sold under the trade names SHELLSOL (Royal Dutch/Shell Group) and EXXSOL (ExxonMobil), and also polar organic solvents, for example, alcohols such as 2-ethylhexanol, decanol and isotridecanol.

10 The mixing of the fuel and the at least one quaternary ammonium compound may be achieved by application of mechanical shear energy, e.g. in a stirred vessel or tank, shaking, rotor stator mixing, the turbulent flow through a pipe conveyed by pumps or by gravity, static mixers and counter current flow mixers. The mixing may also be achieved by a circulating the fuel through a
15 loop, e.g. by pumping them from the bottom of a tank to the top of the tank, where they are dumped on the surface of the tank content. Prior to the circulating of the fuel and the water a pre-stirring is possible, but not required. In a preferred embodiment the at least one quaternary ammonium compound may be metered into the loop during circulation.

- 20 In another embodiment that at least one quaternary ammonium compound may be metered into the fuel pipe before the fuel is conveyed into the combustion chamber.

The quaternary ammonium compounds may be part of additive packages, which further to the quaternary ammonium compounds may comprise one or more selected from the group consisting of dehazers, antioxidants, metal deactivators, and solvents
25

Dehazer

Suitable dehazer are, for example, the alkali metal or alkaline earth metal salts of alkyl-
30 substituted phenol- and naphthalenesulfonates and the alkali metal or alkaline earth metal salts of fatty acids, and also neutral compounds such as alcohol alkoxylates, e.g. alcohol ethoxylates, phenol alkoxylates, e.g. tert-butylphenol ethoxylate or tert-pentylphenol ethoxylate, fatty acids, alkylphenols, condensation products of ethylene oxide (EO) and propylene oxide (PO), for example including in the form of EO/PO block copolymers, polyethyleneimines or else polysilox-
35 anes.

Further suitable dehazers are EO/PO-based alkoxylates of alkylphenol-formaldehyde condensates (Novolac, resol or calixarene type), EO/PO-based alkoxylates of diols (e.g. propandiol, ethylene glycole), triols (e.g. glycerol or trimethylolpropane), ethylene diamine, or polyethyleneimine. Further suitable dehazers are alkybenzene sulfonic acids, dialkylsulfosuccinates or alkali metal or ammonium salts thereof. Suitable dehazers are described in WO 96/22343. Further suitable dehazers based on diglycidyl ethers are described in US 3383326 and US 3511882.

Other suitable dehazers are, for example, alkoxylated phenol-formaldehyde condensates, for example the products available under the trade names NALCO 7D07 (Nalco) and TOLAD 2683 (Petrolite).

Antioxidants

Suitable antioxidants are, for example, substituted phenols, such as 2,6-di-tert-butylphenol, 2,6-di-tert-butyl-4-methyl phenol, 2,4-di-tert-butyl-6-methylphenol, preferably hindered phenols with an ester group bearing radical in para position, such as 3-[3,5-bis-(dimethylethyl)-4-hydroxyphenyl] propanoic acid C₆- to C₂₀-alkyl esters, e.g. 2-ethylhexyl- or stearylester, and also phenylenediamines such as N,N'-di-sec-butyl-p-phenylenediamine.

20 Metal deactivators

Suitable metal deactivators are, for example, salicylic acid derivatives such as N,N'-disalicylidene-1,2-propanediamine.

25 Solvents

Suitable solvents are, for example, nonpolar organic solvents such as aromatic and aliphatic hydrocarbons, for example toluene, xylenes, white spirit and products sold under the trade names SHELLSOL (Royal Dutch/Shell Group) and EXXSOL (ExxonMobil), and also polar organic solvents, for example, alcohols such as 2-ethylhexanol, 2-propylheptanol, decanol, isotridecanol and isoheptadecanol. Such solvents are usually added to the fuel together with the aforementioned additives and coadditives, which they are intended to dissolve or dilute for better handling.

35 The above-mentioned quaternary ammonium compounds dissolve or disperse asphaltenes in marine fuels and are especially effective in marine fuels with a low weight ratio of aromatics to

asphaltenes. Thus, the quaternary ammonium compounds are especially effective against fouling of asphaltenes precipitating from marine fuels.

They are especially useful for removing and/or preventing precipitates from the marine-fuels in tanks, nozzles, flanges, pumps, fuel pipelines, fuel filters and/or separators.

The amounts given throughout the text refer to the pure components excluding e.g. solvent, unless stated otherwise.

Examples

10

Analytical Methods

SARA analyses were performed on the components according to IP 469 via TLC-FID using a Latroscan® MK 6 from company NTS America, Inc.

In addition, sulfur contents via EN ISO 8754:2003-12 were determined. Values are given in weight%, unless stated otherwise.

15

Total sediment (TSE) was determined according to ISO 10307-1:2009(E).

Potential total sediment (TSP) was determined according to ISO 10307-2:2009(E), procedure A. Accelerated total sediment (TSA) was determined according to ISO 10307-2:2009(E), procedure B.

20 Materials

4-Dodecylbenzenesulfonic acid (DBSA, CAS 121-65-3) was obtained from Aldrich.

N-Vinylpyrrolidone-Hexadecen-Copolymer Ganex™ V-216 (see WO 2012/039900) was obtained from company Ashland.

The inventive quaternary ammonium compound Quat1 was prepared from polyisobutene-substituted succinic anhydride (from polyisobutene with a molecular weight of 1000), 3-dimethylamino-propane-1-amine and propylene oxide (PO) in analogy to Herstellungsbeispiel 1 from WO 2012/004300 by replacing styrene oxide by PO.

25

Fuel components 1 to 4 were used for blending of Marine fuels:

	Component 1	Component 2	Component 3	Component 4
Saturates(1) [%]	6.38	6.45	42.67	11.14
Aromatics and Polyaromatics(1) [%]	34.23	82.78	17.87	85.24

Resins(1) [%]	47.6	9.94	18.84	3.07
Asphaltenes(1) [%]	11.79	0.82	20.62	0.56
Sulfur content [%]	0.77	0.94	0.03	0.066
TSE [%]	0.06	0.04	0.01	0.01
TSP [%]	0.06	0.04	0.01	0.01
TSA [%]	0.06	0.04	0.01	0.01

(1) Measured according to IP 469

Marine fuels 1-3 were blended according to the following table (wt%):

	Component 1	Component 2	Component 3	Component 4
Marine fuel 1	45%	10%	35%	10%
Marine fuel 2	32%	20%	38%	10%
Marine fuel 3	35%	20%	18%	27%

5 For Marine fuels 1-3 the following properties were calculated from their compositions:

	Marine fuel 1	Marine fuel 2	Marine fuel 3
Saturates(1) [%]	19.56	20.66	14.21
Aromatics and Poly-aromatics(1) [%]	38.46	42.83	54.77
Resins(1) [%]	29.32	24.69	22.87
Asphaltenes(1) [%]	12.66	11.83	8.15
Sulfur content [%]	0.46	0.45	0.48
Wt Ratio Aromatics : Asphaltenes	3.0	3.6	6.7

(1) Measured according to IP 469

The components were blended in the order 2, 4, 1, 3. In the case of dispersant additization, the respective additive was dissolved in component 2 and then blended in the other components were added in the order 4, 1, 3.

10

Type	Marine fuel	Additive	Additive dosage active compound [ppm]	TSP [%]	TSP improvement over reference
Reference	1	None		0.16	
Inventive Example 1	1	Quat1	250	0.11	-34%
Comparative Example 1	1	DBSA	562	0.17	+5%
Comparative Example 2	1	Ganex™ V-216	511	0.12	-25%
Reference	2	None		0.10	
Inventive Example 2	2	Quat1	250	0.06	-40%
Reference	3	None		0.03	
Inventive Example 3	3	Quat1	250	0.02	-26%

The potential total sediment (TSP value, total sediment aged) is the total amount of sediment that can be formed under normal storage conditions, excluding external influences. If the potential total sediment aged of the heavy fuel oil markedly exceeds the specification value (0.10% m/m maximum) for all grades of intermediate (IFOs) and heavy fuel oils (HFOs)), problems with the fuel cleaning system can occur, fuel filters can get plugged and combustion can become erratic.

	Marine fuel 1	Marine fuel 2	Marine fuel 3
Saturates(1) [%]	19.56	20.66	14.21
Aromatics and Polyaromatics(1) [%]	38.46	42.83	54.77
Resins(1) [%]	29.32	24.69	22.87
Asphaltenes(1) [%]	12.66	11.83	8.15
Wt Ratio Aromatics : Asphaltenes	3.0	3.6	6.7
TSP Improvement	-34%	-40%	-26%

(1) Measured according to IP 469

It can easily be seen that the quaternary compound according to the invention reduces the potential total sediment more than compounds known from the prior art. This effect is more pronounced the lower the content of aromatics and polyaromatics in the marine fuel respectively the weight ratio of aromatics to asphaltenes is.

Marine fuels 4 and 5 were commercially available with compositions as follows:

	Marine fuel 4	Marine fuel 5
Saturates(1) [%]	67.85	63.90
Aromatics and Polyaromatics(1) [%]	14.38	12.73
Resins(1) [%]	11.20	17.03
Asphaltenes(1) [%] IP 469)	6.57	6.33
Sulfur content [%]	0.47	0.47
Wt Ratio Aromatics (1) : Asphaltenes (1)	2.19	2.01

(1) Measured according to IP 469

Type	Marine fuel	Additive	Additive dosage active compound [ppm]	TSP [%]	TSP improvement over reference
Reference	4	None		0.22	
Inventive Example 4	4	Quat1	250	0.09	-55%
Reference	5	None		0.10	
Inventive Example 5	5	Quat1	250	0.07	-30%

Claims

1. Use of at least one quaternary ammonium compound for dissolving or dispersing asphalt-
tenes in marine fuels comprising
5 - 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP
469), preferably 5 to 60, more preferably 10 to 50 wt%
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP
469), preferably 20 to 80, more preferably 30 to 70 wt%, and
10 - 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP
469), preferably 3 to 25, more preferably 5 to 20 wt%,
with the proviso that the sum of saturates, aromatics, and asphaltenes is less than 100
wt%,
wherein
the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more
15 than 6.0, more preferably not more than 5.5, very more preferably not more than 5.0,
even more preferably not more than 4.5, and especially not more than 4.0.

2. Marine fuel composition, comprising
- 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP
20 469), preferably 5 to 60, more preferably 10 to 50 wt%,
- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP
469), preferably 20 to 80, more preferably 30 to 70 wt%,
- 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP
469), preferably 3 to 25, more preferably 5 to 20 wt%, and
25 - 50 to 2000 ppm by weight of at least one quaternary ammonium compound, prefera-
bly 60 to 1500, and more preferably 70 to 1000 ppm by weight,
wherein
the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more
than 6.0, more preferably not more than 5.5, very more preferably not more than 5.0,
30 even more preferably not more than 4.5, and especially not more than 4.0.

3. Process for reducing or preventing fouling caused by asphaltenes in marine fuels compris-
ing
- 5 to 70 wt% saturates (determined according to SARA analysis using TLC-FID, IP

469), preferably 5 to 60, more preferably 10 to 50 wt%,

- 10 to 85 wt% aromatics (determined according to SARA analysis using TLC-FID, IP 469), preferably 20 to 80, more preferably 30 to 70 wt%,

- 1 to 30 wt% asphaltenes (determined according to SARA analysis using TLC-FID, IP 469), preferably 3 to 25, more preferably 5 to 20 wt%, and

wherein

the weight ratio of aromatics to asphaltenes is not more than 7.0, preferably not more than 6.0, more preferably not more than 5.5, very more preferably not more than 5.0, even more preferably not more than 4.5, and especially not more than 4.0.

by adding 50 to 2000 ppm by weight of at least one quaternary ammonium compound to the said marine fuel, preferably 60 to 1500, and more preferably 70 to 1000 ppm by weight.

4. Process according to Claim 3, wherein the potential total sediment (TSP) value, determined according to ISO 10307-2:2009(E), procedure A, of the unadditised marine fuel is reduced by at least 25 %, preferably by at least 30 %, more preferably by at least 35 %, and even by at least 40 % by adding the indicated amounts of at least one quaternary ammonium compound to the said marine fuel.

5. Use according to Claim 1, marine fuel according to Claim 2 or process according to Claim 3 or 4, wherein the marine fuel is selected from the group consisting of ISO-F- DMX, DMA, DFA, DMZ, DFZ, or DFB, or ISO-F RMA, RMB, RMD, RME, RMG, and RMK according to DIN ISO 8217.

6. Use according to Claim 1, marine fuel according to Claim 2 or process according to Claim 3 or 4, wherein the marine fuel is selected from the group consisting of MGO (Marine gas oil), MDO (Marine diesel oil), IFO (Intermediate fuel oil), MFO (Marine fuel oil), HFO (Heavy fuel oil), IFO 380 (<3.5% sulphur), IFO 180 (<3.5% sulphur), LS 380 (<1.0% sulphur), LS 180 (<1.0% sulphur), LSMGO (<0.1% sulphur, and ULSMGO

(sulphur 0.0015% max), especially a very low sulfur fuel oil (VLSFO) with a sulfur content of not more than 0.5 %.

7. Use, marine fuel, and process according to any one of the preceding claims, wherein the

5 at least one quaternary ammonium compound is of the formula



in which

10

A⁻ stands for an anion, preferably a carboxylate R⁵COO⁻ or a carbonate R⁵O-COO⁻,

and

15

R¹, R², R³, R⁴, and R⁵ independently of another are an organic residue with from 1 to 100 carbon atoms, substituted or unsubstituted, linear or branched alkyl, alkenyl or hydroxyalkyl residue with 1 to 100, more preferably 1 to 75, even more preferably 1 to 30, most preferably 1 to 25 and especially 1 to 20 carbon atoms,


20

R⁵ additionally may be substituted or unsubstituted cycloalkyl or aryl residues bearing 5 to 20, preferably 5 to 12 carbon atoms.

8. Use, marine fuel, and process according to any one of the preceding claims, wherein the

at least one quaternary ammonium compound is of formula

25

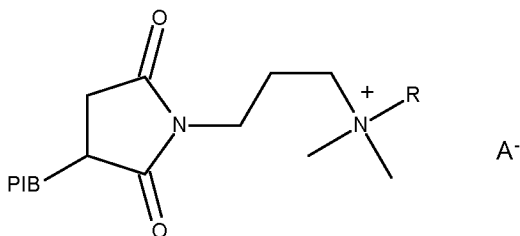

wherein in this formula


5 PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,

R stands for an C_1 - to C_4 -alkyl or hydroxy- C_1 - to C_4 -alkyl, preferably methyl or 2-hydroxypropyl, and

10 A⁻ stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably acetate, salicylate or methyloxalate.

9. Use, marine fuel, and process according to any one of the preceding claims, wherein the at least one quaternary ammonium compound is of formula

15

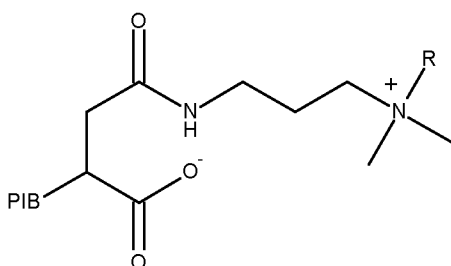


wherein in this formula

PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,

5 R stands for a hydroxy- C_{1-} to C_{4-} alkyl, preferably 2-hydroxypropyl.

10. Use, marine fuel, and process according to any one of the preceding claims, wherein the at least one quaternary ammonium compound is of formula

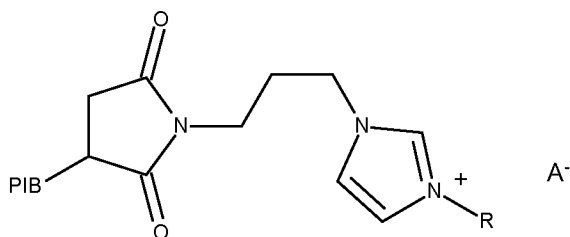

10

wherein in this formula

PIB stands for a polyisobutenyl residue having a number average molecular weight M_n of from 550 to 2300, preferably from 650 to 1500 and more preferably from 750 to 1300 g/mol,


15

R stands for an C_{1-} to C_{4-} alkyl or hydroxy- C_{1-} to C_{4-} alkyl, preferably methyl, and

A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate R^5O-COO^- as defined above, more preferably salicylate or methyloxalate.

20

11. Use, marine fuel, and process according to any one of the preceding claims, wherein the at least one quaternary ammonium compound is of formula

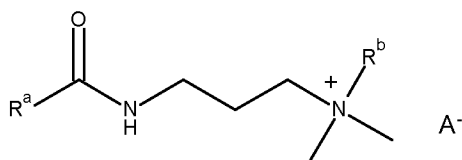

wherein in this formula

5


R^a stands for C_1 - C_{20} -alkyl, preferably C_9 - to C_{17} -alkyl, more preferably for undecyl, tridecyl, pentadecyl or heptadecyl,

R^b stands for a hydroxy- C_1 - to C_4 -alkyl, preferably 2-hydroxypropyl or 2-hydroxybutyl, and

10

A^- stands for an anion, preferably carboxylate R^5COO^- , as defined above, more preferably R^5COO^- being a carboxylate of a fatty acid, especially A^- being acetate, 2-ethylhexanoate, oleate, polyisobutenyl succinate or monoesters of polyisobutenyl succinate.

- 15 12. Use, marine fuel, and process according to any one of the preceding claims, wherein the at least one quaternary ammonium compound is of formula

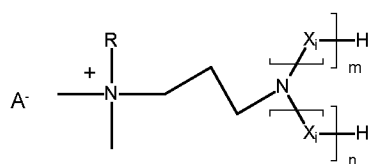

20


wherein in this formula

X_i for $i = 1$ to n and 1 to m are independently of another selected from the group consisting of $-\text{CH}_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}(\text{CH}_3)-\text{O}-$, preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}(\text{CH}_3)-\text{O}-$, more preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$, $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{C}(\text{CH}_3)_2-\text{O}-$, $-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$ and $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$, most preferably selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{C}_2\text{H}_5)-\text{O}-$, $-\text{CH}(\text{C}_2\text{H}_5)-\text{CH}_2-\text{O}-$, $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$, and especially selected from the group consisting of $-\text{CH}_2-\text{CH}(\text{CH}_3)-\text{O}-$ and $-\text{CH}(\text{CH}_3)-\text{CH}_2-\text{O}-$,

m and n independently of another are positive integers, with the proviso that the sum $(m + n)$ is from 2 to 50, preferably from 5 to 40, more preferably from 10 to 30, and especially from 15 to 25,

R stands for an C_1 - to C_4 -alkyl, preferably methyl, and A^- stands for an anion, preferably carboxylate R^5COO^- or a carbonate $\text{R}^5\text{O}-\text{COO}^-$ as defined above, more preferably salicylate or methyloxalate.

13. Use, marine fuel, and process according to any one of the preceding claims, wherein the at least one quaternary ammonium compound is of formula



wherein in this formula

R^a and R^b independently of another stand for C₁-C₂₀-alkyl or hydroxy-C₁- to C₄-alkyl,
5 preferably R^a stands for C₁-C₂₀-alkyl, preferably ethyl, n-butyl, n-octyl, n-dodecyl,
tetradecyl or hexadecyl, and R^b stands for hydroxy-C₁- to C₄-alkyl, preferably 2-
hydroxypropyl,

A⁻ stands for an anion, preferably carboxylate R⁵COO⁻ or a carbonate R⁵O-COO⁻ as de-
fined above, more preferably C₁₂-C₁₀₀-alkyl- and -alkenyl succinic acid, especially do-
10 decenyl succinic acid, hexadecenyl succinic acid, eicosenyl succinic acid, and polyiso-
butenyl succinic acid.

14. Use of quaternary ammonium compounds as described in any one of the Claims 7 to 13
in marine fuels with a content of aromatics and polyaromatics according to IP 469 of
15 not more than 50 wt%, more preferably not more than 45 wt%.

15. Use, marine fuel, and process according to any one of the preceding claims, wherein the
at least one quaternary ammonium compound is used in the marine fuel in amounts of
from 20 to 5000 ppm by weight, preferably from 30 to 4000, and more preferably from
20 40 to 3000 ppm by weight.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2022/078249

A. CLASSIFICATION OF SUBJECT MATTER		
INV. C10G29/20	C10L1/222	C10L10/04
C10L1/16	C10L1/24	C10L10/18
ADD.		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols) C10G C10L		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) EPO-Internal, WPI Data		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2020/224974 A1 (BASF SE [DE]) 12 November 2020 (2020-11-12) claims 1, 10 page 2, lines 17-31 -----	1-15
X	WO 2014/193692 A1 (LUBRIZOL CORP [US]) 4 December 2014 (2014-12-04) cited in the application paragraphs [0018] - [0022] claim 1 -----	1-15
X	US 2020/199472 A1 (KERBY PAUL [GB] ET AL) 25 June 2020 (2020-06-25) paragraphs [0065] - [0072] claims 1, 6, 13, 14 -----	1-15
	-/--	
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
23 January 2023		31/01/2023
Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016		Authorized officer Pardo Torre, J

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2022/078249

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2021/253965 A1 (WOODCHICK MATTHEW T [US] ET AL) 19 August 2021 (2021-08-19) Compositions LSFO #1, LSFO #2, LSFO #4 -----	1-15
A	CN 112 831 362 A (CNOOC TIANJIN CHEMICAL RES & DESIGN INST CO LTD ET AL.) 25 May 2021 (2021-05-25) example 4 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2022/078249

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2020224974 A1	12-11-2020	CA 3137410 A1	12-11-2020
		CN 113785036 A	10-12-2021
		EP 3963032 A1	09-03-2022
		JP 2022530552 A	29-06-2022
		KR 20220003044 A	07-01-2022
		SG 11202111935S A	29-11-2021
		US 2022220401 A1	14-07-2022
		WO 2020224974 A1	12-11-2020
		WO 2014193692 A1	04-12-2014
CA 2913539 A1	04-12-2014		
CN 105408458 A	16-03-2016		
EP 2984156 A1	17-02-2016		
PE 20151930 A1	14-01-2016		
RU 2015151055 A	29-06-2017		
SG 11201509630P A	30-12-2015		
US 2016046855 A1	18-02-2016		
WO 2014193692 A1	04-12-2014		
US 2020199472 A1	25-06-2020	CA 3064222 A1	20-06-2020
		CN 111349480 A	30-06-2020
		JP 2020109161 A	16-07-2020
		KR 20200077414 A	30-06-2020
		SG 10201911806R A	29-07-2020
		US 2020199472 A1	25-06-2020
US 2021253965 A1	19-08-2021	CA 3109606 A1	19-08-2021
		CA 3109675 A1	19-08-2021
		US 2021253960 A1	19-08-2021
		US 2021253964 A1	19-08-2021
		US 2021253965 A1	19-08-2021
		US 2021261874 A1	26-08-2021
		US 2022251462 A1	11-08-2022
		US 2022298440 A1	22-09-2022
CN 112831362 A	25-05-2021	NONE	