



US008805092B2

(12) **United States Patent**  
**Wakebe**

(10) **Patent No.:** **US 8,805,092 B2**

(45) **Date of Patent:** **\*Aug. 12, 2014**

(54) **STORE SYSTEM, READING APPARATUS,  
AND SALES REGISTRATION APPARATUS**

(71) Applicant: **Toshiba Tec Kabushiki Kaisha**, Tokyo  
(JP)

(72) Inventor: **Satoshi Wakebe**, Tokyo (JP)

(73) Assignee: **Toshiba Tec Kabushiki Kaisha**, Tokyo  
(JP)

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-  
claimer.

(21) Appl. No.: **13/932,165**

(22) Filed: **Jul. 1, 2013**

(65) **Prior Publication Data**

US 2013/0297433 A1 Nov. 7, 2013

**Related U.S. Application Data**

(63) Continuation of application No. 13/220,884, filed on  
Aug. 30, 2011, now Pat. No. 8,503,795.

(30) **Foreign Application Priority Data**

Sep. 1, 2010 (JP) ..... 2010-196204

(51) **Int. Cl.**  
**G06K 9/68** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **382/218**; 705/414; 382/100

(58) **Field of Classification Search**

None

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

5,426,282 A \* 6/1995 Humble ..... 235/383  
5,546,475 A \* 8/1996 Bolle et al. .... 382/190

6,363,366 B1 3/2002 Henty  
7,227,973 B2 \* 6/2007 Ishiyama ..... 382/103  
2007/0057049 A9 3/2007 Kundu et al.

**FOREIGN PATENT DOCUMENTS**

JP 08-221577 8/1996  
JP 08-227480 9/1996  
JP 2003-187335 7/2003  
JP 2004-206357 7/2004  
JP 2008-033640 2/2008

**OTHER PUBLICATIONS**

Japanese Office Action for Japanese Application No. 2010-196204  
mailed on Oct. 16, 2012.

English Translation of Office Action of Decision of Rejection for  
Japanese Patent Application No. 2010-196204 Dated Apr. 30, 2013,  
6 pgs.

U.S. Office Action mailed Dec. 19, 2012 corresponding to U.S. Appl.  
No. 13/220,884, filed Aug. 30, 2011.

\* cited by examiner

*Primary Examiner* — Bhavesh Mehta

*Assistant Examiner* — Siamak Harandi

(74) *Attorney, Agent, or Firm* — Amin, Turocy & Watson,  
LLP

(57) **ABSTRACT**

A store system includes a reading unit that includes an image  
acquiring unit and an image output unit, and a sales registra-  
tion apparatus that includes a similar image detection unit and  
a sales registration unit. The image acquiring unit acquires an  
image that is captured by an image capturing unit. The image  
output unit outputs the acquired image. The similar image  
detection unit detects an image of a product that is similar to  
at least a portion of the output image by referencing product  
management information in which information relating to  
sales registration of a product and an image of the product are  
associated for each product. The sales registration unit regis-  
ters sales of a product based on information relating to the  
sales registration associated with the image of the detected  
product.

**3 Claims, 6 Drawing Sheets**

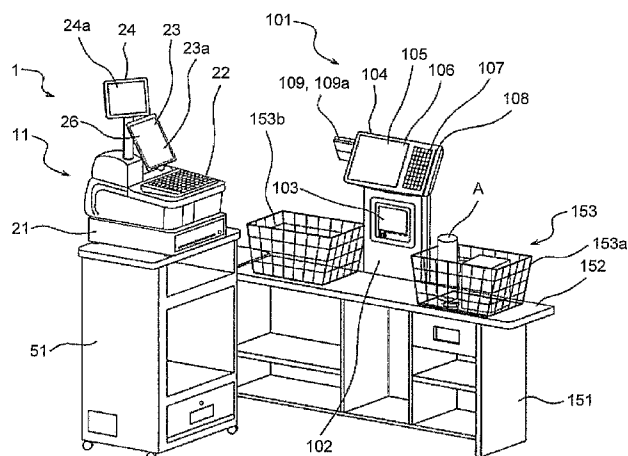


FIG. 1

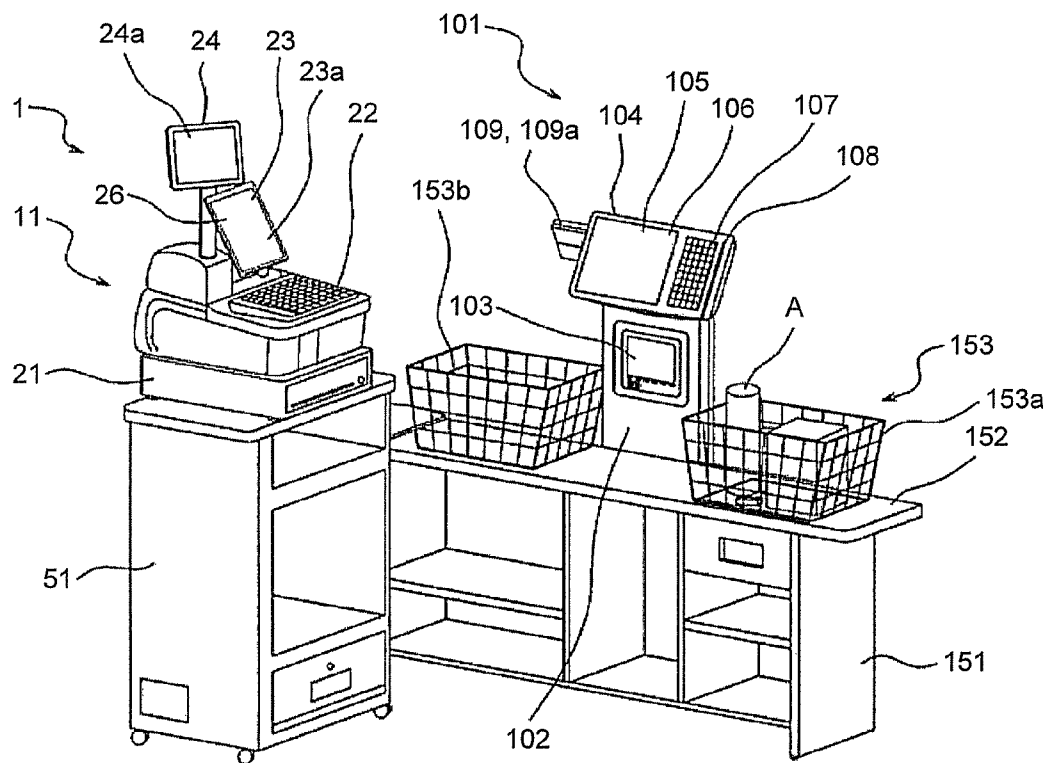


FIG. 2

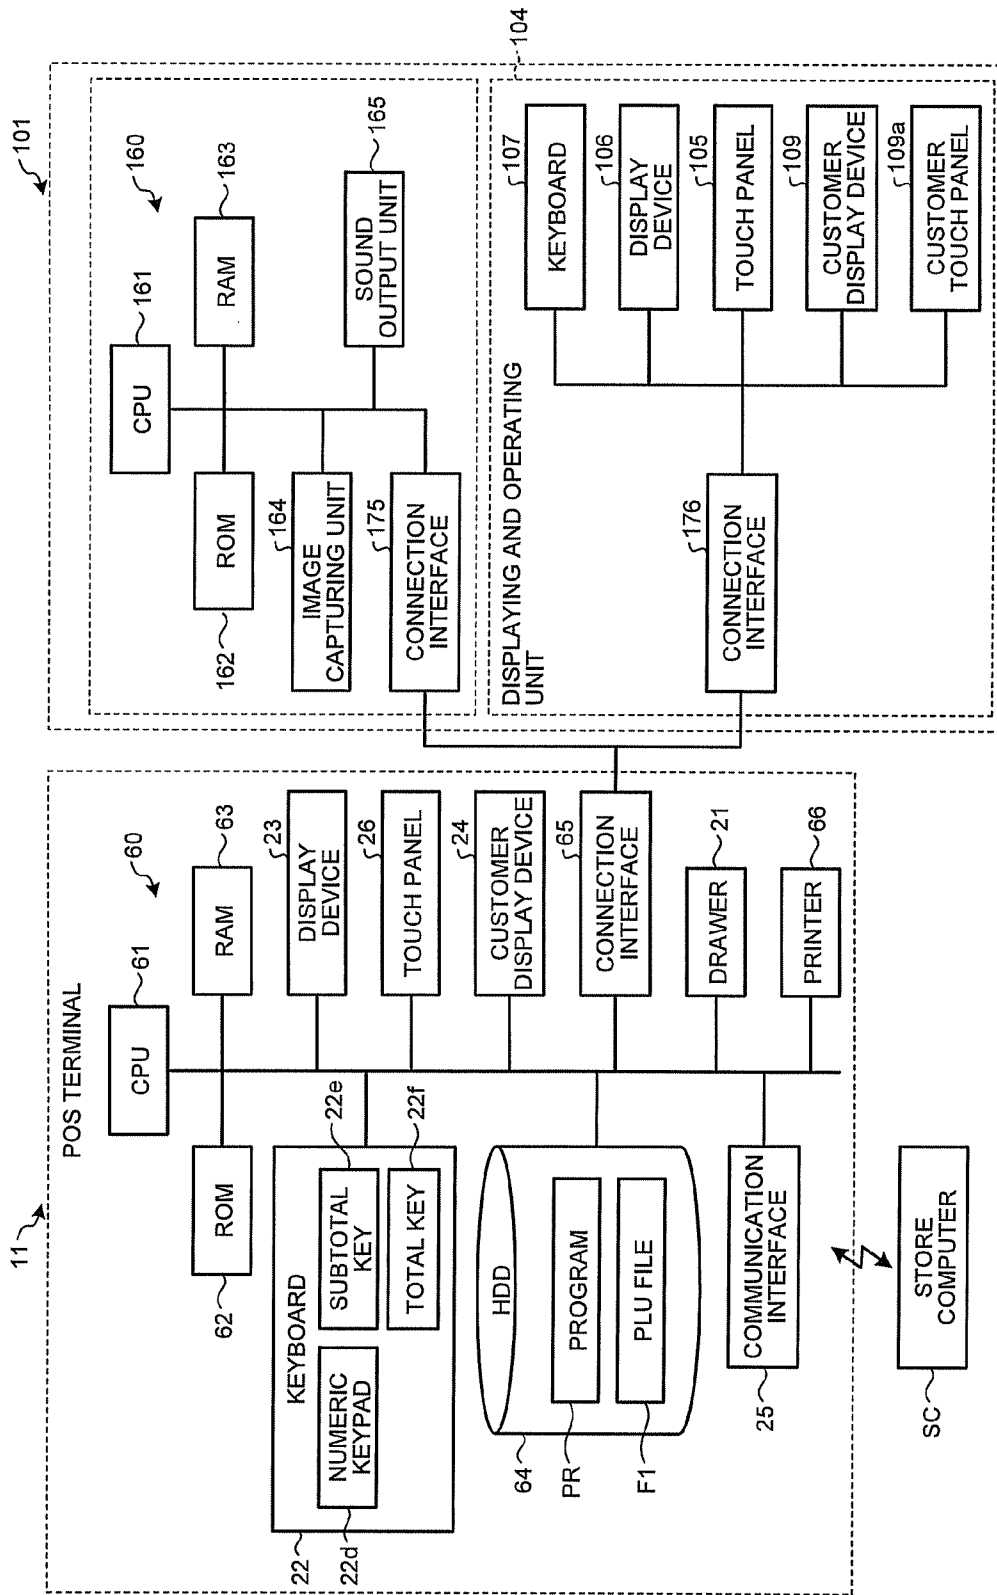


FIG.3

F1


PRODUCT ID	PRODUCT CATEGORY	PRODUCT NAME	UNIT PRICE	PRODUCT IMAGE
XXXXXXXX	VEGETABLE	CARROT	¥ 200	
⋮	⋮	⋮	⋮	⋮

FIG.4

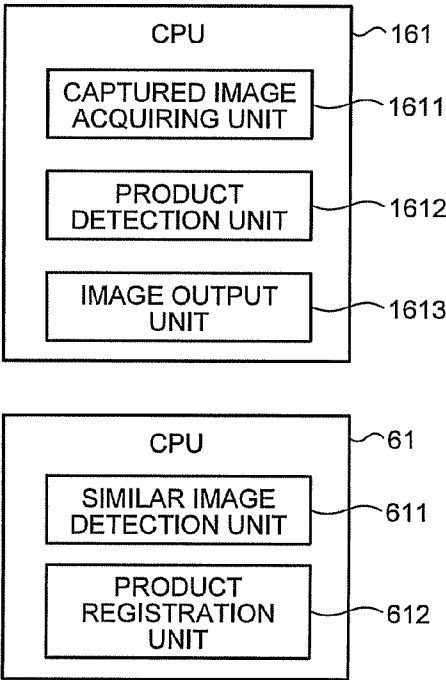


FIG.5

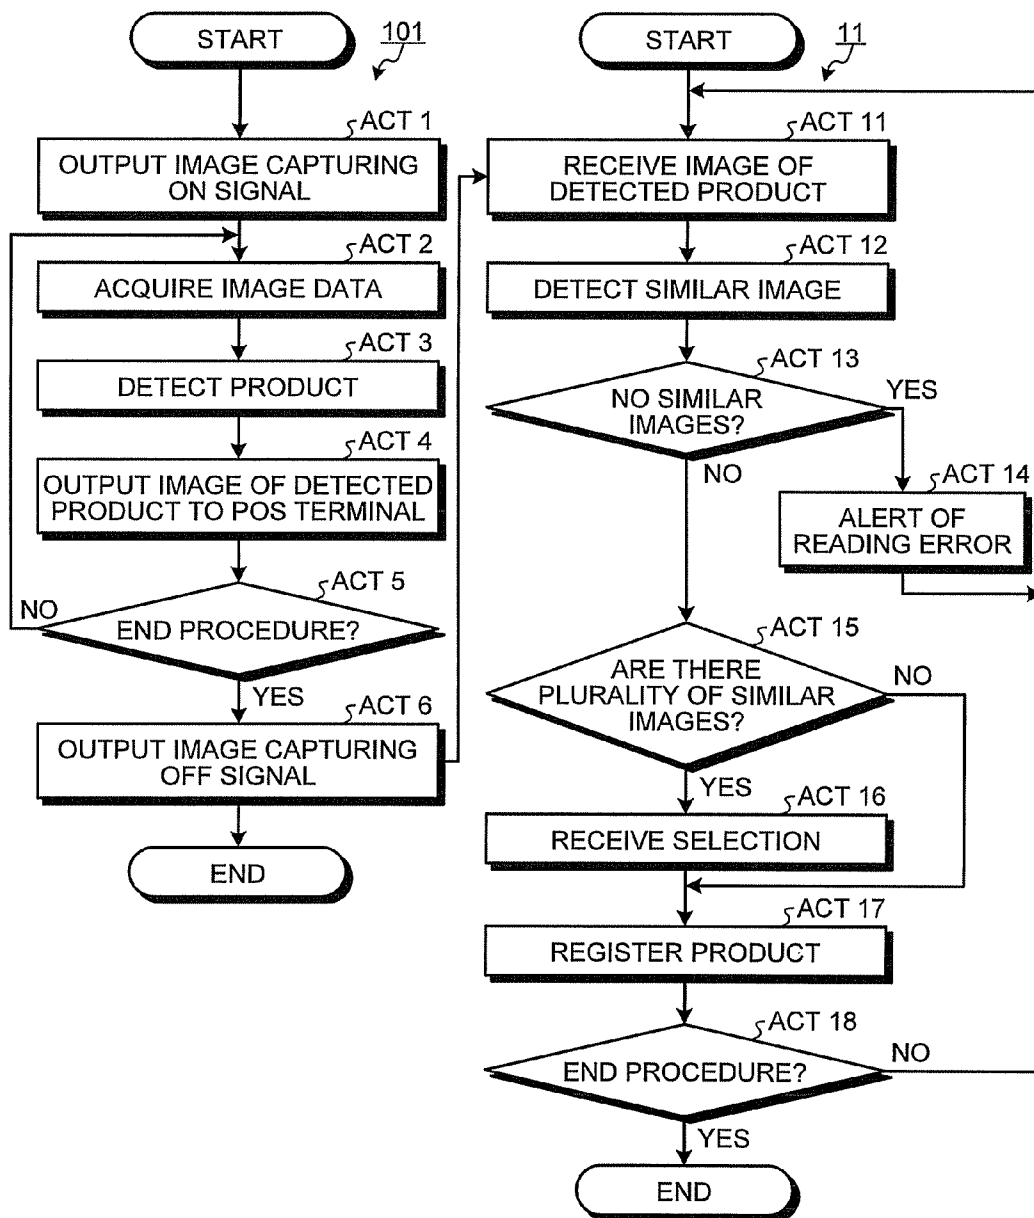


FIG.6

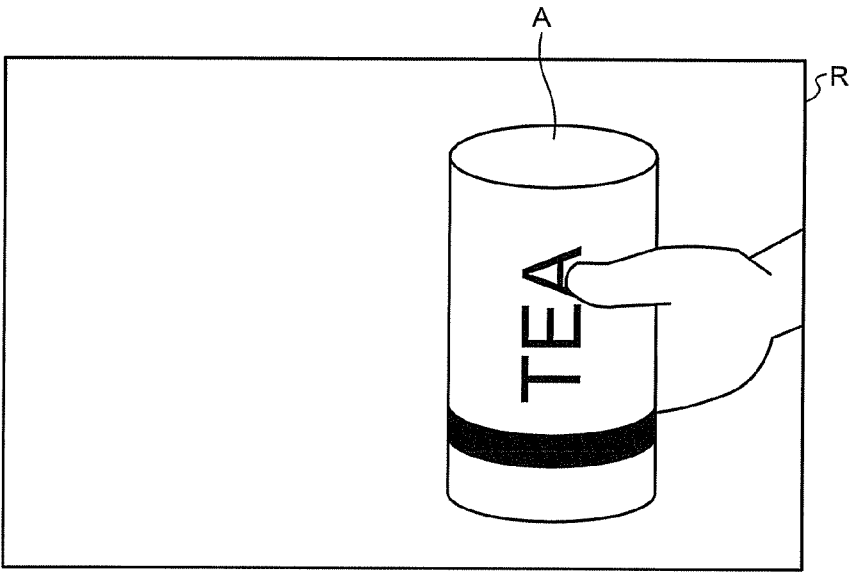


FIG.7

F1



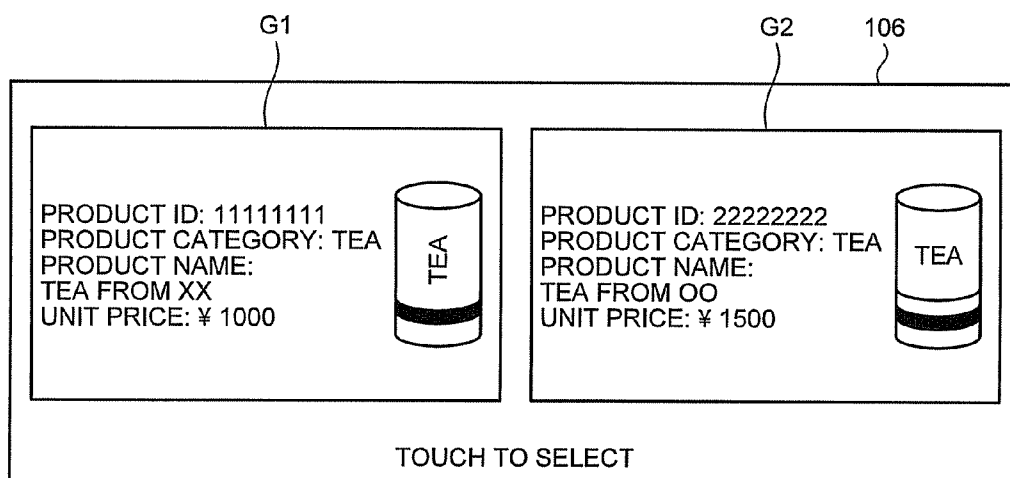
PRODUCT ID	PRODUCT CATEGORY	PRODUCT NAME	UNIT PRICE	PRODUCT IMAGE
⋮	⋮	⋮	⋮	⋮
11111111	TEA	TEA FROM XX	¥ 1000	 D1
22222222	TEA	TEA FROM OO	¥ 1500	 D2
⋮	⋮	⋮	⋮	⋮

FIG. 8



1

# STORE SYSTEM, READING APPARATUS, AND SALES REGISTRATION APPARATUS

## CROSS-REFERENCE TO RELATED APPLICATION

This application is a Continuation of application Ser. No. 13/220,884 filed on Aug. 30, 2011; the entire contents of which are incorporated herein by reference.

This application is based upon and claims the benefit of priority from Japanese patent application number 2010-196204, filed on Sep. 1, 2010, the entire contents of which are incorporated herein by reference.

## FIELD

Embodiments described herein relate generally to a store system, a reading apparatus, and a sales registration apparatus.

## BACKGROUND

Conventionally, in stores such as supermarkets, a product code reading apparatus that image captures a code symbol such as a barcode or a two-dimensional code (for example, a QR code (registered trademark)) that is attached to a product by a digital camera such as a CCD image sensor and which reads a product code by detecting and decoding a code symbol from the captured image is used. A store clerk registers a product that a customer purchases by taking out a product that is kept in a shopping basket that the customer brings over to a counter and holding the product over the digital camera of the product code reading apparatus.

However, with the product registration of the related art described above, since a code symbol that is attached on the product is image captured, there is need for the store clerk to identify a location where the code symbol is attached when handling the product and to turn the code symbol toward the digital camera. In particular, since the location where the code symbol is attached is different for each product, there are cases when the store clerk takes time in identifying the location where the code symbol is attached.

## DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a perspective diagram of a checkout system.

FIG. 2 illustrates a block diagram of a hardware configuration of a POS terminal and a product reading apparatus.

FIG. 3 is a conceptual diagram which exemplifies a data configuration of a PLU file.

FIG. 4 illustrates a block diagram of a functional configuration of a CPU.

FIG. 5 illustrates a flowchart of one example of an action of a checkout system according to the embodiment.

FIG. 6 illustrates a conceptual diagram of an example of a reading region in a reading window.

FIG. 7 illustrates a conceptual diagram of one example of registration data that is registered on the PLU file.

FIG. 8 illustrates a conceptual diagram of a display example of a display device.

## DETAILED DESCRIPTION

In order to solve the problems described above, an embodiment is a store system that includes a reading apparatus that includes an image acquiring unit and an image output unit,

2

and a sales registration apparatus that includes a similar image detection unit and a sales registration unit. The image acquiring unit acquires an image that is captured by an image capturing unit. The image output unit outputs the acquired image. The similar image detection unit detects an image of a product that is similar to at least a portion of the output image by referencing product management information in which information relating to sales registration of a product and an image of the product are associated for each product. The sales registration unit registers sales of a product based on information relating to the sales registration associated with the image of the detected product.

In addition, another embodiment is a reading apparatus that includes an image acquiring unit, a product detection unit, and an image output unit. The image acquiring unit acquires an image that is captured by an image capturing unit. The product detection unit detects a product that is included in the acquired image. The image output unit outputs the acquired image when a product is detected.

Furthermore, still another embodiment is a sales registration apparatus that includes a similar image detection unit and a sales registration unit. The similar image detection unit detects an image of a product that is similar to at least a portion of a captured image of a product for which sales is to be registered by referencing product management information in which information relating to sales registration of a product and an image of the product are associated for each product. The sales registration unit registers sales of a product based on information relating to the sales registration associated with the image of the detected product.

The store system, the reading apparatus, and the sales registration apparatus according to the embodiments will be described below with reference to the drawings, with a checkout system as an example. The checkout system has a configuration that includes a POS terminal as the sales registration apparatus that performs registration and clearing of a product for a single transaction, and a code reading apparatus that reads a product code and the like that is attached to the product, and is one example of the store system. The embodiment is an application example of a checkout system that is installed in stores such as restaurants and supermarkets.

FIG. 1 illustrates a perspective diagram of a checkout system 1. As illustrated in FIG. 1, the checkout system 1 includes a POS terminal 11 that performs registration and clearing of a product for a single transaction. The POS terminal 11 is placed on an upper surface of a drawer 21 over a checkout stand 51. The drawer 21 receives control of a releasing action by the POS terminal 11. A keyboard 22 that is operated by being pressed down by an operator (store clerk) is arranged on an upper surface of the POS terminal 11. A display device 23 that displays information to the operator is provided further back from the keyboard 22 as seen by the operator that operates the keyboard 22. The display device 23 displays information on a display surface 23a thereof. A touch panel 26 is laminated on the display surface 23a. A customer display device 24 is provided upright to be rotatable further back from the display device 23. The customer display device 24 displays information on a display surface 24a thereof. Here, although the customer display device 24 illustrated in FIG. 1 has the display surface 24a facing the front side of FIG. 1, by rotating the customer display device 24 so that the display surface 24a faces the back side of FIG. 1, the customer display device 24 displays information facing a customer.

An oblong counter stand 151 is arranged so as to form an L shape with the checkout stand 51 on which the POS terminal 11 is placed. A load-bearing surface 152 is formed on an upper surface of the counter stand 151. A shopping basket 153

that holds products A is placed on the load-bearing surface **152**. The shopping basket **153** can be thought of separately as a first shopping basket **153a** that is brought by the customer and a second shopping basket **153b** that is positioned at a position that interposes a product reading apparatus **101** with the first shopping basket **153a**.

The product reading apparatus **101** that is connected to the POS terminal **11** to be able to freely transmit and receive data is installed on the load-bearing surface **152** of the counter stand **151**. The product reading apparatus **101** includes a flat rectangular housing **102**. A reading window **103** is arranged on a front surface of the housing **102**. A displaying and operating unit **104** is affixed to an upper portion of the housing **102**. A display device **106** on a front surface of which a touch panel **105** is laminated is provided on the displaying and operating unit **104**. A keyboard **107** is arranged next to the display device **106** on the right. A card reading slit **108** of a card reader (not shown) is provided next to the keyboard **107** to the right. A customer display device **109** that is a display device provided to face the customer for displaying information to the customer is installed to the back left side of a back surface of the displaying and operating unit **104** as seen by the operator. A customer touch panel **109a** is laminated on a display surface of the customer display device **109**.

The first shopping basket **153a** that is brought by the customer contains the products A for one transaction. The products A are moved to the second shopping basket **153b** by a hand of the operator. The products A are pointed to the reading window **103** of the product reading apparatus **101** by such a movement process. At this time, an image capturing unit **164** (refer to FIG. 2) that is arranged to the back side of the reading window **103** image captures the products A. In the product reading apparatus **101**, when it is detected that images captured by the image capturing unit **164** include the products A, the captured images are output to the POS terminal **11**. In the POS terminal **11**, images of the products A that are similar to at least a portion of regions of the output images are detected by referencing a PLU file F1 (details will be described later) in which information relating to sales registration of the products A and the images of the products A are associated for each of the products A. Next, in the POS terminal **11**, sales of the products A are registered based on information relating to the sales registrations related to the detected images of the products A.

FIG. 2 illustrates a block diagram of a hardware configuration of the POS terminal **11** and the product reading apparatus **101**. The POS terminal **11** is provided with a microcomputer **60** as an information processing unit that executes information processing. The microcomputer **60** is configured by a ROM **62** (Read Only Memory) and a RAM **63** (Random Access Memory) connected by a bus to a CPU **61** (Central Processing Unit) that executes various types of calculation processes and controls each unit.

The drawer **21**, the keyboard **22**, the display device **23**, the touch panel **26**, and the customer display device **24** described above are all connected via various types of input and output circuits (none of which are shown) in the CPU **61** of the POS terminal **11**. Such parts receive control from the CPU **61**.

The keyboard **22** includes a numeric keypad **22d** in which numbers such as "1", "2", "3" . . . and an operator for multiplying that is "x" are displayed on an upper surface, a subtotal key **22e**, and a total key **22f**. The keyboard **22** outputs operation inputs of the operator by the numeric keypad **22d**, the subtotal key **22e**, and the total key **22f** to the CPU **61**. The keyboard **22** is an operating unit configured to receive an operation from the operator.

An HDD **64** (Hard Disk Drive) **64** is connected to the CPU **61** of the POS terminal **11**. Programs and various types of files are stored on the HDD **64**. The programs and various types of files that are stored on the HDD **64** have the entirety or a portion thereof copied to the RAM **63** when the POS terminal **11** is started and are sequentially executed by the CPU **61**. A program PR for product marketing data processing is one example of the program that is stored on the HDD **64**. The PLU file F1 that is transmitted from a store computer SC and stored in advance is one example of the file that is stored on the HDD **64**.

The PLU file F1 is a file in which information relating to the sales of the products A and images of the Products A are associated for each of the products A displayed and marketed in stores. FIG. 3 is a conceptual diagram that exemplifies a data configuration of the PLU file F1. As illustrated in FIG. 3, the PLU file F1 stores information relating to a product such as a product category to which each of products A belongs, a product name, and a unit price, and a product image in which the product is image captured for each product ID that is assigned uniquely to the products A. When the product A that is to have a sales registration performed is read by the product reading apparatus **101**, the POS terminal **11** specifies the product A that is to have the sales registration performed by referencing the PLU file F1 and detecting a similar product image, and performs the sales registration by recording information relating to the sales registration such as the product ID, the product category, the product name, and the unit price of the specified product A on a sales master file (not shown).

Returning to FIG. 2, a communication interface **25** for executing data communication with the store computer SC is connected to the CPU **61** of the POS terminal **11** via input and output circuits (not shown). The store computer SC is installed in a backyard or the like of a store. The PLU file F1 that is transmitted to the POS terminal **11** is stored in an HDD (not shown) of the store computer SC.

A connection interface **65** that makes data transceiving with the product reading apparatus **101** possible is connected to the CPU **61** of the POS terminal **11**. Therefore, the connection interface **65** is connected to the product reading apparatus **101**. Further, a printer **66** that performs printing on a receipt or the like is connected to the CPU **61** of the POS terminal **11**. The POS terminal **11** prints a transaction content (cleared amount or points awarded) or like of one transaction on the receipt under the control of the CPU **61**.

The product reading apparatus **101** also includes a microcomputer **160**. The microcomputer **160** is configured by a ROM **162** and a RAM **163** being connected by a bus to a CPU **161**. A program that is executed by the CPU **161** is stored in the ROM **162**. The image capturing unit **164** and a sound output unit **165** are connected to the CPU **161** via various types of input and output circuits (none of which are shown). Actions of the image capturing unit **164** and the sound output unit **165** are controlled by the CPU **161**. The displaying and operating unit **104** is connected to the POS terminal **11** via a connection interface **176**. Actions of the displaying and operating unit **104** are controlled by the CPU **61** of the POS terminal **11**.

The image capturing unit **164** is a CCD image sensor, a CMOS image sensor, or the like, and performs image capturing from the reading window **103** under the control of the CPU **161**. For example, in the image capturing unit **164**, image capturing of a moving image of 30 fps is performed. Frame images that are sequentially image captured by a predetermined frame rate by the image capturing unit **164** are saved in the RAM **163**. The sound output unit **165** is a sound circuit, a speaker, or the like that generates a warning sound or

5

the like that is set in advance. The sound output unit **165** alerts of sounds such as a warning sound under the control of the CPU **161**.

Furthermore, a connection interface **175** that is connected to the connection interface **65** of the POS terminal **11** and that makes data transceiving with the POS terminal **11** possible is connected to the CPU **161**. Under the control of the CPU **161**, an image that is image captured by the image capturing unit **164** of the product reading apparatus **101** is output via the connection interface **175** and input to the POS terminal **11** via the connection interface **65**.

Next, functional units of the CPU **161** and the CPU **61** that are realized by the CPU **161** and the CPU **61** sequentially executing programs will be described with reference to FIG. **4**. FIG. **4** illustrates a block diagram of the functional configurations of the CPU **161** and the CPU **61**. As illustrated in FIG. **4**, the CPU **161** includes functions as a captured image acquiring unit **1611**, a product detection unit **1612**, and an image output unit **1613** by sequentially executing programs. Similarly, the CPU **61** includes functions as a similar image detection unit **611** and a product registration unit **612**.

The captured image acquiring unit **1611** causes the image capturing unit **164** to start an image capturing action by outputting an image capturing ON signal to the image capturing unit **164**. The captured image acquiring unit **1611** sequentially acquires frame images that the image capturing unit **164** image captures after starting the image capturing action and which are saved in the RAM **163**. The acquisition of the frame images by the captured image acquiring unit **1611** is performed in the order that the frame images are saved in the RAM **163**.

The product detection unit **1612** detects products that are included in the frame images, which are acquired by the captured image acquiring unit **1611**, using a pattern matching technique or the like. Specifically, outlines or the like are extracted from images in which the acquired frame images are binarized. Next, outlines extracted from the nearest frame images and an outline extracted from the present frame image are compared, and portions where there are changes, that is, appearances of products that are directed to the reading window **103** for sales registration, are detected. Here, as a different method of detecting a product, the presence or absence of skin-colored regions are detected from the acquired frame images. Next, when skin-colored regions are detected, that is, when an appearance of a hand of a store clerk is detected, extraction of an outline of a product that is supposed to be held in the hand of the store clerk is attempted by performing detection of the outlines described above. At this time, when an outline that shows the shape of a hand and an outline other than such an outline are detected, the appearance of the product is detected from the fact that the hand of the store clerk is holding the product.

The image output unit **1613** outputs the frame images acquired by the captured image acquiring unit **1611** to the POS terminal **11** via the connection interface **175**. Although the image output unit **1613** may successively output the frame images acquired by the captured image acquiring unit **1611** to the POS terminal **11**, in the embodiment, frame images in which the product is detected by the product detection unit **1612** are output to the POS terminal **11**. In such a manner, by outputting frame images in which the product is detected by the product detection unit **1612** to the POS terminal **11**, detection of a similar image in which the PLU file **F1** is referenced by frame images that do not include a product is able to be prevented from being performed in the POS terminal **11**. Since image processing such as detection of similar images takes time to process, by preventing processing of frame

6

images that do not include products and for which there is no prospect of detecting a similar image, it is possible to shorten the processing time.

The similar image detection unit **611** detects a product image that is similar to at least a portion of a region of the image that is output from the product reading apparatus **101** using a pattern matching technique or the like by referencing the PLU file **F1**. The pattern matching technique uses a known similar image searching technique that is performed by comparing two images. From a detection result of the similar image detection unit **611**, the POS terminal **11** is able to specify the product that is read by the product reading apparatus **101** out of the products that are registered in advance in the PLU file **F1**.

The product registration unit **612** performs sales registration by recording, on a sales master file or the like, information relating to the sales registration that is related to the product image that is detected by the similar image detection unit **611**, that is, the product ID, the product category, the product name, the unit price, and the like of the product that is specified as the product that is read by the product reading apparatus **101**.

Next, actions of the checkout system **1** will be described in detail. FIG. **5** illustrates a flowchart that is one example of the actions of the checkout system **1** according to the embodiment.

First, the actions of the product reading apparatus **101** side will be described. As illustrated in FIG. **5**, when processing is started according to the start of product registration by the POS terminal **11**, the captured image acquiring unit **1611** outputs an image capturing ON signal to the image capturing unit **164** and starts the image capturing by the image capturing unit **164** (Act 1). Next, the captured image acquiring unit **1611** acquires frame images (captured images) that the image capturing unit **164** captures and which are saved in the RAM **163** (Act 2). Next, the product detection unit **1612** performs detection of a product from the frame images that the captured image acquiring unit **1611** acquires (Act 3). Next, the image output unit **1613** outputs the frame images in which products are detected by the product detection unit **1612** to the POS terminal **11** (Act 4).

FIG. **6** illustrates a conceptual diagram that is an example of a reading region **R** of the reading window **103**. Specifically, FIG. **6** is a conceptual diagram that exemplifies the reading region **R** when the product **A** is read. As illustrated in FIG. **6**, when the product **A** appears in the reading region **R** during a movement process of the product **A** described above, the product **A** is detected from a frame image that is captured of the reading region **R** by Act 3. By the detection of the product **A**, the frame image that is captured of the reading region **R** is output to the POS terminal **11** in Act 4.

Next, the CPU **161** determines whether the procedure is ended by an ending notification of product registration or the like from the POS terminal **11** (Act 5). When the procedure is to be continued (Act 5: NO), the CPU **161** continues the process by returning the process to Act 2. When the procedure is to be ended (Act 5: YES), the captured image acquiring unit **1611** outputs an image capturing OFF signal to the image capturing unit **164** and ends the image capturing by the image capturing unit **164** (Act 6), and the process is ended.

Next, the actions of the POS terminal **11** side will be described. As illustrated in FIG. **5**, if processing is started according to the start of product registration or the like by an operating instruction by the keyboard **22**, the CPU **61** receives the frame image in which the product is detected which is input from the product reading apparatus **101** (Act 11). Next, the similar image detection unit **611** detects a product image

7

that is similar to at least a portion of a region of the frame image that is output from the product reading apparatus **101** by referencing the PLU file **F1** (Act **12**), and the presence or absence of the product image that is detected as being similar is determined (Act **13**).

When there are no product images that are detected as being similar (Act **13**: NO), the CPU **61** alerts of a reading error to the store clerk such as that registration relating to the product that is read by the product reading apparatus **101** is not performed (Act **14**), and the process is returned to Act **11**. Specifically, the store clerk is alerted of an error by a screen display on the display device **23** or the display device **106** via the connection interfaces **65** and **176**, an output of a warning sound by the sound output unit **165** via the connection interfaces **65** and **175**, or the like. By performing such an alert, the checkout system **1** is able to prompt the store clerk to perform an appropriate operation such as to have the product **A** reread.

When there is the product image that is detected as being similar (Act **13**: YES), the CPU **61** determines whether there is a plurality of such detected product images (Act **15**). When there is only one detected product image (Act **15**: NO), the CPU **61** proceeds the process to Act **17** from the fact that the product is specified by the reading by the product reading apparatus **101**. When there is a plurality of detected product images (Act **15**: YES), the CPU **61** displays a selection screen on the display device **106** due to the fact that the detection of the product images that are similar did not specify one product, receives a selection of one product by the store clerk by receiving an operation of the touch panel **105** (Act **16**), and the proceeds the process to Act **17**.

FIG. **7** illustrates a conceptual diagram that is one example of registration data **D1** and registration data **D2** that are registered on the PLU file **F1**. When the product **A** exemplified in FIG. **6** is read, a plurality of product images is detected as product images that are similar, as in the registration data **D1** and **D2** of FIG. **7**. In such a case, it is also possible to narrow down the registration data to the registration data **D1** by setting a threshold value when determining the degree of similarity to be high. However, there is also a case when, by raising the threshold value when determining the degree of similarity, similar images are conversely not detected at all, and there is the increased effort of having the product **A** reread. Therefore, in the embodiment, when a plurality of similar product images is detected, the effort of having the product **A** reread is eliminated by having the store clerk select a product from among the plurality of product images.

FIG. **8** illustrates a conceptual diagram of a display example of the display device **106**. Specifically, FIG. **8** is a conceptual diagram that exemplifies a selection screen of the display device **106** when a selection of one product from the store clerk is received. As illustrated in FIG. **8**, in Act **16**, product information related to the plurality of detected product images is read from the PLU file **F1** and images **G1** and **G2** of products to be selected are displayed on the display device **106**. In the example shown, the image **G1** that selects the product of the registration data **D1** and the image **G2** that selects the product of the registration data **D2** of FIG. **7** are displayed. The store clerk selects the image **G1** or the image **G2** by touching the touch panel **105**.

In Act **17**, the product registration unit **612** registers a detection result of a similar product image or the sale of one product that is selected and specified from the detection result. Next, the CPU **61** determines whether the procedure is ended by the ending of product registration by an operating instruction of the keyboard **22**, or the like (Act **18**). When the procedure is to be continued (Act **18**: NO), the CPU **61**

8

continues the process by returning the process to Act **11**. When the procedure is to be ended (Act **18**: YES), the CPU **61** ends the process.

As described above, in the checkout system **1**, the product reading apparatus **101** acquires a captured image and outputs the acquired image to the POS terminal **11**. The POS terminal **11** detects an image of a product that is similar to at least a portion of a region of the output image by referencing the PLU file **F1** in which information relating to sales registration of a product and an image of the product are associated for each product, and registers the sale of the product based on information relating to the sales registration that is related to the detected image of the product. Therefore, the checkout system **1** is able to perform product registration without the need for the store clerk to make the effort of checking a location of a code symbol that is attached to the product **A**, or the like.

A program that is executed by the POS terminal **11** and the product reading apparatus **101** in the embodiment is provided by being built into a ROM or the like in advance. The program that is executed by the POS terminal **11** and the product reading apparatus **101** of the embodiment may have a configuration of being provided by being recorded on a computer readable recording medium such as a CD-ROM, a flexible disk (FD), a CD-R, a DVD (Digital Versatile Disc), or the like in a file of an installable format or an executable format.

In addition, the program that is executed by the POS terminal **11** and the product reading apparatus **101** of the embodiment may have a configuration of being provided by being stored on a computer that is connected to a network such as the Internet and being caused to be downloaded through the network. Further, the program that is executed by the POS terminal **11** and the product reading apparatus **101** of the embodiment may have a configuration of being provided or distributed through a network such as the Internet.

The program that is executed by the POS terminal **11** and the product reading apparatus **101** of the embodiment has a module configuration including each of the parts described above (the similar image detection unit **611**, the product registration unit **612**, the captured image acquiring unit **1611**, the product detection unit **1612**, and the image output unit **1613**), and as actual hardware, each of the above parts is loaded on a main memory apparatus by a CPU (processor) reading the program from the above ROM and executing the program, and the similar image detection unit **611**, the product registration unit **612**, the captured image acquiring unit **1611**, the product detection unit **1612**, and the image output unit **1613** are generated on the main memory apparatus.

Further advantages and modifications of the invention may be derived readily by those skilled in the art. Accordingly, broader embodiments of the present invention are not limited by the details and the typical embodiments represented and described above. Thus, various modifications can be made without departing from the spirit or scope of the general concept of the present invention as defined in the appended claims and their equivalents.

What is claimed is:

1. A store system comprising:

- a memory in which product identification data assigned respectively to first, second, and third products displayed in a store, and respective product names, respective unit prices, and respective images of the first, second, and third products are stored;
- a display configured to display the respective product names, the respective unit prices, and the respective images of the first and second products in response to a determination that the respective images of the first and

second products are similar to at least a portion of an image captured by an image capturing unit, wherein the image is input when outlines extracted from a plurality of images sequentially captured by the image capturing unit are compared with each other and a portion in which there is a change between the outlines is detected as a product; and

a sales registration circuit configured to register, based on the unit price of a single one product selected from the first and second products displayed on the display, sale of the single one product.

2. The system according to claim 1,

wherein the memory is configured to store further respective product categories to which the first, second, and third products belong, and

the display is further configured to display the respective product identification data and the respective product categories of the first and second products of which the respective images are similar to at least the portion of the image captured by an image capturing unit.

3. The system according to claim 1,

wherein the first and second products of which the respective product names, the respective unit prices, and the respective images are displayed on the display are displayed on first and second display regions of the display, respectively, and

the sales registration circuit is configured to register the sale of the single one product in response to detection of a touch operation performed on one of the first or second display regions.

\* \* \* \* \*